EXPLODED VIEW (UNIT)

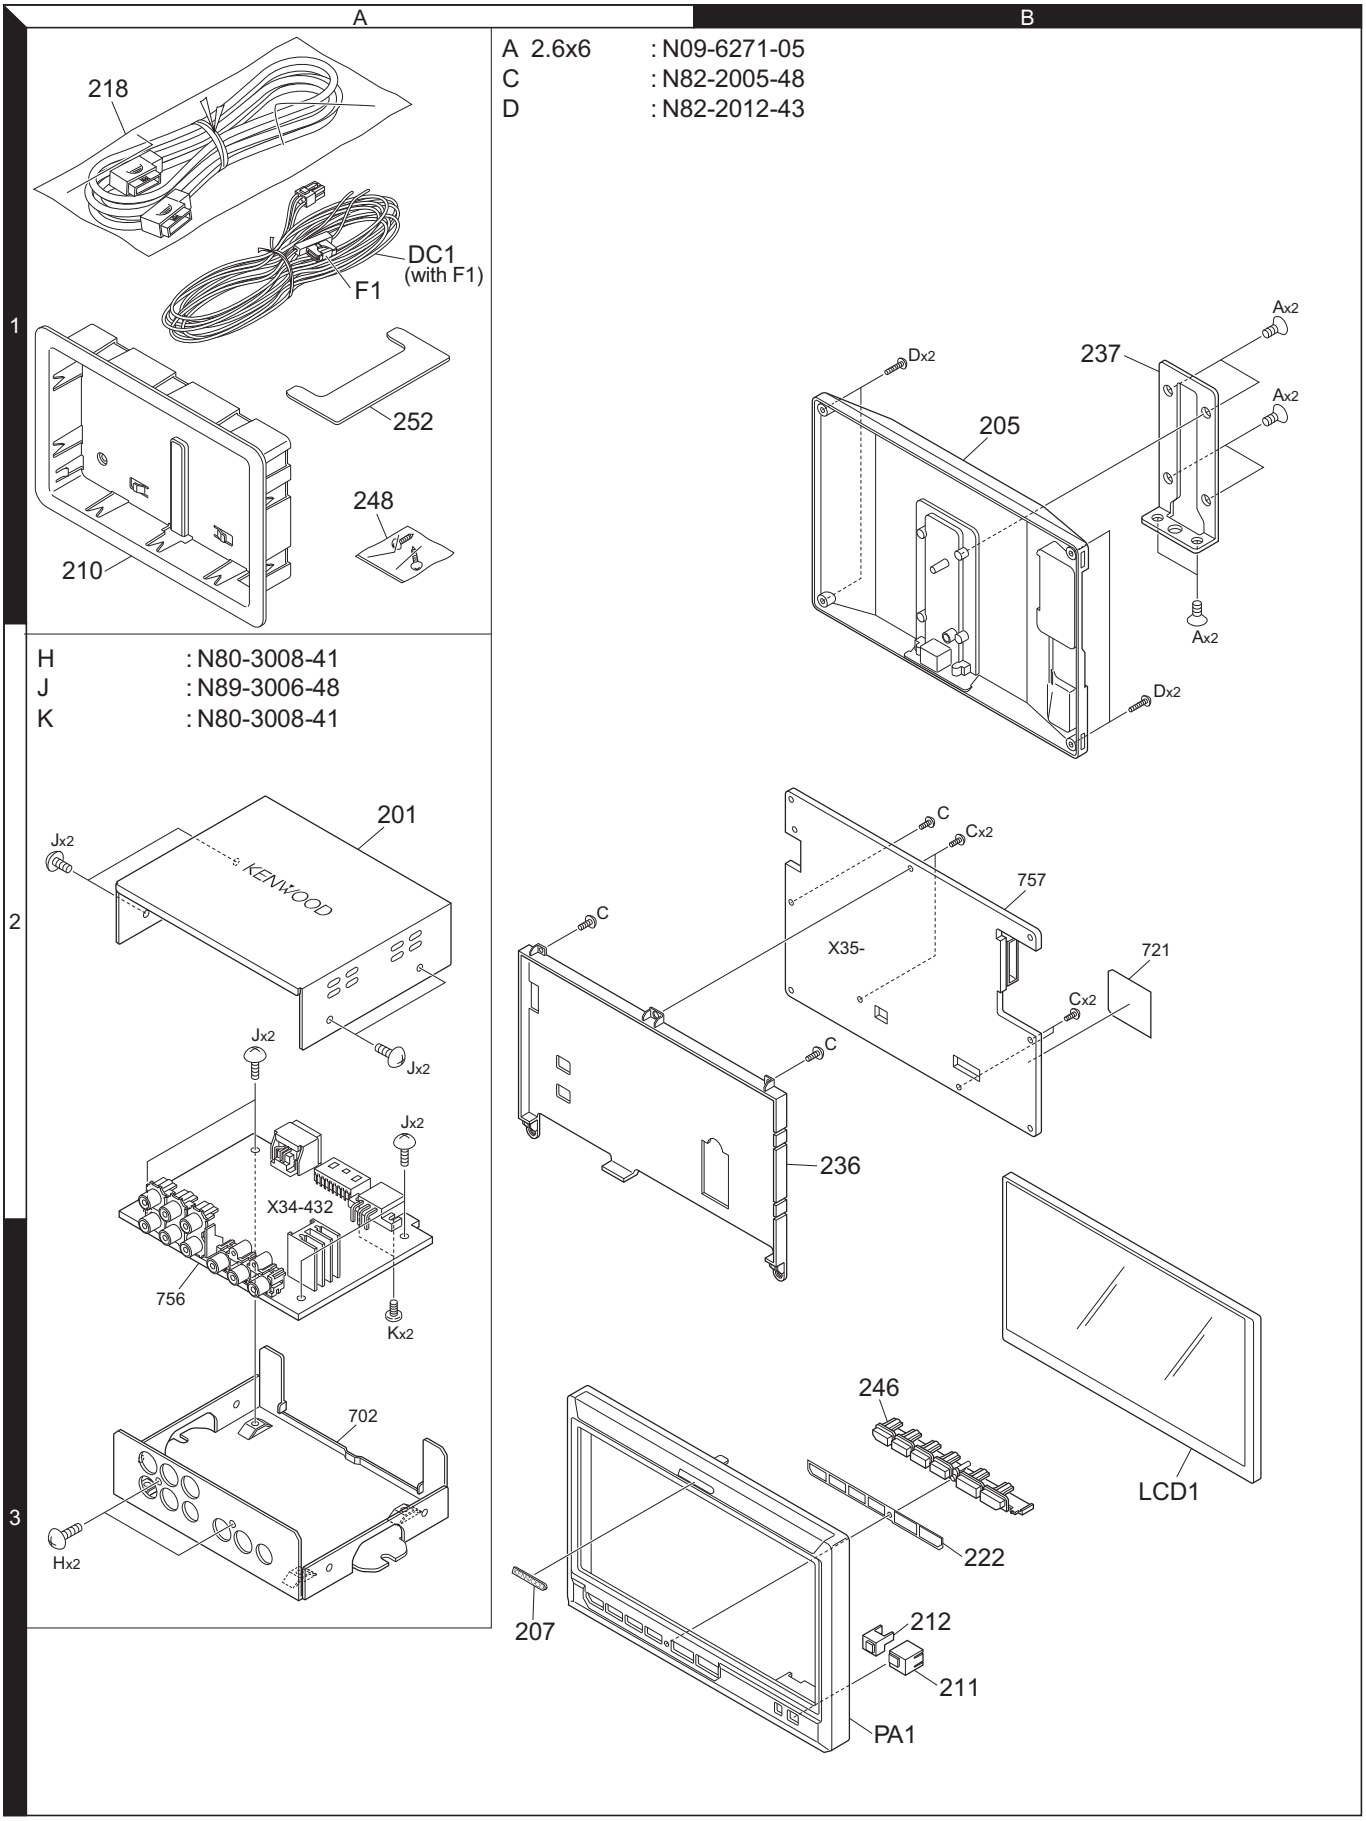

Parts with the exploded numbers larger than 700 are not supplied.

LZ-702IR

PARTS LIST

✻ New parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	Add	New	Parts No.	Description	Destination
LZ-702IR					
201	2A	✻	A01-4413-02	METALLIC CABINET	
205	1B	✻	A46-1838-01	REAR COVER	
PA1	3B	✻	A64-3922-02	PANEL ASSY	
-			B46-0682-00	WARRANTY CARD	
-		✻	B64-3413-00	INST. MANUAL (ENG.S-CHI)	
-		✻	B64-3413-00	INST. MANUAL (FRE.GER.DUT)	
-		✻	B64-3413-00	INST. MANUAL (ITA.SPA.POR)	
207	3A		B43-1527-04	BADGE	
210	1A	✻	B07-3174-01	ESCUTCHEON	
211	3B		B10-4721-03	FRONT GLASS	
212	3B		B10-4722-03	FRONT GLASS	
LCD1	3B		B38-1175-05	LCD	
218	1A	✻	E30-6538-05	CORD WITH PLUG (3.5m)	
DC1	1A	✻	E30-6587-05	DC CORD	
222	3B	✻	F19-1465-03	SHIELDING SHEET	
F1	1A		F52-0004-05	FUSE (MINI BLADE TYPE) (5A)	
-		✻	H02-0845-03	INNER CARTON CASE	
-		✻	H10-4984-02	POLYSTYRENE FOAMED FIXTURE	
-		✻	H12-2813-03	PACKING FIXTURE	
-			H25-0337-04	PROTECTION BAG (180X300X0.03)	
-			H25-1180-04	PROTECTION BAG (250X250X0.03)	
-			H25-1223-04	PROTECTION BAG (280X280X0.03)	
-		✻	H54-3784-03	ITEM CARTON CASE	
236	2B	✻	J19-7131-02	HOLDER (LCD)	
237	1B	✻	J19-7132-04	HOLDER (MOUNT)	
246	3B	✻	K25-1835-01	PUSH KNOB	
248	1A	✻	N99-1782-05	SCREW SET	
A	1B		N09-6271-05	TAPTITE SCREW (2.6X6)	
C	2B		N82-2005-48	BINDING HEAD TAPTITE SCREW	
D	1B	✻	N82-2012-43	BINDING HEAD TAPTITE SCREW	
H	3A		N80-3008-41	PAN HEAD TAPTITE SCREW	
J	2A		N89-3006-48	BINDING HEAD TAPTITE SCREW	
252	1A	✻	W01-1672-04	ACCESSORY	
ELECTRIC UNIT (X34-4320-61)					
C101			C90-5612-05	ELECTRO 3900UF 16WV	
C102,103			CK73GB1H104K	CHIP C 0.10UF K	
C109			CD04BJ1E470M	ELECTRO 47UF 25WV	
C110			CD04AS1C101M	ELECTRO 100UF 16WV	
C111			CK73GB1H104K	CHIP C 0.10UF K	
C112			CD04BJ1E470M	ELECTRO 47UF 25WV	
C113			CK73GB1H103K	CHIP C 0.010UF K	
C114			CD04AS1C101M	ELECTRO 100UF 16WV	
C115			CK73GB1H104K	CHIP C 0.10UF K	
C116			CK73FB1C105K	CHIP C 1.0UF K	
C119			CD04BA1C100M	ELECTRO 10UF 16WV	
C201,202			CK73GB1H102K	CHIP C 1000PF K	
C203			CD04BA1H2R2M	ELECTRO 2.2UF 50WV	
C204			CD04AY1H220M	ELECTRO 22UF 50WV	
C205			CD04BA1H2R2M	ELECTRO 2.2UF 50WV	
C206			CD04BA1C100M	ELECTRO 10UF 16WV	
C207			CK73GB1H104K	CHIP C 0.10UF K	
C208			CD04AY1H220M	ELECTRO 22UF 50WV	
C209			CD04BA1H2R2M	ELECTRO 2.2UF 50WV	
C210			CD04AY1H220M	ELECTRO 22UF 50WV	
C211			CD04BA1H2R2M	ELECTRO 2.2UF 50WV	
C212			CK73GB1H104K	CHIP C 0.10UF K	
C213			CD04BA1C100M	ELECTRO 10UF 16WV	
C214			CD04AY1H220M	ELECTRO 22UF 50WV	
C221			CK73GB1H222K	CHIP C 2200PF K	
C224,225			CK73GB1H102K	CHIP C 1000PF K	
C401			CK73FB1C105K	CHIP C 1.0UF K	
C402			CD04BJ0J331M	ELECTRO 330UF 6.3WV	
C403			CK73GB1H104K	CHIP C 0.10UF K	
C404			CD04BA1C100M	ELECTRO 10UF 16WV	
C405			CD04BJ1A221M	ELECTRO 220UF 10WV	
C406			CD04BJ0J331M	ELECTRO 330UF 6.3WV	
C407,408			CD04BA1C100M	ELECTRO 10UF 16WV	
C409,410			CK73GB1H222K	CHIP C 2200PF K	
C411			CD04BA1C100M	ELECTRO 10UF 16WV	
C412			CK73GB1H222K	CHIP C 2200PF K	
C501-504			CD04BA1C100M	ELECTRO 10UF 16WV	
C505			CK73FB1A225K	CHIP C 2.2UF K	
C506			CD04AX1C100M	NP-ELEC 10UF 16WV	
C509			CD04AX1C100M	NP-ELEC 10UF 16WV	
C510			CK73FB1A225K	CHIP C 2.2UF K	
C511			CD04AX1C100M	NP-ELEC 10UF 16WV	
C514			CD04AX1C100M	NP-ELEC 10UF 16WV	
C515			CK73GB1H104K	CHIP C 0.10UF K	
C801			CK73GB1H104K	CHIP C 0.10UF K	
J101			E58-0816-05	RECTANGULAR RECEPTACLE	
J102			E63-0917-05	PIN JACK	
J103			E63-0919-05	PIN JACK	
J801			E58-1035-05	RECTANGULAR RECEPTACLE	
L101			L33-2283-05	CHOKE COIL	
L102		✻	L33-2324-05	CHOKE COIL	
L103			L41-1005-33	SMALL FIXED INDUCTOR (10UH)	
K	3A		N80-3008-41	PAN HEAD TAPTITE SCREW	
R102			RK73EB2E000J	CHIP R 0.0 J 1/4W	
R105			RK73GB2A302J	CHIP R 3.0K J 1/10W	
R106			RK73GB2A183J	CHIP R 18K J 1/10W	
R107			RK73GB2A000J	CHIP R 0.0 J 1/10W	
R108			RK73EB2E104J	CHIP R 100K J 1/4W	
R110			RK73EB2E472J	CHIP R 4.7K J 1/4W	
R111			RK73GB2A473J	CHIP R 47K J 1/10W	
R113			RK73GB2A000J	CHIP R 0.0 J 1/10W	
R114,115			RK73GB2A103J	CHIP R 10K J 1/10W	
R116,117			RK73GB2A000J	CHIP R 0.0 J 1/10W	
R201-203			RK73GB2A000J	CHIP R 0.0 J 1/10W	
R204			RK73FB2B102J	CHIP R 1.0K J 1/8W	
R205			RK73FB2B101J	CHIP R 100 J 1/8W	
R206,207			RK73FB2B102J	CHIP R 1.0K J 1/8W	
R208			RK73FB2B101J	CHIP R 100 J 1/8W	

E : Europe **K** : North America **M** : Other Areas **W** : Without Europe

⚠ Indicates safety critical components.

PARTS LIST

ELECTRIC UNIT (X34-4320-61)

Ref. No.	Add	New	Parts No.	Description	Destination
R209			RK73FB2B102J	CHIP R 1.0K J 1/8W	
R210,211			RK73GB2A750J	CHIP R 75 J 1/10W	
R216,217			RK73GB2A000J	CHIP R 0.0 J 1/10W	
R218			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R401			RK73GB2A103J	CHIP R 10K J 1/10W	
R402			RK73EB2E750J	CHIP R 75 J 1/4W	
R403			RK73GB2A101J	CHIP R 100 J 1/10W	
R404,405			RK73GB2A301J	CHIP R 300 J 1/10W	
R406			RK73EB2E750J	CHIP R 75 J 1/4W	
R407,408			RK73FB2B471J	CHIP R 470 J 1/8W	
R409,410			RK73GB2A473J	CHIP R 47K J 1/10W	
R411			RK73FB2B100J	CHIP R 10 J 1/8W	
R412			RK73GB2A473J	CHIP R 47K J 1/10W	
R413			RK73GB2A000J	CHIP R 0.0 J 1/10W	
R414,415			RK73FB2B101J	CHIP R 100 J 1/8W	
R501			RK73FB2B101J	CHIP R 100 J 1/8W	
R502,503			RK73GB2A562J	CHIP R 5.6K J 1/10W	
R504			RK73FB2B101J	CHIP R 100 J 1/8W	
R505,506			RK73GB2A562J	CHIP R 5.6K J 1/10W	
R507,508			RK73GB2A473J	CHIP R 47K J 1/10W	
R509,510			RK73FB2B471J	CHIP R 470 J 1/8W	
R513,514			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R801			RK73FB2B101J	CHIP R 100 J 1/8W	
R803-805			RK73FB2B101J	CHIP R 100 J 1/8W	
R810			RK73GB2A000J	CHIP R 0.0 J 1/10W	
D101			RM10ZLFNF	DIODE	
D103			1SR154-400	DIODE	
D201-206			DA204U	DIODE	
D207			DAP202U	DIODE	
D401			DAP202U	DIODE	
D404			AVRM1608270MAA	VARISTOR	
D405,406			DAP202U	DIODE	
D501,502			STZ6.8N	ZENER DIODE	
D803			STZ6.8N	ZENER DIODE	
D805			STZ6.8N	ZENER DIODE	
D807			STZ6.8N	ZENER DIODE	
D808			STZ6.2N	ZENER DIODE	
D809,810			AVRM1608270MAA	VARISTOR	
IC101			BA00CCWT	ANALOGUE IC	
IC102			NJM78M05DL1AZB	ANALOGUE IC	
IC201,202			BA3121F	ANALOGUE IC	
IC401			NJM2267V-ZB	ANALOGUE IC	
IC501			CXA2089Q	ANALOGUE IC	
IC801			TC7WH34FU-F	MOS-IC	
Q104			DTC124EUA	DIGITAL TRANSISTOR	
Q401			2SA1576A	TRANSISTOR	
Q402,403			DTC323TU	DIGITAL TRANSISTOR	
Q404			DTA124EUA	DIGITAL TRANSISTOR	
Q405			DTC124EUA	DIGITAL TRANSISTOR	
Q406			DTA124EUA	DIGITAL TRANSISTOR	
VIDEO UNIT (X35-4640-62)					
C1			CK73HB1E103K	CHIP C 0.010UF K	
C2			CE32CL1C100M	CHIP EL 10UF 16WV	
C3			CC73HCH1H100D	CHIP C 10PF D	
C4			CK73EB1E225K	CHIP C 2.2UF K	

Ref. No.	Add	New	Parts No.	Description	Destination
C5			CK73HB1H102K	CHIP C 1000PF K	
C6			CK73HB1H561K	CHIP C 560PF K	
C7			CC73GCH1H102J	CHIP C 1000PF J	
C8			CK73EB1E105K	CHIP C 1.0UF K	
C9			CK73GB1H104K	CHIP C 0.10UF K	
C10			CK73HB1H102K	CHIP C 1000PF K	
C11			CC73GCH1H102J	CHIP C 1000PF J	
C13			CC73HCH1H390J	CHIP C 39PF J	
C14			CK73EB1A106K	CHIP C 10UF K	
C15			CK73GB1H104K	CHIP C 0.10UF K	
C16			CK73HB1H102K	CHIP C 1000PF K	
C17			CC73HCH1H390J	CHIP C 39PF J	
C18			CK73HB1H102K	CHIP C 1000PF K	
C20			CK73GB1H104K	CHIP C 0.10UF K	
C21			CK73HB1H102K	CHIP C 1000PF K	
C22			CK73GB1H104K	CHIP C 0.10UF K	
C23			CC73GCH1H680J	CHIP C 68PF J	
C24			CK73GB1H104K	CHIP C 0.10UF K	
C25,26			CK73HB1H102K	CHIP C 1000PF K	
C27			CC73GCH1H102J	CHIP C 1000PF J	
C28			CC73HCH1H101J	CHIP C 100PF J	
C29,30			CK73GB1H104K	CHIP C 0.10UF K	
C31			CC73GCH1H681J	CHIP C 680PF J	
C32			CK73GB1H104K	CHIP C 0.10UF K	
C33			CC73HCH1H101J	CHIP C 100PF J	
C34			CK73FB1A225K	CHIP C 2.2UF K	
C35			CK73EB1E105K	CHIP C 1.0UF K	
C36			CK73FB0J106K	CHIP C 10UF K	
C37			CK73FB1C105K	CHIP C 1.0UF K	
C38			CK73GB1H223K	CHIP C 0.022UF K	
C39,40			CC73GCH1H101J	CHIP C 100PF J	
C51			CK73GB1H104K	CHIP C 0.10UF K	
C81			CE32CL0J470M	CHIP EL 47UF 6.3WV	
C101			CK73EB1A106K	CHIP C 10UF K	
C104			CE32CL1C470M	CHIP EL 47UF 16WV	
C105			CK73GB1H104K	CHIP C 0.10UF K	
C107			CK73GB1H104K	CHIP C 0.10UF K	
C110			CE32CL1C220M	CHIP EL 22UF 16WV	
C111			CK73GB1H102K	CHIP C 1000PF K	
C112			CK73GB1A105K	CHIP C 1.0UF K	
C113			CE32CL1C220M	CHIP EL 22UF 16WV	
C114			CK73GB1H104K	CHIP C 0.10UF K	
C115,116			CK73GB1H102K	CHIP C 1000PF K	
C118			CK73GB1H103K	CHIP C 0.010UF K	
C120			CK73GB1H103K	CHIP C 0.010UF K	
C121			CK73GB1H104K	CHIP C 0.10UF K	
C122			CK73GB1H103K	CHIP C 0.010UF K	
C124			CK73GB1H103K	CHIP C 0.010UF K	
C125			CK73GB1H104K	CHIP C 0.10UF K	
C126			CK73GB1H103K	CHIP C 0.010UF K	
C127			CK73GB1H102K	CHIP C 1000PF K	
C128			CK73HB1E103K	CHIP C 0.010UF K	
C129			CK73GB1H103K	CHIP C 0.010UF K	
C130			CK73GB1A105K	CHIP C 1.0UF K	
C131			CC73GCH1H821J	CHIP C 820PF J	

E : Europe **K** : North America **M** : Other Areas **W** : Without Europe

⚠ Indicates safety critical components.

PARTS LIST

VIDEO UNIT (X35-4640-62)

Ref. No.	Add	New	Parts No.	Description			Destination
C132			CK73EB1A106K	CHIP C	10UF	K	
C133			CK73GB1A105K	CHIP C	1.0UF	K	
C134			CK73GB1H104K	CHIP C	0.10UF	K	
C135			CK73GB1H682K	CHIP C	6800PF	K	
C136			CK73EB1A106K	CHIP C	10UF	K	
C138			CK73GB1H104K	CHIP C	0.10UF	K	
C139			CE32CL1C470M	CHIP EL	47UF	16WV	
C140			CK73GB1H104K	CHIP C	0.10UF	K	
C141			CK73GB1H103K	CHIP C	0.010UF	K	
C142,143			CC73GCH1H080D	CHIP C	8.0PF	D	
C144-146			CK73GB1A105K	CHIP C	1.0UF	K	
C147			CK73GB1A474K	CHIP C	0.47UF	K	
C148-150			CK73HB1E103K	CHIP C	0.010UF	K	
C200,201			CK73GB1H103K	CHIP C	0.010UF	K	
C202			CK73FB0J106K	CHIP C	10UF	K	
C210			CK73GB1H103K	CHIP C	0.010UF	K	
C218			CK73GB1H104K	CHIP C	0.10UF	K	
C221			CC73GCH1H270J	CHIP C	27PF	J	
C227			CK73GB1H153K	CHIP C	0.015UF	K	
C228			CK73EB1E105K	CHIP C	1.0UF	K	
C231,232			CK73GB1H104K	CHIP C	0.10UF	K	
C234			CK73GB1H104K	CHIP C	0.10UF	K	
C252			CK73GB1H104K	CHIP C	0.10UF	K	
C253			CK73DF1E106Z	CHIP C	10UF	Z	
C254			CK73EB1E105K	CHIP C	1.0UF	K	
C255			CC73GCH1H270J	CHIP C	27PF	J	
C257			CK73FB0J106K	CHIP C	10UF	K	
C259			CK73GB1H104K	CHIP C	0.10UF	K	
C270			CK73GB1A105K	CHIP C	1.0UF	K	
C300			CE32CL0J101M	CHIP EL	100UF	6.3WV	
C301			CK73HB1E103K	CHIP C	0.010UF	K	
C302			CK73HB1H102K	CHIP C	1000PF	K	
C303			CE32BM1C100M	CHIP EL	10UF	16WV	
C305			CK73GB1H104K	CHIP C	0.10UF	K	
C306,307			CK73HB1H102K	CHIP C	1000PF	K	
C308			CK73GB1H104K	CHIP C	0.10UF	K	
C309			CC73GCH1H101J	CHIP C	100PF	J	
C310,311			CK73GB1H104K	CHIP C	0.10UF	K	
C312			CK73GB1H153K	CHIP C	0.015UF	K	
C313			CC73HCH1H020C	CHIP C	2.0PF	C	
C314			CC73HCH1H101J	CHIP C	100PF	J	
C315			CK73GB1H104K	CHIP C	0.10UF	K	
C317-320			CC73GCH1H101J	CHIP C	100PF	J	
C321-323			CC73HCH1H100D	CHIP C	10PF	D	
C324			CK73GB1H102K	CHIP C	1000PF	K	
C325			CK73GB1H103K	CHIP C	0.010UF	K	
C326,327			CK73GB1H104K	CHIP C	0.10UF	K	
C329			CK73GB1H102K	CHIP C	1000PF	K	
C400			CE32BM1C100M	CHIP EL	10UF	16WV	
C401			CK73GB1H104K	CHIP C	0.10UF	K	
C402			CK73GB1H103K	CHIP C	0.010UF	K	
C403			CE32BM1C100M	CHIP EL	10UF	16WV	
C404,405			CK73GB1H103K	CHIP C	0.010UF	K	
C406			CK73FB1C105K	CHIP C	1.0UF	K	
C407-409			CK73GB1H103K	CHIP C	0.010UF	K	

Ref. No.	Add	New	Parts No.	Description			Destination
C410			CK73GB1H104K	CHIP C	0.10UF	K	
C412			CK73GB1H104K	CHIP C	0.10UF	K	
C413			CK73FB1C105K	CHIP C	1.0UF	K	
C500			CK73FB1C105K	CHIP C	1.0UF	K	
C501			CK73GB1A474K	CHIP C	0.47UF	K	
C502			CK73GB1H152K	CHIP C	1500PF	K	
C503			CK73GB1A105K	CHIP C	1.0UF	K	
C504			CK73GB1A474K	CHIP C	0.47UF	K	
C505			CK73GB1H103K	CHIP C	0.010UF	K	
C506			CK73EB1E105K	CHIP C	1.0UF	K	
C507			C93-1363-05	CHIP C	10PF		
C508			CK73GB1H103K	CHIP C	0.010UF	K	
C509			CK73GB1H104K	CHIP C	0.10UF	K	
C510			C93-1377-05	CHIP C	4700PF	50WV	
C511			CK73GB1H104K	CHIP C	0.10UF	K	
C512			CK73FB1C105K	CHIP C	1.0UF	K	
C513-515			CK73GB1H104K	CHIP C	0.10UF	K	
C516			CC73GCH1H101J	CHIP C	100PF	J	
C517			CC73GCH1H221J	CHIP C	220PF	J	
C518			CC73GCH1H101J	CHIP C	100PF	J	
C519			CE32BM1C220M	CHIP EL	22UF	16WV	
C520-522			CK73GB1H104K	CHIP C	0.10UF	K	
C523			CK73GB1H102K	CHIP C	1000PF	K	
C524			CK73GB1H104K	CHIP C	0.10UF	K	
C525			CE32CL1C470M	CHIP EL	47UF	16WV	
C526			CK73GB1H103K	CHIP C	0.010UF	K	
C527			CK73GB1H102K	CHIP C	1000PF	K	
C528			CE32CL0J470M	CHIP EL	47UF	6.3WV	
C529			CK73GB1A334K	CHIP C	0.33UF	K	
C530			CE32BM1C221M	CHIP EL	220UF	16WV	
C531			CK73GB1A105K	CHIP C	1.0UF	K	
C532			CK73FB1C105K	CHIP C	1.0UF	K	
C533			CE32BM1C221M	CHIP EL	220UF	16WV	
C534,535			CK73FB1C105K	CHIP C	1.0UF	K	
C536			CK73GB1H104K	CHIP C	0.10UF	K	
C537			CE32BJ1C470M	CHIP EL	47UF	16WV	
C538,539			CE32BM1C220M	CHIP EL	22UF	16WV	
C542			CK73GB1H103K	CHIP C	0.010UF	K	
C547			CK73EB1E105K	CHIP C	1.0UF	K	
C548			CE32BJ1C101M	CHIP EL	100UF	16WV	
C549			CE32CL1C470M	CHIP EL	47UF	16WV	
C800			CE32CL1C100M	CHIP EL	10UF	16WV	
C801,802			CK73GB1C224K	CHIP C	0.22UF	K	
C803			CE32BJ1H4R7M	CHIP EL	4.7UF	50WV	
C804			CE32BJ1C470M	CHIP EL	47UF	16WV	
C805			CK73GB1H104K	CHIP C	0.10UF	K	
C806			CE32BJ1C470M	CHIP EL	47UF	16WV	
C807			CE32BJ1C101M	CHIP EL	100UF	16WV	
C808			CE32CL1C220M	CHIP EL	22UF	16WV	
C819			CE32BJ1H4R7M	CHIP EL	4.7UF	50WV	
C820			CK73GB1H104K	CHIP C	0.10UF	K	
C821,822			CE32CL1C100M	CHIP EL	10UF	16WV	
C824,825			CK73GB1H104K	CHIP C	0.10UF	K	
C904			C90-5670-05	ELECTRO	2200UF	16WV	
C906			CE32BM1C221M	CHIP EL	220UF	16WV	

E : Europe **K** : North America **M** : Other Areas **W** : Without Europe

⚠ Indicates safety critical components.

PARTS LIST

VIDEO UNIT (X35-4640-62)

Ref. No.	Add	New	Parts No.	Description	Destination
C907-909			CK73GB0J475K	CHIP C 4.7UF K	
C910,911			CE32BM1C221M	CHIP EL 220UF 16WV	
C913			CE32BF1C221M	CHIP EL 220UF 16WV	
C914			CK73GB1H104K	CHIP C 0.10UF K	
CN1			E41-2208-05	FLAT CABLE CONNECTOR	
CN300			E41-2435-05	FLAT CABLE CONNECTOR	
CN302			E41-2642-05	PIN ASSY	
J900			E58-1035-05	RECTANGULAR RECEPTACLE	
F501			F53-0374-05	FUSE (1.5A)	
F901		✻	F53-0388-05	FUSE (1.25A)	
L1-4			L41-1005-33	SMALL FIXED INDUCTOR (10UH)	
L5			L40-6895-85	SMALL FIXED INDUCTOR (6.8UH)	
L6			L92-0397-05	CHIP FERRITE	
L100			L41-1005-33	SMALL FIXED INDUCTOR (10UH)	
L102-104			L41-1005-33	SMALL FIXED INDUCTOR (10UH)	
L201			L33-2299-05	CHOKE COIL	
L500		✻	L19-0793-05	TRANSFORMER FOR CONVERTER	
L501-503			L33-2258-05	SMALL FIXED INDUCTOR (47UH)	
L800			L41-1005-33	SMALL FIXED INDUCTOR (10UH)	
L901,902			L33-2258-05	SMALL FIXED INDUCTOR (47UH)	
X100			L77-2906-05	CRYSTAL RESONATOR (4.433619MHZ)	
X101			L77-2905-05	CRYSTAL RESONATOR (3.579545MHZ)	
X300			L78-1212-05	RESONATOR (16.00MHZ)	
CP300			RK74HB1J101J	CHIP-COM 100 J 1/16W	
CP301			RK74HB1J103J	CHIP-COM 10K J 1/16W	
CP302			RK74HB1J101J	CHIP-COM 100 J 1/16W	
CP303			RK74HB1J103J	CHIP-COM 10K J 1/16W	
CP304-309			RK74HB1J101J	CHIP-COM 100 J 1/16W	
CP310			RK74HB1J103J	CHIP-COM 10K J 1/16W	
CP312-315			RK74HB1J101J	CHIP-COM 100 J 1/16W	
CP322			RK74HB1J101J	CHIP-COM 100 J 1/16W	
CP323			RK74HB1J103J	CHIP-COM 10K J 1/16W	
CP325			RK74HB1J103J	CHIP-COM 10K J 1/16W	
R1			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R4,5			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R8-10			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R17			RK73HB1J101J	CHIP R 100 J 1/16W	
R18			RK73HB1J621J	CHIP R 620 J 1/16W	
R21,22			RK73HB1J221J	CHIP R 220 J 1/16W	
R23			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R24			RK73HB1J561J	CHIP R 560 J 1/16W	
R25			RK73HB1J103J	CHIP R 10K J 1/16W	
R26			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R27			RK73HB1J103J	CHIP R 10K J 1/16W	
R28,29			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R30,31			RK73HB1J103J	CHIP R 10K J 1/16W	
R32			RK73HB1J100J	CHIP R 10 J 1/16W	
R33			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R34			RK73HH1J472D	CHIP R 4.7K D 1/16W	
R35			RK73GH2A152D	CHIP R 1.5K D 1/10W	
R36			RK73HB1J100J	CHIP R 10 J 1/16W	
R37			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R38,39			RK73HH1J472D	CHIP R 4.7K D 1/16W	

Ref. No.	Add	New	Parts No.	Description	Destination
R40			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R41			RK73HH1J473D	CHIP R 47K D 1/16W	
R42			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R43			RK73HH1J683D	CHIP R 68K D 1/16W	
R44			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R45			RK73HH1J153D	CHIP R 15K D 1/16W	
R46			RK73HH1J101D	CHIP R 100 D 1/16W	
R47			RK73HH1J331D	CHIP R 330 D 1/16W	
R48			RK73HH1J182D	CHIP R 1.8K D 1/16W	
R49			RK73HH1J332D	CHIP R 3.3K D 1/16W	
R51			RK73HB1J330J	CHIP R 33 J 1/16W	
R52-54			RK73HB1J101J	CHIP R 100 J 1/16W	
R55			RK73HH1J153D	CHIP R 15K D 1/16W	
R56-63			RK73HB1J101J	CHIP R 100 J 1/16W	
R64			RK73HH1J105D	CHIP R 1.0M D 1/16W	
R65			RK73HH1J683D	CHIP R 68K D 1/16W	
R66			RK73GH2A512D	CHIP R 5.1K D 1/10W	
R67			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R68			RK73GH2A512D	CHIP R 5.1K D 1/10W	
R69			RK73GH2A752D	CHIP R 7.5K D 1/10W	
R70-73			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R74			RK73HB1J221J	CHIP R 220 J 1/16W	
R75			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R88,89			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R98			RK73HB1J221J	CHIP R 220 J 1/16W	
R100			RK73HB1J101J	CHIP R 100 J 1/16W	
R101,102			RK73HB1J303J	CHIP R 30K J 1/16W	
R103			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R110			RK73HB1J103J	CHIP R 10K J 1/16W	
R111			RK73HB1J473J	CHIP R 47K J 1/16W	
R112			RK73HB1J103J	CHIP R 10K J 1/16W	
R113			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R114-116			RK73HB1J103J	CHIP R 10K J 1/16W	
R117			RK73HB1J271J	CHIP R 270 J 1/16W	
R118,119			RK73GH2A102D	CHIP R 1.0K D 1/10W	
R120			RK73GH2A183D	CHIP R 18K D 1/10W	
R121			RN73GH1J472D	CHIP R 4.7K D 1/16W	
R122			RK73HB1J101J	CHIP R 100 J 1/16W	
R123			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R124,125			RK73GH2A102D	CHIP R 1.0K D 1/10W	
R126			RK73HB1J101J	CHIP R 100 J 1/16W	
R128			RK73GH2A512D	CHIP R 5.1K D 1/10W	
R129			RK73GH2A152D	CHIP R 1.5K D 1/10W	
R130			RK73HB1J101J	CHIP R 100 J 1/16W	
R132			RN73GH1J472D	CHIP R 4.7K D 1/16W	
R133			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R134			RN73GH1J222D	CHIP R 2.2K D 1/16W	
R135,136			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R137,138			RK73GH2A102D	CHIP R 1.0K D 1/10W	
R139			RK73HB1J561J	CHIP R 560 J 1/16W	
R140-142			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R143			RN73GH1J472D	CHIP R 4.7K D 1/16W	
R144			RK73HB1J105J	CHIP R 1.0M J 1/16W	
R145			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R146			RN73GH1J103D	CHIP R 10K D 1/16W	

E : Europe **K** : North America **M** : Other Areas **W** : Without Europe

⚠ Indicates safety critical components.

PARTS LIST

VIDEO UNIT (X35-4640-62)

Ref. No.	Add	New	Parts No.	Description				Destination
R147			RN73GH1J302D	CHIP R	3.0K	D	1/16W	
R149			RK73HB1J105J	CHIP R	1.0M	J	1/16W	
R150			RN73GH1J103D	CHIP R	10K	D	1/16W	
R151			RN73GH1J302D	CHIP R	3.0K	D	1/16W	
R152			RK73HB1J102J	CHIP R	1.0K	J	1/16W	
R153			RN73GH1J103D	CHIP R	10K	D	1/16W	
R154			RN73GH1J302D	CHIP R	3.0K	D	1/16W	
R155			RN73GH1J681D	CHIP R	680	D	1/16W	
R156			RN73GH1J222D	CHIP R	2.2K	D	1/16W	
R158			RK73HB1J822J	CHIP R	8.2K	J	1/16W	
R159			RK73HB1J562J	CHIP R	5.6K	J	1/16W	
R160			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R162-165			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R167			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R172			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R173			RK73HB1J820J	CHIP R	82	J	1/16W	
R174			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R175			RK73HB1J101J	CHIP R	100	J	1/16W	
R176,177			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R219			RK73GB2A104J	CHIP R	100K	J	1/10W	
R226			RK73EB2E000J	CHIP R	0.0	J	1/4W	
R227			RK73GB2A682J	CHIP R	6.8K	J	1/10W	
R228			RK73GH2A203D	CHIP R	20K	D	1/10W	
R230			RK73GB2A100J	CHIP R	10	J	1/10W	
R231			RK73GH2A184D	CHIP R	180K	D	1/10W	
R233			RK73GH2A184D	CHIP R	180K	D	1/10W	
R235			RK73GH2A133D	CHIP R	13K	D	1/10W	
R236			RK73GB2A100J	CHIP R	10	J	1/10W	
R237			RK73GH2A184D	CHIP R	180K	D	1/10W	
R256			RK73GH2A203D	CHIP R	20K	D	1/10W	
R265			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R270			RK73GB2A105J	CHIP R	1.0M	J	1/10W	
R274			RK73GH2A123D	CHIP R	12K	D	1/10W	
R289			RK73GH2A243D	CHIP R	24K	D	1/10W	
R297,298			RK73GB2A682J	CHIP R	6.8K	J	1/10W	
R300			RK73GB2A101J	CHIP R	100	J	1/10W	
R301			RK73HB1J103J	CHIP R	10K	J	1/16W	
R302			RK73HB1J102J	CHIP R	1.0K	J	1/16W	
R303			RK73HB1J104J	CHIP R	100K	J	1/16W	
R304			RK73HB1J331J	CHIP R	330	J	1/16W	
R305			RK73HB1J102J	CHIP R	1.0K	J	1/16W	
R306,307			RK73HB1J101J	CHIP R	100	J	1/16W	
R308			RK73HB1J332J	CHIP R	3.3K	J	1/16W	
R309			RK73HB1J103J	CHIP R	10K	J	1/16W	
R311			RK73HB1J101J	CHIP R	100	J	1/16W	
R312			RK73HB1J332J	CHIP R	3.3K	J	1/16W	
R313			RK73GB2A473J	CHIP R	47K	J	1/10W	
R314			RK73HB1J223J	CHIP R	22K	J	1/16W	
R315			RK73HB1J621J	CHIP R	620	J	1/16W	
R316			RK73HB1J103J	CHIP R	10K	J	1/16W	
R317			RK73HB1J621J	CHIP R	620	J	1/16W	
R318			RK73HB1J101J	CHIP R	100	J	1/16W	
R319			RK73HB1J621J	CHIP R	620	J	1/16W	
R320			RK73HB1J101J	CHIP R	100	J	1/16W	
R321			RK73HB1J103J	CHIP R	10K	J	1/16W	

Ref. No.	Add	New	Parts No.	Description				Destination
R322			RK73HB1J101J	CHIP R	100	J	1/16W	
R324			RK73HB1J101J	CHIP R	100	J	1/16W	
R325			RK73HB1J223J	CHIP R	22K	J	1/16W	
R326-329			RK73HB1J101J	CHIP R	100	J	1/16W	
R330,331			RK73HB1J103J	CHIP R	10K	J	1/16W	
R332,333			RK73HB1J101J	CHIP R	100	J	1/16W	
R334			RK73HB1J103J	CHIP R	10K	J	1/16W	
R337			RK73HB1J000J	CHIP R	0.0	J	1/16W	
R400			RK73GB2A101J	CHIP R	100	J	1/10W	
R401			RK73FB2B100J	CHIP R	10	J	1/8W	
R403			RK73GB2A220J	CHIP R	22	J	1/10W	
R404			RK73GB2A681J	CHIP R	680	J	1/10W	
R405			RK73GB2A101J	CHIP R	100	J	1/10W	
R406			RK73GB2A102J	CHIP R	1.0K	J	1/10W	
R407			RK73GB2A681J	CHIP R	680	J	1/10W	
R408			RK73GB2A102J	CHIP R	1.0K	J	1/10W	
R410			RK73FB2B100J	CHIP R	10	J	1/8W	
R411			RK73GB2A333J	CHIP R	33K	J	1/10W	
R412			RK73GB2A681J	CHIP R	680	J	1/10W	
R413			RK73GB2A102J	CHIP R	1.0K	J	1/10W	
R414			RK73GB2A473J	CHIP R	47K	J	1/10W	
R415			RK73GB2A681J	CHIP R	680	J	1/10W	
R416			RK73GB2A102J	CHIP R	1.0K	J	1/10W	
R417			RK73GB2A681J	CHIP R	680	J	1/10W	
R418			RK73GB2A102J	CHIP R	1.0K	J	1/10W	
R419			RK73GB2A681J	CHIP R	680	J	1/10W	
R420,421			RK73GB2A102J	CHIP R	1.0K	J	1/10W	
R500,501		*	RK73PB2H1R0J	CHIP R	1.0	J	1/2W	
R502			RK73GB2A304J	CHIP R	300K	J	1/10W	
R503			RK73GB2A102J	CHIP R	1.0K	J	1/10W	
R504			RK73GB2A224J	CHIP R	220K	J	1/10W	
R505,506			RK73GB2A103J	CHIP R	10K	J	1/10W	
R507			RK73GB2A304J	CHIP R	300K	J	1/10W	
R508			RK73GB2A222J	CHIP R	2.2K	J	1/10W	
R509			RK73GB2A131J	CHIP R	130	J	1/10W	
R510-512			RK73GB2A104J	CHIP R	100K	J	1/10W	
R513			RK73GB2A432J	CHIP R	4.3K	J	1/10W	
R514			RK73GB2A102J	CHIP R	1.0K	J	1/10W	
R516,517			RK73GB2A103J	CHIP R	10K	J	1/10W	
R518			RK73GB2A102J	CHIP R	1.0K	J	1/10W	
R519,520			RK73GB2A103J	CHIP R	10K	J	1/10W	
R521			RN73GH1J103D	CHIP R	10K	D	1/16W	
R522			RN73GH1J622D	CHIP R	6.2K	D	1/16W	
R523,524			RK73GB2A223J	CHIP R	22K	J	1/10W	
R525			RK73GB2A472J	CHIP R	4.7K	J	1/10W	
R526			RK73GB2A330J	CHIP R	33	J	1/10W	
R527			RK73GB2A102J	CHIP R	1.0K	J	1/10W	
R528			RK73GB2A470J	CHIP R	47	J	1/10W	
R529,530			RK73GB2A221J	CHIP R	220	J	1/10W	
R531			RK73GB2A330J	CHIP R	33	J	1/10W	
R532			RK73GB2A470J	CHIP R	47	J	1/10W	
R533			RN73GH1J363D	CHIP R	36K	D	1/16W	
R534			RK73GB2A393J	CHIP R	39K	J	1/10W	
R535			RK73GB2A563J	CHIP R	56K	J	1/10W	
R536			RK73GB2A823J	CHIP R	82K	J	1/10W	

E : Europe **K** : North America **M** : Other Areas **W** : Without Europe

⚠ Indicates safety critical components.

PARTS LIST

VIDEO UNIT (X35-4640-62)

Ref. No.	Add	New	Parts No.	Description	Destination
R537			RK73GB2A563J	CHIP R 56K J 1/10W	
R538,539			RK73EB2E471J	CHIP R 470 J 1/4W	
R541			RK73GB2A103J	CHIP R 10K J 1/10W	
R542			RK73GB2A183J	CHIP R 18K J 1/10W	
R545			RK73GB2A183J	CHIP R 18K J 1/10W	
R547			RN73GH1J183D	CHIP R 18K D 1/16W	
R548			RN73GH1J332D	CHIP R 3.3K D 1/16W	
R549			RK73GB2A000J	CHIP R 0.0 J 1/10W	
R800,801			RK73GB2A103J	CHIP R 10K J 1/10W	
R802			RK73GB2A105J	CHIP R 1.0M J 1/10W	
R803,804			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R805,806			RK73GB2A471J	CHIP R 470 J 1/10W	
R807			RK73GB2A101J	CHIP R 100 J 1/10W	
R808			RK73GB2A122J	CHIP R 1.2K J 1/10W	
R809			RK73GB2A120J	CHIP R 12 J 1/10W	
R810			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R811			RK73GB2A101J	CHIP R 100 J 1/10W	
R812			RK73GB2A120J	CHIP R 12 J 1/10W	
R813			RK73GB2A152J	CHIP R 1.5K J 1/10W	
R816			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R900			RK73FB2B750J	CHIP R 75 J 1/8W	
R901-906			RK73EB2E101J	CHIP R 100 J 1/4W	
R907,908			RK73FB2B101J	CHIP R 100 J 1/8W	
R909-911			RK73FB2B750J	CHIP R 75 J 1/8W	
R912			RK73FB2B101J	CHIP R 100 J 1/8W	
R913-915			RK73FB2B000J	CHIP R 0.0 J 1/8W	
R921-923			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R930			RK73HB1J000J	CHIP R 0.0 J 1/16W	
R985			RK73HB1J103J	CHIP R 10K J 1/16W	
R986			RK73GB2A363J	CHIP R 36K J 1/10W	
R987			RS14KB3D1R5J	FL-PROOF RS 1.5 J 2W	
VR3			R32-0328-05	SEMI FIXED VARIABLE RESISTOR	
VR100			R32-0328-05	SEMI FIXED VARIABLE RESISTOR	
VR500			R32-0328-05	SEMI FIXED VARIABLE RESISTOR	
VR800-803		✻	R32-0332-05	SEMI FIXED VARIABLE RESISTOR	
S400-405		✻	S70-0933-05	TACT SWITCH	
S406			S70-0851-05	TACT SWITCH	
D2			MA2X335	VARIABLE CAPACITANCE DIODE	
D4			DA204U	DIODE	
D101			DAN202U	DIODE	
D214			EP05Q04	DIODE	
D216			EC10QS04AG	DIODE	
D217			EP05Q04	DIODE	
D240,241			EP05Q04	DIODE	
D301,302			DAN202U	DIODE	
D303			DAP202U	DIODE	
D400			DA204U	DIODE	
D401-406			UDZS5.1B	ZENER DIODE	
D407			DAN202U	DIODE	
D408			UDZS6.8B	ZENER DIODE	
D500,501			EC31QS04AG	DIODE	
D502			UDZS6.8B	ZENER DIODE	
D800-807		✻	DNF324U-4	INFRARED LED	
D900,901			STZ6.2N	ZENER DIODE	

Ref. No.	Add	New	Parts No.	Description	Destination
D902,903			DA204U	DIODE	
D904,905			STZ6.2N	ZENER DIODE	
D906,907			DA204U	DIODE	
D909,910			AVRM1608180M6A	VARISTOR	
D912			DAP202U	DIODE	
D915			DAP202U	DIODE	
D916			1SR154-400	DIODE	
IC1			TC7SH08FU-F	MOS-IC	
IC3			TC200G02G0104	MOS-IC	
IC4			NJM2107F-ZB	ANALOGUE IC	
IC101			TC7SET04FU-F	MOS-IC	
IC103			RB5P0090M	ANALOGUE IC	
IC104			TC7SET32FU-F	MOS-IC	
IC105			TC7SET08FU-F	MOS-IC	
IC106			TC7SET04FU-F	MOS-IC	
IC108			TC7SET32FU-F	MOS-IC	
IC202			MP1530DM-LF-Z	ANALOGUE IC	
IC300			S-80830CNNB-G	MOS-IC	
IC301		✻	M306VPMGD513F	MICROPROCESSOR IC	
IC302			S-24CS04AFT	ROM IC	
IC303			S-24CS02AFTTBG	ROM IC	
IC304			TC7W53FU-F	MOS-IC	
IC400			RS-171	ANALOGUE IC	
IC401			TPS855	ANALOGUE IC	
IC402			TC7SH08FU-F	MOS-IC	
IC500			MP1015EMC011LF	ANALOGUE IC	
IC501			BA9743AFV	ANALOGUE IC	
IC502			TA58L05F	ANALOGUE IC	
IC503			SI-3033LUSNF	ANALOGUE IC	
IC505			SI-3050KMS	ANALOGUE IC	
IC506			SI-3033LUSNF	ANALOGUE IC	
IC800		✻	TA2181AFNG	ANALOGUE IC	
IC803,804			TC7W53FU-F	MOS-IC	
IC901			TC7SH08FU-F	MOS-IC	
Q1			2SC4097	TRANSISTOR	
Q100			2SC4081	TRANSISTOR	
Q102			DTC143ZUA	DIGITAL TRANSISTOR	
Q103-106			UMZ1N	TRANSISTOR	
Q109,110			DTA124EUA	DIGITAL TRANSISTOR	
Q111			DTC323TU	DIGITAL TRANSISTOR	
Q114			DTC323TU	DIGITAL TRANSISTOR	
Q116,117			DTC323TU	DIGITAL TRANSISTOR	
Q300			DTA124EUA	DIGITAL TRANSISTOR	
Q301,302			DTC124EUA	DIGITAL TRANSISTOR	
Q500,501			IMZ4	TRANSISTOR	
Q502,503			2SJ599-Z-E	FET	
Q504			DTA124EUA	DIGITAL TRANSISTOR	
Q505			DTC124EUA	DIGITAL TRANSISTOR	
Q506			2SC4081	TRANSISTOR	
Q800,801			DTC124EUA	DIGITAL TRANSISTOR	
Q803			2SD1757K	TRANSISTOR	
Q804-806			DTC124EUA	DIGITAL TRANSISTOR	
Q809			2SD1757K	TRANSISTOR	
Q810,811			DTC323TU	DIGITAL TRANSISTOR	
Q812			DTA124EUA	DIGITAL TRANSISTOR	

E : Europe **K** : North America **M** : Other Areas **W** : Without Europe

⚠ Indicates safety critical components.

PARTS LIST

VIDEO UNIT (X35-4640-62)

Ref. No.	Add	New	Parts No.	Description	Destination
Q815,816 Q818 Q819			DTC124EUA 2SA1577 DTC144EUA	DIGITAL TRANSISTOR TRANSISTOR DIGITAL TRANSISTOR	

Ref. No.	Add	New	Parts No.	Description	Destination

E : Europe **K** : North America **M** : Other Areas
W : Without Europe

⚠ Indicates safety critical components.

SPECIFICATIONS

Monitor Unit (Video Unit)

Screen size ..... 6.95inches wide
..... 156.2 (W) x 82.4 (H) x 176.0 (Diagonal) mm
..... 6-1/8 (W) x 3-1/4 (H) inches
Display system ..... Transparent TN LCD panel
Drive system ..... TFT active matrix system
Number of pixels ..... 336,960pixels (480H x 234V x RGB)
Effective pixels 99.99%
Pixel arrangement ..... RGB striped arrangement
Back lighting ..... Cold cathode tube
IR Transmitter Output (2MHz) .. L ch : 2.3MHz/R ch : 2.8MHz
(3MHz) .. L ch : 3.2MHz/R ch : 3.8MHz

Hideaway Unit (Electric Unit)

Color system ..... NTSC/PAL
External video input level (RCA jacks) ..... 1±0.1Vp-p/75Ω
External audio input level (RCA jacks) 1V/55kΩ
Video output level (RCA jacks) ..... 1±0.1Vp-p/75Ω
Audio output level (RCA jacks) 1V/1kΩ

General

Operating voltage ..... 14.4V DC (11~16V)
Current consumption 1.5A
Consumed Power 14W
Operational temperature range ..... -10°C to +60°C
Storage temperature range ..... -30°C to +85°C
Dimensions (W x H x D)
Monitor unit ..... 177 x 122 x 34mm
..... 7 x 4-7/8 x 1-5/16inch
Hideaway unit ..... 143 x 37 x 99mm
..... 5-5/8 x 1-7/16 x 4-7/8inch
Weight
Monitor unit 440g (1.0lbs)
Hideaway unit 380g (0.8lbs)

KENWOOD follows a policy of continuous advancements in development. For this reason specifications may be changed without notice.

100%