
9. EXPLODED VIEWS AND PARTS LIST

NOTES:
- *Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.*
- *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
- *Screws adjacent to ▼ mark on product are used for disassembly.*
- *For the applying amount of lubricants or glue, follow the instructions in this manual. (In the case of no amount instructions, apply as you think it appropriate.)*

9.1 PACKING SECTION

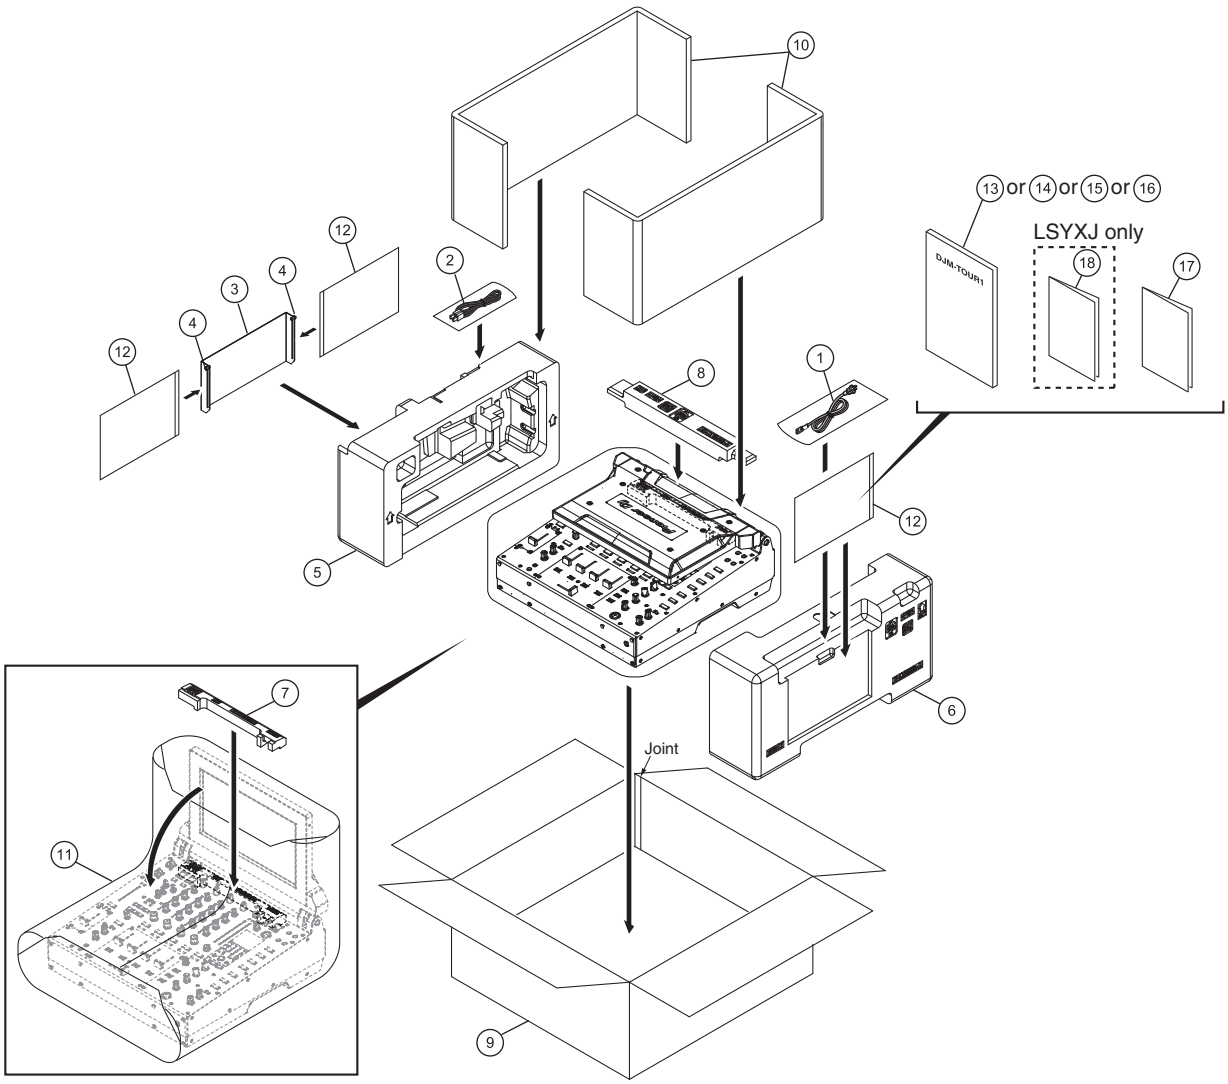

(1) PACKING SECTION PARTS LIST


Mark	No.	Description	Part No.
⚠	1	Power Cord	See Contrast table (2)
	2	USB Cable	DDE1128
	3	Display shade	DEC3649
	4	Screw	DBA1448
	5	Packing Pad	DHA1937
	6	Packing Pad	DHA1938
	7	Packing Pad	DHA1939
	8	Packing Pad	DHA1940
	9	Packing Case	See Contrast table (2)
	10	Packing Board	DHC1091
	11	Mirror Mat	DHL1200
NSP	12	Polyethylene Bag	AHG7117
	13	Operating Instructions (Quick Start Guide)	See Contrast table (2)
	14	Operating Instructions (Quick Start Guide)	See Contrast table (2)
	15	Operating Instructions (Quick Start Guide)	See Contrast table (2)
	16	Operating Instructions (Quick Start Guide)	See Contrast table (2)
NSP	17	Leaflet	See Contrast table (2)
NSP	18	Warranty	See Contrast table (2)

(2) CONTRAST TABLE

DJM-TOUR1/LSYXJ, UXJCB and XJCN are constructed the same except for the following:

Mark	No.	Symbol and Description	DJM-TOUR1 /LSYXJ	DJM-TOUR1 /UXJCB	DJM-TOUR1 /XJCN
⚠	1	Power Cord	ADG1244	DDG1108	DDG1114
	9	Packing Case	DHG3456	DHG3474	DHG3521
	13	Operating Instructions (Quick Start Guide)(En)	Not used	DRH1349	Not used
	14	Operating Instructions (Quick Start Guide)(En, Fr, De, It)	DRH1350	Not used	Not used
	15	Operating Instructions (Quick Start Guide)(Nl, Es, Pt, Ru)	DRH1351	Not used	Not used
	16	Operating Instructions (Quick Start Guide)(Zhcn)	Not used	Not used	DRH1352
NSP	17	Leaflet	DRH1275	DRH1275	DRH1274
NSP	18	Warranty	DRY1270	Not used	Not used

9.2 EXTERIOR and TITABLE DISPLAY SECIONS

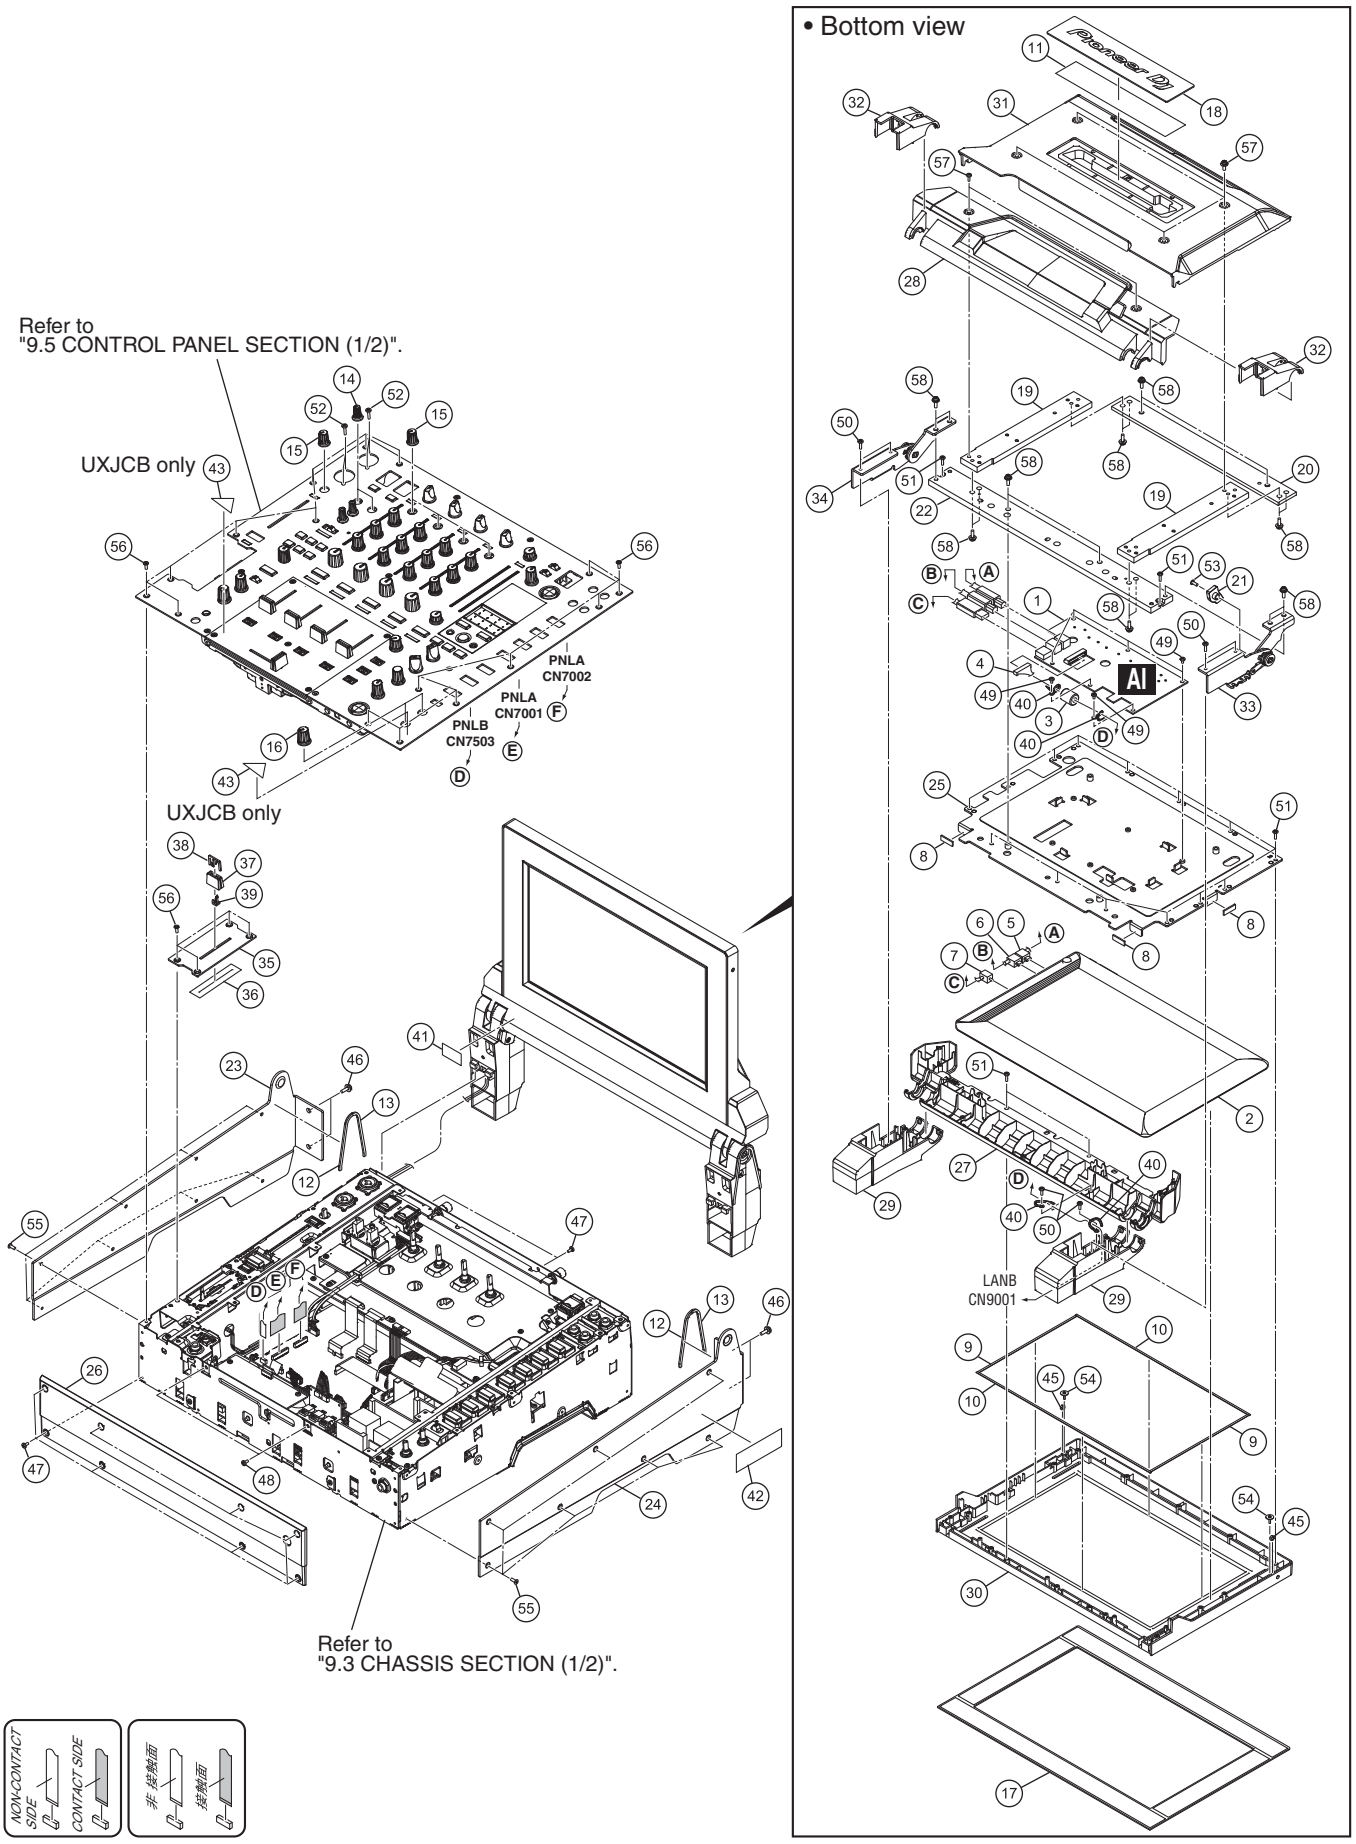

(1) EXTERIOR and TILTABLE DISPLAY SECTIONS PARTS LIST


Mark	No.	Description	Part No.
	1	ILMB Assy	DWX3858
	2	LCD FULL MODULE SERVICE ASSY	DEA1053
	3	Ferrite Core	ATX7007
	4	Shielded Conn-Cable	DDA1065
	5	USB Conn-Cable	DDE1147
	6	USB Conn-Cable	DDE1148
	7	USB Conn-Cable	DDE1149
	8	Packing/LCD	DEC3565
	9	Packing	DEC3645
	10	Packing	DEC3646
	11	Light-D Sheet	DEC3647
	12	Cushion	DEC3648
	13	Cushion	DEC3653
	14	Knob	DAA1354
	15	Knob	DAA1355
	16	Knob	DAA1368
	17	Panel	DAH3078
	18	Panel	DAH3079
	19	Frame	DLA2246
	20	Frame	DLA2247
	21	Button	DLA2248
	22	Frame	DLA2249
	23	Panel	DNF1976
	24	Panel	DNF1977
	25	Chassis	DNH3253
	26	Panel	DNK6577
	27	Cover	DNK6578
	28	Cover	DNK6579
	29	Cover	DNK6580
	30	Bezel	DNK6582
	31	Case	DNK6585
	32	Cover	DNK6587
	33	Hinge	DXB2172
	34	Hinge	DXB2173
	35	Panel	DNB1245
	36	Fader Packing	DEC2903
	37	Slider Knob 1	DAC2684
	38	Slider Knob 2	DAC2685
	39	Slider Knob Stopper	DNK5888
	40	Cord Clamper (Steel)	RNH-184
NSP	41	Label	DRW2678
NSP	42	Name Label	See Contrast table (2)
NSP	43	Label	See Contrast table (2)
	44	•••••	
	45	Nut	NB30FTB
	46	Screw	AMZ40P080FTB
	47	Screw	BBZ30P060FTB
	48	Screw	BBZ30P060FTC
	49	Screw	BMZ30P050FTC
	50	Screw	BPZ30P080FTB
	51	Screw	BPZ30P100FTC
	52	Screw	BPZ30P120FTB
	53	Screw	CMZ30P060FTB
	54	Float Fastener	DBA1286
	55	Screw (FE)	DBA1290
	56	Screw	DBA1446
	57	Screw	DBA1450
	58	Screw	PMB40P120FTB

(2) CONTRAST TABLE

DJM-TOUR1/LSYXJ, UXJCB and XJCN are constructed the same except for the following:

Mark	No.	Symbol and Description	DJM-TOUR1 /LSYXJ	DJM-TOUR1 /UXJCB	DJM-TOUR1 /XJCN
NSP	42	Name Label	DRW2681	DRW2682	DRW2713
NSP	43	Label	Not used	DRW1975	Not used


9.3 CHASSIS SECION (1/2)

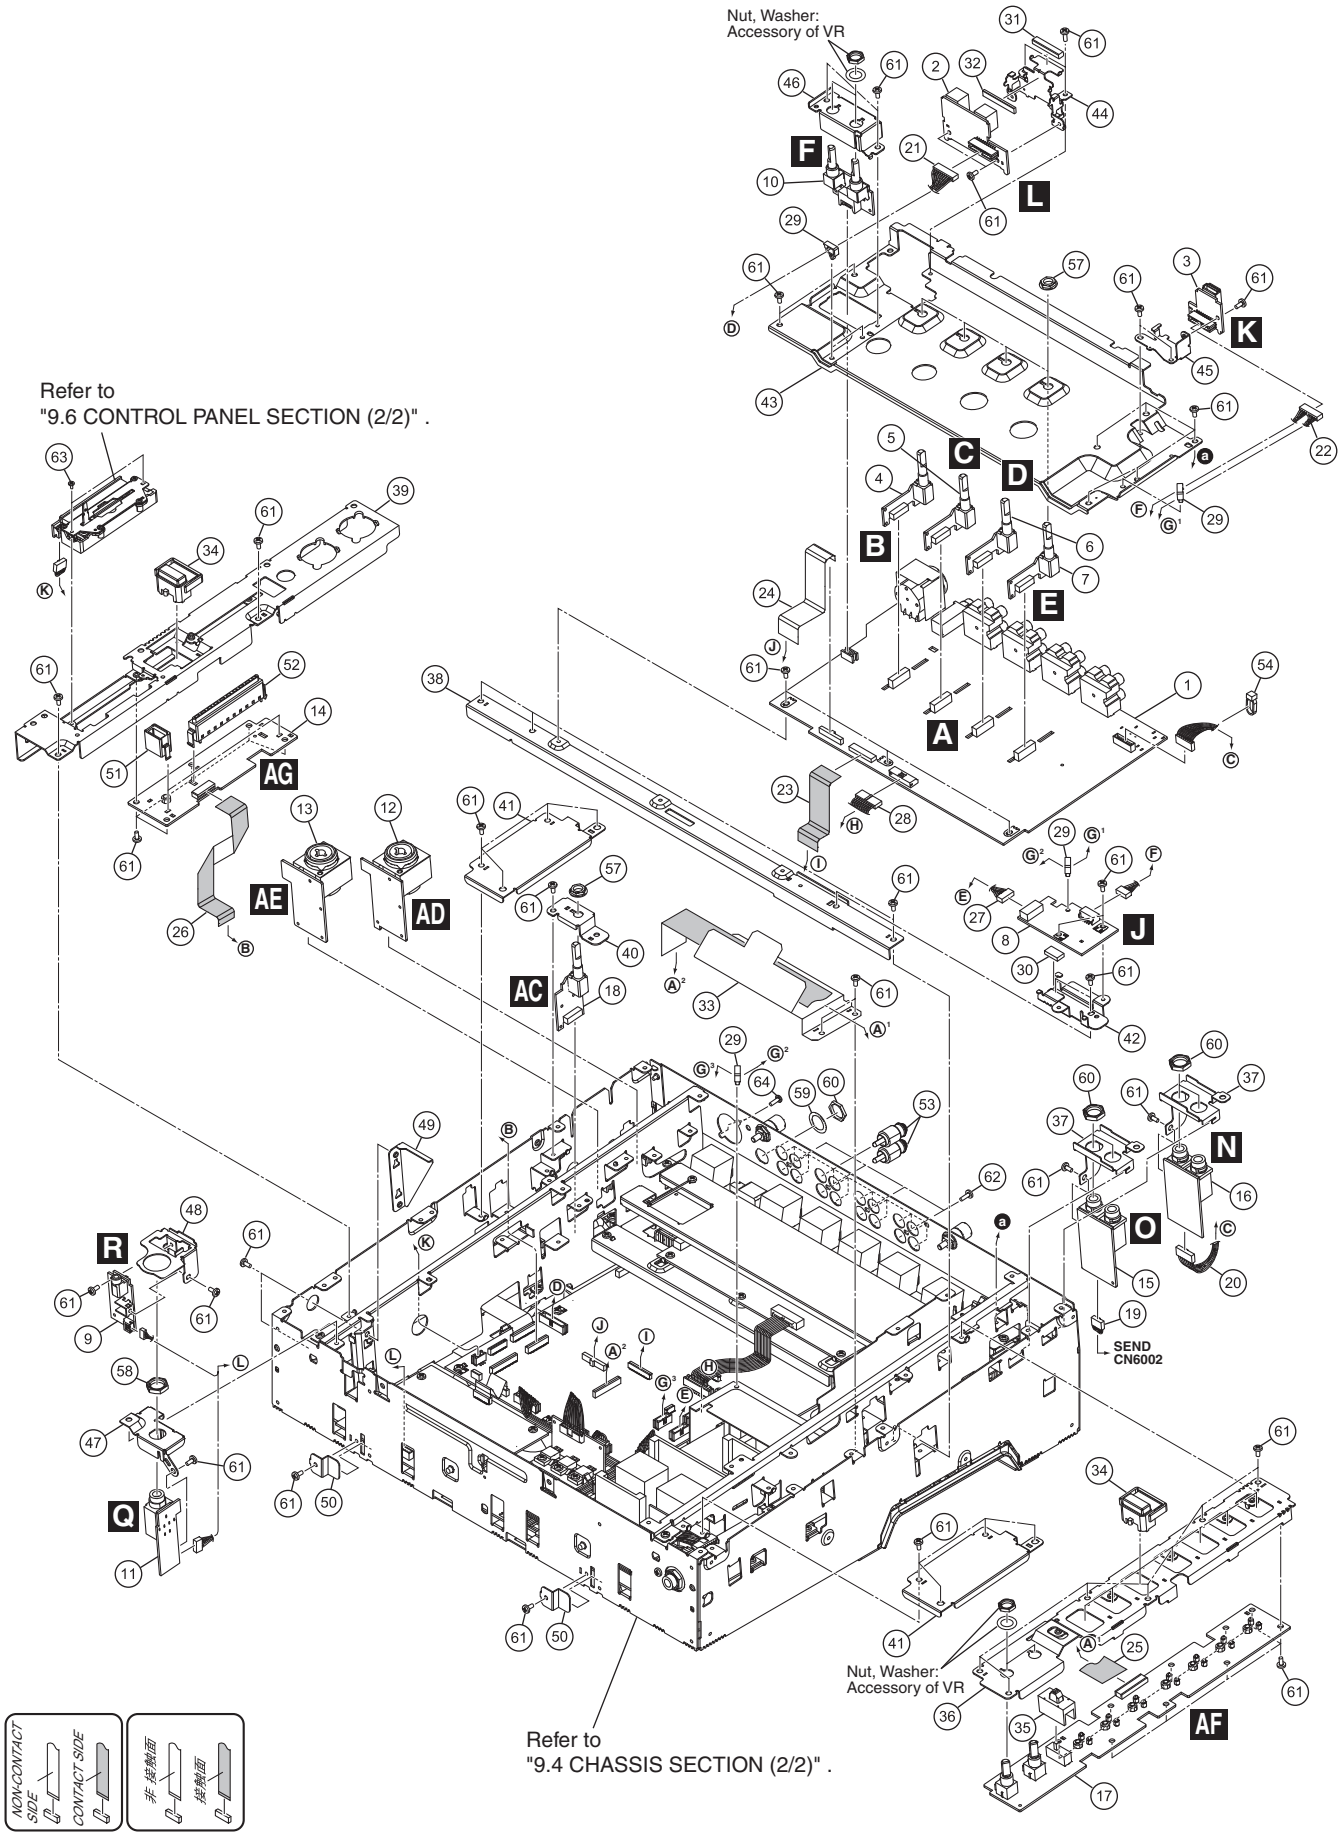

CHASSIS SECTION (1/2) PARTS LIST

Mark No.	Description	Part No.
1	AINB Assy	DWX3845
2	USBB Assy	DWX3830
3	USBC Assy	DWX3831
4	TRM1 Assy	DWX3715
5	TRM2 Assy	DWX3716
6	TRM3 Assy	DWX3717
7	TRM4 Assy	DWX3718
8	USBP Assy	DWX3832
9	HPJM Assy	DWX3739
10	MTRM Assy	DWX3729
11	HPJK Assy	DWX3738
12	AUXL Assy	DWX3833
13	AUXR Assy	DWX3834
14	PNLL Assy	DWX3836
15	REJK Assy	DWX3837
16	SEJK Assy	DWX3838
17	PNLR Assy	DWX3839
18	TRMA Assy	DWX3840
19	Shielded Conn-Cable	DDA1067
20	Shielded Conn-Cable	DDA1068
21	Shielded Conn-Cable	DDA1070
22	Shielded Conn-Cable	DDA1071
23	40P FFC	DDD1550
24	FFC	DDD1715
25	FFC	DDD1728
26	FFC	DDD1785
27	Connector Assy	PF06PP-S12
28	Connector Assy	PF10PP-D10
29	Locking Mini Clamp	DEC2439
30	Sheet	DEC3621
31	EMC Gasket	DEC3637
32	EMC Gasket	DEC3638
33	Insulating Sheet	DEC3699
34	Button/CUE	DAC2882
35	Cap	DAC3136
36	Stay	DND1294
37	Stay	DND1295
38	Frame	DND1298
39	Stay	DND1299
40	Stay	DND1300
41	Shield Plate	DND1303
42	Stay	DNF1951
43	Stay	DNF1953
44	Stay	DNF1954
45	Stay	DNF1955
46	Stay	DNF1958
47	Stay	DNF1966
48	Stay	DNF1967
49	Stay	DNF1968
50	Stay	DNF1978
51	Holder	DNK6511
52	Level Meter Assy	DXB2028
53	RCA Plug	DKM1025
54	Cable Tie	ZCA-SKB90BK
55	•••••	
56	•••••	
57	Flange Nut M7	DBN1011
58	Nut M12	DBN1018
59	Washer	DEC2920
60	Nut	NKX2FTC
61	Screw	BBZ30P060FTC
62	Screw	BPZ30P080FTB
63	Screw	BSZ20P040FTB
64	Screw	PPZ30P080FTB

9.4 CHASSIS SECION (2/2)

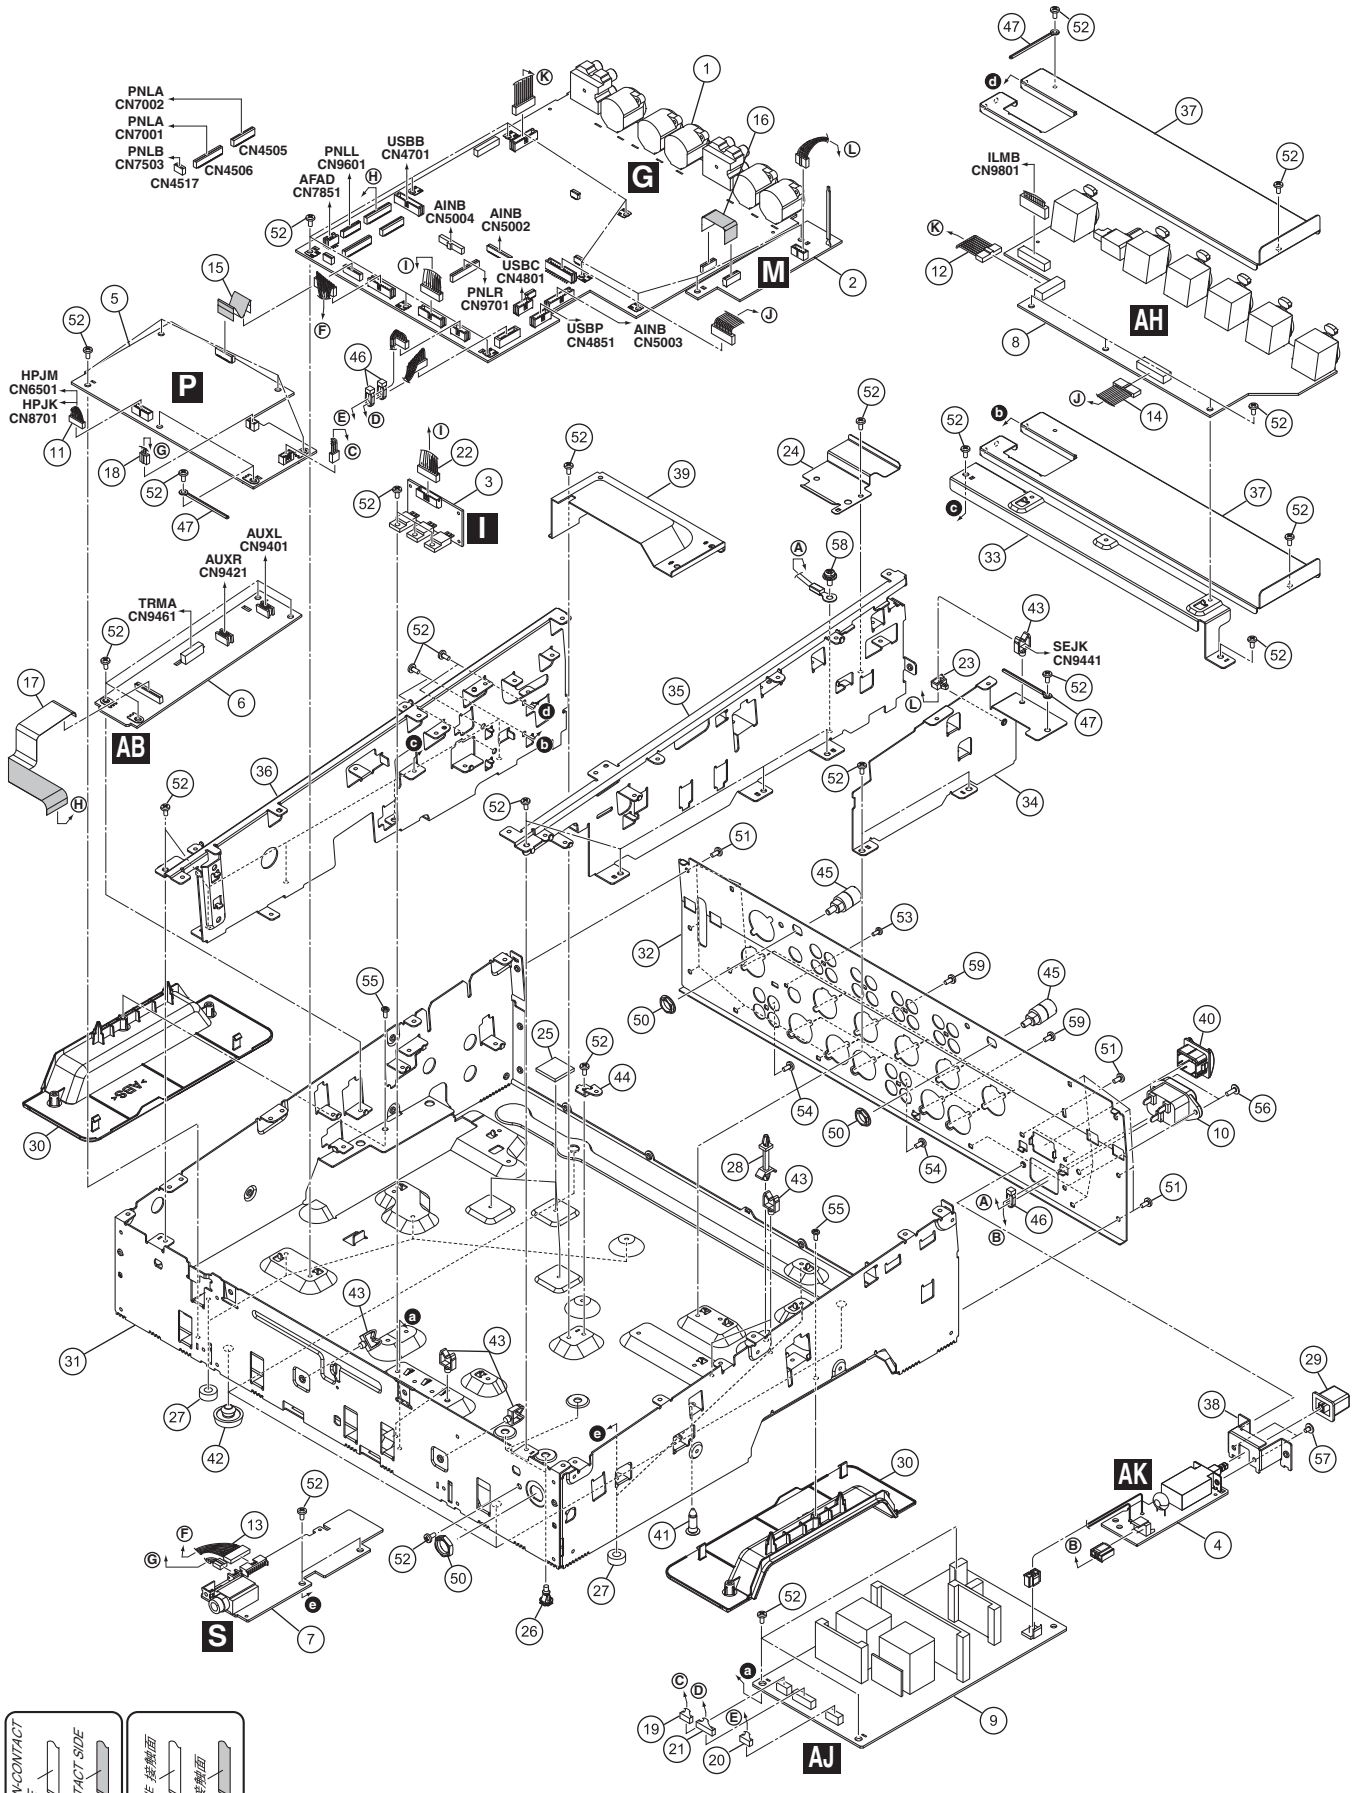


CHASSIS SECTION (2/2) PARTS LIST

Mark	No.	Description	Part No.
	1	MAIN Assy	DWX3829
	2	SEND Assy	DWX3843
	3	REGB Assy	DWX3721
	4	ACSW Assy	DWX3722
	5	HPPW Assy	DWX3847
	6	AUXI Assy	DWX3835
	7	HPP2 Assy	DWX3841
	8	LANB Assy	DWX3842
⚠	9	SW POWER SUPPLY	DWR1555
⚠	10	AC Inlet	DKP3984
	11	Shielded Conn-Cable	DDA1061
	12	Shielded Conn-Cable	DDA1066
	13	Shielded Conn-Cable	DDA1069
	14	Shielded Conn-Cable	DDA1072
	15	FFC	DDD1714
	16	FFC	DDD1716
	17	FFC/FPC Connector	DDD1736
	18	Crimp Connector	PF03PP-S30
	19	Connector Assy	PF04PP-S12
	20	Crimp Connector	PF05PP-S25
	21	Crimp Connector	PF08PP-S20
	22	Crimp Connector	PF09PP-S07
	23	Locking Mini Clamp	DEC2439
	24	Sheet	DEC3617
	25	Sheet	DEC3618
	26	Spacer	DEC3636
NSP	27	Spacer	AEB7092
NSP	28	PCB Spacer	AEC1446
	29	Power Knob	DAC2306
	30	Handle	DMR1021
	31	Chassis	DNA1459
	32	Rear Panel	DNC2121
	33	Stay	DND1292
	34	Stay	DND1293
	35	Frame	DND1296
	36	Frame	DND1297
	37	Shield Case	DND1301
	38	Bracket PSW	DNF1759
	39	Case	DNF1952
	40	Power Knob Guard	DNK4534
	41	PCB Holder	PNW2029
	42	Foot (Rubber)	REC-434
	43	Holder	VEC1355
NSP	44	PCB Stay (FE)	VNE2489
	45	Earth Terminal	DKE1019

Mark	No.	Description	Part No.
	46	Cable Tie	ZCA-SKB90BK
	47	Cord Clamper (Steel)	RNH-184
	48	•••••	
	49	•••••	
	50	Flange Nut M9	DBN1008
	51	Screw	BBZ30P060FTB
	52	Screw	BBZ30P060FTC
	53	Screw	BPZ26P080FTB
	54	Screw	BPZ30P080FTB
	55	Screw	BPZ30P080FTC
	56	Screw	IBZ30P080FTB
	57	Screw	IMZ30P040FTC
	58	Screw	PMH40P080FTC
	59	Screw	PPZ30P080FTB

9.5 CONTROL PANEL SECTION (1/2)

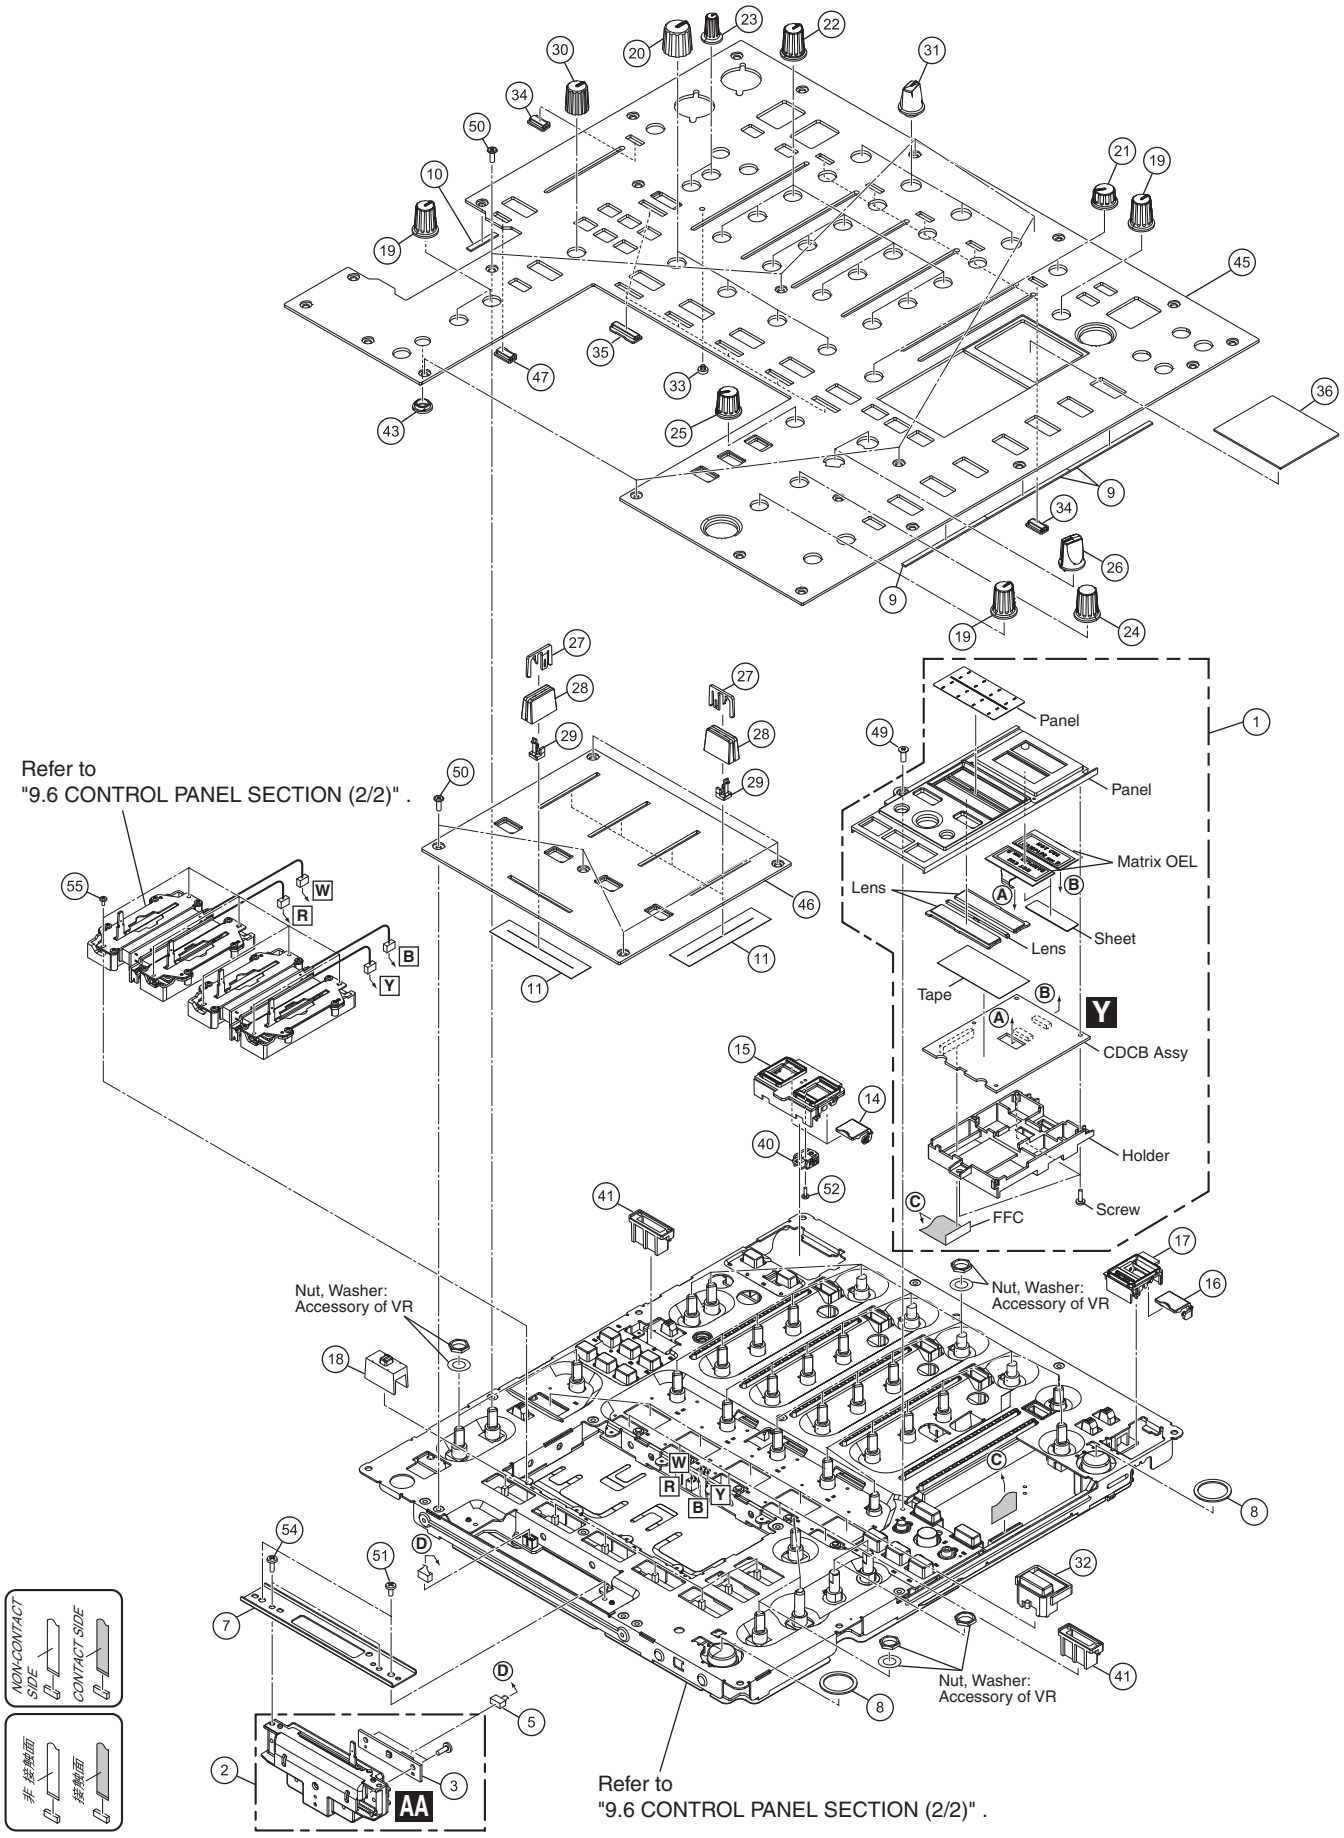


CONTROL PANEL SECTION (1/2) PARTS LIST

Mark	No.	Description	Part No.
	1	X-Pad Service Assy	DEA1049
	2	1..CROSS FADER Assy	DXA2257
	3	2..CRFD Assy	DWX3258
	4	•••••	
	5	Connector Assy	PF03PP-B07
	6	•••••	
	7	Stay/CRF	DNF1927
	8	SW Packing (EF)	DEC2929
	9	Packing/L	DEC3416
	10	Packing/S	DEC3417
	11	Fader Packing	DEC2903
	12	•••••	
	13	•••••	
	14	Lid	DNK6550
	15	Panel	DNK6539
	16	Lid	DNK6652
	17	Panel	DNK6651
	18	Slide SW Cap (W)	DAC2401
	19	Knob	DAA1368
	20	Knob/FRE	DAA1309
	21	Rotary Knob Low (BN)	DAA1265
	22	Knob	DAA1353
	23	Knob/RSW	DAA1307
	24	Rotary SW Knob (C)	DAA1180
	25	Knob	DAA1370
	26	Select Knob	DAA1205
	27	Slider Knob 2	DAC2685
	28	Slider Knob 1	DAC2684
	29	Slider Knob Stopper	DNK5888
	30	Knob (RES)	DAA1250
	31	Knob	DAA1345
	32	Button/CUE	DAC2882
	33	Lens	DNK4532
	34	Lens	DNK6516
	35	Lens	DNK6517
	36	Plate	DAK1003
	37	•••••	
	38	•••••	
	39	•••••	
	40	Holder	DNK6549
	41	Holder	DNK6512
	42	•••••	
	43	Holder	DNK6552
	44	•••••	
	45	Control Panel	DNB1244
	46	Panel	DAH3125
	47	Lens	DAK1004
	48	•••••	
	49	Screw (FE)	DBA1290
	50	Screw	DBA1446
	51	Screw	BBZ30P060FTC
	52	Screw	BPZ20P060FTC
	53	•••••	
	54	Screw	BPZ30P080FTB
	55	Screw	BSZ20P040FTB


9.6 CONTROL PANEL SECTION (2/2)

• Bottom view

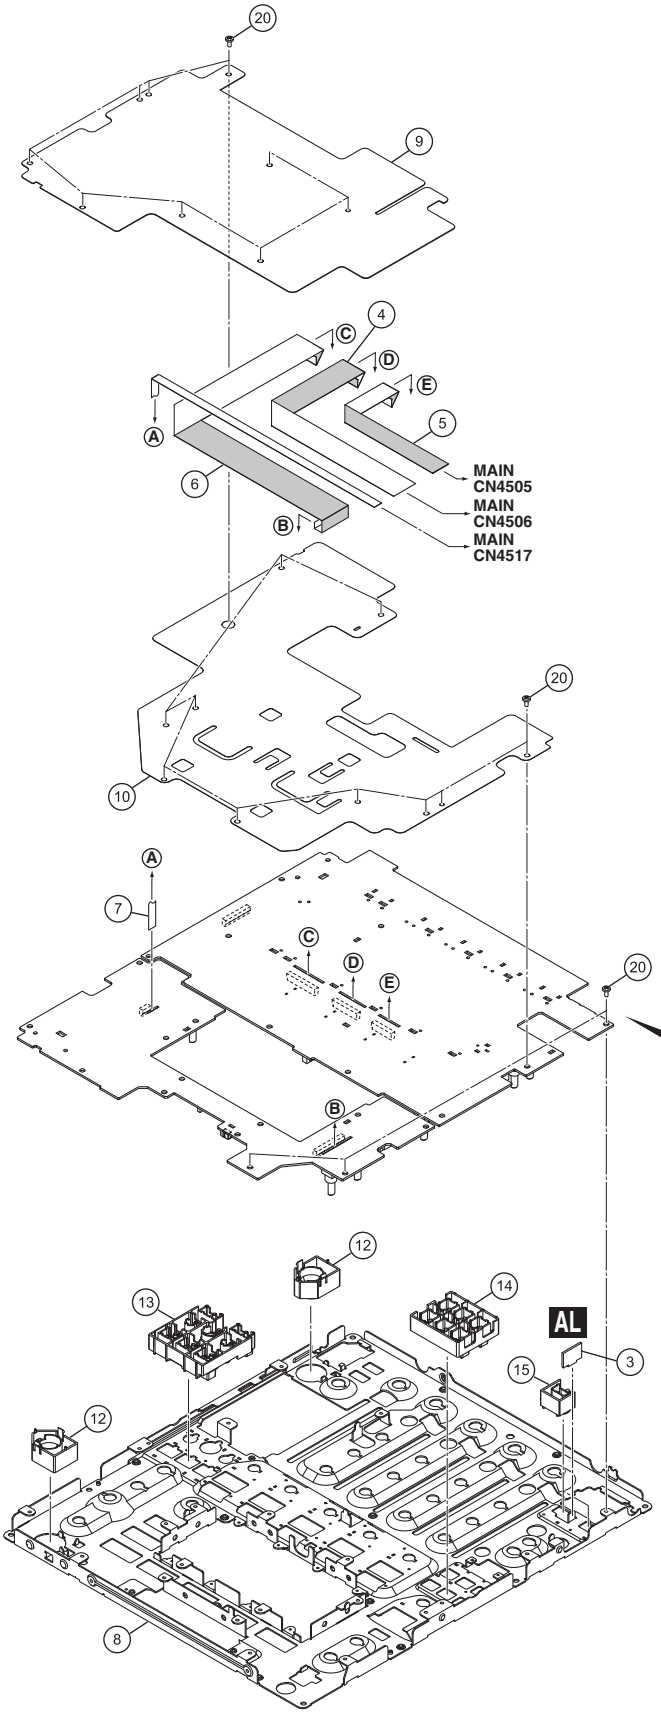


■ Channel Fader Section

∗: These parts may substitute it each other.
∗: 相互で代用可能

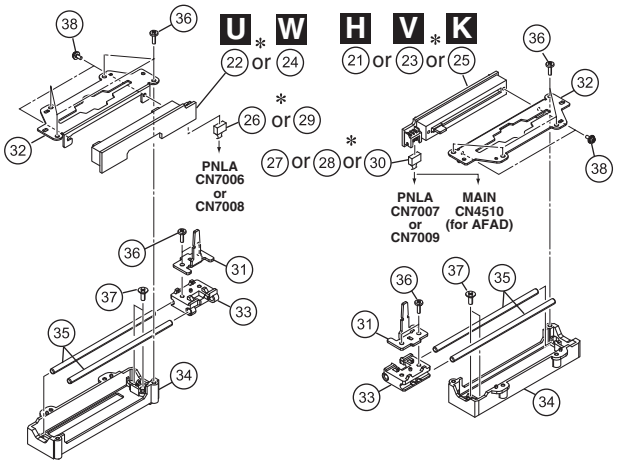



Lubricating oil
(GYA1001)




Note:
Greasing must be performed at a total of 8 points, 2 points each for the upper and bottom places of each shaft. (0.4 to 1 mg per point ×8 points)
After applying grease, move the slider base back and forth from one end to the other for approximately 10 to 20 strokes, in order to fully spread the grease.

注意:
グリス塗布位置は各シャフト上下2箇所ずつ計8箇所です。
(1ポイント当たり 0.4〜1 mg ×8ポイント)
グリス塗布後はスライダーベースを動かして (フルストローク)
摺動部にグリスを十分なじませてください。
(動かす回数の目安は10〜20往復)

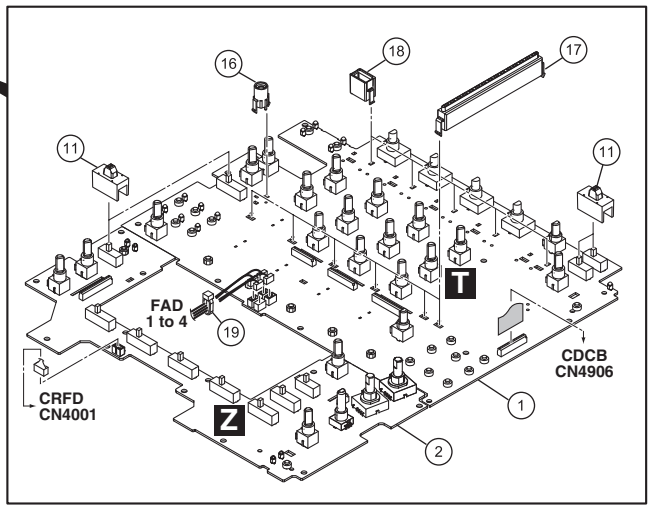





CONTROL PANEL SECTION (2/2) PARTS LIST

Mark	No.	Description	Part No.
	1	PNLA Assy	DWX3915
	2	PNLB Assy	DWX3720
	3	GRDM Assy	DWX3862
	4	FFC/FPC Connector	DDD1734
	5	FFC/FPC Connector	DDD1733
	6	FFC	DDD1720
	7	FFC/FPC Connector	DDD1735
	8	Stay	DND1308
	9	Sheet	DEC3616
	10	Sheet	DEC3620
	11	Cap	DAC3136
	12	Button	DAC3141
	13	Button	DAC3142
	14	Button	DAC3143
	15	Button	DAC3144
	16	Lens Holder	DNK4533
	17	Level Meter Assy	DXB1882
	18	Holder	DNK6511
	19	Cable Tie	ZCA-SKB90BK
	20	Screw	BBZ30P060FTC
	21	AFAD Assy	DWX3727
	22	FAD1 Assy	DWX3723
	23	FAD2 Assy	DWX3724
	24	FAD3 Assy	DWX3725
	25	FAD4 Assy	DWX3726
	26	Connector Assy	PF03PP-B10
	27	Crimp Connector	PF03PP6B10
	28	Connector Assy	PF03PP4B12
	29	Connector Assy	PF03PP2B12
	30	Connector Assy	PF03PP2Q17
	31	Lever Plate	DNH2954
	32	VR Stay	DNH2955
	33	Slider Base	DNK5851
	34	Shaft Holder	DNK5852
NSP	35	Guide Shaft VK1	DLA1978
	36	Screw	BPZ20P060FTC
	37	Screw	CPZ26P080FTC
	38	Screw	PMH20P040FTC

12. PCB PARTS LIST

NOTES: ● *Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.*

● *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*

● *When ordering resistors, first convert resistance values into code form as shown in the following examples.*

Ex.1 When there are 2 effective digits (any digit apart from 0), such as 560 ohm and 47 k ohm (tolerance is shown by J = 5%, and K = 10%).

560 Ω → 56 × 10^1 → 561 ..... RD1/4PU 5 6 1 J
47 kΩ → 47 × 10^3 → 473 ..... RD1/4PU 4 7 3 J
0.5 Ω → R50 ..... RN2H R 5 0 K
1 Ω → 1R0 ..... RS1P 1 R 0 K

Ex.2 When there are 3 effective digits (such as in high precision metal film resistors).

5.62 kΩ → 562 × 10^1 → 5621 ..... RN1/4PC 5 6 2 1 F

LIST OF ASSEMBLIES

Mark	No.	Description	Part No.
NSP	1	..MOTHER ASSY	DWM2604
	2	..MAIN ASSY	DWX3829
	2	..USBB ASSY	DWX3830
	2	..USBC ASSY	DWX3831
	2	..USBP ASSY	DWX3832
NSP	1	..AUDIO ASSY	DWM2606
	2	..AINB ASSY	DWX3845
	2	..SEND ASSY	DWX3846
	2	..TRM1 ASSY	DWX3715
	2	..TRM2 ASSY	DWX3716
	2	..TRM3 ASSY	DWX3717
	2	..TRM4 ASSY	DWX3718
	2	..HPJM ASSY	DWX3739
	1	..PNLA ASSY	DWX3915
NSP	1	..SUB ASSY	DWM2608
	2	..PNLB ASSY	DWX3720
	2	..REGB ASSY	DWX3721
	2	..ACSW ASSY	DWX3722
	2	..FAD1 ASSY	DWX3723
	2	..FAD2 ASSY	DWX3724
	2	..FAD3 ASSY	DWX3725
	2	..FAD4 ASSY	DWX3726
	2	..MTRM ASSY	DWX3729
	2	..AFAD ASSY	DWX3727
	2	..GRDM ASSY	DWX3862
NSP	1	..HPAB ASSY	DWM2607
	2	..HPPW ASSY	DWX3847
	2	..HPJK ASSY	DWX3738
NSP	1	..AUXB ASSY	DWM2608
	2	..AUXL ASSY	DWX3833
	2	..AUXR ASSY	DWX3834
	2	..AUXI ASSY	DWX3695
	2	..PNLL ASSY	DWX3836
	2	..REJK ASSY	DWX3837
	2	..SEJK ASSY	DWX3838
	2	..PNLR ASSY	DWX3839
	2	..TRMA ASSY	DWX3840
	2	..HPP2 ASSY	DWX3841
	2	..SEND ASSY	DWX3843
	1	..CDCB ASSY	DWX3733
	1	..CROSS FADER ASSY	DXA2257
	2	..CRFD ASSY	DWX3258

Mark	No.	Description	Part No.
⚠	1	..SW POWER SUPPLY	DWR1555
	1	..LANB ASSY	DWX3842
	1	..ILMB ASSY	DWX3858
	1	..LCD FULL MODULE SERVICE ASSY	DEA1053

Mark	No.	Description	Part No.

A AINB ASSY

SEMICONDUCTORS

Mark	No.	Description	Part No.
	IC	5001-5003,5005-5009	TC7SH08FUS1
	IC	5004	TC74VHC74FK
⚠	IC	5010	MM3571A33P
	IC	5101	NJM4565MD
	IC	5102,5105,5305,5505	AK5358AET
	IC	5103,5104,5201,5203	NJM4580MD
	IC	5202,5204,5402,5404	NJM8901E
	IC	5301,5302,5501,5502	NJM2121MD
	IC	5303,5304,5308,5401	NJM4580MD
	IC	5306,5506,5706,5906	CS5381-KZ
	IC	5307,5507,5707,5907	TC7WH157FK
	IC	5403,5503,5504,5508	NJM4580MD
	IC	5601,5603,5703,5704	NJM4580MD
	IC	5602,5604,5802,5804	NJM8901E
	IC	5701,5702,5901,5902	NJM2121MD
	IC	5705,5905	AK5358AET
	IC	5708,5801,5803,5903	NJM4580MD
	IC	5904,5908	NJM4580MD
	Q	5001,5002	LSCR523UB
	Q	5001,5002	LSC4081UB
	Q	5001,5002	2SC4154-11
	Q	5003-5006	LTC114EUB
	Q	5101-5104	2SK209
	Q	5201,5202,5401,5402	KTC801U
	Q	5203,5204,5403,5404	2SK3320
	Q	5205,5405,5605,5805	RT1N241M
	Q	5205,5405,5605,5805	LTC124EUB
	Q	5601,5602,5801,5802	KTC801U
	Q	5603,5604,5803,5804	2SK3320
	D	5106-5109,5301-5306	RB706F-40
	D	5209,5210,5409,5410	1SS355VM

Mark	No.	Description	Part No.
	D	5209,5210,5409,5410	DA2J101
	D	5501-5506,5701-5706	RB706F-40
	D	5609,5610,5809,5810	DA2J101
	D	5609,5610,5809,5810	1SS355VM
	D	5901-5906	RB706F-40

MISCELLANEOUS

	JA	5103 XLR SOCKET	DKB1124
	JA	5104 6.5 DIA JACK	DKN1653
	JA	5201,5401,5601,5801 RCA JACK/4P	DKB1112
	KN	5001-5003 EARTH TERMINAL	AKF7002
	RY	5201,5401,5601,5801 RELAY	VSR1008
	CN	5002 FFC CONNECTOR	VKN1811
	CN	5003 L-PLUG(10P)	KM200NA10L
	CN	5004 FFC/FPC CONNECTOR	DKN1663
	CN	5101 CONNECTOR	CKS3561
	CN	5102 PLUG(8P)	KM200NA8
	CN	5201,5401 B TO B 11PIN PLUG	AKM7101
	CN	5601,5801 B TO B 11PIN PLUG	AKM7101
	VA	5101-5104 VARISTORS	EZJZ1V270RM

RESISTORS

	R	5028-5030	RS1/4SA130J
	R	5109,5154	RAB4CQ103J
	R	5115,5116,5151	RS1/10SR0R0J
	R	5117-5124,5202	RN1/16SE1000D
	R	5125-5128,5231,5232	RN1/16SE1002D
	R	5129,5130,5143,5144	RN1/16SE2701D
	R	5131,5133,5137,5138	RN1/16SE1501D
	R	5132,5134,5140,5142	RN1/16SE4701D
	R	5135,5136	RN1/16SE8200D
	R	5139,5141	RN1/16SE1500D
	R	5145,5146	RN1/16SE3900D
	R	5147,5148	RN1/16SE3301D
	R	5149,5150,5330,5333	RN1/16SE2700D
	R	5203,5204,5403,5404	RN1/16SE2201D
	R	5205,5207,5212,5405	RN1/16SE4700D
	R	5206,5213-5215,5406	RN1/16SE4702D
	R	5208-5210,5402	RN1/16SE1000D
	R	5219,5220,5222,5224	RN1/16SE1201D
	R	5221,5223,5421,5423	RS1/10SR470J
	R	5225-5228,5425-5428	RN1/16SE2001D
	R	5237,5238,5437,5438	RN1/16SE7500D
	R	5243,5244,5443,5444	RN1/16SE6800D
	R	5245,5246,5249,5250	RS1/10SR473J
	R	5247,5248,5447,5448	RN1/16SE7502D
	R	5255,5256,5455,5456	RN1/16SE6801D
	R	5301-5303,5307	RN1/16SE3302D
	R	5304,5308,5504,5508	RN1/16SE4701D
	R	5305,5306,5505,5506	RN1/16SE1202D
	R	5309-5316,5509-5516	RN1/16SE1501D
	R	5317,5319,5321,5323	RN1/16SE2200D
	R	5318,5320,5322,5324	RN1/16SE1001D
	R	5325-5328,5419,5420	RN1/16SE1201D
	R	5331,5332,5335,5336	RN1/16SE1001D
	R	5334,5337,5530,5533	RN1/16SE2700D
	R	5359,5559,5759,5959	RS1/10SR5R1J
	R	5407,5412,5605,5607	RN1/16SE4700D
	R	5408-5410,5602	RN1/16SE1000D
	R	5413-5415,5606	RN1/16SE4702D
	R	5422,5424,5525-5528	RN1/16SE1201D
	R	5431,5432,5631,5632	RN1/16SE1002D
	R	5445,5446,5449,5450	RS1/10SR473J
	R	5501-5503,5507	RN1/16SE3302D
	R	5517,5519,5521,5523	RN1/16SE2200D
	R	5518,5520,5522,5524	RN1/16SE1001D
	R	5531,5532,5535,5536	RN1/16SE1001D
	R	5534,5537,5730,5733	RN1/16SE2700D
	R	5603,5604,5803,5804	RN1/16SE2201D
	R	5608-5610,5802	RN1/16SE1000D
	R	5612,5805,5807,5812	RN1/16SE4700D
	R	5613-5615,5806	RN1/16SE4702D
	R	5619,5620,5622,5624	RN1/16SE1201D
	R	5621,5623,5821,5823	RS1/10SR470J
	R	5625-5628,5825-5828	RN1/16SE2001D
	R	5637,5638,5837,5838	RN1/16SE7500D
	R	5643,5644,5843,5844	RN1/16SE6800D
	R	5645,5646,5649,5650	RS1/10SR473J
	R	5647,5648,5847,5848	RN1/16SE7502D
	R	5655,5656,5855,5856	RN1/16SE6801D
	R	5701-5703,5707	RN1/16SE3302D
	R	5704,5708,5904,5908	RN1/16SE4701D
	R	5705,5706,5905,5906	RN1/16SE1202D
	R	5709-5716,5909-5916	RN1/16SE1501D
	R	5717,5719,5721,5723	RN1/16SE2200D
	R	5718,5720,5722,5724	RN1/16SE1001D
	R	5725-5728,5819,5820	RN1/16SE1201D
	R	5731,5732,5735,5736	RN1/16SE1001D
	R	5734,5737,5930,5933	RN1/16SE2700D
	R	5808-5810	RN1/16SE1000D
	R	5813-5815	RN1/16SE4702D
	R	5822,5824,5925-5928	RN1/16SE1201D
	R	5831,5832	RN1/16SE1002D
	R	5845,5846,5849,5850	RS1/10SR473J
	R	5901-5903,5907	RN1/16SE3302D
	R	5917,5919,5921,5923	RN1/16SE2200D
	R	5918,5920,5922,5924	RN1/16SE1001D
	R	5931,5932,5935,5936	RN1/16SE1001D
	R	5934,5937	RN1/16SE2700D
		Other Resistors	RS1/16SS###J

CAPACITORS

	C	5001,5039,5165,5328	CKSRYB102K50
	C	5002,5164	CKSRYB103K25
	C	5003,5016,5020,5027	CCSSCH102J50
	C	5004,5009-5015,5017	CKSSYB104K16
	C	5006	CEAT101M16
	C	5019,5021,5022,5028	CKSSYB104K16
	C	5025,5026	CCG1328
	C	5030	CEHAT221M10
	C	5031,5035,5312-5315	CCSSCH102J50
	C	5033,5037	CKSYB104K25
	C	5034,5038,5332,5346	ACH1480
	C	5040,5207,5208,5407	CCSRCH101J50
	C	5041-5044	CKSRYB104K16
	C	5105,5108	CEAT470M25
	C	5106,5107,5142,5143	CKSSYB103K25
	C	5109,5110	CEAT220M50
	C	5111,5113,5117,5157	DCH1201
	C	5114,5115,5118,5158	CKSSYB104K16
	C	5116,5344,5544,5744	CEHAZL101M10

Mark	No.	Description	Part No.
	C 5119		CKSSYB102K50
	C 5120		CCSSCH101J50
	C 5121,5341,5342,5541		CKSSYB103K16
	C 5122,5123,5126,5127		ACE7113
	C 5124,5125,5128-5137		CCSRCH102J50
	C 5138,5139		CKSSYB471K50
	C 5140,5141,5146,5147		CCSSCH471J50
	C 5144,5145		CKSSYB331K50
	C 5148,5149		CKSRYB104K25
	C 5150,5151		CEJQNP100M35
	C 5154,5155		CEJQ100M35
	C 5156		CEHAT101M16
	C 5159,5161,5321,5334		DCH1201
	C 5160,5162,5243,5337		CKSSYB104K16
	C 5163		CKSSYB103K25
	C 5201-5203,5206		CCSRCH221J50
	C 5204,5205,5404,5405		CCSRCH102J50
	C 5209,5210,5409,5410		CEHAT101M25
	C 5211,5212,5411,5412		CKSRYB223K50
	C 5219,5221,5227,5228		ACE7100
	C 5220,5224,5420,5424		CEHAT221M16
	C 5229,5234,5307,5316		CEHAZL101M25
	C 5231,5232,5248,5249		CKSRYB104K50
	C 5235,5236,5435,5436		DCE1027
	C 5237,5238,5437,5438		CEANP100M35
	C 5239,5240,5439,5440		ACE7128
	C 5241,5242,5441,5442		DCH1320
	C 5250,5251,5450,5451		CEHAZL220M50
	C 5301-5304,5308-5311		CKSRYB104K50
	C 5305,5306,5505,5506		CEHAR100M35
	C 5322,5345,5351,5431		CKSRYB104K50
	C 5327,5527,5727,5927		CCG1218
	C 5329,5330,5335,5529		CKSRYB103K50
	C 5333,5528,5533,5728		CKSRYB102K50
	C 5336,5536,5736,5936		ACE7113
	C 5338,5350,5443,5537		CKSSYB104K16
	C 5339,5340,5539,5540		CCSRCH222J50
	C 5343,5543,5743,5943		CEHAZL331M6R3
	C 5347,5547,5747,5947		CFHXSQ103J16
	C 5401-5403,5406		CCSRCH221J50
	C 5408,5607,5608,5807		CCSRCH101J50
	C 5419,5421,5427,5428		ACE7100
	C 5429,5434,5507,5516		CEHAZL101M25
	C 5432,5448,5449		CKSRYB104K50
	C 5501-5504,5508-5511		CKSRYB104K50
	C 5512-5515,5712-5715		CCSSCH102J50
	C 5521,5534,5721,5734		DCH1201
	C 5522,5545,5551,5631		CKSRYB104K50
	C 5530,5535,5729,5730		CKSRYB103K50
	C 5532,5546,5732,5746		ACH1480
	C 5538,5550,5643,5737		CKSSYB104K16
	C 5542,5741,5742,5941		CKSSYB103K16
	C 5601-5603,5606		CCSRCH221J50
	C 5604,5605,5804,5805		CCSRCH102J50
	C 5609,5610,5809,5810		CEHAT101M25
	C 5611,5612,5811,5812		CKSRYB223K50
	C 5619,5621,5627,5628		ACE7100
	C 5620,5624,5820,5824		CEHAT221M16
	C 5629,5634,5707,5716		CEHAZL101M25
	C 5632,5648,5649		CKSRYB104K50
	C 5635,5636,5835,5836		DCE1027
	C 5637,5638,5837,5838		CEANP100M35
	C 5639,5640,5839,5840		ACE7128
	C 5641,5642,5841,5842		DCH1320
	C 5650,5651,5850,5851		CEHAZL220M50
	C 5701-5704,5708-5711		CKSRYB104K50
	C 5705,5706,5905,5906		CEHAR100M35
	C 5722,5745,5751,5831		CKSRYB104K50
	C 5733,5928,5933		CKSRYB102K50
	C 5735,5929,5930,5935		CKSRYB103K50
	C 5738,5750,5843,5937		CKSSYB104K16
	C 5739,5740,5939,5940		CCSRCH222J50
	C 5801-5803,5806		CCSRCH221J50
	C 5808		CCSRCH101J50
	C 5819,5821,5827,5828		ACE7100
	C 5829,5834,5907,5916		CEHAZL101M25
	C 5832,5848,5849		CKSRYB104K50
	C 5901-5904,5908-5911		CKSRYB104K50
	C 5912-5915		CCSSCH102J50
	C 5921,5934		DCH1201
	C 5922,5945,5951		CKSRYB104K50
	C 5932,5946		ACH1480
	C 5938,5950		CKSSYB104K16
	C 5942		CKSSYB103K16
	C 5944		CEHAZL101M10

B TRM1 ASSY

MISCELLANEOUS

VR 6101	ROTARY VR	DCS1118
CN 6101	B TO B 11PIN JACK	AKN7067

CAPACITORS

C 6101		CKSRYB104K25

C TRM2 ASSY

MISCELLANEOUS

VR 6201	ROTARY VR	DCS1118
CN 6201	B TO B 11PIN JACK	AKN7067

CAPACITORS

C 6201		CKSRYB104K25

D TRM3 ASSY

MISCELLANEOUS

VR 6301	ROTARY VR	DCS1118
CN 6301	B TO B 11PIN JACK	AKN7067

CAPACITORS

C 6301		CKSRYB104K25

E TRM4 ASSY

MISCELLANEOUS

Mark	No.	Description	Part No.
	VR 6401	ROTARY VR	DCS1118
	CN 6401	B TO B 11PIN JACK	AKN7067

CAPACITORS

	C 6401		CKSRYB104K25

F MTRM ASSY

MISCELLANEOUS

	VR 7901,7902	ROTARY VR	DCS1123
	CN 7901	PLUG	CKS3533

G MAIN ASSY

SEMICONDUCTORS

	IC 1		AM3352BZCZ100
⚠	IC 2		TPS65910A31A1RSL
	IC 4,3017		TC7SH04FUS1
	IC 5		74LCX541FT
	IC 6,7		74LCX373FT
NSP	IC 8		DYW1899
	IC 9		K4B1G1646G-BCK0
	IC 11-13,1002,1502		TC7SG08FU
	IC 14,15,2002		TC7SH08FUS1
	IC 16		LAN8720A-CP
	IC 17		74LCX244FT
	IC 1001,1501		D810K013DZKB456
	IC 1003,1004		M12L2561616A-5TG2S
	IC 1005-1008,4404,4407		TC7WH157FK
	IC 2001		H337S3959
	IC 2003		DYW1900
	IC 2004		R5S72670P144FP
	IC 2005-2007,3006-3010		TC7SH08FUS1
	IC 2008,2009,4010,4107		CS8421-CZ
	IC 2010,3001,3004		TC7SZ08FUS1
	IC 3002		SI5351C-B03300GM
	IC 3005,3011-3014,3903		TC74VHC08FK
	IC 3015,3016,3019,3020		74VHC163FT
	IC 3021,4003,4008,4009		TC7SH08FUS1
	IC 3201		ES9018S
	IC 3202,3203,3206,3208		NJM8901E
	IC 3204,3205		LME49720NA
	IC 3207,3402,3403,3602		NJM4580MD
	IC 3401,3404,3606,3607		NJM8901E
	IC 3603,3803,3901,3902		NJM4580MD
	IC 3604,3605		NJM4580DD
	IC 3801,3802		NJM8901E
	IC 3904		AK4414EQ
	IC 4001,4101,4201,4301		TC7WU04FU
	IC 4002,4102,4202,4302		AK4117VF
	IC 4004,4103,4203,4303		TC74VHC08FK
	IC 4007,4106,4206,4306		AK4387ET
	IC 4011,4108,4208,4308		NJM4580MD
	IC 4207,4307,4401		CS8421-CZ
	IC 4402		AK4104ET
	IC 4403		SN65176BD
	IC 4405		CS210005-DZZ
	IC 4406,4409		74VHC163FT
	IC 4408		TC7WH157FK
	IC 4410		TC74VHC74FK
⚠	IC 4501		NJM2831F05
⚠	IC 4502		NJM78M05DL1A
⚠	IC 4504-4506		MM3542BF
⚠	IC 4507		BD9328EFJ
⚠	IC 4508,4509		NJM2872BF33
⚠	IC 4510		MM3479A25P
	IC 4511		TC7SH08FUS1
⚠	IC 4512		NJM78M15DL1A
	IC 4513		BD2226G
⚠	IC 4514		NJM2872BF05
⚠	IC 4515,4516		MM3571A33P
⚠	IC 4517		MM3571A12P
	IC 4522,4523		TC74VHC08FK
	Q 2		LTC024EEB
	Q 3001-3004,3201,3403		INC2002AC1
	Q 3202,4501,4503,4513		LTC124EUB
	Q 3401,3402		2SK209
	Q 3404,3407,3408		INC2002AC1
	Q 3601-3612		INC2002AC1
	Q 4502		LSC4081UB
	Q 4504,4505		LSA1576UB
	Q 4506-4508		HN1A01FU
	Q 4509-4511		HN1C01FU
	Q 4512		LSCR523UB
	D 3202-3205,3401,3402		DA2J101
	D 4507,4509-4511		DAN202UM
	D 4508,4512-4516		DA2J101

MISCELLANEOUS

	L 1-3	SMD SPL INDUCTOR	CTH1531
	L 4,5	COIL	ATH7015
	L 6,7	CHOKE COIL	DTH1216
	L 1001,1501	CHIP SOLID INDUCTOR	QTL1013
	L 1002,1502	SMD FERRITE BEADS	CTF1823
	L 2001	INDUCTOR	CTF1793
	L 2002-2004	CHIP SOLID INDUCTOR	QTL1013
	L 2005	CHOKE COIL	DTH1219
	L 4501,4503	CHOKE COIL	CTH1561
	L 4502	SMD SPL INDUCTOR	CTH1533
	L 4504	SMD SPL INDUCTOR	CTH1584
	F 1	EMI FILTER	DTL1106
	JA 3201,3202,3601	CANON CONNECTOR	DKB1093
	JA 3401	RCA JACK/4P	DKB1112
	JA 3602,4401	CANON CONNECTOR	DKB1093
	JA 4001	RCA JACK/4P	DKB1111
	KN 4501-4508	WRAPPING TERMINAL	CKF1089
	RY 3201,3202	RELAY	VSR1008
	T 1,2	TRANSFORMER	DTX1010
	T 4401	TRANSFORMER	DTL1225
	X 1	CRYSTAL OSCILLATOR	CWX4280
	X 2	CRYSTAL OSCILLATOR	DSS1209
	X 2001	CRYSTAL TRANSDUCER	ASS7120
	X 3001	CRYSTAL OSCILLATOR	ASS7102
	X 4401	OSCILLATOR	CWX3849
	CN 2,4504	CONNECTOR	AKM1281
	CN 3,3902,4503	CONNECTOR	AKM1280
	CN 2002,4502	CONNECTOR	AKM1276
	CN 3801	11P CONNECTOR	VKN1415
	CN 3901	14P CONNECTOR	VKN1418

Mark	No.	Description	Part No.
NSP	CN 4501	CONNECTOR	AKM1279
	CN 4505	19P CONNECTOR	VKN1423
	CN 4506,4513	24P CONNECTOR	VKN1428
	CN 4507	FFC/FPC CONNECTOR	DKN1663
	CN 4508	CONNECTOR	VKN2050
	CN 4509	CONNECTOR	AKM1277
	CN 4510	CONNECTOR	AKM1274
	CN 4511	22P CONNECTOR	VKN1426
	CN 4512	15P CONNECTOR	VKN1419
	CN 4516	CONNECTOR	AKM1282
	CN 4517	6P CONNECTOR	VKN1410
	VA 3201-3204,3601-3604	VARISTORS	EZJZ1V270RM

RESISTORS

R	12,57	RS1/10SR680J
R	19,177,318,319	RS1/10SR0R0J
R	194,312-315	RS1/16SS49R9F
R	195,196,4535	RS1/16SS1001D
R	199	RS1/16SS2400F
R	310,4523,4537	RS1/16SS1002D
R	311	RS1/16SS1501F
R	321,1001,1107,1108	RS1/10SR0R0J
R	1207	RS1/10SR560J
R	1209	RS1/10SR101J
R	1501,2001,2002,3205	RS1/10SR0R0J
R	2037,2154,4026,4120	RAB4CQ103J
R	2065	RS1/16SS5601F
R	2098,4028,4123,4224	RS1/10SR1203D
R	2099,2103,4029,4124	RS1/10SR1001F
R	2101,2105,3416,3417	RS1/10SR2201D
R	2102,2106,4032,4127	RS1/10SR1802D
R	2107,4408	RS1/10SR1503D
R	2109,4035,4130,4230	RS1/10SR6801D
R	3004,3006,3077,3078	RS1/10SR183J
R	3201,3203,3207,3214	RN1/16SE2701D
R	3202,3204,3213,3215	RN1/16SE1000D
R	3206,3216,3217,3321	RS1/10SR0R0J
R	3218-3225,3262-3269	RN1/16SE1801D
R	3226-3233,3242-3249	RN1/16SE4701D
R	3234-3241,3623-3630	RN1/16SE1201D
R	3250-3257,3282-3285	RN1/16SE1001D
R	3270-3277,3655-3662	RN1/16SE2201D
R	3278-3281,3601-3604	DCN1198
R	3304,3306,3309,3314	RS1/4SA0R0J
R	3307,3312,3402,3404	RN1/16SE1000D
R	3308,3313,3639-3654	RN1/16SE1001D
R	3310	RS1/10SR1002D
R	3311	RS1/10SR6201D
R	3322,3405,3406,3459	RS1/10SR0R0J
R	3401,3403,3455,3457	RN1/16SE2701D
R	3407-3409,3450	RS1/10SR5601D
R	3410,3411,3414,3415	RS1/10SR7501D
R	3412,3413,3446,3451	RS1/10SR3301D
R	3420,3421	RS1/10SR105J
R	3422,3423,3440,3441	RN1/16SE1002D
R	3424,3427	DCN1200
R	3425,3426,3444,3445	RS1/10SR183J
R	3428,3429	RN1/16SE8201D
R	3430,3431	RN1/16SE3901D
R	3432,3433	RS1/10SR100J
R	3434,3435,3442,3443	RS1/4SA101J
R	3436,3437,3687-3690	RS1/10SR104J
R	3447,3452,4031,4126	RS1/10SR2201D
R	3448,3449,3453,3454	RS1/10SR7501D
R	3456,3458,3681,3685	RN1/16SE1000D
R	3460,3695-3698	RS1/10SR0R0J
R	3607-3614,3911-3914	RN1/16SE1801D
R	3615-3622,3631-3638	RN1/16SE4701D
R	3663-3666,3671-3674	RS1/10SR183J
R	3667-3670	DCN1198
R	3675-3678	RN1/16SE1001D
R	3679,3683,3691,3693	RN1/16SE2701D
R	3680,3682,3684,3686	RS1/10SR183J
R	3692,3694,3802,3804	RN1/16SE1000D
R	3700-3707	RN1/16SE8200D
R	3801,3803,3805,3807	RN1/16SE2701D
R	3806,3808	RN1/16SE1000D
R	3809-3812,3815,3817	RS1/10SR0R0J
R	3813,3816,3819,3822	RN1/16SE4701D
R	3814,3818,3820,3824	RN1/16SE1101D
R	3821,3823,3917,3918	RS1/10SR0R0J
R	3903-3906,3929-3932	RN1/16SE2701D
R	3907-3910,3933-3936	RN1/16SE4701D
R	3916,3919	RS1/10SR103J
R	3920,3921,4450,4541	RS1/10SR0R0J
R	3937-3940	RN1/16SE1801D
R	4001,4101,4201,4301	RS1/10SR75R0D
R	4220,4320	RAB4CQ103J
R	4225,4324,4410	RS1/10SR1001F
R	4227,4326,4406	RS1/10SR2201D
R	4228,4327,4407	RS1/10SR1802D
R	4323	RS1/10SR1203D
R	4330,4532	RS1/10SR6801D
R	4424,4425	RS1/10SR22R0D
R	4444	RS1/10SR82R0F
R	4522	RS1/16SS2702D
R	4524	RS1/16SS2202D
R	4525	RS1/16SS4701D
R	4526	RS1/16SS8201D
R	4527	RS1/16SS51R0D
R	4528,4531,4534	RS1/16SS2201D
R	4529	RS1/16SS1102D
R	4530	RS1/10SR5600D
R	4533	RS1/10SR75R0D
R	4536	RS1/16SS3301D
R	4592	RS1/16SS1202D
R	4593	RS1/16SS2002D
Other Resistors		RS1/16SS###J

CAPACITORS

C	1,2,10,11	CKSSYB104K10
C	3-9,16,17	CCG1192
C	12-15,19-25	CKSSYB103K16
C	18,26,30,36	CKSSYB104K10
C	27-29,31,32	CKSSYB103K16
C	33,34,74,75	CCG1192
C	35,37-41,43	CKSSYB103K16
C	42,44,48,52	CKSSYB104K10
C	45-47,49-51	CKSSYB103K16
C	53,66-73,76	CKSSYB103K16

Mark	No.	Description	Part No.
C	54-61,88		CKSSYB104K10
C	62-64,111,112		DCH1266
C	77,93		CCSSCH7R0D50
C	78-80,83,85		CCG1218
C	81,82,87,91		CCG1212
C	84,86,89,94		CCG1192
C	90,92,98		CCG1218
C	95,99,107,118		CCG1192
C	96,152,4606,4609		CCG1212
C	100,160,4412,4530		CEVW101M16
C	101,4415		CKSRYB105K10
C	102-105,113-117		CKSSYB104K10
C	106,109,110,131		CKSSYB103K16
C	108,150,1007,1008		CKSSYB471K50
C	119-129		CKSSYB224K6R3
C	130,133-137,140		CKSSYB104K10
C	138,139,149,1041		DCH1266
C	141,144,145,148		CKSSYB104K10
C	142,143,146,147		CKSSYB102K50
C	153,154,161,1005		CKSSYB104K10
C	155,156		CKSSYB223K16
C	157,159,1001-1004		CCG1192
C	158		ACG1127
C	1006,1042,1043		CKSSYB104K10
C	1009,1011,1013,1015		CKSSYB103K16
C	1010,1012,1014,1016		CKSSYB102K50
C	1017,1019,1021,1022		CKSSYB103K16
C	1018,1020,1023,1025		CKSSYB102K50
C	1024,1026,1028,1030		CKSSYB103K16
C	1027,1029,1031,1033		CKSSYB102K50
C	1032,1034,1036-1038		CKSSYB103K16
C	1035,1510,1512,1514		CKSSYB102K50
C	1039,1539,2036,3272		CCSSCH101J50
C	1040,1048-1061,1068		CKSSYB103K16
C	1044,1045,1501-1504		CCG1192
C	1062-1065,1505,1506		CKSSYB104K10
C	1507,1508,2009,2010		CKSSYB471K50
C	1509,1511,1513,1515		CKSSYB103K16
C	1516,1518,1520,1523		CKSSYB102K50
C	1517,1519,1521,1522		CKSSYB103K16
C	1524,1526,1528,1530		CKSSYB103K16
C	1525,1527,1529,1531		CKSSYB102K50
C	1532,1534,1536-1538		CKSSYB103K16
C	1533,1535,2037		CKSSYB102K50
C	1540,2012-2015		CKSSYB103K16
C	1541		DCH1266
C	1542,1543,2002,2007		CKSSYB104K10
C	2001		CKSSYB222K50
C	2003-2006,2040		CCG1192
C	2008,2011,2016,2032		CKSSYB104K10
C	2017-2031,2034,2035		CKSSYB103K16
C	2033,2039,2041		CKSSYB104K10
C	2038,2045-2047,2056		CKSSYB103K16
C	2042-2044,2054,2055		CKSSYB102K50
C	2048-2050,2058-2060		CKSSYB104K10
C	2051-2053,2063,2064		CCG1192
C	2057,2067,2068,2076		CKSSYB103K16
C	2061,2082,3002,3010		CKSSYB102K50
C	2062,2065,2066,2069		CKSSYB104K10

Mark	No.	Description	Part No.
C	2070,2073,2074,2080		CKSSYB104K10
C	2071,2072		CCSSCH5R0C50
C	2075,3217,3224,3278		CCG1192
C	2077-2079		CCSSCH471J50
C	2083,3001,3003,3004		CKSSYB104K10
C	3006,3008,3012,3013		CKSSYB103K16
C	3011,3017,3023-3027		CKSSYB104K10
C	3016,3018-3022,3028		CKSSYB102K50
C	3029,3033,3035,3036		CKSSYB102K50
C	3030-3032,3034,3037		CKSSYB104K10
C	3038,3040,3042,3046		CKSSYB102K50
C	3039,3041,3043,3045		CKSSYB104K10
C	3047,3955,4004,4008		CKSSYB104K10
C	3201,3285,3295,3297		CKSRYB102K50
C	3202,3919,3924,3935		CKSRYB103K50
C	3203,3204,3210,3212		ACE7107
C	3205,3207,3209,3213		CCSRCH102J50
C	3206,3208,3218,3221		CEVW221M25
C	3211,3901,4010,4018		CKSSYB103K16
C	3214,3216,3219,3223		CCSRCH102J50
C	3215,3220,3227		CKSRYB104K50
C	3222,3226,3940		CEVW221M25
C	3225,3290,3403-3405		CCSRCH102J50
C	3228-3231		ACE7115
C	3232-3235		ACE7099
C	3236-3243		ACE7117
C	3248-3250,3252,3263		CKSRYB104K50
C	3251,3253,3299		ACE7100
C	3258-3261,3273-3276		ACE7119
C	3262,3265		CEHVAW221M35
C	3264,3266,3267,3288		CKSRYB104K50
C	3268-3271		CEANP221M16
C	3277,3917,3922,3941		ACE7114
C	3279,3293,3933		CCH1565
C	3282,3296,3629,3630		CCSRCH101J50
C	3283,3284		CKSRYB474K16
C	3287,3624,3628,3659		CEVW101M25
C	3289,3291,3417,3419		CKSRYB104K50
C	3292,4021,4028,4120		CCG1192
C	3316		CEVW221M10
C	3401,3402,3408,3410		ACE7107
C	3406,3407,3422,3423		CCSRCH181J50
C	3411,3436,3437		CCSRCH102J50
C	3412,3413		CCSRCH182J50
C	3414,3415		CCSRCH471J50
C	3416,3421		CKSRYB334K10
C	3418,3420,4533-4536		CCG1236
C	3424,3425,3916,3949		CKSSYB102K50
C	3426,3427,3623		CKSRYB104K50
C	3428-3431		CEVWNP100M35
C	3432-3435		CFHXSQ472J16
C	3439,4032,4127,4227		CKSRYB102K50
C	3607-3610		CCSQCH472J50
C	3611-3614,3657,3658		CCSRCH102J50
C	3615-3622		CCSRCH221J50
C	3625-3627,3634,3638		CKSRYB104K50
C	3637,3642,4646		CCSRCH101J50
C	3639,3643,3810,3811		CKSRYB104K50
C	3645-3648		CEANP470M25

Mark	No.	Description	Part No.
	C	3649-3652	ACE7119
	C	3653-3656,3801-3804	ACE7107
	C	3660,3662,3664,3666	CCSRCH102J50
	C	3661,3663,3665,3906	CEVW101M25
	C	3667,3805-3809,3812	CCSRCH102J50
	C	3902,3904	CEVW470M25
	C	3903,3913,3914,3920	CKSRYB104K50
	C	3907,3908,4408	CCSSCH102J50
	C	3909-3912,3943-3946	CCSRCH331J50
	C	3915,3950,4407	CCSSCH101J50
	C	3918,3923,3930-3932	CCSRCH102J50
	C	3921,4524,4527	CEVW101M25
	C	3925,3926,3936,3939	CKSRYB104K50
	C	3934,3937,3952	CCSRCH102J50
	C	3938,3951,3953,4002	CKSRYB103K50
	C	3942,4615,4616	ACE7114
	C	3947,3948,4034,4035	CKSRYB104K50
	C	3954,4015,4025,4026	CKSSYB102K50
	C	4001,4101,4201,4301	CCSSCH221J50
	C	4005,4105,4205,4305	CCSSCH470J50
	C	4006,4007,4030,4031	CEVW100M16
	C	4009,4011,4012,4020	CKSSYB104K10
	C	4019,4110,4117,4118	CKSSYB103K16
	C	4022-4024,4027,4029	CKSSYB104K10
	C	4033,4102,4128,4202	CKSRYB103K50
	C	4104,4108,4109,4112	CKSSYB104K10
	C	4106,4107,4124,4125	CEVW100M16
	C	4111,4211,4311,4413	CKSSYB102K50
	C	4119,4121,4122,4126	CKSSYB104K10
	C	4123,4220,4223,4320	CCG1192
	C	4129,4130,4229,4230	CKSRYB104K50
	C	4204,4208,4209,4212	CKSSYB104K10
	C	4210,4217,4218,4310	CKSSYB103K16
	C	4219,4221,4222,4226	CKSSYB104K10
	C	4224,4225,4325,4326	CEVW100M16
	C	4228,4302,4328,4604	CKSRYB103K50
	C	4304,4308,4309,4312	CKSSYB104K10
	C	4317,4318,4401,4404	CKSSYB103K16
	C	4319,4321,4322,4324	CKSSYB104K10
	C	4323,4562,4592-4599	CCG1192
	C	4327,4502-4504,4506	CKSRYB102K50
	C	4329,4330,4622,4623	CKSRYB104K50
	C	4402,4403,4405,4409	CKSSYB104K10
	C	4406	CEVW100M16
	C	4410	CCSSCH331J50
	C	4414,4416-4418,4420	CKSSYB104K10
	C	4419,4421,4424,4427	CKSSYB102K50
	C	4422,4423,4425,4426	CKSSYB104K10
	C	4428,4429	CCSSCH221J50
	C	4430-4433	CCSSCH102J50
	C	4501,4507,4508,4512	CKSQYB104K50
	C	4505	CCH1680
	C	4509,4514,4526,4529	CKSRYB102K50
	C	4510,4511,4641,4642	CCH2000
	C	4513	CEVW470M35
	C	4515,4517,4525,4528	CKSQYB104K50
	C	4516	CCH1998
	C	4518	CKSQYB225K16
	C	4519,4553-4555,4558	CKSSYB104K10
	C	4522,4523	CKSSYB103K25
	C	4531,4539-4542,4560	CKSQYB104K50
	C	4532,4543,4545-4548	CKSRYB102K50
	C	4537,4600,4644	CKSQYB334K50
	C	4557,4584-4587,4602	CKSRYB102K50
	C	4563,4567-4571,4618	CKSSYB104K10
	C	4564-4566	CKSRYB153K50
	C	4572	CCSSCH821J50
	C	4573	CKSSYB682K25
	C	4574	CKSSYB122K50
	C	4575	CKSSYB332K50
	C	4588-4591,4601,4648	CKSQYB104K50
	C	4603,4607,4608,4645	CKSRYB102K50
	C	4605,4664	CKSRYB103K50
	C	4610,4612,4666	CCG1212
	C	4611,4613,4614,4667	CCG1192
	C	4619,4626,4633	CKSSYB102K50
	C	4620,4621,4624,4625	CKSSYB104K10
	C	4627,4628,4655	CKSSYB104K10
	C	4640	CEVW101M16
	C	4643	CKSSYB103K16
	C	4647,4651,4663,4665	CKSRYB102K50
	C	4650,4652,4653,4662	CKSQYB104K50
	C	4654,4656	CKSRYB104K50
	C	4657-4661	CKSSYB104K10
	C	4668,4672,4673,4676	CCG1328
	C	4669,4671,4674,4675	CKSRYB102K50
	C	4677,4680	CCG1328
	C	4678,4679,4685	CKSRYB102K50

H AFAD ASSY

MISCELLANEOUS

	VR	7851 SLIDE VR	DCV1027
	CN	7851 L-PLUG(3P)	KM200NA3L

I REGB ASSY

SEMICONDUCTORS

⚠	IC	7601	NJM7805FA
⚠	IC	7602	NJM7815FA
⚠	IC	7603	NJM7915FA
	D	7604,7605	RB501V-40
	D	7604,7605	RB501VM-40

MISCELLANEOUS

	CN	7601 L-PLUG(9P)	KM200NA9L

CAPACITORS

	C	7601-7603,7610,7611	CKSRYB103K50
	C	7604-7606	CKSRYB104K16
	C	7607	CCG1205
	C	7608,7609	CKSQYB105K25
	C	7613,7614,7616	CKSRYB102K50
	C	7615	CKSRYB103K50

J USBP ASSY

Mark	No.	Description	Part No.
SEMICONDUCTORS			
⚠	IC	4851	MM3543BH
	IC	4852	TPS2557DRB
	Q	4851	RN1903
	Q	4852	LSCR523UB
	D	4851	DZ2J051M0
MISCELLANEOUS			
	L	4851 SMD SPL INDUCTOR	CTH1524
	KN	4851,4852 WRAPPING TERMINAL	CKF1089
	CN	4851 CONNECTOR	AKM1292
	CN	4852 CONNECTOR	AKM1291
RESISTORS			
	R	4851	RS1/8SQ0R0J
	R	4852	RS1/16SS104J
	R	4857,4862	RS1/16SS103J
	R	4860	RS1/16SS101J
	R	4861	RS1/10SR472J
	R	4863	RS1/10SR331J
	R	4865	RS1/10SR221J
	Other Resistors		RS1/16SS####D
CAPACITORS			
	C	4851	CCG1254
	C	4852	CKSSYB102K50
	C	4855,4857	CKSSYB104K10
	C	4856	CKSRYB153K50
	C	4858	CCSSCH821J50
	C	4863,4864,4867	CCG1192
	C	4865	CCH1565
	C	4866	CEVW331M6R3
	C	4868	CKSRYB104K16

K USBC ASSY

MISCELLANEOUS			
	JA	4801 USB JACK	DKB1118
	CN	4801 CONNECTOR	AKM1281
CAPACITORS			
	C	4801	CKSSYB103K16
	C	4802	CCG1192
	C	4803	CKSSYB102K50
	C	4804	CCSSCK2R0C50

L USBB ASSY

MISCELLANEOUS			
	JA	4701,4702 CONNECTOR	DKN1607
	KN	4701,4702 WRAPPING TERMINAL	CKF1089
	CN	4701 CONNECTOR	AKM1281
RESISTORS			
	R	4711,4713	RS1/10SR0R0J
	Other Resistors		RS1/16SS###J
CAPACITORS			
	C	4707,4708	CCG1192
	C	4713,4714	CKSSYB103K16
	C	4715,4716	CKSSYB102K50

Mark	No.	Description	Part No.

M SEND ASSY

SEMICONDUCTORS			
	IC	6001	NJM4565MD
	Q	6001,6002	2SK209
	Q	6003,6004	INC2002AC1
MISCELLANEOUS			
	CN	6001 11P CONNECTOR	VKN1242
	CN	6002 PLUG(5P)	KM200NA5
	JH	6001 PCB BINDER	AEF7008
RESISTORS			
	R	6001,6002	RS1/10SR4701D
	R	6003,6004,6007,6008	RS1/10SR3002D
	R	6005,6006	RS1/10SR3901D
	R	6009,6010	RS1/10SR3601D
	R	6011,6012	RD1/2VM821J
	Other Resistors		RS1/10SR###J
CAPACITORS			
	C	6001,6003	CKSRYB103K25
	C	6002,6004-6006	CEAT220M50
	C	6007,6008	CCSRCH332J50
	C	6009,6010	CCSRCH561J50
	C	6011,6012	CCSRCH390J50
	C	6013,6014	CKSRYB334K10
	C	6015,6016	CKSSYB473K16
	C	6017,6018	CEANP100M35

N SEJK ASSY

MISCELLANEOUS			
	JA	9441,9442 MIC JACK	DKN1614
	KN	9441 SCREW PLATE	VNE1948
	CN	9441 L-PLUG(5P)	KM200NA5L
CAPACITORS			
	C	9441,9442	DCE1016

O REJK ASSY

SEMICONDUCTORS			
	IC	9651	NJM4580MD
MISCELLANEOUS			
	JA	9651 HEADPHONE JACK	XKB3066
	JA	9652 MIC JACK	DKN1614
	KN	9651 SCREW PLATE	VNE1948
	CN	9651 L-PLUG(8P)	KM200NA8L
RESISTORS			
	R	9653,9654	RN1/16SE3302D
	R	9655,9656	RN1/16SE1502D
	Other Resistors		RS1/10SR###J
CAPACITORS			
	C	9651,9652	CCSSCH101J50
	C	9653,9654	CCSSCH102J50
	C	9655,9658	CEAT101M25
	C	9656,9657	CKSSYB103K25

Mark	No.	Description	Part No.
P		**HPPW ASSY**	
		SEMICONDUCTORS	
⚠	IC	8001	MM3543BH
⚠	IC	8002	NJW4154GM1-A
	IC	8201,8202	NJM4580DD
	Q	8201,8203,8205,8207	LSCR523UB
	Q	8201,8203,8205,8207	2SC4154-11
	Q	8201,8203,8205,8207	LSC4081UB
	Q	8202,8204,8206,8208	ISA1602AM1
	Q	8202,8204,8206,8208	LSAR523UB
	Q	8202,8204,8206,8208	LSA1576UB
	Q	8209,8212,8214,8216	2SB1184F5
	Q	8210,8211,8213,8215	2SD1760F5
	Q	8217-8220	RT1N241M
	Q	8217-8220	LTC124EUB
	Q	8221-8224	LSAR523UB
	Q	8221-8224	ISA1602AM1
	D	8001	RB056L-40
	D	8201-8212	DA2J101
	D	8201-8212	1SS355VM
		MISCELLANEOUS	
	L	8001 CHOKE COIL	CTH1436
	L	8003 SMD SPL INDUCTOR	CTH1519
	KN	8001,8002 EARTH TERMINAL	AKF7002
	RY	8201,8202 RELAY	VSR1008
	CN	8001 PLUG(4P)	KM200NA4
	CN	8002 PLUG(3P)	KM200NA3
	CN	8201 14P CONNECTOR	VKN1418
	CN	8202 PLUG(7P)	KM200NA7
		RESISTORS	
	R	8001,8010	RS1/16SS103J
	R	8002	RS1/10SR9102D
	R	8003	RS1/16SS7500D
	R	8005,8021,8296	RS1/4SA0R0J
	R	8006	RS1/16SS1102D
	R	8014	RS1/16SS4702D
	R	8017	RS1/16SS2002D
	R	8018	RS1/16SS1001D
	R	8019	RS1/16SS2701D
	R	8022,8023	RS1/4SA681J
	R	8202-8205,8210-8213	RN1/16SE1201D
	R	8214,8216,8217,8219	RN1/16SE4701D
	R	8215,8218,8221,8224	RD1/2VM151J
	R	8220,8222,8223,8225	RN1/16SE4701D
	R	8226-8229,8234-8237	RN1/16SE1001D
	R	8230-8233,8242-8245	RN1/16SE1201D
	R	8238-8241,8246-8265	RS1/4SA240J
	R	8268-8271	RD1/2VM151J
		Other Resistors	RS1/10SR###J
		CAPACITORS	
	C	8001,8003,8004,8017	ACG1142
	C	8002,8007,8020,8026	CCSSCH102J50
	C	8005,8006,8011,8014	CKSSYB104K16
	C	8010	CKSYB475K25
	C	8012,8022,8023,8028	CCG1192
	C	8013	CKSRYB153K50
	C	8015	CEHAT221M10
	C	8016	CCSSCH561J50
	C	8021,8025	CKSSYB104K16
	C	8024	CEAT470M25
	C	8201,8205,8206,8221	CEHAT101M16
	C	8202,8204,8230,8231	CEHAT101M25
	C	8207	CCSRCH101J50
	C	8208,8210,8212,8215	CCSRCH821J50
	C	8209,8211,8213,8214	CKSRYB104K50
	C	8226-8229	CCG1182
	C	8232,8233	CEHAT101M16
Q		**HPJK ASSY**	
		MISCELLANEOUS	
	JA	8702 HEADPHONE JACK	XKB3066
	KN	8701 SCREW PLATE	VNE1948
	CN	8701 L-PLUG(4P)	KM200NA4L
		RESISTORS	
		All Resistors	RS1/10SR###J
		MISCELLANEOUS	
	VA	8700,8701 VARISTORS	EZJZ1V270RM
		CAPACITORS	
	C	8702,8704	CFHXSP104J16
	C	8708	CKSRYB102K50
	C	8710	CKSRYB103K50
	C	8711	CKSRYB104K50
R		**HPJM ASSY**	
		MISCELLANEOUS	
	JA	6501 STEREO MINI JACK	XKN3017
	KN	6501 SCREW PLATE	VNE1948
	CN	6501 L-PLUG(3P)	KM200NA3L
		RESISTORS	
		All Resistors	RS1/10SR###J
		MISCELLANEOUS	
	VA	6503 VARISTORS	EZJZ1V270RM
		CAPACITORS	
	C	6502,6503	CKSRYB104K25
	C	6505	CKSRYB102K50
	C	6506	CKSRYB103K50
S		**HPP2 ASSY**	
		SEMICONDUCTORS	
	IC	8801	NJM4580DD
	Q	8801,8803	LSC4081UB
	Q	8802,8804	LSA1576UB
	Q	8805,8807	2SD1760F5
	Q	8806,8808	2SB1184F5
	Q	8809,8810	LTC124EUB
	Q	8811,8812	LSAR523UB
	D	8801-8806	DA2J101
		MISCELLANEOUS	
	JA	8801 HEADPHONE JACK	XKB3066

Mark	No.	Description	Part No.
	KN 8801	SCREW PLATE	VNE1948
	RY 8801	RELAY	VSR1008
	CN 8801	L-PLUG(9P)	KM200NA9L
	CN 8802	L-PLUG(3P)	KM200NA3L
	VA 8801-8803	VARISTORS	EZJZ1V270RM

RESISTORS

	R	8801,8802,8805,8806	RN1/16SE1201D
	R	8807,8809,8810,8812	RN1/16SE4701D
	R	8813-8816	RN1/16SE1001D
	R	8817-8820	RN1/16SE1201D
	R	8821-8832	RS1/4SA240J
	R	8849	RS1/4SA0R0J
	R	8850,8852-8854	RD1/2VM151J
	Other Resistors		RS1/10SR###J

CAPACITORS

	C	8801,8802	CEHAT101M16
	C	8803,8805	CCSRCH821J50
	C	8804,8807	CKSRYB104K50
	C	8806,8808	CEHAT101M25
	C	8811,8812	CEAT101M16
	C	8813,8818	CCSRCH101J50
	C	8814,8815	CCG1182
	C	8816,8817	CFHXSP104J16
	C	8819	CCSRCH102J50
	C	8820	CKSRYB103K50

T PNLA ASSY

SEMICONDUCTORS

	IC	7001	DYW1901
	IC	7002	S-80927CNMC-G8X
⚠	IC	7003,7004	NJM2872BF33
	IC	7005-7008	TC74HC4051AF
	IC	7009	NJM2903M
	Q	7001	RT1P141M
	Q	7001	LTA114EUB
	Q	7002	RT1P241M-11
	Q	7002	LTA124EUB
	Q	7003,7012-7027	LSCR523UB
	Q	7003,7012-7027	2SC4154-11
	Q	7008,7010,7037,7039	RT1N241M
	Q	7008,7010,7037,7039	LTC124EUB
NSP	Q	7009,7011	2SB1694
	Q	7033-7036,7049-7065	LSCR523UB
	Q	7033-7036,7049-7065	2SC4154-11
	Q	7038,7040,7042,7044	2SB1689
	Q	7041,7043,7045,7047	LTC124EUB
	Q	7041,7043,7045,7047	RT1N241M
	Q	7046,7048	2SB1689
	Q	7066	RT1P431M
	Q	7066	LTA143EUB
	Q	7067-7076	RT1N241M
	Q	7067-7076	LTC124EUB
	Q	7079-7082	LSCR523UB
	Q	7079-7082	2SC4154-11
	D	7000-7012,7017,7018	LTL17KRH5D
	D	7013-7016,7019-7036	SLI-343YYW
	D	7037-7040,7043-7096	LTL17KGH5D
	D	7041,7042,7129-7138	SLI-343YYW
	D	7097-7099,7173,7178	SLI-343M8G
	D	7110,7139-7172	1SS355VM
	D	7110,7139-7172	DA2J101
	D	7111-7121,7179-7184	SLR343BD2T
	D	7122-7127	SLR343WBD2PT
	D	7128	LTL17KCGP4J
	D	7174-7177	DA2J101
	D	7174-7177	1SS355VM

MISCELLANEOUS

	VR	7001-7003	POTENTIONETER DCS1065
	VR	7004,7008,7012,7016	ROTARY VR DCS1126
	VR	7005-7007	POTENTIONETER DCS1065
	VR	7009-7011	POTENTIONETER DCS1065
	VR	7013-7015	POTENTIONETER DCS1065
	VR	7018-7020,7022	POTENTIONETER DCS1065
	VR	7021	POTENTIOMETER DCS1109
	VR	7023	POTENTIOMETER DCS1108
	S	7001-7004	ROTARY SWITCH DSG1131
	S	7005,7006	SLIDE SWITCH DSH1066
	S	7007	SLIDE SWITCH DSH1058
	S	7008-7022,7028,7029	TACT SWITCH DSG1079
	S	7023-7027	TACT SWITCH DSG1117
	X	7001	CERAMIC RESONATOR DSS1147
	CN	7001,7004	24P CONNECTOR VKN1255
	CN	7002	19P CONNECTOR VKN1250
	CN	7003	28P CONNECTOR VKN1259
	CN	7006	PLUG(3P) KM200NA3
	CN	7007	PLUG(3P) KM200NA3R
	CN	7008	PLUG(3P) KM200NA3E
	CN	7009	PLUG(3P) KM200NA3Y

RESISTORS

	All Resistors		RS1/10SR###J

CAPACITORS

	C	7001-7003,7005	XCEJQ470M16
	C	7006-7008,7010,7013	CKSRYB104K16
	C	7009,7125	CKSRYB104K50
	C	7014,7017	CKSRYB105K10
	C	7015,7018,7028-7032	CCSRCH102J50
	C	7016,7019-7023,7026	CKSRYB104K16
	C	7024	DCH1256
	C	7025,7066,7068-7071	CCSRCH471J50
	C	7034-7037,7131	CCSRCH102J50
	C	7038,7043-7045	CKSRYB104K16
	C	7039,7040,7042,7120	CKSRYB103K50
	C	7048	CKSRYB473K50
	C	7049,7127,7128	CCSRCH101J50
	C	7050	XCEJQ101M16
	C	7051-7065,7067	CKSRYB104K16
	C	7072-7079,7081	CKSRYB104K16
	C	7080,7082-7085,7089	CCSRCH471J50
	C	7086-7088,7090	CKSRYB104K16
	C	7091-7094,7098	CCSRCH471J50
	C	7095-7097,7099	CKSRYB104K16
	C	7101-7103,7108,7109	CCSRCH471J50
	C	7104-7107,7123,7126	CKSRYB104K16
	C	7111-7119	CCSRCH471J50
	C	7121,7130	CKSRYB103K50
	C	7124	CCG1222

Mark	No.	Description	Part No.

U FAD1 ASSY

MISCELLANEOUS

	VR	7811 SLIDE VR	DCV1027
	CN	7811 L-PLUG(3P)	KM200NA3L

V FAD2 ASSY

MISCELLANEOUS

	VR	7821 SLIDE VR	DCV1027
	CN	7821 L-PLUG(3P)	KM200NA3L

W FAD3 ASSY

MISCELLANEOUS

	VR	7831 SLIDE VR	DCV1027
	CN	7831 L-PLUG(3P)	KM200NA3L

X FAD4 ASSY

MISCELLANEOUS

	VR	7841 SLIDE VR	DCV1027
	CN	7841 L-PLUG(3P)	KM200NA3L

Y CDCB ASSY

SEMICONDUCTORS

	IC	4902	ATSAMD20E15A-MU
	D	4916-4921	SWBA05

MISCELLANEOUS

	L	4906 CHIP SOLID INDUCTOR	XTL3010
	CN	4906 24P CONNECTOR	VKN1428
	CN	4909,4910 FFC/FPC CONNECTOR	CKS6476
	CN	4911 7P CONNECTOR	VKN1411
NSP		1001 X-PAD FIRM	DVJ1007

RESISTORS

	R	4900,4921,4922	RS1/10SR122J
	R	4924-4926,4945-4956	RS1/10SR122J
		Other Resistors	RS1/16SS###J

CAPACITORS

	C	4910,4911,4922-4924	CKSSYB104K10
	C	4912,4913,4916,4917	CKSRYB104K50
	C	4914,4915	CKSQYB105K25
	C	4920,4921	CCG1222
	C	4925,4941-4945	CKSSYB102K50
	C	4934	CKSRYB104K50
	C	4936,4953,4957	CCG1234
	C	4937,4938,4956,4958	CKSSYB104K10
	C	4954	DCH1266

Z PNLB ASSY

SEMICONDUCTORS

	Q	7502,7511	2SC4154-11
	Q	7502,7511	LSCR523UB
	D	7505,7506	SLR343BD2T
	D	7509-7524	1SS355VM
	D	7509-7524	DA2J101
	D	7525,7526	SLI-343YYW

MISCELLANEOUS

	VR	7501,7504 ROTARY VR	DCS1125
	VR	7502,7503 POTENTIONETER	DCS1065
	S	7501-7506 SLIDE SWITCH	DSH1058
	S	7507,7508 SLIDE SWITCH	DSH1066
	S	7509,7513 ROTARY ENCODER	DSX1068
	S	7510 TACT SWITCH	DSG1117
	S	7511 TACT SWITCH	DSG1079
	S	7512 ROTARY ENCODER	DSX1136
	CN	7501 28P CONNECTOR	VKN1259
	CN	7502 PLUG(3P)	KM200NA3
	CN	7503 6P CONNECTOR	VKN1237

RESISTORS

		All Resistors	RS1/10SR###J

CAPACITORS

	C	7501,7504,7506-7508	CKSRYB104K16
	C	7502	XCEJQ470M16
	C	7503,7505	CKSRYB103K50
	C	7510	CKSRYB104K16

AA CRFD ASSY

* When replacement of the CRFD Assy is required, be sure to order the CROSS FADER Assy (DXA2257) which is a parent Assy.

AB AUXI ASSY

SEMICONDUCTORS

	IC	9500	TC7SH32FUS1
	IC	9501,9502	NJM8901E
	IC	9503-9506	NJM4580MD
	IC	9507	CS5381-KZ
	IC	9508	NJM4565MD
	D	9501-9504	RB706F-40

MISCELLANEOUS

	KN	9501,9502 EARTH TERMINAL	AKF7002
	CN	9501,9502 CONNECTOR	CKS3561
	CN	9503 B TO B 11PIN PLUG	AKM7101
	CN	9504 22P CONNECTOR	VKN1426

RESISTORS

	R	9505-9508	RN1/16SE2202D
	R	9509-9512	RN1/16SE2702D
	R	9517-9520	RN1/16SE1801D
	R	9521-9524,9529,9530	RN1/16SE2201D
	R	9527,9528	RN1/16SE2701D
	R	9531-9538	RN1/16SE1501D
	R	9539,9541,9542,9544	RN1/16SE2200D
	R	9540,9543,9545,9546	RN1/16SE1001D
	R	9547-9550	RN1/16SE1201D
	R	9553,9556,9557,9560	RN1/16SE2700D
	R	9554,9555,9558,9559	RN1/16SE1001D

Mark	No.	Description	Part No.
		Other Resistors	RS1/10SR###J
CAPACITORS			
	C	9500,9562	CCSRCH222J50
	C	9517,9518,9529,9531	CEHAZL101M25
	C	9534-9537,9549	CCSRCH102J50
	C	9548,9555,9556	CKSRYB103K50
	C	9550,9560	ACH1480
	C	9551	DCH1201
	C	9552,9553,9559	CKSRYB104K50
	C	9554	ACE7113
	C	9557	CEHAZL331M6R3
	C	9558	CEHAZL101M10
	C	9563	CKSSYB104K16
	C	9564,9565	CEANP100M35

AC TRMA ASSY

MISCELLANEOUS			
	VR	9461 ROTARY VR	DCS1118
	CN	9461 B TO B 11PIN JACK	AKN7067
CAPACITORS			
	C	9461	CKSRYB104K25

AD AUXL ASSY

MISCELLANEOUS			
	JA	9401 XLR SOCKET	DKB1124
	CN	9401 PLUG	CKS3533
	VA	9401,9402,9420 VARISTORS	EZJZ1V270RM
RESISTORS			
	R	9401,9402	RN1/16SE1000D
		Other Resistors	RS1/10SR###J
CAPACITORS			
	C	9403,9404	CCSRCH102J50
	C	9405,9406	CCSRCH101J50

AE AUXR ASSY

SEMICONDUCTORS			
	D	9421,9422	DZ2J062M0
MISCELLANEOUS			
	JA	9421 XLR SOCKET	DKB1124
	CN	9421 PLUG	CKS3533
	VA	9421-9423 VARISTORS	EZJZ1V270RM
RESISTORS			
	R	9421,9422	RN1/16SE1000D
		Other Resistors	RS1/10SR###J
CAPACITORS			
	C	9423,9424	CCSRCH102J50
	C	9425,9426	CCSRCH101J50

AF PNLR ASSY

Mark	No.	Description	Part No.
SEMICONDUCTORS			
	Q	9701,9702,9705-9709	LSCR523UB
	Q	9703,9704	LTC124EUB
	D	9701-9708,9713-9716	SLI-343YYW
	D	9709-9712,9717,9718	DA2J101
	D	9719,9720	SLI-343YYW
	D	9721,9722	DA2J101
MISCELLANEOUS			
	VR	9701 POTENTIONETER	DCS1065
	VR	9702 ROTARY VR	DCS1125
	S	9701-9707 TACT SWITCH	DSG1117
	S	9708 SLIDE SWITCH	DSH1066
	CN	9701 24P CONNECTOR	VKN1284
RESISTORS			
		All Resistors	RS1/10SR###J
CAPACITORS			
	C	9701	DCH1201
	C	9702,9703	CKSRYB103K50
	C	9704,9705	CKSRYB104K16

AG PNLL ASSY

SEMICONDUCTORS			
	Q	9601-9605	LSCR523UB
	Q	9606,9608,9610,9612	LTC124EUB
	Q	9607,9609,9611,9613	2SB1689
	Q	9614	LTC124EUB
NSP	Q	9615	2SB1694
	D	9601,9602,9604,9607	SLI-343YYW
	D	9603,9606	LTL17KRH5D
	D	9605,9608,9611-9613	LTL17KGH5D
	D	9609,9610	SLI-343YYW
	D	9614	SLR343BD2T
MISCELLANEOUS			
	S	9601 TACT SWITCH	DSG1117
	CN	9601 15P CONNECTOR	VKN1275
RESISTORS			
		All Resistors	RS1/10SR###J
CAPACITORS			
	C	9601	DCH1201
	C	9602-9606	CKSRYB104K50

AH LANB ASSY

SEMICONDUCTORS			
NSP	IC	9001,9004	RTL8152B-VB-CG
⚠	IC	9003	MM3479A33P
	IC	9202	S-80927CNMC-G8X
	IC	9205	RTL8309M-CG
	IC	9206	TC7SET08FUS1
	IC	9208	TC7SH08FUS1
	D	9004,9006	RB160M-60
MISCELLANEOUS			
	F	9001,9002,9201 EMI FILTER	CCG1352
	JA	9001,9201-9205 LAN JACK	DKN1662
	JA	9002 BNC CONNECTOR	DKN1536

Mark	No.	Description	Part No.
	KN	9001-9003 WRAPPING TERMINAL	CKF1089
	S	9001 SLIDE SWITCH	ASH1027
	T	9001,9002,9201-9205 TRANSFORMER	DTX1009
	X	9001,9002,9201 CRYSTAL(25MHZ)	DSS1205
	CN	9001 CONNECTOR	AKM1286
	CN	9002 CONNECTOR	AKM1295
	CN	9003 CONNECTOR	AKM1297

RESISTORS

	R	9001,9003,9004,9007	RS1/10SR0R0J
	R	9008	RS1/10SR0R0J
	R	9009,9010,9037	RS1/10SR330J
	R	9017,9028,9228	RS1/8SQ0R0J
	R	9020,9031,9233	RS1/16SS1801D
	R	9021,9032,9234	RS1/16SS6800D
	R	9041-9043,9235-9254	RS1/10SR330J
	R	9044	RS1/10SR75R0D
		Other Resistors	RS1/16SS###J

CAPACITORS

	C	9003,9064,9244-9248	ACG1127
	C	9006,9029,9208	DCH1201
	C	9007,9008,9011,9012	CKSSYB104K16
	C	9009,9016,9032,9042	CCSSCH120J50
	C	9013,9053,9229-9233	CCSSCH102J50
	C	9014,9040	ACG1122
	C	9015,9018,9019,9021	CKSSYB104K16
	C	9020,9028,9033,9035	CKSSYB105K6R3
	C	9024-9027,9030,9031	CKSSYB104K16
	C	9036,9038,9041,9043	CKSSYB104K16
	C	9037	CEVW101M16
	C	9045,9046,9049,9051	CKSSYB104K16
	C	9047	CKSSYB105K6R3
	C	9048	CCG1236
	C	9202,9207,9209,9210	CKSSYB104K16
	C	9203	CKSSYB473K16
	C	9211	CCSSCH120J50
	C	9212-9215,9217-9228	CKSSYB104K16
	C	9216	CCSSCH150J50
	C	9251,9256	CKSSYB104K16
	C	9257	CKSSYB102K50

AI ILMB ASSY

SEMICONDUCTORS

	IC	9801	BD9328EFJ
	IC	9804	TPS2557DRB
	Q	9801	LTC023JEB
	Q	9802-9806	LSAR523UB
	Q	9807	LTC024EEB
	Q	9809	LSCR523UB
	D	9801-9813,9820,9821	NHSW046A-0171
	D	9814-9816	DZ2J056M0
	D	9818	DZ2J100M0
	D	9819	DZ2J051M0

MISCELLANEOUS

	L	9801 INDUCTOR	CTH1253
	JA	9801,9802 CONNECTOR	DKN1607
	JA	9803 USB JACK	DKB1118
	KN	9801-9806 WRAPPING TERMINAL	CKF1089
	CN	9801 CONNECTOR	AKM1301

Mark	No.	Description	Part No.

RESISTORS

	R	9801	RS1/10SR1801F
	R	9803,9861,9862	RS1/10SR1501F
	R	9805,9811,9817,9823	RS1/10SR222J
	R	9806,9812,9818,9824	RS1/10SR182J
	R	9807-9810,9813-9816	RS1/4SA0R0J
	R	9819,9820	RS1/4SA0R0J
	R	9828	RS1/10SR1100D
	R	9829	RS1/10SR4702D
	R	9830	RS1/10SR1002D
	R	9834,9858	RS1/10SR561J
	R	9842	RS1/16SS4702F
	R	9856	RS1/16SS1501F
	R	9863-9870,9877-9879	RS1/10SR182J
	R	9876	RS1/10SR222J
		Other Resistors	RS1/16SS###J

CAPACITORS

	C	9801,9802,9822	ACG1142
	C	9803,9805,9806,9834	CKSSYB104K16
	C	9804	CCSSCH102J50
	C	9807,9819,9840	CKSSYB103K16
	C	9809,9813,9836,9839	DCH1201
	C	9811	CCH1565
	C	9814	CKSSYB104K10
	C	9817,9818	CKSRYB225K6R3
	C	9842	CKSRYB104K16

AJ SW POWER SUPPLY

There is no service parts.

AK ACSW ASSY

MISCELLANEOUS

⚠	S	7701	SWITCH	DSA1036
⚠	CN	7701	2P-SIDE VA-CONNECTOR	S2P3-VH
⚠	JP	7701	BOARD IN CONNECTOR	DDX1287

CAPACITORS

⚠	C	7701		ACG7030

AL GRMD ASSY

There is no service parts.