


9. EXPLODED VIEWS AND PARTS LIST

NOTES : • Parts marked by " * " are generally unavailable because they are not in our Master Spare Parts List.

- The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
- Screw adjacent to ▽ mark on the product are used for disassembly.
- For the applying amount of lubricants or glue, follow the instructions in this manual.
(In the case of no amount instructions, apply as you think it appropriate.)

9.1 PACKING

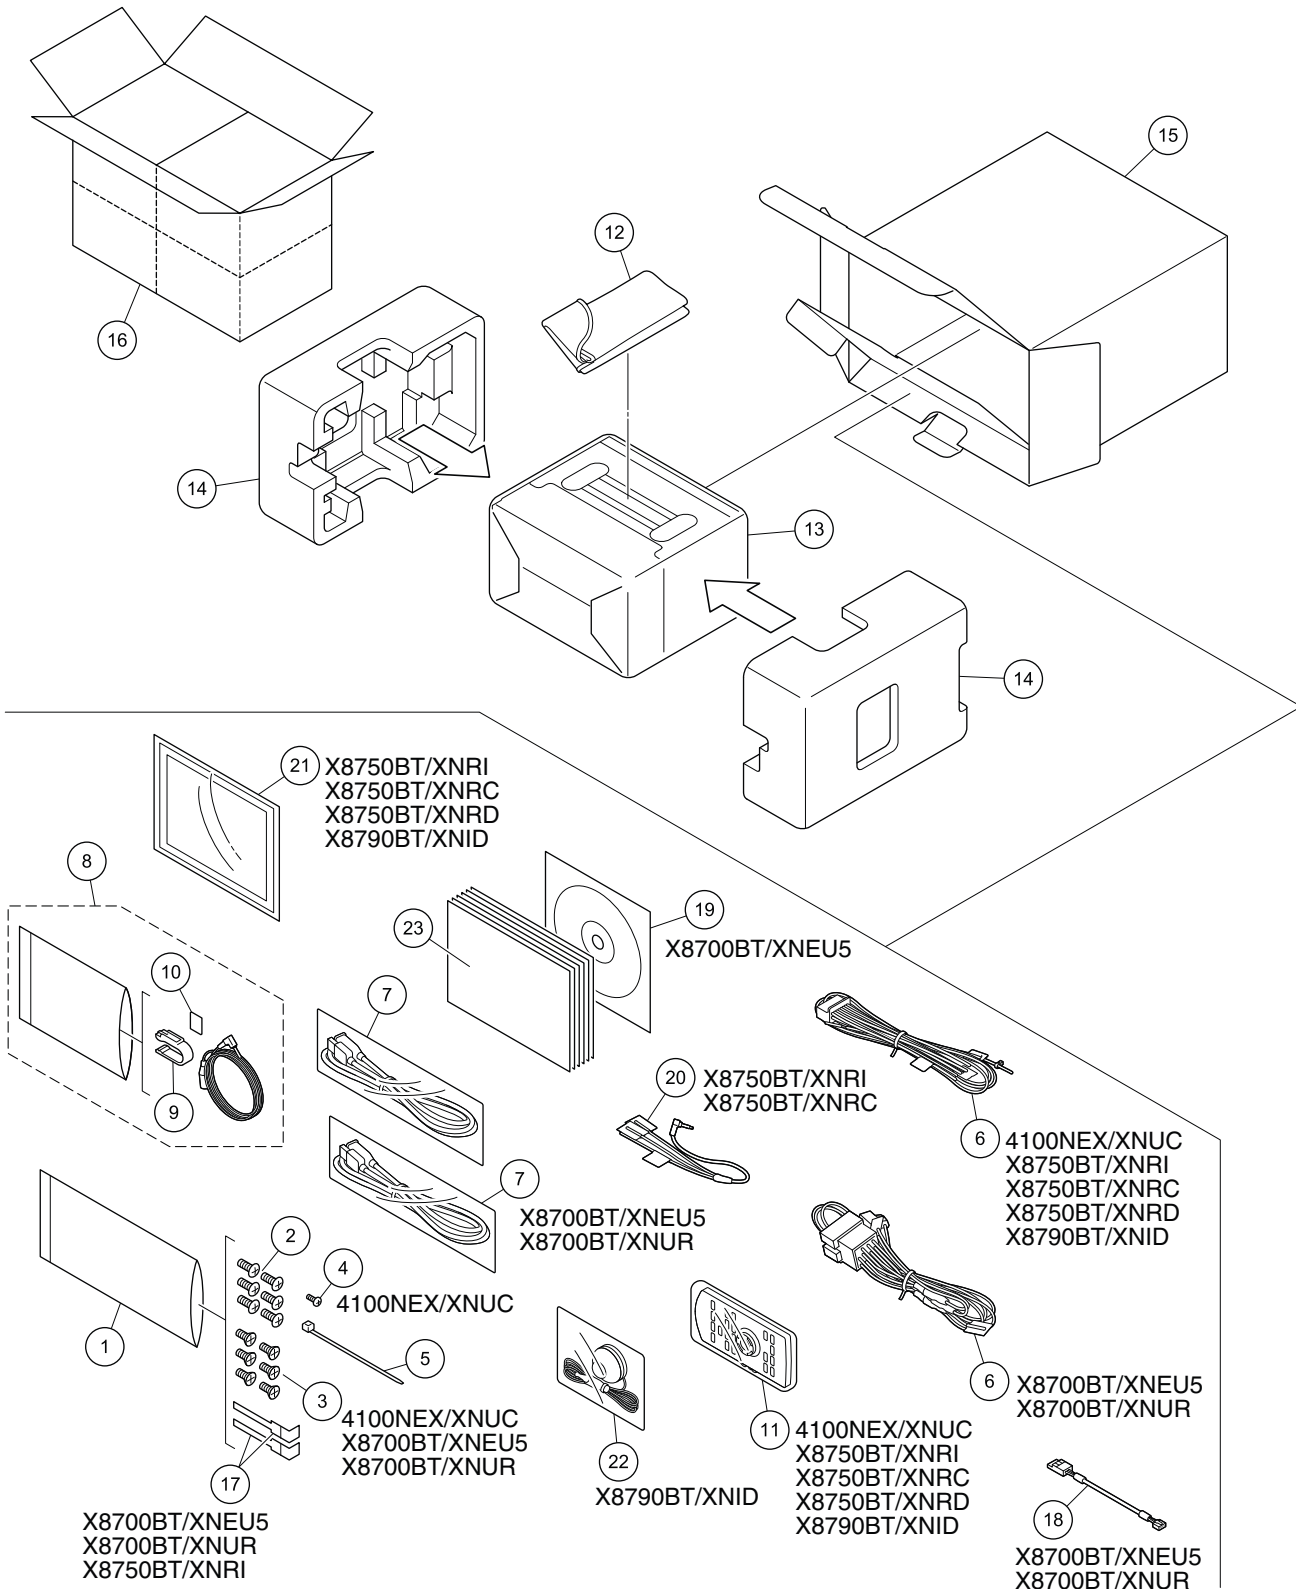

(1) PACKING SECTION PARTS LIST


Mark No.	Description	Part No.	Mark No.	Description	Part No.
1	Polyethylene Bag	CEG1160	16	Contain Box	See Contrast table (2)
2	Screw	TRZ50P080FTC	17	Handle	See Contrast table (2)
3	Screw	See Contrast table (2)	18	Cord	See Contrast table (2)
4	Screw	See Contrast table (2)	19	IM CD-ROM	See Contrast table (2)
* 5	Lock Tie	CNW2429	20	Cord Assy	See Contrast table (2)
6	Cord Assy	See Contrast table (2)	21	Panel	See Contrast table (2)
7	USB Extended Cable	See Contrast table (2)	22	Microphone Assy	See Contrast table (2)
8	Microphone Assy	CPM1083	* 23-1	Warranty Card	See Contrast table (2)
9	Holder	CZN7192	23-2	Owner's Manual	See Contrast table (2)
10	Cushion	CZN7193	* 23-3	Caution Card	See Contrast table (2)
11	Card Remote Control Unit	See Contrast table (2)	* 23-4	Caution Card	See Contrast table (2)
12	Detach Grille Case	YEG5016	23-5	Quick Start Guide	See Contrast table (2)
13	Cover	See Contrast table (2)	23-6	Installation Manual	See Contrast table (2)
14	Protector	See Contrast table (2)	* 23-7	Tag	See Contrast table (2)
15	Unit Box	See Contrast table (2)	* 23-8	Service Network	See Contrast table (2)
			23-9	Owner's Manual	See Contrast table (2)

(2) CONTRAST TABLE

AVH-4100NEX/XNUC, AVH-X8700BT/XNEU5, AVH-X8700BT/XNUR, AVH-X8750BT/XNRI, AVH-X8750BT/XNRC, AVH-X8750BT/XNRD and AVH-X8790BT/XNID are constructed the same except for the following:

Mark	No.	Description	AVH-4100 NEX/XNUC	AVH-X8700 BT/XNEU5	AVH-X8700 BT/XNUR	AVH-X8750 BT/XNRI	AVH-X8750 BT/XNRC	AVH-X8750 BT/XNRD	AVH-X8790 BT/XNID
	3	Screw	CRZ50P090F TC	CRZ50P090F TC	CRZ50P090F TC	Not used	Not used	Not used	Not used
	4	Screw	BPZ20P060F TC	Not used	Not used	Not used	Not used	Not used	Not used
	6	Cord Assy	CDP1665	CDP1670	CDP1670	CDP1665	CDP1665	CDP1665	CDP1665
	7	USB Extended Cable	CDP1587 (x1)	CDP1587 (x2)	CDP1587 (x2)	CDP1587 (x1)	CDP1587 (x1)	CDP1587 (x1)	CDP1587 (x1)
	11	Card Remote Control Unit	CXE5117	Not used	Not used	CXE5117	CXE5117	CXE5117	CXE5117
	13	Cover	CEG1359	CEG1356	CEG1356	CEG1356	CEG1356	CEG1356	CEG1356
	14	Protector	CHP4863	CHP4864	CHP4864	CHP4864	CHP4863	CHP4863	CHP4863
	15	Unit Box	CHG8921	CHG8925	CHG8926	CHG8927	CHG8922	CHG8923	CHG8924
	16	Contain Box	CHL8921	CHL8925	CHL8926	CHL8927	CHL8922	CHL8923	CHL8924
	17	Handle	Not used	CND6289	CND6289	CND6289	Not used	Not used	Not used
	18	Cord	Not used	CDP1669	CDP1669	Not used	Not used	Not used	Not used
	19	IM CD-ROM	Not used	CPJ1491	Not used	Not used	Not used	Not used	Not used
	20	Cord Assy	Not used	Not used	Not used	CDP1655	CDP1655	Not used	Not used
	21	Panel	Not used	Not used	Not used	CNS9475	CNS9475	CNS9475	CNS9475
	22	Microphone Assy	Not used	Not used	Not used	Not used	Not used	Not used	CPM1086
*	23-1	Warranty Card	QRY3001	CRY1376	CRY1376	Not used	Not used	Not used	CRY1304
	23-2	Owner's Manual	CRD4847	Not used	CRB4495	CRD4850	CRD4848	CRD4849	CRB4496
*	23-3	Caution Card	Not used	CRP1436	Not used	Not used	Not used	Not used	Not used
*	23-4	Caution Card	Not used	CRP1441	Not used	Not used	Not used	Not used	Not used
	23-5	Quick Start Guide	Not used	CRD4845	Not used	Not used	Not used	Not used	Not used
	23-6	Installation Manual	Not used	CRD4846	Not used	Not used	Not used	Not used	Not used
*	23-7	Tag	Not used	CRW1881	CRW1881	Not used	Not used	Not used	Not used
*	23-8	Service Network	Not used	Not used	Not used	Not used	Not used	Not used	CRY1305
	23-9	Owner's Manual	Not used	CRB4564	Not used	Not used	Not used	Not used	Not used

9.2 EXTERIOR (1)

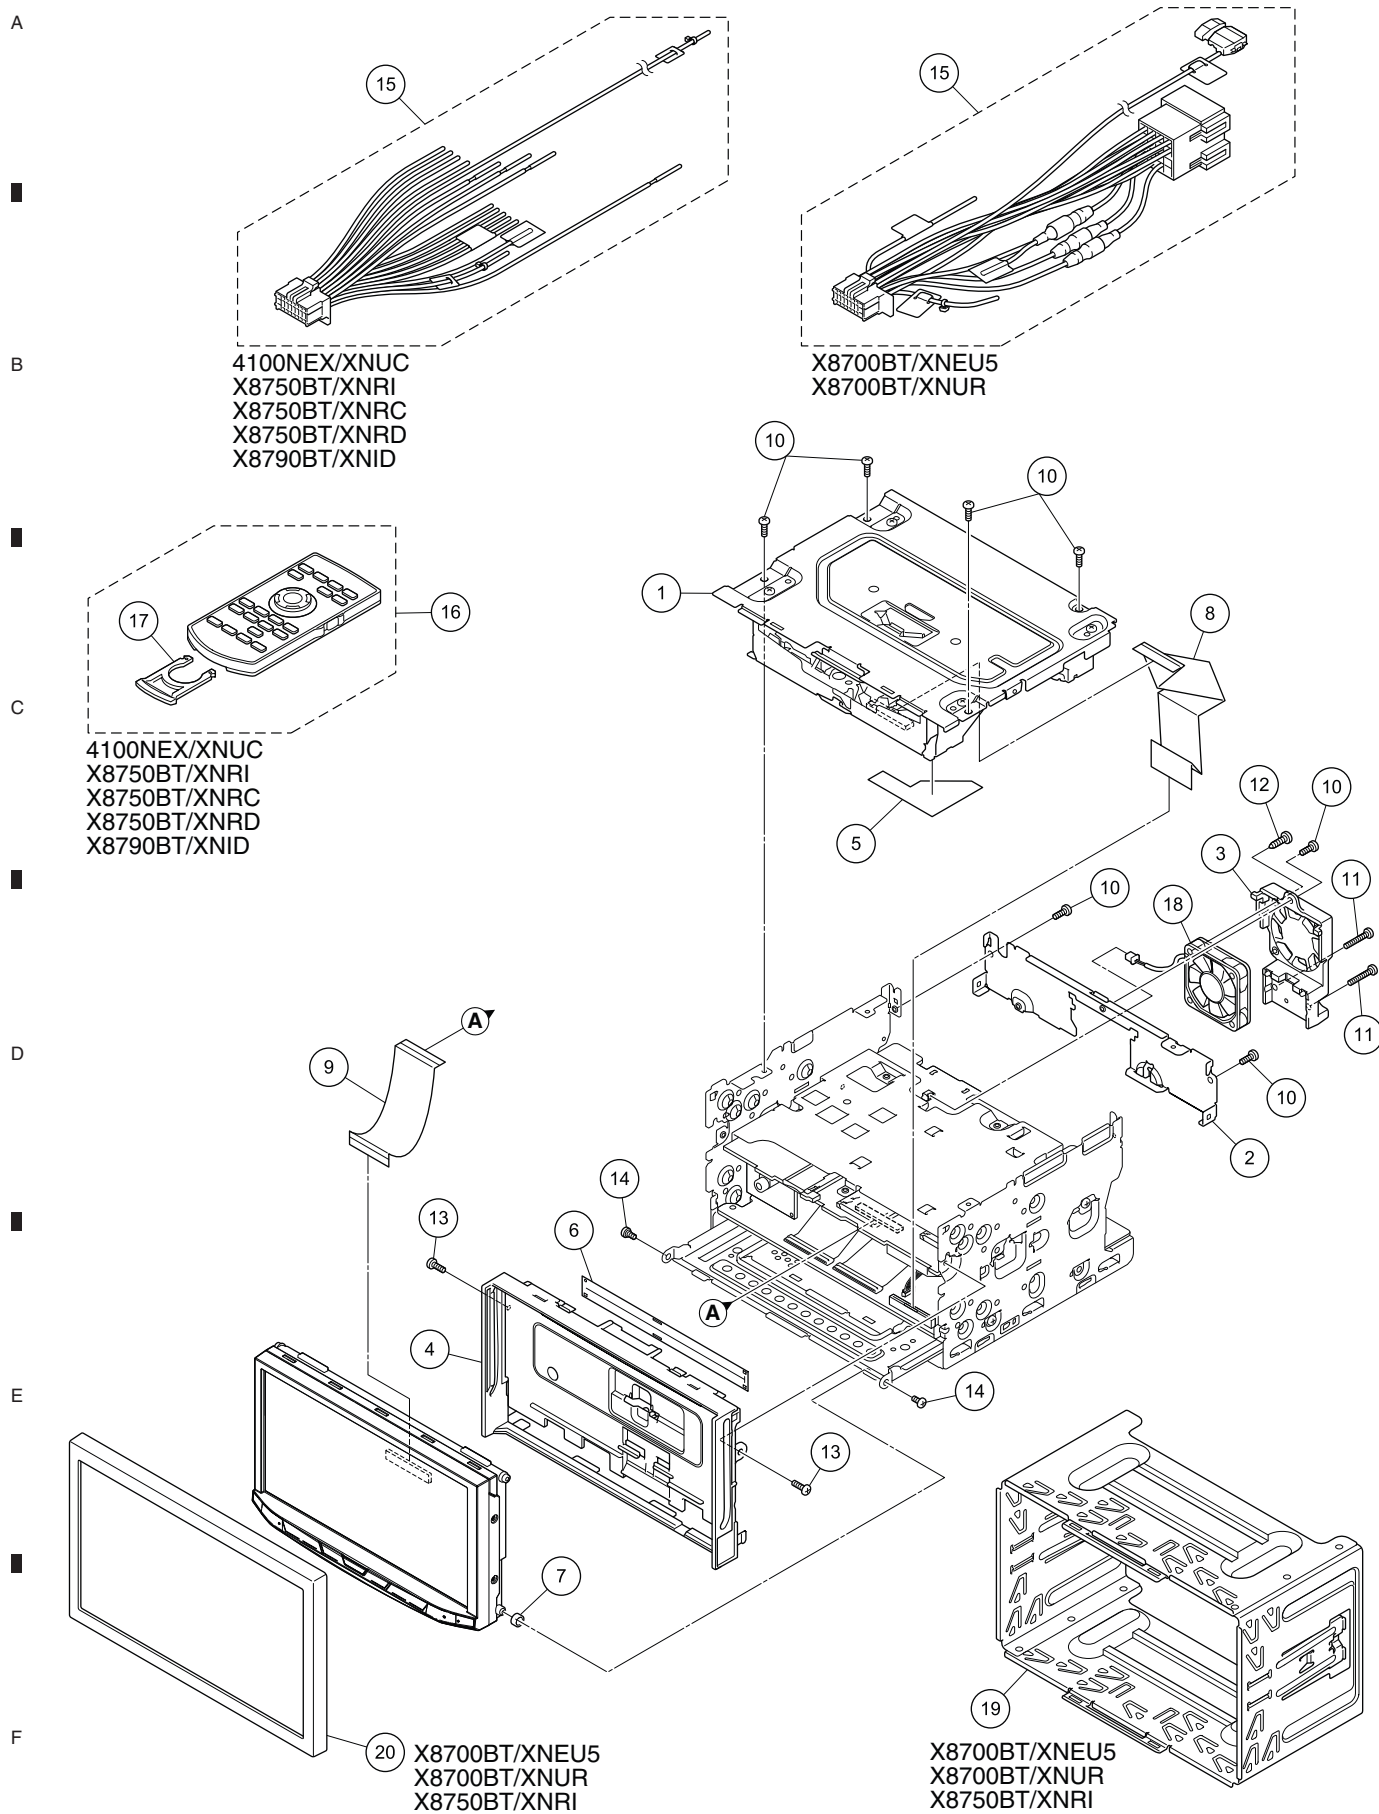

(1) EXTERIOR (1) SECTION PARTS LIST

Mark No.	Description	Part No.	Mark No.	Description	Part No.	
1	DVD Mechanism Module (LS2.5)	CXK8102	11	Screw	BSZ26P120FTC	A
2	Holder	CND6989	12	Screw	BPZ30P080FTC	
3	Heat Sink	CNR2165	13	Screw	ISS26P055FTC	
4	Panel	See Contrast table (2)	14	Screw	CBA1735	
5	Insulator	CNN4613	15	Cord Assy	See Contrast table (2)	
6	Cover	CNN4866	16	Card Remote Control Unit	See Contrast table (2)	B
7	Collar	CNW2038	17	Battery Cover	See Contrast table (2)	
8	FFC	CDD1033	18	Fan Motor	See Contrast table (2)	
9	FFC	CDD1039	19	Holder	See Contrast table (2)	
10	Screw	BSZ26P060FTC	20	Panel	See Contrast table (2)	

(2) CONTRAST TABLE

AVH-4100NEX/XNUC, AVH-X8700BT/XNEU5, AVH-X8700BT/XNUR, AVH-X8750BT/XNRI, AVH-X8750BT/XNRC, AVH-X8750BT/XNRD and AVH-X8790BT/XNID are constructed the same except for the following:

Mark	No.	Description	AVH-4100 NEX/XNUC	AVH-X8700 BT/XNEU5	AVH-X8700 BT/XNUR	AVH-X8750 BT/XNRI	AVH-X8750 BT/XNRC	AVH-X8750 BT/XNRD	AVH-X8790 BT/XNID	
	4	Panel	CNU3147	CNU3219	CNU3219	CNU3220	CNU3220	CNU3220	CNU3220	C
	15	Cord Assy	CDP1665	CDP1670	CDP1670	CDP1665	CDP1665	CDP1665	CDP1665	
	16	Card Remote Control Unit	CXE5117	Not used	Not used	CXE5117	CXE5117	CXE5117	CXE5117	
	17	Battery Cover	CNU1624	Not used	Not used	CNU1624	CNU1624	CNU1624	CNU1624	
	18	Fan Motor	CXM1449	CXM1449	CXM1449	CXM1449	CXM1449	CXM1449	CXM1449	
	19	Holder	Not used	CND7102	CND7102	CND7102	Not used	Not used	Not used	D
	20	Panel	Not used	CNU2645	CNU2645	CNU2645	Not used	Not used	Not used	

9.3 EXTERIOR (2)

A


B

C

D

E

F

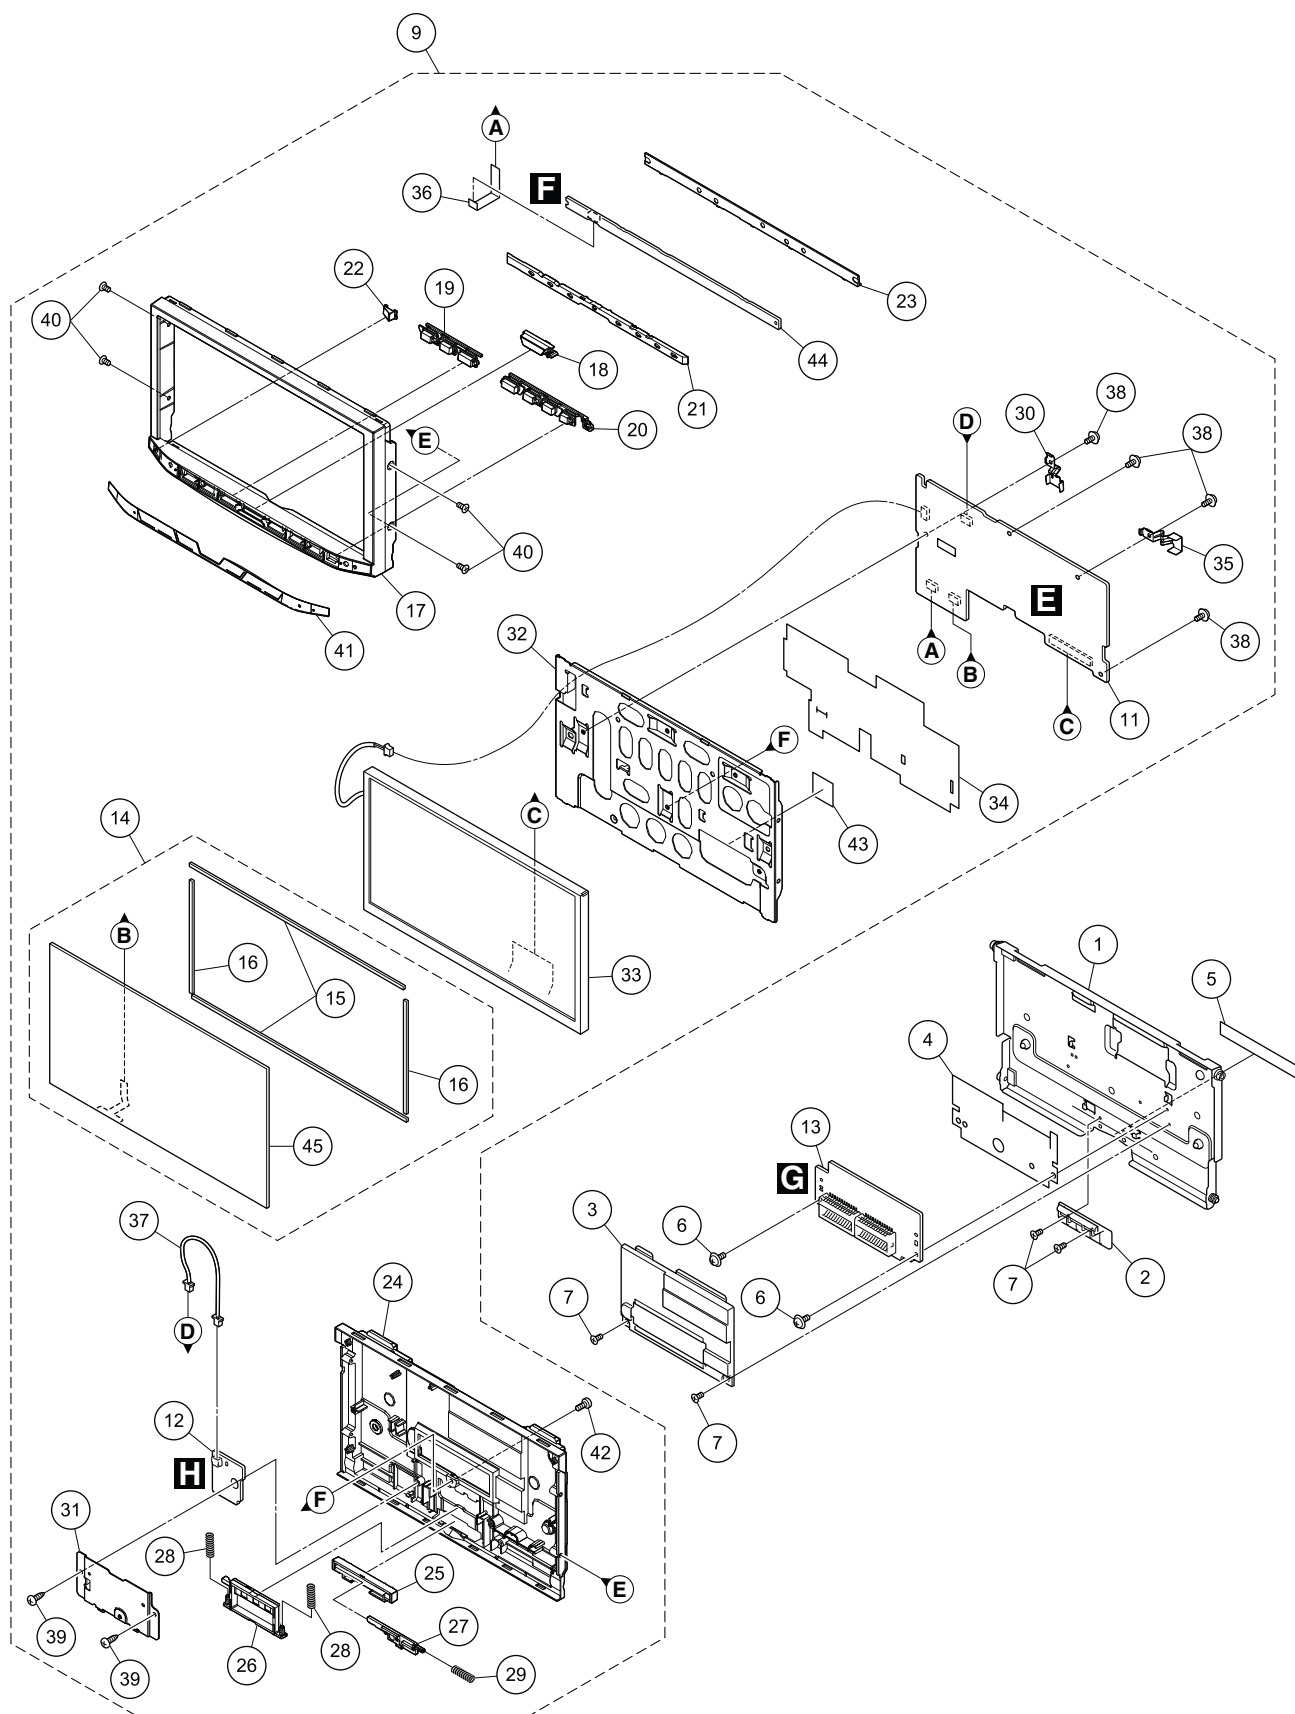

(1) EXTERIOR (2) SECTION PARTS LIST

Mark No.	Description	Part No.	Mark No.	Description	Part No.	
1	Case Unit	CXE6925	26	Lever	CNW2422	
2	Holder	CNW2424	27	Lever	CNW2423	A
3	Cover	CNW2425	28	Spring	CBH3099	
4	Insulator	CNN4611	29	Spring	CBH3100	
5	Cover	CNN4167	30	Plate Spring	CBL1832	
6	Screw	AMZ20P030FTC	31	Holder Unit	CXE4883	
7	Screw (M2 x 3)	CBA1877	32	Holder	CND7429	
8	•••••		33	TFT LCD	CWX4182	
9	Detach Monitor Assy	See Contrast table (2)	34	Insulator	CNN4610	
10	•••••		35	Plate Spring	CBL1833	
11	Monitor Unit (Service)	CXX7596	36	FFC	CDD1038	B
12	SW Unit (Service)	CXX7597	37	Harness	CDE9563	
13	Case Unit (Service)	CXX7598	38	Screw	AMZ20P030FTC	
14	Touch Panel Unit	CXE7770	39	Screw	BPZ20P060FTC	
15	Cushion	CNN4271	40	Screw	CBA2132	
16	Cushion	CNN4272	41	Plate	See Contrast table (2)	
17	Grille	CNU3245	42	Screw (M2 x 3)	CBA1797	
18	Button (HOME)	CAI4318	43	Sheet	CNN4869	
19	Button	CAI4319	44	Key Unit (Service)	CXX7595	
20	Button	CAI4320	45	Touch Panel	CSX1241	C
21	Lighting Conductor	CNW3102				
22	Lighting Conductor	CNW3103				
23	Holder	CNW3104				
24	Cover	CNU3246				
25	Button (DETACH)	CAI3743				


(2) CONTRAST TABLE

AVH-4100NEX/XNUC, AVH-X8700BT/XNEU5, AVH-X8700BT/XNUR, AVH-X8750BT/XNRI, AVH-X8750BT/XNRC, AVH-X8750BT/XNRD and AVH-X8790BT/XNID are constructed the same except for the following:

Mark	No.	Description	AVH-4100 NEX/XNUC	AVH-X8700 BT/XNEU5	AVH-X8700 BT/XNUR	AVH-X8750 BT/XNRI	AVH-X8750 BT/XNRC	AVH-X8750 BT/XNRD	AVH-X8790 BT/XNID
	9	Detach Monitor Assy	CXE7971	CXE7968	CXE7968	CXE7970	CXE7970	CXE7970	CXE7969
	41	Plate	CNN5045	CNN5044	CNN5044	CNN5046	CNN5046	CNN5046	CNN5047

1 2 3 4

9.4 EXTERIOR (3)

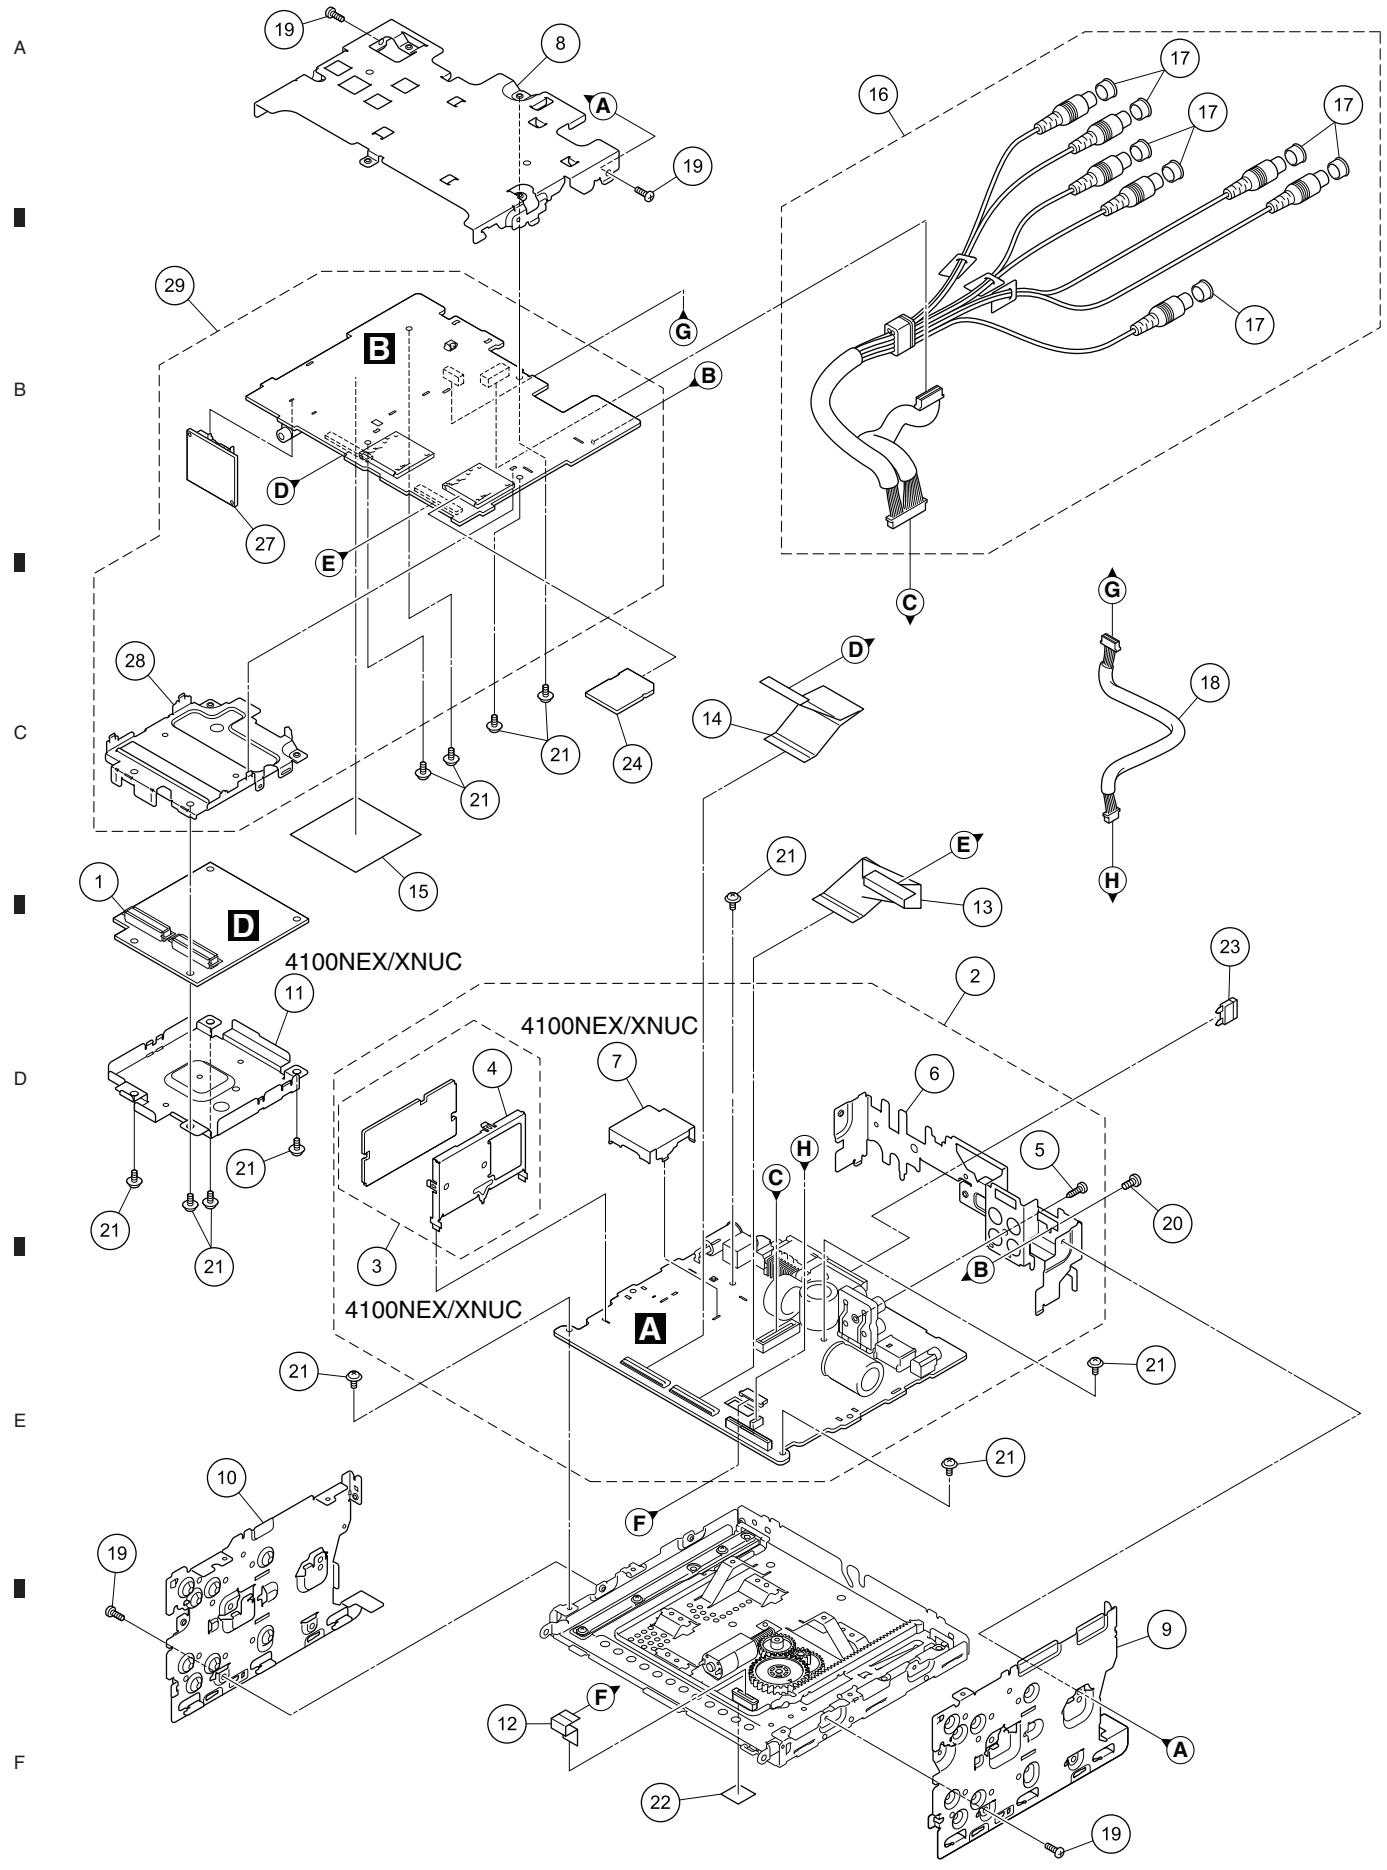

(1) EXTERIOR (3) SECTION PARTS LIST

Mark No.	Description	Part No.	Mark No.	Description	Part No.
1	SOC Single Core Unit	CWN9393	16	Cable Assy	CDF1078
2	AV Unit	See Contrast table (2)	17	Cap	CNV6727
3	BE Core Unit (U1701)	See Contrast table (2)	18	Cable Assy	CDF1197
4	Holder	See Contrast table (2)	19	Screw	BSZ26P060FTC
5	Screw	BPZ26P080FTC	20	Screw	BMZ30P060FTC
6	Holder	See Contrast table (2)	21	Screw	ASZ26P050FTC
7	Shield Case	See Contrast table (2)	22	Label	CNN3533
8	Holder	CND6984	23	Fuse (10 A)	YEK5001
9	Bracket	CND6985	24	Service Strage SD Assy	CXX7615
10	Bracket	CND6986	25	•••••	
11	Shield Case	See Contrast table (2)	26	•••••	
12	FFC	CDD1034	27	BT Module	CWX4710
13	FFC	CDD1035	28	Holder	CND6987
14	FFC	CDD1036	29	IF Unit (Service)	See Contrast table (2)
15	Sheet	CNN4830			


(2) CONTRAST TABLE

AVH-4100NEX/XNUC, AVH-X8700BT/XNEU5, AVH-X8700BT/XNUR, AVH-X8750BT/XNRI, AVH-X8750BT/XNRC, AVH-X8750BT/XNRD and AVH-X8790BT/XNID are constructed the same except for the following:

Mark	No.	Description	AVH-4100 NEX/XNUC	AVH-X8700 BT/XNEU5	AVH-X8700 BT/XNUR	AVH-X8750 BT/XNRI	AVH-X8750 BT/XNRC	AVH-X8750 BT/XNRD	AVH-X8790 BT/XNID
	2	AV Unit	CWN9113	CWN9108	CWN9114	CWN9112	CWN9110	CWN9111	CWN9109
	3	BE Core Unit (U1701)	CWE2518	Not used	Not used	Not used	Not used	Not used	Not used
	4	Holder	CND7288	Not used	Not used	Not used	Not used	Not used	Not used
	6	Holder	CND6990	CND7001	CND7001	CND6991	CND6991	CND6991	CND6991
	7	Shield Case	CND7003	Not used	Not used	Not used	Not used	Not used	Not used
	11	Shield Case	CND6988	Not used	Not used	Not used	Not used	Not used	Not used
	29	IF Unit (Service)	CXX7592	CXX7590	CXX7593	CXX7591	CXX7591	CXX7591	CXX7591

1 2 3 4

9.5 EXTERIOR (4)

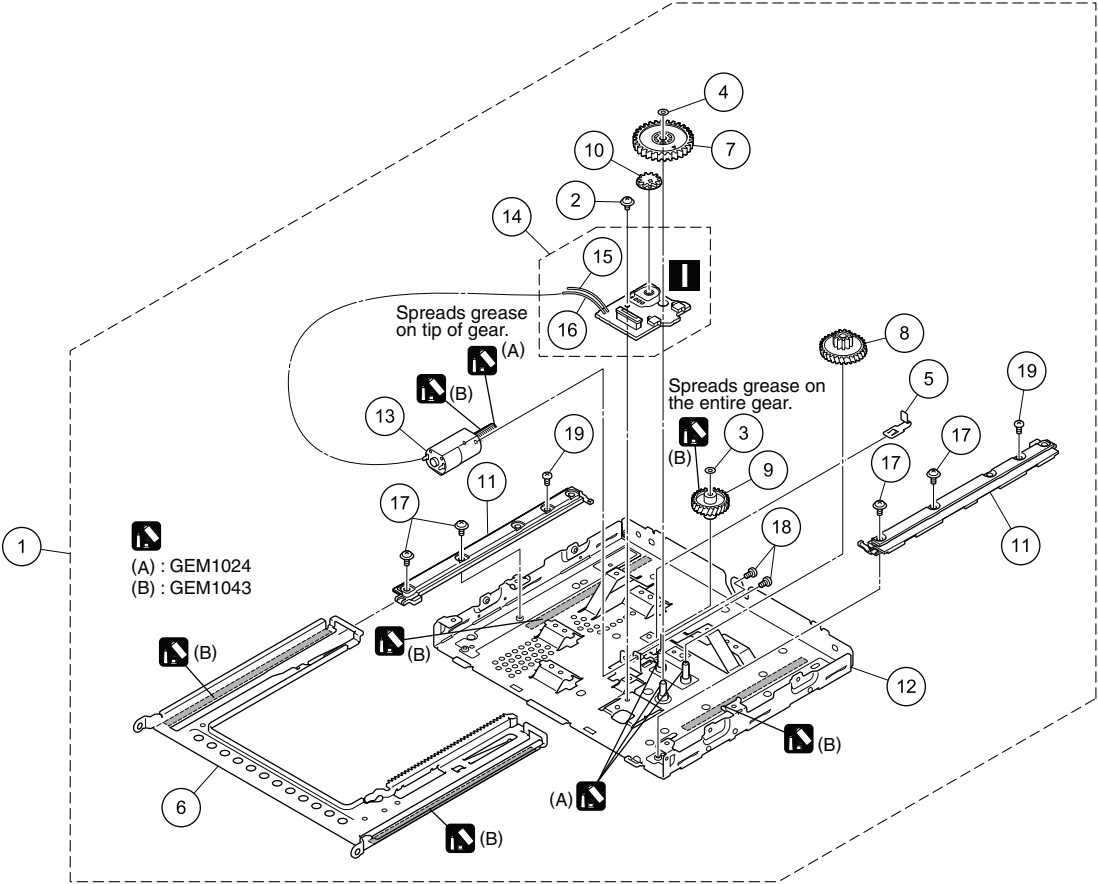

EXTERIOR (4) SECTION PARTS LIST

Mark No.	Description	Part No.	
1	Drive Mechanism Unit	CXE7000	
2	Screw	AMZ26P030FTC	A
3	Washer	CBF1039	
4	Washer	CBF1064	
5	Spring	EBL1034	
6	Frame	ENC2001	■
7	Gear	ENV1630	
8	Gear	ENV1631	
9	Gear	ENV1632	
10	Gear	ENV1635	
11	Guide	ENV3001	B
* 12	Chassis Unit	EXA4027	
13	Motor Unit	EXA4003	
14	PCB Assy (Service)	EXX2001	
* 15	Cord (Green)	CDC1056	■
* 16	Cord (White)	CDC1057	
17	Screw	IMS26P060FTC	
18	Screw	JFZ20P025FTC	
19	Screw	EBA2002	C
			■
			D
			■
			E
			■
			F

△



(NOTE) Apply grease to the whole part.

DVD MECHANISM MODULE (1) SECTION PARTS LIST

Mark No.	Description	Part No.	Mark No.	Description	Part No.
1	Screw	BSZ20P040FTC	36	Gear	CNW1187
2	Screw	BSZ26P060FTC	37	Clamper	CNW1190
3	Screw (M2 x 4)	CBA1835	38	Arm	CNW1192
4	Washer	CBF1038	39	Holder	CNW1193
5	Spring	CBH2855	40	Holder	CNW1194
6	Spring	CBH2860	41	Damper	CNW2439
7	Spring	CBH3010	42	Damper	CNW2440
8	Spring	CBH3011	43	Arm	CNW1726
9	Spring	CBH3014	44	Guide	CNW3489
10	Spring	CBH3015	45	Arm	CNW2241
11	Spring	CBH3016	46	Rack	CNW2265
12	Spring	CBH3017	47	Gear	CNW2287
13	Spring	CBH3019	48	Motor Unit	CXC4026
14	Spring	CBH3086	49	Screw Unit	CXC8894
15	Spring	CBH3095	50	Chassis Unit	CXE8407
16	Spring	CBH3096	51	*****	
17	Plate Spring	CBL1824	52	Support Wheel	CNW2052
18	*****		53	Spindle Motor	EXM2002
19	Case	CNB3928	54	Arm Assy	CXE7890
20	Bracket	CND4553	55	Washer	CBF1037
21	Lever	CND7225	56	Washer	CBF1038
22	Bracket	CND5710	57	Arm	CND6779
23	Bracket	CND6127	58	Roller	CNW2500
24	Arm	CND7224	59	Collar	CNW2444
25	Sheet	CNN3678	60	Gear Unit	CXE6225
26	Roller	CNW1172	61	E Ring	YE15FTC
27	Roller	CNW1175	62	Screw	JFZ20P025FTC
28	Arm	CNW1177	63	Screw	JGZ17P020FTC
29	Arm	CNW1178	64	Screw (M2 x 5)	EBA1028
30	Gear	CNW1180	65	DVD Core Unit	CWX4717
31	Gear	CNW1181			
32	Gear	CNW1183			
33	Rack	CNW1184			
34	Gear	CNW1185			
35	Gear	CNW1186			

Pickup, Spindle Motor and Support Wheel are not available as service parts, because they need adjustment by special equipment after replacing.

12. ELECTRICAL PARTS LIST

NOTE:

- Parts whose parts numbers are omitted are subject to being not supplied.
- The part numbers shown below indicate chip components.

Chip Resistor

RS1/○S○○○○J, RS1/○○S○○○○J

Chip Capacitor (except for CQS.....)

CKS....., CCS....., CSZS.....

- The  mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
- Meaning of the figures and others in the parentheses in the parts list.

Example) IC 301 is on the point (face A, 91 of x-axis, and 111 of y-axis) of the corresponding PC board.

IC 301 (A, 91, 111) IC NJM2068V

- The expression of the unit in this manual is shown by u instead of μ . Please do not make a mistake.

Circuit Symbol and No.

Part No.

Circuit Symbol and No.

Part No.

A:AVH-4100NEX/XNUC

B:AVH-X8700BT/XNEU5

C:AVH-X8700BT/XNUR

D:AVH-X8750BT/XNRI

E:AVH-X8750BT/XNRC

F:AVH-X8750BT/XNRD

G:AVH-X8790BT/XNID

Unit Number:CXX7595

Unit Name:Key Unit (Service)

Unit Number:CXX7598

Unit Name:Case Unit (Service)

Unit Number:CXX7597

Unit Name:SW Unit (Service)

Unit Number:EXX2001

Unit Name:PCB Assy (Service)

A

Unit Number:CWN9113(A)

Unit Number:CWN9108(B)

Unit Number:CWN9114(C)

Unit Number:CWN9112(D)

Unit Number:CWN9110(E)

Unit Number:CWN9111(F)

Unit Number:CWN9109(G)

Unit Name:AV Unit

MISCELLANEOUS

IC 201	(A,98,136)	Power AMP IC	PA2032A
IC 302	(B,148,58)	Regulator IC	MM3411A33N
IC 303	(B,164,47)	DC/DC CONV IC	NJW4132U2-A
IC 304	(B,170,83)	Regulator	BA00CC0WFP
IC 305	(B,154,46)	Regulator IC	R1516S033B-AE

IC 501	(B,30,51)	Regulator IC(A)	MM3479A33P
IC 502	(B,33,58)	Regulator IC(A)	S-1172B12-E6
IC 504	(B,46,50)	Regulator IC	MM3571A33P
IC 601	(A,68,46)	ROM IC	CAT93C66VI
IC 602	(A,90,35)	Flash Written IC	PEQ449A8(A)

Flash Written IC PEQ450A8(B,C,D,E,F,G)

Unit Number:CWX4717

Unit Name:DVD Core Unit

Unit Number:CWN9393

Unit Name:SOC Single Core Unit

Unit Number:CXX7596

Unit Name:Monitor Unit (Service)

Circuit Symbol and No.		Part No.	Circuit Symbol and No.		Part No.	
IC 603	(B,118,17) Reset IC	PST8229N	D 109	(B,64,112) Rectifier Diode	DA2J101	
IC 801	(B,74,62) IC	AK4223VQ	D 110	(B,79,136) Diode	D1F60-5053	A
IC 901	(B,51,29) IC	AK4223VQ	D 111	(B,75,136) Diode	D1F60-5053	
IC 1001	(B,164,97) Dual OP-AMP	NJM4565V	D 112	(B,50,108) Diode	DZ2J056M0	
IC 1002	(B,148,75) Dual OP-AMP	NJM4565V	D 113	(B,52,111) Diode	DZ2J180M0	
			D 116	(B,61,107) Rectifier Diode	DA2J101	
IC 1003	(B,152,100) Dual OP-AMP	NJM4565V				
IC 1005	(B,154,87) IC	TC4052BFT	D 118	(B,56,106) Rectifier Diode	DA2J101	
IC 1101	(B,134,55) IC	AK7734XQ	D 123	(B,90,95) Diode	RB080L-30	
IC 1201	(A,118,44) CONV IC	WM8761BGED	D 124	(B,105,123) Diode	CRG03	
IC 1202	(A,116,54) CONV IC	WM8761BGED	D 201	(B,94,114) Rectifier Diode	DA2J101	
			D 202	(B,76,116) Rectifier Diode	DAN202UM	
IC 1203	(A,115,64) CONV IC	WM8761BGED				
IC 1301	(B,80,89) IC	PM9012A	D 203	(B,72,114) Rectifier Diode	DAN202UM	
IC 1501	(A,45,64) Tuner IC(A)	TEF6688HN	D 205	(B,93,111) Diode	DZ2J082M0	B
	(A,45,64) Tuner IC(B,C,D,E,F,G)	TEF6686HN	D 206	(B,85,110) Rectifier Diode	DA2J101	
Q 101	(B,68,106) Bipolar TR	LSCR523UB	D 305	(A,151,30) Diode	DZ2J062M0	
Q 102	(B,132,78) Chip Transistor	HN1C01FU	D 311	(B,171,44) Schottky Diode	RB551VM-30	
Q 104	(B,67,108) Resistor Built-IN TR	LTC014EEB	D 501	(B,36,54) Diode(A)	CRG03	
Q 105	(B,52,104) Chip Transistor	HN1C01FU	D 601	(B,115,19) Rectifier Diode	DA2J101	
Q 107	(B,64,106) Bipolar TR	LSAR523UB	D 602	(B,94,24) Schottky Diode	DB2J31400	
Q 108	(B,58,106) Bipolar TR	LSAR523UB	D 603	(B,94,31) Schottky Diode	DB2J31400	
Q 111	(B,61,104) Resistor Built-IN TR	LTC014EEB	D 604	(B,74,23) Schottky Diode(A)	DB2J31400	
Q 201	(B,79,111) Transistor	RN4987	D 1401	(B,23,103) Diode	EZAEG2A50AX	
Q 202	(B,74,109) Transistor	RN4987	D 1501	(A,43,82) Diode	EZAEG2A50AX	
Q 203	(B,77,112) Resistor Built-IN TR	LTA024EEB	D 1502	(A,36,75) Diode	EZAEG2A50AX	C
Q 204	(B,85,113) Chip Transistor	RN1903	L 101	(A,85,103) Choke Coil 600 uH	CTH1221	
Q 205	(B,89,111) Bipolar TR	LSCR523UB	L 303	(A,170,40) Choke Coil 22 uH	CTH1561	
Q 301	(B,160,39) Resistor Built-IN TR	LTC014EEB	L 901	(B,47,41) Inductor	CTF1786	
Q 302	(B,163,38) Bipolar TR	LSAR523UB	L 902	(B,48,41) Inductor	CTF1786	
Q 307	(A,146,29) Transistor	2SCR573DG	L 1101	(A,130,54) Ferrite Bead	CTF1528	
Q 308	(A,152,33) Resistor Built-IN TR	LTC014EEB	L 1102	(A,144,52) Ferrite Bead	CTF1528	
Q 312	(A,152,46) Bipolar TR	LSCR523UB	L 1201	(A,112,49) Inductor	CTF1786	
Q 314	(B,125,38) Chip Transistor	2SB1689	L 1202	(A,110,59) Inductor	CTF1786	
Q 315	(B,124,35) Bipolar TR	LSCR523UB	L 1203	(A,114,70) Inductor	CTF1786	
Q 601	(B,115,13) Bipolar TR	LSCR523UB	L 1204	(B,141,51) Chip Beads	VTL1132	
Q 602	(A,67,39) Bipolar TR	LSCR523UB	L 1501	(A,53,54) Inductor	CTF1749	D
Q 1001	(B,155,82) Chip Transistor	RN1907	L 1503	(A,37,73) Inductor	LCYC150K1608	
Q 1501	(A,31,58) Bipolar TR(A)	MMBT2369L	L 1504	(B,29,96) Inductor	CTF1389	
Q 1502	(A,31,55) Bipolar TR(A)	MMBT2369L	L 1505	(A,45,82) Inductor	LCMAR27J1608	
Q 1503	(A,38,58) Bipolar TR(A)	MMBT2369L	L 2202	(A,104,72) Ferrite Bead	CTF1528	
Q 1504	(A,37,55) Bipolar TR(A)	MMBT2369L	L 2203	(A,94,73) Ferrite Bead	CTF1528	
Q 1801	(B,153,20) Chip Transistor	RN4982	L 2204	(A,105,74) Ferrite Bead	CTF1528	
Q 1802	(B,148,19) Chip Transistor	RN1910	L 2205	(A,106,76) Ferrite Bead	CTF1528	
Q 1804	(B,159,18) Transistor	2SB1260	L 2206	(A,94,76) Ferrite Bead	CTF1528	
Q 1805	(B,155,16) Resistor Built-IN TR	LTC014EEB	L 2207	(A,104,76) Ferrite Bead	CTF1528	
Q 1806	(A,153,24) IC	RZQ050P01	L 2208	(A,94,77) Ferrite Bead	CTF1528	
Q 1807	(A,153,20) Bipolar TR	LSCR523UB	L 2209	(A,104,78) Ferrite Bead	CTF1528	E
Q 2101	(A,160,103) Transistor	UMF23N	L 2210	(A,101,68) Ferrite Bead	CTF1528	
Q 2201	(A,81,81) Chip Transistor	HN1C03FU	L 2211	(A,111,82) Chip Ferrite Bead	BTX1047	
Q 2202	(A,78,85) Chip Transistor	HN1C03FU	X 601	(A,110,31) Resonator 3.932 16 MHz	CSS1772	
Q 2203	(B,172,104) Chip Transistor	HN1C03FU	X 1101	(B,136,65) Resonator 12.288 MHz	CSS1811	
Q 2204	(B,131,93) Chip Transistor	HN1C03FU	X 1501	(A,54,60) Crystal Resonator 9.216 MHz	CSS1863	
Q 2301	(A,115,34) Chip Transistor(D,E,F,G)	RN4982	P 301	(A,156,30) Fuse 1.5 A	CEK1282	
Q 2302	(A,115,25) Chip Transistor(D,E,F,G)	RN4982	P 1401	(B,24,103) Surge Absorber	IMSA-6803-01Y900	
Q 2303	(A,115,29) Chip Transistor(D,E,F,G)	RN4982	P 2101	(A,127,105) Poly Switch	FSMD075-24R	
Q 2304	(B,87,29) Chip Transistor(D,E,F,G)	RN4982	P 2201	(A,113,78) Poly Switch	FSMD075-24R	
			P 2202	(B,164,125) Poly Switch	FSMD075-24R	
D 103	(B,71,110) Diode	UDZV6R2(B)				F
D 105	(B,129,81) Diode	DZ2J200M0	P 2203	(B,134,99) Poly Switch	FSMD075-24R	
D 106	(B,129,76) Diode	UDZV7R5(B)	P 2206	(B,141,98) Poly Switch	FSMD075-24R	
D 107	(B,127,79) Rectifier Diode	DAN202UM	P 2207	(A,94,101) Fuse 3.5 A	CEK1343	

Circuit Symbol and No.**Part No.**

P 2208	(A,107,89)	Fuse 5.0 A	CEK1346
P 2209	(A,43,121)	Poly Switch	FSMD075-24R

A	BZ601	(A,165,29)	Buzzer	CPV1062
	VL1501	(A,44,73)	Variable Coil	CTC1216
	CN1801	(A,153,8)	30P Connector	VKN1620
	CN1802	(A,145,18)	Connector	CKS6007
	CN1901	(A,129,35)	Connector	CKS6095

	CN2001	(A,108,11)	FFC/FPC Connector	CKS6646
	CN2002	(A,71,11)	FFC/FPC Connector	CKS6646
	CN2101	(A,157,116)	Connector	CKS4497
	CN2201	(A,99,83)	B TO W Connector	CKS6600
	JA101	(A,64,132)	Connector	CKM1613

B	JA1401	(A,16,120)	Antenna Jack	YKS5041
	JA2202	(A,174,119)	3.5 DIA Jack	CKS6437
	JA2203	(A,131,113)	RCA Jack	CKB1111
	JA2204	(A,30,131)	Mini Jack(4P)	AKN1073
	JA2205	(A,43,130)	3.5 DIA Jack	CKS6437

RESISTORS

R 102	(B,128,87)	RS1/10SR224J
R 105	(B,70,107)	RS1/16SS473J
R 106	(B,70,108)	RS1/16SS473J
R 107	(B,69,111)	RS1/16SS432J
R 108	(B,68,115) 1 kohm	CCN1326

C	R 109	(B,130,77)	RS1/16SS473J
	R 110	(B,132,80)	RS1/16SS103J
	R 111	(B,130,79)	RS1/16SS103J
	R 113	(B,132,75)	RS1/16SS473J
	R 114	(B,66,111)	RS1/16SS103J

	R 115	(B,66,114)	RS1/16SS472J
	R 116	(B,64,116)	RS1/4SA102J
	R 117	(B,54,104)	RS1/16SS473J
	R 118	(B,52,106)	RS1/16SS473J
	R 119	(B,53,106)	RS1/16SS104J

D	R 120	(B,54,109)	RS1/16SS472J
	R 122	(B,62,110)	RS1/16SS102J
	R 123	(B,65,108)	RS1/16SS103J
	R 124	(B,65,104)	RS1/16SS223J
	R 125	(B,58,112)	RS1/16SS103J

	R 126	(B,56,104)	RS1/16SS223J
	R 127	(B,60,108)	RS1/16SS102J
	R 128	(B,58,108)	RS1/16SS103J
	R 129	(B,55,113)	RS1/16SS103J
	R 145	(B,50,116)	RS1/4SA102J

E	R 151	(B,54,114)	RS1/10SR0R0J
	R 201	(B,83,110)	RS1/16SS683J
	R 202	(B,92,114)	RS1/16SS102J
	R 205	(B,86,120)	RS1/16SS0R0J
	R 207	(A,86,121)	RS1/16SS0R0J

	R 210	(A,109,126)	RS1/16SS0R0J
	R 213	(B,87,109)	RS1/16SS683J
	R 214	(B,84,120)	RS1/16SS152J
	R 215	(B,85,120)	RS1/16SS101J
	R 217	(B,90,114)	RS1/16SS473J

	R 218	(B,90,113)	RS1/16SS104J
	R 219	(B,88,113)	RS1/16SS103J
F	R 223	(B,105,58)	RS1/10SR0R0J
	R 224	(B,86,121)	RS1/16SS473J
	R 225	(B,87,117)	RS1/16SS101J

Circuit Symbol and No.**Part No.**

R 311	(B,163,41)	RS1/16SS222J
R 312	(B,161,40)	RS1/16SS222J
R 313	(B,161,35)	RS1/16SS473J
R 314	(B,174,87)	RS1/16SS6800D
R 315	(B,174,86)	RS1/16SS3901D

R 316	(B,174,88)	RS1/16SS2702D
R 318	(B,167,95)	RS1/4SA0R0J
R 320	(B,164,87)	RS1/10SR0R0J
R 323	(A,151,52)	RS1/10SR102J
R 324	(A,145,53)	RS1/10SR0R0J

R 327	(A,152,29)	RS1/10SR121J
R 328	(A,136,43)	RS1/16SS473J
R 329	(A,153,33)	RS1/16SS220J
R 341	(A,150,48)	RS1/16SS471J
R 342	(A,155,44)	RS1/16SS103J

R 343	(A,152,44)	RS1/16SS682J
R 346	(B,163,43)	RS1/16SS1303D
R 347	(B,161,44)	RS1/16SS1002D
R 354	(A,169,47)	RS1/10SR0R0J
R 355	(B,162,57)	RS1/16SS0R0J

R 358	(B,156,40)	RS1/10SR0R0J
R 359	(B,159,42)	RS1/10SR0R0J
R 361	(B,156,52)	RS1/10SR0R0J
R 362	(B,122,38)	RS1/10SR103J
R 363	(B,121,34)	RS1/10SR331J

R 364	(B,126,34)	RS1/16SS103J
R 365	(B,127,36)	RS1/16SS103J
R 366	(B,129,33)	RS1/16SS103J
R 504	(B,30,32) (B,C,D,E,F,G)	RS1/16SS102J
R 505	(B,27,51) (A)	RS1/16SS102J
R 509	(B,35,62) (A)	RS1/16SS102J

R 513	(B,29,33) (A)	RS1/16SS102J
R 518	(A,75,71)	RS1/8SQ0R0J
R 604	(A,74,41)	RS1/16SS104J
R 605	(B,85,44)	RS1/16SS121J
R 607	(B,113,16)	RS1/16SS104J

R 608	(B,103,34)	RS1/16SS104J
R 609	(B,103,35)	RS1/16SS104J
R 610	(A,105,32)	RS1/16SS100J
R 611	(B,99,28)	RS1/16SS104J
R 612	(B,113,17)	RS1/16SS102J

R 613	(A,105,35)	RS1/16SS473J
R 614	(A,99,54)	RS1/16SS681J
R 615	(A,97,50)	RS1/16SS681J
R 616	(B,102,26)	RS1/16SS101J
R 617	(B,102,25)	RS1/16SS101J

R 618	(A,105,46)	RS1/16SS473J
R 619	(B,101,23)	RS1/16SS473J
R 620	(B,103,23)	RS1/16SS472J
R 621	(B,103,22)	RS1/16SS471J
R 622	(A,101,51)	RS1/16SS473J

R 623	(A,100,51)	RS1/16SS473J
R 624	(A,99,51)	RS1/16SS473J
R 625	(B,103,27)	RS1/16SS182J
R 630	(B,94,20)	RS1/16SS102J
R 632	(B,104,27)	RS1/16SS182J

R 633	(B,102,41)	RS1/16SS0R0J
R 634	(A,73,46)	RS1/16SS0R0J
R 637	(B,92,16)	RS1/16SS101J
R 639	(B,104,46)	RS1/16SS182J

<u>Circuit Symbol and No.</u>		<u>Part No.</u>	<u>Circuit Symbol and No.</u>		<u>Part No.</u>
R 640	(A,88,51)	RS1/16SS0R0J	R 722	(B,83,44)	RS1/16SS121J
R 641	(A,93,54)	RS1/16SS101J	R 723	(A,83,50) (A)	RS1/16SS104J
R 642	(A,86,51) (A)	RS1/16SS102J	R 724	(A,80,50) (A)	RS1/16SS102J
R 645	(B,102,47)	RS1/16SS182J	R 725	(A,74,50)	RS1/16SS102J
R 646	(B,79,20)	RS1/16SS104J	R 726	(A,74,45)	RS1/16SS471J
R 647	(A,108,39)	RS1/16SS473J	R 727	(B,77,45)	RS1/16SS104J
R 648	(A,73,33)	RS1/16SS104J	R 728	(A,73,44) (A)	RS1/16SS101J
R 651	(B,72,33)	RS1/16SS104J	R 729	(A,75,44) (A)	RS1/16SS101J
R 654	(A,74,25)	RS1/16SS101J	R 730	(B,85,24) (A,B,D)	RS1/16SS104J
R 655	(A,73,25)	RS1/16SS101J	R 732	(B,80,43)	RS1/16SS471J
R 656	(A,74,28)	RS1/16SS0R0J	R 733	(B,86,23) (A,E)	RS1/16SS104J
R 657	(B,98,42)	RS1/16SS103J	R 734	(B,77,43)	RS1/16SS471J
R 659	(B,73,29)	RS1/16SS104J	R 737	(A,73,41)	RS1/16SS104J
R 660	(A,92,54)	RS1/16SS101J	R 738	(A,69,38)	RS1/16SS104J
R 663	(A,102,53)	RS1/16SS0R0J	R 739	(A,69,40)	RS1/16SS473J
R 664	(A,109,42)	RS1/16SS101J	R 740	(B,92,23) (A,B,C) (B,92,23) (D,E,F,G)	RS1/16SS103J RS1/16SS1002D
R 665	(B,103,39)	RS1/16SS471J	R 741	(B,87,22) (B,C,D,F)	RS1/16SS104J
R 667	(A,72,38)	RS1/16SS101J	R 743	(A,69,36)	RS1/16SS222J
R 670	(B,102,23)	RS1/16SS472J	R 744	(A,69,37)	RS1/16SS473J
R 671	(A,96,50)	RS1/16SS681J	R 746	(B,75,19) (A)	RS1/16SS0R0J
R 673	(B,103,43)	RS1/16SS221J	R 748	(B,87,23) (B,E,F)	RS1/16SS104J
R 675	(B,102,22)	RS1/16SS471J	R 750	(B,87,24)	RS1/16SS0R0J
R 677	(A,106,45)	RS1/16SS0R0J	R 751	(B,85,33)	RS1/16SS0R0J
R 678	(B,84,44)	RS1/16SS121J	R 752	(B,74,34)	RS1/16SS223J
R 679	(B,105,46)	RS1/16SS101J	R 754	(B,76,33)	RS1/16SS223J
R 680	(B,102,45)	RS1/16SS101J	R 757	(A,72,25)	RS1/16SS101J
R 682	(A,106,41)	RS1/16SS680J	R 758	(B,81,30)	RS1/16SS471J
R 683	(B,101,21)	RS1/16SS222J	R 761	(A,75,23)	RS1/16SS101J
R 684	(B,99,14)	RS1/16SS102J	R 762	(A,75,25)	RS1/16SS101J
R 685	(A,103,50)	RS1/16SS102J	R 763	(A,77,22)	RS1/16SS101J
R 686	(A,106,25)	RS1/16SS681J	R 767	(B,105,24)	RS1/16SS105J
R 689	(B,105,22)	RS1/16SS101J	R 769	(B,100,43)	RS1/16SS104J
R 690	(A,104,23)	RS1/16SS0R0J	R 772	(A,84,20)	RS1/16SS471J
R 691	(B,102,28)	RS1/16SS0R0J	R 773	(A,85,20)	RS1/16SS471J
R 692	(B,118,13)	RS1/16SS224J	R 774	(B,85,23)	RS1/16SS104J
R 693	(B,118,15)	RS1/16SS104J	R 775	(A,71,40)	RS1/16SS473J
R 694	(B,103,33)	RS1/16SS104J	R 776	(B,80,23)	RS1/16SS104J
R 695	(B,103,36)	RS1/16SS104J	R 777	(B,80,16)	RS1/16SS101J
R 697	(A,106,39)	RS1/16SS471J	R 779	(B,90,56)	RS1/16SS472J
R 698	(A,107,42)	RS1/16SS473J	R 782	(B,93,34)	RS1/16SS1002D
R 699	(A,77,49)	RS1/16SS102J	R 787	(B,82,29)	RS1/16SS104J
R 700	(A,72,50)	RS1/16SS472J	R 789	(B,108,20)	RS1/16SS473J
R 701	(A,77,48)	RS1/16SS102J	R 790	(B,109,20)	RS1/16SS473J
R 702	(A,66,41)	RS1/16SS473J	R 792	(B,106,20)	RS1/16SS103J
R 703	(A,74,48)	RS1/16SS102J	R 793	(B,79,28)	RS1/16SS104J
R 704	(A,73,47)	RS1/16SS473J	R 796	(B,93,35)	RS1/16SS1001D
R 705	(A,74,49)	RS1/16SS473J	R 797	(B,95,26) (A,B,C) (B,95,26) (D,E,F,G)	RS1/16SS102J RS1/16SS1001D
R 706	(B,96,53)	RS1/16SS473J	R 798	(A,108,61)	RS1/10SR0R0J
R 707	(A,95,50)	RS1/16SS101J	R 800	(B,100,46)	RS1/16SS101J
R 708	(A,94,52)	RS1/16SS681J	R 801	(A,73,63)	RS1/16SS0R0J
R 709	(B,92,41)	RS1/16SS222J	R 802	(A,75,63)	RS1/16SS0R0J
R 710	(B,91,43)	RS1/16SS101J	R 803	(B,78,70)	RS1/16SS101J
R 711	(A,92,52)	RS1/16SS101J	R 804	(B,78,71)	RS1/16SS101J
R 712	(A,85,53)	RS1/16SS221J	R 805	(B,81,67)	RS1/16SS101J
R 713	(A,83,54)	RS1/16SS182J	R 806	(B,83,66)	RS1/16SS101J
R 714	(A,84,53)	RS1/16SS221J	R 811	(B,64,56)	RS1/16SS223J
R 715	(A,83,53)	RS1/16SS182J	R 812	(B,64,54)	RS1/16SS223J
R 716	(B,81,24) (A)	RS1/16SS104J	R 813	(B,63,61)	RS1/16SS223J
R 717	(A,82,20) (B,C,E)	RS1/16SS104J			

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

R 814 (B,63,59)
R 817 (B,68,74)

RS1/16SS223J
RS1/16SS223J

R 1048 (B,146,88)
R 1057 (B,156,93)
R 1058 (B,151,83)
R 1061 (B,153,78)

RS1/16SS473J
RS1/16SS0R0J
RS1/16SS473J
RS1/10SR0R0J

A R 818 (B,65,69)
R 821 (B,76,55) (B,C,D,E,F,G)
R 823 (B,73,54)
R 824 (B,81,69)
R 825 (B,82,67)
R 827 (B,83,58)

RS1/16SS223J
RS1/16SS470J
RS1/16SS104J
RS1/16SS75R0D
RS1/16SS75R0D
RS1/16SS2200D

R 1062 (B,143,78)
R 1063 (B,147,96)
R 1064 (B,157,96)
R 1065 (B,154,68)
R 1066 (B,144,67)

RS1/10SR0R0J
RS1/10SR0R0J
RS1/10SR0R0J
RS1/10SR0R0J
RS1/10SR0R0J

R 829 (B,77,55)
R 831 (B,84,64)
R 844 (B,70,74)
R 845 (B,66,73)
R 846 (B,67,69)

RS1/16SS750J
RS1/16SS104J
RS1/16SS101J
RS1/16SS101J
RS1/16SS101J

R 1067 (B,151,65)
R 1068 (B,146,65)
R 1101 (B,130,60)
R 1102 (B,136,62)
R 1103 (B,126,53)

RS1/10SR0R0J
RS1/10SR0R0J
RS1/16SS473J
RS1/16SS222J
RS1/16SS473J

B R 850 (B,64,62)
R 851 (B,65,60)
R 852 (B,65,59)
R 853 (B,63,57)
R 854 (B,65,55)

RS1/16SS101J
RS1/16SS101J
RS1/16SS101J
RS1/16SS101J
RS1/16SS101J

R 1104 (B,140,58)
R 1105 (B,139,47)
R 1106 (B,138,47)
R 1107 (B,144,56)
R 1109 (B,136,43)

RS1/16SS220J
RS1/16SS101J
RS1/16SS470J
RS1/16SS101J
RS1/8SQ102J

R 855 (B,65,54)
R 859 (B,82,56)
R 901 (A,49,30)
R 910 (B,58,31)
R 920 (B,51,16) (A)

RS1/16SS101J
RS1/16SS75R0D
RS1/16SS0R0J
RS1/16SS104J
RS1/16SS101J

R 1110 (B,137,47)
R 1111 (B,135,47)
R 1112 (B,141,58)
R 1113 (B,144,58)
R 1115 (B,131,48)

RS1/8SQ102J
RS1/8SQ102J
RS1/16SS220J
RS1/8SQ220J
RS1/16SS0R0J

C R 921 (B,50,14) (A)
R 922 (B,50,16) (A)
R 923 (A,49,28)
R 944 (B,33,24)
R 945 (B,56,14)

RS1/16SS101J
RS1/16SS101J
RS1/16SS0R0J
RS1/10SR0R0J
RS1/16SS0R0J

R 1119 (B,142,56)
R 1120 (B,128,61)
R 1121 (B,126,61)
R 1122 (B,125,58)
R 1123 (B,125,56)

RS1/16SS104J
RS1/8SQ222J
RS1/8SQ222J
RS1/16SS472J
RS1/16SS472J

R 946 (B,56,16)
R 953 (B,38,11)
R 954 (B,33,26)
R 1003 (B,168,101)
R 1004 (B,162,102)

RS1/16SS0R0J
RS1/10SR0R0J
RS1/10SR0R0J
RS1/16SS0R0J
RS1/16SS153J

R 1124 (A,122,59)
R 1205 (A,135,47)
R 1206 (A,135,49)
R 1207 (B,142,49)
R 1208 (B,143,52)

RS1/8SQ0R0J
RS1/10SR470J
RS1/10SR470J
RS1/10SR820J
RS1/10SR470J

D R 1006 (B,164,103)
R 1007 (B,154,73)
R 1008 (B,153,73)
R 1009 (B,144,73)
R 1010 (B,143,73)

RS1/16SS153J
RS1/16SS473J
RS1/16SS473J
RS1/16SS473J
RS1/16SS473J

R 1209 (B,142,53)
R 1210 (A,135,50)
R 1212 (B,117,45)
R 1213 (B,121,47)
R 1214 (B,114,57)

RS1/10SR470J
RS1/10SR470J
RS1/8SQ821J
RS1/8SQ821J
RS1/10SR821J

R 1011 (B,146,101)
R 1012 (B,147,101)
R 1013 (B,157,101)
R 1014 (B,158,101)
R 1015 (B,148,71)

RS1/16SS473J
RS1/16SS473J
RS1/16SS473J
RS1/16SS473J
RS1/16SS0R0J

R 1215 (B,115,55)
R 1217 (B,116,65)
R 1218 (A,125,49)
R 1219 (A,125,48)
R 1220 (B,115,50)

RS1/10SR821J
RS1/10SR821J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

E R 1016 (B,152,103)
R 1017 (B,145,71)
R 1018 (B,154,103)
R 1019 (B,152,71)
R 1020 (B,150,103)

RS1/16SS0R0J
RS1/16SS473J
RS1/16SS473J
RS1/16SS473J
RS1/16SS473J

R 1221 (B,120,54)
R 1222 (B,117,60)
R 1301 (A,80,79)
R 1305 (B,94,119)
R 1306 (B,91,118)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/10SR0R0J
RS1/8SQ362J
RS1/8SQ362J

R 1021 (B,162,103)
R 1022 (B,164,102)
R 1023 (B,143,75)
R 1024 (B,158,99)
R 1025 (B,154,75)

RS1/16SS153J
RS1/16SS153J
RS1/16SS473J
RS1/16SS473J
RS1/16SS473J

R 1307 (B,98,123)
R 1308 (B,88,118)
R 1309 (B,98,120)
R 1310 (B,91,120)
R 1311 (B,98,121)

RS1/8SQ362J
RS1/8SQ362J
RS1/16SS562J
RS1/16SS562J
RS1/16SS562J

F R 1026 (B,146,99)
R 1027 (B,145,80)
R 1028 (B,155,95)
R 1040 (B,151,93)
R 1044 (B,151,82)

RS1/16SS473J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS473J

R 1312 (B,90,119)
R 1402 (B,32,100)
R 1410 (A,40,83)
R 1413 (B,37,91)
R 1415 (B,26,103)

RS1/16SS562J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

R 1047 (B,147,88)

RS1/16SS473J

<u>Circuit Symbol and No.</u>		<u>Part No.</u>	<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
R 1502	(A,51,68)	RS1/16SS0R0J	R 1760	(B,60,31)	RS1/10SR0R0J	A
R 1503	(A,40,70)	RS1/16SS0R0J	R 1761	(B,62,31)	RS1/10SR0R0J	
R 1505	(A,50,62)	RS1/16SS103J	R 1801	(B,155,22)	RS1/16SS102J	
R 1507	(A,49,62)	RS1/16SS103J	R 1802	(A,153,12)	RS1/16SS0R0J	
R 1508	(A,49,58)	RS1/16SS472J	R 1803	(A,151,12)	RS1/16SS0R0J	
R 1509	(A,48,56)	RS1/16SS472J	R 1804	(A,149,12)	RS1/16SS0R0J	
R 1510	(A,48,60)	RS1/16SS101J	R 1805	(B,159,13)	RS1/16SS471J	
R 1511	(A,47,60)	RS1/16SS101J	R 1806	(A,159,13)	RS1/16SS221J	
R 1512	(A,46,57)	RS1/16SS0R0J	R 1807	(A,158,12)	RS1/16SS221J	
R 1513	(A,36,72)	RS1/16SS391J	R 1808	(A,157,15)	RS1/16SS221J	
R 1514	(B,29,102)	RS1/16SS105J	R 1809	(B,155,10)	RS1/16SS221J	
R 1515	(B,29,98)	RS1/16SS105J	R 1810	(A,155,12)	RS1/16SS221J	
R 1516	(A,43,57) (A)	RS1/16SS0R0J	R 1811	(A,147,12)	RS1/16SS0R0J	B
R 1517	(A,43,59) (A)	RS1/16SS0R0J	R 1814	(B,163,18)	RS1/10SR0R0J	
R 1518	(A,42,57) (A)	RS1/16SS0R0J	R 1815	(A,165,20)	RS1/4SA0R0J	
R 1519	(A,41,59) (A)	RS1/16SS0R0J	R 1816	(B,144,14)	RS1/16SS0R0J	
R 1520	(A,49,66)	RS1/16SS0R0J	R 1822	(B,155,18)	RS1/16SS473J	
R 1522	(A,31,60) (A)	RS1/16SS182J	R 1823	(B,157,15)	RS1/8SQ561J	
R 1523	(A,33,58) (A)	RS1/16SS332J	R 1826	(B,139,16)	RS1/16SS0R0J	
R 1524	(A,30,51) (A)	RS1/16SS121J	R 1827	(A,156,22)	RS1/10SR103J	
R 1525	(A,33,56) (A)	RS1/16SS102J	R 1828	(A,151,18)	RS1/16SS683J	
R 1526	(A,40,63) (A)	RS1/16SS0R0J	R 1829	(A,151,20)	RS1/16SS683J	
R 1527	(A,38,61) (A)	RS1/16SS0R0J	R 1901	(A,131,41)	RS1/16SS303J	
R 1528	(A,40,57) (A)	RS1/16SS182J	R 1904	(B,133,36)	RS1/16SS471J	C
R 1529	(A,35,57) (A)	RS1/16SS332J	R 1905	(B,131,38)	RS1/16SS681J	
R 1530	(A,40,54) (A)	RS1/16SS121J	R 1906	(B,127,44)	RS1/10SR103J	
R 1531	(A,34,56) (A)	RS1/16SS102J	R 2001	(B,103,12)	RS1/16SS222J	
R 1532	(A,35,63) (A)	RS1/16SS0R0J	R 2002	(A,79,6)	RS1/16SS222J	
R 1533	(A,35,60) (A)	RS1/16SS0R0J	R 2104	(B,163,109)	RS1/16SS562J	
R 1534	(A,33,63) (A)	RS1/16SS0R0J	R 2105	(A,154,106)	RS1/10SR102J	
R 1535	(A,33,62) (A)	RS1/16SS0R0J	R 2106	(A,152,104)	RS1/10SR102J	
R 1536	(A,33,54) (A)	RS1/16SS0R0J	R 2107	(B,149,111)	RS1/16SS103J	
R 1537	(A,34,54) (A)	RS1/16SS0R0J	R 2108	(A,150,104)	RS1/10SR471J	
R 1538	(A,34,59) (A)	RS1/16SS0R0J	R 2109	(A,149,104)	RS1/10SR471J	
R 1539	(A,40,59) (A)	RS1/16SS0R0J	R 2110	(A,164,107)	RS1/16SS0R0J	D
R 1540	(A,45,52)	RS1/10SR0R0J	R 2111	(A,163,106)	RS1/16SS0R0J	
R 1542	(A,43,52)	RS1/10SR0R0J	R 2112	(A,164,104)	RS1/16SS0R0J	
R 1543	(A,33,67)	RS1/10SR0R0J	R 2113	(A,163,102)	RS1/16SS0R0J	
R 1545	(A,48,58)	RS1/16SS0R0J	R 2117	(B,164,110)	RS1/16SS272J	
R 1546	(A,47,58)	RS1/16SS0R0J	R 2118	(B,162,110)	RS1/16SS272J	
R 1547	(A,51,56)	RS1/8SQ0R0J	R 2119	(A,160,106)	RS1/10SR222J	
R 1548	(A,34,67)	RS1/10SR0R0J	R 2120	(A,157,103)	RS1/16SS562J	
R 1549	(B,52,63)	RS1/16SS0R0J	R 2121	(A,158,103)	RS1/16SS332J	
R 1550	(A,45,69)	RS1/16SS0R0J	R 2201	(A,79,81)	RS1/16SS820J	
R 1551	(A,44,69)	RS1/16SS0R0J	R 2202	(A,85,83)	RS1/16SS820J	
R 1552	(A,26,50) (A)	RS1/16SS0R0J	R 2203	(A,80,87)	RS1/16SS820J	E
R 1709	(A,25,54) (A)	RAB4CQ221J	R 2204	(A,84,87)	RS1/16SS820J	
R 1715	(A,25,40) (A)	RAB4CQ0R0J	R 2205	(A,76,82)	RS1/16SS223J	
R 1724	(A,13,83)	RS1/10SR0R0J	R 2206	(A,85,82)	RS1/16SS223J	
R 1725	(A,15,83)	RS1/10SR0R0J	R 2207	(A,80,86)	RS1/16SS223J	
R 1729	(A,26,24) (A)	RAB4CQ0R0J	R 2208	(A,83,86)	RS1/16SS223J	
R 1730	(A,27,26)	RS1/16SS103J	R 2209	(A,79,83)	RS1/16SS472J	
R 1732	(A,46,113)	RS1/10SR0R0J	R 2210	(A,77,83)	RS1/16SS472J	
R 1733	(A,45,113)	RS1/10SR0R0J	R 2211	(A,83,84)	RS1/16SS472J	
R 1734	(A,18,24)	RS1/10SR0R0J	R 2212	(A,82,84)	RS1/16SS472J	
R 1735	(A,20,24)	RS1/10SR0R0J	R 2213	(B,170,105)	RS1/16SS821J	F
R 1736	(B,39,65)	RS1/10SR0R0J	R 2214	(B,172,101)	RS1/16SS472J	
R 1737	(B,40,64)	RS1/10SR0R0J	R 2215	(B,170,106)	RS1/16SS223J	
R 1746	(B,22,13)	RS1/10SR0R0J	R 2216	(B,172,102)	RS1/16SS472J	
R 1747	(B,24,13)	RS1/10SR0R0J				

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

R 2217 (B,173,106)

RS1/16SS223J

C 318 (B,150,56)

CKSQYB104K25

R 2218 (B,175,107)

RS1/16SS821J

C 320 (A,150,56)

XCEVW101M16

R 2225 (B,26,108)

RS1/10SR0R0J

C 321 (A,154,29)

CKSSYB102K50

R 2226 (B,32,109)

RS1/10SR0R0J

C 322 (A,137,43)

CKSRYB105K10

R 2227 (B,33,129)

RS1/16SS0R0J

C 323 (A,143,40)

XCEVW101M16

R 2228 (B,35,129)

RS1/16SS0R0J

C 324 (A,152,32)

CKSSYB104K10

C 327 (A,149,45)

CKSSYB104K16

C 328 (A,152,48) 0.1 uF

CCG1266

R 2229 (B,29,130)

RS1/16SS0R0J

R 2230 (B,46,117)

RS1/10SR0R0J

C 329 (A,155,45)

CKSSYB102K50

R 2231 (B,42,117)

RS1/10SR0R0J

C 335 (B,164,43)

CCSSCH101J50

R 2232 (B,129,90)

RS1/16SS820J

C 336 (B,171,46) 10 uF

CCG1236

R 2233 (B,134,95)

RS1/16SS820J

C 337 (B,167,54) 10 uF

CCG1236

C 339 (B,171,48) 10 uF

CCG1236

R 2234 (B,131,91)

RS1/16SS223J

R 2235 (B,131,95)

RS1/16SS223J

C 342 (B,156,42)

CKSSYB104K16

R 2236 (B,134,93)

RS1/16SS472J

C 343 (B,154,51)

CKSRYB104K50

R 2237 (B,128,96)

RS1/16SS472J

C 344 (B,147,61)

CKSRYB105K10

R 2265 (A,111,89)

RS1/4SA0R0J

C 345 (B,152,56)

CKSRYB105K10

C 347 (B,127,35)

CKSSYB104K10

R 2266 (A,94,96)

RS1/4SA0R0J

R 2308 (B,120,132) (A)

RS1/16SS0R0J

C 349 (A,152,40)

XCEVW470M16

R 2309 (B,121,132) (B)

RS1/16SS471J

C 502 (B,30,46) (A)

CKSRYB105K10

R 2311 (B,123,132) (C)

RS1/16SS471J

C 503 (B,29,57) 4.7 uF(A)

CCG1201

R 2313 (B,125,132) (E)

RS1/16SS471J

C 504 (B,31,47) (A)

CKSRYB105K10

R 2314 (B,126,132) (F)

RS1/16SS0R0J

C 505 (B,38,57) 4.7 uF(A)

CCG1201

R 2315 (B,127,132) (D)

RS1/16SS471J

R 2317 (B,129,132) (G)

RS1/16SS471J

C 510 (B,42,51)

CKSRYB105K10

R 2319 (B,153,121)

RS1/16SS0R0J

C 511 (B,51,51)

CKSRYB105K10

R 2333 (B,86,27) (D,E,F,G)

RS1/16SS6800D

C 516 (B,31,55) (A)

CKSSYB104K16

R 2335 (B,94,38) (D,E,F,G)

RS1/16SS6800D

C 602 (B,116,22)

CKSRYB105K10

R 2336 (A,105,37) (D,E,F,G)

RS1/16SS0R0J

C 603 (A,106,31)

CCSRCH220J50

R 2338 (B,95,38) (D,E,F,G)

RS1/16SS8201D

C 604 (A,105,30)

CCSSCH220J50

R 2339 (A,114,32) (D,E,F,G)

RS1/16SS8201D

C 605 (A,106,44)

CKSSYB104K10

R 2341 (B,99,38)

RS1/16SS101J

C 606 (A,105,25)

CKSSYB104K10

R 2342 (B,100,38)

RS1/16SS101J

C 607 (B,103,29)

CKSSYB104K10

R 2343 (B,101,37)

RS1/16SS101J

C 608 (B,98,32) 4.7 uF

CCG1331

R 2344 (B,106,45)

RS1/16SS101J

C 611 (B,87,25)

CKSSYB104K10

C 612 (A,88,50)

CKSSYB104K10

C 613 (A,75,29)

CKSSYB104K10

C 615 (A,105,52)

CKSSYB104K10

C 616 (A,105,54) 10 uF

CCG1192

CAPACITORS

C 101 (B,129,87)

CKSRYB104K50

C 104 (A,119,89) 15 000 uF/16 V

CCH1980

C 618 (B,103,41)

CCSSCH101J50

C 106 (B,66,110)

CKSRYB105K10

C 620 (A,70,42)

CKSSYB104K10

C 108 (B,52,109)

CKSSYB102K50

C 625 (B,117,13)

CKSSYB104K10

C 110 (B,103,119)

CKSSYB104K16

C 633 (B,94,29)

CKSRYB105K10

C 639 (B,94,28)

CKSSYB104K10

C 201 (B,95,122)

CKSQYB105K25

C 202 (B,93,122)

CKSQYB105K25

C 801 (B,81,58)

CKSSYB104K10

C 203 (B,101,122)

CKSQYB105K25

C 802 (B,80,55)

CKSSYB104K10

C 204 (B,90,123)

CKSQYB105K25

C 803 (A,71,67)

CKSRYB105K10

C 205 (A,104,125) 4.7 uF

CCG1331

C 804 (B,70,70)

CKSRYB105K10

C 805 (B,71,70)

CKSRYB105K10

C 206 (A,92,122)

XCEVW100M16

C 207 (B,119,127)

CKSRYB104K16

C 806 (B,73,70)

CKSRYB105K10

C 212 (B,82,113) 4.7 uF

CCG1201

C 807 (B,77,53) (B,C,D,E,F,G)

CCSSCH271J50

C 216 (A,103,111) 4 700 uF/16 V

CCH2085

C 810 (A,72,66)

CKSSYB104K10

C 217 (A,69,112)

XCEVW101M16

C 811 (B,70,67)

CKSRYB105K10

C 812 (B,80,68)

CKSSYB104K10

C 813 (B,66,71)

CKSRYB105K10

C 218 (A,110,125)

CKSRYB104K50

C 219 (B,89,115) 10 uF

CCG1192

C 220 (A,90,126) 0.1 uF

CCG1357

C 814 (B,81,66)

CKSSYB104K10

C 312 (A,171,85)

XCEVW101M16

C 815 (B,67,70)

CKSRYB105K10

C 313 (B,169,90)

CKSRYB105K16

C 816 (B,81,65)

CKSSYB104K10

C 817 (B,66,67)

CKSQYB105K16

C 818 (B,81,64)

CKSSYB104K10

C 314 (B,161,36)

CKSSYB104K10

C 317 (B,145,61)

CKSQYB104K25

Circuit Symbol and No.		Part No.	Circuit Symbol and No.		Part No.
C 819	(B,66,66)	CKSQYB105K16	C 1010	(B,155,106)	CKSQYB105K16
C 820	(B,81,63)	CKSSYB104K10	C 1011	(B,145,72)	CCSSCH330J50
C 821	(B,66,64)	CKSQYB105K16	C 1012	(B,154,102)	CCSSCH330J50
C 822	(B,82,62)	CKSSYB104K10	C 1013	(B,152,72)	CCSSCH330J50
C 823	(B,67,62)	CKSRYB105K10	C 1014	(B,150,102)	CCSSCH330J50
C 824	(B,82,61)	CKSSYB104K10	C 1015	(B,144,75)	CCSSCH330J50
C 825	(B,67,61)	CKSRYB105K10	C 1016	(B,157,99)	CCSSCH330J50
C 826	(B,82,60)	CKSSYB104K10	C 1017	(B,153,75)	CCSSCH330J50
C 827	(B,67,59)	CKSRYB105K10	C 1018	(B,147,99)	CCSSCH330J50
C 828	(B,82,59)	CKSSYB104K10	C 1019	(B,145,78)	CKSRYB105K16
C 829	(B,67,58)	CKSRYB105K10	C 1020	(B,155,96)	CKSRYB105K16
C 830	(B,67,57)	CKSRYB105K10	C 1021	(B,145,77)	CKSSYB104K16
C 831	(B,68,55)	CKSRYB105K10	C 1022	(B,155,98)	CKSSYB104K16
C 832	(B,79,57)	CKSSYB104K10	C 1023	(B,167,100)	CKSRYB105K16
C 833	(A,76,58) 10 uF	CCG1192	C 1024	(B,165,100)	CKSSYB104K16
C 834	(B,74,54)	CKSSYB104K10	C 1025	(B,164,101)	CCSSCH221J50
C 835	(A,76,56)	CKSSYB104K10	C 1027	(B,162,101)	CCSSCH221J50
C 836	(A,73,61)	CKSQYB104K25	C 1028	(B,151,90)	CKSSYB104K16
C 837	(A,78,61)	CKSQYB104K25	C 1039	(B,156,90) 10 uF	CCG1234
C 838	(A,73,58) 10 uF	CCG1192	C 1040	(B,150,81) 10 uF	CCG1192
C 839	(A,78,60) 10 uF	CCG1192	C 1041	(B,158,92) 10 uF	CCG1192
C 840	(B,78,68)	CKSSYB104K10	C 1042	(B,157,94)	CKSRYB105K10
C 841	(B,74,70)	CKSRYB105K10	C 1043	(B,149,90)	CKSRYB105K10
C 842	(B,75,70)	CKSRYB105K10	C 1101	(B,134,62)	CCSSCH120J50
C 843	(B,77,70)	CKSRYB105K10	C 1102	(B,138,63)	CCSSCH120J50
C 901	(A,47,27)	CKSRYB105K10	C 1103	(B,129,50)	CKSRYB105K16
C 902	(B,43,27)	CKSRYB105K10	C 1104	(B,130,59)	CKSSYB123K16
C 903	(B,40,28)	CKSRYB105K10	C 1105	(A,132,59)	CKSSYB104K16
C 904	(B,43,28)	CKSRYB105K10	C 1106	(A,130,59)	CKSQYB225K10
C 905	(B,40,29)	CKSRYB105K10	C 1107	(B,130,50)	CKSRYB105K16
C 906	(B,43,30)	CKSRYB105K10	C 1108	(A,138,56)	CKSQYB104K25
C 907	(B,40,31)	CKSRYB105K10	C 1109	(A,135,53)	CKSQYB104K25
C 908	(A,48,27)	CKSSYB104K10	C 1110	(A,133,55)	CKSQYB104K25
C 909	(B,47,21)	CKSRYB105K10	C 1111	(B,141,56)	CKSSYB103K16
C 910	(B,48,18)	CKSRYB105K10	C 1112	(A,131,57)	CKSQYB104K25
C 911	(B,49,21)	CKSRYB105K10	C 1113	(A,136,59)	CKSQYB104K25
C 912	(B,50,18) (A)	CKSRYB105K10	C 1114	(B,127,58) 10 uF	CCG1192
C 913	(B,50,21) (A)	CKSRYB105K10	C 1115	(A,129,57) 10 uF	CCG1192
C 914	(B,51,18) (A)	CKSRYB105K10	C 1116	(A,142,53) 10 uF	CCG1192
C 915	(A,56,32) 10 uF	CCG1192	C 1117	(B,127,56) 10 uF	CCG1192
C 916	(B,57,31)	CKSSYB104K10	C 1118	(B,128,64) 10 uF	CCG1192
C 917	(A,55,31)	CKSSYB104K10	C 1119	(B,126,64) 10 uF	CCG1192
C 918	(A,53,27)	CKSQYB104K25	C 1120	(A,140,53)	CKSQYB104K25
C 919	(A,53,30)	CKSQYB104K25	C 1123	(B,139,60)	CCSSCH121J50
C 920	(A,51,27) 10 uF	CCG1192	C 1125	(B,140,61)	CCSSCH121J50
C 921	(A,51,30) 10 uF	CCG1192	C 1126	(B,140,63)	CCSSCH121J50
C 927	(B,54,18)	CKSRYB105K10	C 1201	(A,123,46)	CKSSYB104K16
C 928	(B,55,21)	CKSRYB105K10	C 1202	(A,124,46) 10 uF	CCG1192
C 939	(B,52,21)	CKSRYB105K10	C 1205	(B,116,49) 10 uF	CCG1192
C 940	(B,53,18)	CKSRYB105K10	C 1207	(B,141,49)	CCSSCH470J50
C 941	(B,53,21)	CKSRYB105K10	C 1208	(B,146,52)	CCSSCH121J50
C 1001	(B,162,106)	CKSQYB105K16	C 1209	(B,144,53)	CCSSCH121J50
C 1002	(B,164,106)	CKSQYB105K16	C 1210	(A,121,57)	CKSSYB104K16
C 1003	(B,152,68)	CKSQYB105K16	C 1211	(A,123,57) 10 uF	CCG1192
C 1004	(B,150,68)	CKSQYB105K16	C 1216	(A,120,66)	CKSSYB104K16
C 1005	(B,147,68)	CKSQYB105K16	C 1217	(A,121,67) 10 uF	CCG1192
C 1006	(B,145,68)	CKSQYB105K16	C 1222	(B,119,46)	CKSRYB182K50
C 1007	(B,149,106)	CKSQYB105K16	C 1223	(B,121,49)	CKSRYB182K50
C 1008	(B,151,106)	CKSQYB105K16	C 1224	(B,109,58)	CKSRYB182K50
C 1009	(B,153,106)	CKSQYB105K16			

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

C 1225 (B,113,55) CKSRYB182K50

C 1227 (B,117,68) CKSRYB182K50

C 1229 (A,115,49) CKSSYB104K16

C 1230 (A,111,57) 10 uF CCG1192

C 1231 (A,112,59) CKSSYB104K16

C 1232 (A,110,65) 10 uF CCG1192

C 1233 (A,114,69) CKSSYB104K16

C 1301 (B,86,90) 2.2 uF CCG1218

C 1302 (B,86,88) 2.2 uF CCG1218

C 1303 (B,93,82) 10 uF CCG1192

C 1304 (B,87,81) 10 uF CCG1192

C 1305 (B,85,93) CKSRYB105K10

C 1306 (B,86,91) CKSRYB105K10

C 1307 (B,73,93) CKSRYB105K10

C 1308 (B,73,92) CKSRYB105K10

C 1314 (A,73,99) XCEVW100M16

C 1315 (B,73,90) 2.2 uF CCG1218

C 1317 (A,73,92) XCEVW100M16

C 1319 (B,89,81) CKSQYB104K25

C 1321 (B,85,81) CKSQYB104K25

C 1322 (A,85,76) XCEVW470M16

C 1323 (A,74,77) XCEVW470M16

C 1447 (B,32,103) CKSSYB103K16

C 1501 (A,54,54) CKSSYB104K16

C 1502 (A,54,56) CKSSYB104K16

C 1503 (A,56,55) 10 uF CCG1192

C 1504 (A,46,55) 10 uF CCG1192

C 1505 (A,48,67) CKSSYB104K16

C 1507 (A,47,68) CKSSYB224K6R3

C 1508 (A,47,69) CKSSYB102K50

C 1509 (A,42,67) CKSSYB104K16

C 1511 (A,47,79) CCSSCH220J50

C 1512 (A,42,79) CCSSCH271J50

C 1515 (A,45,60) CKSSYB104K16

C 1518 (A,37,70) CCSSCH102J50

C 1519 (B,28,101) CCSSCH471J50

C 1523 (A,40,65) CKSSYB152K50

C 1533 (A,41,83) CCSSCH100D50

C 1705 (A,26,57) 10 uF(A) CCG1192

C 1706 (A,25,57) (A) CKSSYB104K10

C 1707 (A,26,46) 10 uF(A) CCG1192

C 1708 (A,25,46) (A) CKSSYB104K10

C 1711 (B,20,16) (A) CKSSYB104K16

C 1801 (B,162,13) CKSSYB104K10

C 1804 (B,166,16) CKSSYB104K16

C 1805 (A,166,13) CKSSYB104K16

C 1806 (B,157,10) CCSSCH101J50

C 1813 (B,158,11) CCSSCH101J50

C 1814 (B,162,8) CCSSCH270J50

C 1815 (B,145,11) CCSSCH270J50

C 1824 (B,91,83) CKSQYB104K25

C 1901 (B,131,41) CKSSYB104K10

C 2101 (B,157,109) CCSRCH101J50

C 2102 (B,156,111) CCSRCH101J50

C 2103 (B,159,113) CCSRCH101J50

C 2201 (A,76,88) 10 uF CCG1192

C 2202 (A,85,84) 10 uF CCG1192

C 2203 (A,81,88) 10 uF CCG1192

C 2204 (A,86,88) 10 uF CCG1192

C 2205 (B,163,127) CCSSCH101J50

C 2208 (B,26,110) CKSRYB104K50

C 2209 (B,30,110) CKSRYB104K50

C 2210 (B,128,94) 10 uF CCG1192

C 2211 (B,136,93) 10 uF CCG1192

C 2217 (A,109,76) CKSRYB104K50

C 2220 (B,170,103) 4.7 uF CCG1201

C 2221 (B,175,104) 4.7 uF CCG1201

C 2225 (B,24,113) CCSSCH270J50

C 2226 (B,31,132) CCSSCH270J50

C 2227 (B,113,79) CCSSCH270J50

C 2228 (A,108,75) CCSSCH270J50

C 2231 (B,170,107) CCSRCH101J50

C 2232 (B,173,107) CCSRCH101J50

C 2233 (A,172,103) CCSRCH121J50

B**Unit Number:CXX7592(A)****Unit Number:CXX7590(B)****Unit Number:CXX7593(C)****Unit Number:CXX7591(D,E,F,G)****Unit Name:IF Unit (Service)****MISCELLANEOUS**

IC 7003 (A,84,105) IC NJM2387ADL3

IC 7004 (A,17,35) Regulator IC MM3479A18P

IC 7008 (A,122,48) Regulator IC MM3479A12P

IC 7010 (A,87,45) Regulator IC MM3411A15N

IC 7011 (B,31,79) IC AN33012UA

IC 7101 (B,56,71) DC/DC CONV IC LTC3858EGN-1

IC 7202 (A,101,108) DC/DC CONV IC AN33014UA

IC 7203 (A,95,87) DC/DC CONV IC AN33014UA

IC 7601 (B,166,30) CONV IC WM8761BGED

IC 7602 (B,145,26) CONV IC WM8761BGED

IC 7603 (B,143,54) CONV IC WM8761BGED

IC 7701 (B,47,38) Dual OP-AMP NJM4565V

IC 7703 (B,147,65) AD Convrtcr IC AK5357VT

IC 7704 (A,26,35) IC TC4066BFT

IC 7705 (A,11,106) OP AMP IC NJU7043V

IC 7706 (A,49,41) Interface IC ML7247-001TBZ0

IC 7709 (B,47,33) OP AMP IC NJU7043V

IC 7901 (B,68,43) V AMP IC BH7673G

IC 7902 (B,71,43) V AMP IC BH7673G

IC 7903 (A,70,44) V AMP IC BH7673G

IC 7904 (A,66,45) V AMP IC BH7673G

IC 7905 (A,85,62) V PRO SYS LSI ML86V7675TBZA3A

IC 7906 (A,99,59) IC TC74LCX541FK

IC 7907 (A,98,67) Buffer Logic IC TC7SZ125FUS1

IC 7908 (B,78,88) V AMP IC BH7673G

IC 7911 (B,74,81) V AMP IC BH7673G

IC 7912 (B,73,69) V AMP IC BH7673G

IC 8001 (B,118,65) Interface IC MN864779KT

IC 8003 (A,129,67) CONV IC WM8761BGED

IC 8202 (B,53,25) Logic IC(A) TC7WZ34FK

IC 8501 (A,18,90) IC(A,B,C) TC7SH08FUS1

IC 8502 (B,144,93) Interface IC MAX14644ETA

IC 8504 (A,12,90) L-MOS And Gate(A,B,C) TC7SET08FUS1

IC 8505 (A,46,109) L-MOS And Gate(A) TC7SET08FUS1

5		6		7		8	
Circuit Symbol and No.		Part No.		Circuit Symbol and No.		Part No.	
IC 8506	(A,38,110) IC(A)	TC7SH08FUS1		D 8403	(B,113,20) Diode	EZAEG2A50AX	
IC 8507	(A,42,110) L-MOS And Gate(A)	TC7SET08FUS1		D 8404	(B,112,25) Diode	EZAEG2A50AX	
IC 8601	(A,25,9) Dual OP-AMP	NJM4565V		D 8405	(B,116,22) Diode	EZAEG2A50AX	
Q 7002	(A,74,102) Resistor Built-IN TR	LTC014EEB		D 8406	(B,117,21) Diode	EZAEG2A50AX	
Q 7011	(A,111,47) IC	RZQ050P01		D 8419	(B,116,24) Diode	EZAEG2A50AX	
Q 7012	(A,117,48) Bipolar TR	LSCR523UB					
Q 7013	(A,26,67) Power MOS FET	ATP112-H		D 8420	(B,114,23) Diode	EZAEG2A50AX	
Q 7014	(A,16,75) Chip Transistor	2SB1689		D 8423	(B,112,22) Diode	EZAEG2A50AX	
Q 7015	(A,12,78) Bipolar TR	LSCR523UB		D 8424	(B,111,21) Diode	EZAEG2A50AX	
Q 7016	(A,67,85) IC	RZQ050P01		D 8501	(A,14,87) Rectifier Diode(A,B,C)	DA2J101	
Q 7017	(A,71,89) Bipolar TR	LSCR523UB		D 8506	(B,147,101) Diode	EZAEG2A50AX	
Q 7101	(A,46,79) FET	FK8V03040		D 8507	(B,145,105) Diode	EZAEG2A50AX	
Q 7102	(A,46,63) FET	FK8V03040		D 8508	(B,147,102) Diode	EZAEG2A50AX	
Q 7103	(A,42,79) FET	FK8V03050		D 8509	(B,145,103) Diode	EZAEG2A50AX	
Q 7104	(A,42,63) FET	FK8V03050		D 8601	(A,49,14) Diode	DZ2S068C	
Q 7201	(A,144,71) Resistor Built-IN TR	LTC014EEB		D 8602	(A,36,10) Diode	DZ2S068C	
Q 7202	(A,149,69) Bipolar TR	LSAR523UB		L 7003	(A,35,63) SMD SPL Inductor	CTH1544	
Q 7203	(A,145,73) Resistor Built-IN TR	LTC014EEB		L 7101	(A,54,61) Inductor	CTH1482	
Q 7204	(A,150,72) Bipolar TR	LSAR523UB		L 7102	(A,54,82) Choke Coil 3.6 uH	CTH1479	
Q 7703	(B,31,37) Bipolar TR	LSCR523UB		L 7103	(B,38,76) Inductor	CTF1738	
Q 7704	(A,34,31) Resistor Built-IN TR	LTC044EEB		L 7201	(B,113,110) SMD SPL Inductor	CTH1524	
Q 7705	(A,32,34) Resistor Built-IN TR	LTC044EEB		L 7202	(B,107,90) SMD SPL Inductor	CTH1524	
Q 7901	(B,68,49) Bipolar TR	LSCR523UB		L 7203	(B,106,113) Inductor	CTF1793	
Q 7902	(B,71,49) Bipolar TR	LSCR523UB		L 7204	(B,100,93) Inductor	CTF1793	
Q 7903	(A,69,50) Bipolar TR	LSCR523UB		L 7301	(B,87,44) Chip Ferrite Bead	BTX1046	
Q 7904	(A,65,51) Bipolar TR	LSCR523UB		L 7302	(B,92,45) Chip Ferrite Beads	VTL1183	
Q 7905	(B,64,54) Bipolar TR	LSCR523UB		L 7303	(B,147,34) Inductor(A)	CTF1795	
Q 7906	(A,77,73) Bipolar TR	LSCR523UB		L 7304	(B,150,33) Inductor(A)	CTF1795	
Q 7907	(B,78,78) Bipolar TR	LSCR523UB		L 7309	(B,143,44) Inductor	CTF1795	
Q 7908	(B,72,65) Bipolar TR	LSCR523UB		L 7310	(B,99,44) Inductor	CTF1795	
Q 8001	(A,124,92) Resistor Built-IN TR	LTC023EEB		L 7311	(B,100,46) Inductor	CTF1795	
Q 8002	(A,122,96) Bipolar TR	LSAR523UB		L 7312	(B,100,48) Inductor	CTF1795	
Q 8003	(A,122,74) Chip Transistor	RN4982		L 7313	(B,101,44) Inductor	CTF1795	
Q 8501	(A,143,98) Bipolar TR	LSAR523UB		L 7314	(B,101,46) Inductor	CTF1795	
Q 8601	(A,32,13) Chip Transistor	RN4983		L 7315	(B,102,48) Inductor	CTF1795	
D 7006	(A,31,72) Diode	RB080L-30		L 7501	(A,106,40) Inductor	CTF1736	
D 7101	(B,49,67) Schottky Diode	DB2J41100		L 7502	(A,156,50) Inductor	CTF1736	
D 7102	(B,49,66) Schottky Diode	DB2J41100		L 7601	(B,170,21) Inductor	CTF1786	
D 7201	(B,102,112) Diode	RB060M-30		L 7602	(B,140,20) Inductor	CTF1786	
D 7202	(B,96,92) Diode	RB060M-30		L 7603	(B,152,50) Inductor	CTF1786	
D 7501	(B,132,29) Diode	RB501VM-40		L 7704	(B,157,65) Inductor	CTF1558	
D 7502	(A,132,26) Diode	RB501VM-40		L 7705	(B,153,61) Inductor	CTF1558	
D 7512	(B,93,27) Diode	DZ2J039M0		L 7706	(B,50,43) Ferrite Bead	CTF1528	
D 8001	(B,136,101) Diode	EZAEG2A50AX		L 7707	(B,32,26) Chip Ferrite Bead	BTX1047	
D 8002	(B,134,101) Diode	EZAEG2A50AX		L 7902	(A,73,65) Chip Ferrite Bead	BTX1047	
D 8003	(B,133,99) Diode	EZAEG2A50AX		L 7903	(A,84,75) Chip Ferrite Bead	BTX1047	
D 8004	(B,132,99) Diode	EZAEG2A50AX		L 7904	(A,90,48) Chip Ferrite Bead	BTX1047	
D 8005	(B,131,101) Diode	EZAEG2A50AX		L 7905	(A,83,42) Chip Ferrite Bead	BTX1047	
D 8006	(B,129,101) Diode	EZAEG2A50AX		L 7906	(A,102,69) Chip Ferrite Bead	BTX1047	
D 8007	(B,129,99) Diode	EZAEG2A50AX		L 7907	(A,101,64) Chip Ferrite Bead	BTX1047	
D 8008	(B,127,99) Diode	EZAEG2A50AX		L 7909	(A,101,66) Chip Beads	VTL1126	
D 8011	(B,121,99) Diode	EZAEG2A50AX		L 7915	(A,90,52) Inductor	CTF1787	
D 8012	(B,119,101) Diode	EZAEG2A50AX		L 7916	(A,87,52) Inductor	CTF1787	
D 8013	(A,118,77) Rectifier Diode	DA2J101		L 7917	(A,95,65) Inductor	CTF1787	
D 8014	(B,126,102) Diode	EZAEG2A50AX		L 7918	(A,95,63) Inductor	CTF1787	
D 8015	(A,127,79) Rectifier Diode	DAN202UM		L 7919	(A,85,53) Inductor	CTF1787	
D 8016	(B,124,103) Diode	EZAEG2A50AX		L 7920	(A,84,53) Inductor	CTF1787	
D 8401	(B,109,23) Diode	EZAEG2A50AX		L 7921	(A,81,52) Inductor	CTF1787	
D 8402	(B,110,22) Diode	EZAEG2A50AX		L 7922	(A,85,72) Inductor	CTF1787	
				L 7923	(A,87,71) Inductor	CTF1787	

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

L 7930 (A,107,61) Chip Beads VTL1127

L 7931 (A,105,60) Chip Beads VTL1127

L 7932 (A,107,60) Chip Beads VTL1127

L 7933 (A,105,59) Chip Beads VTL1127

L 7934 (A,107,58) Chip Beads VTL1127

L 7935 (A,105,58) Chip Beads VTL1127

L 7936 (A,107,57) Chip Beads VTL1127

L 7937 (A,105,56) Chip Beads VTL1127

L 8001 (B,135,97) Noise Filter CTF1834

L 8002 (B,128,97) Noise Filter CTF1834

L 8003 (B,130,97) Noise Filter CTF1834

L 8004 (B,133,97) Noise Filter CTF1834

L 8005 (B,114,73) Ferrite Bead CTF1528

L 8006 (B,125,67) Chip Beads VTL1127

L 8007 (B,125,66) Chip Beads VTL1127

L 8008 (B,125,65) Chip Beads VTL1127

L 8009 (B,125,63) Chip Beads VTL1126

L 8011 (A,128,75) Inductor CTF1786

L 8012 (A,114,80) Inductor CTF1795

L 8201 (B,60,19) Ferrite Bead CTF1528

L 8202 (B,59,19) Ferrite Bead CTF1528

L 8203 (B,58,19) Ferrite Bead CTF1528

L 8204 (B,137,15) Ferrite Bead CTF1528

L 8205 (B,74,23) Ferrite Bead CTF1528

L 8401 (B,109,31) Coil(A,B) CTH1554

(B,109,31) Inductor(C) CTF1731

L 8402 (B,107,31) Coil(A,B) CTH1554

(B,107,31) Inductor(C) CTF1731

L 8403 (B,105,31) Coil(A,B) CTH1554

(B,105,31) Inductor(C) CTF1731

L 8404 (B,103,31) Coil(A,B) CTH1554

(B,103,31) Inductor(C) CTF1731

L 8501 (B,144,98) Choke Coil 90 ohm CTH1319

L 8502 (B,142,98) Choke Coil 90 ohm CTH1319

X 7701 (A,44,51) Resonator 12.288 MHz CSS1811

X 7901 (A,91,74) Resonator 32.000 MHz CSS1818

X 8001 (B,109,73) Resonator 27.000 MHz CSS1768

P 7001 (B,66,122) Poly Switch(A) MINISMDC150F/24

CN7001 (A,56,115) Connector CKS4977

CN7301 (B,103,39) B TO B Connector CKS6547

CN7302 (B,140,39) B TO B Connector CKS6549

CN7701 (B,24,21) B TO B Connector CKS6346

CN8201 (B,69,11) FFC/FPC Connector CKS6646

CN8202 (B,87,118) Plug CKM1599

CN8203 (B,151,10) FFC/FPC Connector CKS6646

CN8204 (B,70,95) Connector CKS6007

CN8401 (B,114,15) FFC/FPC Connector CKS6646

CN8502 (B,62,128) Connector(A,B,C) CKS6603

JA7501 (A,107,22) Connector CKS6282

JA7502 (A,159,33) Connector CKS6438

JA8001 (B,129,110) Connector CKS6560

JA8501 (B,151,116) Connector DKN1417

JA8502 (B,46,128) Connector(A) CKS6495

JA8503 (B,14,128) Jack CKN1040

JA8601 (B,42,10) Connector CKS6437

BT Module CWX4710

RESISTORS

R 7001 (A,71,112) (A) RS1/4SA0R0J

R 7008 (A,75,104)

R 7011 (A,75,103)

R 7017 (A,77,104)

R 7018 (A,76,102)

R 7029 (A,20,33)

R 7032 (A,17,38)

R 7041 (A,118,45)

R 7049 (A,111,49)

R 7050 (A,115,47)

R 7056 (A,104,47)

R 7057 (A,107,46)

R 7066 (B,33,70)

R 7067 (B,33,71)

R 7068 (B,33,72)

R 7071 (A,23,78) 0.011 ohm

R 7077 (B,34,73)

R 7078 (B,31,70)

R 7079 (B,33,69)

R 7082 (B,34,70)

R 7086 (A,14,75)

R 7087 (A,13,76)

R 7088 (A,14,82)

R 7091 (B,28,73)

R 7092 (A,75,86)

R 7093 (A,73,89)

R 7094 (A,67,88)

R 7098 (A,12,81)

R 7099 (B,66,116) (A)

R 7101 (B,53,55)

R 7102 (B,57,55)

R 7103 (B,61,77)

R 7104 (B,62,78)

R 7105 (B,63,78)

R 7106 (B,63,76)

R 7107 (B,60,55)

R 7109 (B,61,66)

R 7110 (B,62,64)

R 7111 (B,63,65)

R 7112 (B,63,67)

R 7113 (B,65,76)

R 7114 (B,60,57)

R 7115 (B,64,73)

R 7116 (B,65,67)

R 7117 (B,64,74)

R 7118 (B,63,70)

R 7119 (B,63,69)

R 7120 (B,60,58)

R 7121 (B,63,58)

R 7122 (B,62,72)

R 7123 (B,49,76)

R 7124 (B,51,64)

R 7125 (B,48,75)

R 7128 (A,62,79) 15 mohm

R 7129 (A,64,79) 15 mohm

R 7130 (A,64,63) 12 mohm

R 7131 (A,62,63) 12 mohm

R 7132 (A,66,72)

R 7133 (A,66,70)

R 7134 (B,60,65)

R 7135 (B,53,66)

RS1/16SS473J

RS1/16SS2401D

RS1/16SS8201D

RS1/16SS2201D

RS1/16SS102J

RS1/8SQ0R0J

RS1/16SS683J

RS1/10SR103J

RS1/16SS683J

RS1/8SQ0R0J

RS1/10SR331J

RS1/16SS2702D

RS1/16SS1101D

RS1/16SS2701D

CCN1341

RS1/16SS1103D

RS1/16SS562J

RS1/16SS0R0J

RS1/16SS0R0J

RS1/16SS102J

RS1/16SS102J

RS1/16SS103J

RS1/16SS0R0J

RS1/16SS683J

RS1/16SS683J

RS1/10SR103J

RS1/16SS103J

RS1/4SA0R0J

RS1/16SS0R0J

RS1/16SS0R0J

RS1/16SS0R0J

RS1/16SS1502D

RS1/16SS4303D

RS1/16SS8202D

RS1/16SS104J

RS1/16SS0R0J

RS1/16SS1802D

RS1/16SS4703D

RS1/16SS1503D

RS1/16SS562J

RS1/16SS0R0J

RS1/10SR0R0J

RS1/16SS392J

RS1/10SR0R0J

RS1/10SR0R0J

RS1/10SR0R0J

RS1/10SR334J

RS1/10SR274J

RS1/16SS104J

RS1/10SR120J

RS1/10SR100J

RS1/10SR2R2J

CCN1328

CCN1328

CCN1321

CCN1321

RS1/4SA0R0J

RS1/4SA0R0J

RS1/16SS0R0J

RS1/16SS6R8J

5		6		7		8	
Circuit Symbol and No.		Part No.		Circuit Symbol and No.		Part No.	
R 7136	(B,52,76)	RS1/16SS6R8J		R 7341	(B,140,46)	RS1/16SS0R0J	
R 7202	(A,146,69)	RS1/16SS222J		R 7342	(B,136,28)	RS1/16SS0R0J	A
R 7203	(A,146,71)	RS1/16SS222J		R 7343	(B,141,45)	RS1/16SS0R0J	
R 7206	(A,148,72)	RS1/16SS222J		R 7344	(B,138,32)	RS1/16SS0R0J	
R 7207	(A,147,73)	RS1/16SS222J		R 7345	(B,142,46)	RS1/16SS0R0J	
				R 7350	(B,134,27)	RS1/16SS0R0J	
R 7211	(B,90,92)	RS1/8SQ0R0J					
R 7212	(B,96,112)	RS1/8SQ0R0J		R 7356	(B,100,33)	RS1/16SS0R0J	
R 7213	(A,107,99)	RS1/16SS102J		R 7357	(B,133,30)	RS1/16SS0R0J	
R 7214	(A,98,79)	RS1/16SS102J		R 7362	(B,114,31) (A,B,C)	RS1/16SS0R0J	
R 7215	(A,107,98)	RS1/16SS102J		R 7364	(B,114,32) (A,B,C)	RS1/16SS0R0J	
				R 7376	(B,122,43)	RS1/10SR0R0J	
R 7216	(A,98,78)	RS1/16SS102J					
R 7217	(A,107,97)	RS1/16SS102J		R 7385	(B,117,27)	RS1/16SS0R0J	
R 7218	(A,97,102)	RS1/16SS152J		R 7386	(B,87,33)	RS1/16SS0R0J	B
R 7219	(A,98,77)	RS1/16SS102J		R 7387	(B,111,33)	RS1/16SS0R0J	
R 7220	(A,91,81)	RS1/16SS152J		R 7388	(B,91,32)	RS1/16SS0R0J	
				R 7389	(B,113,30)	RS1/16SS0R0J	
R 7221	(A,107,96)	RS1/16SS102J					
R 7222	(A,98,76)	RS1/16SS102J		R 7390	(B,89,32)	RS1/16SS0R0J	
R 7224	(A,97,103)	RS1/16SS3002D		R 7391	(B,112,33)	RS1/16SS0R0J	
R 7225	(A,95,103)	RS1/16SS2701D		R 7392	(B,92,31)	RS1/16SS101J	
R 7227	(A,93,105)	RS1/16SS8201D		R 7393	(B,98,46)	RS1/16SS0R0J	
				R 7394	(B,90,30)	RS1/16SS0R0J	
R 7229	(A,91,82)	RS1/16SS3002D					
R 7230	(A,90,82)	RS1/16SS2701D		R 7397	(B,132,32)	RS1/16SS0R0J	
R 7232	(A,87,84)	RS1/16SS8201D		R 7398	(B,96,32)	RS1/16SS0R0J	
R 7233	(A,98,114)	RS1/16SS0R0J		R 7399	(B,133,33)	RS1/16SS0R0J	C
R 7234	(A,92,93)	RS1/16SS0R0J		R 7400	(B,95,31)	RS1/16SS0R0J	
				R 7401	(B,94,31)	RS1/16SS0R0J	
R 7235	(A,94,104)	RS1/16SS752J					
R 7236	(A,89,83)	RS1/16SS103J		R 7403	(B,96,44)	RS1/16SS0R0J	
R 7237	(B,112,104) 0.047 ohm	CCN1167		R 7405	(B,97,46)	RS1/16SS0R0J	
R 7238	(B,106,83) 0.047 ohm	CCN1167		R 7407	(B,135,32)	RS1/16SS0R0J	
R 7245	(A,108,105)	RS1/16SS1001D		R 7408	(B,98,44)	RS1/16SS0R0J	
				R 7419	(B,144,47)	RS1/16SS0R0J	
R 7246	(A,102,84)	RS1/16SS0R0J					
R 7247	(A,107,102)	RS1/16SS224J		R 7420	(B,144,44)	RS1/16SS0R0J	
R 7248	(A,101,81)	RS1/16SS224J		R 7425	(B,145,45) (A)	RS1/16SS221J	
R 7249	(A,109,105)	RS1/16SS1202D		R 7426	(B,147,45) (A)	RS1/16SS221J	
R 7250	(A,103,84)	RS1/16SS2202D		R 7428	(B,148,44) (A)	RS1/16SS0R0J	D
				R 7430	(B,148,46) (A)	RS1/16SS221J	
R 7251	(A,108,103)	RS1/16SS104J					
R 7252	(A,102,83)	RS1/16SS104J		R 7433	(B,150,46)	RS1/16SS0R0J	
R 7253	(A,116,104)	RS1/16SS0R0J		R 7435	(B,151,46)	RS1/16SS0R0J	
R 7254	(A,110,84)	RS1/16SS0R0J		R 7437	(B,152,46)	RS1/16SS0R0J	
R 7302	(A,131,44)	RS1/10SR0R0J		R 7439	(B,122,32)	RS1/16SS103J	
				R 7440	(B,155,44)	RS1/16SS0R0J	
R 7303	(A,128,42)	RS1/10SR0R0J					
R 7306	(B,130,44)	RS1/16SS0R0J		R 7441	(B,155,43)	RS1/16SS0R0J	
R 7307	(B,95,49)	RS1/10SR0R0J		R 7442	(B,124,32)	RS1/16SS0R0J	
R 7308	(B,130,46)	RS1/16SS0R0J		R 7443	(B,130,32)	RS1/16SS0R0J	
R 7309	(B,95,46)	RS1/16SS0R0J		R 7444	(B,129,31)	RS1/16SS0R0J	
				R 7445	(B,128,30)	RS1/16SS0R0J	E
R 7310	(B,131,44)	RS1/16SS0R0J					
R 7311	(B,131,46)	RS1/16SS0R0J		R 7446	(B,127,31)	RS1/16SS0R0J	
R 7315	(B,133,46)	RS1/16SS0R0J		R 7447	(B,126,30)	RS1/16SS0R0J	
R 7317	(B,133,44)	RS1/16SS0R0J		R 7448	(B,125,32)	RS1/16SS0R0J	
R 7323	(B,134,46)	RS1/16SS0R0J		R 7449	(B,124,30)	RS1/16SS0R0J	
				R 7456	(B,87,30)	RS1/16SS103J	
R 7325	(B,134,44)	RS1/16SS0R0J					
R 7327	(B,135,48)	RS1/16SS0R0J		R 7457	(B,116,30)	RS1/16SS103J	
R 7329	(B,135,44)	RS1/16SS0R0J		R 7458	(B,117,30)	RS1/16SS103J	
R 7330	(B,136,46)	RS1/16SS0R0J		R 7459	(B,118,31)	RS1/16SS103J	
R 7331	(B,138,44)	RS1/16SS0R0J		R 7460	(B,120,32)	RS1/16SS103J	
				R 7461	(B,121,32)	RS1/16SS103J	
R 7333	(B,137,44)	RS1/16SS0R0J					F
R 7335	(B,136,32)	RS1/16SS0R0J		R 7463	(B,154,45)	RS1/16SS0R0J	
R 7338	(B,135,29)	RS1/16SS0R0J		R 7470	(B,116,31)	RS1/16SS0R0J	
R 7340	(B,135,26)	RS1/16SS0R0J		R 7482	(B,58,113) (A)	RS1/16SS0R0J	

	Circuit Symbol and No.		Part No.		Circuit Symbol and No.		Part No.
A	R 7483	(B,58,112) (A)	RS1/16SS0R0J	R 7634	(B,155,54)	RS1/16SS0R0J	
	R 7484	(B,132,25)	RS1/16SS104J	R 7639	(B,141,32)	RS1/16SS0R0J	
				R 7640	(B,161,22)	RS1/16SS0R0J	
	R 7503	(B,129,28)	RS1/16SS103J				
	R 7504	(B,128,27)	RS1/16SS103J	R 7702	(B,52,38)	RS1/16SS753J	
	R 7505	(B,126,27)	RS1/16SS103J	R 7703	(B,53,40)	RS1/16SS753J	
■	R 7506	(B,125,28)	RS1/16SS103J	R 7707	(A,9,115)	RS1/16SS0R0J	
	R 7507	(B,124,28)	RS1/16SS103J	R 7708	(B,33,23)	RS1/16SS101J	
				R 7709	(B,26,29)	RS1/10SR0R0J	
	R 7515	(A,124,33)	RS1/16SS0R0J				
	R 7516	(A,125,31)	RS1/16SS0R0J	R 7710	(B,34,26)	RS1/16SS101J	
	R 7517	(A,126,30)	RS1/16SS0R0J	R 7712	(B,21,26)	RS1/16SS0R0J	
B	R 7518	(A,127,30)	RS1/16SS0R0J	R 7713	(B,22,26)	RS1/16SS0R0J	
	R 7519	(A,128,30)	RS1/16SS0R0J	R 7714	(B,31,41)	RS1/16SS102J	
				R 7715	(B,31,33)	RS1/16SS0R0J	
	R 7520	(A,129,31)	RS1/16SS0R0J				
	R 7521	(A,130,29)	RS1/16SS0R0J	R 7716	(A,47,51)	RS1/16SS222J	
	R 7522	(A,119,40)	RS1/16SS680J	R 7717	(B,18,15)	RS1/16SS102J	
■	R 7523	(A,99,40)	RS1/16SS680J	R 7718	(B,17,15)	RS1/16SS102J	
	R 7524	(A,95,40)	RS1/16SS330J	R 7719	(A,46,50)	RS1/16SS105J	
				R 7723	(B,20,24)	RS1/16SS0R0J	
	R 7525	(B,168,46)	RS1/16SS680J				
	R 7526	(B,163,46)	RS1/16SS680J	R 7728	(A,50,50)	RS1/16SS0R0J	
	R 7527	(A,151,49)	RS1/16SS680J	R 7729	(B,17,24)	RS1/16SS0R0J	
C	R 7528	(B,94,11)	RS1/16SS221J	R 7730	(A,50,51)	RS1/16SS0R0J	
	R 7530	(B,93,14)	RS1/16SS330J	R 7731	(B,41,40)	RS1/16SS0R0J	
				R 7733	(A,38,48)	RS1/16SS0R0J	
	R 7531	(A,119,39)	RS1/16SS680J				
	R 7532	(A,112,40)	RS1/16SS680J	R 7734	(A,30,35)	RS1/16SS223J	
	R 7533	(A,98,40)	RS1/16SS680J	R 7735	(A,30,37)	RS1/16SS223J	
■	R 7534	(B,165,46)	RS1/16SS680J	R 7737	(B,29,36)	RS1/16SS222J	
	R 7535	(A,149,49)	RS1/16SS680J	R 7738	(B,27,36)	RS1/16SS332J	
				R 7739	(A,39,40)	RS1/16SS0R0J	
	R 7537	(B,167,47)	RS1/16SS103J				
	R 7538	(B,164,47)	RS1/16SS103J	R 7744	(A,31,33)	RS1/16SS223J	
	R 7539	(B,162,47)	RS1/16SS103J	R 7745	(B,42,37)	RS1/16SS333J	
D	R 7540	(A,149,51)	RS1/16SS103J	R 7746	(B,41,38)	RS1/16SS473J	
	R 7541	(A,148,51)	RS1/16SS103J	R 7749	(B,54,40)	RS1/16SS101J	
				R 7752	(B,36,36)	RS1/16SS561J	
	R 7544	(A,146,51)	RS1/16SS0R0J				
	R 7545	(A,93,42)	RS1/16SS0R0J	R 7756	(B,144,70)	RS1/16SS103J	
	R 7601	(B,158,28)	RS1/16SS221J	R 7757	(B,142,65)	RS1/16SS220J	
■	R 7603	(B,161,27)	RS1/16SS0R0J	R 7758	(B,145,62)	RS1/16SS220J	
	R 7604	(B,156,29)	RS1/16SS102J	R 7761	(A,59,37)	RS1/16SS0R0J	
				R 7762	(B,35,23)	RS1/16SS222J	
	R 7605	(B,159,29)	RS1/16SS102J				
	R 7606	(B,155,28)	RS1/16SS102J	R 7764	(B,36,38)	RS1/16SS821J	
	R 7607	(B,164,34)	RS1/16SS103J	R 7766	(A,47,32)	RS1/16SS103J	
E	R 7609	(B,140,29)	RS1/16SS0R0J				
	R 7610	(B,145,31)	RS1/16SS330J	R 7767	(A,48,32)	RS1/16SS0R0J	
				R 7768	(A,56,33)	RS1/16SS0R0J	
	R 7611	(B,143,33)	RS1/16SS330J	R 7769	(A,55,33)	RS1/16SS0R0J	
	R 7612	(B,150,28)	RS1/16SS330J	R 7770	(A,54,33)	RS1/16SS0R0J	
	R 7613	(B,144,49)	RS1/16SS221J	R 7771	(A,53,33)	RS1/16SS331J	
■	R 7614	(B,139,49)	RS1/16SS0R0J				
	R 7615	(B,137,54)	RS1/16SS330J	R 7772	(A,56,29)	RS1/16SS103J	
				R 7773	(A,55,30)	RS1/16SS103J	
	R 7616	(B,137,52)	RS1/16SS330J	R 7774	(A,54,30)	RS1/16SS103J	
	R 7617	(B,137,50)	RS1/16SS330J	R 7775	(B,59,41)	RS1/10SR0R0J	
	R 7618	(B,143,31)	RS1/16SS103J	R 7776	(A,38,43)	RS1/16SS0R0J	
F	R 7619	(B,140,60)	RS1/16SS103J				
	R 7621	(B,164,24)	RS1/16SS821J	R 7778	(B,55,34)	RS1/16SS153J	
				R 7780	(B,52,32)	RS1/16SS223J	
	R 7622	(B,168,24)	RS1/16SS821J	R 7781	(B,46,30)	RS1/16SS223J	
	R 7623	(B,147,20)	RS1/16SS821J	R 7782	(B,52,30)	RS1/16SS0R0J	
	R 7624	(B,151,20)	RS1/16SS821J	R 7783	(B,40,32)	RS1/16SS163J	
■	R 7625	(B,153,52)	RS1/16SS821J				
	R 7626	(B,153,57)	RS1/16SS821J	R 7784	(B,42,32)	RS1/16SS163J	
				R 7785	(B,39,32)	RS1/16SS101J	
	R 7628	(B,166,22)	RS1/16SS0R0J	R 7786	(B,50,29)	RS1/16SS0R0J	
	R 7631	(B,149,19)	RS1/16SS0R0J	R 7787	(A,12,111)	RS1/16SS153J	

Circuit Symbol and No.		Part No.	Circuit Symbol and No.		Part No.	
R 7788	(A,9,111)	RS1/16SS683J	R 7958	(A,95,61)	RAB4CQ391J	A
R 7789	(A,8,104)	RS1/16SS562J	R 7959	(A,95,58)	RAB4CQ391J	
R 7791	(A,9,101)	RS1/16SS104J	R 7968	(A,103,62)	RS1/16SS221J	
R 7792	(A,11,101)	RS1/16SS274J	R 7977	(A,103,66)	RS1/16SS151J	
R 7793	(B,34,41)	RS1/16SS0R0J	R 7982	(B,67,47)	RS1/16SS101J	
R 7794	(A,15,106)	RS1/16SS0R0J	R 7983	(B,70,47)	RS1/16SS101J	B
R 7795	(A,13,113)	RS1/16SS0R0J	R 7984	(A,70,47)	RS1/16SS101J	
R 7797	(B,50,35)	RS1/16SS153J	R 7985	(A,67,48)	RS1/16SS101J	
R 7798	(A,31,30)	RS1/16SS223J	R 7986	(B,68,35)	RS1/16SS75R0D	
R 7804	(A,31,31)	RS1/16SS0R0J	R 7987	(B,71,35)	RS1/16SS75R0D	
R 7805	(A,17,110)	RS1/16SS102J	R 7988	(A,70,35)	RS1/16SS75R0D	C
R 7806	(A,15,113)	RS1/16SS102J	R 7989	(A,66,36)	RS1/16SS75R0D	
R 7811	(B,14,24)	RS1/16SS0R0J	R 7991	(B,61,26)	RS1/16SS0R0J	
R 7813	(B,57,36)	RS1/16SS0R0J	R 7992	(B,62,46)	RS1/16SS0R0J	
R 7820	(A,18,29)	RS1/16SS0R0J	R 7994	(B,81,68)	RS1/16SS0R0J	
R 7821	(A,29,43)	RS1/16SS0R0J	R 7995	(A,94,67)	RS1/16SS270J	D
R 7822	(B,31,42)	RS1/16SS0R0J	R 8001	(B,121,104)	RS1/16SS0R0J	
R 7823	(B,40,36)	RS1/16SS273J	R 8002	(B,123,104)	RS1/16SS0R0J	
R 7826	(B,44,42)	RS1/16SS0R0J	R 8003	(B,124,102)	RS1/16SS151J	
R 7827	(A,53,49)	RS1/16SS472J	R 8004	(B,122,101)	RS1/16SS151J	
R 7828	(A,53,52)	RS1/16SS472J	R 8006	(A,122,94)	RS1/16SS103J	E
R 7829	(A,18,25)	RS1/16SS0R0J	R 8007	(A,122,93)	RS1/16SS102J	
R 7832	(A,52,23)	RS1/10SR0R0J	R 8008	(B,119,103)	RS1/16SS102J	
R 7833	(A,50,30)	RS1/10SR0R0J	R 8009	(B,119,98)	RS1/16SS473J	
R 7834	(B,52,33)	RS1/16SS682J	R 8010	(B,119,99)	RS1/16SS473J	
R 7881	(B,65,20)	RS1/16SS0R0J	R 8011	(A,113,82)	RS1/16SS223J	F
R 7882	(B,64,18)	RS1/16SS0R0J	R 8012	(A,113,80)	RS1/16SS433J	
R 7901	(B,80,73)	RS1/16SS151J	R 8013	(A,126,58)	RS1/16SS0R0J	
R 7902	(B,78,71)	RS1/16SS151J	R 8014	(A,121,56)	RS1/16SS0R0J	
R 7903	(B,77,65)	RS1/16SS151J	R 8015	(B,125,70)	RS1/16SS0R0J	
R 7907	(B,68,54)	RS1/16SS151J	R 8016	(A,126,53)	RS1/16SS0R0J	A
R 7908	(B,69,55)	RS1/16SS151J	R 8017	(A,118,80)	RS1/16SS273J	
R 7909	(B,71,55)	RS1/16SS151J	R 8018	(B,111,71)	RS1/16SS102J	
R 7910	(A,71,57)	RS1/16SS151J	R 8019	(B,125,69)	RS1/16SS271J	
R 7911	(B,85,64)	RS1/4SA0R0J	R 8021	(B,125,68)	RS1/16SS0R0J	
R 7912	(B,85,61)	RS1/4SA0R0J	R 8022	(B,111,69)	RS1/16SS105J	B
R 7913	(B,85,59)	RS1/4SA0R0J	R 8024	(A,123,68)	RS1/16SS333J	
R 7916	(B,84,74)	RS1/16SS1500D	R 8025	(A,124,68)	RS1/16SS333J	
R 7918	(B,79,83)	RS1/16SS0R0J	R 8026	(B,126,67)	RS1/16SS330J	
R 7919	(B,84,67)	RS1/16SS1500D	R 8027	(A,122,63)	RS1/16SS333J	
R 7920	(B,86,70)	RS1/16SS472J	R 8028	(A,123,65)	RS1/16SS333J	C
R 7921	(B,87,56)	RS1/16SS473J	R 8029	(B,126,66)	RS1/16SS330J	
R 7923	(B,86,68)	RS1/16SS101J	R 8031	(A,113,60)	RS1/16SS103J	
R 7924	(B,87,67)	RS1/16SS101J	R 8032	(A,112,63)	RS1/16SS0R0J	
R 7925	(A,89,72)	RS1/16SS821J	R 8033	(B,126,65)	RS1/16SS330J	
R 7926	(A,89,69)	RS1/16SS105J	R 8035	(B,125,64)	RS1/16SS0R0J	D
R 7927	(B,78,96)	RS1/16SS104J	R 8036	(A,110,63)	RS1/16SS472J	
R 7928	(B,78,80)	RS1/10SR0R0J	R 8037	(B,126,63)	RS1/16SS101J	
R 7929	(B,75,91)	RS1/16SS104J	R 8038	(A,129,53)	RS1/16SS473J	
R 7930	(A,96,69)	RS1/16SS221J	R 8040	(A,128,53)	RS1/16SS473J	
R 7932	(B,74,66)	RS1/16SS0R0J	R 8041	(A,130,53)	RS1/16SS473J	E
R 7933	(B,76,75)	RS1/16SS104J	R 8042	(B,111,63)	RAB4CQ220J	
R 7942	(B,62,52)	RS1/16SS273J	R 8043	(B,111,60)	RAB4CQ220J	
R 7943	(B,62,51)	RS1/16SS273J	R 8044	(B,116,58)	RAB4CQ220J	
R 7945	(A,95,70)	RS1/16SS103J	R 8045	(B,118,58)	RAB4CQ220J	
R 7951	(A,95,72)	RS1/16SS101J	R 8046	(A,126,76)	RS1/16SS472J	F
R 7955	(A,103,63)	RS1/16SS104J	R 8052	(B,108,66)	RS1/16SS100J	
R 7956	(A,103,60)	RAB4CQ151J	R 8057	(A,133,75)	RS1/16SS821J	
R 7957	(A,103,57)	RAB4CQ151J	R 8058	(A,133,73)	RS1/16SS0R0J	

	Circuit Symbol and No.		Part No.		Circuit Symbol and No.		Part No.
A	R 8059	(A,133,72)	RS1/16SS821J	R 8343	(B,73,99)	RS1/16SS0R0J	
	R 8061	(B,125,59)	RAB4CQ221J	R 8344	(B,72,99)	RS1/16SS0R0J	
	R 8065	(B,127,72)	RS1/16SS0R0J	R 8345	(B,71,99)	RS1/16SS0R0J	
				R 8346	(B,70,99)	RS1/16SS0R0J	
	R 8066	(B,131,68)	RS1/16SS0R0J				
	R 8070	(A,122,71)	RS1/16SS222J	R 8347	(B,69,99)	RS1/16SS0R0J	
	R 8071	(A,117,80)	RS1/16SS0R0J	R 8360	(B,135,14)	RS1/16SS0R0J	
B	R 8201	(B,79,23)	RS1/16SS0R0J	R 8401	(B,133,16)	RS1/16SS0R0J	
	R 8202	(B,144,15)	RS1/16SS0R0J	R 8402	(B,134,17)	RS1/16SS0R0J	
				R 8403	(B,134,15)	RS1/16SS0R0J	
	R 8203	(B,78,23)	RS1/16SS0R0J				
	R 8205	(B,77,23)	RS1/16SS0R0J	R 8404	(B,127,21)	RS1/16SS0R0J	
	R 8209	(B,93,126)	RS1/10SR0R0J	R 8408	(B,126,22)	RS1/16SS0R0J	
	R 8210	(B,81,123)	RS1/10SR0R0J	R 8414	(B,122,25)	RS1/16SS0R0J	
C	R 8216	(B,76,16)	RS1/16SS0R0J	R 8415	(B,122,23)	RS1/16SS0R0J	
				R 8416	(B,122,29)	RS1/16SS0R0J	
	R 8218	(B,75,20)	RS1/16SS0R0J				
	R 8220	(B,74,17)	RS1/16SS0R0J	R 8417	(B,120,20)	RS1/16SS0R0J	
	R 8222	(B,73,20)	RS1/16SS0R0J	R 8418	(B,120,24)	RS1/16SS0R0J	
	R 8223	(B,73,18)	RS1/16SS0R0J	R 8419	(B,119,26)	RS1/16SS0R0J	
	R 8227	(B,71,17)	RS1/16SS0R0J	R 8420	(B,119,21)	RS1/16SS0R0J	
D				R 8421	(B,119,23)	RS1/16SS0R0J	
	R 8228	(B,70,18)	RS1/16SS0R0J				
	R 8229	(B,69,17)	RS1/16SS0R0J	R 8422	(B,118,24)	RS1/16SS0R0J	
	R 8231	(B,69,18)	RS1/16SS0R0J	R 8423	(B,118,26)	RS1/16SS0R0J	
	R 8232	(B,68,17)	RS1/16SS0R0J	R 8446	(B,104,23)	RS1/16SS0R0J	
	R 8233	(B,67,18)	RS1/16SS0R0J	R 8447	(B,103,23)	RS1/16SS0R0J	
				R 8449	(B,102,25)	RS1/16SS0R0J	
E	R 8235	(B,67,17)	RS1/16SS0R0J				
	R 8236	(B,66,18)	RS1/16SS0R0J	R 8450	(B,101,25)	RS1/16SS0R0J	
	R 8237	(B,65,16)	RS1/16SS0R0J	R 8451	(B,101,23)	RS1/16SS0R0J	
	R 8241	(B,63,20)	RS1/16SS0R0J	R 8452	(B,100,23)	RS1/16SS0R0J	
	R 8242	(B,63,18)	RS1/16SS0R0J	R 8453	(B,98,25)	RS1/16SS0R0J	
				R 8454	(B,99,22)	RS1/16SS0R0J	
	R 8243	(B,62,20)	RS1/16SS0R0J				
F	R 8244	(B,61,18)	RS1/16SS0R0J	R 8456	(B,124,23)	RS1/8SQ0R0J	
	R 8245	(B,61,20)	RS1/16SS0R0J	R 8458	(B,106,22)	RS1/8SQ0R0J	
	R 8249	(B,57,22) (A)	RS1/16SS0R0J	R 8460	(B,98,21)	RS1/8SQ0R0J	
	R 8250	(B,57,21) (A)	RS1/16SS0R0J	R 8461	(B,92,30)	RS1/16SS0R0J	
				R 8501	(A,144,95)	RS1/16SS473J	
	R 8251	(B,56,22) (A)	RS1/16SS0R0J				
	R 8254	(B,55,20) (A)	RS1/16SS0R0J	R 8503	(A,143,95)	RS1/16SS472J	
G	R 8255	(B,54,20) (A)	RS1/16SS0R0J	R 8509	(A,20,88) (A,B,C)	RS1/16SS101J	
	R 8304	(B,160,16)	RS1/16SS471J	R 8510	(A,10,87) (A,B,C)	RS1/16SS103J	
	R 8305	(B,160,17)	RS1/16SS471J	R 8511	(A,21,90) (A,B,C)	RS1/16SS0R0J	
				R 8512	(B,148,91)	RS1/16SS0R0J	
	R 8306	(B,159,15)	RS1/16SS0R0J				
	R 8307	(B,169,18)	RS1/16SS0R0J	R 8514	(A,8,90) (A,B,C)	RS1/16SS0R0J	
	R 8308	(B,168,18)	RS1/16SS0R0J	R 8517	(A,15,89) (A,B,C)	RS1/16SS104J	
H	R 8309	(B,165,17)	RS1/16SS0R0J	R 8520	(A,47,106) (A)	RS1/16SS473J	
	R 8310	(B,164,17)	RS1/16SS0R0J	R 8525	(A,38,112) (A)	RS1/16SS104J	
				R 8526	(A,49,114) (A)	RS1/16SS471J	
	R 8311	(B,164,19)	RS1/16SS0R0J				
	R 8312	(B,163,19)	RS1/16SS0R0J	R 8528	(A,43,108) (A)	RS1/16SS473J	
	R 8313	(B,162,17)	RS1/16SS0R0J	R 8529	(A,48,114) (A)	RS1/16SS223J	
	R 8314	(B,161,17)	RS1/16SS0R0J	R 8530	(A,51,114) (A)	RS1/16SS223J	
I	R 8315	(B,159,19)	RS1/16SS102J	R 8533	(A,37,107) (A)	RS1/16SS331J	
				R 8534	(A,47,115) (A)	RS1/16SS181J	
	R 8316	(B,158,18)	RS1/16SS102J				
	R 8317	(B,158,15)	RS1/16SS102J	R 8535	(A,51,113) (A)	RS1/16SS181J	
	R 8322	(B,156,17)	RS1/16SS0R0J	R 8541	(A,39,113) (A)	RS1/10SR102J	
	R 8323	(B,155,15)	RS1/16SS0R0J	R 8542	(A,45,112) (A)	RS1/10SR102J	
	R 8333	(B,150,16)	RS1/16SS0R0J	R 8547	(A,57,120) (A)	RS1/10SR0R0J	
J							
	R 8334	(B,149,17)	RS1/16SS0R0J	R 8548	(B,53,119) (A)	VTL1133	
	R 8336	(B,148,16)	RS1/16SS0R0J	R 8549	(B,38,119) (A)	VTL1133	
	R 8337	(B,147,16)	RS1/16SS0R0J	R 8550	(B,51,119) (A)	VTL1133	
	R 8340	(B,146,16)	RS1/16SS0R0J	R 8551	(B,47,119) (A)	VTL1133	
	R 8341	(B,142,17)	RS1/16SS0R0J	R 8552	(B,45,119) (A)	VTL1133	
K	R 8342	(B,74,99)	RS1/16SS0R0J	R 8553	(B,42,119) (A)	VTL1133	

Circuit Symbol and No.		Part No.	Circuit Symbol and No.		Part No.
R 8565	(A,11,117)	VTL1134	C 7106	(B,61,74)	CCSSCH102J50
R 8566	(A,14,117)	RS1/16SS0R0J	C 7107	(B,65,65)	CKSSYB472K50
R 8581	(A,144,91)	RS1/16SS103J	C 7108	(B,61,69)	CCSSCH102J50
R 8582	(A,147,95)	RS1/16SS103J	C 7109	(B,62,57)	CKSSYB103K16
R 8585	(B,58,123) (A,B,C)	RS1/16SS102J	C 7110	(B,55,77)	CKSSYB222K50
R 8586	(B,62,123) (A,B,C)	RS1/16SS102J	C 7111	(B,58,65)	CKSSYB153K16
R 8603	(A,15,6)	RS1/16SS0R0J	C 7112	(B,51,72)	CKSRYB104K50
R 8604	(A,36,13)	RS1/16SS0R0J	C 7113	(B,49,77)	CKSRYB104K50
R 8608	(A,20,9)	RS1/16SS273J	C 7114	(B,51,63)	CKSRYB104K50
R 8613	(A,21,10)	RS1/16SS473J	C 7115	(B,50,70) 4.7 uF	CCG1201
R 8614	(A,26,6)	RS1/16SS621J	C 7116	(A,44,76) 10 uF	CCG1236
R 8616	(A,33,8)	RS1/16SS222J	C 7117	(A,45,66) 10 uF	CCG1236
R 8617	(A,33,6)	RS1/16SS0R0J	C 7121	(A,61,76) 47 uF	CCG1229
R 8618	(A,30,9)	RS1/16SS104J	C 7122	(A,61,70) 47 uF	CCG1229
R 8619	(A,20,11)	RS1/16SS104J	C 7124	(A,61,73) 47 uF	CCG1229
R 8620	(A,51,16)	RS1/16SS0R0J	C 7125	(A,61,66) 47 uF	CCG1229
R 8626	(A,35,9)	RS1/16SS0R0J	C 7201	(A,147,66)	CKSSYB104K10
R 8627	(A,36,21)	RS1/16SS0R0J	C 7202	(A,149,67)	CKSSYB104K10
R 8701	(A,131,96)	RS1/16SS0R0J	C 7204	(A,151,70)	CKSSYB104K10
R 8709	(A,140,96) (A)	RS1/16SS0R0J	C 7207	(B,93,87) 10 uF	CCG1236
R 8710	(A,140,94) (B)	RS1/16SS0R0J	C 7208	(B,93,90) 10 uF	CCG1236
R 8713	(A,140,88) (D,E,F,G)	RS1/16SS0R0J	C 7209	(B,99,110) 10 uF	CCG1236
R 8715	(A,140,84) (C)	RS1/16SS0R0J	C 7210	(B,99,108) 10 uF	CCG1236
R 8803	(A,91,79)	RS1/10SR0R0J	C 7211	(A,95,102)	CCSSCH471J50
CAPACITORS			C 7212	(A,90,81)	CCSSCH471J50
C 7006	(A,76,108)	CKSQYB334K50	C 7213	(B,107,99)	CEVW101M16
C 7013	(B,75,118)	CEVW220M16	C 7214	(B,99,79)	CEVW101M16
C 7014	(B,56,118) (A)	CKSRYB104K50	C 7215	(A,96,104)	CCSSCH270J50
C 7018	(A,13,36)	CKSRYB105K10	C 7216	(A,90,84)	CCSSCH270J50
C 7021	(A,126,48) 4.7 uF	CCG1212	C 7217	(B,110,103)	CKSSYB104K10
C 7023	(A,12,34) 4.7 uF	CCG1212	C 7218	(B,104,83)	CKSSYB104K10
C 7029	(A,122,52) 4.7 uF	CCG1212	C 7219	(A,94,105)	CKSSYB222K50
C 7032	(A,89,45)	CKSRYB105K10	C 7220	(A,89,84)	CCSSCH821J50
C 7033	(A,84,45)	CKSRYB105K10	C 7221	(A,100,112)	CKSRYB104K50
C 7036	(A,115,45)	CKSRYB105K10	C 7222	(A,94,92)	CKSRYB104K50
C 7039	(A,115,46)	CKSSYB473K16	C 7223	(A,95,106)	CKSRYB105K10
C 7042	(A,20,35)	CKSSYB104K10	C 7224	(A,89,86)	CKSRYB105K10
C 7043	(A,123,45)	CKSSYB104K10	C 7225	(B,108,105) 22 uF	CCG1254
C 7045	(B,32,70)	CCSSCH561J50	C 7226	(B,102,85) 22 uF	CCG1254
C 7046	(A,36,71) 10 uF/16 V	DCH1263	C 7229	(A,107,110)	CKSSYB104K16
C 7047	(A,36,73) 10 uF/16 V	DCH1263	C 7230	(A,108,107)	CKSSYB104K16
C 7048	(A,36,75) 10 uF/16 V	DCH1263	C 7231	(A,108,102)	CKSSYB102K50
C 7049	(A,36,76)	CKSSYB104K16	C 7232	(A,106,102)	CKSSYB472K50
C 7052	(B,33,85)	CKSSYB104K16	C 7233	(A,101,89)	CKSSYB104K16
C 7053	(A,26,79) 10 uF	CCG1236	C 7234	(A,102,86)	CKSSYB104K16
C 7055	(B,29,73)	CKSSYB103K16	C 7235	(A,102,81)	CKSSYB102K50
C 7056	(B,31,72)	CCSSCH8R0D50	C 7236	(A,100,81)	CKSSYB472K50
C 7057	(B,35,73)	CKSSYB103K16	C 7301	(B,84,45) 22 uF	DCH1256
C 7058	(B,30,71)	CKSSYB152K50	C 7303	(A,129,39)	CKSSYB104K10
C 7059	(B,31,73)	CKSRYB105K16	C 7305	(B,90,47) 22 uF	DCH1256
C 7060	(A,26,77) 10 uF	CCG1236	C 7306	(A,132,41)	CKSSYB104K10
C 7061	(A,26,75) 10 uF	CCG1236	C 7501	(B,132,27)	CKSSYB104K10
C 7074	(A,75,89)	CKSRYB105K10	C 7502	(B,91,14)	CKSSYB104K10
C 7086	(A,72,86) 10 uF	CCG1192	C 7503	(A,108,39) 10 uF	CCG1192
C 7101	(B,62,77)	CCSSCH150J50	C 7504	(A,159,50) 10 uF	CCG1192
C 7102	(B,64,76)	CCSSCH220J50	C 7505	(A,107,38)	CKSSYB104K10
C 7103	(B,65,78)	CKSSYB152K50	C 7506	(A,159,48)	CKSSYB104K10
C 7104	(B,62,66)	CCSSCH150J50	C 7601	(B,169,36) 10 uF	CCG1192
C 7105	(B,64,67)	CCSSCH220J50	C 7602	(B,151,23) 10 uF	CCG1192

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

A	C 7603	(B,145,60) 10 uF	CCG1192	C 7767	(B,41,32)	CCSSCH101J50
	C 7604	(B,168,34)	CKSSYB104K10	C 7768	(B,50,30)	CKSSYB104K10
	C 7605	(B,149,24)	CKSSYB104K10	C 7769	(A,11,114)	CKSSYB683K10
	C 7606	(B,144,59)	CKSSYB104K10	C 7770	(A,11,112)	CKSRYB474K16
	C 7607	(B,171,25)	CKSSYB104K10	C 7771	(A,8,106) 4.7 uF	CCG1331
■	C 7608	(B,142,21)	CKSSYB104K10	C 7772	(A,9,102)	CCSSCH180J50
	C 7609	(B,147,50)	CKSSYB104K10	C 7773	(A,10,101)	CCSSCH6R0D50
	C 7610	(B,171,23) 10 uF	CCG1192	C 7774	(A,14,105)	CKSSYB104K10
	C 7611	(B,143,19) 10 uF	CCG1192	C 7775	(A,23,30)	CKSRYB105K10
	C 7612	(B,149,51) 10 uF	CCG1192	C 7779	(A,29,32)	CKSSYB104K10
B	C 7613	(B,164,23)	CKSSYB102K50	C 7780	(A,15,109) 22 uF	DCH1256
	C 7614	(B,167,23)	CKSSYB102K50	C 7783	(B,44,41)	CKSSYB104K10
	C 7615	(B,147,19)	CKSSYB102K50	C 7785	(B,140,63)	CCSSCH101J50
	C 7616	(B,150,19)	CKSSYB102K50	C 7786	(B,25,25)	CKSSYB104K10
	C 7617	(B,154,53)	CKSSYB102K50	C 7789	(B,53,33) 2.2 uF	CCG1205
■	C 7618	(B,154,55)	CKSSYB102K50	C 7790	(B,19,26)	CCSSCH101J50
	C 7701	(B,52,40)	CCSSCH680J50	C 7791	(B,37,41) 10 uF	CCG1234
	C 7705	(B,30,27) 10 uF	CCG1192	C 7897	(B,76,68)	CKSRYB105K10
	C 7707	(A,46,52)	CCSSCH120J50	C 7898	(B,70,69)	CKSSYB104K10
	C 7708	(B,27,27) 10 uF	CCG1192	C 7899	(B,71,67)	CKSSYB104K10
C	C 7710	(B,27,25)	CKSSYB104K10	C 7909	(B,69,40)	CKSRYB105K10
	C 7711	(B,32,23)	CKSSYB104K10	C 7910	(B,67,40)	CKSRYB105K10
	C 7713	(A,43,48)	CCSSCH120J50	C 7911	(B,72,40)	CKSRYB105K10
	C 7714	(A,23,28)	CKSRYB105K10	C 7912	(B,70,40)	CKSRYB105K10
	C 7715	(B,14,25)	CKSRYB105K10	C 7913	(A,69,41)	CKSRYB105K10
■	C 7717	(A,38,46) 10 uF	CCG1192	C 7914	(A,71,41)	CKSRYB105K10
	C 7718	(A,41,46)	CKSSYB104K10	C 7915	(A,65,41)	CKSRYB105K10
	C 7723	(A,38,45) 10 uF	CCG1192	C 7916	(A,67,41)	CKSRYB105K10
	C 7724	(B,28,38) 10 uF	CCG1192	C 7917	(A,69,58) 10 uF	CCG1192
	C 7727	(B,29,35)	CKSSYB104K10	C 7918	(B,80,71)	CKSRYB105K16
D	C 7728	(B,31,39)	CKSRYB105K10	C 7919	(B,78,68)	CKSRYB105K16
	C 7730	(A,40,44)	CKSSYB104K10	C 7920	(B,79,61)	CKSRYB105K16
	C 7732	(B,42,36)	CCSSCH561J50	C 7921	(B,68,46)	CKSSYB104K10
	C 7733	(B,42,38)	CCSSCH680J50	C 7922	(B,72,46)	CKSSYB104K10
	C 7736	(B,153,69)	CKSQYB225K10	C 7923	(A,69,47)	CKSSYB104K10
■	C 7737	(B,154,67) 4.7 uF	CCG1201	C 7924	(A,65,47)	CKSSYB104K10
	C 7738	(B,152,66)	CKSSYB104K10	C 7925	(B,75,61)	CKSRYB105K16
	C 7739	(B,154,64) 10 uF	CCG1192	C 7926	(A,78,64)	CCSSCH102J50
	C 7740	(B,50,41)	CKSSYB104K10	C 7927	(A,77,64)	CKSSYB104K10
	C 7741	(B,151,62) 10 uF	CCG1192	C 7928	(B,77,59)	CKSRYB105K16
E	C 7742	(B,158,67)	CKSSYB104K10	C 7929	(A,76,63)	CKSSYB103K16
	C 7743	(B,151,60)	CKSSYB104K10	C 7930	(A,76,62)	CKSSYB474K6R3
	C 7744	(A,41,44)	CCSSCH151J50	C 7931	(A,76,61)	CKSSYB474K6R3
	C 7745	(A,27,41)	CKSRYB105K10	C 7932	(B,77,57)	CKSRYB105K16
	C 7747	(A,36,39) 10 uF	CCG1234	C 7933	(A,77,58)	CKSSYB104K10
■	C 7748	(A,59,39) 10 uF	CCG1192	C 7934	(A,78,58)	CCSSCH102J50
	C 7749	(A,57,39)	CKSSYB104K10	C 7935	(A,72,58)	CKSRYB105K16
	C 7751	(A,57,37)	CKSSYB104K10	C 7936	(A,76,66) 10 uF	CCG1192
	C 7754	(A,45,33)	CKSSYB104K10	C 7937	(A,78,61)	CKSSYB474K6R3
	C 7755	(A,40,32) 10 uF	CCG1192	C 7939	(A,82,70)	CKSSYB104K10
F	C 7756	(A,45,32) 10 uF	CCG1192	C 7940	(A,82,69)	CCSSCH102J50
	C 7757	(A,40,34) 10 uF	CCG1192	C 7941	(A,82,54)	CKSSYB104K10
	C 7758	(A,41,36)	CKSSYB104K10	C 7942	(A,83,54)	CKSSYB104K10
	C 7759	(A,53,30)	CCSSCH220J50	C 7944	(B,84,71)	CKSRYB105K16
	C 7761	(B,40,38)	CKSRYB105K10	C 7945	(A,83,72) 10 uF	CCG1192
■	C 7762	(A,36,42)	CKSRYB105K10	C 7946	(A,85,69)	CKSSYB104K10
	C 7763	(B,57,34) 2.2 uF	CCG1205	C 7947	(A,85,54)	CKSSYB104K10
	C 7765	(B,47,29) 0.47 uF	CCG1339	C 7948	(A,86,71)	CKSSYB104K10
	C 7766	(B,40,33)	CCSSCH101J50	C 7949	(A,88,49) 10 uF	CCG1192

Circuit Symbol and No.**Part No.**

C 7950	(A,87,69)	CKSSYB104K10
C 7951	(A,87,54)	CKSSYB104K10
C 7952	(A,89,54)	CKSSYB104K10
C 7953	(A,81,44) 10 uF	CCG1192
C 7954	(A,91,72)	CCSSCH5R0C50
C 7955	(A,90,72)	CCSSCH6R0D50
C 7956	(A,93,64)	CKSSYB104K10
C 7957	(A,93,63)	CKSSYB104K10
C 7958	(A,95,69)	CKSSYB103K16
C 7963	(A,99,64) 1 uF	DCH1246
C 7965	(A,99,63)	CKSSYB103K16
C 7967	(A,95,67)	CCSSCH470J50
C 7968	(A,104,67)	CCSSCH150J50
C 7970	(B,69,51)	CKSSYB104K10
C 7971	(B,72,51)	CKSSYB104K10
C 7972	(A,69,52)	CKSSYB104K10
C 7973	(A,65,53)	CKSSYB104K10
C 7974	(A,100,70) 1 uF	DCH1246
C 7975	(A,100,69)	CKSSYB103K16
C 7979	(B,65,55)	CKSSYB104K10
C 7980	(B,60,49) 10 uF	CCG1192
C 7988	(B,77,91)	CKSRYB105K10
C 7989	(B,79,91)	CKSRYB105K10
C 7990	(B,78,85)	CKSSYB104K10
C 7991	(A,76,74)	CKSSYB104K10
C 7994	(B,73,84)	CKSRYB105K10
C 7995	(B,75,84)	CKSRYB105K10
C 7996	(B,74,78)	CKSSYB104K10
C 7997	(B,75,78)	CKSSYB104K10
C 8000	(B,76,70)	CKSRYB105K10
C 8004	(B,114,72) 10 uF	CCG1192
C 8007	(B,121,102)	CCSSCH270J50
C 8008	(B,114,71)	CKSSYB104K10
C 8009	(B,121,98)	CCSSCH270J50
C 8012	(A,117,67)	CKSSYB104K10
C 8013	(A,119,67)	CKSSYB104K10
C 8014	(A,120,65)	CKSSYB104K10
C 8016	(B,110,71)	CCSSCH120J50
C 8017	(B,109,71)	CCSSCH150J50
C 8019	(A,115,65)	CKSSYB104K10
C 8023	(B,129,63)	CCSSCH470J50
C 8024	(A,116,63)	CKSSYB104K10
C 8025	(A,119,62)	CKSSYB104K10
C 8026	(A,120,63)	CKSSYB104K10
C 8028	(A,135,69) 10 uF	CCG1192
C 8029	(A,133,68)	CKSSYB104K10
C 8031	(A,128,72)	CKSSYB104K10
C 8032	(A,128,73) 10 uF	CCG1192
C 8033	(A,134,74)	CKSSYB102K50
C 8034	(A,134,72)	CKSSYB102K50
C 8205	(A,84,116) 10 uF	CCG1236
C 8208	(B,54,28) (A)	CKSSYB104K10
C 8501	(A,20,90) (A,B,C)	CKSSYB104K10
C 8503	(B,146,91)	CKSSYB104K10
C 8505	(A,10,90) (A,B,C)	CKSSYB104K10
C 8506	(A,46,108)	CKSSYB104K10
C 8507	(A,41,110)	CKSSYB104K10
C 8508	(A,39,107)	CKSSYB104K10
C 8512	(B,48,117) (A)	CCSRCH220J50

Circuit Symbol and No.**Part No.**

C 8517	(A,58,122) (A)	CKSRYB104K50
C 8520	(B,41,117) (A)	CCSRCH220J50
C 8521	(B,44,117) (A)	CCSRCH220J50
C 8522	(B,50,117) (A)	CCSRCH220J50
C 8523	(B,39,117) (A)	CCSRCH220J50
C 8524	(B,53,114) (A)	CCSRCH220J50
C 8525	(A,10,120)	CCSRCH470J50
C 8601	(A,19,9)	CCSSCH100D50
C 8602	(A,21,7)	CKSSYB104K16
C 8604	(A,31,7) 2.2 uF	CCG1218
C 8606	(A,32,10)	CKSSYB104K10
C 8607	(A,33,15)	CKSSYB104K10
C 8608	(A,17,9) 10 uF	CCG1192
C 8801	(B,111,122)	CKSRYB331K50
C 8813	(A,95,74)	CKSRYB102K50
C 8814	(A,99,71) 4.7 uF	CCG1201
C 8815	(A,117,53)	CCSSCH9R0D50
C 8816	(A,116,53)	CCSSCH9R0D50
C 8817	(A,115,53)	CCSSCH9R0D50
C 8818	(A,114,53)	CCSSCH9R0D50
C 8819	(A,112,53)	CCSSCH9R0D50
C 8820	(A,111,53)	CCSSCH9R0D50
C 8821	(A,110,53)	CCSSCH9R0D50
C 8822	(A,108,53)	CCSSCH9R0D50
C 8823	(A,82,76)	CCSRCH121J50
C 8824	(A,73,31)	CCSRCH121J50
C 8825	(A,61,31)	CCSRCH121J50

C**Unit Number:CWX4717****Unit Name:DVD Core Unit****MISCELLANEOUS**

IC 1002	(B,15,13) Regulator IC	MM1886A50P
IC 1003	(B,40,14) IC	S-1200B50-M5
IC 1004	(B,64,28) IC	NJM2855DL1-33
IC 1251	(A,12,41) IC	BA5839FP
IC 1401	(B,28,40) Flash ROM Unit	S99-50243D
IC 1402	(B,46,28) Flash ROM Unit	S99-50243D
IC 1480	(A,65,30) RAM IC	M12L64164A-5TG2Y
IC 1501	(A,39,33) IC	MN2DS0018MA
IC 1801	(B,46,10) D/A Converter	PCM1753DBQ
IC 1953	(B,57,17) IC	S-1135D12-A6
Q 1101	(B,13,59) Bipolar Transistor	LSCR523UB
Q 1102	(B,14,56) Bipolar Transistor	LSCR523UB
Q 1103	(B,10,62) Transistor	2SB1132
Q 1104	(B,22,54) Transistor	2SB1132
L 1501	(A,54,30) Inductor	CTF1743
L 1511	(A,48,17) Chip Beads	VTL1126
L 1902	(A,18,17) Inductor	CTF1487
L 1903	(B,64,16) Inductor	CTF1558
L 1904	(A,68,18) Resistor	RS1/16SS0R0J
X 1501	(B,48,18) Crystal Resonator	CSS1823
F 1001	(A,14,19) Chip EMI Filter	DTF1106
F 1002	(B,64,18) Chip EMI Filter	DTL1106
S 1	(A,47,55) Lever Switch	CSN1090
S 3	(B,26,13) Lever Switch	CSN1089
VR1101	(A,7,63) Semi-fixed 6.8 kohm(B)	CCP1447

Circuit Symbol and No.**Part No.**

VR1102 (A,7,59) Semi-fixed 15 kohm(B) CCP1449
 CN1101 (A,21,63) Connector CKS6631
 CN1952 (A,42,11) Connector CKS6025

RESISTORS

R 1004 (B,12,20) RS1/16SS4702F
 R 1007 (B,12,21) RS1/16SS6801F
 R 1019 (B,34,7) RS1/16SS101J
 R 1025 (B,36,6) RS1/16SS101J
 R 1027 (A,40,18) RS1/16SS101J

R 1101 (B,15,57) RS1/16SS104J
 R 1102 (B,11,56) RS1/16SS104J
 R 1103 (B,14,61) RS1/16SS4300F
 R 1104 (B,11,58) RS1/16SS5100F
 R 1105 (B,17,54) RS1/16SS4300F

R 1106 (B,10,57) RS1/16SS5600F
 R 1109 (B,6,57) RS1/16SS3R3J
 R 1110 (B,16,54) RS1/16SS3R3J
 R 1111 (B,6,63) RS1/10SR3R3J
 R 1112 (B,5,58) RS1/10SR3R3J

R 1113 (B,15,59) RS1/10SR3R9J
 R 1114 (B,19,57) RS1/10SR3R3J
 R 1115 (B,6,61) RS1/10SR2R7J
 R 1116 (B,6,62) RS1/10SR2R7J
 R 1117 (B,18,59) RS1/10SR3R9J

R 1118 (B,16,59) RS1/10SR3R9J
 R 1223 (A,42,50) RS1/16SS561J
 R 1225 (B,29,7) RS1/16SS471J
 R 1251 (A,6,48) RS1/16SS333J
 R 1252 (A,6,47) RS1/16SS473J

R 1253 (A,6,46) RS1/16SS333J
 R 1254 (A,6,45) RS1/16SS473J
 R 1255 (A,22,48) RS1/16SS183J
 R 1256 (A,21,45) RS1/16SS153J
 R 1257 (B,8,37) RS1/16SS221J

R 1258 (A,19,39) RS1/16SS221J
 R 1401 (B,34,28) RS1/16SS221J
 R 1402 (B,35,47) RS1/16SS104J
 R 1405 (B,55,35) RS1/16SS104J
 R 1406 (B,39,45) RS1/16SS472J

R 1480 (A,73,24) RAB4CQ560J
 R 1481 (A,73,28) RAB4CQ560J
 R 1482 (A,73,32) RAB4CQ560J
 R 1483 (A,73,35) RAB4CQ560J
 R 1484 (A,73,39) RAB4CQ560J

R 1485 (A,55,22) RAB4CQ560J
 R 1486 (A,56,27) RAB4CQ560J
 R 1487 (A,56,37) RAB4CQ560J
 R 1488 (A,56,40) RAB4CQ560J
 R 1489 (A,54,29) RS1/16SS560J

R 1490 (A,73,21) RS1/16SS560J
 R 1501 (B,49,20) RS1/16SS122J
 R 1503 (B,47,20) RS1/16SS105J
 R 1504 (A,50,17) RS1/16SS121J
 R 1505 (A,46,18) RS1/16SS101J

R 1506 (B,46,15) RS1/16SS101J
 R 1507 (B,44,17) RS1/16SS101J
 R 1508 (B,43,17) RS1/16SS221J
 R 1509 (A,21,34) RS1/16SS102J
 R 1510 (A,11,29) RS1/16SS102J

Circuit Symbol and No.**Part No.**

R 1512 (A,55,31) RS1/16SS470J
 R 1513 (A,23,38) RS1/16SS203J
 R 1514 (A,25,40) RS1/16SS183J
 R 1516 (A,25,36) RS1/16SS104J
 R 1517 (B,58,22) RS1/16SS103J

R 1518 (B,34,31) RS1/16SS103J
 R 1519 (A,25,43) RS1/16SS102J
 R 1522 (A,21,37) RS1/16SS104J
 R 1523 (A,23,37) RS1/16SS221J
 R 1524 (B,29,33) RS1/16SS472J

R 1525 (A,25,44) RS1/16SS103J
 R 1526 (A,23,40) RS1/16SS103J
 R 1527 (A,35,48) RS1/16SS682J
 R 1528 (B,20,33) RS1/16SS103J
 R 1529 (B,35,21) RS1/16SS103J

R 1530 (B,18,33) RS1/16SS103J
 R 1531 (B,34,30) RS1/16SS103J
 R 1533 (A,29,48) RS1/16SS104J
 R 1534 (B,29,48) RS1/16SS221J
 R 1535 (A,22,44) RS1/16SS104J

R 1536 (B,32,48) RS1/16SS104J
 R 1537 (A,25,46) RS1/16SS104J
 R 1538 (A,56,35) RS1/16SS104J
 R 1539 (B,34,48) RS1/16SS104J
 R 1540 (A,26,46) RS1/16SS221J

R 1541 (A,26,45) RS1/16SS221J
 R 1542 (B,27,34) RS1/16SS103J
 R 1546 (A,33,48) RS1/16SS682J
 R 1601 (A,32,17) RS1/16SS123J
 R 1602 (A,32,18) RS1/16SS123J

R 1603 (B,31,20) RS1/16SS1002D
 R 1604 (A,24,21) RS1/16SS105J
 R 1605 (A,22,23) RS1/16SS105J
 R 1670 (B,40,19) RS1/16SS1002D
 R 1671 (B,43,19) RS1/16SS2402D

R 1672 (A,39,18) RS1/16SS2000D
 R 1674 (A,38,17) RS1/16SS3002D
 R 1801 (B,51,8) RS1/16SS104J
 R 1802 (B,53,8) RS1/16SS104J
 R 1803 (B,51,14) RS1/16SS821J

R 1804 (B,53,14) RS1/16SS821J
 R 1982 (A,10,62) RS1/16SS822J
 R 1983 (B,41,19) RS1/16SS1000D
 R 1987 (B,43,20) RS1/16SS0R0J
 R 1990 (B,35,19) RS1/16SS2000D

R 1991 (B,31,16) RS1/16SS101J
 R 1996 (B,36,13) RS1/16SS2000D
 R 1997 (B,36,10) RS1/16SS101J
 R 2002 (B,43,10) RS1/16SS2000D
 R 2003 (B,43,8) RS1/16SS101J

CAPACITORS

C 1001 (B,43,13) CKSRYB105K10
 C 1002 (B,13,17) CKSSYB104K16
 C 1003 (B,16,18) CKSSYB104K16
 C 1004 (B,15,17) 4.7 uF CCG1201
 C 1005 (B,41,11) CKSRYB105K16

C 1010 (B,60,23) CKSQYB225K10
 C 1011 (B,64,22) CKSRYB105K10

<u>Circuit Symbol and No.</u>		<u>Part No.</u>	<u>Circuit Symbol and No.</u>		<u>Part No.</u>
C 1015	(A,26,7)	CKSSYB102K50	C 1526	(A,25,37)	CKSSYB103K16
C 1016	(B,64,15)	CKSSYB102K50	C 1528	(B,30,48)	CCSSCH471J50
C 1018	(B,14,21)	CKSSYB104K10	C 1601	(A,32,19)	CKSSYB103K16
			C 1602	(A,34,17)	CCSSCH101J50
C 1040	(B,59,12)	CCSRCH821J50			
C 1041	(B,19,12)	CCSRCH271J50	C 1603	(A,34,18)	CCSSCH101J50
C 1101	(B,15,53) 10 uF	CCG1192	C 1604	(A,30,17)	CCSSCH680J50
C 1104	(B,8,57)	CKSSYB104K10	C 1605	(A,30,18)	CCSSCH680J50
C 1105	(B,18,54)	CKSSYB104K10	C 1606	(A,35,19)	CKSSYB104K10
			C 1607	(A,20,24) 10 uF	CCG1192
C 1106	(B,8,66)	CKSSYB103K16			
C 1107	(B,26,53)	CKSSYB103K16	C 1608	(A,28,18) 4.7 uF	CCG1201
C 1108	(A,20,56)	CKSSYB103K16	C 1609	(A,26,22)	CKSSYB104K10
C 1109	(A,7,57)	CKSRYB224K16	C 1612	(A,24,24)	CKSSYB104K10
C 1110	(A,18,58)	CKSSYB103K16	C 1613	(A,25,25)	CKSSYB104K10
			C 1614	(A,23,24)	CKSSYB104K10
C 1111	(A,9,66)	CKSRYB224K16			
C 1112	(B,17,52) 22 uF	DCH1256	C 1615	(A,23,26)	CKSSYB104K10
C 1113	(B,9,58) 22 uF	DCH1256	C 1616	(A,25,27)	CKSSYB104K10
C 1210	(B,77,33)	CKSSYB104K16	C 1617	(B,27,28)	CKSSYB104K10
C 1251	(B,13,41)	CEVW101M16	C 1618	(A,23,29)	CCSSCH101J50
			C 1619	(A,23,30)	CKSSYB562K25
C 1252	(B,8,41) 4.7 uF	CCG1222			
C 1253	(B,8,39)	CKSSYB104K16	C 1620	(B,27,30)	CKSSYB224K6R3
C 1254	(A,6,37)	CKSSYB104K16	C 1621	(A,23,31)	CKSSYB224K6R3
C 1255	(A,19,37)	CKSSYB104K16	C 1622	(A,25,31)	CKSSYB333K16
C 1401	(B,34,27)	CKSSYB104K16	C 1623	(A,27,20)	CKSRYB105K10
			C 1624	(A,25,32)	CKSSYB104K10
C 1403	(B,39,40)	CKSSYB104K10			
C 1408	(B,58,27)	CKSSYB104K10	C 1625	(A,25,29)	CKSSYB104K10
C 1410	(B,34,29)	CKSSYB104K16	C 1671	(A,42,19)	CKSSYB104K10
C 1480	(A,71,19)	CKSSYB104K10	C 1673	(A,37,17)	CKSSYB104K10
C 1481	(A,73,22)	CKSSYB104K10	C 1674	(B,42,20)	CKSSYB104K10
			C 1676	(B,38,20)	CKSRYB105K10
C 1482	(A,72,26)	CKSSYB104K10			
C 1484	(A,73,30)	CKSSYB104K10	C 1801	(B,51,10) 4.7 uF	CCG1201
C 1485	(A,73,41)	CKSSYB104K10	C 1802	(B,53,10) 4.7 uF	CCG1201
C 1487	(A,58,29)	CKSSYB104K10	C 1803	(B,50,12)	CCSRCH182J50
C 1488	(A,57,25)	CKSSYB104K10	C 1804	(B,53,12)	CCSRCH182J50
			C 1805	(B,47,14)	CKSSYB104K10
C 1489	(A,65,17) 10 uF	CCG1192			
C 1490	(A,66,18)	CKSSYB102K50	C 1806	(B,56,8) 10 uF	CCG1192
C 1501	(B,62,20) 10 uF	CCG1192	C 1809	(B,40,17)	CKSSYB102K50
C 1502	(B,55,19) 10 uF	CCG1192	C 1953	(B,60,17)	CKSRYB105K10
C 1503	(A,54,33)	CKSSYB104K10	C 1954	(B,55,17)	CKSRYB105K10
			C 1955	(B,77,40)	CKSSYB104K16
C 1504	(A,54,24)	CKSSYB104K10			
C 1505	(A,54,27)	CKSSYB104K10	C 1962	(B,40,20)	CKSRYB105K10
C 1506	(B,53,34)	CKSSYB104K10			
C 1507	(A,54,36)	CKSSYB104K10			
C 1508	(A,54,38)	CKSSYB104K10			
C 1509	(A,54,42)	CKSSYB104K10			
C 1510	(B,51,18)	CCSSCH120J50			
C 1511	(A,49,18)	CKSSYB104K10			
C 1512	(B,46,18)	CCSSCH120J50			
C 1513	(A,48,47)	CKSSYB104K10			
C 1514	(B,45,20)	CKSSYB104K10			
C 1515	(A,44,19)	CKSSYB104K10			
C 1516	(A,44,47)	CKSSYB104K10			
C 1517	(A,42,47)	CKSSYB104K10			
C 1518	(A,38,47)	CKSSYB104K10			
C 1519	(A,34,47)	CKSSYB104K10			
C 1520	(A,27,47)	CKSSYB104K10			
C 1521	(A,25,33)	CKSSYB104K10			
C 1522	(A,25,38)	CKSSYB104K10			
C 1523	(A,20,45)	CKSSYB104K10			
C 1524	(A,21,48)	CKSSYB473K16			



Unit Number:CWN9393

Unit Name:SOC Single Core Unit

MISCELLANEOUS

IC 4001	(A,44,43) U-PRO IC	MCIMX6S6AVM08AB
IC 4301	(A,55,72) RAM IC	H5TQ4G63AFR-PBC
IC 4302	(A,37,72) RAM IC	H5TQ4G63AFR-PBC
IC 4401	(A,11,60) Flash ROM IC(SOC)	CWJ1903
IC 4402	(B,23,64) FPGA/PLD IC	PE1029B
IC 4403	(B,25,55) IC	TC7WU04FU
IC 4501	(B,12,39) IC	AK8814VQ
IC 4701	(B,71,62) IC	LTC3612EUDC
IC 4721	(B,69,34) IC	LTC3612EUDC
IC 4741	(B,69,50) IC	LTC3612EUDC
IC 4766	(A,31,17) Regulator IC	MM3479A30P
IC 4791	(A,48,23) IC	TC7SH08FUS1

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

IC 4792 (A,48,18) Reset IC
 IC 4793 (A,46,15) IC
 IC 4794 (A,43,19) IC

PST8429N
 TC7SH08FUS1
 TC7SH08FUS1

R 4084 (A,6,29)
 R 4091 (A,48,27)
 R 4095 (A,44,24)

RS1/16SS102J
 RS1/16SS225J
 RS1/16SS0R0J

IC 4796 (A,25,58) Regulator IC
 IC 4901 (A,70,26) IC
 IC 4903 (A,30,24) IC
 Q 4776 (A,64,23) Chip Transistor
 Q 4777 (A,64,29) Resistor Built-IN TR

MM3479A12P
 337S3959
 TC7WBL125AFK
 2SB1689
 LTC044EEB

R 4100 (B,21,42)
 R 4101 (B,54,41)
 R 4103 (B,14,68)
 R 4105 (A,27,55)
 R 4111 (B,16,64)

RS1/16SS470J
 RS1/16SS0R0J
 RS1/16SS220J
 RS1/16SS103J
 RS1/16SS472J

Q 4778 (A,28,23) Resistor Built-IN TR
 L 4501 (B,7,49) Inductor
 L 4502 (B,9,30) Inductor
 L 4701 (A,72,59) SMD SPL Inductor
 L 4721 (A,65,33) SMD SPL Inductor

LTC044EEB
 ATL7039
 ATL7039
 CTH1500
 CTH1499

R 4141 (B,58,82)
 R 4151 (A,30,27)
 R 4154 (B,67,27)
 R 4155 (B,68,27)
 R 4157 (A,31,27)

RS1/16SS103J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J

L 4741 (A,70,47) SMD SPL Inductor
 L 4901 (B,58,42) Ferrite Bead
 L 4909 (A,57,38) Inductor
 L 5001 (A,73,22) Chip Ferrite Bead
 L 5002 (A,69,19) Chip Ferrite Beads

CTH1499
 CTF1528
 CTF1787
 BTX1046
 VTL1183

R 4158 (B,31,37)
 R 4159 (B,31,40)
 R 4160 (B,32,43)
 R 4162 (B,32,46)
 R 4163 (A,31,40)

RAB4CQ471J
 RAB4CQ471J
 RAB4CQ471J
 RAB4CQ471J
 RS1/16SS470J

TH4381 (A,26,72) Thermistor
 X 4001 (A,50,28) Resonator 24 MHz
 X 4002 (A,46,28) Resonator 32.768 kHz
 X 4401 (B,31,55) Crystal Resonator 14.745 6 MHz
 X 4901 (B,61,43) VCXO 11.289 6MHz

CCX1084
 CSS1773
 CSS1807
 CSS1835
 CWX4566

R 4164 (B,21,43)
 R 4165 (A,30,40)
 R 4186 (A,27,38)
 R 4209 (A,25,55)
 R 4213 (A,26,49)

RS1/16SS470J
 RS1/16SS470J
 RS1/16SS101J
 RS1/16SS103J
 RS1/16SS103J

CN5001 (B,58,20) B TO B Connector
 CN5002 (B,21,20) B TO B Connector

CKS6499
 CKS6556

R 4216 (A,24,46)
 R 4220 (A,22,41)
 R 4222 (A,24,41)
 R 4224 (A,23,38)
 R 4226 (A,25,41)

RS1/16SS103J
 RS1/16SS103J
 RS1/16SS103J
 RS1/16SS103J
 RS1/16SS103J

RESISTORS

R 4001 (A,28,54)
 R 4002 (A,28,51)
 R 4003 (A,28,48)
 R 4004 (A,28,45)
 R 4005 (A,28,43)

RAB4CQ470J
 RAB4CQ470J
 RAB4CQ470J
 RAB4CQ470J
 RAB4CQ470J

R 4228 (A,23,41)
 R 4230 (A,22,38)
 R 4232 (A,21,38)
 R 4236 (B,25,39)
 R 4237 (B,23,44)

RS1/16SS103J
 RS1/16SS222J
 RS1/16SS222J
 RS1/16SS103J
 RS1/16SS103J

R 4006 (A,28,41)
 R 4007 (A,51,31)
 R 4008 (A,6,23)
 R 4009 (A,35,59)
 R 4011 (A,26,46)

RS1/16SS470J
 RS1/16SS470J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS103J

R 4238 (A,57,40)
 R 4242 (A,6,25)
 R 4244 (A,21,41)
 R 4260 (B,52,13)
 R 4261 (B,54,13)

RS1/16SS0R0J
 RS1/16SS101J
 RS1/16SS103J
 RS1/16SS103J
 RS1/16SS103J

R 4012 (A,27,52)
 R 4015 (A,46,31)
 R 4017 (A,26,55)
 R 4018 (B,51,41)
 R 4022 (B,19,43)

RS1/16SS103J
 RS1/16SS102J
 RS1/16SS103J
 RS1/16SS0R0J
 RS1/16SS330J

R 4262 (B,64,8)
 R 4263 (B,25,30)
 R 4264 (B,13,27)
 R 4265 (A,15,19)
 R 4266 (A,16,19)

RS1/16SS103J
 RS1/16SS103J
 RS1/16SS103J
 RS1/16SS103J
 RS1/16SS103J

R 4029 (B,65,10)
 R 4054 (A,26,52)
 R 4055 (A,26,41)
 R 4056 (A,27,41)
 R 4057 (A,24,43)

RS1/16SS472J
 RS1/16SS103J
 RS1/16SS103J
 RS1/16SS103J
 RS1/16SS103J

R 4268 (B,24,30)
 R 4270 (B,51,32)
 R 4271 (B,51,30)
 R 4272 (A,28,40)
 R 4273 (A,40,55)

RS1/16SS103J
 RS1/16SS103J
 RS1/16SS103J
 RS1/16SS470J
 RS1/16SS2400F

R 4058 (A,25,43)
 R 4059 (A,26,43)
 R 4060 (A,27,43)
 R 4063 (A,24,49)
 R 4064 (A,25,49)

RS1/16SS103J
 RS1/16SS103J
 RS1/16SS103J
 RS1/16SS103J
 RS1/16SS103J

R 4274 (B,57,55)
 R 4275 (B,55,55)
 R 4276 (B,35,10)
 R 4277 (B,56,47)
 R 4278 (B,64,29)

RS1/16SS1001D
 RS1/16SS1001D
 RS1/16SS103J
 RS1/16SS103J
 RS1/16SS103J

R 4066 (A,27,49)
 R 4067 (A,24,52)
 R 4068 (A,25,52)
 R 4070 (A,24,55)
 R 4073 (A,25,46)

RS1/16SS103J
 RS1/16SS103J
 RS1/16SS103J
 RS1/16SS103J
 RS1/16SS103J

R 4279 (B,25,11)
 R 4280 (B,31,30)
 R 4281 (B,34,11)
 R 4282 (B,27,9)
 R 4283 (B,30,30)

RS1/16SS103J
 RS1/16SS103J
 RS1/16SS103J
 RS1/16SS103J
 RS1/16SS103J

R 4074 (A,27,46)
 R 4081 (A,6,34)

RS1/16SS103J
 RS1/10SR0R0J

R 4284 (B,47,11)

RS1/16SS103J

<u>Circuit Symbol and No.</u>		<u>Part No.</u>	<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
R 4285	(B,62,13)	RS1/16SS103J	R 4466	(B,28,46)	RS1/16SS0R0J	A
R 4286	(A,44,55)	RS1/16SS0R0J	R 4467	(B,28,45)	RS1/16SS0R0J	
R 4287	(A,43,55)	RS1/16SS0R0J	R 4468	(B,28,45)	RS1/16SS0R0J	
R 4288	(B,66,27)	RS1/16SS103J	R 4469	(B,28,44)	RS1/16SS0R0J	
			R 4470	(B,28,43)	RS1/16SS0R0J	
R 4289	(B,43,6)	RS1/16SS103J				
R 4290	(B,52,43)	RS1/16SS0R0J	R 4473	(B,25,70)	RS1/16SS0R0J	
R 4291	(A,42,55)	RS1/16SS0R0J	R 4474	(B,24,70)	RS1/16SS0R0J	
R 4292	(A,41,55)	RS1/16SS0R0J	R 4475	(B,29,62)	RS1/16SS0R0J	
R 4293	(B,46,10)	RS1/16SS104J	R 4476	(B,29,61)	RS1/16SS0R0J	
			R 4477	(B,22,70)	RS1/16SS0R0J	
R 4295	(B,27,13)	RS1/16SS103J				
R 4296	(B,66,8)	RS1/16SS222J	R 4479	(B,19,70)	RS1/16SS0R0J	
R 4297	(B,65,8)	RS1/16SS103J	R 4480	(B,22,71)	RS1/16SS0R0J	
R 4300	(B,26,13)	RS1/16SS103J	R 4481	(B,18,62)	RS1/16SS0R0J	
R 4302	(B,47,10)	RS1/16SS104J	R 4502	(B,18,42)	RS1/16SS103J	B
			R 4503	(B,23,33)	RS1/16SS101J	
R 4303	(A,22,52)	RS1/16SS101J				
R 4307	(B,55,72)	RS1/16SS1200D	R 4504	(B,22,33)	RS1/16SS101J	
R 4308	(B,37,72)	RS1/16SS1200D	R 4505	(B,19,41)	RS1/16SS103J	
R 4309	(B,52,73)	RS1/16SS2400F	R 4507	(B,18,39)	RS1/16SS221J	
R 4310	(B,33,73)	RS1/16SS2400F	R 4508	(B,18,36)	RS1/16SS221J	
			R 4510	(B,12,31)	RS1/16SS6801D	
R 4314	(B,58,81)	RS1/16SS102J				
R 4315	(B,40,81)	RS1/16SS102J	R 4511	(B,21,39)	RS1/16SS101J	
R 4317	(B,21,4)	RS1/16SS0R0J	R 4512	(B,6,42)	RS1/16SS103J	
R 4381	(A,26,73)	RS1/16SS1802D	R 4513	(B,17,34)	RS1/10SR0R0J	
R 4401	(A,8,47)	RS1/16SS102J	R 4514	(B,17,29)	RS1/10SR0R0J	
			R 4515	(B,17,32)	RS1/10SR0R0J	C
R 4402	(A,13,71)	RS1/16SS0R0J				
R 4403	(A,12,48)	RS1/16SS0R0J	R 4525	(B,6,67)	RS1/16SS0R0J	
R 4404	(B,29,56)	RS1/16SS102J	R 4529	(B,6,46)	RS1/16SS0R0J	
R 4405	(B,29,54)	RS1/16SS105J	R 4540	(B,7,68)	RS1/16SS220J	
R 4407	(B,16,63)	RS1/16SS471J	R 4543	(A,15,33)	RS1/16SS101J	
			R 4544	(A,14,33)	RS1/16SS101J	
R 4411	(B,22,57)	RS1/16SS220J				
R 4412	(B,26,58)	RS1/16SS102J	R 4545	(A,13,33)	RS1/16SS101J	
R 4413	(A,16,72)	RS1/16SS0R0J	R 4546	(A,12,33)	RS1/16SS101J	
R 4415	(A,27,62)	RS1/16SS0R0J	R 4547	(A,9,37)	RS1/16SS101J	
R 4416	(A,19,57)	RS1/16SS0R0J	R 4548	(A,9,36)	RS1/16SS101J	
			R 4549	(A,9,35)	RS1/16SS101J	
R 4417	(A,17,73)	RS1/16SS472J				
R 4418	(A,17,74)	RS1/16SS472J	R 4550	(A,9,34)	RS1/16SS101J	D
R 4420	(A,21,67)	RS1/16SS101J	R 4702	(A,75,64)	RS1/8SQ0R0J	
R 4421	(A,22,62)	RS1/16SS101J	R 4704	(A,66,60)	RS1/8SQ0R0J	
R 4445	(B,20,46)	RAB4CQ101J	R 4705	(B,70,59)	RS1/16SS220J	
			R 4706	(B,66,59)	RS1/16SS105J	
R 4446	(B,20,49)	RAB4CQ101J				
R 4447	(B,14,69)	RS1/16SS103J	R 4707	(B,65,59)	RS1/16SS105J	
R 4448	(A,26,69)	RS1/16SS0R0J	R 4708	(B,65,61)	RS1/16SS2201D	
R 4449	(B,7,68)	RS1/16SS0R0J	R 4709	(B,68,65)	RS1/16SS0R0J	
R 4450	(B,6,66)	RS1/16SS330J	R 4710	(B,65,62)	RS1/16SS1003D	
			R 4711	(B,67,63)	RS1/16SS183J	
R 4451	(B,16,64)	RS1/16SS0R0J				
R 4452	(B,14,64)	RS1/16SS561J	R 4713	(B,68,66)	RS1/16SS1002D	E
R 4453	(B,7,63)	RS1/16SS561J	R 4714	(B,67,66)	RS1/16SS1503D	
R 4454	(B,6,64)	RS1/16SS561J	R 4715	(B,66,62)	RS1/16SS1503D	
R 4455	(B,14,57)	RS1/16SS220J	R 4716	(A,66,62)	RS1/16SS0R0J	
			R 4717	(B,68,59)	RS1/16SS0R0J	
R 4456	(B,6,55)	RS1/16SS220J				
R 4457	(B,12,51)	RS1/16SS220J	R 4721	(A,67,39)	RS1/8SQ0R0J	
R 4458	(B,13,51)	RS1/16SS220J	R 4722	(A,71,30)	RS1/8SQ0R0J	
R 4459	(B,16,55)	RS1/16SS220J	R 4723	(A,65,39)	RS1/8SQ0R0J	
R 4460	(B,16,53)	RS1/16SS220J	R 4724	(B,66,35)	RS1/16SS220J	
			R 4725	(B,66,39)	RS1/16SS105J	
R 4461	(B,16,52)	RS1/16SS220J				
R 4462	(B,14,52)	RS1/16SS220J	R 4726	(B,66,40)	RS1/16SS105J	
R 4463	(B,28,49)	RS1/16SS0R0J	R 4727	(B,67,40)	RS1/16SS2702D	F
R 4464	(B,28,48)	RS1/16SS0R0J	R 4728	(B,72,37)	RS1/16SS105J	
R 4465	(B,28,47)	RS1/16SS0R0J	R 4729	(B,71,41)	RS1/16SS1503D	
			R 4730	(B,73,37)	RS1/16SS1002D	

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

A	R 4731	(B,74,39)	RS1/16SS1503D	R 4907	(A,66,24)	RS1/16SS0R0J
	R 4732	(B,68,39)	RS1/16SS1203D	R 4911	(A,57,36)	RS1/16SS151J
	R 4733	(A,69,39)	RS1/16SS0R0J	R 4912	(B,63,41)	RS1/16SS0R0J
	R 4734	(B,70,39)	RS1/16SS223J	R 4913	(B,61,41)	RS1/16SS0R0J
	R 4735	(A,72,40)	RS1/10SR102J	R 4914	(A,37,30)	RS1/16SS750J
	R 4736	(B,66,37)	RS1/16SS0R0J	R 4915	(A,41,24)	RS1/16SS0R0J
	R 4737	(B,69,40)	RS1/16SS4703D	R 4916	(B,36,5)	RS1/16SS0R0J
	R 4738	(B,64,27)	RS1/16SS103J	R 4918	(A,33,24)	RS1/16SS0R0J
	R 4739	(B,71,44)	RS1/16SS0R0J	R 4934	(B,33,48)	RS1/16SS0R0J
	R 4741	(A,65,48)	RS1/8SQ0R0J	R 4937	(A,25,11)	RS1/16SS103J
B	R 4742	(A,73,51)	RS1/8SQ0R0J	R 4938	(A,24,11)	RS1/16SS103J
	R 4743	(A,65,46)	RS1/8SQ0R0J	R 4939	(A,23,11)	RS1/16SS103J
	R 4744	(B,69,46)	RS1/16SS220J	R 4941	(B,55,40)	RS1/16SS431J
	R 4745	(B,65,47)	RS1/16SS105J	R 4942	(B,54,43)	RS1/16SS102J
	R 4746	(B,63,47)	RS1/16SS105J	R 4945	(B,26,37)	RS1/16SS103J
	R 4747	(B,63,48)	RS1/16SS2702D	R 4946	(A,28,11)	RS1/16SS102J
	R 4749	(B,63,52)	RS1/16SS1503D	R 5003	(B,64,27)	RS1/16SS0R0J
	R 4750	(B,67,54)	RS1/16SS1002D	R 5004	(B,65,27)	RS1/16SS0R0J
	R 4751	(B,65,54)	RS1/16SS1503D	R 5006	(B,23,13)	RS1/16SS0R0J
	R 4752	(B,65,49)	RS1/16SS1203D	R 5007	(B,15,13)	RS1/16SS471J
C	R 4753	(A,64,50)	RS1/16SS0R0J	R 5008	(B,28,13)	RS1/16SS151J
	R 4754	(B,65,51)	RS1/16SS223J	R 5009	(B,13,13)	RS1/16SS471J
	R 4755	(A,64,53)	RS1/10SR102J	R 5012	(B,43,12)	RS1/16SS0R0J
	R 4756	(B,67,47)	RS1/16SS0R0J	R 5013	(B,44,12)	RS1/16SS0R0J
	R 4757	(B,63,50)	RS1/16SS4703D	R 5014	(B,45,12)	RS1/16SS0R0J
	R 4758	(B,73,39)	RS1/16SS0R0J	R 5015	(B,46,12)	RS1/16SS0R0J
	R 4759	(B,61,52)	RS1/16SS0R0J	R 5016	(B,47,12)	RS1/16SS0R0J
	R 4767	(A,38,16)	RS1/10SR0R0J	R 5017	(A,42,30)	RS1/16SS0R0J
	R 4768	(B,37,10)	RS1/10SR0R0J	R 5020	(B,24,13)	RS1/16SS560J
	R 4769	(A,26,16)	RS1/16SS0R0J	R 5021	(B,24,27)	RS1/16SS0R0J
D	R 4772	(A,41,12)	RS1/16SS103J	R 5022	(B,25,27)	RS1/16SS0R0J
	R 4773	(A,33,6)	RS1/10SR0R0J	R 5023	(B,26,27)	RS1/16SS101J
	R 4775	(A,41,13)	RS1/16SS0R0J	R 5024	(B,26,30)	RS1/16SS121J
	R 4776	(A,64,27)	RS1/10SR332J	R 5025	(B,27,28)	RS1/16SS121J
	R 4777	(A,64,26)	RS1/10SR332J	R 5026	(B,64,12)	RS1/16SS121J
	R 4778	(A,27,18)	RS1/16SS103J	R 5027	(B,63,12)	RS1/16SS680J
	R 4779	(A,28,26)	RS1/16SS103J	R 5028	(B,65,12)	RS1/16SS121J
	R 4780	(A,28,26)	RS1/16SS101J	R 5029	(A,18,45)	RS1/16SS102J
	R 4790	(A,51,22)	RS1/16SS101J	R 5030	(A,19,52)	RS1/16SS102J
	R 4791	(A,47,25)	RS1/16SS101J	R 5031	(A,17,45)	RS1/16SS102J
E	R 4792	(A,51,17)	RS1/16SS0R0J	R 5032	(B,17,13)	RS1/16SS560J
	R 4793	(A,42,16)	RS1/16SS0R0J	R 5033	(B,19,13)	RS1/16SS221J
	R 4794	(A,50,15)	RS1/16SS103J	R 5034	(B,60,13)	RS1/16SS681J
	R 4795	(A,47,21)	RS1/16SS683J	R 5036	(B,49,13)	RS1/16SS101J
	R 4798	(A,44,17)	RS1/16SS104J	R 5037	(B,14,27)	RS1/16SS101J
	R 4799	(A,46,21)	RS1/16SS0R0J	R 5040	(A,11,21)	RS1/16SS681J
	R 4800	(A,45,19)	RS1/16SS0R0J	R 5041	(A,12,21)	RS1/16SS681J
	R 4801	(A,45,13)	RS1/16SS0R0J	R 5042	(A,10,21)	RS1/16SS471J
	R 4802	(A,44,23)	RS1/16SS0R0J	R 5043	(A,9,21)	RS1/16SS0R0J
	R 4803	(A,52,25)	RS1/16SS101J	R 5044	(A,8,21)	RS1/16SS471J
F	R 4804	(A,51,23)	RS1/16SS103J	R 5045	(A,66,20)	RS1/16SS0R0J
	R 4805	(A,45,25)	RS1/16SS103J	R 5046	(B,56,13)	RS1/16SS0R0J
	R 4845	(A,66,58)	RS1/8SQ0R0J	R 5047	(B,58,13)	RS1/16SS680J
	R 4901	(A,41,30)	RS1/16SS103J	R 5048	(B,53,46)	RS1/16SS331J
	R 4902	(A,72,25)	RS1/16SS222J	R 5049	(B,55,46)	RS1/16SS331J
	R 4903	(A,38,30)	RS1/16SS470J	R 5053	(B,10,27)	RS1/16SS560J
	R 4904	(A,66,27)	RS1/16SS222J	R 5054	(B,9,27)	RS1/16SS560J
	R 4905	(A,66,26)	RS1/16SS221J	R 5055	(B,13,27)	RS1/16SS560J
	R 4906	(A,66,26)	RS1/16SS103J	R 5056	(B,12,27)	RS1/16SS560J

Circuit Symbol and No.		Part No.	Circuit Symbol and No.		Part No.
R 5057	(B,10,27)	RS1/16SS560J	C 4001	(A,52,27)	CCSSCJ3R0C50
R 5059	(B,32,12)	RS1/16SS560J	C 4002	(A,48,29)	CCSSCH4R0C50
			C 4003	(A,44,29)	CCSSCH180J50
R 5060	(B,33,12)	RS1/16SS560J	C 4004	(A,44,27)	CCSSCH8R0D50
R 5061	(B,29,12)	RS1/16SS560J	C 4005	(B,53,36) 10 uF	CCG1192
R 5062	(B,30,12)	RS1/16SS560J			
R 5063	(B,27,11)	RS1/16SS0R0J	C 4006	(B,51,36)	CKSSYB104K10
R 5064	(B,34,12)	RS1/16SS0R0J	C 4007	(B,53,38) 2.2 uF	CCG1218
			C 4008	(B,51,38)	CKSSYB104K10
R 5065	(B,31,12)	RS1/16SS560J	C 4009	(B,41,36)	CKSSYB104K10
R 5090	(B,58,27)	RS1/16SS0R0J	C 4010	(B,35,30) 10 uF	CCG1192
R 5099	(B,18,28)	RS1/16SS0R0J			
R 5100	(B,54,47)	RS1/16SS331J	C 4011	(B,40,36)	CKSSYB104K10
R 5101	(A,57,43)	RS1/16SS680J	C 4012	(B,39,36)	CKSSYB104K10
			C 4013	(B,45,33) 10 uF	CCG1192
R 5102	(A,20,50)	RS1/16SS680J	C 4014	(B,46,34)	CKSSYB104K10
R 5103	(B,23,27)	RS1/16SS560J	C 4015	(B,47,38)	CKSSYB104K10
R 5104	(A,22,47)	RS1/16SS680J			
R 5105	(A,22,49)	RS1/16SS680J	C 4016	(B,47,40)	CKSSYB104K10
R 5106	(A,21,50)	RS1/16SS680J	C 4017	(B,47,43)	CKSSYB104K10
			C 4018	(B,47,44)	CKSSYB104K10
R 5107	(B,21,10)	RS1/16SS101J	C 4019	(B,45,39)	CKSSYB104K10
R 5114	(B,28,28)	RS1/16SS101J	C 4020	(B,44,41)	CKSSYB104K10
R 5115	(B,28,30)	RS1/16SS101J			
R 5116	(B,31,27)	RS1/16SS0R0J	C 4021	(B,44,42)	CKSSYB104K10
R 5117	(B,32,27)	RS1/16SS0R0J	C 4022	(B,44,43)	CKSSYB104K10
			C 4023	(B,39,38)	CKSSYB104K10
R 5119	(B,25,13)	RS1/16SS101J	C 4024	(B,39,41)	CKSSYB104K10
R 5121	(B,35,27)	RS1/10SR0R0J	C 4025	(B,39,44)	CKSSYB104K10
R 5122	(B,35,29)	RS1/10SR0R0J			
R 5125	(A,66,22)	RS1/16SS222J	C 4026	(B,51,38)	CKSSYB104K10
R 5126	(A,66,21)	RS1/16SS222J	C 4027	(B,51,40)	CKSSYB104K10
			C 4029	(B,41,40)	CKSSYB104K10
R 5127	(B,63,10)	RS1/16SS182J	C 4030	(B,49,41) 1 uF	DCH1246
R 5128	(B,64,10)	RS1/16SS182J	C 4031	(B,42,45)	CKSSYB104K10
R 5129	(B,22,11)	RS1/16SS101J			
R 5130	(B,37,31)	RS1/16SS103J	C 4034	(B,50,43)	CKSSYB104K10
R 5131	(B,38,28)	RS1/16SS103J	C 4037	(B,42,38)	CKSSYB104K10
			C 4038	(B,40,43) 1 uF	DCH1246
R 5132	(A,12,19)	RS1/16SS0R0J	C 4039	(B,38,45)	CKSSYB104K10
R 5315	(A,17,82)	RS1/16SS0R0J	C 4040	(B,46,46)	CKSSYB104K10
R 5316	(A,17,83)	RS1/16SS0R0J			
R 5317	(A,17,83)	RS1/16SS0R0J	C 4041	(B,38,44)	CKSSYB104K10
R 5318	(A,17,84)	RS1/16SS0R0J	C 4042	(B,49,46)	CKSSYB104K10
			C 4043	(B,47,46)	CKSSYB104K10
R 5326	(A,65,84)	RS1/16SS0R0J	C 4044	(B,42,46)	CKSSYB104K10
R 5327	(A,65,83)	RS1/16SS0R0J	C 4045	(B,40,46)	CKSSYB104K10
R 5328	(A,65,82)	RS1/16SS0R0J			
R 5329	(A,65,81)	RS1/16SS0R0J	C 4047	(B,50,48)	CKSSYB104K10
R 5351	(A,6,15)	RS1/16SS0R0J	C 4048	(B,46,48)	CKSSYB104K10
			C 4050	(B,43,48)	CKSSYB104K10
R 5352	(A,6,15)	RS1/16SS0R0J	C 4051	(B,45,42) 22 uF	DCH1256
R 5353	(A,7,15)	RS1/16SS0R0J	C 4052	(B,44,46) 22 uF	CCG1254
R 5354	(A,8,15)	RS1/16SS0R0J			
R 5355	(A,9,15)	RS1/16SS0R0J	C 4053	(B,37,36) 22 uF	CCG1254
R 5356	(A,10,15)	RS1/16SS0R0J	C 4054	(B,53,32) 10 uF	CCG1192
			C 4055	(B,51,35)	CKSSYB104K10
R 5357	(A,11,15)	RS1/16SS0R0J	C 4056	(A,37,14) 10 uF	CCG1192
R 5358	(A,12,15)	RS1/16SS0R0J	C 4057	(B,37,48) 10 uF	CCG1192
R 5359	(A,13,15)	RS1/16SS0R0J			
R 5360	(A,14,15)	RS1/16SS0R0J	C 4058	(B,39,45)	CKSSYB104K10
R 5361	(A,15,15)	RS1/16SS0R0J	C 4059	(B,48,48)	CKSSYB104K10
			C 4062	(B,57,53)	CKSSYB104K10
R 5362	(A,15,15)	RS1/16SS0R0J	C 4063	(B,55,53)	CKSSYB104K10
R 5376	(A,60,15)	RS1/16SS0R0J	C 4064	(B,45,35) 10 uF	CCG1192
R 5377	(A,59,15)	RS1/16SS0R0J			
R 5378	(A,58,15)	RS1/16SS0R0J	C 4065	(B,39,39)	CKSSYB104K10
R 5379	(A,57,15)	RS1/16SS0R0J	C 4066	(B,49,40)	CKSSYB104K10
			C 4067	(B,49,38)	CKSSYB104K10
			C 4068	(B,41,39)	CKSSYB104K10
			C 4069	(B,42,41) 1 uF	DCH1246

CAPACITORS

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

A	C 4070	(B,46,37)	CKSSYB104K10
	C 4071	(B,48,33)	CKSSYB104K10
	C 4072	(B,41,31) 10 uF	CCG1192
	C 4073	(B,45,31) 10 uF	CCG1192
	C 4075	(B,42,36)	CKSSYB104K10
	C 4076	(B,36,40) 10 uF	CCG1192
	C 4077	(B,55,49) 10 uF	CCG1192
	C 4078	(B,50,36)	CKSSYB104K10
	C 4079	(A,44,25)	CCSSCH101J50
	C 4080	(B,53,51)	CKSSYB104K10
B	C 4087	(B,44,38) 22 uF	DCH1256
	C 4301	(B,61,66)	CKSSYB104K10
	C 4302	(A,61,66)	CKSSYB104K10
	C 4303	(B,52,63)	CKSSYB104K10
	C 4304	(B,52,64)	CKSSYB104K10
	C 4305	(B,51,67)	CKSSYB104K10
	C 4306	(A,50,67)	CKSSYB104K10
	C 4307	(A,50,69)	CKSSYB104K10
	C 4308	(A,50,71)	CKSSYB104K10
	C 4309	(B,53,67) 4.7 uF	CCG1201
C	C 4310	(B,53,70)	CKSSYB104K10
	C 4311	(A,61,68)	CKSSYB104K10
	C 4312	(B,60,70)	CKSSYB104K10
	C 4313	(B,58,71)	CKSSYB104K10
	C 4314	(A,61,75)	CKSSYB104K10
	C 4315	(A,61,77)	CKSSYB104K10
	C 4316	(B,61,77)	CKSSYB104K10
	C 4317	(B,59,77) 4.7 uF	CCG1201
	C 4318	(A,50,75)	CKSSYB104K10
	C 4319	(B,51,75)	CKSSYB104K10
D	C 4320	(A,50,77)	CKSSYB104K10
	C 4321	(B,61,68)	CKSSYB104K10
	C 4322	(B,61,70)	CKSSYB104K10
	C 4323	(B,58,73)	CKSSYB104K10
	C 4324	(B,61,75)	CKSSYB104K10
	C 4325	(A,42,66)	CKSSYB104K10
	C 4326	(B,41,66)	CKSSYB104K10
	C 4327	(B,34,62)	CKSSYB104K10
	C 4328	(B,34,64)	CKSSYB104K10
	C 4329	(A,31,67)	CKSSYB104K10
E	C 4330	(B,31,67)	CKSSYB104K10
	C 4331	(A,31,69)	CKSSYB104K10
	C 4332	(A,31,71)	CKSSYB104K10
	C 4333	(B,29,69) 4.7 uF	CCG1201
	C 4334	(B,35,70)	CKSSYB104K10
	C 4335	(A,42,67)	CKSSYB104K10
	C 4336	(A,42,70)	CKSSYB104K10
	C 4337	(B,39,71)	CKSSYB104K10
	C 4338	(B,51,69)	CKSSYB104K10
	C 4339	(B,51,71)	CKSSYB104K10
F	C 4340	(A,44,71)	CKSSYB104K10
	C 4341	(B,53,74)	CKSSYB104K10
	C 4342	(B,51,77)	CKSSYB104K10
	C 4343	(B,41,67)	CKSSYB104K10
	C 4344	(B,41,70)	CKSSYB104K10
	C 4345	(B,34,75)	CKSSYB104K10
	C 4346	(B,31,75)	CKSSYB104K10
	C 4347	(A,31,75)	CKSSYB104K10
	C 4348	(A,31,77)	CKSSYB104K10

C 4349	(A,42,75)	CKSSYB104K10
C 4350	(A,42,77)	CKSSYB104K10
C 4351	(B,41,77)	CKSSYB104K10
C 4352	(B,40,75) 4.7 uF	CCG1201
C 4353	(A,62,71)	CKSSYB104K10
C 4354	(B,41,74)	CKSSYB104K10
C 4355	(B,31,69)	CKSSYB104K10
C 4356	(B,52,74)	CKSSYB104K10
C 4357	(B,40,81)	CKSSYB103K16
C 4358	(B,58,81)	CKSSYB103K16
C 4361	(B,31,71)	CKSSYB104K10
C 4362	(B,34,72)	CKSSYB104K10
C 4363	(B,31,77)	CKSSYB104K10
C 4364	(B,39,73)	CKSSYB104K10
C 4381	(A,28,73)	CKSSYB104K10
C 4382	(A,26,71)	CKSSYB104K10
C 4401	(A,11,48)	CKSSYB471K50
C 4402	(A,7,71)	CKSSYB104K10
C 4403	(A,11,71)	CKSSYB103K16
C 4404	(B,32,52)	CCSSCH8R0D50
C 4405	(B,31,57)	CCSSCH8R0D50
C 4406	(B,23,58)	CKSSYB103K16
C 4412	(A,23,64)	CKSSYB103K16
C 4413	(A,20,68)	CKSSYB103K16
C 4414	(A,21,65)	CKSSYB103K16
C 4415	(A,21,63)	CKSSYB103K16
C 4416	(A,21,66)	CKSSYB103K16
C 4417	(A,20,63)	CKSSYB103K16
C 4418	(A,18,63)	CKSSYB103K16
C 4419	(A,18,63)	CKSSYB103K16
C 4420	(A,18,64)	CKSSYB103K16
C 4421	(A,18,65)	CKSSYB103K16
C 4422	(A,20,67)	CKSSYB103K16
C 4423	(A,27,65)	CKSSYB103K16
C 4424	(B,28,65)	CKSSYB103K16
C 4425	(A,26,67)	CKSSYB103K16
C 4426	(A,19,67)	CKSSYB103K16
C 4427	(A,18,59)	CKSSYB104K10
C 4428	(A,18,58) 1 uF	DCH1246
C 4429	(A,27,63) 1 uF	DCH1246
C 4430	(A,27,63)	CKSSYB104K10
C 4431	(A,18,60)	CKSSYB103K16
C 4432	(A,27,64)	CKSSYB103K16
C 4433	(B,27,58)	CKSSYB471K50
C 4435	(A,23,66)	CKSSYB104K10
C 4436	(A,25,66) 10 uF	CCG1192
C 4437	(A,24,62)	CKSSYB104K10
C 4438	(A,25,63) 10 uF	CCG1192
C 4439	(B,27,59)	CKSSYB103K16
C 4501	(B,12,45)	CKSSYB104K10
C 4502	(B,6,40)	CKSSYB104K10
C 4503	(B,6,38)	CKSSYB104K10
C 4504	(B,12,33)	CKSSYB103K16
C 4505	(B,15,33)	CKSSYB103K16
C 4506	(B,14,30) 10 uF	CCG1192
C 4507	(B,14,32)	CKSSYB103K16
C 4508	(B,19,37)	CKSSYB103K16
C 4509	(B,9,32) 10 uF	CCG1192
C 4510	(B,16,44)	CKSSYB102K50

<u>Circuit Symbol and No.</u>		<u>Part No.</u>	<u>Circuit Symbol and No.</u>		<u>Part No.</u>
C 4511	(B,7,44) 10 uF	CCG1192	IC 2803	(A,53,71) Interface IC	BU90R104
C 4516	(B,19,40)	CCSSCH101J50	IC 3001	(A,27,50) Display IC	TC90193SBG
C 4704	(B,68,57)	CKSRYB105K10	IC 3101	(A,133,73) Driver IC	BD81A04EFV-M
C 4706	(B,67,64)	CCSSCH470J50	IC 3201	(A,92,68) DC/DC CONV IC	R1290K103A
C 4707	(B,65,64)	CKSSYB471K50	Q 2701	(A,126,31) Chip Transistor	HN1C01FU
C 4708	(A,72,64) 47 uF	CCG1229	Q 2702	(A,128,24) Bipolar TR	LSCR523UB
C 4709	(A,69,64) 100 uF	CCG1232	Q 2711	(A,112,71) Bipolar TR	LSAR523UB
C 4711	(B,65,61)	CCSSCH220J50	Q 2715	(A,128,20) Bipolar TR	LSCR523UB
C 4712	(B,74,63)	CKSSYB103K16	Q 3001	(B,24,45) Bipolar TR	LSAR523UB
C 4722	(B,64,36)	CKSRYB105K10	Q 3002	(A,12,42) Bipolar TR	LSCR523UB
C 4723	(B,72,39)	CKSSYB103K16	Q 3201	(A,83,70) Transistor	2SAR502UB
C 4724	(B,71,39)	CCSSCH470J50	Q 3202	(A,98,73) Schottky Diode	LTC024EEB
C 4725	(B,71,40)	CKSSYB471K50	Q 3301	(A,7,48) Bipolar TR	LSAR523UB
C 4726	(A,71,33) 47 uF	CCG1229	D 3101	(A,132,64) Diode	RB060M-30
C 4727	(A,71,36) 100 uF	CCG1232	D 3201	(B,95,77) Schottky Diode	DB3S308F0
C 4729	(B,68,40)	CCSSCH220J50	D 3202	(B,82,66) Schottky Diode	DB3S308F0
C 4730	(B,70,31)	CKSSYB103K16	D 3203	(B,82,69) Schottky Diode	DB3S308F0
C 4742	(B,67,45)	CKSRYB105K10	D 3204	(A,87,59) Schottky Diode	RB162M-40
C 4744	(B,65,52)	CCSSCH470J50	L 2801	(A,42,69) Chip Beads	VTL1127
C 4745	(B,64,52)	CKSSYB471K50	L 2802	(A,42,68) Chip Beads	VTL1127
C 4746	(A,71,52) 47 uF	CCG1229	L 2803	(A,42,67) Chip Beads	VTL1127
C 4747	(A,68,52) 100 uF	CCG1232	L 2804	(A,42,66) Chip Beads	VTL1127
C 4749	(B,63,49)	CCSSCH220J50	L 2805	(A,42,65) Chip Beads	VTL1127
C 4750	(B,73,51)	CKSSYB103K16	L 2806	(A,42,63) Chip Beads	VTL1127
C 4766	(A,37,17) 4.7 uF	CCG1201	L 2807	(A,46,65) Chip Beads	VTL1127
C 4767	(A,35,16) 4.7 uF	CCG1201	L 2808	(A,45,67) Chip Beads	VTL1127
C 4768	(A,27,16)	CKSSYB473K16	L 2809	(A,46,63) Chip Beads	VTL1127
C 4776	(A,66,23)	CKSSYB104K10	L 2810	(A,47,62) Chip Beads	VTL1127
C 4778	(A,28,25)	CKSSYB473K16	L 2811	(A,46,60) Chip Beads	VTL1127
C 4790	(A,48,21)	CCSSCH101J50	L 2812	(A,48,60) Chip Beads	VTL1127
C 4791	(A,46,23)	CKSSYB104K10	L 2813	(A,46,59) Chip Beads	VTL1127
C 4792	(A,45,18)	CKSSYB104K10	L 2814	(A,48,58) Chip Beads	VTL1127
C 4793	(A,51,19)	CKSSYB222K50	L 2815	(A,50,59) Chip Beads	VTL1127
C 4794	(A,44,14)	CKSSYB104K10	L 2816	(A,51,59) Chip Beads	VTL1127
C 4796	(A,20,58) 4.7 uF	CCG1201	L 2817	(A,52,59) Chip Beads	VTL1127
C 4797	(A,21,55) 4.7 uF	CCG1201	L 2818	(A,53,60) Chip Beads	VTL1127
C 4798	(A,44,22)	CKSSYB104K10	L 2819	(A,54,61) Chip Beads	VTL1127
C 4799	(A,50,25)	CCSSCH101J50	L 2820	(A,55,61) Chip Beads	VTL1127
C 4800	(A,28,59)	CKSSYB473K16	L 2821	(A,56,62) Chip Beads	VTL1127
C 4901	(A,41,22) 1 uF	DCH1246	L 2822	(A,60,77) Chip Solid Inductor	XTL3010
C 4902	(B,59,42)	CKSSYB104K10	L 2823	(B,62,68) Chip Solid Inductor	XTL3010
C 4903	(A,68,24)	CKSSYB104K10	L 2829	(A,51,50) Chip Ferrite Bead	BTX1047
C 4904	(A,66,25)	CKSSYB102K50	L 2830	(A,48,78) Chip Beads	VTL1127
C 4914	(B,60,45)	CKSSYB103K16	L 2831	(A,44,75) Chip Beads	VTL1127
C 4915	(A,32,24)	CKSSYB104K10	L 2832	(A,42,74) Chip Beads	VTL1127
C 4933	(A,57,35)	CCSSCH101J50	L 2833	(A,41,73) Chip Beads	VTL1127
C 5001	(A,74,21) 22 uF	DCH1256	L 2834	(A,41,72) Chip Beads	VTL1127
C 5003	(A,69,16) 22 uF	DCH1256	L 2835	(A,42,71) Chip Beads	VTL1127
C 5007	(B,41,10)	CKSRYB102K50	L 3001	(A,36,44) Inductor	CTF1734
			L 3002	(A,38,45) Inductor	CTF1734
			L 3003	(A,36,45) Inductor	CTF1734
			L 3004	(A,36,47) Inductor	CTF1734
			L 3005	(A,38,49) Inductor	CTF1734
			L 3006	(A,36,50) Inductor	CTF1734
			L 3007	(A,41,49) Inductor	CTF1734
			L 3008	(A,43,49) Inductor	CTF1734
			L 3009	(A,43,47) Inductor	CTF1734
			L 3010	(A,44,49) Inductor	CTF1734
IC 2701	(A,115,33) Interface IC	AK4187VN			
IC 2801	(A,34,77) Regulator IC	MM3411A15N			
IC 2802	(A,41,79) Regulator IC	MM3411A25N			



Unit Number: CXX7596

Unit Name: Monitor Unit (Service)

MISCELLANEOUS

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

A	L 3011	(A,41,53) Inductor	CTF1734
	L 3012	(A,37,54) Inductor	CTF1734
	L 3013	(A,37,43) Inductor	CTF1734
	L 3014	(A,37,42) Inductor	CTF1734
	L 3015	(A,37,41) Inductor	CTF1734
	L 3016	(A,36,41) Inductor	CTF1734
	L 3017	(A,35,41) Inductor	CTF1734
	L 3018	(A,33,41) Inductor	CTF1734
	L 3019	(A,32,41) Inductor	CTF1734
	L 3020	(A,31,41) Inductor	CTF1734
B	L 3021	(A,27,42) Inductor	CTF1740
	L 3022	(A,26,41) Inductor	CTF1734
	L 3023	(A,25,40) Inductor	CTF1734
	L 3024	(A,24,40) Inductor	CTF1734
	L 3025	(B,33,39) Inductor	CTF1545
	L 3104	(A,129,68) Inductor	CTF1545
	L 3105	(A,126,66) SMD SPL Inductor	CTH1558
	L 3201	(A,86,65) Choke Coil 22 uH	CTH1426
	L 3301	(A,5,61) Inductor	ATL7054
	L 3302	(A,19,35) Inductor	CTF1635
C	TH3301	(A,143,4) Thermistor	CCX1084
	X 3001	(A,14,48) Resonator 27.000 MHz	CSS1768
	CN2701	(A,125,51) Connector	CKS6601
	CN2702	(A,118,73) Connector	DKN1220
	CN2703	(A,63,38) Connector	CKS6365
	CN2704	(A,90,38) Connector	CKS6365
	CN2705	(A,119,13) FFC/FPC Connector	CKS6625
	CN2706	(A,137,14) Connector	CKS6601
	CN3301	(A,31,24) FFC/FPC Connector	CKS6602

RESISTORS

D	R 2704	(A,122,28)	RS1/16SS471J
	R 2705	(A,123,25)	RS1/16SS471J
	R 2706	(A,120,30)	RS1/16SS471J
	R 2715	(A,114,28)	RS1/16SS0R0J
	R 2716	(A,117,28)	RS1/16SS0R0J
	R 2717	(A,115,29)	RS1/16SS621J
	R 2718	(A,116,29)	RS1/16SS181J
	R 2719	(A,113,30)	RS1/16SS201J
	R 2720	(A,118,31)	RS1/16SS620J
	R 2724	(A,111,36)	RS1/16SS121J
E	R 2733	(A,127,28)	RS1/16SS180J
	R 2734	(A,128,28)	RS1/16SS180J
	R 2735	(A,130,28)	RS1/16SS220J
	R 2736	(A,124,33)	RS1/16SS620J
	R 2737	(A,123,33)	RS1/16SS620J
	R 2739	(A,126,23)	RS1/16SS150J
	R 2740	(A,125,23)	RS1/16SS150J
	R 2741	(A,124,23)	RS1/16SS180J
	R 2759	(B,117,68)	RS1/16SS0R0J
	R 2760	(A,112,68)	RS1/16SS104J
F	R 2761	(A,115,69)	RS1/16SS104J
	R 2768	(A,115,70)	RS1/16SS473J
	R 2771	(A,125,19)	RS1/16SS620J
	R 2772	(A,124,21)	RS1/16SS620J
	R 2781	(A,132,49)	RS1/16SS0R0J
	R 2782	(A,132,50)	RS1/16SS0R0J
	R 2783	(A,131,52)	RS1/16SS0R0J

R 2784	(A,131,53)	RS1/16SS0R0J
R 2792	(A,124,57)	RS1/10SR0R0J
R 2801	(A,40,69)	RS1/16SS221J
R 2802	(A,40,68)	RS1/16SS221J
R 2803	(A,40,67)	RS1/16SS221J
R 2804	(A,40,66)	RS1/16SS221J
R 2805	(A,40,65)	RS1/16SS221J
R 2806	(A,40,63)	RS1/16SS221J
R 2807	(A,45,61)	RS1/16SS221J
R 2808	(A,45,63)	RS1/16SS221J
R 2809	(A,43,61)	RS1/16SS221J
R 2810	(A,44,60)	RS1/16SS221J
R 2811	(A,43,60)	RS1/16SS221J
R 2812	(A,44,59)	RS1/16SS221J
R 2813	(A,43,59)	RS1/16SS221J
R 2814	(A,44,58)	RS1/16SS221J
R 2815	(A,46,58)	RS1/16SS221J
R 2816	(A,50,57)	RS1/16SS221J
R 2817	(A,52,58)	RS1/16SS221J
R 2818	(A,53,58)	RS1/16SS221J
R 2819	(A,54,59)	RS1/16SS221J
R 2820	(A,55,59)	RS1/16SS221J
R 2821	(A,56,60)	RS1/16SS221J
R 2822	(A,55,79)	RS1/16SS103J
R 2824	(A,63,73)	RS1/16SS1000D
R 2825	(A,62,72)	RS1/16SS1000D
R 2826	(A,62,69)	RS1/16SS1000D
R 2827	(A,61,68)	RS1/16SS1000D
R 2828	(A,60,66)	RS1/16SS1000D
R 2834	(A,46,77)	RS1/16SS221J
R 2835	(A,42,75)	RS1/16SS221J
R 2836	(A,40,74)	RS1/16SS221J
R 2837	(A,39,73)	RS1/16SS221J
R 2838	(A,39,71)	RS1/16SS221J
R 2839	(A,41,70)	RS1/16SS221J
R 2857	(A,56,80)	RS1/16SS103J
R 2858	(A,57,80)	RS1/16SS103J
R 2859	(A,58,79)	RS1/16SS103J
R 2861	(A,110,40)	RS1/10SR0R0J
R 2865	(A,64,76)	RS1/16SS221J
R 3001	(A,40,42)	RS1/16SS151J
R 3002	(A,40,44)	RS1/16SS151J
R 3003	(A,40,45)	RS1/16SS151J
R 3004	(A,41,45)	RS1/16SS151J
R 3005	(A,40,49)	RS1/16SS151J
R 3006	(A,40,50)	RS1/16SS151J
R 3007	(A,42,47)	RS1/16SS151J
R 3008	(A,43,46)	RS1/16SS151J
R 3009	(A,43,44)	RS1/16SS151J
R 3010	(A,44,46)	RS1/16SS151J
R 3011	(A,42,52)	RS1/16SS151J
R 3012	(A,39,54)	RS1/16SS151J
R 3017	(A,39,56)	RS1/16SS472J
R 3018	(A,37,59)	RS1/16SS472J
R 3019	(A,37,60)	RS1/16SS472J
R 3022	(A,39,42)	RS1/16SS151J
R 3023	(A,38,41)	RS1/16SS151J
R 3024	(A,37,39)	RS1/16SS151J
R 3025	(A,36,39)	RS1/16SS151J

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

A	C 2809	(B,62,70)	CKSSYB104K10
	C 2810	(B,61,70)	CKSSYB103K16
	C 2814	(A,48,53)	CKSSYB103K16
	C 2816	(A,52,53) 10 uF	DCH1201
	C 2819	(A,35,80)	CKSRYB105K10
■	C 2820	(A,44,79)	CKSRYB105K10
	C 2821	(A,41,77)	CKSRYB105K10
	C 2822	(A,34,74)	CKSRYB105K10
	C 2823	(A,43,71)	CKSSYB104K10
	C 2824	(A,44,71)	CKSSYB103K16
B	C 2825	(A,52,79)	CKSSYB103K16
	C 2826	(A,52,80)	CKSSYB104K10
	C 2830	(A,65,79)	CKSQYB225K10
	C 3002	(A,36,46)	CKSSYB104K10
	C 3003	(A,36,48)	CKSSYB104K10
■	C 3004	(A,37,51)	CKSSYB104K10
	C 3005	(A,37,52)	CKSSYB104K10
	C 3006	(A,37,55)	CKSSYB104K10
	C 3007	(A,34,41)	CKSSYB104K10
	C 3008	(A,31,60)	CKSSYB104K10
C	C 3010	(A,29,42)	CKSSYB104K10
	C 3011	(A,29,59)	CKSSYB104K10
	C 3013	(A,28,41)	CKSSYB104K10
	C 3014	(A,27,59)	CKSSYB104K10
	C 3015	(A,26,39)	CCSSCH470J50
■	C 3019	(B,30,44) 10 uF	CCG1192
	C 3021	(A,24,42)	CKSSYB104K10
	C 3022	(A,24,59)	CKSSYB104K10
	C 3023	(B,27,42)	CKSSYB104K10
	C 3024	(A,20,40)	CKSSYB104K10
D	C 3025	(B,23,41)	CKSRYB474K10
	C 3026	(A,20,41)	CKSSYB104K10
	C 3027	(A,19,51)	CKSSYB104K10
	C 3028	(A,18,53)	CKSSYB104K10
	C 3029	(A,19,56)	CKSSYB104K10
■	C 3030	(A,16,42)	CKSSYB152K50
	C 3031	(A,21,42)	CKSSYB104K10
	C 3032	(A,19,42)	CKSSYB104K10
	C 3033	(A,19,45)	CKSSYB104K10
	C 3037	(A,17,47)	CCSSCH120J50
E	C 3038	(A,19,47)	CKSSYB103K16
	C 3040	(A,17,41)	CCSSCH4R0C50
	C 3041	(A,13,50)	CCSSCH120J50
	C 3042	(B,17,42) 4.7 uF	CCG1201
	C 3043	(A,18,48)	CKSSYB104K10
■	C 3044	(A,14,58)	CKSSYB103K16
	C 3046	(B,31,38)	CKSSYB104K10
	C 3101	(A,141,75) 10 uF	CCG1236
	C 3102	(A,139,78)	CKSSYB104K16
	C 3103	(A,136,80)	CKSSYB104K10
F	C 3104	(A,137,79)	CKSSYB104K10
	C 3107	(B,133,70) 2.2 uF	CCG1218
	C 3109	(A,135,60) 10 uF	CCG1236
	C 3110	(A,133,58) 10 uF	CCG1236
	C 3111	(A,132,56) 10 uF	CCG1236
■	C 3201	(A,92,65)	CKSSYB102K50
	C 3202	(B,96,75)	CKSRYB105K16
	C 3203	(B,95,65) 1 uF	DCH1246

C 3205	(B,78,67)	CKSQYB105K25
C 3206	(B,78,70)	CKSQYB105K25
C 3208	(B,92,75)	CKSRYB104K50
C 3209	(B,85,68)	CKSRYB104K50
C 3210	(B,85,70)	CKSRYB104K50
C 3211	(A,100,71)	CKSSYB224K6R3
C 3212	(A,100,70)	CKSSYB224K6R3
C 3214	(A,100,69) 1 uF	DCH1246
C 3215	(A,88,72)	CKSYB475K16
C 3216	(A,98,68)	CKSRYB682K50
C 3217	(A,83,63) 4.7 uF	CCG1201
C 3218	(B,81,71)	CCSRCH561J50
C 3219	(A,94,73)	CCSSCH101J50
C 3220	(A,85,60)	CKSRYB222K50
C 3221	(A,92,73)	CKSRYB224K16
C 3222	(A,89,60)	CKSYB475K16
C 3223	(A,92,60)	CKSYB475K16
C 3224	(A,97,66)	CCSRCH471J50
C 3309	(B,65,45)	CKSSYB102K50
C 3310	(B,65,44)	CKSSYB104K10
C 3311	(B,66,51)	CKSSYB102K50
C 3312	(B,66,52)	CKSSYB104K10
C 3321	(B,29,26)	CKSSYB102K50
C 3322	(B,29,27)	CKSSYB104K16
C 3323	(A,24,34) 10 uF/16 V	DCH1263
C 3326	(A,16,35)	CKSSYB102K50
C 3328	(B,27,26)	CKSSYB102K50
C 3329	(B,27,27)	CKSSYB104K10
C 3330	(A,22,30) 10 uF	DCH1201
C 3333	(A,19,30)	CKSSYB104K16
C 3334	(A,14,33) 4.7 uF	CCG1201
C 3336	(A,9,35)	CKSQYB225K16
C 3338	(A,14,30)	CKSQYB334K50
C 3342	(A,14,28)	CKSSYB104K10
C 3343	(A,5,48)	CKSSYB104K10
C 3344	(A,6,57) 10 uF	CCG1236
C 3345	(A,142,6)	CKSSYB104K10
C 3346	(A,145,4)	CKSSYB104K10

**Unit Number:CXX7595****Unit Name:Key Unit (Service)****MISCELLANEOUS**

D 3401	(A,151,4) LED	SMLVN6RGB2UK(B)
D 3402	(A,15,4) LED	SMLVN6RGB2UK(B)
S 3401	(A,100,4) Push Switch	CSG1196
S 3402	(A,116,4) Push Switch	CSG1196
S 3403	(A,130,4) Push Switch	CSG1196
S 3404	(A,143,4) Push Switch	CSG1196
S 3405	(A,35,4) Push Switch	CSG1196
S 3406	(A,50,4) Push Switch	CSG1196
S 3407	(A,65,4) Push Switch	CSG1196
S 3408	(A,83,5) Push Switch	CSG1196
S 3409	(A,158,4) Push Switch	CSG1196
U 3401	(A,7,5) Remote Receiver Unit	RS-470
CN3401	(A,22,5) Connector	CKS6421

RESISTORS

Circuit Symbol and No.**Part No.**

R 3402	(A,8,2)	RS1/16SS470J
R 3403	(A,96,2)	RS1/16SS182J
R 3404	(A,112,2)	RS1/16SS222J
R 3405	(A,126,2)	RS1/16SS472J
R 3406	(A,137,4)	RS1/16SS123J
R 3407	(A,45,2)	RS1/16SS182J
R 3408	(A,60,4)	RS1/16SS222J
R 3409	(A,76,5)	RS1/16SS472J
R 3410	(A,147,5)	RS1/16SS150J
R 3411	(A,146,5)	RS1/16SS620J
R 3412	(A,146,2)	RS1/16SS390J
R 3413	(A,18,5)	RS1/16SS150J
R 3414	(A,16,6)	RS1/16SS620J
R 3415	(A,18,6)	RS1/16SS390J

CAPACITORS

C 3407	(A,7,3)	CKSSYB104K10
--------	---------	--------------

**Unit Number:CXX7598****Unit Name:Case Unit (Service)****MISCELLANEOUS**

D 3451	(A,77,34)	Diode	DZ2S068C
D 3452	(A,77,36)	Diode	DZ2S068C
D 3453	(A,75,34)	Diode	DZ2S068C
D 3454	(A,74,37)	Diode	DZ2S068C
D 3456	(A,72,34)	Diode	DZ2S068C
D 3457	(A,71,36)	Diode	DZ2S068C
D 3458	(A,71,34)	Diode	DZ2S068C
D 3459	(A,68,36)	Diode	DZ2S068C
D 3461	(A,66,36)	Diode	DZ2S068C
D 3462	(A,68,34)	Diode	DZ2S068C
D 3463	(A,65,36)	Diode	DZ2S068C
D 3464	(A,66,34)	Diode	DZ2S068C
D 3465	(A,62,36)	Diode	DZ2S068C
D 3466	(A,65,34)	Diode	DZ2S068C
D 3467	(A,60,36)	Diode	DZ2S068C
D 3468	(A,64,33)	Diode	EZAEG2A50AX
D 3469	(A,63,33)	Diode	EZAEG2A50AX
D 3470	(A,59,33)	Diode	EZAEG2A50AX
D 3471	(A,58,33)	Diode	EZAEG2A50AX
D 3472	(A,52,35)	Diode	EZAEG2A50AX
D 3473	(A,52,37)	Diode	EZAEG2A50AX
D 3474	(A,44,34)	Diode	DZ2S068C
D 3475	(A,49,36)	Diode	DZ2S068C
D 3476	(A,46,36)	Diode	DZ2S068C
D 3477	(A,42,34)	Diode	DZ2S068C
D 3478	(A,42,36)	Diode	DZ2S068C
D 3479	(A,40,36)	Diode	DZ2S068C
D 3480	(A,40,34)	Diode	DZ2S068C
D 3481	(A,38,34)	Diode	DZ2S068C
D 3482	(A,53,33)	Diode	EZAEG2A50AX
D 3483	(A,56,33)	Diode	EZAEG2A50AX
D 3484	(A,60,33)	Diode	EZAEG2A50AX
D 3485	(A,61,33)	Diode	EZAEG2A50AX
D 3560	(A,69,34)	Diode	DZ2S068C

Circuit Symbol and No.**Part No.**

CN3451	(A,24,13)	Connector	CKS6366
CN3452	(A,51,13)	Connector	CKS6366
CN3453	(B,59,37)	Connector	CKS6646

**Unit Number:CXX7597****Unit Name:SW Unit (Service)****MISCELLANEOUS**

S 3501	(A,18,7)	Switch	CSN1085
S 3502	(A,21,24)	Switch	CSN1086
CN3501	(A,7,25)	Connector	DKN1220

**Unit Number:EXX2001****Unit Name:PCB Assy (Service)****MISCELLANEOUS**

IC 101	Driver IC	BA6288FS
VR101	Volume 10 kohm	CCW1029
S 101	Switch(HOME)	CSN1067
S 102	Switch(HOME)	CSN1068
CN101	Connector	CKS4997

RESISTORS

R 101	RS1/16S221J
R 102	RS1/16S221J
R 103	RS1/16S0R0J

CAPACITORS

C 101	CEVW220M16
C 102	CKSRYB104K16