
EXPLODED VIEW/PARTS LIST

Main section

NO.	PART NO.	DESCRIPTION	Q'TY
1	940-8015-03	ESCUTCHEON ASSY	1
2	331-3498-00	CONNECTOR HOLDER	1
3	286-9086-30	SETPLATE	1
4	074-1239-76	26P OUTLET SOCKET	1
5	039-1957-01	FPC	1
6	331-3267-00	TR-HOLDER	1
7	347-6619-00	INSULATOR	1
8	716-3450-00	SCREW M1.7 x2	4
9	716-0872-00	PAD SCREW M1.7 x6	4
10	716-3462-00	SCREW M2 x5	1
11	716-3461-00	SCREW M2 x3	1
12	HBS-537-100	CD CHANGER MECHANISM	1
13	345-8329-00	CUSHION RUBBER	2
14	331-3497-00	SIDE PLATE	1
15	714-2606-81	MACHINE SCREW M2.6 x6	3
16	331-3592-00	PROTECT PLATE	2

NO.	PART NO.	DESCRIPTION	Q'TY
17	345-5237-00	CUSHION RUBBER	2
18	013-6302-50	SWITCH	7
19	017-0433-91	PILOT LAMP 14V40mA	4
20	001-7045-90	DIODE CL-165D/FG	6
21	001-7043-90	DIODE CL-170FG	2
22	----------	ESCUTCHEON PWB	1
23	013-7415-50	DETECTOR SWITCH	1
24	331-1861-10	EARTH PLATE	1
25	816-2610-00	FLAT WIRE	1
26	311-1836-08	LOWER CASE	1
27	331-3266-25	PWB HOLDER	1
28	305-0315-25	SIDE CASE	1
29	310-1741-25	UPPER CASE	1
30	629-0083-01	DAMPER	4
31	620-1086-20	DAMPER-H-PLT	4
32	750-3491-00	FL-SPRING	4

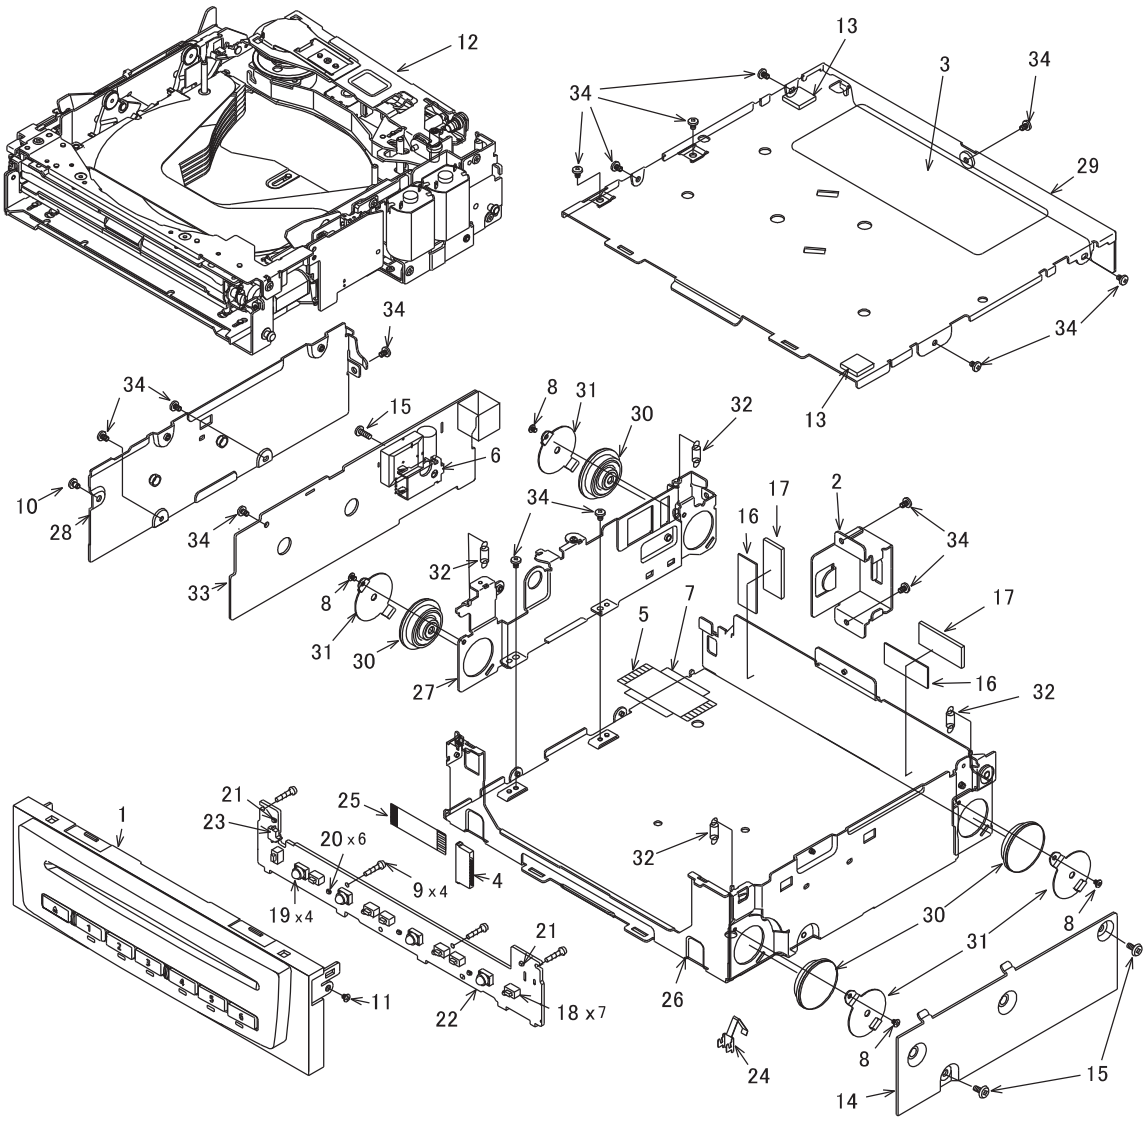

NO.	PART NO.	DESCRIPTION	Q'TY
33	----------	MAIN PWB	1

NO.	PART NO.	DESCRIPTION	Q'TY
34	716-1716-00	SCREW M2 x3	15

CD changer mechanism (HBS-537-100) section


A figure is in the following page.


NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-521-100	LOADING UNIT (WITHOUT MOTOR)	1
2	SMA-186-100	LOADING MOTOR ASSY	1
3	HBS-512-100	MOTOR PLATE SUB ASSY	1
4	HBS-513-109	DRIVE UNIT	1
5	----------	CD PWB	1
6	----------	DRIVER PWB	1
7	966-0597-23	CHASSIS ASSY	1
8	966-0600-23	LOCK-P-RE-ASSY	1
9	966-0601-21	M-GEAR-P-ASSY	1
10	966-0602-24	DR-LINK-ASSY	1
11	966-0603-21	MODE-P-ASSY	1
12	966-0604-24	LOCK-PF-ASSY	1
13	966-0605-20	SHIFT-P-ASSY	1
14	966-0606-23	HLC-PLATE-ASSY	1
15	966-0607-24	COV-OLATE-ASSY	1
16	966-0610-07	TOP-PLATE-ASSY	1

NO.	PART NO.	DESCRIPTION	Q'TY
17	966-0652-22	DR-BASE-P-ASSY	1
18	966-0615-21	LOCK-L-RF-ASSY	1
19	966-0616-20	LOCK-L-LF-ASSY	1
20	966-0618-21	EJECT-B-ASSY	1
21	966-0624-27	DISC-HOL-ASSY	1
22	001-7042-00	DIODE (GL4800)	4
23	013-7414-50	DETECTOR SWITCH	1
24	----------	LED-L-PWB	1
25	----------	LED-R-PWB	1
26	----------	SENSOR PWB	1
27	039-2009-00	PIM FPC (WITHOUT COMPONENT)	1
28	039-2010-00	RIV-FPC (WITHOUT COMPONENT)	1
29	039-2011-00	LED-FPC (WITHOUT COMPONENT)	1
30	039-2012-00	SENSOR-FPC (WITHOUT COMPONENT)	1

NO.	PART NO.	DESCRIPTION	Q'TY
31	039-2013-01	MOS-FPC (WITHOUT COMPONENT)	1
32	039-2014-01	L-MOTOR-FPC (WITHOUT COMPONENT)	1
33	051-5806-01	IC (GPIS93)	1
34	051-5806-02	IC (GPIS95)	1
35	060-0252-01	PHOTO-TR	4
36	347-6657-01	LO-COVER SHEET	1

NO.	PART NO.	DESCRIPTION	Q'TY
37	620-1041-26	GEAR PLATE	1
38	620-1042-20	M-GEAR-H	1
39	620-1056-22	HLR-PLATE-L	1
40	620-1580-20	HLR-PLATE-R	1
41	620-1576-20	LO-MOTOR-PLT	1
42	620-1066-20	LOCK LINK-LR	1
43	620-1067-21	SLIDE PLATE-L	1
44	620-1068-22	SLIDE PLATE-R	1
45	620-1071-21	EJECT ARM	1
46	620-1072-20	EJECT PLATE	1
47	620-1577-20	FRONT PLATE	1

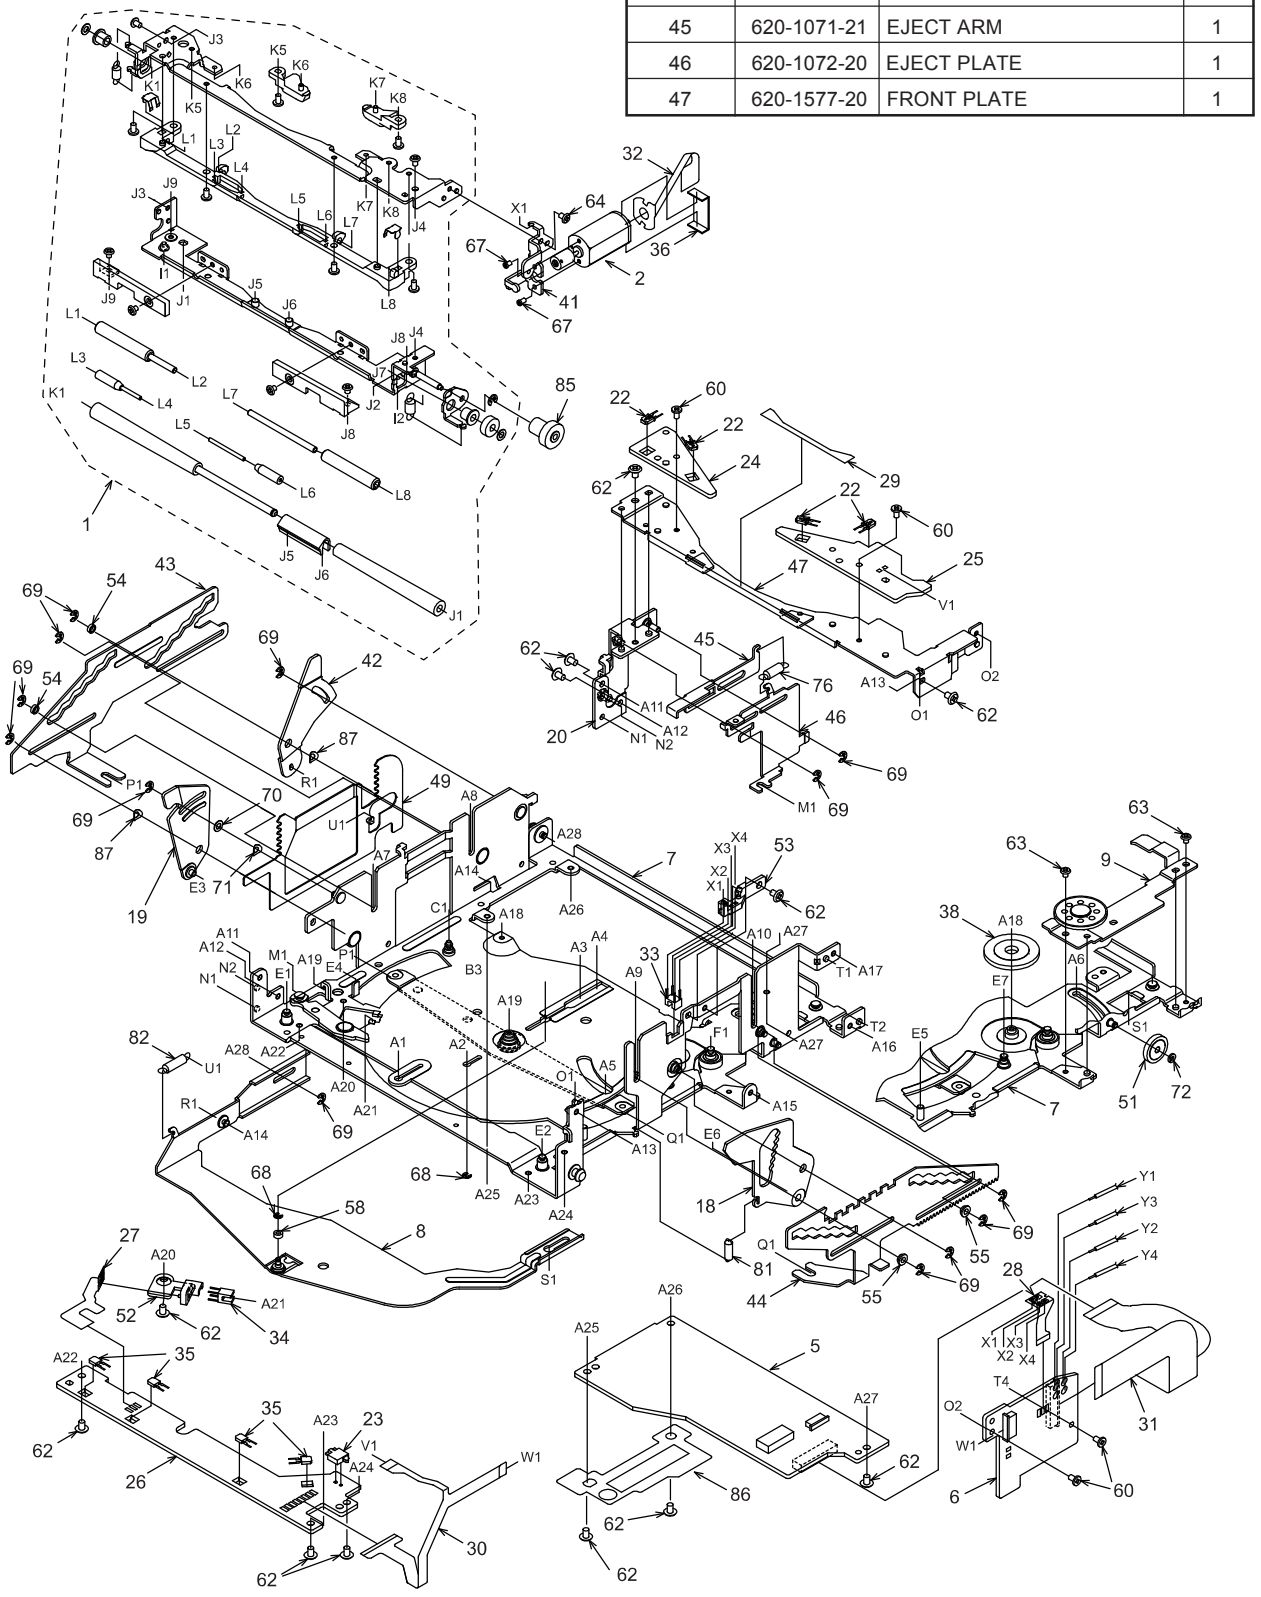

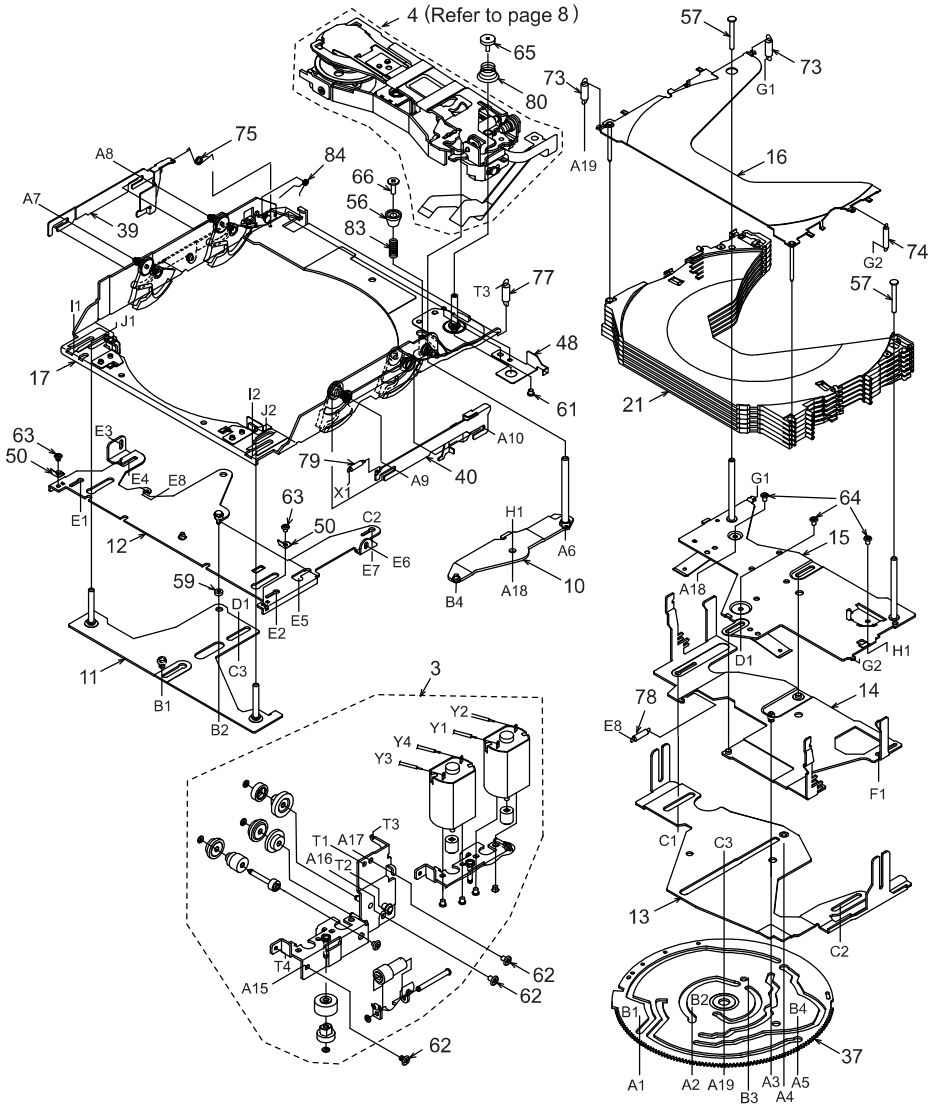


NO.	PART NO.	DESCRIPTION	Q'TY
48	620-1083-20	FPC-PLATE	1
49	620-1090-20	GAP PLATE	1
50	620-1568-20	RATTLE PLATE-F	2
51	621-0640-20	V-GEAR-G	1
52	621-0641-21	PI-HOLDER-M	1
53	621-0656-21	PI-HOLDER-V	1
54	622-1622-00	SL-G-ROLLER	2
55	622-1623-00	SL-G-ROLLER-R	2
56	622-1648-03	DU-STP-SLEEVE	1
57	622-1650-02	COV-PLATE PIN-B	2
58	622-1651-00	LOCK-RE-ROLLER	1
59	622-1652-00	LOCK-PF-ROLLER	1
60	716-1866-00	SCREW(M1.7 x3)	4
61	716-1873-00	SCREW(M2 x1.6)	1
62	716-3449-00	SCREW(M2 x3)	15
63	716-3450-00	SCREW(M1.7 x2)	4
64	716-3451-00	SCREW(M1.7 x2.5)	4
65	716-3459-00	SCREW(M1.7 x5)	1
66	716-3466-02	SCREW	1
67	738-1422-11	PRECISION SCREW	2

NO.	PART NO.	DESCRIPTION	Q'TY
68	743-1200-20	E-RING	2
69	743-1500-20	E-RING	13
70	746-0624-00	WASHER	1
71	746-0712-03	WASHER	1
72	746-0761-00	WASHER	1
73	750-3478-01	TOP-P-SP-L	2
74	750-3479-01	TOP-P-SP-R	1
75	750-3480-01	DR-LOCK-SP	1
76	750-3483-00	EJECT-A-SPRING	1
77	750-3484-01	DR-BASE-SPRING	1
78	750-3485-01	TENSION-SP-L	1
79	750-3486-01	LO-TENSION-SP	1
80	750-3489-01	DRIVE-P-SPRING	1
81	750-3496-00	GAP-P-SPRING R	1
82	750-3497-00	GAP-P-SPRING L	1
83	750-6711-01	DU-STP-SPRING	1
84	750-6712-01	DR-LOCK-SP-B	1
85	621-0651-22	LOAD GEAR-A	1
86	347-6974-00	FPC COVER	1
87	745-0809-00	WASHER	2

PN-2541B

Drive unit(HBS-513-109) of CD changer mechanism section

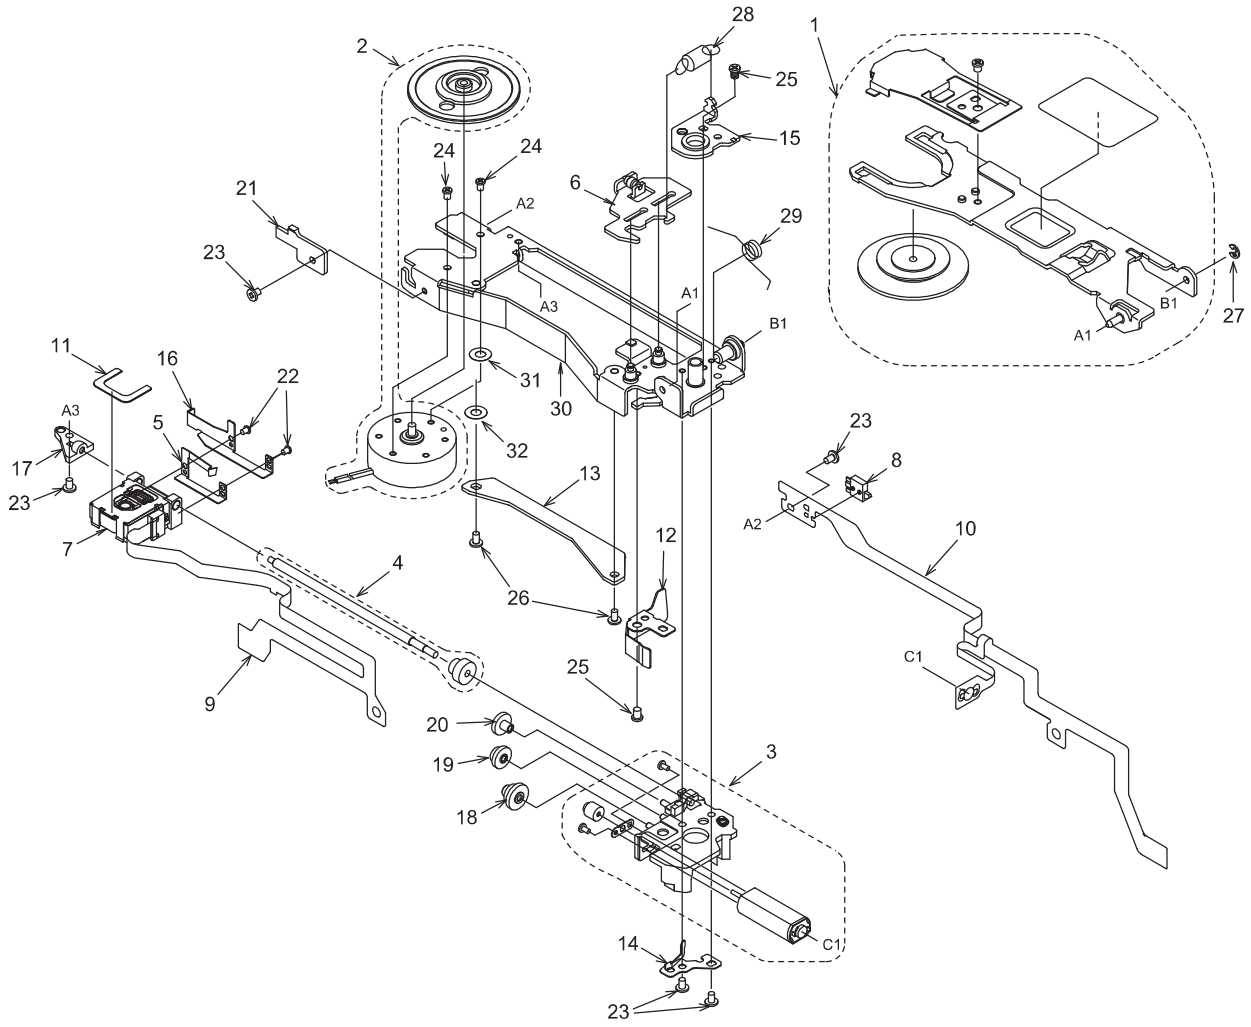

NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-514-102	CLAMPER SUB ASSY	1
2	SMA-185-101	SPINDLE MOTOR ASSY	1
3	SMA-184-100	SLED MOTOR ASSY	1
4	HBS-515-101	LS-ASSY	1
5	620-1587-00	SH-SP-PLT	1
6	966-0622-23	D-SHIFT-P-ASSY	1
7	969-0009-00	PICK UP-ASSY	1
8	013-7414-50	DETECT SWITCH	1
9	039-2015-01	P/U-FPC (WITHOUT COMPONENT)	1
10	039-2016-01	M/S-FPC (WITHOUT COMPONENT)	1
11	347-6632-00	PU-SHEET	1
12	620-1078-20	PUSH PLATE	1
13	620-1080-21	PU-GUIDE PLATE	1
14	620-1081-20	SCREW PUSH-PLT	1
15	620-1082-22	SPRING PLATE	1
16	620-1588-20	SCREW-HOL-PLT	1

NO.	PART NO.	DESCRIPTION	Q'TY
17	621-0670-20	LS-HOLDER-L	1
18	621-0673-20	D-GEAR A	1
19	621-0674-20	D-GEAR B	1
20	621-0675-20	D-GEAR C	1
21	621-0683-21	DU-STOPPER	1
22	716-3460-00	SCREW(M1.4 x 1.8)	2
23	716-3470-00	SCREW(M1.7 x 3)	5
24	738-1722-17	PRECISION SCREW	2
25	738-2025-17	PRECISION SCREW	2
26	716-3474-00	SCREW(M1.7 x 3)	2
27	743-1500-20	E-RING	1
28	750-3487-00	SHIFT-P-SPRING	1
29	750-3504-00	CLAMP-A-SPRING	1
30	966-0619-24	DRIVE PLT-ASSY	1
31	745-0807-00	WASHER	1
32	745-0808-00	WASHER	1

ELECTRICAL PARTS LIST

Note) Several different parts of the same reference number are alternative parts. One of those parts is used in the set.

Main PWB section(B1)

REF No.	PART No.	DESCRIPTION
C101	168-1045-56	0.1uF Z
C102	046-1032-78	0.01uF
C104	163-1073-15	6.3V100uF
C108	184-4773-38	16V470 uF
C109	168-1045-56	0.1uF Z
C110	178-4742-78	0.47uF
C111	042-0560-85	6.3V 100uF
C112	163-2273-25	10V 220uF
C113	168-1045-56	0.1uF Z
C114	163-1073-15	6.3V100uF
C115	168-1045-56	0.1uF Z
C116	178-4742-78	0.47uF
C117	178-4742-78	0.47uF
C118	178-3342-78	0.33uF
C119	178-1052-78	1uF
C120	178-1052-78	1uF
C201	163-2263-15	6.3V22uF
C202	163-2263-15	6.3V22uF
C203	045-1211-50	120pF
C204	045-1211-50	120pF
C205	045-2201-50	22pF
C206	045-2201-50	22pF
C207	168-1045-56	0.1uF Z
C209	163-1073-15	6.3V100uF
C210	168-1045-56	0.1uF Z
C211	046-3322-58	3300pF
C212	046-3322-58	3300pF
C213	046-6812-58	680pF
C214	046-6812-58	680pF
C215	046-1022-58	1000pF
C216	046-1022-58	1000pF
C217	163-2273-25	10V 220uF
C218	163-2273-25	10V 220uF
C219	163-2273-25	10V 220uF
C220	163-2273-25	10V 220uF
C501	163-1063-35	16V10uF
C502	168-1045-56	0.1uF Z
C503	168-4735-56	0.047uF Z
C504	168-1045-56	0.1uF Z
C505	046-2232-78	0.022uF
C602	172-1041-11	0.1 uF
C603	046-1022-58	1000pF
C604	046-1022-58	1000pF
C605	046-1022-58	1000pF
C621	163-3353-65	50V3.3uF
C710	168-1045-56	0.1uF Z
C711	163-1063-35	16V10uF
C712	163-4753-55	35V4.7uF
C713	163-4753-55	35V4.7uF
C800	163-1053-65	50V1uF
C801	045-1011-50	100pF
C802	046-2222-58	2200pF
C803	046-2222-58	2200pF
C804	046-2222-58	2200pF
C805	046-2222-58	2200pF
D100	001-0627-90	U1BC44
D101	001-0529-34	MA8062-L
D501	001-0516-90	MA111
D603	001-0516-90	MA111
D604	001-0516-90	MA111
D607	001-4302-38	UDZTE-17 33B
D608	001-4302-38	UDZTE-17 33B
D609	001-0516-90	MA111
D701	001-0529-21	MA8039-H
D703	001-0516-90	MA111
D801	001-2015-00	RL253
IC100	051-3306-90	TDA3663AT
IC101	051-3289-00	BA09ST
IC102	051-3288-90	AN80M50RSPTX
IC103	051-3288-90	AN80M50RSPTX
IC201	051-1407-90	NJM4556AM
IC202	051-1407-90	NJM4556AM
IC501	051-9400-28	BR93LC46F-WE2
IC502	052-5047-33	M30621MCM-7N9GP
IC503	051-5418-08	S-80827ANMP-EDQ
IC504	051-5418-08	S-80827ANMP-EDQ
J101	074-1189-95	45P
J102	074-1059-76	26P
J103	074-1087-12	A16 16P
Q100	191-1205-60	2SB1205 R,S,T
Q101	125-2004-92	RN1402
Q102	190-1162-00	2SA1162
Q204	125-2004-92	RN1402
Q505	125-2004-92	RN1402
Q506	125-0014-92	DTA114EK
Q603	192-2712-00	2SC2712
Q604	192-2712-00	2SC2712
Q605	125-0014-92	DTA114EK
Q606	192-2712-00	2SC2712
Q607	125-2004-92	RN1402
Q706	125-2004-92	RN1402
Q707	193-2118-00	2SD2118F5 Q,R,S
Q708	125-2004-92	RN1402
Q709	125-2004-92	RN1402
Q711	192-2712-00	2SC2712
Q712	131-1188-00	2SB1188
Q713	125-2004-92	RN1402
Q800	193-0601-00	2SD601A
Q801	190-1162-00	2SA1162
Q802	125-4001-90	XN1504
Q803	125-4001-90	XN1504
R100	032-0145-54	1/2W 10 ohm J
R101	033-4711-15	1/10W 470 ohm
R102	033-2231-15	1/10W 22k ohm
R103	116-1511-15	1/4W 150 ohm
R104	116-1511-15	1/4W 150 ohm
R105	032-0145-54	1/2W 10 ohm J
R106	032-0145-54	1/2W 10 ohm J
R207	033-6821-15	1/10W 6.8k ohm
R208	033-2731-15	1/10W 27k ohm
R209	033-1031-15	1/10W 10k ohm
R210	033-1031-15	1/10W 10k ohm
R211	033-6821-15	1/10W 6.8k ohm
R212	033-8221-15	1/10W 8.2k ohm
R213	033-2731-15	1/10W 27k ohm
R214	033-1031-15	1/10W 10k ohm
R215	033-1031-15	1/10W 10k ohm
R216	033-1031-15	1/10W 10k ohm
R218	033-2201-15	1/10W 22 ohm
R219	033-2201-15	1/10W 22 ohm
R220	033-2201-15	1/10W 22 ohm
R221	033-2201-15	1/10W 22 ohm
R223	033-3921-15	1/10W 3.9k ohm
R224	033-3921-15	1/10W 3.9k ohm
R225	033-8221-15	1/10W 8.2k ohm
R226	033-8221-15	1/10W 8.2k ohm
R504	033-2221-15	1/10W 2.2k ohm
R505	033-1031-15	1/10W 10k ohm
R509	033-4731-15	1/10W 47k ohm
R512	050-0145-54	1/16W 47k ohm x4
R513	033-1041-15	1/10W 100k ohm
R514	050-0145-53	1/16W 220k ohm x4
R515	033-1041-15	1/10W 100k ohm
R518	033-1041-15	1/10W 100k ohm
R520	033-2741-15	1/10W 270k ohm
R521	033-4731-15	1/10W 47k ohm
R522	050-0145-54	1/16W 47k ohm x4
R523	033-4741-15	1/10W 470k ohm
R524	033-4731-15	1/10W 47k ohm
R525	033-4731-15	1/10W 47k ohm
R527	050-0145-50	1/16W 270 ohm x4
R528	050-0145-50	1/16W 270 ohm x4
R529	050-0145-50	1/16W 270 ohm x4
R539	033-4721-15	1/10W 4.7k ohm
R540	050-0145-58	1/16W 2.2k ohm x4
R601	033-5621-15	1/10W 5.6k ohm
R606	033-5631-15	1/10W 56k ohm
R609	032-0145-54	1/2W 10 ohm J
R610	033-2231-15	1/10W 22k ohm
R611	033-1031-15	1/10W 10k ohm
R612	033-4731-15	1/10W 47k ohm
R613	033-1031-15	1/10W 10k ohm
R614	033-1031-15	1/10W 10k ohm
R615	033-1031-15	1/10W 10k ohm
R616	033-1031-15	1/10W 10k ohm
R617	033-4731-15	1/10W 47k ohm
R620	033-5631-15	1/10W 56k ohm
R621	033-5631-15	1/10W 56k ohm
R740	032-0145-64	1/2W 470 ohm J
R743	033-4721-15	1/10W 4.7k ohm
R744	033-1041-15	1/10W 100k ohm
R745	033-4721-15	1/10W 4.7k ohm
R746	033-4731-15	1/10W 47k ohm
R747	033-2231-15	1/10W 22k ohm
R748	033-4721-15	1/10W 4.7k ohm
R749	033-1031-15	1/10W 10k ohm
R751	033-1021-15	1/10W 1k ohm
R800	033-4731-15	1/10W 47k ohm
R801	033-5611-15	1/10W 560 ohm
R802	033-1031-15	1/10W 10k ohm
R803	033-1041-15	1/10W 100k ohm
R804	033-1031-15	1/10W 10k ohm
R805	033-1031-15	1/10W 10k ohm
R806	033-1021-15	1/10W 1k ohm
R807	033-1021-15	1/10W 1k ohm
R808	033-1031-15	1/10W 10k ohm
R809	033-1031-15	1/10W 10k ohm
R810	033-1031-15	1/10W 10k ohm
R811	033-1031-15	1/10W 10k ohm
R820	116-3031-15	1/4W 30k ohm
R821	116-3031-15	1/4W 30k ohm
R910	033-1041-15	1/10W 100k ohm
R920	033-1041-15	1/10W 100k ohm
R923	033-1041-15	1/10W 100k ohm
T101	009-0679-00	CHOCK
X501	060-1505-50	CSTCC10.0MG-TC
PWB	039-2232-01	PWB(WITHOUT COMPONENT)

Escutcheon PWB section(B2)

REF No.	PART No.	DESCRIPTION
C402	168-1045-56	0.1uF Z
CCT2	050-0145-52	1/16W 1k ohm x4
D401	001-7045-90	CL-165D/FG-D
D402	001-7043-90	CL-170FG F-GREEN
D403	001-7043-90	CL-170FG F-GREEN
D404	001-7045-90	CL-165D/FG-D
D405	001-7045-90	CL-165D/FG-D
D406	001-7045-90	CL-165D/FG-D
D407	001-7045-90	CL-165D/FG-D
D408	001-7045-90	CL-165D/FG-D
D411	001-0655-90	1SS294
D412	001-0655-90	1SS294

REF No.	PART No.	DESCRIPTION
IC401	051-6617-08	NJU3715G-TE2
J401	074-1239-76	26P
PL401	017-0433-91	14V 40mA
PL402	017-0433-91	14V 40mA
PL403	017-0433-91	14V 40mA
PL404	017-0433-91	14V 40mA
Q401	192-2712-00	2SC2712
Q402	192-2712-00	2SC2712
Q403	192-2712-00	2SC2712
Q404	192-2712-00	2SC2712
Q406	192-2712-00	2SC2712
R401	119-2211-15	1/10W 220 ohm
R402	119-2211-15	1/10W 220 ohm
R404	119-2211-15	1/10W 220 ohm
R406	119-2211-15	1/10W 220 ohm
R407	119-2211-15	1/10W 220 ohm

REF No.	PART No.	DESCRIPTION
R408	119-2211-15	1/10W 220 ohm
R409	119-2211-15	1/10W 220 ohm
R410	119-2211-15	1/10W 220 ohm
R411	119-2211-15	1/10W 220 ohm
R412	119-2211-15	1/10W 220 ohm
R413	119-2211-15	1/10W 220 ohm
R414	119-2211-15	1/10W 220 ohm
R415	119-2211-15	1/10W 220 ohm
R416	119-2211-15	1/10W 220 ohm
R419	033-1031-15	1/10W 10k ohm
R420	033-1031-15	1/10W 10k ohm
R421	033-1031-15	1/10W 10k ohm
R422	033-1031-15	1/10W 10k ohm
R423	033-1031-15	1/10W 10k ohm
R424	033-1031-15	1/10W 10k ohm
R425	033-1031-15	1/10W 10k ohm

REF No.	PART No.	DESCRIPTION
R426	033-1031-15	1/10W 10k ohm
R428	119-2211-15	1/10W 220 ohm
R429	119-1021-15	1/10W 1k ohm
R430	119-1021-15	1/10W 1k ohm
S401	013-6302-50	SKQMAL
S402	013-6302-50	SKQMAL
S403	013-6302-50	SKQMAL
S404	013-6302-50	SKQMAL
S405	013-6302-50	SKQMAL
S406	013-6302-50	SKQMAL
S407	013-6302-50	SKQMAL
S408	013-7415-50	SPVG110400
X401	060-8045-00	PKLCS1212E4001-R
PWB	039-2417-00	PWB(WITHOUT COMPONENT)

CD PWB section(B3) : CD changer mechanism

REF No.	PART No.	DESCRIPTION
C2	046-1022-58	1000pF
C3	168-1042-78	16V 0.1 uF
C4	042-0636-54	4V220 uF
C5	168-1042-78	16V 0.1 uF
C6	046-1032-78	0.01 uF
C7	168-1042-78	16V 0.1 uF
C8	178-4742-78	0.47 uF
C9	178-2242-78	0.22 uF
C10	168-1042-78	16V 0.1 uF
C11	168-1042-78	16V 0.1 uF
C12	168-1042-78	16V 0.1 uF
C13	046-2232-78	0.022 uF
C14	168-5612-55	560pF
C15	168-1042-78	16V 0.1 uF
C16	046-2212-58	220pF
C17	046-2212-58	220pF
C18	168-1222-55	1200pF
C19	046-3322-58	3300pF
C20	168-3932-78	0.039 uF
C21	168-3932-78	0.039 uF
C22	042-0416-52	10V10 uF TAN
C25	178-1052-78	1 uF
C26	042-0472-91	16V47 uF
C27	178-3342-78	0.33 uF
C29	168-2732-55	16V 0.027 uF
C30	042-0416-58	4V100 uF
C31	042-0636-52	4V47 uF
C32	046-1022-58	1000pF
C33	046-3322-58	3300pF
C34	168-2732-55	16V 0.027 uF
C35	178-2742-78	0.27 uF
C36	178-1052-78	1 uF
C37	168-1042-78	16V 0.1 uF
C38	042-0472-91	16V47 uF
C39	042-0636-50	6.3V100 uF
C40	045-1211-50	120pF

REF No.	PART No.	DESCRIPTION
C41	045-5601-50	56pF
C42	168-1042-78	16V 0.1 uF
C43	042-0636-52	4V47 uF
C50	168-1042-78	16V 0.1 uF
C51	168-1042-78	16V 0.1 uF
C60	168-5612-55	560pF
D1	001-0367-91	1SS226
IC1	051-6365-00	MN662785TBUC
IC2	051-9318-00	MSM51V17400D-60TS-K
IC2	051-9318-51	K4E160412C-FC60
IC3	051-6060-08	BD7961FM-E2
IC4	051-5711-90	AN8882SB-E1
J1	074-1189-95	45P
J4	074-1138-56	6P
J5	074-1201-65	15P
J6	074-1059-76	26P
L2	010-3050-93	10 uH
L2	010-2155-93	10 uH
Q2	131-1188-00	2SB1188
Q3	131-1188-00	2SB1188
R2	033-1041-15	1/16W 100k ohm
R4	033-3311-15	1/16W 330 ohm
R5	033-1041-15	1/16W 100k ohm
R6	033-3931-15	1/16W 39k ohm
R7	033-1041-15	1/16W 100k ohm
R8	033-5611-15	1/16W 560 ohm
R9	033-5611-15	1/16W 560 ohm
R10	033-1011-15	1/16W 100 ohm
R11	033-3911-15	1/16W 390 ohm
R12	033-2221-15	1/16W 2.2k ohm
R13	033-6831-15	1/16W 68k ohm
R14	033-5621-15	1/16W 5.6k ohm
R15	033-1021-15	1/16W 1k ohm
R16	033-5631-15	1/16W 56k ohm
R17	033-1031-15	1/16W 10k ohm

REF No.	PART No.	DESCRIPTION
R18	033-1031-15	1/16W 10k ohm
R19	033-5621-15	1/16W 5.6k ohm
R20	033-6831-15	1/16W 68k ohm
R21	033-5621-15	1/16W 5.6k ohm
R22	033-1031-15	1/16W 10k ohm
R23	033-1031-15	1/16W 10k ohm
R24	033-4731-15	1/16W 47k ohm
R25	033-3931-15	1/16W 39k ohm
R26	033-6831-15	1/16W 68k ohm
R27	033-6831-15	1/16W 68k ohm
R28	033-1031-15	1/16W 10k ohm
R29	033-2201-15	1/16W 22 ohm
R31	033-8211-15	1/16W 820 ohm
R32	033-5631-15	1/16W 56k ohm
R33	033-6831-15	1/16W 68k ohm
R34	033-3331-15	1/16W 33k ohm
R35	033-6831-15	1/16W 68k ohm
R38	033-3931-15	1/16W 39k ohm
R39	033-1831-15	1/16W 18k ohm
R40	117-1001-15	1/10W 10 ohm
R41	033-6821-15	1/16W 6.8k ohm
R42	033-6821-15	1/16W 6.8k ohm
R43	033-1241-15	1/16W 120k ohm
R44	033-6831-15	1/16W 68k ohm
R45	116-4711-15	1/8W 470 ohm
R46	117-1811-15	1/10W 180 ohm
R47	116-4711-15	1/8W 470 ohm
R48	033-1031-15	1/16W 10k ohm
R49	033-1011-15	1/16W 100 ohm
R60	033-1031-15	1/16W 10k ohm
TM1	073-0768-90	TERMIMAL
X1	060-1527-90	33.8688MHz
PWB	039-2233-00	PWB(WITHOUT COMPONENT)

Sensor PWB section(B4) : CD changer mechanism

REF No.	PART No.	DESCRIPTION
PT3	060-0252-01	PT4850F
PT4	060-0252-01	PT4850F
PT5	060-0252-01	PT4850F

REF No.	PART No.	DESCRIPTION
PT6	060-0252-01	PT4850F
S1	013-7414-50	SPVG22

REF No.	PART No.	DESCRIPTION
PWB	039-1956-00	PWB(WITHOUT COMPONENT)

PIM-FPC section(B5) : CD changer mechanism

REF No.	PART No.	DESCRIPTION
IC5	051-5806-02	GPIS95

REF No.	PART No.	DESCRIPTION
PWB	039-2009-00	PWB(WITHOUT COMPONENT)

Driver PWB section(B6) : CD changer mechanism

REF No.	PART No.	DESCRIPTION
C1	168-1045-56	0.1 uF
C2	163-1073-35	16V100 uF
D1	001-0529-29	MA8051-M
IC1	051-6044-18	BA6920FP-Y

REF No.	PART No.	DESCRIPTION
J1	074-1239-76	26P
J2	074-1100-59	9P
R1	033-1021-15	1/16W 1k ohm
R2	032-0104-59	1/4W 2.2 ohm

REF No.	PART No.	DESCRIPTION
R3	032-0104-59	1/4W 2.2 ohm
S1	013-7412-50	SPVG21
PWB	039-2242-00	PWB(WITHOUT COMPONENT)

PIV-FPC section(B7) : CD changer mechanism

REF No.	PART No.	DESCRIPTION
IC6	051-5806-01	GPIS93

REF No.	PART No.	DESCRIPTION
PWB	039-2010-00	PWB(WITHOUT COMPONENT)

LED-L-PWB section(B8) : CD changer mechanism

REF No.	PART No.	DESCRIPTION
LED3	001-7042-00	GL4800
LED4	001-7042-00	GL4800

REF No.	PART No.	DESCRIPTION
PWB	039-1954-20	PWB(WITHOUT COMPONENT)

LED-R-PWB section(B9) : CD changer mechanism

REF No.	PART No.	DESCRIPTION
LED5	001-7042-00	GL4800
LED6	001-7042-00	GL4800

REF No.	PART No.	DESCRIPTION
PWB	039-1955-20	PWB(WITHOUT COMPONENT)

L-Motor-FPC section(B10) : CD changer mechanism

REF No.	PART No.	DESCRIPTION
M1	SMA-186-100	LOADING

REF No.	PART No.	DESCRIPTION
PWB	039-2014-01	FPC(WITHOUT COMPONENT)

M/S-FPC section(B11) : CD changer mechanism

REF No.	PART No.	DESCRIPTION
M2	SMA-185-101	SPINDLE
M3	SMA-184-100	SLED

REF No.	PART No.	DESCRIPTION
S2	013-7414-50	SPVG22

REF No.	PART No.	DESCRIPTION
PWB	039-2016-01	FPC(WITHOUT COMPONENT)