


9. EXPLODED VIEWS AND PARTS LIST

- NOTES :
- Parts marked by " * " are generally unavailable because they are not in our Master Spare Parts List.
 - The  mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
 - Screw adjacent to  mark on the product are used for disassembly.
 - For the applying amount of lubricants or glue, follow the instructions in this manual.
(In the case of no amount instructions, apply as you think it appropriate.)

9.1 PACKING

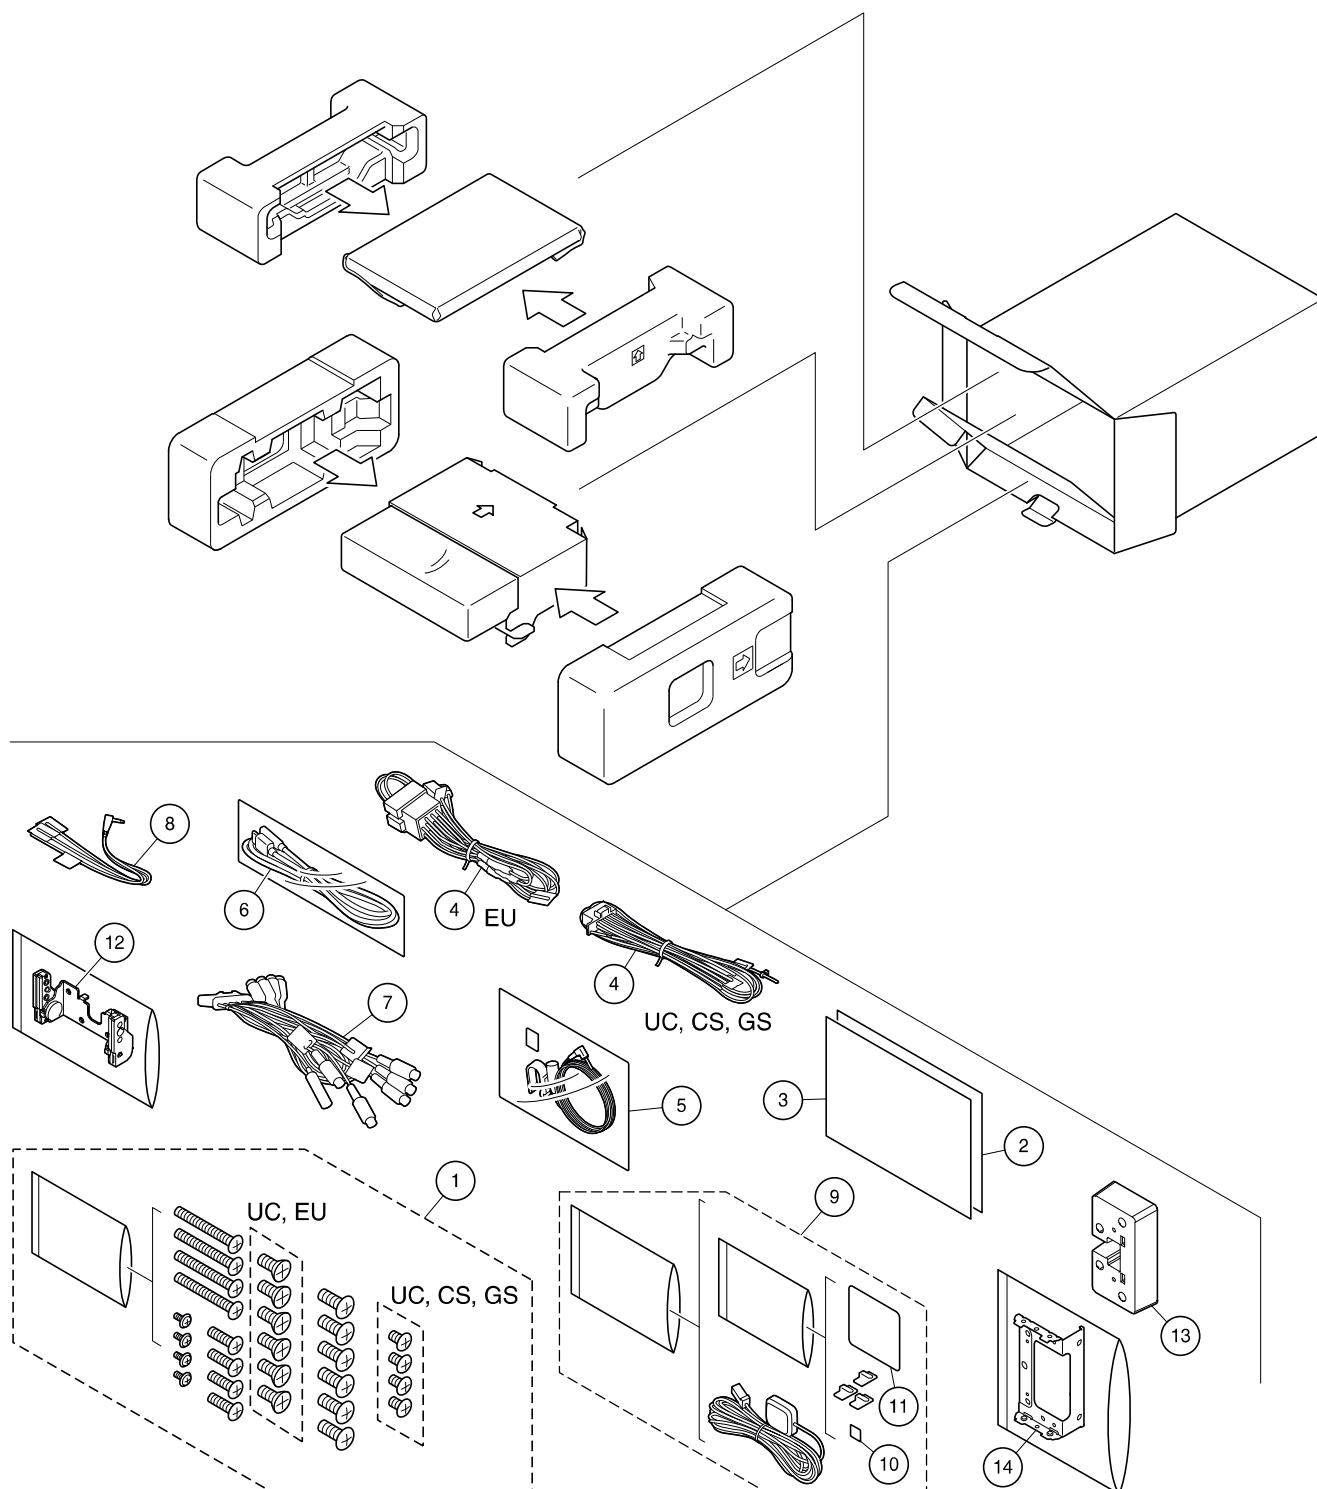

(1) PACKING SECTION PARTS LIST

<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>	<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
1	Accessory ASSY	See Contrast table (2)	11	Grand Sheet	CZN7151
2	Quick Start Guide	See Contrast table (2)	12	Frame ASSY	CXF3972
3	Warranty Card	Used	13	Spacer	CNW4149
4	PWS CONN-CORD	See Contrast table (2)	14	Bracket	See Contrast table (2)
5	Microphone ASSY	CPM1127			
6	USB Extended Cable	CDP1587			
7	CMPX CONN-CORD	See Contrast table (2)			
8	CMPX CONN-CORD	See Contrast table (2)			
9	GPS Antenna ASSY	CXF1333			
10	DS Tape	CYN1012			

(2) CONTRAST TABLE

DMH-WT3800NEX/XNUC, DMH-WT38/XNUC, SPH-EVO950DAB/XNEU, DMH-ZF8550BT/XNCS and DMH-ZF8550BT/XNGS are constructed the same except for the following:

Mark	No.	Description	DMH-WT3800NEX /XNUC	DMH-WT38 /XNUC	SPH-EVO950DAB /XNEU	DMH-ZF8550BT /XNCS	DMH-ZF8550BT /XNGS
	1	Accessory ASSY	CEY5446	CEY5446	CEY5449	CEY5447	CEY5448
	2	Quick Start Guide	CRD5218	CRD5218	CRD5219	CRD5221	CRD5220
	4	PWS CONN-CORD	CDP1666	CDP1666	CDP1901	CDP1666	CDP1666
	7	CMPX CONN-CORD	CDP1888	CDP1915	CDP1888	CDP1888	CDP1888
	8	CMPX CONN-CORD	Not used	Not used	Not used	CDP1894	CDP1894
	14	Bracket	CND8369	CND8369	Not used	CND8369	CND8369

Quick Start Guide

Part No.	Language
CRD5218	English, French, Spanish (Espanol)
CRD5219	English, French, Italian, Spanish (Espanol), German, Dutch
CRD5220	English, Traditional Chinese, Thai, Indonesian, Arabic, Persian
CRD5221	English, Spanish (Espanol), Portuguese (B)




CONTENTS OF Web IM

Part No.	Language
OPM_DMHW3800NEXUC_EN_A	(UC model) English
OPM_DMHW3800NEXUC_FC_A	(UC model) French
OPM_DMHW3800NEXUC_EM_A	(UC model) Spanish (Espanol)
OPM_SPHEVO950DABEU_EG_A	(EU model) English
OPM_SPHEVO950DABEU_DE_A	(EU model) German
OPM_SPHEVO950DABEU_FR_A	(EU model) French
OPM_SPHEVO950DABEU_ES_A	(EU model) Spanish (Espanol)
OPM_SPHEVO950DABEU_IT_A	(EU model) Italian
OPM_SPHEVO950DABEU_NL_A	(EU model) Dutch
OPM_SPHEVO950DABEU_PT_A	(EU model) Portuguese
OPM_SPHEVO950DABEU_SV_A	(EU model) Swedish
OPM_SPHEVO950DABEU_NO_A	(EU model) Norwegian
OPM_SPHEVO950DABEU_FI_A	(EU model) Finnish
OPM_SPHEVO950DABEU_DA_A	(EU model) Danish
OPM_SPHEVO950DABEU_EL_A	(EU model) Greek
OPM_SPHEVO950DABEU_TR_A	(EU model) Turkish
OPM_DMHZF8550BTCS_EG_A	(CS model) English
OPM_DMHZF8550BTCS_EM_A	(CS model) Spanish (Espanol)
OPM_DMHZF8550BTCS_PB_A	(CS model) Portuguese (B)
OPM_DMHZF8550BTGS_EG_A	(GS model) English
OPM_DMHZF8550BTGS_ZT_A	(GS model) Traditional Chinese
OPM_DMHZF8550BTGS_TH_A	(GS model) Thai
OPM_DMHZF8550BTGS_ID_A	(GS model) Indonesian
OPM_DMHZF8550BTGS_AR_A	(GS model) Arabic
OPM_DMHZF8550BTGS_FA_A	(GS model) Persian

Above operation manuals are supplied in PDF files by the WEB.

Regarding the availability of paper manual, contact Pioneer Service representative in your region.

9.2 EXTERIOR (1)

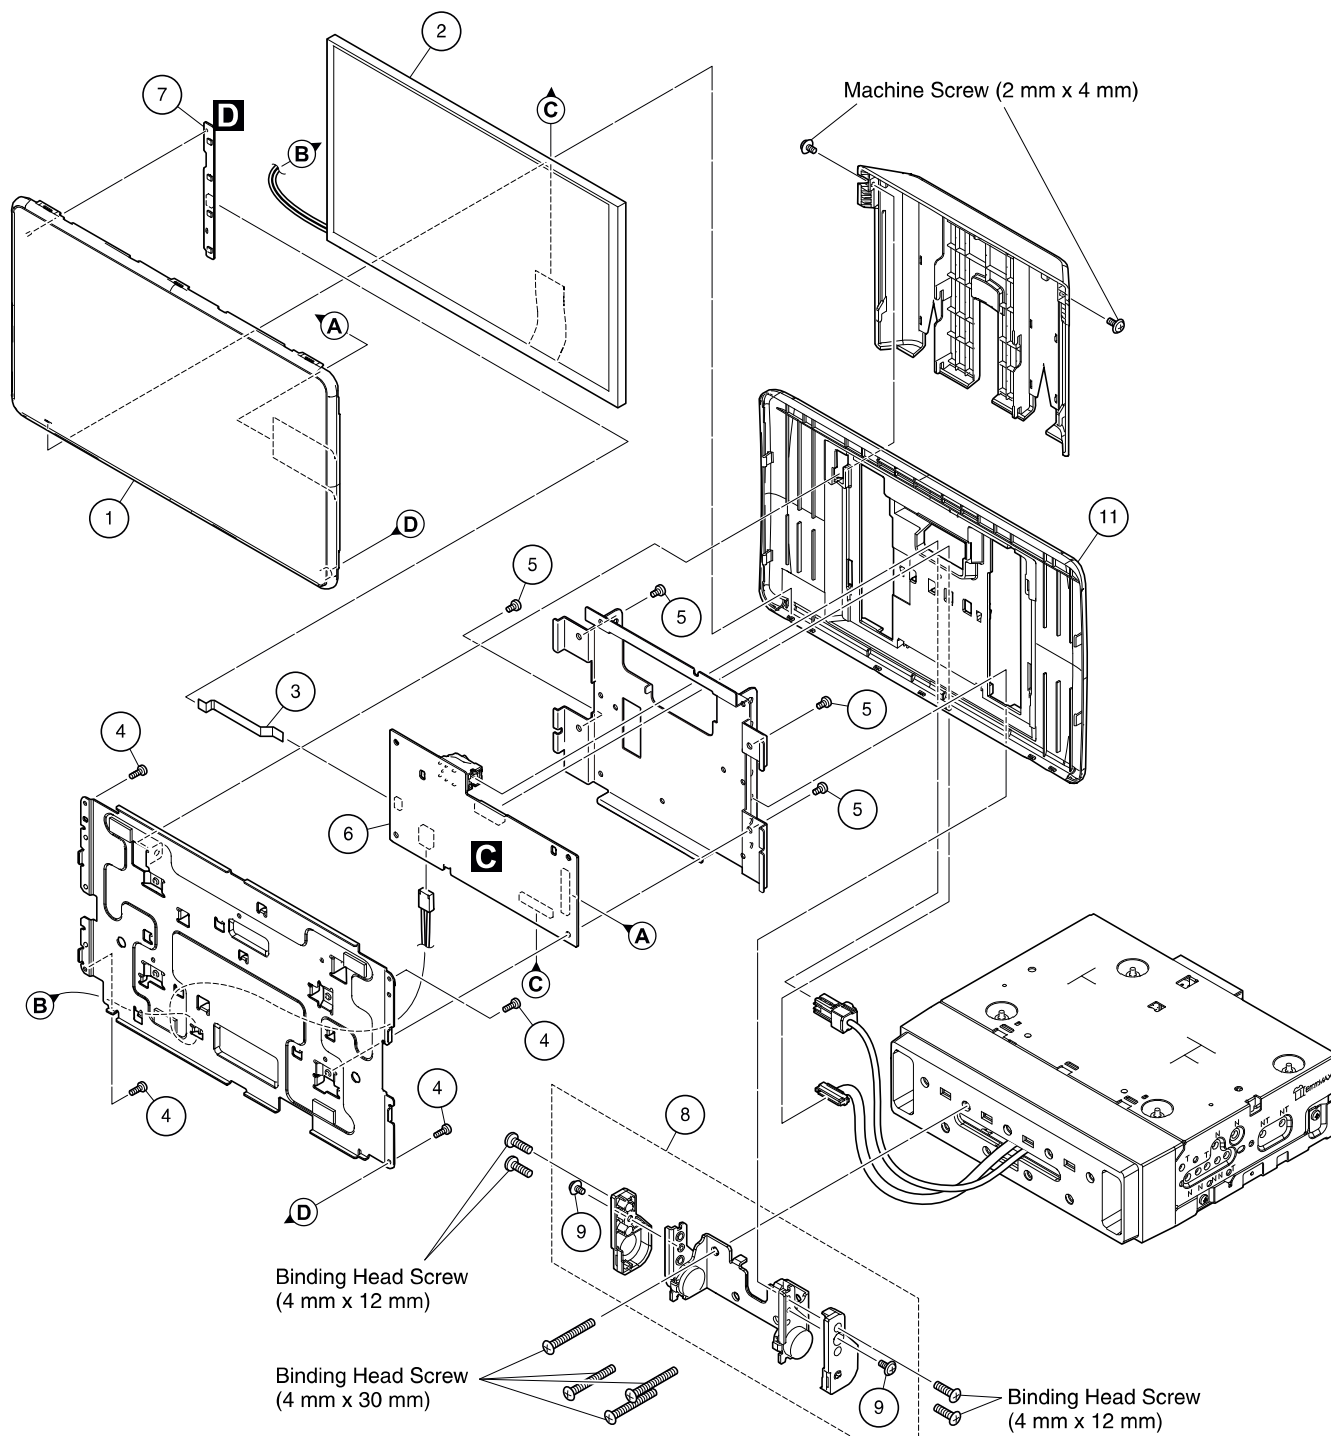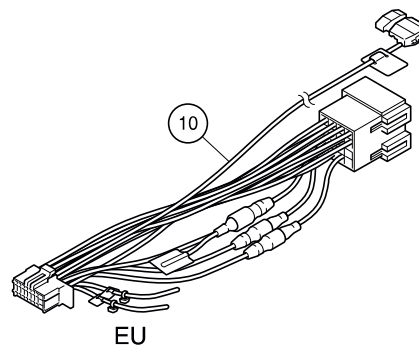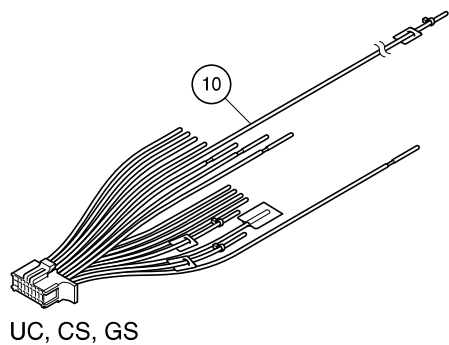

(1) EXTERIOR (1) SECTION PARTS LIST

<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
1	Grille ASSY	CXF3833
2	TFT LCD	CWX5098
3	FFC	CDD1317
4	Screw	BPZ20P060FTC
5	Screw	ASZ26P050FTC
6	Service Unit (Monitor)	CXY8371
7	Service Unit (Key)	CXY8372
8	Frame ASSY	CXF3972
9	Screw	ISS26P055FTC
10	PWS CONN-CORD	See Contrast table (2)
11	Cover	CNU4679

(2) CONTRAST TABLE

DMH-WT3800NEX/XNUC, DMH-WT38/XNUC, SPH-EVO950DAB/XNEU, DMH-ZF8550BT/XNCS and DMH-ZF8550BT/XNGS are constructed the same except for the following:

Mark	No.	Description	DMH-WT3800NEX /XNUC	DMH-WT38 /XNUC	SPH-EVO950DAB /XNEU	DMH-ZF8550BT /XNCS	DMH-ZF8550BT /XNGS
	10	PWS CONN-CORD	CDP1666	CDP1666	CDP1901	CDP1666	CDP1666

1

2

3

4

9.3 EXTERIOR (2)

A


B

C

D

E

F

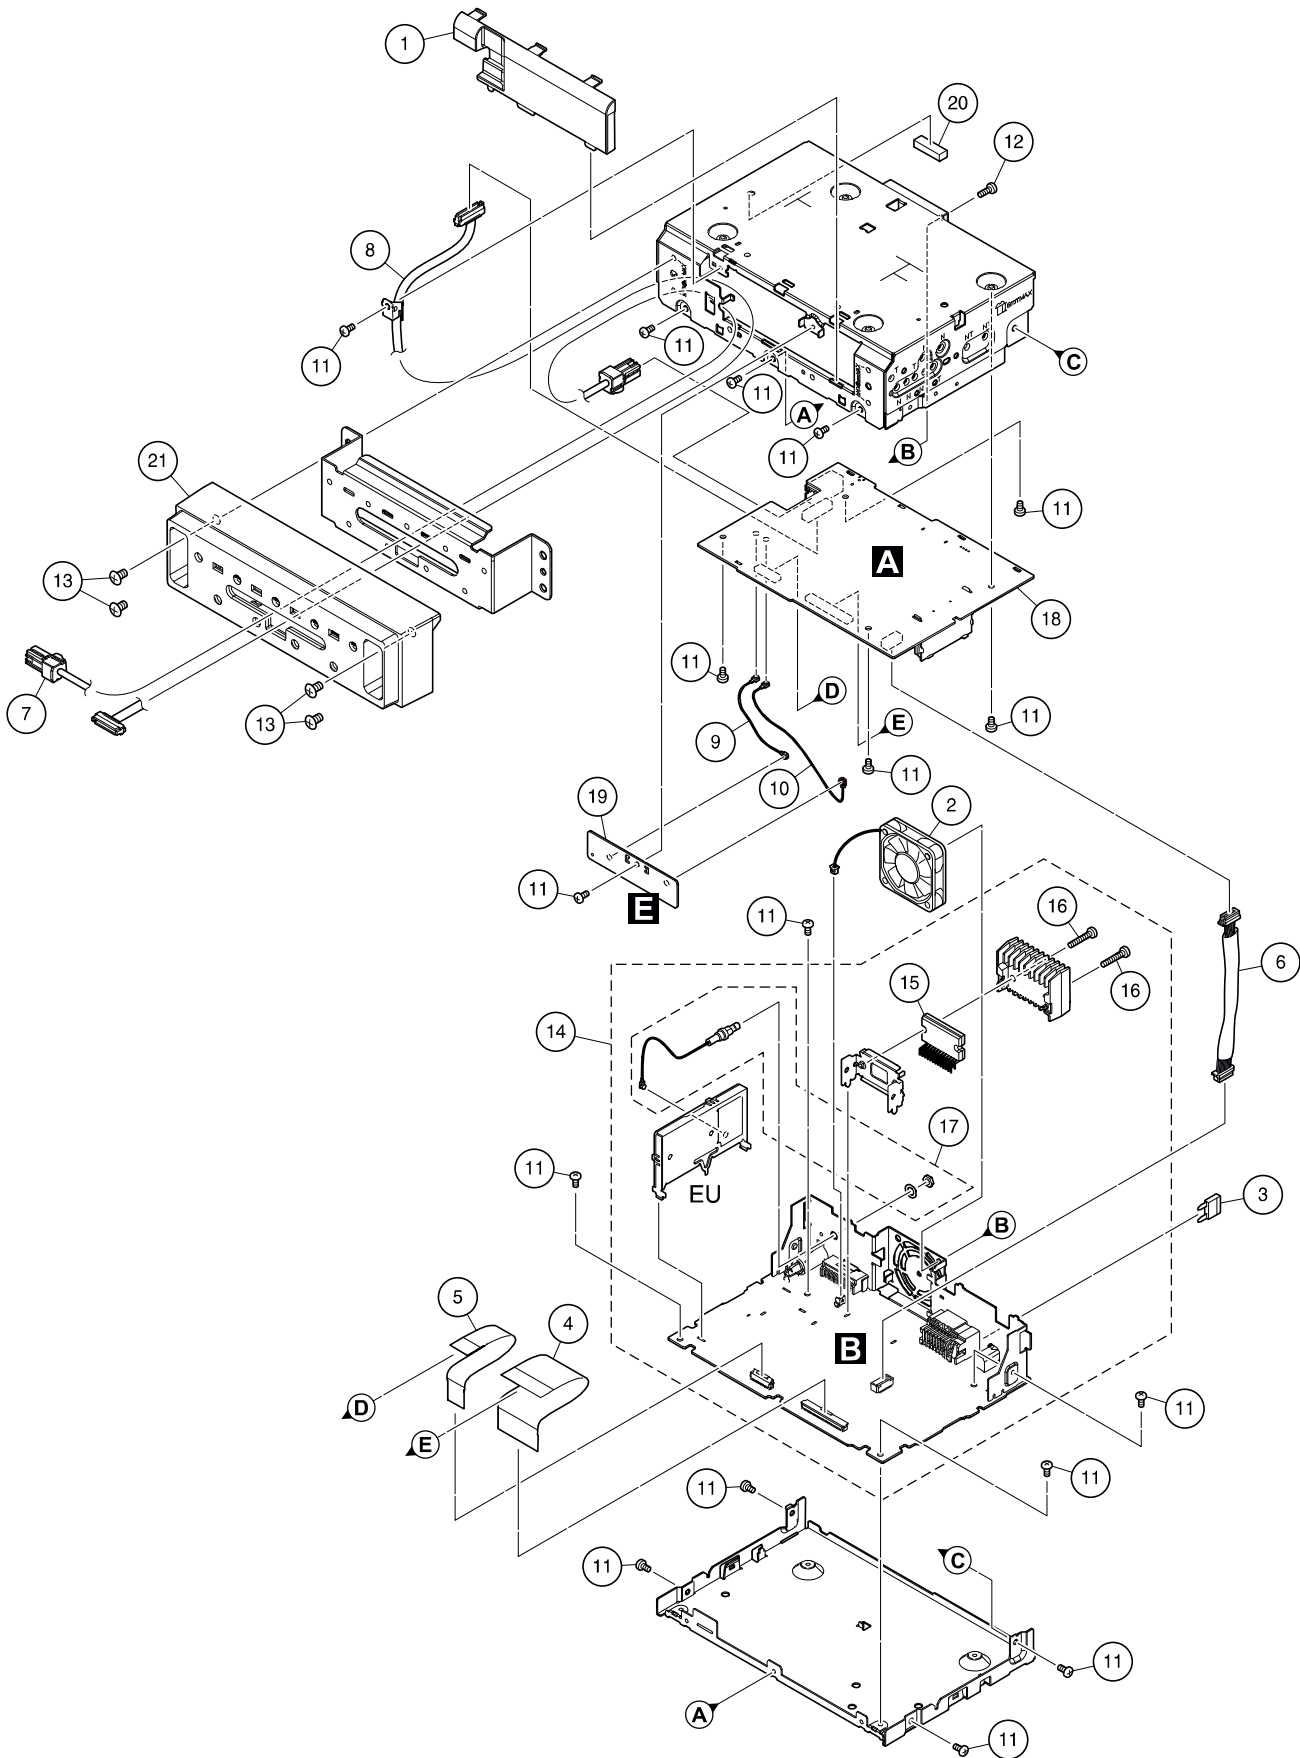

(1) EXTERIOR (2) SECTION PARTS LIST

<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>	<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
1	Panel	CNU4682	11	Screw	BSZ26P060FTC
2	Fan Motor	CXM1476	12	Screw	BPZ30P080FTC
 3	Fuse (10 A)	YEK5001	13	Screw (M4 x 6)	CBA2425
4	FFC	CDD1352	14	Service Unit (AV)	See Contrast table (2)
5	FFC	CDD1353	15	Power AMP IC	TCB501HQ
6	CMPX CONN-CORD ASSY	CDF1396	16	Screw	BSZ26P160FTC
7	CMPX CONN-CORD	CDF1418	17	Antenna Pigtail Cable ASSY	See Contrast table (2)
8	CMPX CONN-CORD	CDF1419	18	Service Unit (Media)	See Contrast table (2)
9	Coaxial Cable	CDE9709	19	Service Unit (Antenna)	CXY8373
10	Coaxial Cable	CDE9710	20	Gasket	See Contrast table (2)
			21	Grille	CNU4678

(2) CONTRAST TABLE

DMH-WT3800NEX/XNUC, DMH-WT38/XNUC, SPH-EVO950DAB/XNEU, DMH-ZF8550BT/XNCS and DMH-ZF8550BT/XNGS are constructed the same except for the following:

Mark	No.	Description	DMH-WT3800NEX /XNUC	DMH-WT38 /XNUC	SPH-EVO950DAB /XNEU	DMH-ZF8550BT /XNCS	DMH-ZF8550BT /XNGS
	14	Service Unit (AV)	CXY8359	CXY8360	CXY8365	CXY8362	CXY8361
	17	Antenna Pigtail Cable ASSY	Not used	Not used	CXE7975	Not used	Not used
	18	Service Unit (Media)	CXY8366	CXY8367	CXY8370	CXY8369	CXY8368
	20	Gasket	Not used	Not used	CNN5927	Not used	Not used