



DPX-3030/MP4030

EXPLODED VIEW (CASSETTE MECHANISM)

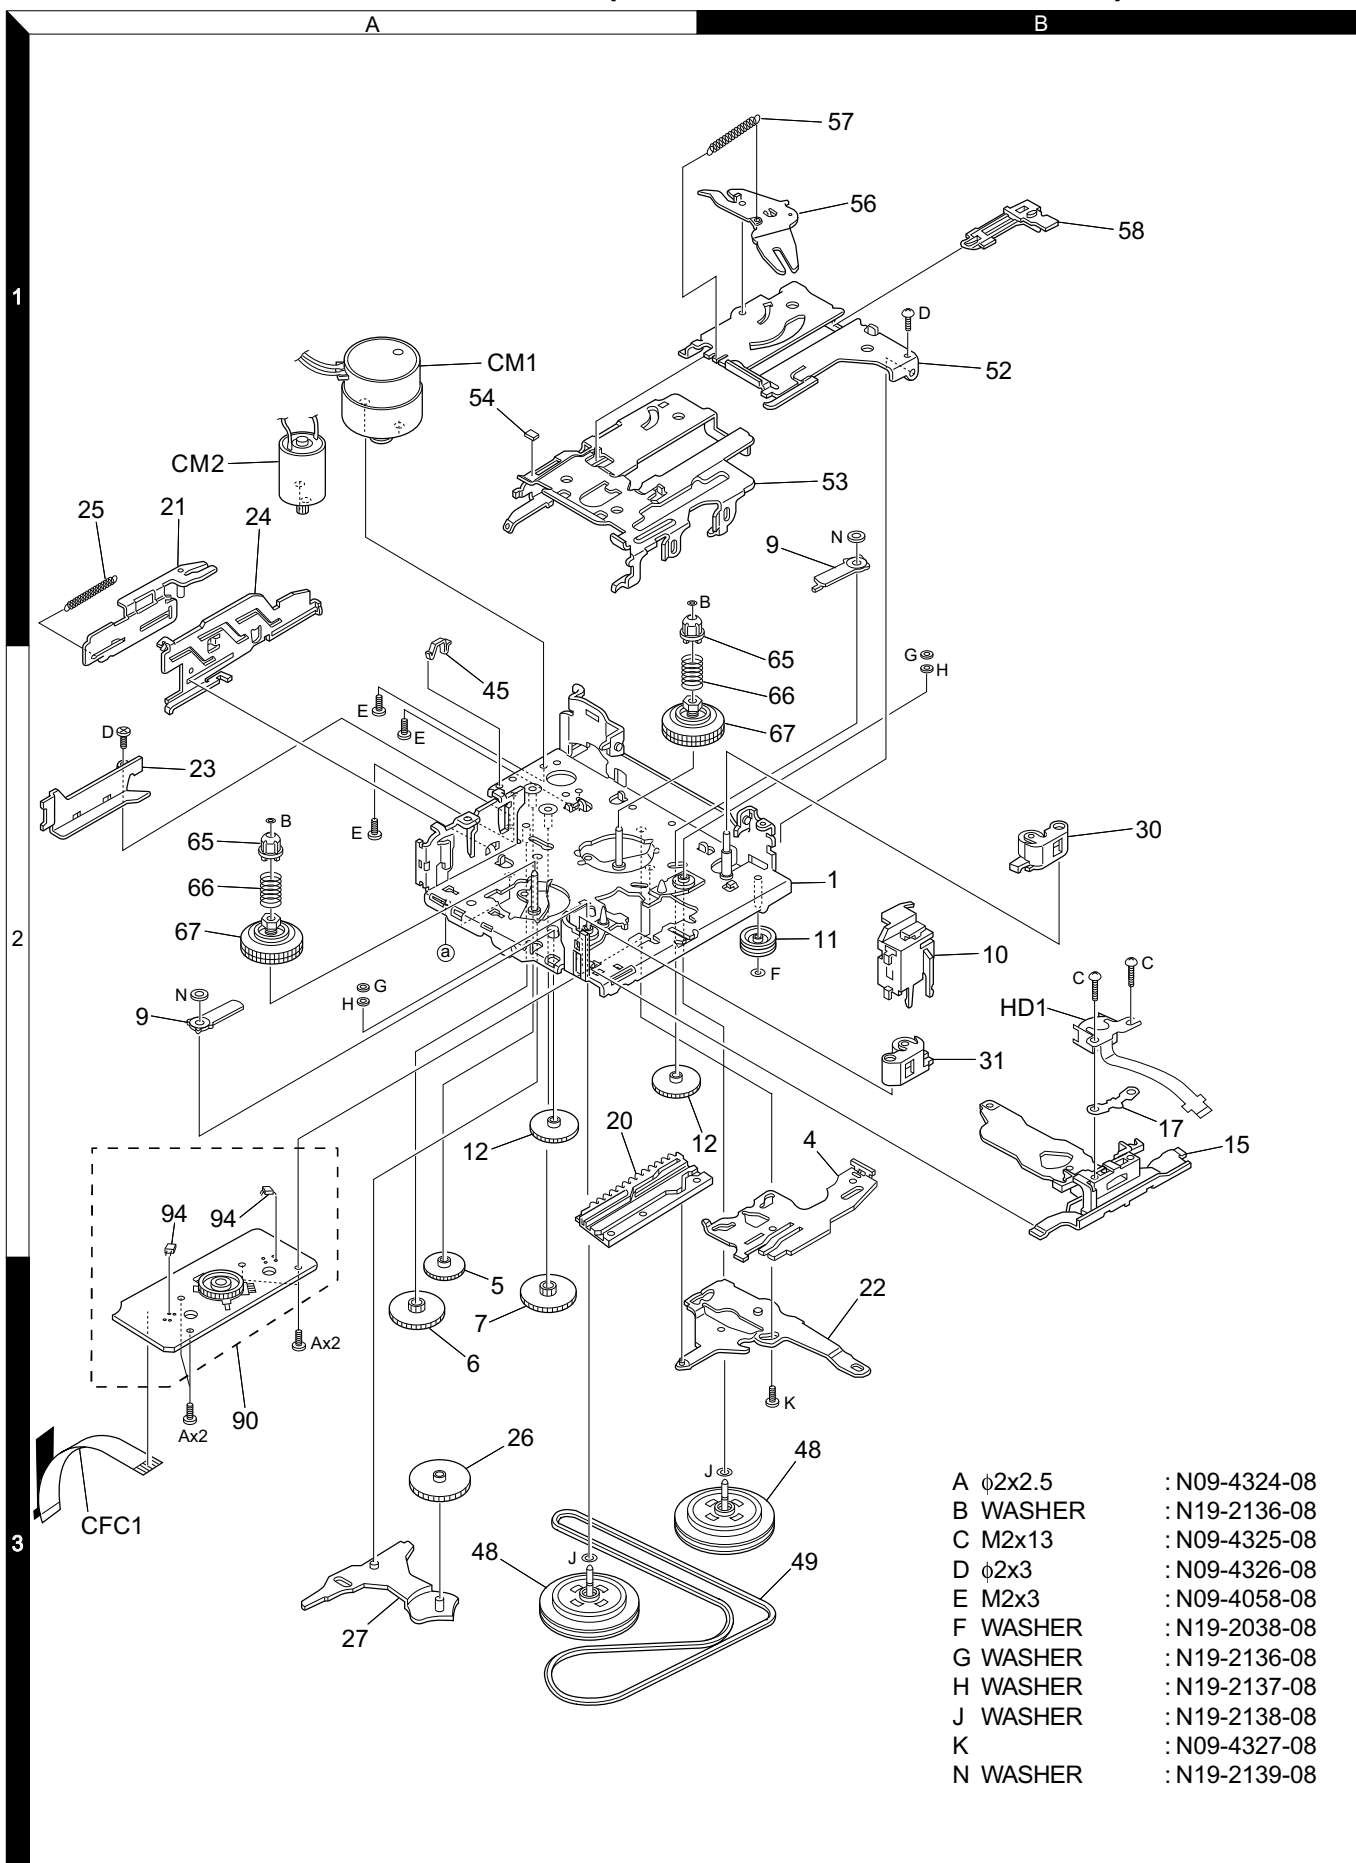

DPX-3030/MP4030




Parts with the exploded numbers larger than 700 are not supplied.

DPX-3030/MP4030

EXPLODED VIEW (PANEL)

A M2x2.5	: N09-4349-05
B M3x8	: N09-4433-08
C M2.6x6	: N30-2606-46
D M3x8	: N30-3008-46
E $\phi 2 \times 6$	: N82-2006-46
G $\phi 3 \times 6$	: N84-3006-46
H $\phi 2.6 \times 8$	: N86-2608-46
J $\phi 3 \times 6$	: N86-3006-41

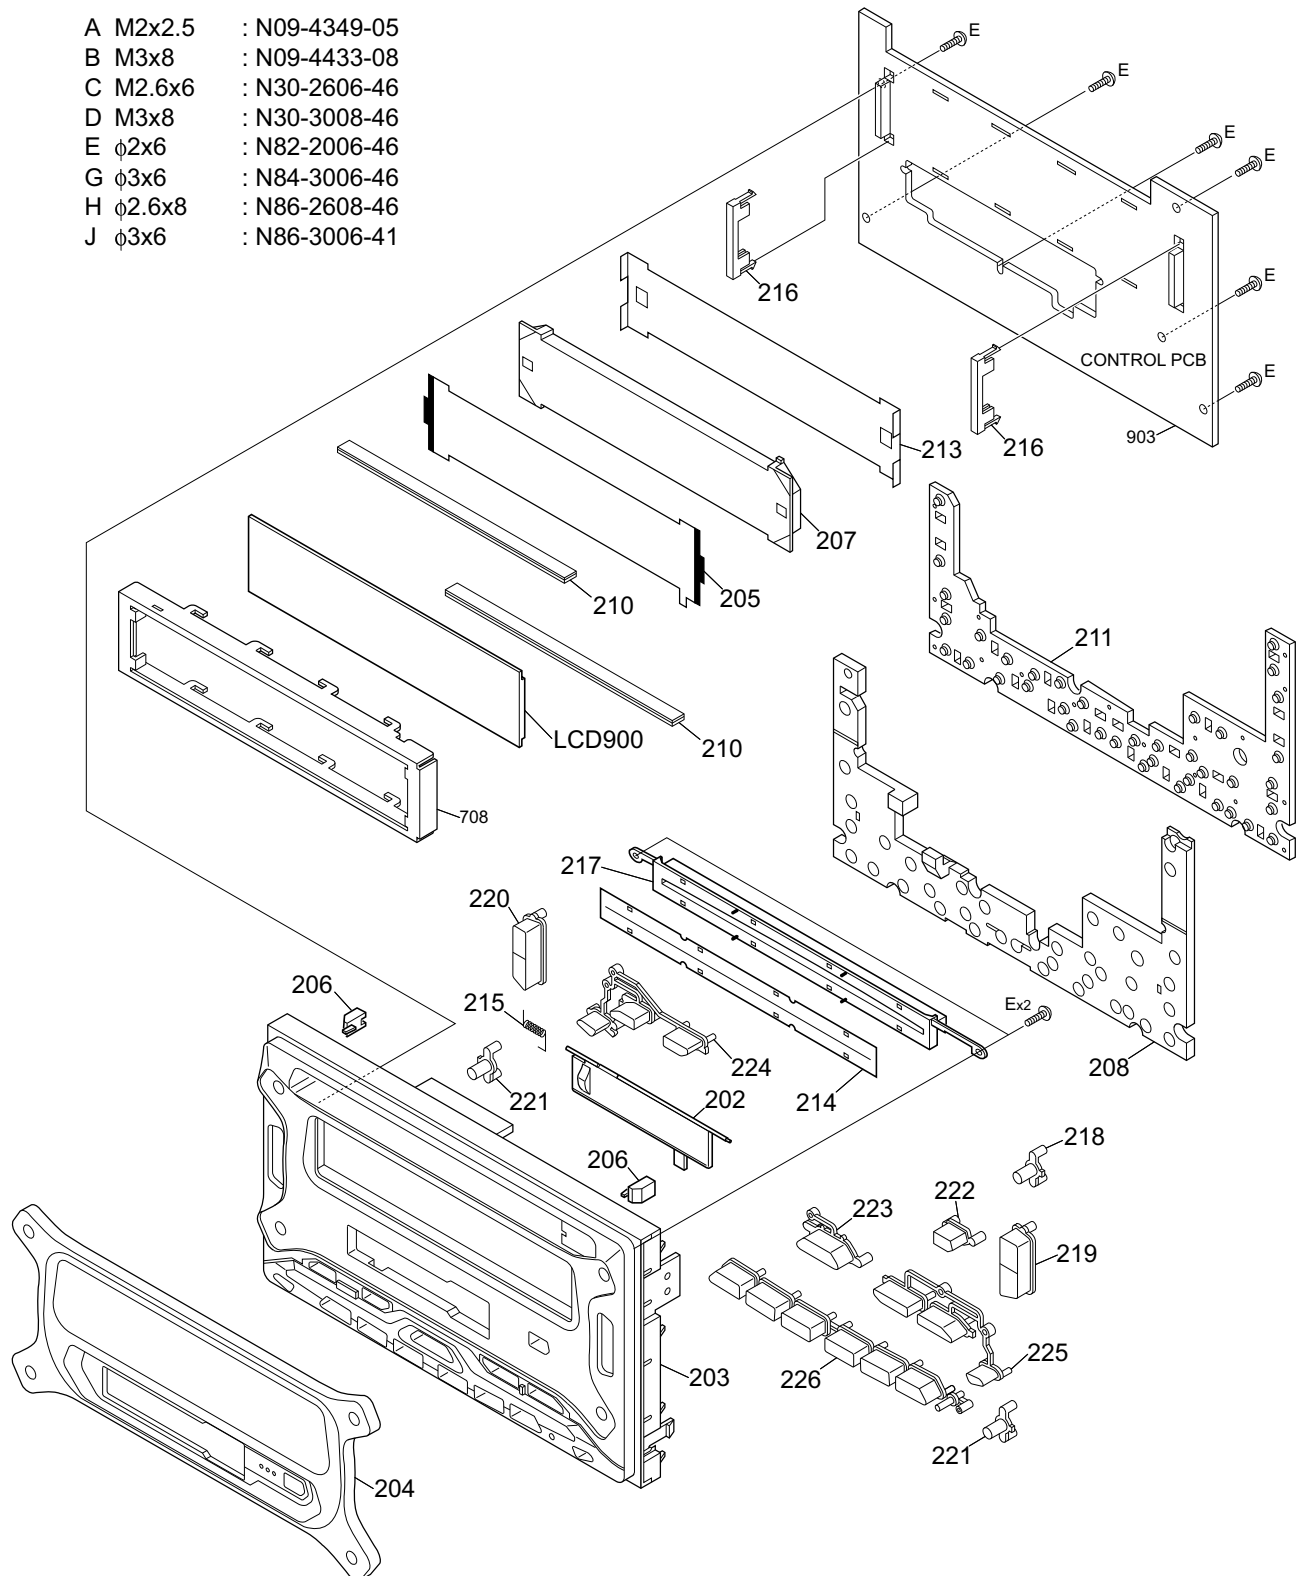

Parts with the exploded numbers larger than 700 are not supplied.

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
DPX-3030/DPX-MP4030					
201	1C	*	A52-0743-18	TOP PLATE	M K,M2
202	3E	*	A53-1711-08	CASSETTE LID	
203	3E	*	A64-2970-08	PANEL	
203	3E	*	A64-2971-08	PANEL	
204	3E	*	B10-4377-08	FRONT GLASS ASS'Y	M K,M2
204	3E	*	B10-4378-08	FRONT GLASS ASS'Y	
205	1F	*	B11-1394-08	OPTICAL DIFFUSER	
206	2E	*	B19-2016-08	LIGHTING BOARD	
207	1F	*	B19-2194-08	LIGHTING BOARD	
208	2F	*	B19-2195-08	LIGHTING BOARD	
209	2D	*	E30-4927-08	AUDIO CORD	
210	2E	*	E29-1922-08	CONDUCTIVE RUBBER	M K,M2
211	2F	*	E29-1923-08	CONDUCTIVE RUBBER	
212	2D	*	F29-0049-05	INSULATING COVER	
213	1F	*	F09-1780-08	SHEET	K,M2
214	2F	*	F19-1350-08	COVER	
215	2E	*	G09-2052-08	SPRING	K,M2
216	1F	*	J19-5192-08	HOLDER	
217	2F	*	J90-0962-08	GUIDE	
218	3F	*	K24-3988-08	KNOB CD EJECT	
219	3F	*	K24-3989-08	KNOB FM/AM	K,M2
220	2E	*	K24-3990-08	KNOB VOLUME	
221	2E	*	K24-3991-08	KNOB DISP/COLOR	
222	3F	*	K24-3992-08	KNOB CASSETTE EJECT	
223	3F	*	K24-3993-08	KNOB SRC	K,M2
224	2F	*	K25-1515-08	KNOB DSP/EQ/ATT	
225	3F	*	K25-1516-08	KNOB SEEK (SKIP)	
226	3F	*	K25-1517-08	KNOB PRESET (1-6)	
270	1D	*	A70-2025-05	REMOTE CONTROLLER (RC-410)	M,M2
271	1D	*	B07-3046-04	ESCUTCHEON ASS'Y	
272	1D	*	E30-4860-08	DC CORD ASS'Y	
273		*	N99-1724-05	SCREW SET	
274		*	W09-0746-08	MOUNTING PARTS SET K	K,M2
FC1	2C	*	E39-0533-08	FLAT CABLE 24PIN	
FC2	2C	*	E39-0534-08	FLAT CABLE 22PIN	
FC3	2C	*	E39-0535-08	FLAT CABLE 22PIN	
△ F1	3D	*	F06-1032-05	FUSE 10A	K,M2
-		*	B46-0100-50	WARRANTY CARD	
-		*	B46-0606-04	ID CARD	
-		*	B58-1365-04	CAUTION CARD	

Ref. No.	Add	New	Parts No.	Description	Destination
-		*	B64-2319-00	INST.MANUAL (ENG,T-CHI)	M,M2
-		*	B64-2320-00	INST.MANUAL (ARA)	M,M2
-		*	B64-2321-00	INST.MANUAL (KOR)	M,M2
-		*	B64-2322-00	INST.MANUAL (ENG,FRE,SPA)	K
-		*	H10-4841-08	POLYSTYRENE FOAMED FIXTURE (L)	M
-		*	H10-4842-08	POLYSTYRENE FOAMED FIXTURE (R)	
-			H11-1522-08	POLYSTYRENE FOAMED BOARD (BACK)	
-			H25-0336-04	PROTECTION BAG (170X290)	
-			H25-1127-04	PROTECTION BAG	
-		*	H54-2576-08	ITEM CARTON CASE DPX-3030	M
-		*	H54-2577-08	ITEM CARTON CASE DPX-MP4030	K
-		*	H54-2578-08	ITEM CARTON CASE DPX-MP4030	M2
CME1	1D	*	D40-1179-08	MECHANISM ASS'Y TN708	M K,M2
DME1	1C		X92-4430-03	MECHANISM ASS'Y DXM-6013	
DME1	1C		X92-4460-03	MECHANISM ASS'Y DXM-6403	
A	1C		N09-4349-05	TAPTITE SCREW	K,M2
B	2D		N09-4433-08	TAPPING SCREW	
C	2E		N30-2606-46	PAN HEAD MACHINE SCREW	
D	3D		N30-3008-46	PAN HEAD MACHINE SCREW	
E	1F		N82-2006-46	BINDING HEAD TAPTITE SCREW	
G	1C		N84-3006-46	PAN HEAD TAPTITE SCREW	K,M2
H	3D		N86-2608-46	BINDING HEAD TAPTITE SCREW	
J	2D		N86-3006-41	PAN HEAD TAPTITE SCREW	
MAIN PWB UNIT					
C1			CK73GB1H103K	CHIP C 0.010UF	K
C2			CE04CW1A101M	ELECTRO 100UF	10WV
C6,7			CC73GCH1H220J	CHIP C 22PF	J
C8			C90-2610-05	ELECTRO 2.2UF	50WV
C12			CK73GB1H103K	CHIP C 0.010UF	K
C15,16			CK73GB1H103K	CHIP C 0.010UF	K
C41			CK73GB1H103K	CHIP C 0.010UF	K
C72-74			CK73GB1H103K	CHIP C 0.010UF	K
C100			CK73GB1H102K	CHIP C 1000PF	K
C101			C90-2949-08	ELECTRO 470UF	10WV
C102			CK73GB1H103K	CHIP C 0.010UF	K
C103			C90-2597-05	ELECTRO 10UF	16WV
C104			CK73GB1H103K	CHIP C 0.010UF	K
C105A,B			CK73GB1H123K	CHIP C 0.012UF	K
C106A,B			C90-2606-05	ELECTRO 0.47UF	50WV
C151			C90-5225-08	ELECTRO 0.1UF	50WV
C152,153			CK73GB1H103K	CHIP C 0.010UF	K
C154			C90-2949-08	ELECTRO 470UF	10WV
C155,156			CC73GCH1H150J	CHIP C 15PF	J
C157			CK73GB1H103K	CHIP C 0.010UF	K
C158			C90-2597-05	ELECTRO 10UF	16WV
C159			CC73GCH1H331J	CHIP C 330PF	J
C160			CK73GB1H102K	CHIP C 1000PF	K
C161			CC73GCH1H331J	CHIP C 330PF	J
C201A,B			CC73GCH1H471J	CHIP C 470PF	J
C203A,B			CC73GCH1H471J	CHIP C 470PF	J
C205A,B			CC73GCH1H100D	CHIP C 10PF	D
C206A,B			CC73GCH1H100D	CHIP C 10PF	D

K : DPX-MP4030 (North America)

M : DPX-3030 (Other Areas)

M2 : DPX-MP4030 (Other Areas)

△ Indicates safety critical components.

DPX-3030/MP4030

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.

Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

MAIN PWB UNIT

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation	Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
C207A,B C208 C209A,B C210A,B C211			CK73GB1H103K CE04CW1C220M CK73GB1H102K CE04CW1H0R1M CE04CW1C220M	CHIP C 0.010UF K ELECTRO 22UF 16WV CHIP C 1000PF K ELECTRO 0.1UF 50WV ELECTRO 22UF 16WV		C508 C509 C510 C601 C602,603			C90-2877-08 C90-2550-05 C90-2877-08 C90-5328-08 CK73GB1H104K	ELECTRO 1.0UF 50WV ELECTRO 100UF 10WV ELECTRO 1.0UF 50WV ELECTRO 3900UF 16WV CHIP C 0.10UF K	
C212A,B C213A,B C214 C215 C216			C90-2600-05 CK73GB1H104K CK73FB1C474K CK73GB1H472K CK73GB1H104K	ELECTRO 2.2UF 35WV CHIP C 0.10UF K CHIP C 0.47UF K CHIP C 4700PF K CHIP C 0.10UF K		C604 C605 C606 C611 C612,613			CE04CW1H3R3M CK73GB1H683K CE04CW1H0R1M CK73GB1H102K CK73GB1H103K	ELECTRO 3.3UF 50WV CHIP C 0.068UF K ELECTRO 0.1UF 50WV CHIP C 1000PF K CHIP C 0.010UF K	
C217 C251 C252-254 C255 C256			CK73FB1A225K CK73GB1H104K CK73GB1H473K CK73GB1H104K CK73GB1H473K	CHIP C 2.2UF K CHIP C 0.10UF K CHIP C 0.047UF K CHIP C 0.10UF K CHIP C 0.047UF K		C614 C615 C651 C652 C653			CK73FB1A105K C93-1151-08 CE04CW1A101M CK73GB1H103K C90-2597-05	CHIP C 1.0UF K CHIP C 0.022UF K ELECTRO 100UF 10WV CHIP C 0.010UF K ELECTRO 10UF 16WV	
C301 C302 C309A,B C311A,B C312			CK73GB1H103K CE04CW1C470M CK73GB1H104K C90-2600-05 CK73FB1A225K	CHIP C 0.010UF K ELECTRO 47UF 16WV CHIP C 0.10UF K ELECTRO 2.2UF 35WV CHIP C 2.2UF K		C654 C656 C657 C658 C659			CE04DW1C471M CE04CW1A101M CK73GB1H104K CE04CW1A101M CK73GB1H104K	ELECTRO 470UF 16WV ELECTRO 100UF 10WV CHIP C 0.10UF K ELECTRO 100UF 10WV CHIP C 0.10UF K	
C315A,B C316A,B C317A,B C320 C321,322			C90-5226-08 C90-5226-08 C90-5226-08 CK73GB1H102K CK73GB1H683K	ELECTRO 1UF 50WV ELECTRO 1UF 50WV ELECTRO 1UF 50WV CHIP C 1000PF K CHIP C 0.068UF K		C660 C661 C662 C663			CE04CW1C101M CK73GB1H104K C90-2597-05 CK73GB1H103K	ELECTRO 100UF 16WV CHIP C 0.10UF K ELECTRO 10UF 16WV CHIP C 0.010UF K	
C323 C324 C325 C326 C327			CK73GB1H472K CK73GB1H102K CK73GB1A224K CE04CW1A221M CK73GB1A154K	CHIP C 4700PF K CHIP C 1000PF K CHIP C 0.22UF K ELECTRO 220UF 10WV CHIP C 0.15UF K		DSP101			DSP-201M-S00B	SURGE ABSORBER	
C328 C329 C330 C331 C332			C90-2610-05 CK73GB1H472K CK73GB1A224K CK73GB1H104K CE04CW1A101M	ELECTRO 2.2UF 50WV CHIP C 4700PF K CHIP C 0.22UF K CHIP C 0.10UF K ELECTRO 100UF 10WV		CN1 CN2 CN201 CN251 CN301			E40-9603-08 E41-0388-08 E41-0050-08 E41-0051-08 E41-0387-08	PIN ASS'Y 16PIN FLAT CABLE CONNECTOR 22PIN FLAT CABLE CONNECTOR 5PIN FLAT CABLE CONNECTOR 11PIN FLAT CABLE CONNECTOR 8PIN	
C333,334 C351 C352 C353,354 C355,356			C90-2610-05 CK73GB1H472K CK73GB1A224K CK73GB1H104K CE04CW1A101M CK73FF1A475Z	ELECTRO 2.2UF 50WV CHIP C 4700PF K CHIP C 0.22UF K CHIP C 0.10UF K ELECTRO 100UF 10WV CHIP C 4.7UF Z		CN401 CN601 J101			E56-0834-05 E03-0403-08 E04-0323-08	DIN 13PIN DC JACK 16PIN RF COAXIAL CABLE RECEPTACLE	
C357 C358,359 C361,362 C381 C382			CK73GB1H332K C90-2597-05 C90-2597-05 CE04CW1C220M CK73GB1H103K	CHIP C 3300PF K ELECTRO 10UF 16WV ELECTRO 10UF 16WV ELECTRO 22UF 16WV CHIP C 0.010UF K		L1 L2-4 L101 L102 L103			L33-1127-08 L92-0372-08 L33-1112-08 L33-1123-05 L33-1111-08	SMALL FIXED INDUCTOR CHIP FERRITE CHOKE COIL LINE FILTER COIL CHOKE COIL	
C383,384 C401A,B C402A,B C403 C406,407			CE04CW1A101M C90-2606-05 CK73GB1H102K CE04CW1C470M CK73FB1H104K	ELECTRO 100UF 10WV ELECTRO 0.47UF 50WV CHIP C 1000PF K ELECTRO 47UF 16WV CHIP C 0.10UF K		L104 L151 L301 L331 L601			L92-0372-08 L92-0372-08 L33-1127-08 L40-4705-34 L33-1905-08	CHIP FERRITE CHIP FERRITE SMALL FIXED INDUCTOR SMALL FIXED INDUCTOR CHOKE COIL	
C501A,B C502A,B C503A,B C504A,B C505,506			CK73FB1C474K CK73FB1C474K CK73FB1C474K CK73FB1C474K CK73FB1A225K	CHIP C 0.47UF K CHIP C 0.47UF K CHIP C 0.47UF K CHIP C 0.47UF K CHIP C 2.2UF K		X1 X2 X151			L78-0592-08 L78-0533-05 L77-2762-08	RESONATOR 8.38MHz RESONATOR 32.768KHz CRYSTAL RESONATOR 7.2MHZ	
						R1 R2,3 R4 R5,6 R7-9			R92-1252-05 RK73GB1J102J RK73GB1J154J RK73GB1J473J RK73GB1J102J	CHIP R 0 OHM J 1/16W CHIP R 1.0K J 1/16W CHIP R 150K J 1/16W CHIP R 47K J 1/16W CHIP R 1.0K J 1/16W	
						R11 R13-19			RK73GB1J473J RK73GB1J473J	CHIP R 47K J 1/16W CHIP R 47K J 1/16W	

K : DPX-MP4030 (North America)

M : DPX-3030 (Other Areas)

M2 : DPX-MP4030 (Other Areas)

△ Indicates safety critical components.

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

MAIN PWB UNIT

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation	Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
R21			RK73GB1J473J	CHIP R 47K J 1/16W		R251,252			RD14DB2H100J	SMALL-RD 10 J 1/2W	
R23			RK73GB1J102J	CHIP R 1.0K J 1/16W		R253			RD14BB2E101J	RD 100 J 1/4W	
R24			RK73GB1J101J	CHIP R 100 J 1/16W		R254,255			RK73GB1J473J	CHIP R 47K J 1/16W	
R25			RK73GB1J472J	CHIP R 4.7K J 1/16W		R256			RK73GB1J121J	CHIP R 120 J 1/16W	
R26			RK73GB1J473J	CHIP R 47K J 1/16W		R304A,B			RK73GB1J394J	CHIP R 390K J 1/16W	
R27			RK73GB1J104J	CHIP R 100K J 1/16W		R305			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R28			RK73GB1J102J	CHIP R 1.0K J 1/16W		R331			R90-0724-05	MULTI-COMP 1K X4	
R30			RK73GB1J102J	CHIP R 1.0K J 1/16W		R332			RK73GB1J223J	CHIP R 22K J 1/16W	
R31			RK73GB1J473J	CHIP R 47K J 1/16W		R351			RK73GB1J392J	CHIP R 3.9K J 1/16W	
R32			RK73GB1J223J	CHIP R 22K J 1/16W		R352			RK73GB1J822J	CHIP R 8.2K J 1/16W	
R33			RK73GB1J102J	CHIP R 1.0K J 1/16W		R353			RK73GB1J103J	CHIP R 10K J 1/16W	
R34			RK73GB1J104J	CHIP R 100K J 1/16W		R354			RK73GB1J104J	CHIP R 100K J 1/16W	
R35			RK73GB1J471J	CHIP R 470 J 1/16W		R355			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R36			RK73GB1J473J	CHIP R 47K J 1/16W		R356			RK73GB1J242J	CHIP R 2.4K J 1/16W	
R37-39			RK73GB1J472J	CHIP R 4.7K J 1/16W		R357			RK73GB1J333J	CHIP R 33K J 1/16W	
R41,42			RK73GB1J472J	CHIP R 4.7K J 1/16W		R358			RK73GB1J471J	CHIP R 470 J 1/16W	
R45			RK73GB1J471J	CHIP R 470 J 1/16W		R359			RK73GB1J105J	CHIP R 1.0M J 1/16W	
R46			RK73GB1J473J	CHIP R 47K J 1/16W		R360			RK73GB1J473J	CHIP R 47K J 1/16W	
R47			RK73GB1J471J	CHIP R 470 J 1/16W		R361			RK73GB1J100J	CHIP R 10 J 1/16W	
R48			RK73GB1J473J	CHIP R 47K J 1/16W		R362,363			RK73GB1J274J	CHIP R 270K J 1/16W	
R52,53			RK73GB1J102J	CHIP R 1.0K J 1/16W		R364			RK73GB1J124J	CHIP R 120K J 1/16W	
R54			R92-1252-05	CHIP R 0 OHM J 1/16W		R365			RK73GB1J473J	CHIP R 47K J 1/16W	
R55,56			RK73GB1J102J	CHIP R 1.0K J 1/16W		R366			RK73GB1J392J	CHIP R 3.9K J 1/16W	
R71			RK73GB1J104J	CHIP R 100K J 1/16W		R367			RK73GB1J103J	CHIP R 10K J 1/16W	
R72			RK73GB1J222J	CHIP R 2.2K J 1/16W		R368			RK73GB1J223J	CHIP R 22K J 1/16W	
R73			RK73GB1J473J	CHIP R 47K J 1/16W		R381-383			RK73GB1J473J	CHIP R 47K J 1/16W	
R74			RK73GB1J471J	CHIP R 470 J 1/16W		R384			RK73GB1J100J	CHIP R 10 J 1/16W	
R75			RK73GB1J473J	CHIP R 47K J 1/16W		R385-387			RK73GB1J473J	CHIP R 47K J 1/16W	
R76			RK73GB1J471J	CHIP R 470 J 1/16W		R401A,B			RK73FB2A101J	CHIP R 100 J 1/10W	
R77			RK73GB1J473J	CHIP R 47K J 1/16W		R402,403			RK73FB2A470J	CHIP R 47 J 1/10W	
R78			RK73GB1J471J	CHIP R 470 J 1/16W		R404			RK73FB2A222J	CHIP R 2.2K J 1/10W	
R102,103			RK73GB1J101J	CHIP R 100 J 1/16W		R405			RK73FB2A102J	CHIP R 1.0K J 1/10W	
R104			RK73GB1J104J	CHIP R 100K J 1/16W		R406			RK73FB2A222J	CHIP R 2.2K J 1/10W	
R151			RK73GB1J183J	CHIP R 18K J 1/16W		R407,408			RK73FB2A472J	CHIP R 4.7K J 1/10W	
R152			RK73GB1J332J	CHIP R 3.3K J 1/16W		R409			RK73FB2A470J	CHIP R 47 J 1/10W	
R153			RK73GB1J181J	CHIP R 180 J 1/16W		R501A,B			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R154			RK73GB1J222J	CHIP R 2.2K J 1/16W		R502A,B			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R156			RK73GB1J473J	CHIP R 47K J 1/16W		R505			RK73GB1J751J	CHIP R 750 J 1/16W	
R157			RK73GB1J222J	CHIP R 2.2K J 1/16W		R506			RK73GB1J431J	CHIP R 430 J 1/16W	
R158			RK73GB1J473J	CHIP R 47K J 1/16W		R507			RK73GB1J333J	CHIP R 33K J 1/16W	
R159			RK73GB1J102J	CHIP R 1.0K J 1/16W		R508			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R160			RK73GB1J222J	CHIP R 2.2K J 1/16W		R509			RK73GB1J101J	CHIP R 100 J 1/16W	
R201A,B			RK73GB1J104J	CHIP R 100K J 1/16W		R510			RK73GB1J223J	CHIP R 22K J 1/16W	
R202A,B			RK73GB1J101J	CHIP R 100 J 1/16W		R511			RK73GB1J562J	CHIP R 5.6K J 1/16W	
R203A,B			RK73GB1J104J	CHIP R 100K J 1/16W		R601			RK73GB1J223J	CHIP R 22K J 1/16W	
R204A,B			RK73GB1J101J	CHIP R 100 J 1/16W		R602,603			R90-1044-08	FL-PROOF RS 1.2K J 1/2W	
R205A,B			RK73GB1J181J	CHIP R 180 J 1/16W		R604			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R206A,B			RK73GB1J101J	CHIP R 100 J 1/16W		R605			RK73GB1J223J	CHIP R 22K J 1/16W	
R207			RK73GB1J223J	CHIP R 22K J 1/16W		R606			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R208			RK73GB1J100J	CHIP R 10 J 1/16W		R607,608			RD14DB2H102J	SMALL-RD 1.0K J 1/2W	
R209			RK73GB1J392J	CHIP R 3.9K J 1/16W		R611			RK73GB1J104J	CHIP R 100K J 1/16W	
R210			RK73GB1J513J	CHIP R 51K J 1/16W		R612			RK73GB1J103J	CHIP R 10K J 1/16W	
R211			RK73GB1J224J	CHIP R 220K J 1/16W		R613			RK73GB1J243J	CHIP R 24K J 1/16W	
R212			RK73GB1J223J	CHIP R 22K J 1/16W		R614			RK73GB1J103J	CHIP R 10K J 1/16W	
R213			R92-1252-05	CHIP R 0 OHM J 1/16W		R615			RK73GB1J104J	CHIP R 100K J 1/16W	

K : DPX-MP4030 (North America)

M : DPX-3030 (Other Areas)

M2 : DPX-MP4030 (Other Areas)

△ Indicates safety critical components.

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

MAIN PWB UNIT

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation	Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
R616			RK73EB2B333J	CHIP R 33K J 1/8W		IC1		*	MN101C49KWB	MI-COM IC	
R617			RK73GB1J103J	CHIP R 10K J 1/16W		IC2		*	PST3438UL	ANALOGUE IC	
R618			RD14DB2H332J	SMALL-RD 3.3K J 1/2W		IC3			HD74HC27FP	MOS-IC	
R619			RK73GB1J104J	CHIP R 100K J 1/16W		IC4			BR24C01AF	MEMORY IC	
R620			RK73EB2B103J	CHIP R 10K J 1/8W		IC151			LC72135M	MOS-IC	
R651			RD14BB2E4R7J	RD 4.7 J 1/4W		IC201			CXA2560Q	ANALOGUE IC	
R652			RK73GB1J223J	CHIP R 22K J 1/16W		IC251			BA6219BFP-Y	ANALOGUE IC	
R653			RK73GB1J152J	CHIP R 1.5K J 1/16W		IC301			TDA7407	ANALOGUE IC	
R655			RK73GB1J222J	CHIP R 2.2K J 1/16W		IC331			M65849BFP	MOS-IC	
R656,657			RK73GB1J102J	CHIP R 1.0K J 1/16W		IC351			NJM4565MD	IC (OP AMP X2)	
R658			RK73GB1J103J	CHIP R 10K J 1/16W		IC352			BA3830F	ANALOGUE IC	
R659			RK73GB1J471J	CHIP R 470 J 1/16W		IC381			BA3131FS	ANALOGUE IC	
R660			RD14DB2H102J	SMALL-RD 1.0K J 1/2W		IC501			TDA7386	ANALOGUE IC	
R661			RK73GB1J103J	CHIP R 10K J 1/16W		Q1			DTA124EUA	TRANSISTOR	
R663			R92-1252-05	CHIP R 0 OHM J 1/16W		Q2			DTA144EUA	TRANSISTOR	
R664			RK73GB1J274J	CHIP R 270K J 1/16W		Q3			DTA124EUA	TRANSISTOR	
RN1,2			R90-0724-05	MULTI-COMP 1K X4		Q101			DTC124EUA	TRANSISTOR	
RN3			R90-1071-08	MULTI-COMP 47 X2		Q102			DTA123JK	TRANSISTOR	
RN4			R90-0724-05	MULTI-COMP 1K X4		Q151			2SK536	FET	
RN5			R90-1020-05	MULTI-COMP 22K X2		Q301			DTC144EUA	TRANSISTOR	
RN7,8			R90-0725-05	MULTI-COMP 1K X2		Q351			DTC343TK	TRANSISTOR	
RN14			R90-1042-08	MULTI-COMP 4.7K X4		Q352			2SC4081	TRANSISTOR	
RN15			R90-0724-05	MULTI-COMP 1K X4		Q502			DTC114YUA	TRANSISTOR	
RN16			R90-1043-08	MULTI-COMP 4.7K X2		Q601			2SA1703-AN	TRANSISTOR	
RN17,18			R90-0724-05	MULTI-COMP 1K X4		Q602			DTC114YUA	TRANSISTOR	
RN20-22			R90-0724-05	MULTI-COMP 1K X4		Q603			2SA1703-AN	TRANSISTOR	
RN23			R90-0725-05	MULTI-COMP 1K X2		Q604			2SA1576A	TRANSISTOR	
RN24			R90-1071-08	MULTI-COMP 47 X2		Q605			DTA124EUA	TRANSISTOR	
RN25			R90-0724-05	MULTI-COMP 1K X4		Q606			DTC114EUA	TRANSISTOR	
RN301			R90-1014-05	MULTI-COMP 100 X4		Q611,612			2SC4081	TRANSISTOR	
RN331			RK73GB1J100J	CHIP R 10 J 1/16W		Q613			DTC144EUA	TRANSISTOR	
RN401			R90-0720-05	MULTI-COMP 100K X4		Q650			2SA1703-AN	TRANSISTOR	
VR201A,B			R32-0242-08	SEMI FIXED VARIABLE RESISTOR		Q651			2SC4081	TRANSISTOR	
W1,2			R92-2053-05	CHIP R 0 J 1/8W		Q652			2SB1565(E,F)	TRANSISTOR	
W3			R92-1252-05	CHIP R 0 OHM J 1/16W		Q653			2SC4081	TRANSISTOR	
W5,6			R92-1252-05	CHIP R 0 OHM J 1/16W		Q654		*	IMD3AL	TRANSISTOR	
TH501			TH470	POSITIVE RESISTOR		Q655			2SD1760	TRANSISTOR	
D251			RD3.9E(B1)	ZENER DIODE		Q656			2SB1565(E,F)	TRANSISTOR	
D252			11ES2C	DIODE		Q657			2SC4081	TRANSISTOR	
D351			DA204U	DIODE		Q658			DTA123JK	TRANSISTOR	
D401A,B			HZM6.2ZWA	DIODE		Q659			2SC4081	TRANSISTOR	
D402-406			HZM6.2ZWA	DIODE		Q660			2SB1184	TRANSISTOR	
D502			DAP202U	DIODE		Q663			2SA1703-AN	TRANSISTOR	
D503			1SS400	DIODE		Q664		*	DTC114YUA	TRANSISTOR	
D601			RM10Z	DIODE		Q665			IMD2A	TRANSISTOR	
D602,603			1SR154-400	DIODE		TU101		*	W02-3384-08	FM/AM FRONT-END	
D605,606			1SR154-400	DIODE		SUB PWB UNIT					
D607			1SS400	DIODE		C800			CK73GB1H473K	CHIP C 0.047UF K	
D611,612			HZS7L6C	ZENER DIODE		C801			CE04CW1C470M	ELECTRO 47UF 16WV	
D651		*	SB040	DIODE		C802			CK73GB1H473K	CHIP C 0.047UF K	
D652,653			HZS6B1L	ZENER DIODE		C803			CE04CW1A101M	ELECTRO 100UF 10WV	
D654			MA4091(N)-L	ZENER DIODE		C807			CE04CW1C470M	ELECTRO 47UF 16WV	
D655			HZS12A1L	ZENER DIODE		C808			CK73GB1H473K	CHIP C 0.047UF K	
D656			MA4220-L	ZENER DIODE		C809			CE04CW1A101M	ELECTRO 100UF 10WV	

K : DPX-MP4030 (North America)

M : DPX-3030 (Other Areas)

M2 : DPX-MP4030 (Other Areas)

△ Indicates safety critical components.

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

SUB PWB UNIT

Ref. No.	Added	New	Parts No.	Description	Destination	Ref. No.	Added	New	Parts No.	Description	Destination
C810			CK73GB1H473K	CHIP C 0.047UF K		C908			CK73GB1H104K	CHIP C 0.10UF K	
C811			CK73GB1H102K	CHIP C 1000PF K		C915-917			CK73GB1H103K	CHIP C 0.010UFK	
C812			CK73GB1H473K	CHIP C 0.047UF K							
C813A,B			C90-2610-05	ELECTRO 2.2UF 50WV		CN900			E40-9612-08	PIN ASS'Y 16PIN	
C814			CE04NW1C101M	ELECTRO 100UF 16WV		R900			RK73GB1J101J	CHIP R 100 J 1/16W	
C850			CE04CW1A101M	ELECTRO 100UF 10WV		R901			RK73GB1J100J	CHIP R 10 J 1/16W	
C851			CK73GB1H473K	CHIP C 0.047UF K		R902			RK73GB1J331J	CHIP R 330 J 1/16W	
C853A,B			C90-2597-05	ELECTRO 10UF 16WV		R903			RK73GB1J102J	CHIP R 1.0K J 1/16W	
C854A,B			CK73FB1H222K	CHIP C 2200PF K		R904			RK73GB1J473J	CHIP R 47K J 1/16W	
C856A,B			C90-2597-05	ELECTRO 10UF 16WV							
C857A,B			CK73FB1H222K	CHIP C 2200PF K		R905			RK73GB1J433J	CHIP R 43K J 1/16W	
C890,891			CK73FB1C104K	CHIP C 0.10UF K		R906-909			RK73GB1J472J	CHIP R 4.7K J 1/16W	
						R910-914			RK73GB1J102J	CHIP R 1.0K J 1/16W	
CN800			E40-9605-08	PIN ASS'Y 24PIN		R915-917			RK73GB1J472J	CHIP R 4.7K J 1/16W	
CN801			E40-9608-08	PIN ASS'Y 22PIN		R918,919			RK73EB2B431J	CHIP R 430 J 1/8W	
CN850	*		E41-0389-08	FLAT CABLE CONNECTOR 8PIN		R920,921			RK73EB2B561J	CHIP R 560 J 1/8W	
CN851			E40-3300-05	PIN ASS'Y 3PIN		R922,923			RK73EB2B431J	CHIP R 430 J 1/8W	
CN852			E40-9614-08	PIN ASS'Y 3PIN		R924,925			RK73EB2B561J	CHIP R 560 J 1/8W	
ET800	*		E23-0736-08	TERMINAL 3PIN		R926-931			RK73FB2A391J	CHIP R 390 J 1/10W	
ET850	*		E23-0736-08	TERMINAL 3PIN		R932,933			RK73EB2B561J	CHIP R 560 J 1/8W	
R800			RK73GB1J152J	CHIP R 1.5K J 1/16W		R935			RK73EB2B561J	CHIP R 560 J 1/8W	
R802			RK73GB1J222J	CHIP R 2.2K J 1/16W		RN900,901			R90-0724-05	MULTI-COMP 1K X4	
R850			RK73GB1J100J	CHIP R 10 J 1/16W		W901			R92-2053-05	CHIP R 0 J 1/8W	
R853			RK73GB1J104J	CHIP R 100K J 1/16W							
R854A,B			RK73GB1J682J	CHIP R 6.8K J 1/16W		D902,903			DAN202U	DIODE	
R860A,B			RK73GB1J471J	CHIP R 470 J 1/16W		D904-923			B30-1561-05	LED	
R861A,B			RK73GB1J223J	CHIP R 22K J 1/16W		D924,925			B30-2025-05	LED	
R862A,B			RK73FB2A101J	CHIP R 100 J 1/10W		D926,927			B30-1435-05	LED	
R863A,B			RK73GB1J682J	CHIP R 6.8K J 1/16W		D931			UDZ7.5B	ZENER DIODE	
R866A,B			RK73GB1J471J	CHIP R 470 J 1/16W							
R867A,B			RK73GB1J223J	CHIP R 22K J 1/16W		D951,952			B30-1599-05	LED	
R868A,B			RK73FB2A101J	CHIP R 100 J 1/10W		IC900			LC75808W	MOS-IC	
						IC901			RS-171	ANALOGUE IC	
D800			HZS9A1L	ZENER DIODE		Q900			DTA124EUA	TRANSISTOR	
D801			11ES2C	DIODE		Q902			DTA124EUA	TRANSISTOR	
D802			HZS6B1L	ZENER DIODE							
D852			DAN202U	DIODE		Q903-905			2SC4081	TRANSISTOR	
D890A,B			HZM6.2ZWA	DIODE							
D891,893			HZM6.2ZWA	DIODE							
D892A,B			HZM6.2ZWA	DIODE							
IC850			BA3129F	IC (SWITCH)							
Q800			2SB1565(E,F)	TRANSISTOR							
Q801			2SB1184	TRANSISTOR							
Q802			2SC4081	TRANSISTOR							
Q803			2SB1565(E,F)	TRANSISTOR							
Q804			2SC4081	TRANSISTOR							
Q852			DTC124EUA	TRANSISTOR							
Q853A,B			DTC343TK	TRANSISTOR							
Q854A,B			DTC343TK	TRANSISTOR							
CONTROL PWB UNIT						CASSETTE MECHANISM ASSY (D40-1179-08)					
LCD900		*	B38-1109-08	LIQUID CRYSTAL		1	2B		A10-4630-08	CHASSIS ASSY	
C900			C90-5327-08	CHIP-TAN 10UF 16WV		4	3B		D10-4375-08	SLIDER (MAIN PLATE)	
C901,902			CK73GB1H103K	CHIP C 0.010UFK		5	3A		D13-1494-08	GEAR (B)	
C903			CC73GCH1H681J	CHIP C 680PF J		6	3A		D13-1495-08	GEAR (C)	
C904-906			CK73FB1H104K	CHIP C 0.10UF K		7	3A		D13-1496-08	GEAR (D)	
C907			C90-5327-08	CHIP-TAN 10UF 16WV							
						9	1B		D10-4376-08		
						10	2B		J90-0948-08	GUID	
						11	2B		D15-0919-08	PULLEY (MID)	
						12	2B		D13-1497-08	GEAR (P)	
						15	2B		J21-9458-08	MOUNTING HARDWARE (HEAD P-AS)	
						20	2A		D13-1498-08	RACK GEAR (OP PLATE A)	
						21	1A		D10-4377-08	LEVER (EJ-LEV-A)	
						22	3B		D10-4378-08	LEVER (SB.PL-AS)	
						23	2A		D10-4379-08	LEVER (OP.PL-HO)	
						24	1A		D10-4380-08	LEVER (EJE-LEV-A)	
						25	1A		G01-2960-08	TENSION COIL SPRING (E LEV)	
						26	3A		D13-1499-08	GEAR (FR)	
						27	3A		D10-4381-08	ARM (FR-PLATE)	
						30	2B		D10-4382-08	ARM ASSY (PINCH ROLLER F)	
						31	2B		D10-4383-08	ARM ASSY (PINCH ROLLER R)	

K : DPX-MP4030 (North America)

M : DPX-3030 (Other Areas)

M2 : DPX-MP4030 (Other Areas)

△ Indicates safety critical components.

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.

Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

CASSETTE MECHANISM ASSY (D40-1179-08)

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation	Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
45	2A		J11-0632-08	CLAMPER							
48	3B		D01-0613-08	FLYWHEEL ASSY							
49	3B		D16-0616-08	BELT							
52	1B		D10-4385-08	ARM (CASSETTE LIFTER B)							
53	1B		J19-4953-08	CASSETTE HOLDER							
54	1A		G11-1861-08	CUSHION							
56	1B		D10-4386-08	ARM ASSY							
57	1B		G01-2962-08	TENSION COIL SPRING							
58	1B		D10-4387-08	SLIDER							
65	2A		B09-0522-08	REEL CAP							
66	2A		G01-2963-08	COMPRESSION SPRING							
67	2A		D03-0314-08	REEL GEAR ASSY							
90	3A		J26-4042-08								
94	3A		T95-0245-08								
CFC1	3A		E39-0424-08	FLAT CABLE							
CM1	1A		T42-1002-08	MOTOR ASSY (MAIN)							
CM2	1A		T42-1001-08	MOTOR ASSY (SUB A)							
HD1	2B		T31-0230-08	PLAYBACK HEAD							
A	3A		N09-4324-08	SCREW (2X2.5)							
B	2A		N19-2136-08	FLAT WASHER (1.55X35)							
C	2B		N09-4325-08	SCREW (2X13ADS)							
D	2A		N09-4326-08	SCREW (2X3)							
E	2A		N09-4058-08	SEMS (2X3AMS)							
F	2B		N19-2038-08	FLAT WASHER (0.85X2.8)							
G	2B		N19-2136-08	FLAT WASHER (1.55X3)							
H	2B		N19-2137-08	FLAT WASHER (2.1X3.5)							
J	3B		N19-2138-08	FLAT WASHER (2.1X3.5)							
K	3B		N09-4327-08	SCREW							
M	3B		N09-4329-08	SCREW (3X3.5)							
N	1B		N19-2139-08	FLAT WASHER (2.1X4.0)							

K : DPX-MP4030 (North America)

M : DPX-3030 (Other Areas)

M2 : DPX-MP4030 (Other Areas)

△ Indicates safety critical components.