


EXPLODED VIEW • PARTS LIST

Main section

NO.	PART NO.	DESCRIPTION	Q'TY
1	076-0540-14	PLUG(14P)	1
2	074-1191-26	OUTLET SOCKET(26P)	1
3	103-2012-00	TRANSISTOR(2SD2012)	2
4	051-2042-00	IC	1
5	074-1068-11	OUTLET SOCKET	1
6	880-1917E	FM/AM TUNER	1
7	073-0762-90	TERMINAL	2
8	307-0683-05	REAR PLATE	1
9	092-0702-00	ANT-RECEPTACLE	1
10	716-0878-00	IT-SCREW	1
11	714-2606-81	MACHINE SCREW(M2.6x6)	1
12	073-0774-00	TERMINAL	3
13	039-2201-00	MAIN PWB (WITHOUT COMPONENT)	1
14	039-2202-00	SUB PWB (WITHOUT COMPONENT)	1
15	076-0544-10	PLUG(10P)	1
16	076-0544-08	PLUG(8P)	1
17	331-3522-00	OUTLET HOLDER	1
18	074-1013-30	OUTLET SOCKET(12P)	1
19	074-1298-10	OUTLET SOCKET(8P)	1
20	313-1857-00	HEAT SINK	1
21	331-3471-00	SIDE PLATE	1
22	331-3472-00	SIDE PLATE	1
23	331-3467-00	ES-PLATE	1
24	929-0220-83	CD MECHANISM	1
25	331-3466-00	MECH BRKT	1
26	816-2549-01	FLAT WIRE	1

NO.	PART NO.	DESCRIPTION	Q'TY
27	311-1833-10	LOWER CASE	1
28	310-1739-10	UPPER CASE	1
29	716-0878-00	IT-SCREW	2
30	714-2606-81	MACHINE SCREW(M2.6x6)	16
31	714-2612-81	MACHINE SCREW(M2.6x12)	2
32	714-2603-81	MACHINE SCREW(M2.6x3)	2
33	347-5206-00	SHIELD SHEET	1
34	347-6521-00	SHIELD SHEET	1
35	345-8639-00	PROTECTOR	1
36	286-6095-00	SETPLATE	1
37	940-8005-02	ESCUTCHEON ASSY	1
38	380-5544-00	KNOB	1
39	716-0778-00	WAVE SCREW	8
40	373-0995-00	DIAL COVER	1
41	331-3470-00	LCD COVER	1
42	335-6814-00	LCD LEFLECTOR	1
43	379-1247-30	INDICATOR	1
44	335-6804-00	LCD HOLDER	1
45	074-1151-14	OUTLET SOCKET(14P)	1
46	001-7048-96	LED(YEL)	17
47	001-7063-91	LED(YEL)	21
48	013-6311-50	SWITCH	18
49	016-0013-03	ROTARY ENCODER	1
50	345-8662-00	RUBBER SPACER	1
51	039-2203-00	SWITCH PWB (WITHOUT COMPONENT)	1
52	013-6302-51	SWITCH(EJECT)	1

CD mechanism section 929-0220-83

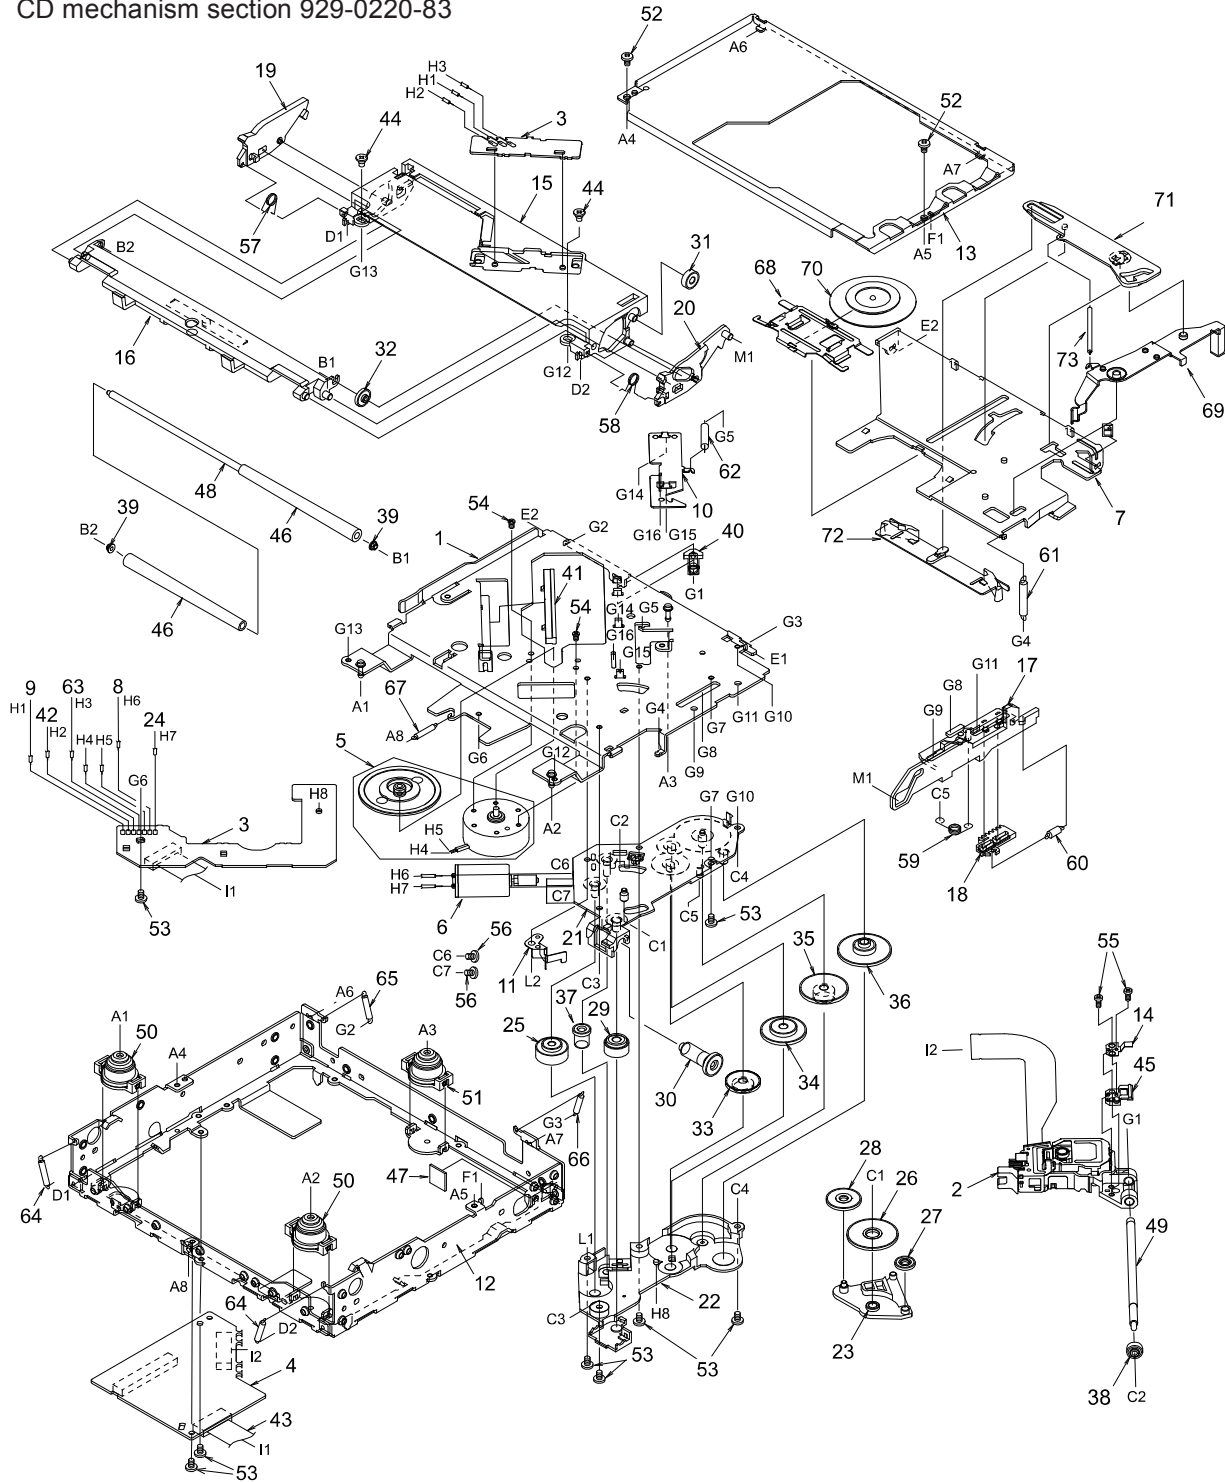

NO.	PART NO.	DESCRIPTION	Q'TY
1	966-0595-25	DRIVE PLATE ASSY	1
2	969-0060-30	PICK UP UNIT	1
3	039-1944-21	LED PWB (WITHOUT COMPONENT)	1
4	039-1945-20	CD PWB (WITHOUT COMPONENT)	1
5	SMA-182-100	MOTOR ASSY(SPINDE)	1
6	SMA-183-100	MOTOR ASSY(SLED)	1
7	620-1022-24	CLAMPER LINK	1
8	803-4906-60	VINYL COAT WIRE(ORG)	1
9	816-2591-00	LEAD WIRE(YEL)	1

NO.	PART NO.	DESCRIPTION	Q'TY
10	620-1025-22	ID-LOCK PLATE	1
11	620-1026-21	SPRING PLATE	1
12	620-1027-25	LOWER CHASSIS	1
13	620-1028-22	UPPER CHASSIS	1
14	966-0638-20	SH-RACK ASSY	1
15	621-0598-26	UPPER GUIDE	1
16	621-0599-25	ROLLER GUIDE	1
17	621-0600-25	SHIFT LEVER	1
18	621-0601-21	RACK	1
19	621-0602-22	LOCK ARM L	1

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
20	621-0603-25	LOCK ARM R	1	47	345-8704-20	CUSHION RUBBER	1
21	621-0604-22	GEAR BASE	1	48	622-1571-21	ROLLER SHAFT	1
22	621-0605-22	GEAR COVER	1	49	624-0018-01	LEAD SCREW	1
23	621-0606-21	IDLE CASE	1	50	629-0081-20	DAMPER F	2
24	816-2590-00	VINYL COAT WIRE(GRN)	1	51	629-0082-20	DAMPER R	1
25	621-0608-21	SECOND GEAR	1	52	714-2003-81	MACHINE SCREW	2
26	621-0609-20	BASE GEAR	1	53	716-1507-00	SCREW	9
27	621-0610-20	IDLE GEAR A	1	54	716-1733-00	SCREW	2
28	621-0611-20	IDLE GEAR B	1	55	716-3469-00	SCREW	2
29	621-0612-21	ROLLER GEAR A	1	56	716-3446-00	SCREW	2
30	621-0613-20	ROLLER GEAR B	1	57	750-3465-21	ROLLER SPRING L	1
31	621-0614-20	ROLLER GEAR C	1	58	750-3466-20	ROLLER SPRING R	1
32	621-0615-21	ROLLER GEAR D	1	59	750-3467-21	SHIFT SPRING	1
33	621-0616-20	POWER GEAR A	1	60	750-3468-20	RACK SPRING	1
34	621-0617-20	POWER GEAR B	1	61	750-3469-20	CLAMPER SPRING	1
35	621-0618-20	POWER GEAR C	1	62	750-3470-20	ID-LOCK SPRING	1
36	621-0619-20	POWER GEAR D	1	63	816-2592-00	LEAD WIRE(BLU)	1
37	621-0620-20	THREAD GEAR A	1	64	750-3472-21	DR-SPRING F	2
38	621-0621-20	THREAD GEAR B	1	65	750-3473-20	DR-SPRING RA	1
39	621-0622-21	ROLLER SLEEVE	2	66	750-3474-20	DR-SPRING RB	1
40	621-0623-22	LS-HOLDER	1	67	750-3475-21	DR-SPRING C	1
41	621-0624-22	GUIDE RAIL	1	68	620-1023-23	CLAMPER PLATE	1
42	816-2593-00	LEAD WIRE(PUR)	1	69	620-1024-23	SENSOR ARM	1
43	816-2542-01	FLAT WIRE(10P)	1	70	621-0708-20	CLAMPER RING	1
44	716-3473-00	SCREW	2	71	621-0626-21	STOPPER LINK	1
45	621-0709-20	SH-BASE	1	72	621-0627-21	DISC STOPPER	1
46	621-0629-20	LOADING ROLLER	2	73	750-3471-20	SENSOR SPRING	1

■ ELECTRICAL PARTS LIST

Main PWB(B1) section

Note) Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
BL101	880-1917E	FM/AM TUNER	C208	168-1042-78	16V 0.1uF	C329	182-1063-39	16V10uF
C104	119-0000-05	1/16W 0 ohm JW	C212	166-8097-50	8pF CH	C330	182-1063-39	16V10uF
C105	166-1511-50	150pF CH	C213	183-4763-39	16V47uF	C331	182-1063-39	16V10uF
C114	166-1007-50	10pF CH	C214	168-1042-78	16V 0.1uF	C332	178-1842-78	0.18uF
C116	168-1042-78	16V 0.1uF	C215	183-4763-39	16V47uF	C333	178-1842-78	0.18uF
C118	168-1022-55	1000pF	C216	168-1042-78	16V 0.1uF	C334	178-1842-78	0.18uF
C119	182-1073-29	10V100uF	C217	042-0403-55	16V33uF	C335	178-1842-78	0.18uF
C120	042-0458-93	50V2.2uF	C218	042-0403-55	16V33uF	C336	168-8212-55	820pF
C122	182-1073-29	10V100uF	C219	168-1042-78	16V 0.1uF	C337	168-8212-55	820pF
C123	182-1073-29	10V100uF	C301	168-4722-55	4700pF	C338	168-8212-55	820pF
C125	182-4763-39	16V47uF	C302	168-1042-78	16V 0.1uF	C339	168-8212-55	820pF
C126	178-1052-78	1uF	C303	182-4763-39	16V47uF	C340	182-1063-39	16V10uF
C127	168-1532-55	0.015uF	C304	166-1011-50	100pF CH	C341	182-1063-39	16V10uF
C128	168-3932-78	0.039uF	C305	168-1042-78	16V 0.1uF	C342	168-1832-55	0.018uF
C129	168-3932-78	0.039 uF	C306	184-2273-29	10V220uF	C343	182-1063-39	16V10uF
C130	166-1201-50	12pF CH	C307	182-1063-39	16V10uF	C344	182-1063-39	16V10uF
C132	166-2201-50	22pF CH	C308	166-1011-50	100pF CH	C345	182-1063-39	16V10uF
C133	166-1501-50	15pF CH	C309	183-1066-38	16V10uF NP	C346	182-1063-39	16V10uF
C134	168-1022-55	1000pF	C310	183-1066-38	16V10uF NP	C405	168-1022-55	1000pF
C135	168-1042-78	16V 0.1uF	C315	182-2263-19	6.3V22uF	C406	168-1022-55	1000pF
C136	168-1042-78	16V 0.1uF	C316	182-1053-69	50V1uF	C407	168-1022-55	1000pF
C137	168-1042-78	16V 0.1uF	C318	178-1042-78	0.1uF	C408	168-2232-55	0.022uF
C138	168-1042-78	16V 0.1uF	C319	178-1042-78	0.1uF	C409	182-1063-39	16V10uF
C139	166-5601-50	56pF CH	C321	182-1053-69	50V1uF	C410	182-1063-39	16V10uF
C201	168-1022-55	1000pF	C322	178-4742-78	0.47uF	C411	182-1063-39	16V10uF
C202	168-1022-55	1000pF	C323	178-4742-78	0.47uF	C412	182-1063-39	16V10uF
C203	166-1011-50	100pF CH	C324	168-1222-55	1200pF	C501	168-2222-55	2200pF
C204	166-1011-50	100pF CH	C325	182-1053-69	50V1uF	C502	168-2712-55	270pF
C205	166-1011-50	100pF CH	C326	182-1053-69	50V1uF	C503	168-2222-55	2200pF
C206	166-1011-50	100pF CH	C327	168-1222-55	1200pF	C504	168-2712-55	270pF
C207	168-1042-78	16V 0.1uF	C328	182-1063-39	16V10uF	C505	166-2201-50	22pF CH

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C506	166-2201-50	22pF CH	C802	182-4763-39	16V47uF	Q302	125-2031-92	MUN2211
C507	168-1042-78	16V 0.1uF	C803	182-1063-39	16V10uF	Q303	191-0709-00	2SB709A-Q.R.S
C508	166-2201-50	22pF CH	C804	182-4763-19	6.3V47uF	Q303	190-1037-00	2SA1037
C509	166-2201-50	22pF CH	C805	182-4763-19	6.3V47uF	Q303	190-1162-00	2SA1162
C510	168-6822-55	6800pF	C806	182-1063-39	16V10uF	Q401	192-2712-00	2SC2712
C511	168-6822-55	6800pF	C807	182-1063-39	16V10uF	Q401	192-2412-00	2SC2412
C512	166-2201-50	22pF CH	C901	168-1042-78	16V 0.1uF	Q401	193-0601-00	2SD601
C513	166-2201-50	22pF CH	C902	182-1063-39	16V10uF	Q402	125-9006-90	IMX1
C514	168-1042-78	16V 0.1uF	C903	183-4753-69	50V4.7uF	Q402	125-9007-90	HN1C01F
C515	166-2201-50	22pF CH	C904	183-1053-69	50V1uF	Q403	125-2004-92	RN1402
C516	166-2201-50	22pF CH	C905	166-4711-50	470pF CH	Q403	125-2005-91	UN2211TX
C529	178-1042-78	0.1uF	C906	166-4711-50	470pF CH	Q403	125-2020-92	DTC114EK
C530	178-1042-78	0.1uF	C907	168-1042-78	16V 0.1uF	Q403	125-2031-92	MUN2211
C531	178-1842-78	0.18uF	C910	166-1021-50	1000pF CH	Q404	125-0002-92	RN2402
C532	178-1842-78	0.18uF	C911	182-1073-39	16V100uF	Q404	125-0001-91	UN2111TX
C533	178-1842-78	0.18uF	CCT205	050-0140-54	1/32W 1k ohmx4J	Q404	125-0014-92	DTA114EK
C534	178-1842-78	0.18uF	CCT206	050-0140-54	1/32W 1k ohmx4J	Q501	125-4001-90	XN1504
C535	178-8232-78	0.082uF	CCT207	050-0140-54	1/32W 1k ohmx4J	Q502	125-4001-90	XN1504
C536	178-8232-78	0.082uF	CCT209	050-0140-54	1/32W 1k ohmx4J	Q503	125-0006-90	UN2110
C537	166-2201-50	22pF CH	CCT210	050-0140-54	1/32W 1k ohmx4J	Q504	125-0002-92	RN2402
C538	166-2201-50	22pF CH	D401	001-0422-38	MTZJ36	Q504	125-0001-91	UN2111TX
C539	166-2201-50	22pF CH	D402	001-0589-91	1SS145	Q504	125-0014-92	DTA114EK
C540	166-2201-50	22pF CH	D403	001-0589-91	1SS145	Q505	125-0002-92	RN2402
C541	166-2201-50	22pF CH	D404	001-0347-44	MA4082M	Q505	125-0001-91	UN2111TX
C542	166-2201-50	22pF CH	D404	001-0346-45	MTZJ8.2C	Q505	125-0014-92	DTA114EK
C545	178-8222-78	8200pF	D404	001-0401-44	HZS9 A2	Q506	125-0006-90	UN2110
C546	178-8222-78	8200pF	D601	001-0516-90	MA111	Q701	192-2712-00	2SC2712
C549	178-3932-78	0.039uF	D701	001-2015-00	RL253	Q701	192-2412-00	2SC2412
C550	178-3932-78	0.039uF	D702	001-0466-90	S5688B	Q701	193-0601-00	2SD601
C553	178-5632-78	0.056uF	D703	001-0347-34	MA4062L	Q801	193-2118-00	2SD2118
C554	178-5632-78	0.056uF	D703	001-0346-34	MTZJ6.2A	Q802	125-2004-92	RN1402
C555	178-6832-78	0.068uF	D703	001-0401-34	HZS6 C1	Q802	125-2005-91	UN2211TX
C556	178-6832-78	0.068uF	D704	001-0466-90	S5688B	Q802	125-2020-92	DTC114EK
C557	178-5632-78	0.056uF	D802	001-0347-48	MA4091H	Q802	125-2031-92	MUN2211
C558	178-6832-78	0.068uF	D802	001-0346-49	MTZJ10A	Q803	190-1150-00	2SA1150
C559	166-2201-50	22pF CH	D802	001-0401-48	HZS9 C2	Q804	125-2004-92	RN1402
C560	166-2201-50	22pF CH	D803	001-0516-90	MA111	Q804	125-2005-91	UN2211TX
C561	166-2201-50	22pF CH	D804	001-0504-31	HZS6 A2L	Q804	125-2020-92	DTC114EK
C562	166-2201-50	22pF CH	D805	001-0516-90	MA111	Q804	125-2031-92	MUN2211
C563	178-5632-78	0.056uF	D806	001-0504-31	HZS6 A2L	Q805	125-0002-92	RN2402
C564	178-6832-78	0.068uF	D808	001-0504-45	HZS9B1L	Q805	125-0001-91	UN2111TX
C565	168-1032-55	0.01uF	D902	001-0504-48	HZS9C2L	Q805	125-0014-92	DTA114EK
C566	168-2232-55	0.022uF	D903	001-0516-90	MA111	Q806	193-1858-00	2SD1858
C567	168-1032-55	0.01uF	IC201	052-1173-20	uPD178078GF-568-3BA	Q808	125-2004-92	RN1402
C568	178-3932-78	0.039uF	IC301	051-3034-90	NJM4558V	Q808	125-2005-91	UN2211TX
C569	178-3932-78	0.039uF	IC302	051-5027-00	LC75412WH	Q808	125-2020-92	DTC114EK
C570	178-3932-78	0.039F	IC501	051-3019-90	NJM2060V	Q808	125-2031-92	MUN2211
C571	178-3932-78	0.039uF	IC503	051-3019-90	NJM2060V	Q809	191-0709-00	2SB709A-Q.R.S
C572	168-1822-55	1800pF	IC504	051-3019-90	NJM2060V	Q809	190-1037-00	2SA1037
C573	182-1053-69	50V1uF	IC505	051-3019-90	NJM2060V	Q809	190-1162-00	2SA1162
C574	182-1063-39	16V10uF	IC506	051-2042-00	TA8275H	Q810	191-1205-60	2SB1205RST
C577	178-1052-78	1uF	J201	074-1191-26	26P	Q811	193-2118-00	2SD2118
C578	178-1052-78	1uF	J701	074-1068-11	NS10+6	Q812	125-9003-92	IMD3
C579	178-1052-78	1uF	L104	010-2003-04	COIL	Q812	125-9002-92	RN4602
C580	178-1052-78	1uF	L202	010-6009-64	2.2uH	Q813	103-2012-00	2SD2012
C581	168-1822-55	1800pF	L701	009-0670-01	CHOKE	Q903	103-2012-00	2SD2012
C582	183-1053-69	50V1uF	L701	009-0670-81	CHOKE	Q904	125-2004-92	RN1402
C584	166-2201-50	22pF CH	P701	076-0540-14	14P	Q904	125-2005-91	UN2211TX
C585	166-2201-50	22pF CH	Q104	192-2458-51	2SC2458Y.GR.BL	Q904	125-2020-92	DTC114EK
C586	166-2201-50	22pF CH	Q105	192-2458-51	2SC2458Y.GR.BL	Q904	125-2031-92	MUN2211
C587	166-2201-50	22pF CH	Q106	190-1150-00	2SA1150	Q905	190-1298-00	2SA1298
C599	184-4773-19	6.3V470uF	Q107	125-2004-92	RN1402	Q906	125-2004-92	RN1402
C601	183-4753-69	50V4.7uF	Q107	125-2005-91	UN2211TX	Q906	125-2005-91	UN2211TX
C602	183-4753-69	50V4.7uF	Q107	125-2020-92	DTC114EK	Q906	125-2020-92	DTC114EK
C701	172-1041-15	0.1uF	Q107	125-2031-92	MUN2211	Q906	125-2031-92	MUN2211
C702	042-0447-00	16V2200uF	Q107	125-2031-92	MUN2211	Q907	125-2004-92	RN1402
C703	168-2222-55	2200pF	Q108	190-1150-00	2SA1150	Q907	125-2005-91	UN2211TX
C704	168-2222-55	2200pF	Q201	125-2004-92	RN1402	Q907	125-2020-92	DTC114EK
C705	168-2222-55	2200pF	Q201	125-2005-91	UN2211TX	Q907	125-2031-92	MUN2211
C706	168-2222-55	2200pF	Q201	125-2020-92	DTC114EK	R111	119-2221-15	1/16W 2.2k ohm
C707	168-2222-55	2200pF	Q201	125-2031-92	MUN2211	R112	119-4721-15	1/16W 4.7k ohm
C708	168-2222-55	2200pF	Q301	125-2004-92	RN1402	R113	119-1021-15	1/16W 1k ohm
C709	168-2222-55	2200pF	Q301	125-2005-91	UN2211TX	R114	111-4701-98	1/4W 47 ohm
C710	168-2222-55	2200pF	Q301	125-2020-92	DTC114EK	R115	119-2221-15	1/16W 2.2k ohm
C711	168-2222-55	2200pF	Q301	125-2031-92	MUN2211	R116	111-1501-98	1/4W 15 ohm
C712	172-1041-15	0.1uF	Q302	125-2004-92	RN1402	R117	119-1021-15	1/16W 1k ohm
C713	182-1063-39	16V10uF	Q302	125-2005-91	UN2211TX	R118	119-4741-15	1/16W 470k ohm
C714	183-6843-69	50V0.68uF	Q302	125-2020-92	DTC114EK	R119	111-1001-98	1/4W 10 ohm

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R120	111-2221-98	1/4W 2.2k ohm	R406	119-5621-15	1/16W 5.6k ohm	R580	119-5131-15	1/16W 51k ohm
R121	111-1031-98	1/4W 10k ohm	R407	119-5621-15	1/16W 5.6k ohm	R581	119-5131-15	1/16W 51k ohm
R122	119-1021-15	1/16W 1k ohm	R408	119-5631-15	1/16W 56k ohm	R582	119-5131-15	1/16W 51k ohm
R123	111-1031-98	1/4W 10k ohm	R409	119-5631-15	1/16W 56k ohm	R583	119-1031-15	1/16W 10k ohm
R124	111-2221-98	1/4W 2.2k ohm	R410	119-1031-15	1/16W 10k ohm	R584	119-1031-15	1/16W 10k ohm
R126	119-8201-15	1/16W 82 ohm	R411	119-1031-15	1/16W 10k ohm	R585	119-1831-15	1/16W 18k ohm
R199	119-0000-05	1/16W 0 ohm JW	R412	119-5631-15	1/16W 56k ohm	R586	119-8221-15	1/16W 8.2k ohm
R201	119-1021-15	1/16W 1k ohm	R413	119-1031-15	1/16W 10k ohm	R587	119-8221-15	1/16W 8.2k ohm
R202	119-1021-15	1/16W 1k ohm	R414	119-3011-15	1/16W 300 ohm	R588	119-4731-15	1/16W 47k ohm
R203	119-1031-15	1/16W 10k ohm	R415	119-3011-15	1/16W 300 ohm	R589	119-4731-15	1/16W 47k ohm
R204	119-0000-05	1/16W 0 ohm JW	R416	119-4731-15	1/16W 47k ohm	R590	119-1031-15	1/16W 10k ohm
R205	119-1031-15	1/16W 10k ohm	R417	119-2231-15	1/16W 23k ohm	R591	119-1031-15	1/16W 10k ohm
R206	119-4731-15	1/16W 47k ohm	R422	119-4731-15	1/16W 47k ohm	R592	119-1031-15	1/16W 10k ohm
R207	119-4731-15	1/16W 47k ohm	R430	032-0106-69	1/10W 39k ohm D	R593	119-1031-15	1/16W 10k ohm
R208	119-4731-15	1/16W 47k ohm	R431	032-0106-69	1/10W 39k ohm D	R594	119-1031-15	1/16W 10k ohm
R209	119-1041-15	1/16W 100k ohm	R432	032-0106-69	1/10W 39k ohm D	R595	119-1031-15	1/16W 10k ohm
R210	119-1041-15	1/16W 100k ohm	R433	032-0106-69	1/10W 39k ohm D	R596	119-1031-15	1/16W 10k ohm
R212	119-1031-15	1/16W 10k ohm	R501	119-3331-15	1/16W 33k ohm	R597	119-1031-15	1/16W 10k ohm
R214	119-2231-15	1/16W 22k ohm	R502	119-3331-15	1/16W 33k ohm	R598	119-1031-15	1/16W 10k ohm
R215	119-1031-15	1/16W 10k ohm	R503	119-3331-15	1/16W 33k ohm	R599	119-4721-15	1/16W 4.7k ohm
R221	119-1021-15	1/16W 1k ohm	R504	119-3331-15	1/16W 33k ohm	R600	119-1021-15	1/16W 1k ohm
R222	119-4731-15	1/16W 47k ohm	R505	119-1831-15	1/16W 18k ohm	R601	119-1021-15	1/16W 1k ohm
R223	119-1031-15	1/16W 10k ohm	R506	119-2731-15	1/16W 27k ohm	R602	119-2241-15	1/16W 220k ohm
R224	119-1021-15	1/16W 1k ohm	R507	119-1831-15	1/16W 18k ohm	R603	119-2241-15	1/16W 220k ohm
R225	119-1031-15	1/16W 10k ohm	R508	119-2731-15	1/16W 27k ohm	R604	119-1231-15	1/16W 12k ohm
R226	119-1021-15	1/16W 1k ohm	R509	119-1831-15	1/16W 18k ohm	R605	119-1231-15	1/16W 12k ohm
R227	119-4731-15	1/16W 47k ohm	R510	119-1531-15	1/16W 15k ohm	R606	119-2231-15	1/16W 22k ohm
R228	119-3311-15	1/16W 330 ohm	R511	119-1831-15	1/16W 18k ohm	R607	119-2231-15	1/16W 22k ohm
R229	119-3311-15	1/16W 330 ohm	R512	119-1531-15	1/16W 15k ohm	R612	119-1021-15	1/16W 1k ohm
R230	119-1021-15	1/16W 1k ohm	R513	119-4721-15	1/16W 4.7k ohm	R613	119-1021-15	1/16W 1k ohm
R232	119-4731-15	1/16W 47k ohm	R514	119-1031-15	1/16W 10k ohm	R615	119-1031-15	1/16W 10k ohm
R234	119-1031-15	1/16W 10k ohm	R515	119-1031-15	1/16W 10k ohm	R616	119-1031-15	1/16W 10k ohm
R236	119-4731-15	1/16W 47k ohm	R516	119-4721-15	1/16W 4.7k ohm	R617	119-4721-15	1/16W 4.7k ohm
R239	119-1031-15	1/16W 10k ohm	R517	119-2721-15	1/16W 2.7k ohm	R618	119-4721-15	1/16W 4.7k ohm
R240	119-1021-15	1/16W 1k ohm	R518	119-4721-15	1/16W 4.7k ohm	R619	119-4721-15	1/16W 4.7k ohm
R241	119-1021-15	1/16W 1k ohm	R519	119-4721-15	1/16W 4.7k ohm	R701	119-1031-15	1/16W 10k ohm
R242	119-1021-15	1/16W 1k ohm	R520	119-2721-15	1/16W 2.7k ohm	R702	119-5611-15	1/16W 560 ohm
R245	119-1031-15	1/16W 10k ohm	R521	119-4721-15	1/16W 4.7k ohm	R703	111-1531-98	1/4W 15k ohm
R246	119-1031-15	1/16W 10k ohm	R522	119-4721-15	1/16W 4.7k ohm	R704	114-2291-11	1W 2.2 ohm
R248	119-1021-15	1/16W 1k ohm	R523	119-1031-15	1/16W 10k ohm	R705	119-0000-05	1/16W 0 ohm JW
R249	119-0000-05	1/16W 0 ohm JW	R524	119-1031-15	1/16W 10k ohm	R803	111-4711-98	1/4W 470 ohm
R250	119-1021-15	1/16W 1k ohm	R525	119-2221-15	1/16W 2.2k ohm	R804	111-1021-98	1/4W 1k ohm
R251	119-0000-05	1/16W 0 ohm JW	R528	119-2221-15	1/16W 2.2k ohm	R805	119-2231-15	1/16W 22k ohm
R252	119-0000-05	1/16W 0 ohm JW	R529	119-2221-15	1/16W 2.2k ohm	R806	119-4731-15	1/16W 47k ohm
R253	119-1031-15	1/16W 10k ohm	R532	119-2221-15	1/16W 2.2k ohm	R807	119-1531-15	1/16W 15k ohm
R260	119-1031-15	1/16W 10k ohm	R549	119-3921-15	1/16W 3.9k ohm	R810	111-1221-98	1/4W 1.2k ohm
R301	119-1021-15	1/16W 1k ohm	R550	119-3921-15	1/16W 3.9k ohm	R811	111-4721-98	1/4W 4.7k ohm
R302	119-1021-15	1/16W 1k ohm	R551	119-3921-15	1/16W 3.9k ohm	R812	111-5691-98	1/4W 5.6 ohm
R303	119-4731-15	1/16W 47k ohm	R552	119-3921-15	1/16W 3.9k ohm	R813	111-5691-98	1/4W 5.6 ohm
R304	119-4721-15	1/16W 4.7k ohm	R553	119-1511-15	1/16W 150 ohm	R814	111-2211-98	1/4W 220 ohm
R305	119-1021-15	1/16W 1k ohm	R554	119-1511-15	1/16W 150 ohm	R815	119-1041-15	1/16W 100k ohm
R306	119-2231-15	1/16W 22k ohm	R555	119-1511-15	1/16W 150 ohm	R818	111-3911-98	1/4W 390 ohm
R307	119-0000-05	1/16W 0 ohm JW	R556	119-1511-15	1/16W 150 ohm	R819	119-1041-15	1/16W 100k ohm
R308	119-4731-15	1/16W 47k ohm	R557	119-1541-15	1/16W 150k ohm	R822	111-2211-98	1/4W 220 ohm
R309	119-4731-15	1/16W 47k ohm	R558	119-1541-15	1/16W 150k ohm	R833	111-3911-98	1/4W 390 ohm
R310	119-4731-15	1/16W 47k ohm	R559	119-1541-15	1/16W 150k ohm	R901	119-1031-15	1/16W 10k ohm
R311	119-4731-15	1/16W 47k ohm	R560	119-1541-15	1/16W 150k ohm	R902	119-1021-15	1/16W 1k ohm
R312	119-1041-15	1/16W 100k ohm	R561	119-1541-15	1/16W 150k ohm	R903	119-3931-15	1/16W 39k ohm
R313	119-1041-15	1/16W 100k ohm	R562	119-1541-15	1/16W 150k ohm	R904	119-3321-15	1/16W 3.3k ohm
R314	119-3011-15	1/16W 300 ohm	R565	119-1511-15	1/16W 150 ohm	R905	119-3321-15	1/16W 3.3k ohm
R334	119-1821-15	1/16W 1.8k ohm	R566	119-1511-15	1/16W 150 ohm	R906	119-4731-15	1/16W 47k ohm
R335	119-1821-15	1/16W 1.8k ohm	R569	119-1521-15	1/16W 1.5k ohm	R907	119-1841-15	1/16W 180k ohm
R336	119-3931-15	1/16W 39k ohm	R570	119-1521-15	1/16W 1.5k ohm	R908	119-4721-15	1/16W 4.7k ohm
R337	119-3931-15	1/16W 39k ohm	R573	119-4731-15	1/16W 47k ohm	R910	119-1031-15	1/16W 10k ohm
R342	119-4721-15	1/16W 4.7k ohm	R574	119-4731-15	1/16W 47k ohm	SUP101	060-0122-10	DSP-201M-S00B
R343	119-4721-15	1/16W 4.7k ohm	R575	119-8221-15	1/16W 8.2k ohm	TC201	004-1580-02	11pF
R346	119-4721-15	1/16W 4.7k ohm	R576	119-8221-15	1/16W 8.2k ohm	TM101	073-0762-90	TERMINAL
R347	119-4721-15	1/16W 4.7k ohm	R577	119-1031-15	1/16W 10k ohm	TM801	073-0762-90	TERMINAL
R360	119-0000-05	1/16W 0 ohm JW	R578	119-1031-15	1/16W 10k ohm	VR102	012-5203-56	10kΩ
R405	119-1021-15	1/16W 1k ohm	R579	119-5131-15	1/16W 51k ohm	X201	061-3055-00	4.5MHz

Switch PWB(B2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1101	166-8211-50	820pF	C1106	166-2201-50	22pF CH	D1102	001-7048-96	RAY1112H-75M
C1102	168-4732-78	0.047uF	C1107	166-2201-50	22pF CH	D1103	001-7048-96	RAY1112H-75M
C1103	168-4732-78	0.047uF	C1109	166-1011-50	100pF CH	D1104	001-7048-96	RAY1112H-75M
C1104	168-1042-78	16V 0.1uF	D1100	001-7048-96	RAY1112H-75M	D1105	001-7048-96	RAY1112H-75M
C1105	042-0416-59	10V33uF	D1101	001-7048-96	RAY1112H-75M	D1106	001-7048-96	RAY1112H-75M

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D1107	001-7048-96	RAY1112H-75M	D1135	001-7063-91	RAY1102W	R1109	116-5611-15	1/8W 560 ohm
D1108	001-7048-96	RAY1112H-75M	D1136	001-7063-91	RAY1102W	R1110	116-5611-15	1/8W 560 ohm
D1109	001-7048-96	RAY1112H-75M	D1137	001-7063-91	RAY1102W	R1111	116-5611-15	1/8W 560 ohm
D1110	001-7048-96	RAY1112H-75M	D1145	001-0516-90	MA111	R1112	116-5611-15	1/8W 560 ohm
D1111	001-7048-96	RAY1112H-75M	D1146	001-0516-90	MA111	R1113	116-5611-15	1/8W 560 ohm
D1112	001-7048-96	RAY1112H-75M	D1147	001-0516-90	MA111	R1114	116-5611-15	1/8W 560 ohm
D1113	001-7048-96	RAY1112H-75M	D1148	001-0516-90	MA111	R1115	116-5611-15	1/8W 560 ohm
D1114	001-7048-96	RAY1112H-75M	D1149	001-0516-90	MA111	R1116	116-5611-15	1/8W 560 ohm
D1115	001-7048-96	RAY1112H-75M	D1160	001-0529-44	MA8082-M	S1101	013-6311-50	SWITCH
D1116	001-7048-96	RAY1112H-75M	D1161	001-0529-44	MA8082-M	S1102	013-6311-50	SWITCH
D1117	001-7063-91	RAY1102W	D1162	001-0529-44	MA8082-M	S1103	013-6311-50	SWITCH
D1118	001-7063-91	RAY1102W	D1163	001-0529-44	MA8082-M	S1104	013-6311-50	SWITCH
D1119	001-7063-91	RAY1102W	D1164	001-0529-44	MA8082-M	S1105	013-6311-50	SWITCH
D1120	001-7063-91	RAY1102W	D1165	001-0529-44	MA8082-M	S1106	013-6311-50	SWITCH
D1121	001-7063-91	RAY1102W	D1166	001-0529-44	MA8082-M	S1107	013-6311-50	SWITCH
D1122	001-7063-91	RAY1102W	D1167	001-0529-44	MA8082-M	S1108	013-6311-50	SWITCH
D1123	001-7063-91	RAY1102W	D1168	001-0529-44	MA8082-M	S1109	013-6311-50	SWITCH
D1124	001-7063-91	RAY1102W	IC1101	051-6064-00	LC75883W	S1110	013-6311-50	SWITCH
D1125	001-7063-91	RAY1102W	LCD101	379-1247-30	LCD	S1111	013-6311-50	SWITCH
D1126	001-7063-91	RAY1102W	P1101	074-1151-14	14P	S1112	013-6311-50	SWITCH
D1127	001-7063-91	RAY1102W	R1101	119-6831-15	1/16W 68k ohm	S1113	013-6311-50	SWITCH
D1128	001-7063-91	RAY1102W	R1102	119-8211-15	1/16W 820 ohm	S1114	013-6311-50	SWITCH
D1129	001-7063-91	RAY1102W	R1103	119-8211-15	1/16W 820 ohm	S1115	013-6311-50	SWITCH
D1130	001-7063-91	RAY1102W	R1104	119-8211-15	1/16W 820 ohm	S1116	013-6311-50	SWITCH
D1131	001-7063-91	RAY1102W	R1105	119-8211-15	1/16W 820 ohm	S1117	013-6311-50	SWITCH
D1132	001-7063-91	RAY1102W	R1106	119-8211-15	1/16W 820 ohm	S1118	013-6311-50	SWITCH
D1133	001-7063-91	RAY1102W	R1107	119-8211-15	1/16W 820 ohm	S1119	013-6302-51	SKQMAL
D1134	001-7063-91	RAY1102W	R1108	119-8211-15	1/16W 820 ohm	VR1101	016-0013-03	ROTARY ENCODER

Sub PWB(B3) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
J1001	074-1013-30	12P	P1001	076-0544-10	10P
J1002	074-1298-10	8P	P1002	076-0544-08	8P

CD PWB(B4) section:CD mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C101	168-1042-78	0.1uF	C207	043-0533-50	0.047uF	R109	033-1031-15	1/16W 10k ohm
C102	045-4701-50	47pF	C208	046-6822-58	6800pF	R110	033-1051-15	1/16W 1M ohm
C103	046-4722-58	4700pF	C209	168-1042-78	0.1uF	R111	033-3321-15	1/16W 3.3k ohm
C104	168-1042-78	0.1uF	C210	043-0533-50	0.047uF	R114	033-2211-15	1/16W 220 ohm
C105	046-1532-78	0.015uF	C211	168-1042-78	0.1uF	R115	033-2211-15	1/16W 220 ohm
C106	046-1032-78	0.01uF	C212	168-1042-78	0.1uF	R116	033-1031-15	1/16W 10k ohm
C107	046-1032-78	0.01uF	C213	045-5096-50	5pF	R117	033-1021-15	1/16W 1k ohm
C108	046-4722-58	4700pF	C214	045-5601-50	56pF	R131	033-4711-15	1/16W 470 ohm
C109	046-1522-58	1500pF	C215	043-0533-50	0.047uF	R132	033-2211-15	1/16W 220 ohm
C110	046-3332-78	0.033uF	C216	178-1052-78	1uF	R201	117-2201-15	1/10W 22 ohm
C111	168-1042-78	0.1uF	C217	045-1011-50	100pF	R202	117-2201-15	1/10W 22 ohm
C112	046-3332-78	0.033uF	C301	163-1073-35	16V100uF	R203	033-1041-15	1/16W 100k ohm
C113	168-1042-78	0.1uF	C302	168-1042-78	0.1uF	R204	033-1041-15	1/16W 100k ohm
C114	168-1042-78	0.1uF	C303	043-0533-50	0.047uF	R205	033-1041-15	1/16W 100k ohm
C115	046-4712-58	470pF	D201	001-0516-90	MA111	R206	033-1041-15	1/16W 100k ohm
C116	046-4712-58	470pF	IC101	051-6376-00	TC94A14FA	R207	033-1041-15	1/16W 100k ohm
C117	043-0533-50	0.047uF	IC102	051-3279-90	BA033LBSG	R208	033-8231-15	1/16W 82k ohm
C118	043-0533-50	0.047uF	IC201	051-5710-90	TA2157F	R209	033-6811-15	1/16W 680 ohm
C119	045-2701-50	27pF	IC301	051-6049-08	BA5983FP-E2	R210	033-6831-15	1/16W 68k ohm
C120	045-1801-50	18pF	J101	074-1228-76	26P	R211	033-1831-15	1/16W 18k ohm
C121	163-1063-35	16V10uF	J201	074-1138-65	15P	R212	033-2721-15	1/16W 2.7k ohm
C122	178-1052-78	1uF	J301	074-1138-60	10P	R213	033-1011-15	1/16W 100 ohm
C123	046-1032-78	0.01uF	L101	010-2285-57	BLM21B102SPT	R214	033-1021-15	1/16W 1k ohm
C124	163-1073-05	4V100uF	L102	010-2285-57	BLM21B102SPT	R215	033-1031-15	1/16W 10k ohm
C125	168-1042-78	0.1uF	L103	010-2285-57	BLM21B102SPT	R217	033-1041-15	1/16W 100k ohm
C126	168-1042-78	0.1uF	L104	010-2285-57	BLM21B102SPT	R218	033-2211-15	1/16W 220 ohm
C129	178-1052-78	1uF	L105	010-2285-57	BLM21B102SPT	R301	117-6811-15	1/16W 680 ohm
C201	163-3363-05	4V33uF	L401	010-3050-93	10μH	R304	033-3921-15	1/16W 3.9k ohm
C202	168-1042-78	0.1uF	Q201	131-1188-50	2SB1188	R305	033-3921-15	1/16W 3.9k ohm
C203	178-1052-78	1uF	R102	033-5621-15	1/16W 5.6k ohm	R306	033-1041-15	1/16W 100k ohm
C204	163-1073-05	4V100uF	R104	033-4731-15	1/16W 47k ohm	R307	033-2211-15	1/16W 220 ohm
C205	163-3363-05	4V33uF	R105	033-1041-15	1/16W 100k ohm	X102	060-1528-90	16.934M
C206	168-1042-78	0.1uF	R108	033-1531-15	1/16W 15k ohm			

LED PWB(B5) section:CD mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D1	001-7058-90	AN1105W-RR	Q1	060-4015-90	PS1192H	S1	013-7414-50	CHUCKING
D2	001-7058-90	AN1105W-RR	Q2	060-4015-90	PS1192H	S2	013-7413-50	LIMIT
J1	074-1138-60	10P						