JVC

PARTS LIST

CD RECEIVER

KD-AR959BSJ KD-R950BTJ KD-R951BTE
KD-R951BTEN KD-R951BTEY KD-R959BTUR

■ PRECAUTIONS ON SCHEMATIC DIAGRAMS

- Due to the improvement in performance, some part numbers shown in the circuit diagrams may not agree with those indicated in the Parts List.
- The parts numbers, values and rated voltage etc. in the Schematic Diagrams are for reference only.
- Since the circuit diagrams are standard ones, the circuits and circuit constants may be subject to change for improvement without any notice.

■ PRECAUTIONS ON PARTS LIST

- The parts identified by the ⚠ symbol are critical for safety. Whenever replacing these parts, be sure to use specified ones to secure the safety.
- The parts not indicated in this Parts List and those which are filled with lines --- in the Parts No. columns will not be supplied.
- P.W. BOARD Ass'y will not be supplied, but those which are filled with the Parts No. in the Parts No. columns will be supplied.
- When ordering chips, screws etc., place bulk orders (unit of tens) whenever possible to improve shipping efficiency.
- There are cases where the actual implemented parts in the sets and the service parts are different. When ordering parts, make sure to refer to the Parts List.

■ PRECAUTIONS ON SERVICE

Certain parts of the power circuits and the GNDs differ according to the models. Care must be taken for the following points as the differences are indicated separately in the LIVE GND (⏚) and the ISOLATED (NEUTRAL) GND (⊥).

1. Do not touch the LIVE GND, or do not touch the LIVE GND and the ISOLATED (NEUTRAL) GND at the same time. It may cause an electric shock.
   Before pulling out the chassis or other parts, make sure to pull out the power cord from the wall outlet first.
2. Do not short circuit between the LIVE GND and ISOLATED (NEUTRAL) GND, or never measure the LIVE GND and ISOLATED (NEUTRAL) GND at the same time using measuring instruments (oscilloscope, etc.). It may blow fuses or damage other parts.

■ DEVIATION TOLERANCE RANGE

DEVIATION TOLERANCE RANGE									
F	G	J	K	M	N	R	H	Z	P
± 1%	± 2%	± 5%	±10%	±20%	±30%	+30% -10%	+50% -10%	+80% -20%	+100% -0%

EXPLODED VIEW (UNIT)

Block No.M1MM

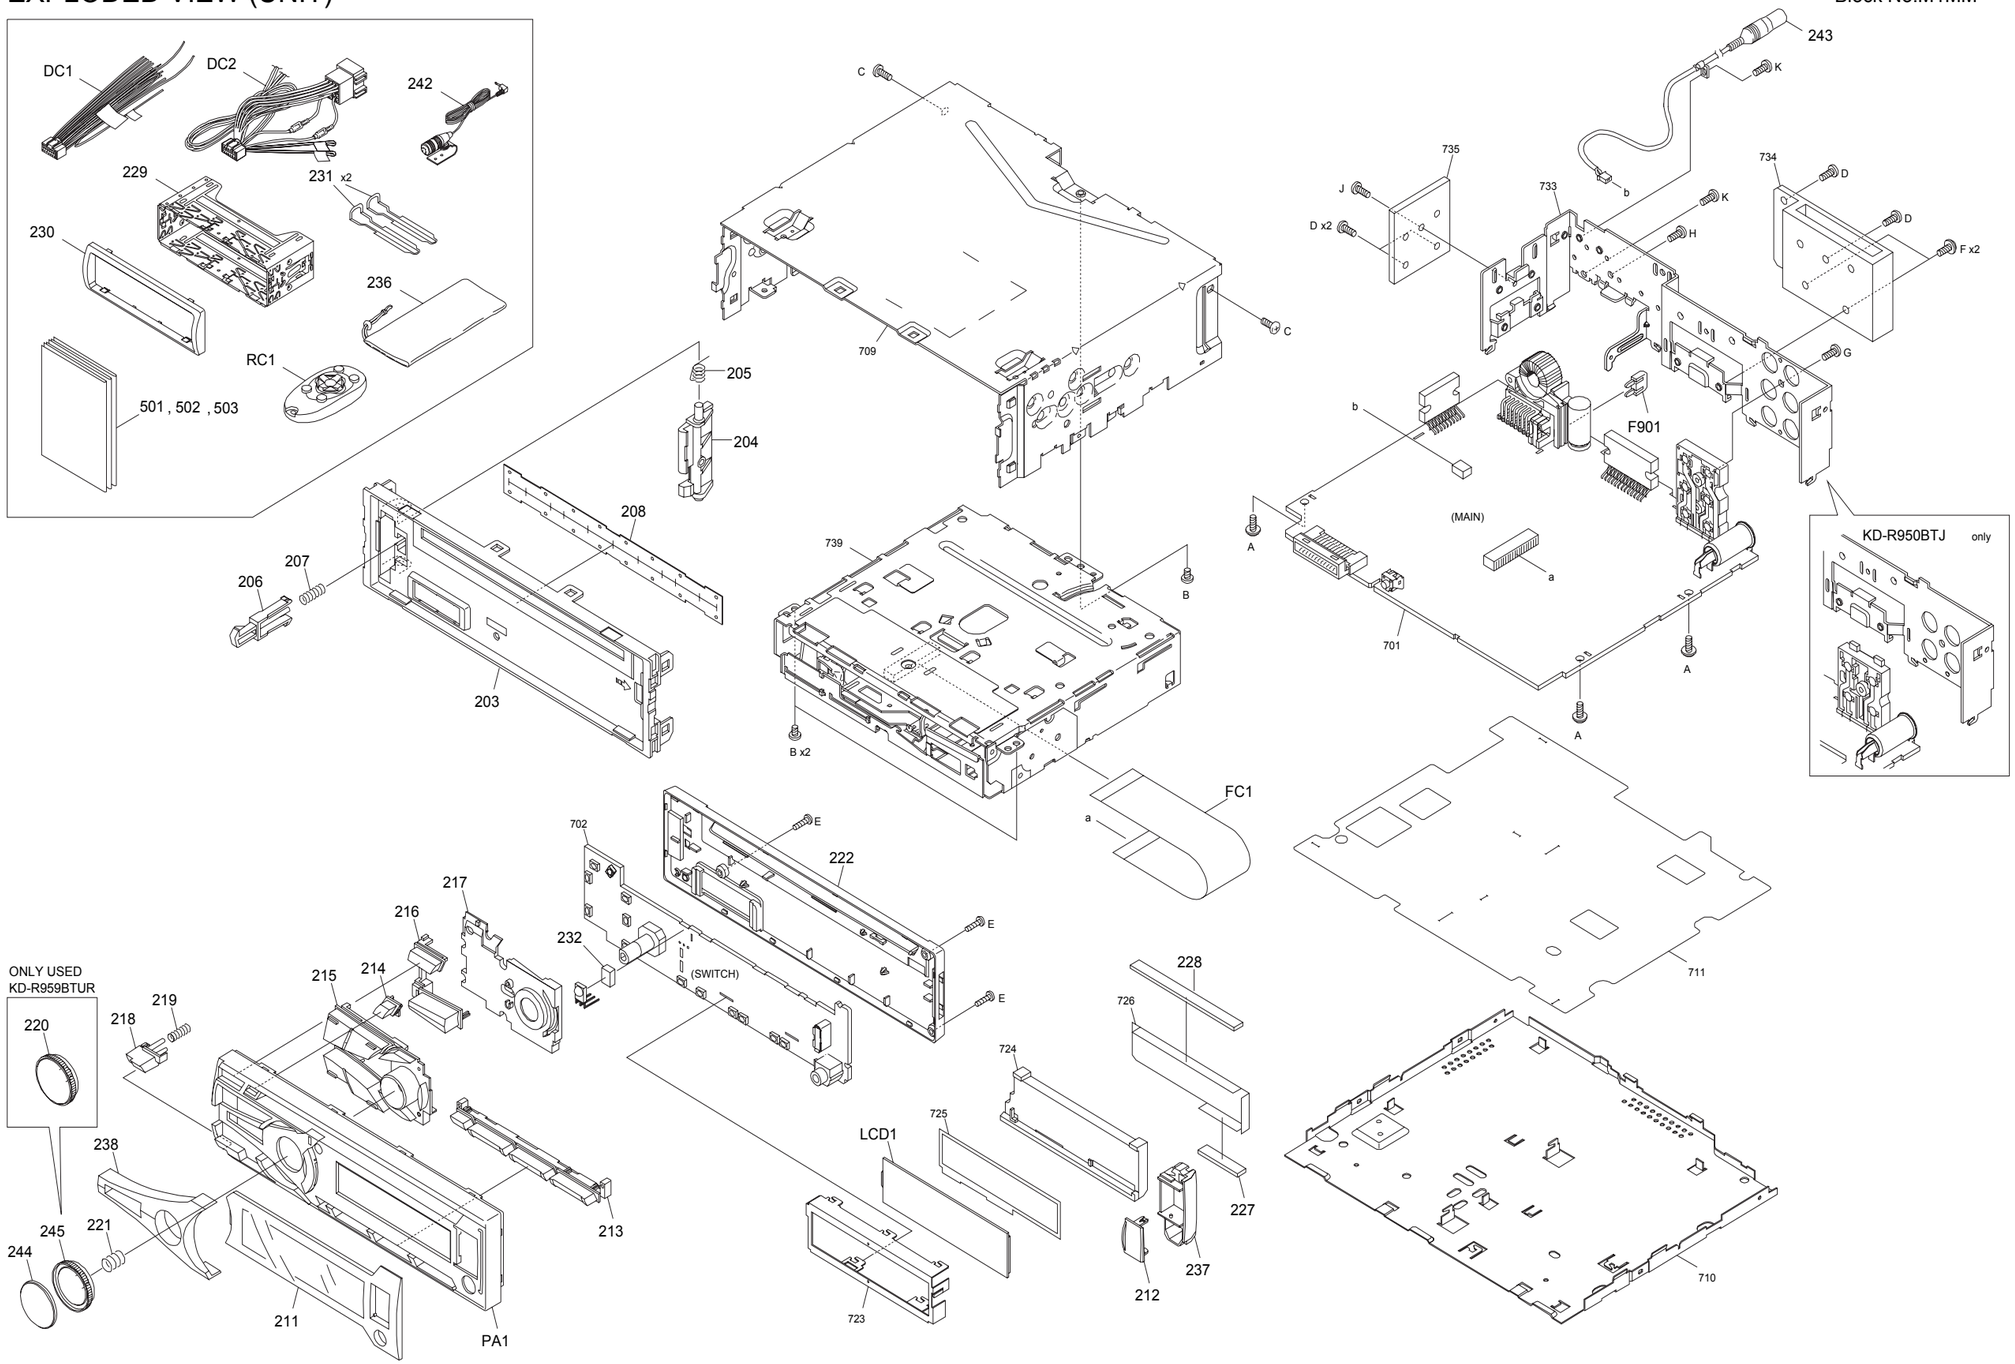

Parts with the exploded numbers larger than 700 are not supplied.

No.MA579

created date:2014-05-09

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-AR959BSJ	A	KD-R950BTJ	B	KD-R951BTE	C	KD-R951BTEN	D
KD-R951BTEY	E	KD-R959BTUR	F				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
EXPLODED VIEW (UNIT) <M1MM>						
⚠	DC1	QAM1331-001	DC CORD		1	A,B
⚠	DC2	QAM1343-002	DC CORD		1	C,D,E
⚠	DC2	QAM1378-001	DC CORD		1	F
⚠	F901	QMFZ064-100-J1	FUSE	10A	1	
	FC1	WJT0307-001A-E	E-CARD WIRE		1	
	LCD1	QLD0731-001	LCD MODULE		1	
	PA1	GE10393-003A	FRONT PANEL		1	A
	PA1	GE10393-002A	FRONT PANEL		1	B,C,D,E,F
	RC1	RM-RK52C	REMOCON UNIT		1	A,B,F
	A	GE40377-002A	SCREW		3	
	B	QYSDST2604ZA	TAP SCREW	M2.6 x 4mm	3	
	C	QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	2	
	D	QYSDST2610ZA	TAP SCREW	M2.6 x 10mm	4	
	E	QYSDSF2008ZA	TAP SCREW	M2 x 8mm	3	
	F	GE40377-005A	SPECIAL SCREW		2	
	G	QYSDSF2608ZA	TAP SCREW	M2.6 x 8mm	1	
	H	QYSDSG3006ZA	TAP SCREW	M3 x 6mm	1	
	J	QYSDST2608ZA	TAP SCREW	M2.6 x 8mm	1	
	K	QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	2	A
	203	GE10390-001A	FRONT CHASSIS		1	A,B,F
	203	GE10390-002A	FRONT CHASSIS		1	C,D,E
	204	GE35609-001A	LOCK LEVER		1	
	205	GE40514-004A	TORSION SPRING		1	A,B,C,D,E
	205	GE40514-003A	TORSION SPRING		1	F
	206	GE35611-001A	RELEASE LEVER		1	
	207	GE30999-008A	COMP.SPRING		1	
	208	GE40630-002A	BLIND		1	
	211	GE20359-006A	FINDER		1	A
	211	GE20359-014A	FINDER		1	B
	211	GE20359-007A	FINDER		1	C,D,E
	211	GE20359-016A-NK	FINDER		1	F
	212	GE35697-001A	USB DOOR		1	
	213	GE20361-001A	PRESET BUTTON		1	
	214	GE35670-001A	EJECT BUTTON		1	
	215	GE35696-004A	SEARCH BUTTON		1	A
	215	GE35696-003A	SEARCH BUTTON		1	B
	215	GE35696-002A	SEARCH BUTTON		1	C,D,E
	215	GE35696-001A	SEARCH BUTTON		1	F
	216	GE35694-004A	SOURCE BUTTON		1	
	217	GE35692-002A	LIGHT GUIDE L		1	
	218	GE35773-001A	DETACH BUTTON		1	
	219	GE30999-011A	COMP.SPRING		1	
	220	GE35699-006A	VOL KNOB		1	F
	221	GE40127-006A	KNOB SPRING		1	
	222	GE10394-001A	REAR COVER		1	
	227	QNZ1002-001	RUBBER CONNE		1	
	228	QNZ1003-001	RUBBER CONNE		1	
	229	GE20362-001A	MOUNTING SLEEVE		1	
	230	GE20368-001A	TRIM PLATE		1	
	231	GE40685-001A	HOOK		2	
	232	GE40466-025A	SPACER		1	
	236	GE40521-001A	CARRYING CASE		1	F
	237	GE35707-002A	LIGHT GUIDE R		1	
	238	GE35706-003A	RIM COVER		1	A
	238	GE35706-002A	RIM COVER		1	B,C,D,E,F
	242	QAN0109-001	MICROPHONE		1	
	243	QAM1370-001	CAR CABLE		1	A
	244	GE35700-001A	VOL KNOB TOP		1	A,B,C,D,E
	245	GE35701-001A	VOL KNOB BASE		1	A,B,C,D,E
	501	GET0981-001A	INST MANUAL	ENG SPA FRE	1	A,B
	501	GET0983-001A	INST MANUAL	ENG FRE	1	C,D
	501	GET0983-003A	INST MANUAL	GER	1	E
	501	GET0984-001A	INST MANUAL	POR	1	F
	502	GET0983-002A	INST MANUAL	DUT SPA ITA POR GRE	1	C
	502	GET0983-003A	INST MANUAL	GER	1	D
	502	GET0983-005A	INST MANUAL	POL HUN CZE ROM BUL	1	E
	503	GET0983-003A	INST MANUAL	GER	1	C
	503	GET0983-004A	INST MANUAL	DAN SWE FIN	1	D
	503	GET0983-006A	INST MANUAL	RUS UKR	1	E

EXPLODED VIEW (CD MECHANISM: FC2-3A00NXN)

Block No.MBMM

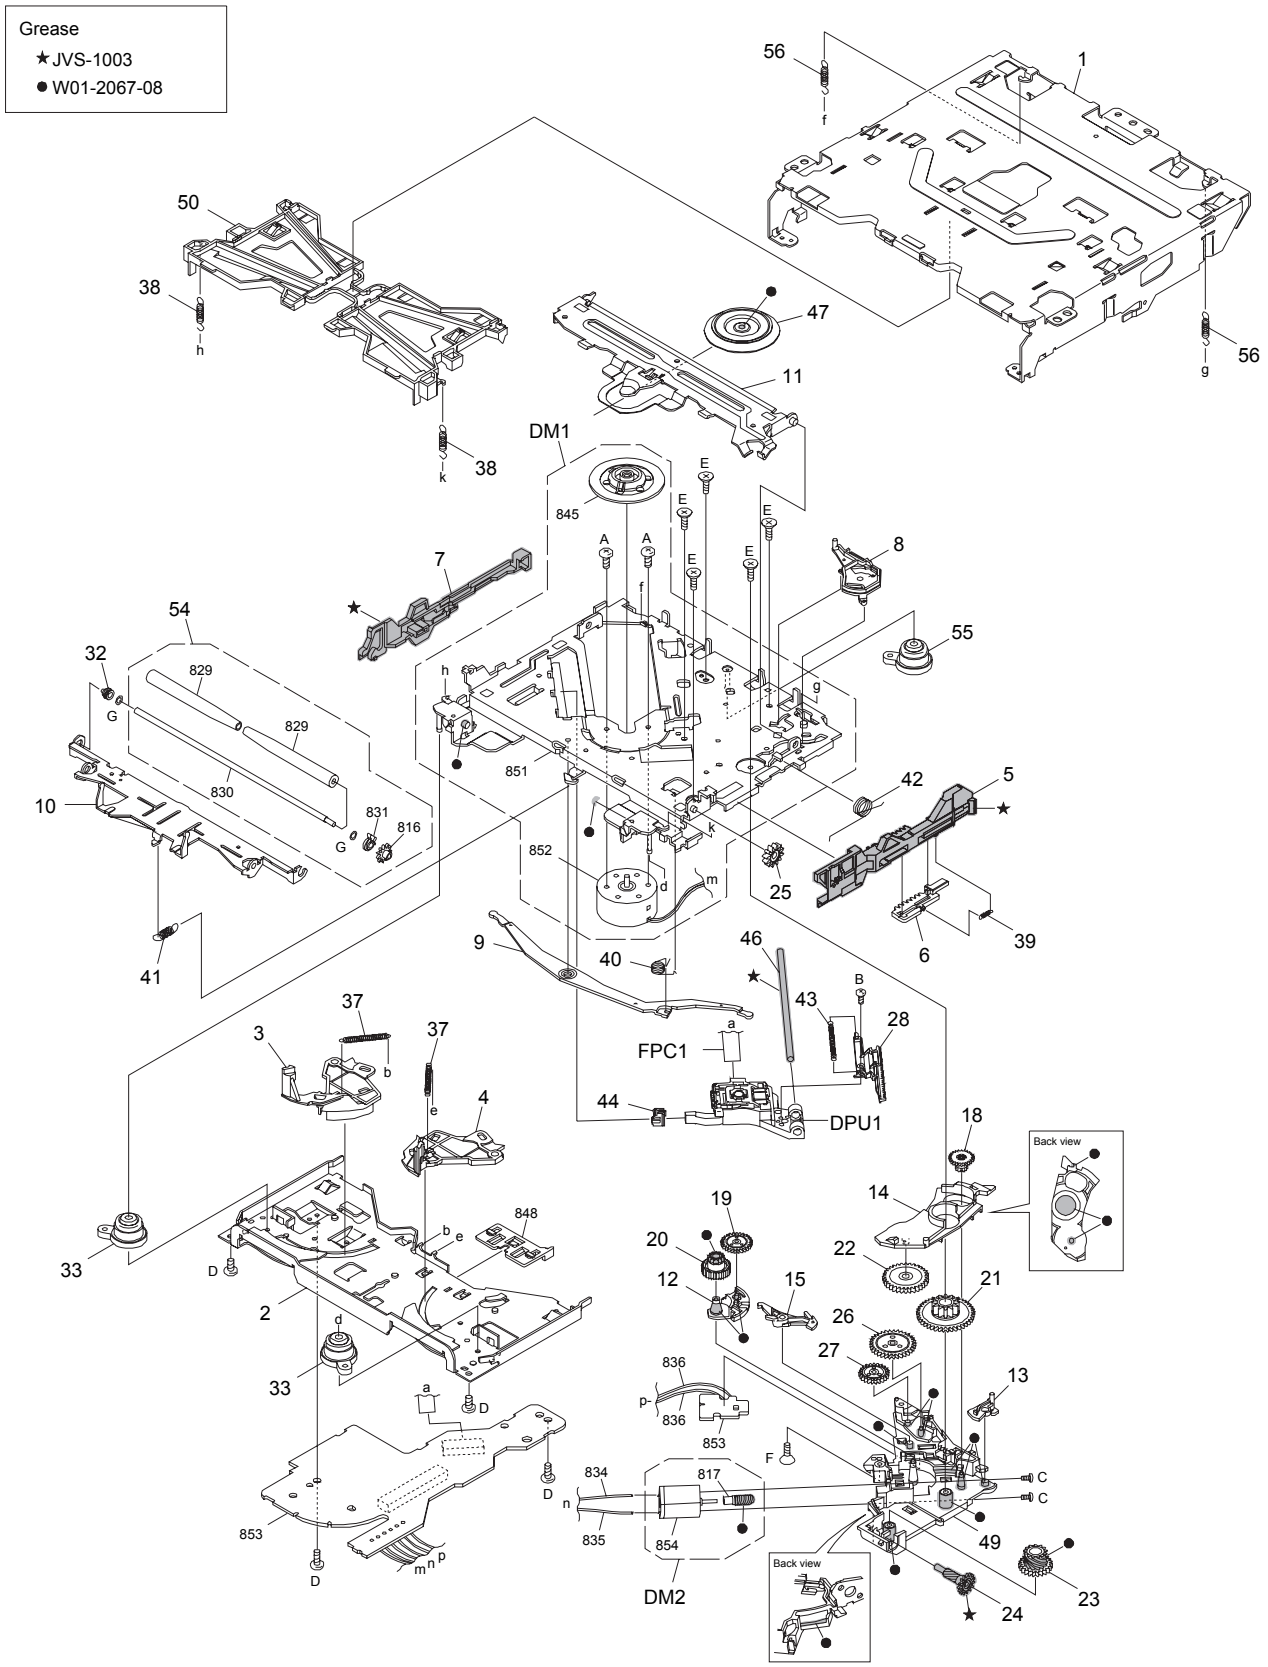

Parts with the exploded numbers larger than 800 are not supplied.

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-AR959BSJ	A	KD-R950BTJ	B	KD-R951BTE	C	KD-R951BTEN	D
KD-R951BTEY	E	KD-R959BTUR	F				

EXPLODED VIEW (CD MECHANISM: FC2-3A00NXN) <MBMM>

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	DM1	CM-FC2-MD	MD CHASSIS ASSY		1	
	DM2	CM-FC2-M	LOADING MOTOR ASSY		1	
⚠	DPU1	QAL1521-001	PICK UP		1	
	FPC1	QAL1465-001	FPC		1	
	A	LV45568-001A	MINI SCREW		2	
	B	QYSPSGT1745ZA	TAP SCREW	M1.7 x 4.5mm	1	
	C	QYSPSPT2025MA	SCREW	M2 x 2.5mm	2	
	D	VKZ4539-054	MINI SCREW		4	
	E	LV45818-001A	G.HOLDER SCREW		5	
	F	LV45815-001A	M. SHAFT SCREW		1	
	G	LV45816-001A	ROLLER WASHER		2	
	1	LV11877-002A	OUTER CHASSIS		1	
	2	LV11878-002A	LOWER CHASSIS		1	
	3	LV3A174-001A	DISC ARM L		1	
	4	LV3A175-001A	DISC ARM R		1	
	5	LV23057-001A	SLIDER R		1	
	6	LV3A178-001A	TRIGGER SLIDER		1	
	7	LV23058-001A	SLIDER L		1	
	8	LV3A179-002A	TRIGGER ARM		1	
	9	LV3A173-001A	JOINT LEVER		1	
	10	LV23055-002A	ROLLER LEVER		1	
	11	LV23056-001A	CLAMP ARM		1	
	12	LV3A181-001A	TRANSFER ARM		1	
	13	LV45797-002A	SL LOCK CAM		1	
	14	LV3A182-003A	SL LOCK ARM		1	
	15	LV3A183-001A	PICK LOCK ARM		1	
	18	LV3A187-002A	HELICAL GEAR 1		1	
	19	LV3A188-001A	TRANSFER GEAR		1	
	20	LV3A189-001A	LOAD GEAR H		1	
	21	LV3A190-001A	DRIVE GEAR		1	
	22	LV3A191-001A	JOINT GEAR		1	
	23	LV3A192-001A	WORM GEAR 2		1	
	24	LV3A193-001A	HELICAL GEAR 2		1	
	25	LV3A194-001A	LOAD GEAR V		1	
	26	LV3A195-001A	PICK GEAR 1		1	
	27	LV3A196-001A	PICK GEAR 2		1	
	28	LV3A197-001A	RACK GEAR		1	
	32	LV45796-001A	R.RETAINER L		1	
	33	D39-0403-05	DAMPER		2	
	37	LV45808-001A	DISC ARM SPRING		2	
	38	LV45809-001A	FLOAT SPRING(F)		2	
	39	LV45810-001A	TRIGGER SPRING		1	
	40	LV45811-001A	LOAD SPRING		1	
	41	LV45812-001A	ROLLER SPRING		1	
	42	LV45813-001A	CLAMP SPRING		1	
	43	LV45814-001A	PICK SPRING		1	
	44	LV36813-201A	SUB GUIDE CAP		1	
	46	LV44555-001A	MAIN SHAFT		1	
	47	LV3A180-001A	CLAMPER		1	
	49	LV11881-002A	GEAR HOLDER		1	
	50	LV11880-003A	DISC GUIDE		1	
	54	CM-FC2-R	ROLLER ASSY		1	
	55	D39-0404-05	DAMPER		1	
	56	LV45835-001A	FLOAT SPRING(R)		2	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-AR959BSJ	A	KD-R950BTJ	B	KD-R951BTE	C	KD-R951BTEN	D
KD-R951BTEY	E	KD-R959BTUR	F				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
MAIN PWB ASSY (GEA10374-1xA) Except KD-AR959BSJ,KD-R959BTUR <01>						
⚠	IC1	TEF6657HN-X	IC		1	B,C,D,E
	IC60	BD9876AEFJ-X	IC		1	B,C,D,E
	IC80	MFI337S3959-X	IC		1	B,C,D,E
	IC161	TDA7721-X	IC		1	B,C,D,E
⚠	IC301	JCV8031	IC		1	B,C,D,E
⚠	IC701	R5S726A0D216FP	IC		1	B,C,D,E
	IC710	BR24T02FJ-W-X	IC		1	B,C,D,E
	IC720	BU4228F-W	IC		1	B,C,D,E
⚠	IC840	JES265E	IC		1	B,C,D,E,F
⚠	IC901	LV5684NPVD	IC		1	B,C,D,E
	IC930	BU33TD3WG-W	IC		1	B,C,D,E
	IC931	BU33TD3WG-W	IC		1	B,C,D,E
	IC943	BU1CTD3WG-W	IC		1	B,C,D,E
	IC981	BD9876AEFJ-X	IC		1	B,C,D,E
	IC982	NCP380HSNAJAA-X	IC		1	B,C,D,E
	Q91	2SC1623/5-6/-X	TRANSISTOR		1	B,C,D,E
	Q250	LTC043TEB-X	DIGI TRANSISTOR		1	B,C,D,E
	Q251	LTC043TEB-X	DIGI TRANSISTOR		1	B
	Q320	LTC043TEB-X	DIGI TRANSISTOR		1	C,D,E
	Q321	LTC043TEB-X	DIGI TRANSISTOR		1	B,C,D,E
	Q330	LTC043TEB-X	DIGI TRANSISTOR		1	C,D,E
	Q331	LTC043TEB-X	DIGI TRANSISTOR		1	B,C,D,E
	Q780	LTA024EEB-X	DIGI TRANSISTOR		1	B,C,D,E
	Q781	LTC024EEB-X	DIGI TRANSISTOR		1	B,C,D,E
	Q782	LTA024EEB-X	DIGI TRANSISTOR		1	B,C,D,E
	Q880	LSCR523EBFS8	TRANSISTOR		1	B,C,D,E
	Q912	LTA014YEB-X	DIGI TRANSISTOR		1	B,C,D,E
	Q931	LTA043ZUB-X	DIGI TRANSISTOR		1	B,C,D,E
	Q932	LTC024EUBFS8	DIGI TRANSISTOR		1	B,C,D,E
	Q940	LTA023JUB-X	DIGI TRANSISTOR		1	B,C,D,E
	Q941	LTC024EEB-X	DIGI TRANSISTOR		1	B,C,D,E
	Q970	LSCR523EBFS8	TRANSISTOR		1	B,C,D,E
	Q971	LSCR523EBFS8	TRANSISTOR		1	B,C,D,E
	Q972	LSCR523EBFS8	TRANSISTOR		1	B,C,D,E
	D1	NAF0029-002X	ESD SUPPRESSOR		1	B,C,D,E
	D60	MBRX130	SCHOTTKY DIODE		1	B,C,D,E
	D90	DZ2J056M	Z DIODE		1	B,C,D,E
	D91	DZ2J091M	Z DIODE		1	C,D,E
	D92	DZ2J062M	Z DIODE		1	B,C,D,E
	D93	DZ2J062M	Z DIODE		1	B,C,D,E
	D100	RSB6.8SM-X	BP Z DIODE		1	B,C,D,E
	D101	RSB6.8SM-X	BP Z DIODE		1	B,C,D,E
	D501	GS1J-LTP-X	SI DIODE		1	B,C,D,E
	D780	BAW56-TP-X	SI DIODE		1	B,C,D,E
	D781	BAW56-TP-X	SI DIODE		1	B,C,D,E
	D782	DA2J101	DIODE		1	B,C,D,E
	D783	BAW56-TP-X	SI DIODE		1	B,C,D,E
⚠	D901	1N5401-BPC04	SI DIODE		1	B,C,D,E
	D902	SK34A-L-X	SB DIODE		1	B,C,D,E
	D903	SK34A-L-X	SB DIODE		1	B,C,D,E
	D906	MBRX130	SCHOTTKY DIODE		1	B,C,D,E
	D907	MBR0530-X	SB DIODE		1	B,C,D,E
	D908	DZ2J051M	Z DIODE		1	B,C,D,E
	D909	RB521SM-30-X	SB DIODE		1	B,C,D,E
	D930	DZ2J033/M/-X	Z DIODE		1	B,C,D,E
	D931	MBRX130	SCHOTTKY DIODE		1	B,C,D,E
	D970	DZ2J062M	Z DIODE		1	B,C,D,E
	D971	DZ2J068M	Z DIODE		1	B,C,D,E
	D972	DZ2J062M	Z DIODE		1	B,C,D,E
	D981	SK34A-L-X	SB DIODE		1	B,C,D,E
	C1	CC73GCH1H330J	C CAPACITOR	33pF 50V J	1	B,C,D,E
	C3	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	B,C,D,E
	C5	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1	B,C,D,E
	C6	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	B,C,D,E
	C7	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	B,C,D,E
⚠	C8	CC73GCH1H010C	C CAPACITOR	1pF 50V C	1	B,C,D,E
	C10	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	B,C,D,E
	C11	CK73GBB1H152K	C CAPACITOR	1500pF 50V K	1	B,C,D,E
	C12	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	B,C,D,E
	C13	CC73GCH1H220J	C CAPACITOR	22pF 50V J	1	B,C,D,E
	C14	CC73GCH1H090D	C CAPACITOR	9pF 50V D	1	B,C,D,E
	C17	CK730AX0J106K	C CAPACITOR	10uF 6.3V K	1	B,C,D,E
	C18	CK730AX0J106K	C CAPACITOR	10uF 6.3V K	1	B,C,D,E
	C19	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	B,C,D,E
	C23	CC73GCH1H030C	C CAPACITOR	3pF 50V C	1	B,C,D,E
	C25	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	B,C,D,E
⚠	C26	CC73GCH1H010C	C CAPACITOR	1pF 50V C	1	B,C,D,E
	C28	CC73GCH1H120J	C CAPACITOR	12pF 50V J	1	B,C,D,E
	C30	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	B,C,D,E
	C31	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	B,C,D,E
	C60	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	B,C,D,E
	C61	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	B,C,D,E
	C62	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	B,C,D,E
	C63	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	B,C,D,E
	C64	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	B,C,D,E
	C66	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	B,C,D,E
	C67	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	B,C,D,E
	C68	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	B,C,D,E
	C78	CC73GCH1H121J	C CAPACITOR	120pF 50V J	1	B,C,D,E
	C79	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	B,C,D,E

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-AR959BSJ	A	KD-R950BTJ	B	KD-R951BTE	C	KD-R951BTEN	D
KD-R951BTEY	E	KD-R959BTUR	F				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C80	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	B,C,D,E
	C82	CC73GCH1H121J	C CAPACITOR	120pF 50V J	1	B,C,D,E
	C83	CC73GCH1H121J	C CAPACITOR	120pF 50V J	1	B,C,D,E
	C84	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	B,C,D,E
	C92	CC73GCH1H820J	C CAPACITOR	82pF 50V J	1	B,C,D,E
	C93	CC73GCH1H820J	C CAPACITOR	82pF 50V J	1	B,C,D,E
	C94	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	B,C,D,E
	C95	CK73FXR1A106K	C CAPACITOR	10uF 10V K	1	B,C,D,E
	C96	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	B,C,D,E
	C100	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	B,C,D,E
	C101	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	B,C,D,E
	C102	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	B,C,D,E
	C103	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	B,C,D,E
	C104	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	B,C,D,E
	C105	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	B,C,D,E
	C161	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	B,C,D,E
	C162	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	B,C,D,E
	C163	QTE1V67-475Z	E CAPACITOR	4.7uF 35V	1	B,C,D,E
	C164	QTE1V67-475Z	E CAPACITOR	4.7uF 35V	1	B,C,D,E
	C165	CD04AV1C100M	E CAPACITOR	10uF 16V M	1	B,C,D,E
	C166	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	B,C,D,E
	C169	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	B,C,D,E
	C170	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	B,C,D,E
	C171	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	B,C,D,E
	C173	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	B,C,D,E
	C174	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	B,C,D,E
	C177	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	B,C,D,E
	C250	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	B,C,D,E
	C251	CD04AV1C100M	E CAPACITOR	10uF 16V M	1	B,C,D,E
	C260	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	B
	C261	CD04AV1C100M	E CAPACITOR	10uF 16V M	1	B
	C303	CC73GCH1H820J	C CAPACITOR	82pF 50V J	1	B,C,D,E
	C304	CD04AV1C470M	E CAPACITOR	47uF 16V M	1	B,C,D,E
	C305	CC73GCH1H820J	C CAPACITOR	82pF 50V J	1	B,C,D,E
	C306	CC73GCH1H820J	C CAPACITOR	82pF 50V J	1	B,C,D,E
	C312	CK730BV1A105K	C CAPACITOR	1uF 10V K	1	B,C,D,E
	C316	NCZ1106-224X	C CAPACITOR	0.22uF	1	B,C,D,E
	C317	NCZ1106-224X	C CAPACITOR	0.22uF	1	B,C,D,E
	C318	NCZ1106-224X	C CAPACITOR	0.22uF	1	B,C,D,E
	C319	NCZ1106-224X	C CAPACITOR	0.22uF	1	B,C,D,E
	C320	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	B,C,D,E
	C321	CD04AV1C100M	E CAPACITOR	10uF 16V M	1	B,C,D,E
	C330	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	B,C,D,E
	C331	CD04AV1C100M	E CAPACITOR	10uF 16V M	1	B,C,D,E
	C340	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	C,D,E
	C341	CD04AV1C100M	E CAPACITOR	10uF 16V M	1	C,D,E
	C350	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	C,D,E
	C351	CD04AV1C100M	E CAPACITOR	10uF 16V M	1	C,D,E
	C360	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	F
	C361	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	F
	C362	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	F
	C363	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	F
	C364	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	F
	C365	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	F
	C366	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	F
	C367	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	F
	C368	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	B,C,D,E
	C369	NCB21AK-475X	C CAPACITOR	4.7uF 10V K	1	B,C,D,E
	C371	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	B,C,D,E
	C372	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	B,C,D,E
	C403	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	B,C,D,E,F
	C410	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	B,C,D,E,F
	C501	CD04AS1C101M	E CAPACITOR	100uF 16V M	1	B,C,D,E
	C502	CC73GCH1H681J	C CAPACITOR	680pF 50V J	1	B,C,D,E
	C503	CC73GCH1H681J	C CAPACITOR	680pF 50V J	1	B,C,D,E
	C504	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	B,C,D,E,F
	C701	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	B,C,D,E
	C702	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	B,C,D,E
	C703	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	B,C,D,E
	C704	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	B,C,D,E
	C705	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	B,C,D,E
	C706	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	B,C,D,E
	C707	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	B,C,D,E
	C708	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	B,C,D,E
	C709	CC73GCH1H090D	C CAPACITOR	9pF 50V D	1	B,C,D,E
	C710	CC73GCH1H090D	C CAPACITOR	9pF 50V D	1	B,C,D,E
	C711	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	B,C,D,E
	C712	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	B,C,D,E
	C714	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	B,C,D,E
	C715	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	B,C,D,E
	C716	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	B,C,D,E
	C717	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	B,C,D,E
	C718	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	B,C,D,E
	C719	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	B,C,D,E,F
	C720	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	B,C,D,E
	C728	CK73GBB1H473K	C CAPACITOR	0.047uF 50V K	1	B,C,D,E
	C729	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	B,C,D,E
	C730	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	B,C,D,E
	C731	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	B,C,D,E
	C734	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	B,C,D,E

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-AR959BSJ	A	KD-R950BTJ	B	KD-R951BTE	C	KD-R951BTEN	D
KD-R951BTEY	E	KD-R959BTUR	F				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C735	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	B,C,D,E,F
	C736	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	B,C,D,E
	C738	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	B,C,D,E
	C740	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	B,C,D,E
	C741	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	B,C,D,E
	C742	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	B,C,D,E
	C744	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	B,C,D,E
	C747	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	B,C,D,E,F
	C748	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	B,C,D,E,F
	C749	CC73GCH1H470J	C CAPACITOR	47pF 50V J	1	B,C,D,E,F
	C840	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	B,C,D,E
	C841	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	B,C,D,E
	C880	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	B,C,D,E
	C881	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	B,C,D,E
	C901	QEZ0937-278	E CAPACITOR	2700uF	1	B,C,D,E
	C903	CD04AS1C220M	E CAPACITOR	22uF 16V M	1	B,C,D,E
	C904	CD04AR1C471M	E CAPACITOR	470uF 16V M	1	B,C,D,E
	C905	QEKJ0JM-107Z	E CAPACITOR	100uF 6.3V M	1	B,C,D,E
	C907	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	B,C,D,E
	C908	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	B,C,D,E
	C910	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	B,C,D,E
	C911	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	B,C,D,E
	C913	CK73FBB1C105K	C CAPACITOR	1uF 16V K	1	B,C,D,E
	C914	CK73FBB1C105K	C CAPACITOR	1uF 16V K	1	B,C,D,E
	C915	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	B,C,D,E
	C916	CC73GCH1H070D	C CAPACITOR	7pF 50V D	1	B,C,D,E
	C917	CC73GCH1H030C	C CAPACITOR	3pF 50V C	1	B,C,D,E
	C930	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	B,C,D,E
	C931	CK73FXR1A106K	C CAPACITOR	10uF 10V K	1	B,C,D,E
	C932	CK73FXR1A106K	C CAPACITOR	10uF 10V K	1	B,C,D,E
	C934	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	B,C,D,E
	C935	CK73FXR1A106K	C CAPACITOR	10uF 10V K	1	B,C,D,E
	C936	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	B,C,D,E
	C937	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	B,C,D,E
	C938	QERF0JM-337Z	E CAPACITOR	330uF 6.3V M	1	B,C,D,E
	C950	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	B,C,D,E
	C953	CK73GBB1C474K	C CAPACITOR	0.47uF 16V K	1	B,C,D,E
	C954	CK73GBB1C474K	C CAPACITOR	0.47uF 16V K	1	B,C,D,E
	C955	QEKJ0JM-107Z	E CAPACITOR	100uF 6.3V M	1	B,C,D,E
	C979	QEKJ0JM-107Z	E CAPACITOR	100uF 6.3V M	1	B,C,D,E
	C981	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	B,C,D,E
	C984	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	B,C,D,E
	C985	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	B,C,D,E
	C986	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	B,C,D,E
	C987	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	B,C,D,E
	C988	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	B,C,D,E
	C989	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	B,C,D,E
	C990	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	B,C,D,E
	C991	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	B,C,D,E
	C995	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	B,C,D,E
	R1	RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	1	B,C,D,E
	R2	RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	1	B,C,D,E
	R3	RK73GB2A820J	MG RESISTOR	82Ω 1/10W J	1	B,C,D,E
	R4	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	B,C,D,E
	R7	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	B,C,D,E
	R8	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	B,C,D,E
	R15	RK73GB2A4R7J	MG RESISTOR	4.7Ω 1/10W J	1	B,C,D,E
	R16	RK73GH2A100D	MG RESISTOR	10Ω 1/10W D	1	B,C,D,E
	R60	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	B,C,D,E
	R61	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	B,C,D,E
	R62	RK73GH2A913D	MG RESISTOR	91kΩ 1/10W D	1	B,C,D,E
	R63	RK73GH2A224D	MG RESISTOR	220kΩ 1/10W D	1	B,C,D,E
	R64	RK73GH2A243D	MG RESISTOR	24kΩ 1/10W D	1	B,C,D,E
	R80	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	B,C,D,E
	R81	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	B,C,D,E
	R82	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	B,C,D,E
	R83	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	B,C,D,E
	R89	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	B,C,D,E
	R90	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	B,C,D,E
	R91	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	B,C,D,E
	R92	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	B
	R92	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	1	C,D,E
	R93	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	B,C,D,E
	R94	RK73FB2B100J	MG RESISTOR	10Ω 1/8W J	1	B
	R94	RK73FB2B220J	MG RESISTOR	22Ω 1/8W J	1	C,D,E
	R95	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	B,C,D,E
	R97	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	B,C,D,E
	R98	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	B,C,D,E
	R99	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	B,C,D,E
	R100	RK73EB2E471J	MG RESISTOR	470Ω 1/4W J	1	B,C,D,E
	R101	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J	1	B,C,D,E
	R103	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	B,C,D,E
	R104	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	B,C,D,E
	R164	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	B,C,D,E
	R170	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	B,C,D,E
	R171	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	B,C,D,E
	R250	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	B,C,D,E
	R251	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	B,C,D,E
	R252	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	B,C,D,E
	R253	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	C,D,E
	R260	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	B
	R261	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	B

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-AR959BSJ	A	KD-R950BTJ	B	KD-R951BTE	C	KD-R951BTEN	D
KD-R951BTEY	E	KD-R959BTUR	F				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R262	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	B
	R301	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	B,C,D,E
	R302	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	B,C,D,E
	R303	RK73EB2E5R1J	MG RESISTOR	5.1Ω 1/4W J	1	B,C,D,E
	R304	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	B,C,D,E
	R307	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	B,C,D,E
	R320	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	B,C,D,E
	R321	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	B,C,D,E
	R323	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	B,C,D,E
	R330	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	B,C,D,E
	R331	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	B,C,D,E
	R333	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	B,C,D,E
	R340	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	C,D,E
	R341	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	C,D,E
	R343	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	C,D,E
	R350	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	C,D,E
	R351	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	C,D,E
	R353	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	C,D,E
	R403	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	B,C,D,E
	R404	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	B,C,D,E
	R406	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	B,C,D,E
	R411	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	B,C,D,E
	R412	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	B,C,D,E
	R413	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	B,C,D,E
	R414	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	B,C,D,E
	R415	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	B,C,D,E
	R416	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	B,C,D,E
	R419	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	B,C,D,E
	R420	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	B,C,D,E
	R422	NRZ0084-0R0X	MG RESISTOR	0Ω	1	B,C,D,E
	R423	NRZ0084-0R0X	MG RESISTOR	0Ω	1	B,C,D,E
	R425	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	B,C,D,E
	R428	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	B,C,D,E
	R429	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	B,C,D,E
	R432	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	B,C,D,E
	R435	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	B,C,D,E
	R439	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	B,C,D,E
	R440	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	B,C,D,E
	R442	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	B,C,D,E
	R443	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	B,C,D,E
	R444	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	B,C,D,E
	R445	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	B,C,D,E
	R454	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	B,C,D,E
	R455	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	B,C,D,E,F
	R456	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	B,C,D,E,F
	R458	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	B,C,D,E
	R463	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	B,C,D,E
	R473	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	B,C,D,E
	R474	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	B,C,D,E
	R480	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	B,C,D,E
	R481	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	B,C,D,E
	R482	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	B,C,D,E
	R485	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	B,C,D,E,F
	R489	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	B,C,D,E
	R492	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	B,C,D,E
	R493	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	B,C,D,E,F
	R494	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	B,C,D,E,F
	R495	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	B,C,D,E,F
	R496	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	B,C,D,E,F
	R501	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	B,C,D,E
	R502	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	B,C,D,E
	R701	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	B,C,D,E
	R702	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	B,C,D,E
	R703	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	B,C,D,E
	R704	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	B,C,D,E
	R705	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	B,C,D,E
	R706	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	B,C,D,E
	R707	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	B,C,D,E
	R708	RK73GB2A911J	MG RESISTOR	910Ω 1/10W J	1	B,C,D,E
	R710	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	B,C,D,E
	R711	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	B,C,D,E
	R713	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	B,C,D,E
	R717	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	B,C,D,E
	R718	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	B,C,D,E
	R719	RK73GB2A332J	MG RESISTOR	3.3kΩ 1/10W J	1	B,C,D,E
	R720	RK73GB2A332J	MG RESISTOR	3.3kΩ 1/10W J	1	B,C,D,E
	R721	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	B,C,D,E
	R722	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	B,C,D,E
	R723	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	B,C,D,E
	R725	RK73GB2A303J	MG RESISTOR	30kΩ 1/10W J	1	B,C,D,E
	R726	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	B,C,D,E
	R728	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	B,C,D,E,F
	R729	RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	1	B,C,D,E
	R730	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	B,C,D,E
	R731	RK73GB2A153J	MG RESISTOR	15kΩ 1/10W J	1	B,C,D,E
	R732	RK73GB2A153J	MG RESISTOR	15kΩ 1/10W J	1	B,C,D,E
	R733	RK73GB2A220J	MG RESISTOR	22Ω 1/10W J	1	B,C,D,E
	R734	RK73GB2A220J	MG RESISTOR	22Ω 1/10W J	1	B,C,D,E
	R735	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	B,C,D,E
	R738	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	B,C,D,E

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-AR959BSJ	A	KD-R950BTJ	B	KD-R951BTE	C	KD-R951BTEN	D
KD-R951BTEY	E	KD-R959BTUR	F				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R739	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	B,C,D,E
	R741	RK73GB2A333J	MG RESISTOR	33kΩ 1/10W J	1	B
	R741	RK73GB2A393J	MG RESISTOR	39kΩ 1/10W J	1	C,D,E
	R742	RK73GB2A822J	MG RESISTOR	8.2kΩ 1/10W J	1	B
	R742	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	C,D,E
	R742	RK73GB2A153J	MG RESISTOR	15kΩ 1/10W J	1	F
	R743	RK73GB2A153J	MG RESISTOR	15kΩ 1/10W J	1	B
	R743	RK73GB2A822J	MG RESISTOR	8.2kΩ 1/10W J	1	C,D,E
	R744	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	B,C,D,E
	R745	RK73GB2A393J	MG RESISTOR	39kΩ 1/10W J	1	B
	R745	RK73GB2A333J	MG RESISTOR	33kΩ 1/10W J	1	F
	R746	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	B,C,D,E
	R747	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	B,C,D,E
	R748	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	B,C,D,E
	R749	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	B,C,D,E
	R750	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	B,C,D,E
	R751	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	B,C,D,E
	R752	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	B,C,D,E
	R753	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	B,C,D,E
	R754	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	B,C,D,E
	R756	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	B,C,D,E
	R757	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	B,C,D,E
	R758	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	B,C,D,E
	R759	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	B,C,D,E
	R760	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	B,C,D,E
	R761	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	B,C,D,E
	R762	RK73EB2E103J	MG RESISTOR	10kΩ 1/4W J	1	B,C,D,E
	R763	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	B,C,D,E
	R764	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	B,C,D,E
	R765	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	B,C,D,E
	R767	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	B,C,D,E
	R768	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	B,C,D,E
	R769	RK73GB2A332J	MG RESISTOR	3.3kΩ 1/10W J	1	B,C,D,E
	R770	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	B,C,D,E
	R771	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	B,C,D,E
	R772	RK73GB2A911J	MG RESISTOR	910Ω 1/10W J	1	B,C,D,E
	R773	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	B,C,D,E
	R775	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	B,C,D,E
	R776	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	B,C,D,E
	R777	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	B,C,D,E
	R778	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	B,C,D,E
	R779	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	B,C,D,E
	R780	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	B,C,D,E
	R781	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	B,C,D,E
	R782	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	B,C,D,E
	R783	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	B,C,D,E
	R784	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	B,C,D,E
	R785	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	B,C,D,E
	R787	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	B,C,D,E
	R788	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	B,C,D,E
	R791	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	B,C,D,E
	R792	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	B,C,D,E
	R793	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	B,C,D,E
	R794	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	B,C,D,E
	R796	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	1	B,C,D,E
	R797	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	B,C,D,E
	R840	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	B,C,D,E
	R841	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	B,C,D,E
	R842	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	B,C,D,E
	R880	RK73FB2B472J	MG RESISTOR	4.7kΩ 1/8W J	1	B,C,D,E
	R881	RK73FB2B472J	MG RESISTOR	4.7kΩ 1/8W J	1	B,C,D,E
	R882	RK73FB2B223J	MG RESISTOR	22kΩ 1/8W J	1	B,C,D,E
	R883	RK73GB2A333J	MG RESISTOR	33kΩ 1/10W J	1	B,C,D,E
	R884	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	B,C,D,E
	R885	RK73GB2A273J	MG RESISTOR	27kΩ 1/10W J	1	B,C,D,E
	R892	RK73GB2A683J	MG RESISTOR	68kΩ 1/10W J	1	B,C,D,E
	R901	RK73GB2A333J	MG RESISTOR	33kΩ 1/10W J	1	B,C,D,E
	R902	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	B,C,D,E
	R903	RK73GB2A273J	MG RESISTOR	27kΩ 1/10W J	1	B,C,D,E
	R904	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	B
	R904	RK73GB2A332J	MG RESISTOR	3.3kΩ 1/10W J	1	C,D,E
	R911	RK73EB2E472J	MG RESISTOR	4.7kΩ 1/4W J	1	B,C,D,E
	R914	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	B,C,D,E
	R915	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	B,C,D,E
	R916	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	B,C,D,E
	R920	RK73GB2A332J	MG RESISTOR	3.3kΩ 1/10W J	1	B,C,D,E
	R921	RK73GH2A100D	MG RESISTOR	10Ω 1/10W D	1	B,C,D,E
	R930	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	B,C,D,E
	R931	RK73GB2A431J	MG RESISTOR	430Ω 1/10W J	1	B
	R931	RK73GB2A681J	MG RESISTOR	680Ω 1/10W J	1	C,D,E
	R933	RK73EB2E4R7J	MG RESISTOR	4.7Ω 1/4W J	1	B,C,D,E
	R935	RK73EB2E4R7J	MG RESISTOR	4.7Ω 1/4W J	1	B,C,D,E
	R945	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	B,C,D,E
	R946	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	B,C,D,E
	R969	RK73GB2A563J	MG RESISTOR	56kΩ 1/10W J	1	B,C,D,E
	R970	RK73FB2B683J	MG RESISTOR	68kΩ 1/8W J	1	B,C,D,E
	R971	RK73FB2B473J	MG RESISTOR	47kΩ 1/8W J	1	B,C,D,E
	R972	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	B,C,D,E
	R973	RK73GB2A333J	MG RESISTOR	33kΩ 1/10W J	1	B,C,D,E
	R974	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	B,C,D,E
	R975	RK73GB2A333J	MG RESISTOR	33kΩ 1/10W J	1	B,C,D,E
	R976	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	B,C,D,E

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-AR959BSJ	A	KD-R950BTJ	B	KD-R951BTE	C	KD-R951BTEN	D
KD-R951BTEY	E	KD-R959BTUR	F				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R977	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	B,C,D,E
	R978	RK73EB2E473J	MG RESISTOR	47kΩ 1/4W J	1	B,C,D,E
	R979	RK73EB2E682J	MG RESISTOR	6.8kΩ 1/4W J	1	B,C,D,E
	R980	RK73EB2E682J	MG RESISTOR	6.8kΩ 1/4W J	1	B,C,D,E
	R982	RK73GH2A913D	MG RESISTOR	91kΩ 1/10W D	1	B,C,D,E
	R983	RK73GH2A224D	MG RESISTOR	220kΩ 1/10W D	1	B,C,D,E
	R984	RK73GH2A243D	MG RESISTOR	24kΩ 1/10W D	1	B,C,D,E
	R986	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	B,C,D,E
	R987	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	B,C,D,E
	R989	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	B,C,D,E
	R990	RK73GH2A203D	MG RESISTOR	20kΩ 1/10W D	1	B,C,D,E
	R995	RK73GH2A100D	MG RESISTOR	10Ω 1/10W D	1	B,C,D,E
	L3	NQLM93K-R10X	COIL	0.1uH K	1	B,C,D,E
	L5	NQLM93K-4R7X	COIL	4.7uH K	1	B,C,D,E
	L6	NQLM93K-R15X	COIL	0.15uH K	1	B,C,D,E
	L7	NQLM93K-R47X	COIL	0.47uH K	1	B,C,D,E
	L8	NQLM93K-1R0X	COIL	1uH K	1	B,C,D,E
	L9	LR73Z0AD4R7M	COIL	4.7uH	1	B,C,D,E
	L10	NQLM93K-R12X	COIL	0.12uH K	1	B,C,D,E
	L11	NQLM93K-R22X	COIL	0.22uH K	1	B,C,D,E
	L60	LK73Z0AK4R7M	P COIL	4.7uH	1	B,C,D,E
	L61	NQLN9EM-150X	COIL	15uH M	1	B,C,D,E
	L91	LR73Z0AD470M	COIL	47uH	1	B,C,D,E
	L92	LB73G0BK-006	CHIP FERRITE		1	B,C,D,E
	L93	LB73G0BK-006	CHIP FERRITE		1	B,C,D,E
	L96	LB73G0BK-006	CHIP FERRITE		1	B,C,D,E
	L97	LB73G0BA-005	CHIP FERRITE		1	B,C,D,E
	L98	NQLH25M-4R7X	P COIL	4.7uH	1	B,C,D,E
	L98	LK73Z0AK4R7M	P COIL	4.7uH	1	F
	L702	LB73G0BA-005	CHIP FERRITE		1	B,C,D,E
	L703	LB73G0BA-005	CHIP FERRITE		1	B,C,D,E
	L704	LB73G0BA-005	CHIP FERRITE		1	B,C,D,E
	L751	NQR0269-030X	FERRITE BEADS		1	B,C,D,E
	L752	LB73G0BA-005	CHIP FERRITE		1	B,C,D,E
	L753	LB73G0BA-005	CHIP FERRITE		1	B,C,D,E
	L754	LB73G0BA-005	CHIP FERRITE		1	B,C,D,E
	L755	LB73G0BA-005	CHIP FERRITE		1	B,C,D,E
	L756	LB73G0BA-005	CHIP FERRITE		1	B,C,D,E
	L757	LB73G0BA-005	CHIP FERRITE		1	B,C,D,E
	L758	LB73G0CA-002	CHIP FERRITE		1	B,C,D,E
	L759	NQR0713-001X	FERRITE BEADS		1	B,C,D,E
	L777	LB73G0BA-005	CHIP FERRITE		1	B,C,D,E
	L778	LB73G0BA-005	CHIP FERRITE		1	B,C,D,E
	L779	LB73G0BA-005	CHIP FERRITE		1	B,C,D,E
	L841	LB73G0BK-006	CHIP FERRITE		1	B,C,D,E
	L901	QQR1927-001	CHOKE COIL		1	B,C,D,E
	L941	LR73Z0AD4R7M	COIL	4.7uH	1	B,C,D,E
	L981	NQLN9EM-150X	COIL	15uH M	1	B,C,D,E
	L982	LK73Z0AK4R7M	P COIL	4.7uH	1	B,C,D,E
	BT1	QAU0559-001	RF MODULE		1	B,C,D,E
	CN91	QNS0307-001	3.5 JACK		1	B,C,D,E,F
	CN502	QGF1040F1-26	CONNECTOR	FFC/FPC (1-26)	1	B,C,D,E
	CN701	QGZ1102J1-20	CONNECTOR	(1-20)	1	B,C,D,E
	CN901	QNZ0607-001	CAR CONNECTOR		1	B,C,D,E
	J1	QNB0358-001	ANT TERMINAL		1	B,C,D,E
	J321	QNN0868-001	PIN JACK		1	B
	J321	QNN0866-001	PIN JACK		1	C,D,E
	S701	QSW0648-001Z	TACT SWITCH		1	B,C,D,E
	X1	QAX0969-001Z	CRYSTAL		1	B,C,D,E
	X701	NAX1243-001X	CRYSTAL		1	B,C,D,E

MAIN PWB ASSY (GEA10371-03A) KD-AR959BSJ,KD-R959BTUR <02>

⚠	IC1	TEF6657HN-X	IC		1	A,F
	IC60	BD9876AEFJ-X	IC		1	A,F
	IC80	MFI337S3959-X	IC		1	A,F
	IC161	TDA7721-X	IC		1	A,F
⚠	IC301	JCV8031	IC		1	A,F
⚠	IC701	R5S726A0D216FP	IC		1	A,F
	IC710	BR24T02FJ-W-X	IC		1	A,F
	IC720	BU4228F-W	IC		1	A,F
	IC801	TC7SH08FU-X	IC(DIGITAL)		1	A
	IC802	TC7SET08FU-J-X	IC(DIGITAL)		1	A
⚠	IC840	JES265E	IC		1	A
⚠	IC901	LV5684NPVD	IC		1	A,F
	IC930	BU33TD3WG-W	IC		1	A,F
	IC931	BU33TD3WG-W	IC		1	A,F
	IC943	BU1CTD3WG-W	IC		1	A,F
	IC981	BD9876AEFJ-X	IC		1	A,F
	IC982	NCP380HSNAJAA-X	IC		1	A,F
	Q91	2SC1623/5-6/-X	TRANSISTOR		1	A,F
	Q250	LTC043TEB-X	DIGI TRANSISTOR		1	A,F
	Q320	LTC043TEB-X	DIGI TRANSISTOR		1	A,F
	Q321	LTC043TEB-X	DIGI TRANSISTOR		1	A,F
	Q330	LTC043TEB-X	DIGI TRANSISTOR		1	A,F
	Q331	LTC043TEB-X	DIGI TRANSISTOR		1	A,F
	Q780	LTA024EEB-X	DIGI TRANSISTOR		1	A,F
	Q781	LTC024EEB-X	DIGI TRANSISTOR		1	A,F
	Q782	LTA024EEB-X	DIGI TRANSISTOR		1	A,F
	Q880	LSCR523EBFS8	TRANSISTOR		1	A,F
	Q912	LTA014YEB-X	DIGI TRANSISTOR		1	A,F
	Q931	LTA043ZUB-X	DIGI TRANSISTOR		1	A,F
	Q932	LTC024EUBFS8	DIGI TRANSISTOR		1	A,F

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-AR959BSJ	A	KD-R950BTJ	B	KD-R951BTE	C	KD-R951BTEN	D
KD-R951BTEY	E	KD-R959BTUR	F				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	Q940	LTA023JUB-X	DIGI TRANSISTOR		1	A,F
	Q941	LTC024EEB-X	DIGI TRANSISTOR		1	A,F
	Q970	LSCR523EBFS8	TRANSISTOR		1	A,F
	Q971	LSCR523EBFS8	TRANSISTOR		1	A,F
	Q972	LSCR523EBFS8	TRANSISTOR		1	A,F
	D1	NAF0029-002X	ESD SUPPRESSOR		1	A,F
	D60	MBRX130	SCHOTTKY DIODE		1	A,F
	D90	DZ2J056M	Z DIODE		1	A,F
	D91	DZ2J091M	Z DIODE		1	A,F
	D92	DZ2J062M	Z DIODE		1	A,F
	D93	DZ2J062M	Z DIODE		1	A,F
	D100	RSB6.8SM-X	BP Z DIODE		1	A,F
	D101	RSB6.8SM-X	BP Z DIODE		1	A,F
	D501	GS1J-LTP-X	SI DIODE		1	A,F
	D780	BAW56-TP-X	SI DIODE		1	A,F
	D781	BAW56-TP-X	SI DIODE		1	A,F
	D782	DA2J101	DIODE		1	A,F
	D783	BAW56-TP-X	SI DIODE		1	A,F
⚠	D901	1N5401-BPC04	SI DIODE		1	A,F
	D902	SK34A-L-X	SB DIODE		1	A,F
	D903	SK34A-L-X	SB DIODE		1	A,F
	D906	MBRX130	SCHOTTKY DIODE		1	A,F
	D907	MBR0530-X	SB DIODE		1	A,F
	D908	DZ2J051M	Z DIODE		1	A,F
	D909	RB521SM-30-X	SB DIODE		1	A,F
	D930	DZ2J033/M/-X	Z DIODE		1	A,F
	D931	MBRX130	SCHOTTKY DIODE		1	A,F
	D970	DZ2J062M	Z DIODE		1	A,F
	D971	DZ2J068M	Z DIODE		1	A,F
	D972	DZ2J062M	Z DIODE		1	A,F
	D981	SK34A-L-X	SB DIODE		1	A,F
	C1	CC73GCH1H330J	C CAPACITOR	33pF 50V J	1	A,F
	C3	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,F
	C5	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1	A,F
	C6	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	A,F
	C7	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	A,F
⚠	C8	CC73GCH1H010C	C CAPACITOR	1pF 50V C	1	A,F
	C10	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	A,F
	C11	CK73GBB1H152K	C CAPACITOR	1500pF 50V K	1	A,F
	C12	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,F
	C13	CC73GCH1H220J	C CAPACITOR	22pF 50V J	1	A,F
	C14	CC73GCH1H090D	C CAPACITOR	9pF 50V D	1	A,F
	C17	CK730AX0J106K	C CAPACITOR	10uF 6.3V K	1	A,F
	C18	CK730AX0J106K	C CAPACITOR	10uF 6.3V K	1	A,F
	C19	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,F
	C23	CC73GCH1H030C	C CAPACITOR	3pF 50V C	1	A,F
	C25	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	A,F
⚠	C26	CC73GCH1H010C	C CAPACITOR	1pF 50V C	1	A,F
	C28	CC73GCH1H120J	C CAPACITOR	12pF 50V J	1	A,F
	C30	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,F
	C31	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	A,F
	C60	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	A,F
	C61	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	A,F
	C62	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,F
	C63	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	A,F
	C64	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	A,F
	C66	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	A,F
	C67	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	A,F
	C68	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,F
	C78	CC73GCH1H121J	C CAPACITOR	120pF 50V J	1	A,F
	C79	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	A,F
	C80	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,F
	C82	CC73GCH1H121J	C CAPACITOR	120pF 50V J	1	A,F
	C83	CC73GCH1H121J	C CAPACITOR	120pF 50V J	1	A,F
	C84	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	A,F
	C92	CC73GCH1H820J	C CAPACITOR	82pF 50V J	1	A,F
	C93	CC73GCH1H820J	C CAPACITOR	82pF 50V J	1	A,F
	C94	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	A,F
	C95	CK73FXR1A106K	C CAPACITOR	10uF 10V K	1	A,F
	C96	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	A,F
	C100	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,F
	C101	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	A,F
	C102	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	A,F
	C103	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,F
	C104	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,F
	C105	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,F
	C161	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	A,F
	C162	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	A,F
	C163	QTE1V67-475Z	E CAPACITOR	4.7uF 35V	1	A,F
	C164	QTE1V67-475Z	E CAPACITOR	4.7uF 35V	1	A,F
	C165	CD04AV1C100M	E CAPACITOR	10uF 16V M	1	A,F
	C166	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,F
	C169	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	A,F
	C170	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	A,F
	C171	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	A,F
	C173	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	A,F
	C174	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	A,F
	C177	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	A,F
	C250	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	A,F
	C251	CD04AV1C100M	E CAPACITOR	10uF 16V M	1	A,F

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-AR959BSJ	A	KD-R950BTJ	B	KD-R951BTE	C	KD-R951BTEN	D
KD-R951BTEY	E	KD-R959BTUR	F				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C303	CC73GCH1H820J	C CAPACITOR	82pF 50V J	1	A,F
	C304	CD04AV1C470M	E CAPACITOR	47uF 16V M	1	A,F
	C305	CC73GCH1H820J	C CAPACITOR	82pF 50V J	1	A,F
	C306	CC73GCH1H820J	C CAPACITOR	82pF 50V J	1	A,F
	C312	CK730BV1A105K	C CAPACITOR	1uF 10V K	1	A,F
	C316	NCZ1106-224X	C CAPACITOR	0.22uF	1	A,F
	C317	NCZ1106-224X	C CAPACITOR	0.22uF	1	A,F
	C318	NCZ1106-224X	C CAPACITOR	0.22uF	1	A,F
	C319	NCZ1106-224X	C CAPACITOR	0.22uF	1	A,F
	C320	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	A,F
	C321	CD04AV1C100M	E CAPACITOR	10uF 16V M	1	A,F
	C330	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	A,F
	C331	CD04AV1C100M	E CAPACITOR	10uF 16V M	1	A,F
	C340	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	A,F
	C341	CD04AV1C100M	E CAPACITOR	10uF 16V M	1	A,F
	C350	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	A,F
	C351	CD04AV1C100M	E CAPACITOR	10uF 16V M	1	A,F
	C368	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	A,F
	C369	NCB21AK-475X	C CAPACITOR	4.7uF 10V K	1	A,F
	C371	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	A,F
	C372	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	A,F
	C410	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	A
	C501	CD04AS1C101M	E CAPACITOR	100uF 16V M	1	A,F
	C502	CC73GCH1H681J	C CAPACITOR	680pF 50V J	1	A,F
	C503	CC73GCH1H681J	C CAPACITOR	680pF 50V J	1	A,F
	C504	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	A
	C701	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,F
	C702	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,F
	C703	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,F
	C704	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,F
	C705	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,F
	C706	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,F
	C707	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,F
	C708	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,F
	C709	CC73GCH1H090D	C CAPACITOR	9pF 50V D	1	A,F
	C710	CC73GCH1H090D	C CAPACITOR	9pF 50V D	1	A,F
	C711	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,F
	C712	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,F
	C714	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,F
	C715	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,F
	C716	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,F
	C717	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,F
	C718	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,F
	C719	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A
	C720	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,F
	C728	CK73GBB1H473K	C CAPACITOR	0.047uF 50V K	1	A,F
	C729	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,F
	C730	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,F
	C731	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	A,F
	C734	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	A,F
	C736	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	A,F
	C738	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,F
	C740	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,F
	C741	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	A,F
	C742	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	A,F
	C744	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	A,F
	C749	CC73GCH1H470J	C CAPACITOR	47pF 50V J	1	A
	C801	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	A
	C802	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	A
	C803	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A
	C804	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A
	C805	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A
	C806	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A
	C840	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,F
	C841	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	A,F
	C880	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	A,F
	C881	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	A,F
	C901	QEZ0937-278	E CAPACITOR	2700uF	1	A,F
	C903	CD04AS1C220M	E CAPACITOR	22uF 16V M	1	A,F
	C904	CD04AR1C471M	E CAPACITOR	470uF 16V M	1	A,F
	C905	QEKJ0JM-107Z	E CAPACITOR	100uF 6.3V M	1	A,F
	C907	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	A,F
	C908	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,F
	C910	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,F
	C911	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,F
	C913	CK73FBB1C105K	C CAPACITOR	1uF 16V K	1	A,F
	C914	CK73FBB1C105K	C CAPACITOR	1uF 16V K	1	A,F
	C915	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,F
	C916	CC73GCH1H070D	C CAPACITOR	7pF 50V D	1	A,F
	C917	CC73GCH1H030C	C CAPACITOR	3pF 50V C	1	A,F
	C930	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	A,F
	C931	CK73FXR1A106K	C CAPACITOR	10uF 10V K	1	A,F
	C932	CK73FXR1A106K	C CAPACITOR	10uF 10V K	1	A,F
	C934	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	A,F
	C935	CK73FXR1A106K	C CAPACITOR	10uF 10V K	1	A,F
	C936	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	A,F
	C937	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	A,F
	C938	QERF0JM-337Z	E CAPACITOR	330uF 6.3V M	1	A,F
	C950	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,F
	C953	CK73GBB1C474K	C CAPACITOR	0.47uF 16V K	1	A,F
	C954	CK73GBB1C474K	C CAPACITOR	0.47uF 16V K	1	A,F
	C955	QEKJ0JM-107Z	E CAPACITOR	100uF 6.3V M	1	A,F

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-AR959BSJ	A	KD-R950BTJ	B	KD-R951BTE	C	KD-R951BTEN	D
KD-R951BTEY	E	KD-R959BTUR	F				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C979	QEKJ0JM-107Z	E CAPACITOR	100uF 6.3V M	1	A,F
	C981	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	A,F
	C984	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	A,F
	C985	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	A,F
	C986	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	A,F
	C987	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,F
	C988	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	A,F
	C989	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	A,F
	C990	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,F
	C991	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,F
	C995	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,F
	R1	RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	1	A,F
	R2	RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	1	A,F
	R3	RK73GB2A820J	MG RESISTOR	82Ω 1/10W J	1	A,F
	R4	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	A,F
	R7	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,F
	R8	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,F
	R15	RK73GB2A4R7J	MG RESISTOR	4.7Ω 1/10W J	1	A,F
	R16	RK73GH2A100D	MG RESISTOR	10Ω 1/10W D	1	A,F
	R60	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,F
	R61	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	A,F
	R62	RK73GH2A913D	MG RESISTOR	91kΩ 1/10W D	1	A,F
	R63	RK73GH2A224D	MG RESISTOR	220kΩ 1/10W D	1	A,F
	R64	RK73GH2A243D	MG RESISTOR	24kΩ 1/10W D	1	A,F
	R80	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,F
	R81	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,F
	R82	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	A,F
	R83	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	A,F
	R89	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,F
	R90	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	A,F
	R91	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	A,F
	R92	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	1	A,F
	R93	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	A,F
	R94	RK73FB2B220J	MG RESISTOR	22Ω 1/8W J	1	A,F
	R95	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	A,F
	R97	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,F
	R98	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,F
	R99	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,F
	R100	RK73EB2E471J	MG RESISTOR	470Ω 1/4W J	1	A,F
	R101	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J	1	A,F
	R103	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,F
	R104	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,F
	R162	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A
	R164	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	A,F
	R170	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,F
	R171	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	A,F
	R250	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	A,F
	R251	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	A,F
	R252	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	A,F
	R253	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,F
	R301	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,F
	R302	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	A,F
	R303	RK73EB2E5R1J	MG RESISTOR	5.1Ω 1/4W J	1	A,F
	R304	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,F
	R307	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,F
	R320	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	A,F
	R321	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	A,F
	R323	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	A,F
	R330	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	A,F
	R331	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	A,F
	R333	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	A,F
	R340	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	A,F
	R341	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	A,F
	R343	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	A,F
	R350	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	A,F
	R351	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	A,F
	R353	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	A,F
	R403	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,F
	R404	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,F
	R406	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,F
	R411	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,F
	R412	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,F
	R413	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,F
	R414	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,F
	R415	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,F
	R416	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,F
	R419	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,F
	R420	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,F
	R422	NRZ0084-0R0X	MG RESISTOR	0Ω	1	A,F
	R423	NRZ0084-0R0X	MG RESISTOR	0Ω	1	A,F
	R425	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,F
	R428	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,F
	R429	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,F
	R432	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,F
	R435	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,F
	R439	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,F
	R440	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,F
	R442	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,F
	R443	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,F
	R444	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,F

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-AR959BSJ	A	KD-R950BTJ	B	KD-R951BTE	C	KD-R951BTEN	D
KD-R951BTEY	E	KD-R959BTUR	F				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R445	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,F
	R447	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A
	R454	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,F
	R455	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A
	R456	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A
	R458	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,F
	R463	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,F
	R473	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,F
	R474	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,F
	R480	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,F
	R481	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,F
	R482	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,F
	R489	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,F
	R492	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,F
	R493	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A
	R494	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A
	R495	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A
	R496	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A
	R501	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	A,F
	R502	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	A,F
	R701	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,F
	R702	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	A,F
	R703	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	A,F
	R704	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	A,F
	R705	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	A,F
	R706	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	A,F
	R707	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	A,F
	R708	RK73GB2A911J	MG RESISTOR	910Ω 1/10W J	1	A,F
	R710	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,F
	R711	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,F
	R713	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,F
	R714	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A
	R715	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A
	R716	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A
	R717	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	A,F
	R718	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	A,F
	R719	RK73GB2A332J	MG RESISTOR	3.3kΩ 1/10W J	1	A,F
	R720	RK73GB2A332J	MG RESISTOR	3.3kΩ 1/10W J	1	A,F
	R721	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	A,F
	R722	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	A,F
	R723	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	A,F
	R725	RK73GB2A303J	MG RESISTOR	30kΩ 1/10W J	1	A,F
	R726	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,F
	R729	RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	1	A,F
	R730	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	A,F
	R731	RK73GB2A153J	MG RESISTOR	15kΩ 1/10W J	1	A,F
	R732	RK73GB2A153J	MG RESISTOR	15kΩ 1/10W J	1	A,F
	R733	RK73GB2A220J	MG RESISTOR	22Ω 1/10W J	1	A,F
	R734	RK73GB2A220J	MG RESISTOR	22Ω 1/10W J	1	A,F
	R735	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,F
	R738	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,F
	R739	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,F
	R741	RK73GB2A273J	MG RESISTOR	27kΩ 1/10W J	1	A,F
	R742	RK73GB2A822J	MG RESISTOR	8.2kΩ 1/10W J	1	A
	R743	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	A,F
	R744	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	A,F
	R745	RK73GB2A393J	MG RESISTOR	39kΩ 1/10W J	1	A
	R746	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,F
	R747	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,F
	R748	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,F
	R749	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,F
	R750	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	A,F
	R751	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,F
	R752	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,F
	R753	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,F
	R754	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,F
	R756	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,F
	R757	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,F
	R758	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	A,F
	R759	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	A,F
	R760	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	A,F
	R761	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	A,F
	R762	RK73EB2E103J	MG RESISTOR	10kΩ 1/4W J	1	A,F
	R763	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	A,F
	R764	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	A,F
	R765	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	A,F
	R767	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,F
	R768	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	A,F
	R769	RK73GB2A332J	MG RESISTOR	3.3kΩ 1/10W J	1	A,F
	R770	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	A,F
	R771	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	A,F
	R772	RK73GB2A911J	MG RESISTOR	910Ω 1/10W J	1	A,F
	R773	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	A,F
	R775	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,F
	R776	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,F
	R777	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,F
	R778	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	A,F
	R779	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,F
	R780	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	A,F
	R781	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	A,F
	R782	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,F
	R783	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	A,F

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-AR959BSJ	A	KD-R950BTJ	B	KD-R951BTE	C	KD-R951BTEN	D
KD-R951BTEY	E	KD-R959BTUR	F				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R784	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	A,F
	R785	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,F
	R787	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,F
	R788	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,F
	R791	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,F
	R792	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,F
	R793	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,F
	R794	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,F
	R796	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	1	A,F
	R797	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	A,F
	R800	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A
	R801	RK73GB2A4R7J	MG RESISTOR	4.7Ω 1/10W J	1	A
	R802	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	A
	R803	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	A
	R804	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A
	R805	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A
	R807	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	A
	R840	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,F
	R841	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,F
	R842	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,F
	R880	RK73FB2B472J	MG RESISTOR	4.7kΩ 1/8W J	1	A,F
	R881	RK73FB2B472J	MG RESISTOR	4.7kΩ 1/8W J	1	A,F
	R882	RK73FB2B223J	MG RESISTOR	22kΩ 1/8W J	1	A,F
	R883	RK73GB2A333J	MG RESISTOR	33kΩ 1/10W J	1	A,F
	R884	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	A,F
	R885	RK73GB2A273J	MG RESISTOR	27kΩ 1/10W J	1	A,F
	R892	RK73GB2A683J	MG RESISTOR	68kΩ 1/10W J	1	A,F
	R901	RK73GB2A333J	MG RESISTOR	33kΩ 1/10W J	1	A,F
	R902	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	A,F
	R903	RK73GB2A273J	MG RESISTOR	27kΩ 1/10W J	1	A,F
	R904	RK73GB2A332J	MG RESISTOR	3.3kΩ 1/10W J	1	A,F
	R911	RK73EB2E472J	MG RESISTOR	4.7kΩ 1/4W J	1	A,F
	R914	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	A,F
	R915	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,F
	R916	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	A,F
	R920	RK73GB2A332J	MG RESISTOR	3.3kΩ 1/10W J	1	A,F
	R921	RK73GH2A100D	MG RESISTOR	10Ω 1/10W D	1	A,F
	R930	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,F
	R931	RK73GB2A681J	MG RESISTOR	680Ω 1/10W J	1	A,F
	R933	RK73EB2E4R7J	MG RESISTOR	4.7Ω 1/4W J	1	A,F
	R935	RK73EB2E4R7J	MG RESISTOR	4.7Ω 1/4W J	1	A,F
	R945	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	A,F
	R946	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,F
	R969	RK73GB2A563J	MG RESISTOR	56kΩ 1/10W J	1	A,F
	R970	RK73FB2B683J	MG RESISTOR	68kΩ 1/8W J	1	A,F
	R971	RK73FB2B473J	MG RESISTOR	47kΩ 1/8W J	1	A,F
	R972	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	A,F
	R973	RK73GB2A333J	MG RESISTOR	33kΩ 1/10W J	1	A,F
	R974	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	A,F
	R975	RK73GB2A333J	MG RESISTOR	33kΩ 1/10W J	1	A,F
	R976	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	A,F
	R977	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	A,F
	R978	RK73EB2E473J	MG RESISTOR	47kΩ 1/4W J	1	A,F
	R979	RK73EB2E682J	MG RESISTOR	6.8kΩ 1/4W J	1	A,F
	R980	RK73EB2E682J	MG RESISTOR	6.8kΩ 1/4W J	1	A,F
	R982	RK73GH2A913D	MG RESISTOR	91kΩ 1/10W D	1	A,F
	R983	RK73GH2A224D	MG RESISTOR	220kΩ 1/10W D	1	A,F
	R984	RK73GH2A243D	MG RESISTOR	24kΩ 1/10W D	1	A,F
	R986	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,F
	R987	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	A,F
	R989	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	A,F
	R990	RK73GH2A203D	MG RESISTOR	20kΩ 1/10W D	1	A,F
	R995	RK73GH2A100D	MG RESISTOR	10Ω 1/10W D	1	A,F
	L3	NQLM93K-R10X	COIL	0.1uH K	1	A,F
	L5	NQLM93K-4R7X	COIL	4.7uH K	1	A,F
	L6	NQLM93K-R15X	COIL	0.15uH K	1	A,F
	L7	NQLM93K-R47X	COIL	0.47uH K	1	A,F
	L8	NQLM93K-1R0X	COIL	1uH K	1	A,F
	L9	LR73Z0AD4R7M	COIL	4.7uH	1	A,F
	L10	NQLM93K-R12X	COIL	0.12uH K	1	A,F
	L11	NQLM93K-R22X	COIL	0.22uH K	1	A,F
	L60	LK73Z0AK4R7M	P COIL	4.7uH	1	A,F
	L61	NQLN9EM-150X	COIL	15uH M	1	A,F
	L91	LR73Z0AD470M	COIL	47uH	1	A,F
	L92	LB73G0BK-006	CHIP FERRITE		1	A,F
	L93	LB73G0BK-006	CHIP FERRITE		1	A,F
	L96	LB73G0BK-006	CHIP FERRITE		1	A,F
	L97	LB73G0BA-005	CHIP FERRITE		1	A,F
	L98	NQLH25M-4R7X	P COIL	4.7uH	1	A
	L702	LB73G0BA-005	CHIP FERRITE		1	A,F
	L703	LB73G0BA-005	CHIP FERRITE		1	A,F
	L704	LB73G0BA-005	CHIP FERRITE		1	A,F
	L751	NQR0269-030X	FERRITE BEADS		1	A,F
	L752	LB73G0BA-005	CHIP FERRITE		1	A,F
	L753	LB73G0BA-005	CHIP FERRITE		1	A,F
	L754	LB73G0BA-005	CHIP FERRITE		1	A,F
	L755	LB73G0BA-005	CHIP FERRITE		1	A,F
	L756	LB73G0BA-005	CHIP FERRITE		1	A,F
	L757	LB73G0BA-005	CHIP FERRITE		1	A,F
	L758	LB73G0CA-002	CHIP FERRITE		1	A,F

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-AR959BSJ	A	KD-R950BTJ	B	KD-R951BTE	C	KD-R951BTEN	D
KD-R951BTEY	E	KD-R959BTUR	F				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	L759	NQR0713-001X	FERRITE BEADS		1	A,F
	L777	LB73G0BA-005	CHIP FERRITE		1	A,F
	L778	LB73G0BA-005	CHIP FERRITE		1	A,F
	L779	LB73G0BA-005	CHIP FERRITE		1	A,F
	L841	LB73G0BK-006	CHIP FERRITE		1	A,F
	L901	QQR1927-001	CHOKE COIL		1	A,F
	L941	LR73Z0AD4R7M	COIL	4.7uH	1	A,F
	L981	NQLN9EM-150X	COIL	15uH M	1	A,F
	L982	LK73Z0AK4R7M	P COIL	4.7uH	1	A,F
	BT1	QAU0559-001	RF MODULE		1	A,F
	CN92	QGA2001F1-02	CONNECTOR	W-B (1-2)	1	A
	CN502	QGF1040F1-26	CONNECTOR	FFC/FPC (1-26)	1	A,F
	CN701	QGZ1102J1-20	CONNECTOR	(1-20)	1	A,F
	CN901	QNZ0607-001	CAR CONNECTOR		1	A,F
	J1	QNB0358-001	ANT TERMINAL		1	A,F
	J321	QNN0866-001	PIN JACK		1	A,F
	J801	QNZ0907-001	CIR CONNECTOR		1	A
	S701	QSW0648-001Z	TACT SWITCH		1	A,F
	X1	QAX0969-001Z	CRYSTAL		1	A,F
	X701	NAX1243-001X	CRYSTAL		1	A,F

SWITCH PWB ASSY (GEA10363-05A) <03>

	IC601	PCA9633DP1-X	IC		1	
	IC661	BU97520KV-X	IC		1	
	IC681	SIR8630B6T	IR DETECT UNIT		1	
	Q601	LSCR523EBFS8	TRANSISTOR		1	
	Q602	LSCR523EBFS8	TRANSISTOR		1	
	Q603	LSCR523EBFS8	TRANSISTOR		1	
	Q605	LSCR523UBFS8	TRANSISTOR		1	
	Q611	LSCR523EBFS8	TRANSISTOR		1	
	Q612	LSCR523EBFS8	TRANSISTOR		1	
	Q613	LSCR523EBFS8	TRANSISTOR		1	
	Q621	LSCR523EBFS8	TRANSISTOR		1	
	Q622	LSCR523EBFS8	TRANSISTOR		1	
	Q623	LSCR523EBFS8	TRANSISTOR		1	
	Q681	LTA014EUBFS8	DIGI TRANSISTOR		1	
	Q682	LTC014EUBFS8	DIGI TRANSISTOR		1	
	D605	DZ2J051/M/-X	Z DIODE		1	A,B,C,D,E
	D605	DZ2J051M	Z DIODE		1	F
	D607	DZ2J051/M/-X	Z DIODE		1	A,B,C,D,E
	D607	DZ2J051M	Z DIODE		1	F
	D610	DZ2J051M	Z DIODE		1	
	D611	DZ2J051M	Z DIODE		1	
	D612	DZ2J062M	Z DIODE		1	
	D614	MBRX130	SCHOTTKY DIODE		1	
	D615	MBRX130	SCHOTTKY DIODE		1	
	D622	NESM026DT-W	LED		1	
	D623	NESM026DT-W	LED		1	
	D625	NESM026DT-W	LED		1	
	D629	NESM026DT-W	LED		1	
	C601	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C602	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C604	CC73GCH1H270J	C CAPACITOR	27pF 50V J	1	
	C605	CC73GCH1H270J	C CAPACITOR	27pF 50V J	1	
	C606	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C609	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C610	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C611	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C612	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C614	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C615	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C616	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C624	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C635	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C636	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C641	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	R601	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R602	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R607	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R608	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R610	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R612	RK73EB2E331J	MG RESISTOR	330Ω 1/4W J	1	
	R613	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	
	R614	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R615	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R616	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R617	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R618	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R619	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R620	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R621	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R622	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R623	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R624	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R625	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R626	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R629	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R630	RK73EB2E103J	MG RESISTOR	10kΩ 1/4W J	1	
	R632	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R633	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R638	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R639	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-AR959BSJ	A	KD-R950BTJ	B	KD-R951BTE	C	KD-R951BTEN	D
KD-R951BTEY	E	KD-R959BTUR	F				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R640	RK73EB2E2R2J	MG RESISTOR	2.2Ω 1/4W J	1	
	R641	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R642	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R643	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R644	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R651	RK73FB2B751J	MG RESISTOR	750Ω 1/8W J	1	
	R653	RK73FB2B751J	MG RESISTOR	750Ω 1/8W J	1	
	R655	RK73FB2B102J	MG RESISTOR	1kΩ 1/8W J	1	
	R661	RK73FB2B751J	MG RESISTOR	750Ω 1/8W J	1	
	R662	RK73FB2B751J	MG RESISTOR	750Ω 1/8W J	1	
	R663	RK73FB2B102J	MG RESISTOR	1kΩ 1/8W J	1	
	R667	RK73FB2B751J	MG RESISTOR	750Ω 1/8W J	1	
	R669	RK73FB2B751J	MG RESISTOR	750Ω 1/8W J	1	
	R671	RK73FB2B102J	MG RESISTOR	1kΩ 1/8W J	1	
	R680	RK73GB2A152J	MG RESISTOR	1.5kΩ 1/10W J	1	
	R681	RK73GB2A182J	MG RESISTOR	1.8kΩ 1/10W J	1	
	R682	RK73FB2B751J	MG RESISTOR	750Ω 1/8W J	1	
	R685	RK73FB2B102J	MG RESISTOR	1kΩ 1/8W J	1	
	R686	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	
	R687	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	
	R689	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	
	L601	LB73G0BA-005	CHIP FERRITE		1	
	L611	RK73FB2B100J	MG RESISTOR	10Ω 1/8W J	1	
	L612	RK73FB2B100J	MG RESISTOR	10Ω 1/8W J	1	
	L613	RK73FB2B4R7J	MG RESISTOR	4.7Ω 1/8W J	1	
	L640	LR73Z0AD4R7M	COIL	4.7uH	1	
	L661	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	CN601	QGZ1102K3-20X	CONNECTOR	(1-20)	1	
	CN603	QNZ1076-001	USB CONNECTOR		1	
	EN601	QSW1299-001	ROTARY ENCODER		1	
	J602	QNS0322-001	3.5 JACK		1	
	LF691	NQR0704-001X	CHOKE COIL		1	
	S601	NSW0246-001X	TACT SWITCH		1	
	S602	NSW0246-001X	TACT SWITCH		1	
	S603	NSW0246-001X	TACT SWITCH		1	
	S604	NSW0246-001X	TACT SWITCH		1	
	S605	NSW0246-001X	TACT SWITCH		1	
	S606	NSW0246-001X	TACT SWITCH		1	
	S607	NSW0246-001X	TACT SWITCH		1	
	S608	NSW0246-001X	TACT SWITCH		1	
	S609	NSW0246-001X	TACT SWITCH		1	
	S610	NSW0246-001X	TACT SWITCH		1	
	S611	NSW0246-001X	TACT SWITCH		1	
	S612	NSW0246-001X	TACT SWITCH		1	
	S613	NSW0246-001X	TACT SWITCH		1	
	S614	NSW0246-001X	TACT SWITCH		1	
CD MECHA PWB ASSY (LVA20110-01A) IN CD MECHA <04>						
	IC1	MN6627553APA	IC		1	
	IC2	BD8266EFV-M-X	IC		1	
	Q1	2SA2188/E/-X	TRANSISTOR		1	
	C1	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C3	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C7	CK73GBB1C334K	C CAPACITOR	0.33uF 16V K	1	
	C8	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C9	CK73HBB1C823K	C CAPACITOR	0.082uF 16V K	1	
	C10	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C11	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C12	CK73HBB1E153K	C CAPACITOR	0.015uF 25V K	1	
	C13	CC73HCH1H681J	C CAPACITOR	680pF 50V J	1	
	C14	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C15	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C16	CK730AU0J105K	C CAPACITOR	1uF 6.3V K	1	
	C17	CK73GBB1C334K	C CAPACITOR	0.33uF 16V K	1	
	C18	CK73HBB1H332K	C CAPACITOR	3300pF 50V K	1	
	C19	CK73HBB1E223K	C CAPACITOR	0.022uF 25V K	1	
	C20	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C21	CK73GBB1C334K	C CAPACITOR	0.33uF 16V K	1	
	C26	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C27	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C28	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C50	CK73HBB1H682K	C CAPACITOR	6800pF 50V K	1	
	C51	CK73HBB1H682K	C CAPACITOR	6800pF 50V K	1	
	C52	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	1	
	C53	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	1	
	C55	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C60	CC73HCH1H821J	C CAPACITOR	820pF 50V J	1	
	C61	CC73HCH1H821J	C CAPACITOR	820pF 50V J	1	
	C62	CK73GXR0J106M	C CAPACITOR	10uF 6.3V M	1	
	C72	CK73GBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C82	CC73HCH1H471J	C CAPACITOR	470pF 50V J	1	
	C83	CC73HCH1H120J	C CAPACITOR	12pF 50V J	1	
	C84	CC73HCH1H120J	C CAPACITOR	12pF 50V J	1	
	C85	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C243	CK73HBB1H682K	C CAPACITOR	6800pF 50V K	1	
	C244	CK73GBB1C154K	C CAPACITOR	0.15uF 16V K	1	
	R3	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R4	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	
	R7	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	
	R8	RK73HB1J821J	MG RESISTOR	820Ω 1/16W J	1	
	R9	RK73HB1J823J	MG RESISTOR	82kΩ 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-AR959BSJ	A	KD-R950BTJ	B	KD-R951BTE	C	KD-R951BTEN	D
KD-R951BTEY	E	KD-R959BTUR	F				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R10	RK73FB2B4R7J	MG RESISTOR	4.7Ω 1/8W J	1	
	R11	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R12	RK73HB1J225J	MG RESISTOR	2.2MΩ 1/16W J	1	
	R17	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	
	R18	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	1	
	R20	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R21	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	1	
	R22	RK73HB1J562J	MG RESISTOR	5.6kΩ 1/16W J	1	
	R23	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J	1	
	R24	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	
	R25	RK73HB1J562J	MG RESISTOR	5.6kΩ 1/16W J	1	
	R26	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R27	RK73HB1J562J	MG RESISTOR	5.6kΩ 1/16W J	1	
	R28	RK73HB1J114J	MG RESISTOR	110kΩ 1/16W J	1	
	R29	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R30	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R31	RK73HB1J821J	MG RESISTOR	820Ω 1/16W J	1	
	R32	RK73HB1J821J	MG RESISTOR	820Ω 1/16W J	1	
	R33	RK73HB1J131J	MG RESISTOR	130Ω 1/16W J	1	
	R37	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R38	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R43	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R44	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R47	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R48	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R49	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R50	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R51	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R267	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R268	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R305	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	L1	LB73G0BF-002	CHIP FERRITE		1	
	L2	LB73H0AY-004	CHIP FERRITE		1	
	L3	LB73H0AY-004	CHIP FERRITE		1	
	CN1	QGF1044F3-26X	CONNECTOR	FFC/FPC (1-26)	1	
	CN2	QGF0522F6-15W	CONNECTOR	FFC/FPC (1-15)	1	
	S1	NSW0291-001X	DETECT SWITCH		1	
	S2	NSW0291-001X	DETECT SWITCH		1	
	S3	NSW0313-001X	DETECT SWITCH		1	
	X1	NAX1158-001X	CRYSTAL		1	