
■ EXPLODED VIEW · PARTS LIST


Escutcheon section

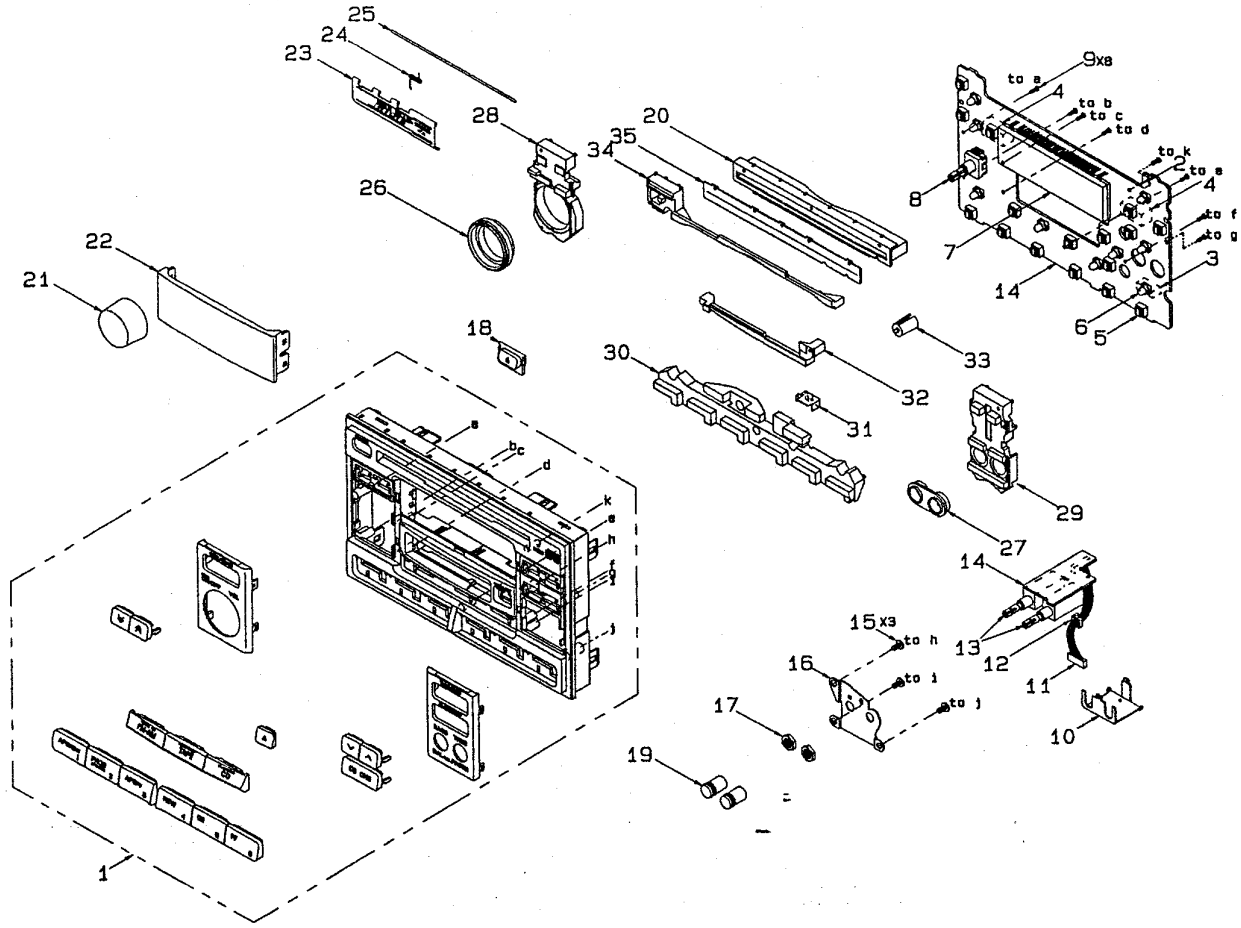

NO.	PART NO.	DESCRIPTION	Q'TY
1	940-7759-00	ESCUTCHEON ASS'Y	1
2	001-0412-18	DIODE	1
3	076-0312-06	PULG(6P)	1
4	074-1105-16	OUTLET SOCKET(16P)	2
5	013-6300-00	SWITCH	16
6	017-0433-02	PILOT LAMP(14V 40mA)	9
7	379-4005-20	INDICATOR	1
8	016-0010-01	VARIABLE RESISTOR(MAIN)	1
9	716-0872-00	PAD SCREW	8
10	331-0572-01	VR HOLDER	1
11	854-4111-00	EXTENSION LEAD	1
12	335-3700-00	MINI SADDLE	1
13	016-3200-01	VARIABLE RESISTOR(B/T)	2
14	039-0719-00	DISPLAY PWB	1
15	716-1573-00	SCREW	3
16	331-1815-00	VR HOLDER	1
17	722-0332-00	NUT	2
18	382-3994-00	BUTTON(CD EJ)	1

NO.	PART NO.	DESCRIPTION	Q'TY
19	380-5318-02	KNOB(BASS/TREB)	2
20	335-4770-00	DISC GUIDE	1
21	380-5334-00	KNOB(MAIN VOL)	1
22	373-0798-10	DIAL COVER	1
23	320-0512-02	DUSTPROOF COVER(TAPE)	1
24	750-2626-00	SPRING	1
25	341-1380-00	DOOR SHAFT	1
26	335-4965-00	ILLUMI RING(MAIN VOL)	1
27	335-4501-11	ILLUMI RING(BASS/TREB)	1
28	335-4861-00	ILLUMI B	1
29	335-4901-00	ILLUMI E	1
30	335-4860-01	ILLUMI A	1
31	331-1816-00	EARTH PLATE	1
32	335-4978-00	ILLUMI BAR(TAPE)	1
33	335-4769-00	INDICATOR LENZ	1
34	335-4977-00	ILLUMI BAR(CD)	1
35	346-0094-01	DUSTPROOF COVER(CD)	1


Main section

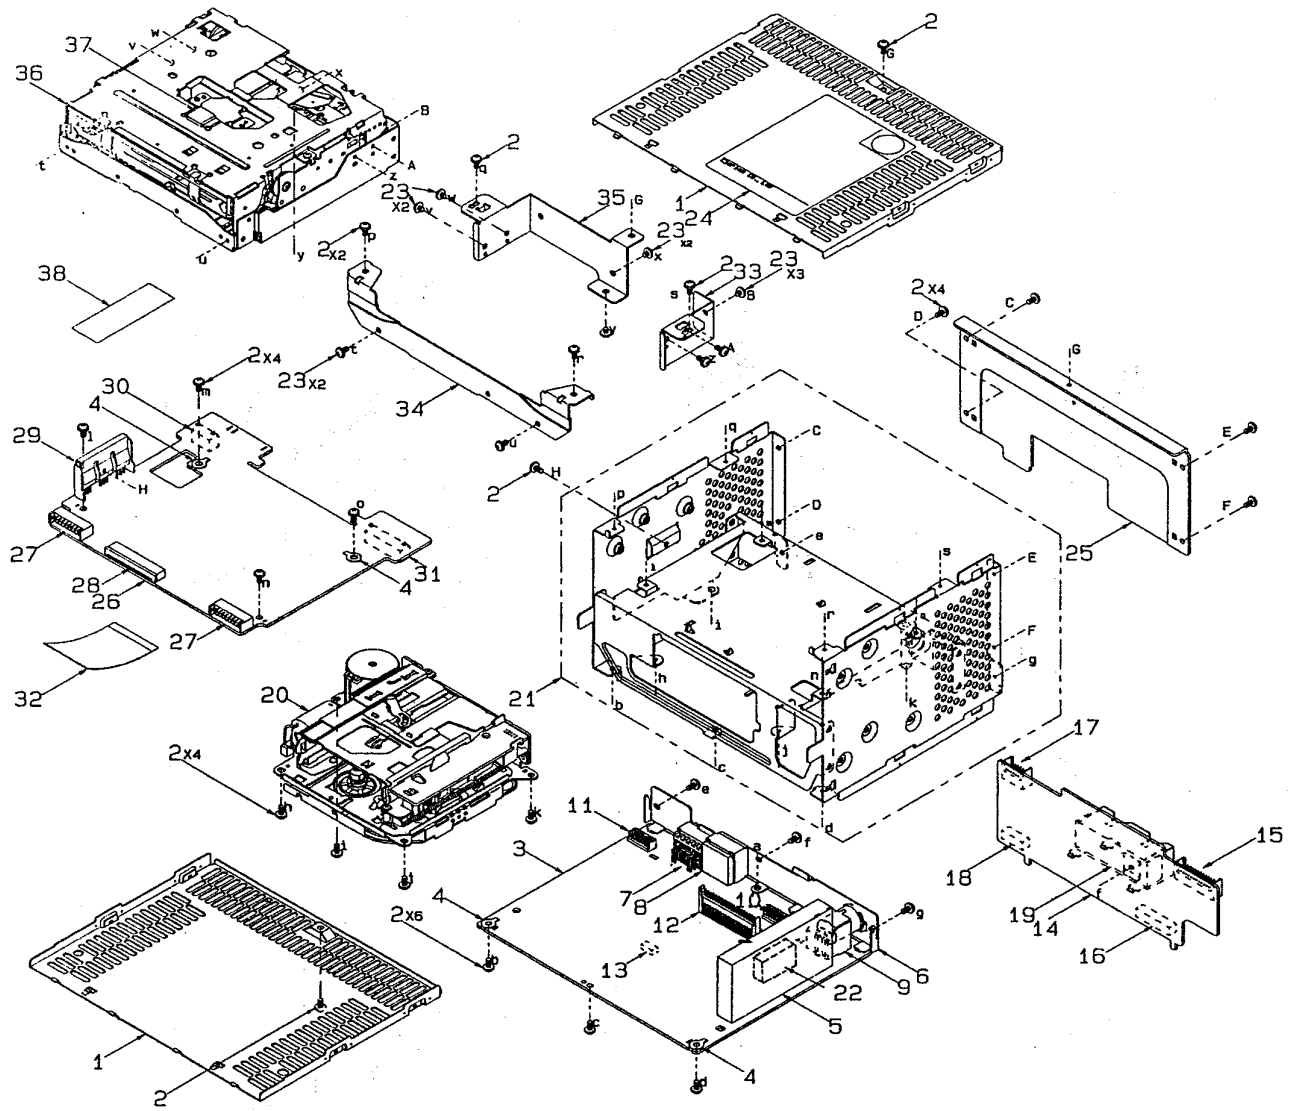

NO.	PART NO.	DESCRIPTION	Q'TY
1	310-1561-00	UPPER CASE	2
2	716-0878-00	IT-SCREW	25
3	039-0716-00	MAIN PWB	1
4	073-0731-01	TERMINAL	4
5	880-1725B	FM TUNER PACK	1
6	331-1868-00	ANTENNA HOLDER	1
7	074-1013-00	OUTLET SOCKET	1
8	074-0850-06	OUTLET SOCKET(DIN 6P)	1
9	331-1668-00	ANTENNA SHIELD	1
10	076-0368-24	PLUG(24P)	1
11	076-0368-16	PLUG(14P)	1
12	076-0510-20	PLUG(20P)	1
13	345-3166-00	SPACER	1
14	039-0717-00	OUTLET PWB	1
15	076-0477-26	PLUG(26P)	1
16	074-0898-24	OUTLET SOCKET(24P)	1
17	076-0477-12	PLUG(12P)	1
18	074-0898-16	OUTLET SOCKET(14P)	1
19	074-1131-01	OUTLET SOCKET	1

NO.	PART NO.	DESCRIPTION	Q'TY
20	930-0736-03	TAPE MECHANISM	1
21	946-0056-01	CHASSIS ASS'Y	1
22	880-1514D	AM TUNER PACK	1
23	714-2303-81	MACHINE SCREW	9
24	286-8153-03	SETPLATE	1
25	307-0535-00	REAR COVER	1
26	039-0718-01	SYSTEM CONTROL PWB	1
27	076-0515-16	PLUG(16P)	2
28	074-0986-26	OUTLET SOCKET(26P)	1
29	331-0567-00	TR HOLDER	1
30	074-1047-12	OUTLET SOCKET(12P)	1
31	074-1047-26	OUTLET SOCKET(26P)	1
32	816-2398-00	LEAD	1
33	300-9789-00	CD BRACKET(RH)	1
34	300-9791-00	CD BRACKET(FRONT)	1
35	300-9793-20	CD BRACKET(REAR)	1
36	929-0065-81	CD MECHANISM	1
37	345-4138-00	SPACER	1
38	347-2022-00	TAPE	1

Tape mechanism section : 930-0736-03

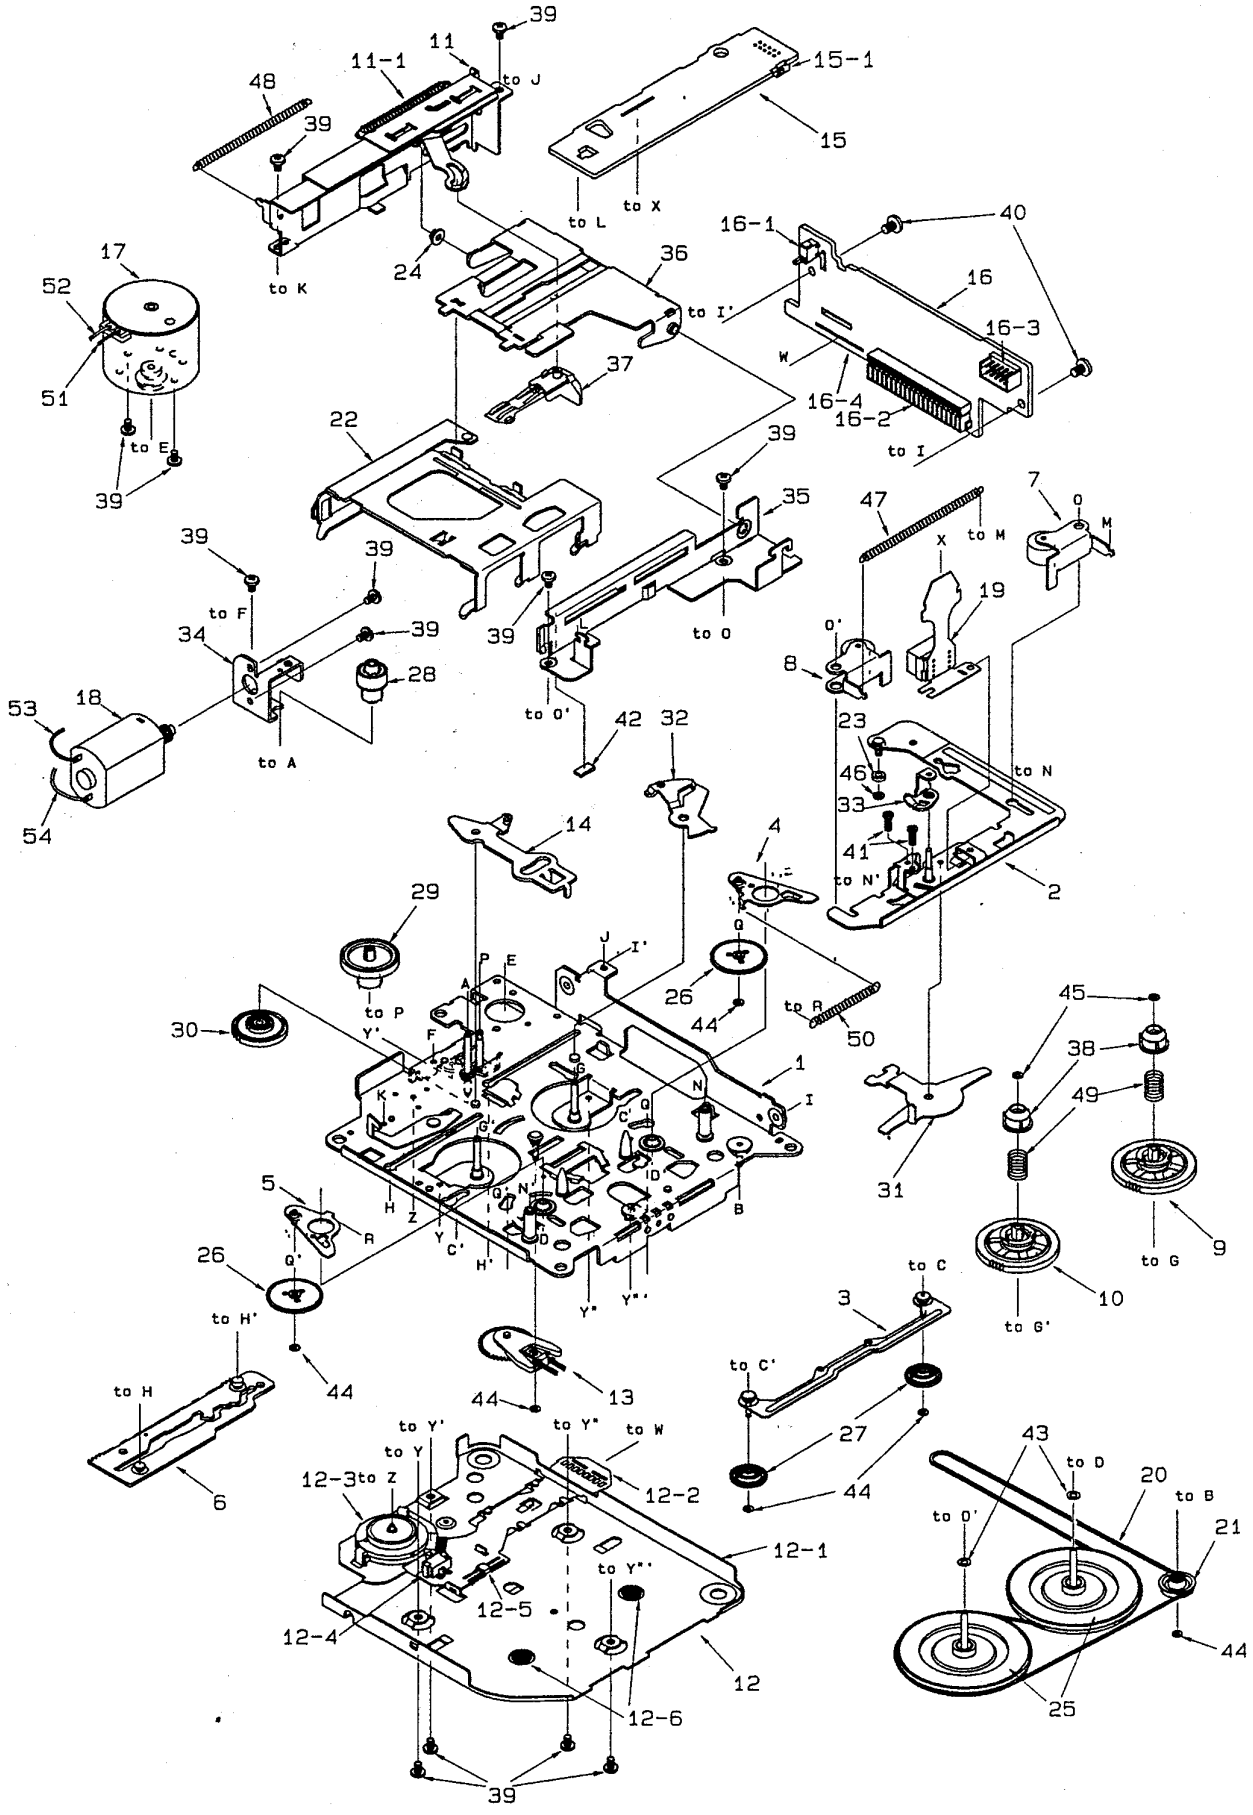



NO.	PART NO.	DESCRIPTION	Q'TY
1	960-4294-14	DECK PLATE ASS'Y	1
2	960-4261-05	HEAD PLATE ASS'Y	1
3	960-4262-03	FF/REW-P-ASS'Y	1
4	960-4263-03	IDLER-P-ASS'Y L	1
5	960-4264-03	IDLER-P-ASS'Y R	1
6	960-4266-05	MODE PLATE ASS'Y	1
7	960-4269-05	ROLLER ASS'Y F	1
8	960-4270-05	ROLLER ASS'Y R	1
9	960-4348-02	REEL ASS'Y F	1
10	960-4349-02	REEL ASS'Y R	1
11	960-4298-09	EJECT SUB ASS'Y	1
11-1	750-2948-01	SWITCH PLATE SPRING	1
12	960-4338-07	BOTTOM SUB ASS'Y	1
12-1	960-4295-02	BOTTOM-P-ASS'Y	1
12-2	099-9926-01	FLEXIBLE PWB	1
12-3	013-3951-10	SWITCH(MODE)	1
12-4	013-3953-01	SWITCH(METAL)	1
12-5	051-1776-00	IC	1
12-6	746-0767-00	WASHER	2
13	960-4282-06	DITECT SUB ASS'Y	1
14	960-4301-02	PLATE LINK ASS'Y	1
15	099-9927-00	SIDE PWB	1
15-1	074-0898-10	OUTLET SOCKET(10P)	1
16	990-0713-00	REAR PWB ASS'Y	1
16-1	013-3906-00	SWITCH(TAPE IN)	1
16-2	074-1104-20	OUTLET SOCKET(20P)	1
16-3	076-0368-10	PLUG(10P)	1
16-4	039-0489-00	REAR PWB	1
17	SMA-130-100	MAIN MOTOR ASS'Y	1
18	SMA-131-100	POWER MOTOR ASS'Y	1
19	011-0307-34	HEAD	1
20	602-0118-00	BELT	1
21	604-0046-00	TENSION PULLEY	1

NO.	PART NO.	DESCRIPTION	Q'TY
22	606-0101-08	PACK GUIDE	1
23	610-0342-01	HEAD-P-ROLLER	1
24	610-0343-00	GUIDE-A-ROLLER	1
25	611-0091-02	FLYWHEEL	2
26	613-0285-02	IDLER GEAR	2
27	613-0286-02	FF/REW GEAR	2
28	613-0288-01	HELIACAL GEAR	1
29	613-0289-01	GEAR A	1
30	613-0337-00	POWER GEAR	1
31	630-2597-01	CHANGE LINK	1
32	630-2598-05	EJECT LINK	1
33	630-2600-01	ADJUST LINK	1
34	630-2601-02	MOTOR PLATE	1
35	630-2626-03	PWB FLAME	1
36	630-2605-02	GUIDE ARM	1
37	631-1992-02	PACK STOPPER	1
38	631-1993-01	SLIDE BUSH	2
39	716-0484-00	SCREW(M2×2.5)	13
40	716-1676-00	PWB SCREW(M2.6×6)	2
41	716-0833-10	AZIMUTH SCREW	2
42	746-0861-00	PACK SET WASHER	1
43	746-0624-00	WASHER	2
44	746-0724-00	WASHER	6
45	746-0761-00	WASHER	2
46	746-0762-00	WASHER	1
47	750-2946-02	PINCH SPRING	1
48	750-2947-03	EJECT-P-SPRING	1
49	750-2949-00	SLIDE SPRING	2
50	750-3017-02	IDLER-P-SPRING	1
51	800-4910-60	WIRE(BLK)	1
52	802-4911-60	WIRE(RED)	1
53	806-4914-60	WIRE(BLU)	1
54	809-4914-60	WIRE(WHT)	1

CD mechanism section : 929-0065-81

※ PARTS LIST on page 12.

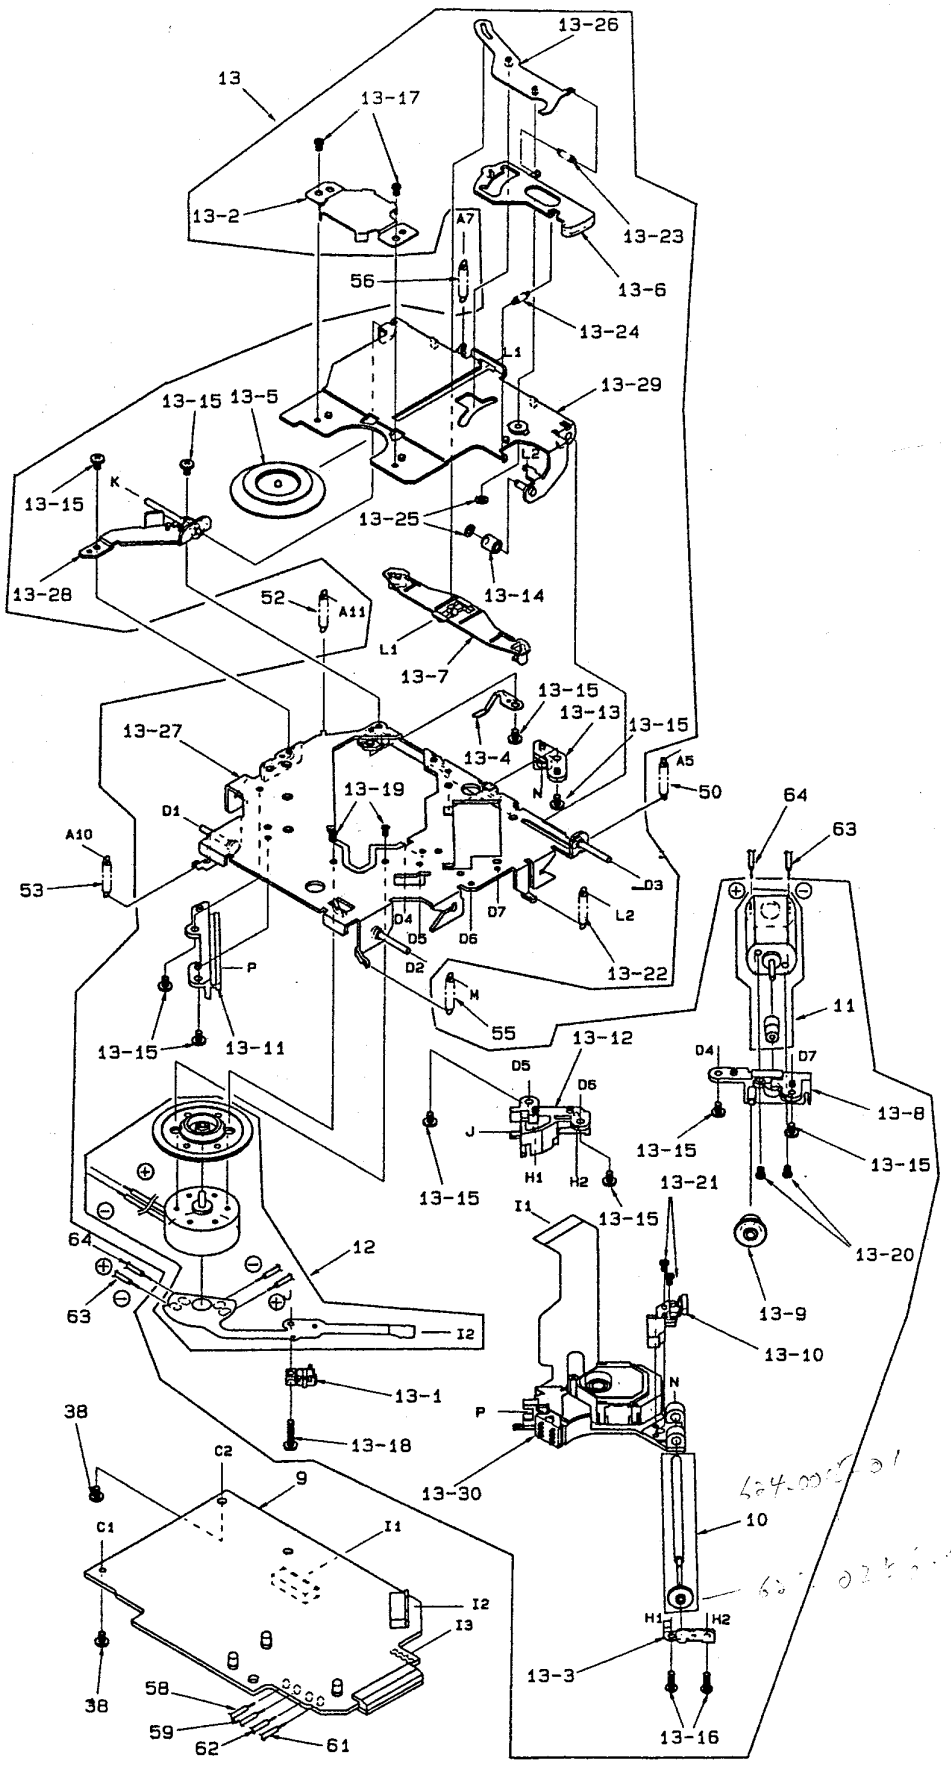

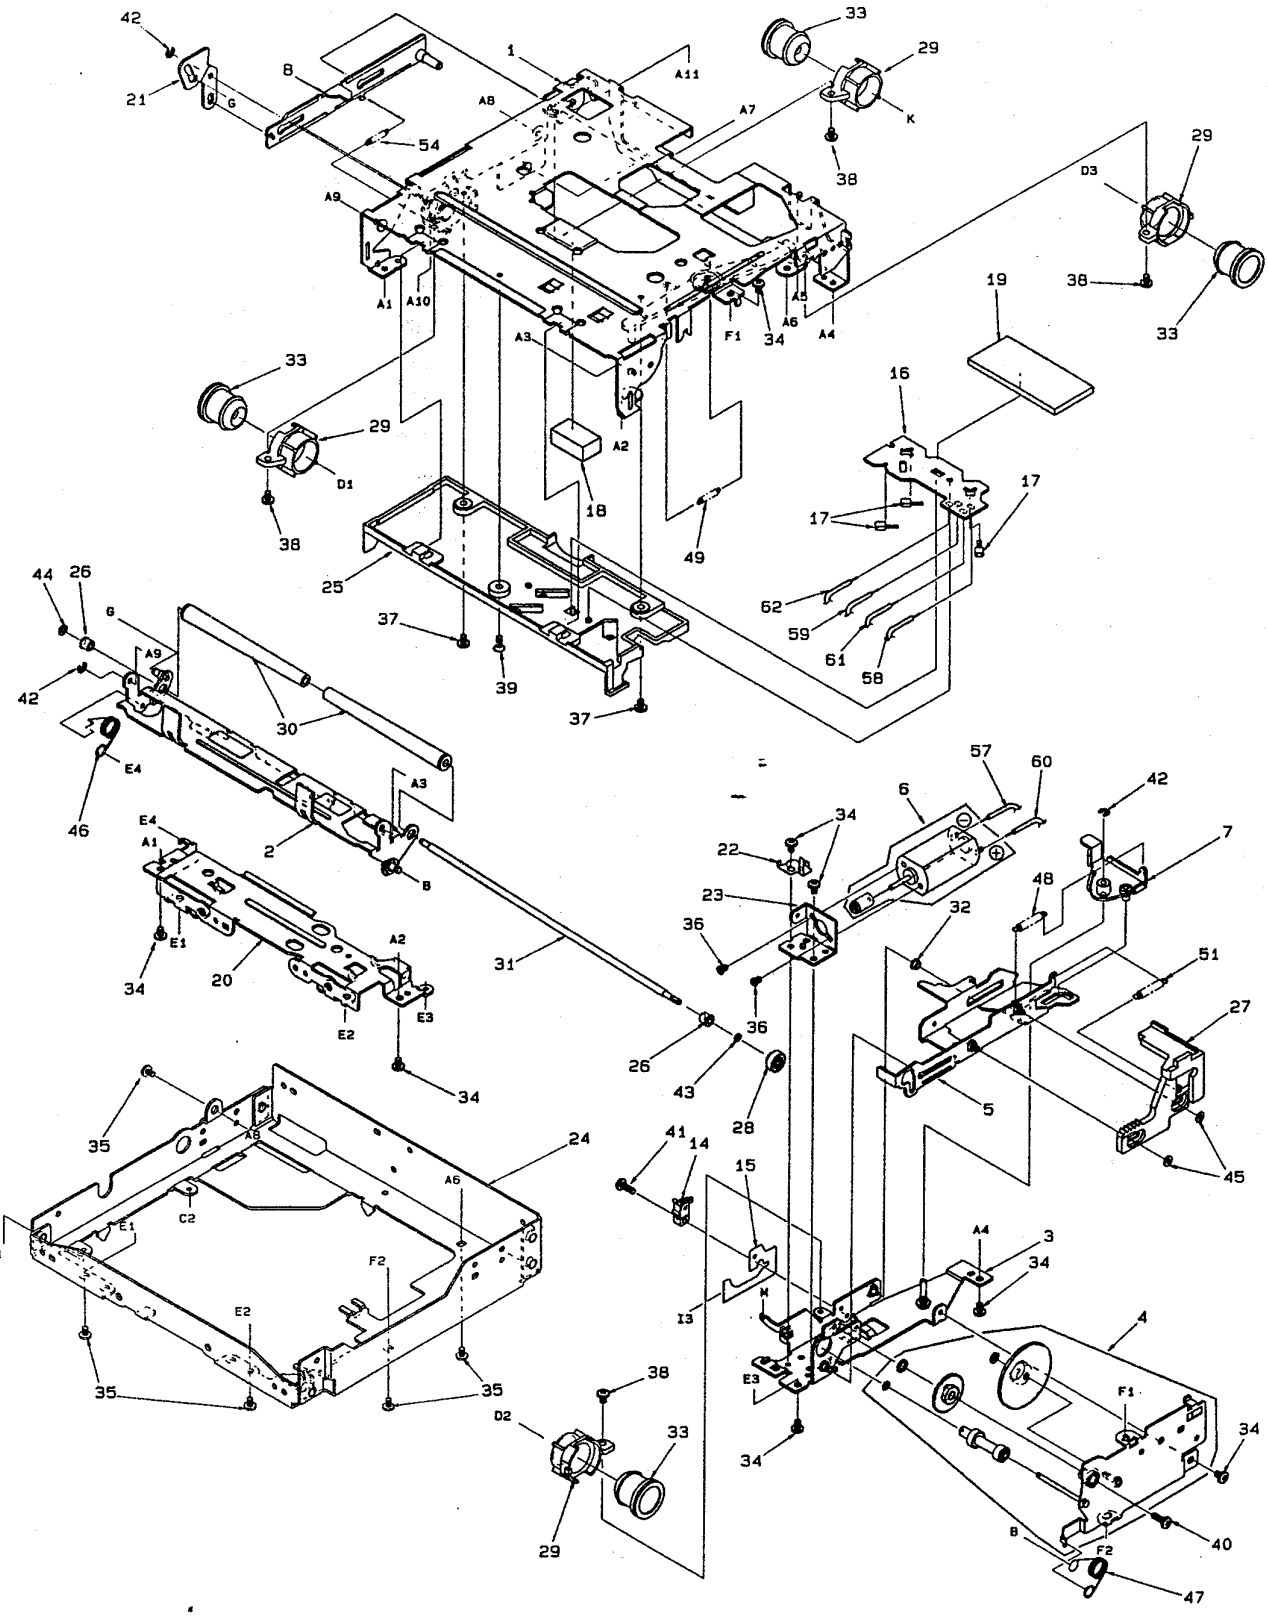
42
21
G
8
54
1
A11
A8
A7
33
29
K
38
A9
A1
A10
A3
A2
F1
34
A6
A5
A4
D3
29
38
33
19
16
17
17
62
59
61
58
49
18
25
37
39
37
33
29
D1
38
44
26
G
A9
42
30
E4
46
A3
2
B
E4
A1
E1
34
20
A2
E2
E3
34
31
57
60
6
42
34
22
7
23
48
36
32
51
36
26
43
28
27
5
45
35
A6
24
C1
E1
C2
A6
F2
E2
35
35
41
14
15
A4
3
34
I3
M
4
E3
F1
34
34
38
D2
33
29
B
F2
40
47

CD mechanism section : 929-0065-81

NO.	PART NO.	DESCRIPTION	Q'TY
1	966-0308-06	CHASSIS ASS'Y	1
2	966-0309-04	L-DISC-G-ASS'Y	1
3	966-0310-06	SFT-P-CH-ASS'Y	1
4	HBS-430-100	GEAR-SUB-ASS'Y	1
5	966-0312-06	SHIFT-P-ASS'Y	1
6	SMA-147-100	MOTOR ASS'Y(LOADING)	1
7	966-0358-01	DRIVE-L-PL-ASS'Y	1
8	966-0359-03	SIDE-L-PL-ASS'Y	1
9	HBS-431-100	PWB ASS'Y	1
10	HBS-432-100	LS-GEAR ASS'Y	1
11	SMA-146-100	MOTOR ASS'Y(SLED)	1
12	SMA-151-100	MOTOR ASS'Y(SPINDLE)	1
13	HBS-433-100	DRIVE UNIT	1
13-1	013-7100-00	LIMIT SWITCH	1
13-2	620-0198-03	CLAMPER PLATE	1
13-3	620-0491-02	SPRING PLATE	1
13-4	620-0690-00	RATTLE PLATE	1
13-5	621-0205-02	CLAMPER PLATE	1
13-6	621-0251-02	LOCK LINK	1
13-7	621-0252-03	DISC STOPPER	1
13-8	621-0253-01	MOTOR HOLDER	1
13-9	621-0255-02	SECOND GEAR	1
13-10	621-0257-05	SCREW HOLDER	1
13-11	621-0357-01	PICKUP GUIDE	1
13-12	621-0358-02	LS-HOLDER-F	1
13-13	621-0359-02	LS-HOLDER-R	1
13-14	622-1073-02	CLAMPER ROLLER	1
13-15	714-2003-81	MACHINE SCREW (M2X3)	10
13-16	716-0675-00	SCREW	2
13-17	716-1468-00	SCREW	2
13-18	716-1555-00	WAVE SCREW	1
13-19	716-1733-00	SCREW	2
13-20	732-2004-11	SEMS SCREW	2
13-21	739-1735-17	PRECISION SCREW	2
13-22	750-3097-03	CLAMPER SPRING	1
13-23	750-3098-00	L-LINK SPRING	1
13-24	750-3099-00	ES-SPRING	1
13-25	746-0761-00	WASHER	2
13-26	966-0314-01	STOP LINK ASS'Y	1
13-27	966-0447-02	DR-PLATE ASS'Y	1
13-28	966-0448-00	SIDE PLATE ASS'Y	1
13-29	966-0449-00	CLAMP LINK ASS'Y	1
13-30	969-0005-00	PICKUP UNIT ASS'Y	1
14	013-3879-01	CHACKING SWITCH	1
15	039-0586-01	FLEXIBLE PWB	1
16	039-0588-01	SENSOR PWB	1
17	060-0252-01	PHOTO TR (PT4850F)	3

NO.	PART NO.	DESCRIPTION	Q'TY
18	345-7513-01	CLAMPER SHEET	1
19	345-7514-00	S-PEB-SHEET	1
20	620-0485-03	FRONT PLATE	1
21	620-0488-01	S-L-LINK PLATE	1
22	620-0489-01	MOTOR PLATE	1
23	620-0492-01	MOTOR BRACKET	1
24	620-0697-00	MECHA BRACKET	1
25	621-0242-02	U-DISC GUIDE	1
26	621-0243-02	ROLLER SLEEVE	2
27	621-0248-06	RACK GEAR	1
28	621-0249-02	ROLLER GEAR	1
29	621-0250-01	DAMPER HOLDER	4
30	621-0258-03	LOADING ROLLER	2
31	622-1072-05	ROLER SHAFT	1
32	622-1219-01	SHIFT ROLLER	1
33	629-0058-00	DAMPER-DL	4
34	714-2003-81	MACHINE SCREW(M2X3)	8
35	714-2603-81	MACHINE SCREW(M2.6X3)	5
36	716-1468-00	SCREW	2
37	716-1507-00	SCREW	2
38	716-1670-00	SCREW	6
39	716-1677-00	SCREW	1
40	716-1704-00	SCREW	1
41	716-1742-00	SCREW	1
42	743-1500-10	E-RING	3
43	746-0712-03	WASHER	1
44	746-0762-00	WASHER	1
45	746-0877-02	WASHER	2
46	750-3090-02	RO-SPRING-L	1
47	750-3091-03	RO-SPRING-R	1
48	750-3092-03	SHIFT SPRING	1
49	750-3094-00	S-ARM SPRING	1
50	750-3096-01	DR-SPRING-R	1
51	750-3098-00	L-LINK SPRING	1
52	750-3164-00	DR-SPRING-LR	1
53	750-3188-00	DR-SP-F-B	1
54	750-3189-00	SIDE-L-SPRING	1
55	750-3201-00	DR-SPRING-F-R	1
56	750-3202-00	CENTER SPRING-B	1
57	800-4904-60	VINYL COAT WIRE(BLK)	1
58	800-4910-60	VINYL COAT WIRE(BLK)	1
59	801-4910-60	VINYL COAT WIRE(BRN)	1
60	802-4904-60	VINYL COAT WIRE(RED)	1
61	802-4910-60	VINYL COAT WIRE(RED)	1
62	804-4910-60	VINYL COAT WIRE(YEL)	1
63	816-2372-00	VINYL COAT WIRE(BLU)	1
64	816-2373-00	VINYL COAT WIRE(WHT)	1

■ ELECTRICAL PARTS LIST

Note)Several different parts of the same reference number are alternative parts. One of those parts is used in the set.

Main PWB section

REF No.	PART No.	DESCRIPTION
BL 101	880-1514D	AM TUNER
BL 102	880-1725B	FM TUNER
C 101	178-1022-78	1000pF
C 102	178-1022-78	1000pF
C 103	176-1007-00	10pF CH
C 104	178-1022-78	1000pF
C 106	178-2232-78	0.022uF
C 107	043-0277-01	0.022uF
C 108	182-4753-53	35V4.7uF
C 110	182-1063-33	16V10uF
C 111	178-1042-78	0.1uF
C 112	043-0277-01	0.022uF
C 113	178-2232-78	0.022uF
C 114	182-4763-22	10V47uF
C 115	178-1042-78	0.1uF
C 116	178-2242-78	0.22uF
C 117	178-1042-78	0.1uF
C 118	178-2232-78	0.022uF
C 119	178-1532-78	0.015uF
C 120	178-1532-78	0.015uF
C 121	042-0550-00	16V10uF
C 122	042-0550-00	16V10uF
C 123	042-0550-00	16V10uF
C 124	042-0550-00	16V10uF
C 125	043-0277-01	0.022uF
C 126	182-3363-23	10V33uF
C 127	042-0549-05	35V10uF
C 128	042-0549-05	35V10uF
C 129	042-0505-06	16V1uF
C 130	182-1073-32	16V100uF
C 131	178-1022-78	1000pF
C 132	176-4701-00	47pF CH
C 133	176-4701-00	47pF CH
C 134	178-1042-78	0.1uF
C 135	176-4701-00	47pF CH
C 136	182-4753-53	35V4.7uF
C 137	176-4701-00	47pF CH
C 138	176-1011-00	100pF CH
C 139	176-1011-00	100pF CH
C 140	176-1011-00	100pF CH
C 141	042-0505-03	16V2.2uF
C 142	178-1042-78	0.1uF
C 143	176-1011-00	100pF CH
C 144	176-1011-00	100pF CH
C 145	042-0548-00	10V47uF
C 146	178-4732-78	0.047uF
C 147	042-0548-00	10V47uF
C 148	176-1501-00	15pF CH
C 149	182-4753-53	35V4.7uF
C 150	178-1042-78	0.1uF
C 151	182-4753-53	35V4.7uF
C 152	042-0548-06	50V1uF
C 153	042-0548-06	50V1uF
C 154	176-1501-00	15pF CH
C 155	178-4722-78	4700pF
C 156	182-1073-22	10V100uF
C 159	042-0548-00	10V47uF
C 160	042-0548-00	10V47uF
C 169	178-1042-78	0.1uF
C 176	182-1053-62	50V1uF
C 181	176-5601-00	56pF CH
C 182	176-5601-00	56pF CH
C 191	176-5601-00	56pF CH
C 192	176-5601-00	56pF CH
C 200	176-5601-00	56pF CH
C 201	176-5601-00	56pF CH
C 203	176-5601-00	56pF CH
C 204	176-5601-00	56pF CH
C 205	042-0548-02	10V220uF
C 206	176-2201-00	22pF CH
C 207	176-2201-00	22pF CH
C 208	176-2201-00	22pF CH
C 209	176-2201-00	22pF CH
C 210	178-3922-78	3900pF
C 211	178-3922-78	3900pF
C 220	178-3922-78	3900pF
C 221	178-3922-78	3900pF
C 222	178-3922-78	3900pF
C 223	178-3922-78	3900pF
C 240	178-1042-78	0.1uF
C 241	176-2211-00	220pF CH
C 245	042-0549-05	35V10uF
C 246	042-0549-05	35V10uF
C 247	172-2241-11	0.22uF
C 248	172-1241-11	0.12uF
C 249	042-0549-05	35V10uF
C 250	042-0549-05	35V10uF
C 260	178-4732-78	0.047uF
C 261	176-2201-00	22pF CH
C 262	176-2201-00	22pF CH
C 263	176-2211-00	220pF CH
C 264	176-2211-00	220pF CH
C 265	042-0549-05	35V10uF
C 266	042-0549-05	35V10uF
C 267	042-0548-07	50V2.2uF
C 268	042-0548-07	50V2.2uF
C 269	178-1042-78	0.1uF
C 270	178-1042-78	0.1uF
C 271	042-0549-06	50V1uF
C 272	042-0549-06	50V1uF
C 273	178-5622-78	5600pF
C 274	178-5622-78	5600pF
C 275	178-5632-78	0.056uF
C 276	178-5632-78	0.056uF
C 277	178-6822-78	6800pF
C 278	178-6822-78	6800pF
C 279	042-0549-05	35V10uF
C 280	042-0549-05	35V10uF
C 281	178-1042-78	0.1uF
C 282	042-0548-00	10V47uF
C 283	042-0548-02	10V220uF
C 284	042-0549-05	35V10uF
C 285	042-0549-05	35V10uF
C 290	042-0549-05	35V10uF
C 291	042-0549-05	35V10uF
C 292	042-0549-05	35V10uF
C 293	042-0549-05	35V10uF
C 294	042-0549-05	35V10uF
C 295	042-0549-05	35V10uF
C 301	042-0505-03	16V2.2uF
C 302	178-1042-78	0.1uF
C 303	182-1073-32	16V100uF
C 304	178-1042-78	0.1uF
C 305	042-0548-04	16V330uF
C 306	042-0548-03	16V100uF
C 307	042-0548-00	10V47uF
C 308	042-0548-01	10V100uF
C 309	178-1042-78	0.1uF
C 311	178-1222-78	1200pF
C 312	178-1042-78	0.1uF
CCT200	050-0122-03	1kohmx4
CCT302	050-0137-02	10kx4ohm
D 101	001-0589-00	1SS145
D 102	001-0589-00	1SS145
D 103	001-0421-38	MTZJ36
D 104	001-0376-45	MTZJ8.2C
D 104	001-0377-44	MA4082M
D 104	001-0400-44	HZS8.2JB2
D 105	001-0376-49	MTZJ10A
D 105	001-0377-48	MA4091H
D 106	001-0330-00	1SS119
D 106	001-0352-00	1SS176
D 107	001-0330-00	1SS119
D 107	001-0352-00	1SS176
D 108	001-0356-00	1SS184
D 108	001-0506-00	DAN202K
D 109	001-0330-00	1SS119
D 109	001-0352-00	1SS176
D 110	001-0356-00	1SS184
D 110	001-0506-00	DAN202K
D 111	001-0356-00	1SS184
D 111	001-0506-00	DAN202K
D 120	001-0356-00	1SS184
D 120	001-0506-00	DAN202K
D 121	001-0356-00	1SS184
D 121	001-0506-00	DAN202K
D 301	001-0330-00	1SS119
D 301	001-0352-00	1SS176
D 302	001-0376-39	MTZJ6.8C
D 302	001-0377-38	MA4068M
D 302	001-0400-38	HZS6.8JB2
D 303	001-0377-48	MA4091H
D 303	001-0400-48	HZS9.1JB3
IC 101	051-0599-51	NJM2903M
IC 102	051-1500-00	NJM2060M
IC 103	051-6201-00	LC72146M
IC 105	051-1292-00	NJM4565M-D
IC 106	051-5008-00	M62419FP
IC 107	051-1407-00	NJM4556L
IC 108	051-1407-00	NJM4556L
IC 109	051-1407-00	NJM4556L
IC 110	051-1407-00	NJM4556L
IC 111	051-1500-00	NJM2060M
IC 112	051-5009-00	TC9212F
IC 113	051-1500-00	NJM2060M
IC 114	051-1292-00	NJM4565M-D
IC 301	052-4004-01	SC75006GB-648-3B4
IC 302	051-1014-10	TA7291S
L 101	010-2003-03	
L 102	010-2174-16	22uH
L 103	010-2174-16	22uH
L 104	010-2174-16	22uH
L 105	010-2174-16	22uH
L 107	010-2199-04	0.22uH
L 301	010-2174-16	22uH
Q 101	102-2412-00	2SC2412
Q 101	102-2712-00	2SC2712
Q 101	102-2812-00	2SC2812
Q 102	125-9006-00	IMX1
Q 102	125-9007-00	HN1C01F
Q 103	102-2412-00	2SC2412
Q 103	102-2712-00	2SC2712
Q 103	102-2812-00	2SC2812
Q 104	125-2004-02	RN1402
Q 104	125-2005-01	UN2211
Q 104	125-2020-02	DTC114EK
Q 104	125-2031-02	MUN2211
Q 105	125-9002-02	RN4602
Q 105	125-9003-02	IMD3
Q 107	125-2024-02	RN1602
Q 107	125-2025-02	IMH11
Q 108	125-2004-02	RN1402
Q 108	125-2005-01	UN2211
Q 108	125-2020-02	DTC114EK
Q 108	125-2031-02	MUN2211
Q 109	100-1037-00	2SA1037
Q 109	100-1162-00	2SA1162
Q 109	101-0709-00	2SB709A-Q.R.S
Q 110	125-9002-02	RN4602
Q 110	125-9003-02	IMD3
Q 111	100-1298-00	2SA1298
Q 112	125-2024-02	RN1602
Q 112	125-2025-02	IMH11
Q 113	102-2712-51	2SC2712G.L
Q 114	100-1037-00	2SA1037
Q 114	100-1162-00	2SA1162
Q 114	101-0709-00	2SB709A-Q.R.S
Q 115	125-2004-03	RN1403
Q 115	125-2005-02	UN2212
Q 115	125-2020-03	DTC124EK
Q 115	125-2031-03	MUN2212
Q 116	103-1306-00	2SD1306
Q 116	103-1328-00	2SD1328
Q 117	100-1037-00	2SA1037
Q 117	100-1162-00	2SA1162
Q 117	101-0709-00	2SB709A-Q.R.S
Q 118	100-1037-00	2SA1037
Q 118	100-1162-00	2SA1162
Q 118	101-0709-00	2SB709A-Q.R.S
Q 119	100-1037-00	2SA1037
Q 119	100-1162-00	2SA1162
Q 119	101-0709-00	2SB709A-Q.R.S
Q 120	100-1037-00	2SA1037
Q 120	100-1162-00	2SA1162
Q 120	101-0709-00	2SB709A-Q.R.S
Q 121	102-2458-51	2SC2458Y.GR.BL
Q 122	102-2458-51	2SC2458Y.GR.BL
Q 130	125-2005-01	UN2211
Q 130	125-2031-02	MUN2211

REF No.	PART No.	DESCRIPTION
Q 131	100-1037-00	2SA1037
Q 131	100-1162-00	2SA1162
Q 131	101-0709-00	2SB709A-Q.R.S
Q 132	100-1037-00	2SA1037
Q 132	100-1162-00	2SA1162
Q 132	101-0709-00	2SB709A-Q.R.S
Q 133	100-1037-00	2SA1037
Q 133	100-1162-00	2SA1162
Q 133	101-0709-00	2SB709A-Q.R.S
Q 134	100-1037-00	2SA1037
Q 134	100-1162-00	2SA1162
Q 134	101-0709-00	2SB709A-Q.R.S
Q 301	125-9002-02	RN4602
Q 301	125-9003-02	IMD3
Q 302	100-1213-00	2SA1213
Q 302	100-1797-00	2SA1797
Q 302	101-1123-00	2SB1123
Q 303	125-2004-06	RN1406
Q 303	125-2020-06	DTC143ZK
Q 304	100-1213-00	2SA1213
Q 304	100-1797-00	2SA1797
Q 304	101-1123-00	2SB1123
Q 305	125-2004-06	RN1406
Q 305	125-2020-06	DTC143ZK
Q 306	125-9002-02	RN4602
Q 306	125-9003-02	IMD3
Q 307	103-1766-00	2SD1766
Q 308	103-2118-00	2SD2118
R 101	117-5631-10	1/10W 56kohm
R 102	117-1031-10	1/10W 10kohm
R 103	117-5621-10	1/10W 5.6kohm
R 104	117-5621-10	1/10W 5.6kohm
R 105	117-5631-10	1/10W 56kohm
R 106	117-5631-10	1/10W 56kohm
R 107	117-1001-10	1/10W 10ohm
R 108	117-1031-10	1/10W 10kohm
R 109	117-1031-10	1/10W 10kohm
R 111	117-1031-10	1/10W 10kohm
R 112	117-1031-10	1/10W 10kohm
R 113	117-2221-10	1/10W 2.2kohm
R 114	114-2711-11	1W 270ohm
R 115	117-4731-10	1/10W 47kohm
R 116	117-1531-10	1/10W 15kohm
R 117	117-5631-10	1/10W 56kohm
R 118	117-2221-10	1/10W 2.2kohm
R 119	117-1031-10	1/10W 10kohm
R 120	117-1031-10	1/10W 10kohm
R 121	117-1021-10	1/10W 1kohm
R 122	117-1041-10	1/10W 100kohm
R 123	117-3011-10	1/10W 300ohm
R 124	117-3011-10	1/10W 300ohm
R 125	032-0106-15	1/10W 100kohm
R 126	032-0106-15	1/10W 100kohm
R 127	032-0106-15	1/10W 100kohm
R 128	032-0106-15	1/10W 100kohm
R 129	117-3331-10	1/10W 33kohm
R 130	117-2221-10	1/10W 2.2kohm
R 131	117-1041-10	1/10W 100kohm
R 132	117-5621-10	1/10W 5.6kohm
R 133	032-0106-02	1/10W 27kohm
R 134	032-0106-02	1/10W 27kohm
R 134	111-1321-91	1/4WS 1.3kohm
R 135	117-4731-10	1/10W 47kohm
R 136	117-2231-10	1/10W 22kohm
R 137	117-1001-10	1/10W 10ohm
R 139	117-2721-10	1/10W 2.7kohm
R 140	032-0106-02	1/10W 27kohm
R 141	117-5611-10	1/10W 560ohm
R 142	032-0106-02	1/10W 27kohm
R 143	117-4731-10	1/10W 47kohm

REF No.	PART No.	DESCRIPTION
R 144	117-2221-10	1/10W 2.2kohm
R 145	117-8231-10	1/10W 82kohm
R 146	117-8231-10	1/10W 82kohm
R 147	117-4731-10	1/10W 47kohm
R 148	117-4731-10	1/10W 47kohm
R 149	117-1031-10	1/10W 10kohm
R 150	117-1031-10	1/10W 10kohm
R 151	117-1021-10	1/10W 1kohm
R 152	117-2221-10	1/10W 2.2kohm
R 153	117-1031-10	1/10W 10kohm
R 154	117-1031-10	1/10W 10kohm
R 155	117-5651-10	1/10W 5.6Mohm
R 156	117-3011-10	1/10W 300ohm
R 157	117-1031-10	1/10W 10kohm
R 158	117-2231-10	1/10W 22kohm
R 159	117-1021-10	1/10W 1kohm
R 160	117-2221-10	1/10W 2.2kohm
R 162	117-2231-10	1/10W 22kohm
R 163	117-1521-10	1/10W 1.5kohm
R 164	117-3921-10	1/10W 3.9kohm
R 165	117-2231-10	1/10W 22kohm
R 166	117-1021-10	1/10W 1kohm
R 167	117-2231-10	1/10W 22kohm
R 168	117-1021-10	1/10W 1kohm
R 169	117-1521-10	1/10W 1.5kohm
R 170	117-1231-10	1/10W 12kohm
R 171	117-1231-10	1/10W 12kohm
R 172	117-8221-10	1/10W 8.2kohm
R 173	117-8221-10	1/10W 8.2kohm
R 176	117-4731-10	1/10W 47kohm
R 177	117-4731-10	1/10W 47kohm
R 182	117-3331-10	1/10W 33kohm
R 183	117-3331-10	1/10W 33kohm
R 184	117-3331-10	1/10W 33kohm
R 185	117-3331-10	1/10W 33kohm
R 186	117-1031-10	1/10W 10kohm
R 187	117-1041-10	1/10W 100kohm
R 188	117-1021-10	1/10W 1kohm
R 189	117-1021-10	1/10W 1kohm
R 190	117-4731-10	1/10W 47kohm
R 191	117-1021-10	1/10W 1kohm
R 192	117-1021-10	1/10W 1kohm
R 193	117-4731-10	1/10W 47kohm
R 196	117-1001-10	1/10W 10ohm
R 197	117-1001-10	1/10W 10ohm
R 198	117-2231-10	1/10W 22kohm
R 199	117-2231-10	1/10W 22kohm
R 200	117-2231-10	1/10W 22kohm
R 201	117-2231-10	1/10W 22kohm
R 202	117-1241-10	1/10W 120kohm
R 203	117-1241-10	1/10W 120kohm
R 204	117-1041-10	1/10W 100kohm
R 205	117-1041-10	1/10W 100kohm
R 206	117-2231-10	1/10W 22kohm
R 207	117-2231-10	1/10W 22kohm
R 208	117-1001-10	1/10W 10ohm
R 209	117-1001-10	1/10W 10ohm
R 210	117-1001-10	1/10W 10ohm
R 211	117-1001-10	1/10W 10ohm
R 212	117-1231-10	1/10W 12kohm
R 213	117-2231-10	1/10W 22kohm
R 214	117-2231-10	1/10W 22kohm
R 215	117-2231-10	1/10W 22kohm
R 216	117-1241-10	1/10W 120kohm
R 217	117-1241-10	1/10W 120kohm
R 218	117-1041-10	1/10W 100kohm
R 219	117-1041-10	1/10W 100kohm
R 222	117-2231-10	1/10W 22kohm
R 223	117-2231-10	1/10W 22kohm
R 224	117-1001-10	1/10W 10ohm

REF No.	PART No.	DESCRIPTION
R 225	117-1001-10	1/10W 10ohm
R 226	117-4721-10	1/10W 4.7kohm
R 227	117-4721-10	1/10W 4.7kohm
R 228	117-1031-10	1/10W 10kohm
R 229	117-1031-10	1/10W 10kohm
R 230	117-4721-10	1/10W 4.7kohm
R 231	117-4721-10	1/10W 4.7kohm
R 232	117-1031-10	1/10W 10kohm
R 233	117-1031-10	1/10W 10kohm
R 234	117-1041-10	1/10W 100kohm
R 235	117-1041-10	1/10W 100kohm
R 243	117-1241-10	1/10W 120kohm
R 244	117-1241-10	1/10W 120kohm
R 245	117-7531-10	1/10W 75kohm
R 246	117-1541-10	1/10W 150kohm
R 247	117-1541-10	1/10W 150kohm
R 248	117-1541-10	1/10W 150kohm
R 249	117-7521-10	1/10W 7.5kohm
R 250	117-1021-10	1/10W 1kohm
R 251	117-1031-10	1/10W 10kohm
R 252	117-1031-10	1/10W 10kohm
R 253	117-1031-10	1/10W 10kohm
R 254	117-1031-10	1/10W 10kohm
R 255	117-1031-10	1/10W 10kohm
R 256	117-1031-10	1/10W 10kohm
R 257	117-1031-10	1/10W 10kohm
R 258	117-1031-10	1/10W 10kohm
R 259	117-1021-10	1/10W 1kohm
R 260	117-1021-10	1/10W 1kohm
R 261	117-1011-10	1/10W 100ohm
R 262	117-1011-10	1/10W 100ohm
R 270	117-1531-10	1/10W 15kohm
R 271	117-1531-10	1/10W 15kohm
R 272	117-4721-10	1/10W 4.7kohm
R 273	117-4721-10	1/10W 4.7kohm
R 274	117-1531-10	1/10W 15kohm
R 275	117-1531-10	1/10W 15kohm
R 276	117-2431-10	1/10W 24kohm
R 277	117-2431-10	1/10W 24kohm
R 278	117-1531-10	1/10W 15kohm
R 279	117-1531-10	1/10W 15kohm
R 309	117-1031-10	1/10W 10kohm
R 310	117-1021-10	1/10W 1kohm
R 312	117-4731-10	1/10W 47kohm
R 313	117-1021-10	1/10W 1kohm
R 314	117-1021-10	1/10W 1kohm
R 316	117-1021-10	1/10W 1kohm
R 317	117-1021-10	1/10W 1kohm
R 318	117-1021-10	1/10W 1kohm
R 319	117-1021-10	1/10W 1kohm
R 320	117-1021-10	1/10W 1kohm
R 321	117-1021-10	1/10W 1kohm
R 322	117-1051-10	1/10W 1Mohm
R 323	117-2221-10	1/10W 2.2kohm
R 324	114-2291-11	1W 2.2ohm
R 326	117-1021-10	1/10W 1kohm
R 327	117-4721-10	1/10W 4.7kohm
R 330	111-8211-91	1/4WS 820ohm
R 331	111-8211-91	1/4WS 820ohm
R 332	111-1321-91	1/4WS 1.3kohm
R 333	111-1321-91	1/4WS 1.3kohm
R 335	111-1321-91	1/4WS 1.3kohm
SUP101	060-0122-20	DSP-141N-S00B
VR 101	012-4738-00	100kohm
VR 102	012-4738-00	100kohm
VR 103	012-4738-07	22kohm
X 101	061-1066-00	7.2MHz
X 301	060-0130-50	4.19MHz

System control PWB section

REF No.	PART No.	DESCRIPTION
C 501	183-1063-32	16V10uF
C 502	183-1063-32	16V10uF
C 503	183-1053-62	50V1uF
C 504	172-1031-11	0.01uF
C 505	172-1041-11	0.1uF
C 506	183-4753-51	35V4.7uF

REF No.	PART No.	DESCRIPTION
C 507	183-4753-52	35V4.7uF
C 508	174-2200-13	22pF CH
C 509	183-1063-31	16V10uF
C 510	043-0206-61	0.1uF
C 511	043-0206-61	0.1uF
C 512	173-4711-11	470pF

REF No.	PART No.	DESCRIPTION
C 513	173-4711-11	470pF
C 514	043-0206-44	470pF
C 515	043-0206-44	470pF
C 516	043-0206-44	470pF
C 517	043-0206-36	100pF
C 518	043-0206-20	22pF CH

REF No.	PART No.	DESCRIPTION
C 519	043-0206-61	0.1uF
C 520	043-0206-61	0.1uF
C 521	043-0207-26	39pF
C 522	183-1063-32	16V10uF
C 523	184-2273-22	10V220uF
C 524	183-1063-31	16V10uF
C 525	174-1007-13	10pF CH
C 526	174-1007-13	10pF CH
C 527	174-1007-13	10pF CH
C 528	174-1007-13	10pF CH
C 529	043-0206-60	0.01uF
C 530	183-3353-62	50V3.3uF
CCT501	050-0093-02	
D 501	001-0330-00	1SS119
D 501	001-0352-00	1SS176
D 502	001-0330-00	1SS119
D 502	001-0352-00	1SS176
D 503	001-0330-00	1SS119
D 503	001-0352-00	1SS176
D 504	001-0330-00	1SS119
D 504	001-0352-00	1SS176
D 505	001-0330-00	1SS119
D 505	001-0352-00	1SS176
D 506	001-0330-00	1SS119
D 506	001-0352-00	1SS176
D 507	001-0330-00	1SS119
D 507	001-0352-00	1SS176
D 508	001-0361-10	1SS198
D 509	001-0361-10	1SS198
D 510	001-0361-10	1SS198
D 511	001-0361-10	1SS198
D 512	001-0361-10	1SS198
D 513	001-0361-10	1SS198
D 514	001-0361-10	1SS198
D 515	001-0361-10	1SS198
D 516	001-0361-10	1SS198
D 521	001-0330-00	1SS119
D 521	001-0352-00	1SS176
D 522	001-0376-70	MTZJ18C
D 522	001-0377-69	MA4180M
D 522	001-0400-68	HZS18JB2
D 523	001-0503-02	HZS2CLL
D 524	001-0503-48	HZS9C2L
D 525	001-0503-32	HZS6A3L
IC 501	051-0869-50	NJM2103D
IC 502	052-3123-11	uPD78058FGC-030-3B9
L 501	010-2230-76	22uH
Q 501	125-2016-01	DTC114EL
Q 502	125-2016-01	DTC114EL

REF No.	PART No.	DESCRIPTION
Q 503	125-0012-01	DTA114EL
Q 504	125-2016-01	DTC114EL
Q 505	125-0012-01	DTA114EL
Q 506	125-2016-01	DTC114EL
Q 507	103-1858-00	2SD1858
Q 508	125-0012-01	DTA114EL
Q 509	125-2016-01	DTC114EL
Q 510	103-2012-00	2SD2012
Q 511	125-0012-01	DTA114EL
Q 512	125-2016-01	DTC114EL
Q 513	103-2012-00	2SD2012
Q 514	100-1561-50	2SA1561Q.R
Q 515	125-2016-01	DTC114EL
Q 516	103-1858-00	2SD1858
Q 517	103-1858-00	2SD1858
Q 518	125-0030-90	DTA144TLA
Q 519	125-0030-90	DTA144TLA
Q 520	125-0030-90	DTA144TLA
Q 521	125-0030-90	DTA144TLA
Q 522	125-2016-01	DTC114EL
R 501	111-1041-91	1/4WS 100kohm
R 502	111-2731-91	1/4WS 27kohm
R 503	111-1031-91	1/4WS 10kohm
R 504	111-1041-91	1/4WS 100kohm
R 505	111-4731-91	1/4WS 47kohm
R 506	111-4731-91	1/4WS 47kohm
R 507	111-4721-91	1/4WS 4.7kohm
R 508	111-4721-91	1/4WS 4.7kohm
R 509	111-4721-91	1/4WS 4.7kohm
R 510	111-2231-91	1/4WS 22kohm
R 511	111-1041-91	1/4WS 100kohm
R 512	111-4731-91	1/4WS 47kohm
R 513	111-4731-91	1/4WS 47kohm
R 514	111-4731-91	1/4WS 47kohm
R 515	111-1021-91	1/4WS 1kohm
R 516	111-1021-91	1/4WS 1kohm
R 517	111-1021-91	1/4WS 1kohm
R 518	111-4731-91	1/4WS 47kohm
R 519	111-4731-91	1/4WS 47kohm
R 520	111-1021-91	1/4WS 1kohm
R 522	111-1021-91	1/4WS 1kohm
R 523	111-1021-91	1/4WS 1kohm
R 524	111-1021-91	1/4WS 1kohm
R 525	111-1021-91	1/4WS 1kohm
R 526	111-1021-91	1/4WS 1kohm
R 527	111-1021-91	1/4WS 1kohm
R 528	111-4731-91	1/4WS 47kohm
R 529	111-4731-91	1/4WS 47kohm
R 530	111-4731-91	1/4WS 47kohm
R 531	111-1021-91	1/4WS 1kohm

REF No.	PART No.	DESCRIPTION
R 532	111-1021-91	1/4WS 1kohm
R 533	111-1021-91	1/4WS 1kohm
R 534	111-1021-91	1/4WS 1kohm
R 535	111-1021-91	1/4WS 1kohm
R 536	111-1021-91	1/4WS 1kohm
R 537	111-1021-91	1/4WS 1kohm
R 538	111-1021-91	1/4WS 1kohm
R 539	111-1021-91	1/4WS 1kohm
R 540	111-1021-91	1/4WS 1kohm
R 541	111-1021-91	1/4WS 1kohm
R 542	111-1021-91	1/4WS 1kohm
R 543	111-1021-91	1/4WS 1kohm
R 544	111-1031-91	1/4WS 10kohm
R 545	111-4731-91	1/4WS 47kohm
R 546	111-4731-91	1/4WS 47kohm
R 547	111-1031-91	1/4WS 10kohm
R 548	111-1031-91	1/4WS 10kohm
R 549	111-4731-91	1/4WS 47kohm
R 550	111-1031-91	1/4WS 10kohm
R 551	111-1041-91	1/4WS 100kohm
R 552	111-4731-91	1/4WS 47kohm
R 553	111-1021-91	1/4WS 1kohm
R 554	111-1021-91	1/4WS 1kohm
R 555	111-1021-91	1/4WS 1kohm
R 556	111-1021-91	1/4WS 1kohm
R 557	111-1021-91	1/4WS 1kohm
R 558	111-1021-91	1/4WS 1kohm
R 560	111-6230-98	1/4WS 62kohm
R 561	111-3930-98	1/4WS 39kohm
R 565	111-2231-91	1/4WS 22kohm
R 566	111-2231-91	1/4WS 22kohm
R 567	111-2231-91	1/4WS 22kohm
R 568	111-2231-91	1/4WS 22kohm
R 569	111-4731-91	1/4WS 47kohm
R 570	111-1021-91	1/4WS 1kohm
R 571	114-1201-31	3W 12ohm
R 572	111-4711-81	1/2WS 470ohm
R 573	111-3311-81	1/2WS 330ohm
R 574	111-1031-91	1/4WS 10kohm
R 575	111-3321-91	1/4WS 3.3kohm
R 576	111-1041-91	1/4WS 100kohm
R 577	111-2211-91	1/4WS 220ohm
R 578	111-1091-91	1/4WS 1ohm
R 579	111-1091-91	1/4WS 1ohm
R 580	111-1041-91	1/4WS 100kohm
R 581	111-1041-91	1/4WS 100kohm
R 582	111-1041-91	1/4WS 100kohm
R 583	111-4731-91	1/4WS 47kohm
TH 501	002-0212-00	NTH300WC104J
X 501	060-0319-00	4.915MHz

Outlet PWB section

REF No.	PART No.	DESCRIPTION
C 401	182-1063-32	16V10uF
C 402	184-3373-11	6.3V330uF
C 403	042-0504-07	6.3V10uF
C 404	178-1045-79	0.1uF
C 405	042-0548-02	10V220uF
C 406	042-0548-02	10V220uF
C 407	042-0548-02	10V220uF
C 408	042-0548-02	10V220uF
C 409	042-0548-02	10V220uF
C 410	042-0548-02	10V220uF
C 411	042-0548-02	10V220uF
C 412	042-0548-02	10V220uF
C 413	182-4763-32	16V47uF
C 414	178-2232-78	0.022uF
C 415	178-2232-78	0.022uF
C 416	178-2232-78	0.022uF
C 417	178-2232-78	0.022uF
C 418	178-2232-78	0.022uF
C 419	178-2232-78	0.022uF
C 420	178-2232-78	0.022uF
C 421	178-2232-78	0.022uF

REF No.	PART No.	DESCRIPTION
C 422	172-1041-11	0.1uF
C 423	184-4773-32	16V470uF
C 425	172-3341-11	0.33uF
D 401	001-0376-35	MTZJ6.2B
D 401	001-0377-35	MA4062M
D 401	001-0400-35	HZS6.2JB2
D 402	001-0334-30	RL202
D 403	001-0466-00	S5688B
D 403	001-0499-00	ERA15-01
D 403	001-0626-00	1A2
D 405	001-0516-00	MA111
IC 401	051-1905-01	AN77L05M
Q 401	125-0013-07	RN2427
Q 402	125-2004-06	RN1406
Q 402	125-2020-06	DTC143ZK
Q 403	125-9002-02	RN4602
Q 403	125-9003-02	IMD3
Q 404	125-9002-02	RN4602
Q 404	125-9003-02	IMD3
Q 405	125-2004-02	RN1402
Q 405	125-2005-01	UN2211

REF No.	PART No.	DESCRIPTION
Q 405	125-2020-02	DTC114EK
Q 405	125-2031-02	MUN2211
Q 406	100-1037-00	2SA1037
Q 406	100-1162-00	2SA1162
Q 406	101-0709-00	2SB709A-Q.R.S
Q 407	101-1188-00	2SB1188
R 404	117-1021-10	1/10W 1kohm
R 406	117-4721-10	1/10W 4.7kohm
R 410	117-2221-10	1/10W 2.2kohm
R 411	117-4731-10	1/10W 47kohm
R 420	111-4701-91	1/4WS 47ohm
R 421	111-4701-91	1/4WS 47ohm
R 422	111-1021-91	1/4WS 1kohm
R 423	111-1021-91	1/4WS 1kohm
R 424	111-1321-91	1/4WS 1.3kohm
R 425	111-1321-91	1/4WS 1.3kohm
R 426	111-6891-91	1/4WS 6.8ohm
R 427	111-6891-91	1/4WS 6.8ohm
T 401	009-0621-01	

Display PWB section

REF No.	PART No.	DESCRIPTION
C 701	176-1011-00	100pF CH
C 702	178-2232-78	0.022uF
C 703	178-4745-79	0.47uF
C 704	178-2232-78	0.022uF
C 705	176-4701-00	47pF CH
C 706	176-2201-00	22pF CH
C 707	176-1011-00	100pF CH
D 701	001-0412-18	GL-3EG8
IC 701	051-6011-00	LC75741E
L 701	010-2174-16	22uH
PL 701	017-0433-02	14V40mA
PL 702	017-0433-02	14V40mA
PL 703	017-0433-02	14V40mA
PL 704	017-0433-02	14V40mA
PL 705	017-0433-02	14V40mA
PL 706	017-0433-02	14V40mA

REF No.	PART No.	DESCRIPTION
PL 707	017-0433-02	14V40mA
PL 708	017-0433-02	14V40mA
PL 709	017-0433-02	14V40mA
Q 701	125-2004-02	RN1402
Q 701	125-2005-01	UN2211
Q 701	125-2020-02	DTC114EK
Q 701	125-2031-02	MUN2211
Q 702	125-9002-02	RN4602
Q 702	125-9003-02	IMD3
R 701	117-1811-10	1/10W 180ohm
R 702	117-1831-10	1/10W 18kohm
S 701	013-6300-00	
S 702	013-6300-00	
S 703	013-6300-00	
S 704	013-6300-00	
S 705	013-6300-00	

REF No.	PART No.	DESCRIPTION
S 706	013-6300-00	
S 707	013-6300-00	
S 708	013-6300-00	
S 709	013-6300-00	
S 710	013-6300-00	
S 711	013-6300-00	
S 712	013-6300-00	
S 713	013-6300-00	
S 714	013-6300-00	
S 715	013-6300-00	
S 716	013-6300-00	
VR 701	016-0010-01	
VR 702	016-3200-01	
VR 703	016-3200-01	

CD mechanism PWB section

REF No.	PART No.	DESCRIPTION
C 10	178-1032-78	0.01uF
C 11	182-1063-32	16V10uF
C 12	178-1042-78	0.1uF
C 13	182-1073-12	6.3V100uF
C 14	178-1032-78	0.01uF
C 15	182-2263-12	6.3V22uF
C 16	178-1032-78	0.01uF
C 17	178-1042-78	0.1uF
C 18	178-1042-78	0.1uF
C 19	176-1007-00	10pF CH
C 20	178-1042-78	0.1uF
C 21	182-2263-12	6.3V22uF
C 22	176-2096-00	2pF CJ
C 23	178-1042-78	0.1uF
C 24	178-1022-78	1000pF
C 25	176-1007-00	10pF CH
C 26	176-1007-00	10pF CH
C 27	182-1073-12	6.3V100uF
C 28	178-1042-78	0.1uF
C 29	182-1073-12	6.3V100uF
C 30	178-1042-78	0.1uF
C 31	176-1007-00	10pF CH
C 32	178-2212-78	220pF
C 33	178-1042-78	0.1uF
C 34	178-2212-78	220pF
C 35	178-1032-78	0.01uF

REF No.	PART No.	DESCRIPTION
C 36	178-4732-78	0.047uF
C 37	178-1522-78	1500pF
C 38	178-1032-78	0.01uF
C 39	042-0230-00	35V0.47uF
C 40	178-1032-78	0.01uF
C 41	178-1042-78	0.1uF
C 42	178-2222-78	2200pF
C 100	182-4763-12	6.3V47uF
C 101	182-4763-12	6.3V47uF
C 102	178-1032-78	0.01uF
C 103	182-1073-32	16V100uF
D 1	001-0563-00	GL380
D 2	001-0563-00	GL380
D 3	001-0563-00	GL380
IC 1	051-1014-10	TA7291S
IC 2	051-6015-05	BA6392FP
IC 3	051-6314-05	TC9404FN
IC 4	051-1971-00	CXA16010M
IC 5	051-6313-00	CXD2545Q
L 1	010-2155-03	10uH
L 2	010-2155-03	10uH
L 3	010-2155-03	10uH
Q 1	101-1237-00	2SB1237
R 10	111-2711-91	1/4WS 270ohm
R 11	117-8231-10	1/10W 82kohm
R 12	117-1031-10	1/10W 10kohm

REF No.	PART No.	DESCRIPTION
R 14	117-5631-10	1/10W 56kohm
R 15	117-2731-10	1/10W 27kohm
R 16	117-2211-10	1/10W 220ohm
R 17	117-2211-10	1/10W 220ohm
R 18	117-1031-10	1/10W 10kohm
R 19	117-2231-10	1/10W 22kohm
R 20	117-4721-10	1/10W 4.7kohm
R 21	117-2231-10	1/10W 22kohm
R 22	117-4711-10	1/10W 470ohm
R 23	117-1011-10	1/10W 100ohm
R 24	117-1021-10	1/10W 1kohm
R 25	117-1001-10	1/10W 10ohm
R 26	117-3331-10	1/10W 33kohm
R 27	117-3631-10	1/10W 36kohm
R 28	117-1241-10	1/10W 120kohm
R 29	117-3631-10	1/10W 36kohm
R 30	117-1041-10	1/10W 100kohm
R 31	117-1031-10	1/10W 10kohm
R 32	117-6821-10	1/10W 6.8kohm
R 33	117-3321-10	1/10W 3.3kohm
R 34	117-1051-10	1/10W 1Mohm
R 35	117-1041-10	1/10W 100kohm
R 36	117-1031-10	1/10W 10kohm
X 1	060-1014-00	16.9344MHz

CD mechanism sensor PWB section

REF No.	PART No.	DESCRIPTION
Q 101	060-0252-01	PT4850F

REF No.	PART No.	DESCRIPTION
Q 102	060-0252-01	PT4850F

REF No.	PART No.	DESCRIPTION
Q 103	060-0252-01	PT4850F

Tape mechanism side PWB section

REF No.	PART No.	DESCRIPTION
C 1	178-5612-78	560pF
C 2	178-5612-78	560pF
C 3	178-5612-78	560pF
C 4	178-5612-78	560pF
C 5	172-1231-11	0.012uF
C 6	172-1231-11	0.012uF
C 7	172-4731-11	0.047uF
C 8	172-4731-11	0.047uF
C 9	183-1053-61	50V1uF
C 10	178-5612-78	560pF
C 11	178-5612-78	560pF
C 12	178-1042-78	0.1uF
C 13	178-1042-78	0.1uF
C 14	178-4722-78	4700pF
C 15	183-2263-31	16V22uF

REF No.	PART No.	DESCRIPTION
C 16	178-1032-78	0.01uF
C 17	183-1043-61	50V0.1uF
C 18	183-4753-51	35V4.7uF
IC 1	051-1777-00	HA12163
R 1	117-2731-10	1/10W 27kohm
R 2	117-2731-10	1/10W 27kohm
R 3	117-2731-10	1/10W 27kohm
R 4	117-2731-10	1/10W 27kohm
R 5	117-1811-10	1/10W 180ohm
R 6	117-1811-10	1/10W 180ohm
R 7	117-3341-10	1/10W 330kohm
R 8	117-3341-10	1/10W 330kohm
R 9	117-1131-10	1/10W 11kohm
R 10	117-1131-10	1/10W 11kohm
R 11	117-1531-10	1/10W 15kohm

REF No.	PART No.	DESCRIPTION
R 12	117-1531-10	1/10W 15kohm
R 13	032-0098-03	1/10W 18kohm
R 14	117-3331-10	1/10W 33kohm
R 15	117-1831-10	1/10W 18kohm
R 16	117-1841-10	1/10W 180kohm
R 17	117-4731-10	1/10W 47kohm
R 18	117-1241-10	1/10W 120kohm
R 19	117-2231-10	1/10W 22kohm
R 20	117-2231-10	1/10W 22kohm
R 21	117-2231-10	1/10W 22kohm
R 22	117-1031-10	1/10W 10kohm
R 23	117-2231-10	1/10W 22kohm
VR 1	012-4431-06	10kohm
VR 2	012-4431-06	10kohm

Tape mechanism flexible PWB section

REF No.	PART No.	DESCRIPTION
IC 2	051-1776-00	NJL5801K

REF No.	PART No.	DESCRIPTION
SW 1	013-3953-01	

REF No.	PART No.	DESCRIPTION
SW 2	013-3951-10	

Tape mechanism rear PWB section

REF No.	PART No.	DESCRIPTION
R 24	111-5611-91	1/4WS 560ohm

REF No.	PART No.	DESCRIPTION
SW 3	013-3906-00	3PPB51