
EXPLODED VIEW / PARTS LIST

DCP section

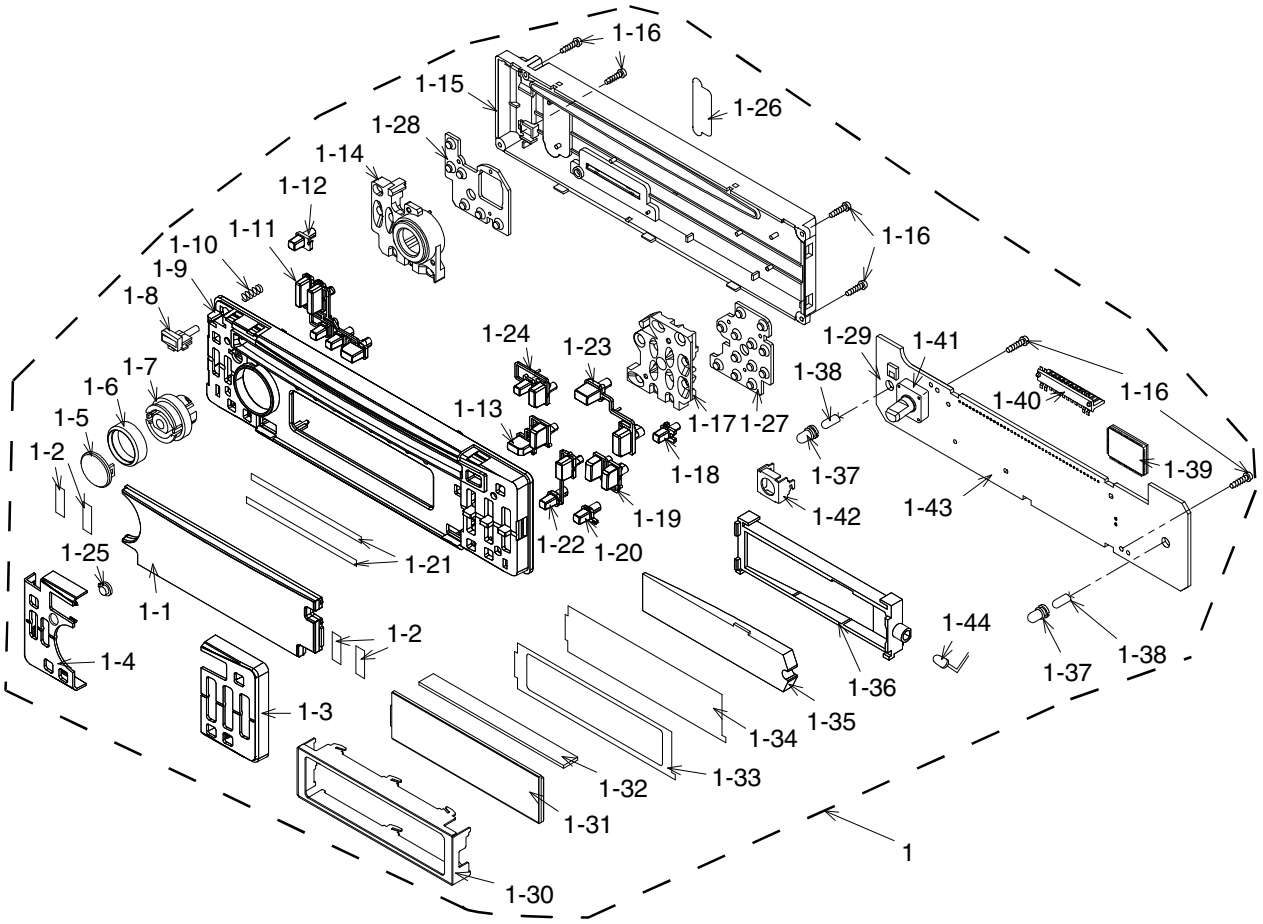


Note)Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.

NO.	PART NO.	DESCRIPTION	Q'TY
1	DCP-525-600	DCP ASSY(PE-2731B-A)	1
	DCP-526-800	DCP ASSY(PE-2732K-A/B)	1
1-1	373-1048-13	DIAL COVER(PE-2731B-A)	1
	373-1048-14	DIAL COVER(PE-2732K-A/B)	1
1-2	347-7411-00	DOUBLE FACE(FP)	4
1-3	335-7366-04	FACE PANEL(R)	1
1-4	335-7365-00	FACE PANEL(L)	1
1-5	380-5613-00	KNOB COVER	1
1-6	345-5496-00	RUBBER RING	1
1-7	380-5612-00	INNER KNOB	1
1-8	382-7252-00	BUTTON(RELEASE)	1
1-9	370-6141-00	ESCUTCHEON	1
1-10	750-6782-00	SPRING(RELEASE)	1
1-11	382-7257-00	BUTTON(FF/FB/Z)	1
1-12	382-7258-01	BUTTON(ENT)	1
1-13	382-7259-01	BUTTON(BND/4)	1
1-14	335-7363-00	ILLUMI PLATE(L)	1
1-15	335-6897-02	REAR-COVER	1
1-16	716-0872-11	SCREW(M1.7x6)	6
1-17	335-7364-00	ILLUMI PLATE(R)	1
1-18	382-7263-00	BUTTON(REC)	1
1-19	382-7261-01	BUTTON(5/D/6/U)	1
1-20	382-7262-01	BUTTON(ISR)	1
1-21	347-7410-00	DOUBLE FACE(DC)	2
1-22	382-7264-01	BUTTON(T/2)	1

NO.	PART NO.	DESCRIPTION	Q'TY
1-23	382-7256-00	BUTTON(EJE/3)	1
1-24	382-7260-01	BUTTON(D/1)	1
1-25	335-7390-00	IR FILTER	1
1-26	347-7541-00	SPACE FILM	1
1-27	345-5499-00	RUBBER KEY(R)	1
1-28	345-5498-00	RUBBER KEY(L)	1
1-29	060-4017-90	IR-RECIEVER	1
1-30	331-3920-00	LCD COVER	1
1-31	379-1323-41	INDICATOR(LCD)	1
1-32	345-5497-00	RUBBER PART	1
1-33	347-7368-00	BLACK FILM	1
1-34	347-7367-00	LCD FILM	1
1-35	335-7354-00	LCD ILLUMI	1
1-36	335-7353-00	LCD HOLDER	1
1-37	345-5231-00	LAMP CAP	2
1-38	017-0444-00	PILOTLAMP(14V 50mA)	2
	017-0461-00	PILOTLAMP(14V 50mA)	2
1-39	051-6013-00	IC	1
1-40	076-0615-50	PLUG	1
1-41	016-9900-84	VR W/SHAFT	1
1-42	331-3337-00	VR-HOLDER	1
1-43	----------	SWITCH PWB	1
1-44	001-7046-00	DIODE	1
	001-7046-01	DIODE	1


Main section

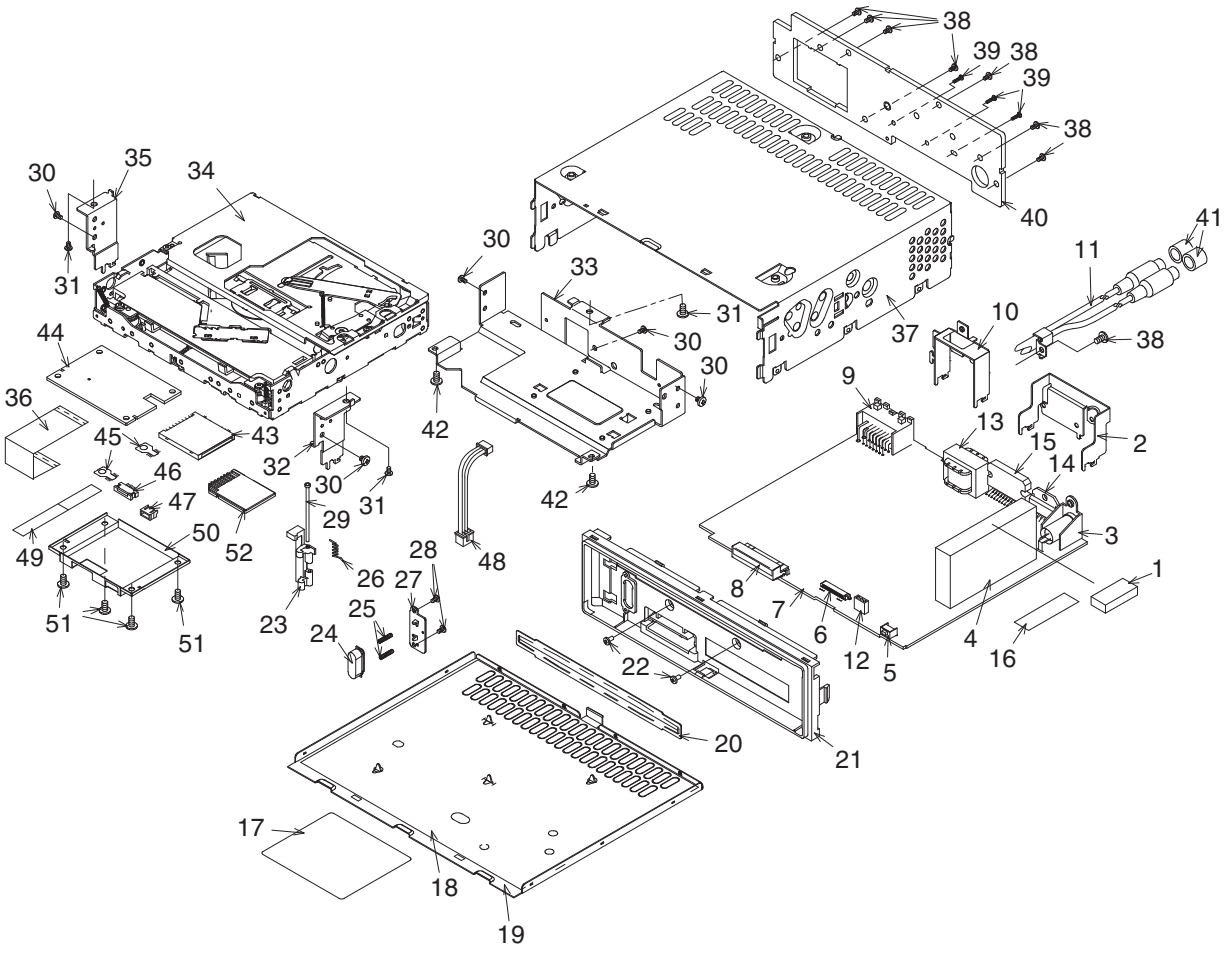

NO.	PART NO.	DESCRIPTION	Q'TY
1	345-5312-00	CUSHION	1
2	331-3935-00	IC HOLDER	1
3	092-4000-51	ANT-RECEPT	1
4	880-2090B	TUNER	1
5	013-6103-00	TACT SWITCH	1
6	074-1138-70	OUTLET SOCKET(20P)	1
7	----------	MAIN PWB	1
8	074-1217-50	OUTLET SOCKET(16P)	1
9	074-1214-00	OUTLET SOCKET(16P)	1
10	331-3561-03	CONNECTOR-HOLD	1
11	855-5426-53	RCA PIN CORD(2CH)	1
12	076-0312-03	PLUG	1
13	009-9006-71	CHOKE	1
14	051-3324-00	IC	1
15	051-2057-00	POWER IC	1
16	347-6341-00	E-SHEET	1
17	286-6531-00	SETPLATE(PE-2731B-A)	1
	286-6532-00	SETPLATE(PE-2732K-A)	1
	286-6533-00	SETPLATE(PE-2732K-B)	1
18	347-7502-00	INSULATOR	1
19	311-1859-04	LOWER CASE	1
20	346-0097-01	LEATHER SHEET	1
21	370-6027-02	ESCUTCHEON(I)	1
22	780-2607-02	SCREW(M2.6X7)	2
23	335-5915-01	HOOK	1
24	382-4078-00	BUTTON (P-OUT)	1
25	750-3173-00	SPRING	2

NO.	PART NO.	DESCRIPTION	Q'TY
26	750-3219-00	SPRING(F-HOOK)	1
27	331-2594-00	HOOK PLATE	1
28	716-0778-00	WAVE SCREW(M2x6)	2
29	341-1627-00	SHAFT	1
30	714-2603-80	SCREW(M2.6x3)	5
31	714-3004-81	SCREW(M3x4)	3
32	331-3569-00	MECH-SUB-BRKT(R)	1
33	331-3936-00	CD-MECH BRKT(REAR)	1
34	929-0601-81	CD-MECH-MODULE	1
35	331-3570-00	MECH-SUB-BRKT(L)	1
36	816-2623-50	FLAT WIRE	1
37	310-1778-03	UPPER CASE	1
38	714-3006-81	SCREW(M3x6)	8
39	714-2610-81	SCREW(M2.6x10)	3
40	313-1849-01	HEAT SINK	1
41	345-3799-20	RUBBER PART	2
42	716-1507-00	SCREW(M2x3)	2
43	074-8001-00	OUTLET SOCKET(18P)	1
44	----------	Slot PWB	1
45	073-0762-90	TERMINAL	2
46	074-1158-57	OUTLET SOCKET(14P)	1
47	076-0488-03	PLUG	1
48	854-4568-50	EXTENSION LEAD	1
49	816-2639-00	FLAT WIRE	1
50	331-3700-00	SD-UP-CASE	1
51	716-0878-00	SCREW(M2.6X5)	4
52	948-0725-00	MEMORY CARD	1

CD mechanism section: 929-0601-81

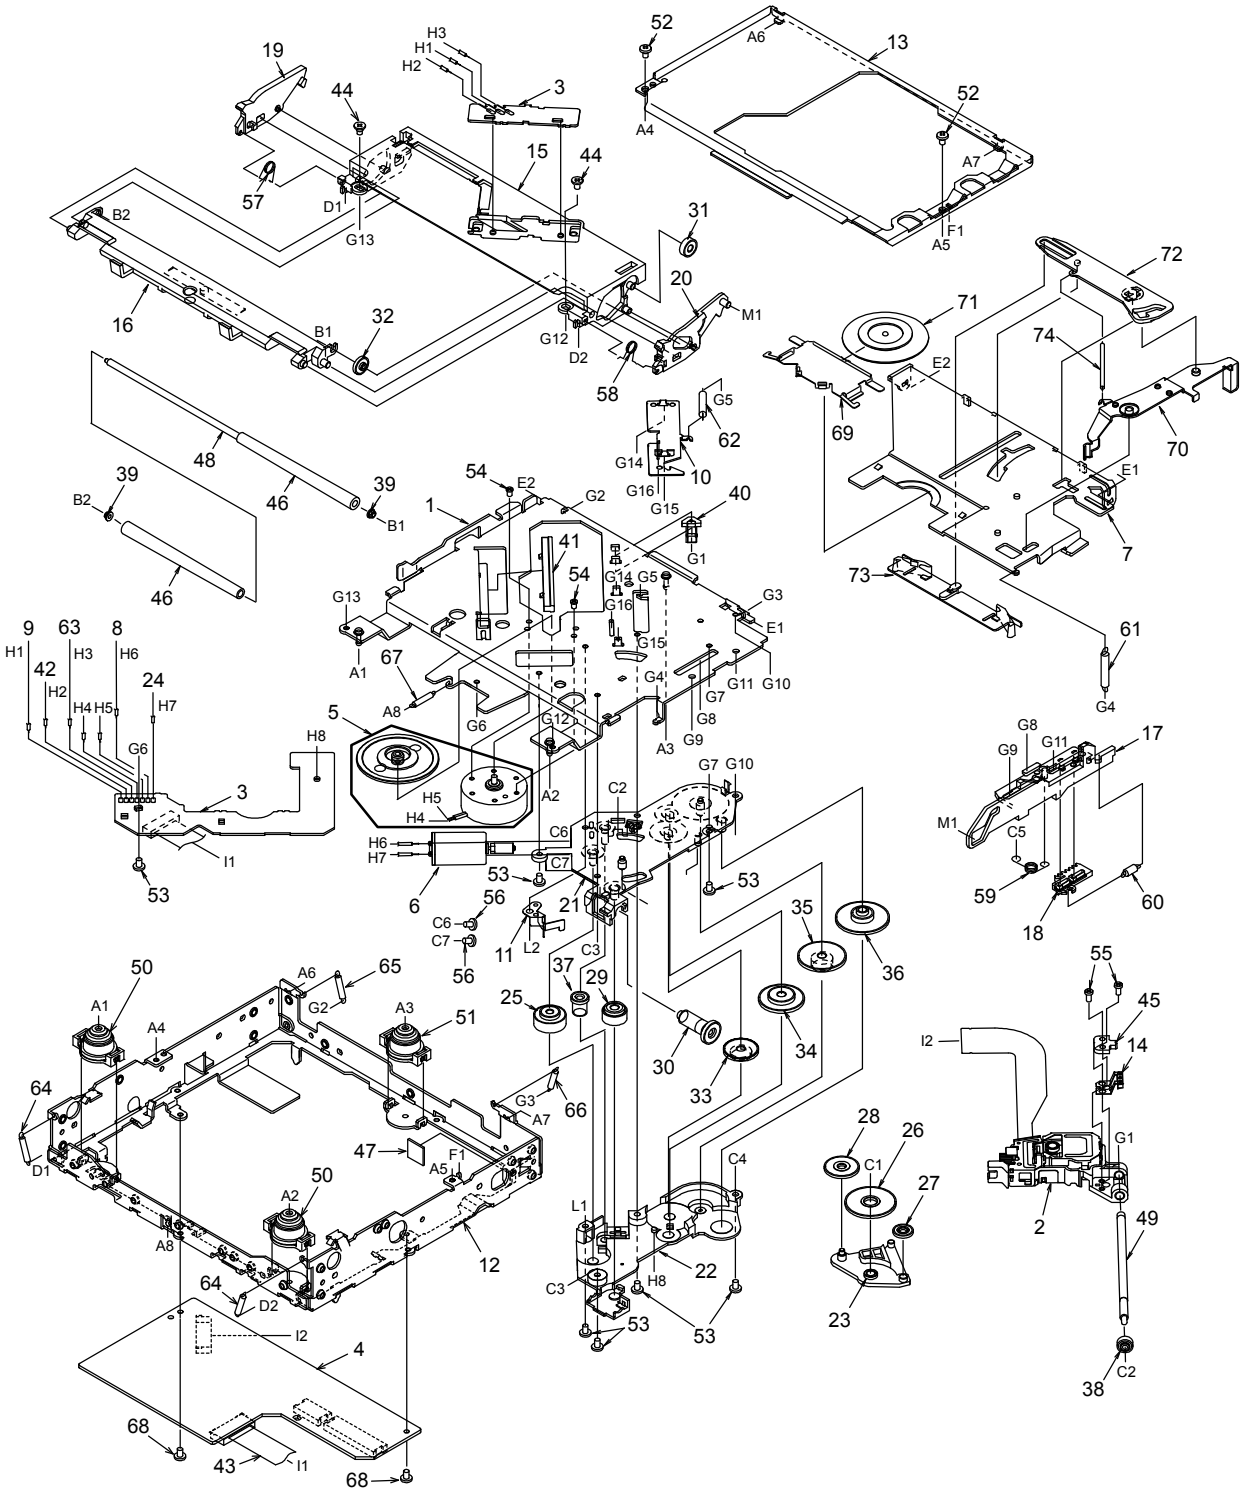

NO.	PART NO.	DESCRIPTION	Q'TY
1	966-0595-25	DRIVE PLATE ASSY	1
2	969-0065-31	PICK UP UNIT	1
3	----------	LED PWB	1
4	----------	CD PWB	1
5	SMA-182-100	MOTOR ASSY(SPINDLE)	1
6	SMA-183-100	MOTOR ASSY(SLED)	1
7	620-1022-26	CLAMPER LINK	1
8	803-4906-60	VINYL COAT WIRE(ORG)	1
9	816-2591-00	LEAD WIRE(YEL)	1
10	620-1025-22	ID-LOCK PLATE	1
11	620-1026-21	SPRING PLATE	1

NO.	PART NO.	DESCRIPTION	Q'TY
12	620-1585-21	LOWER CHASSIS	1
13	620-1028-24	UPPER CHASSIS	1
14	966-0638-20	SH-RACK ASSY	1
15	621-0598-27	UPPER GUIDE	1
16	621-0718-21	ROLLER GUIDE	1
17	621-0600-26	SHIFT LEVER	1
18	621-1735-20	RACK	1
19	621-0602-22	LOCK ARM L	1
20	621-0603-25	LOCK ARM R	1
21	621-0724-21	GEAR BASE	1
22	621-0605-22	GEAR COVER	1

NO.	PART NO.	DESCRIPTION	Q'TY
23	621-0723-20	IDLE CASE	1
24	816-2590-00	VINYL COAT WIRE(GRN)	1
25	621-0608-21	SECOND GEAR	1
26	621-0609-20	BASE GEAR	1
27	621-0610-20	IDLE GEAR A	1
28	621-0611-20	IDLE GEAR B	1
29	621-0612-21	ROLLER GEAR A	1
30	621-0719-20	ROLLER GEAR B	1
31	621-0720-20	ROLLER GEAR C	1
32	621-0721-20	ROLLER GEAR D	1
33	621-0616-20	POWER GEAR A	1
34	621-0617-20	POWER GEAR B	1
35	621-0618-20	POWER GEAR C	1
36	621-0619-20	POWER GEAR D	1
37	621-0620-20	THREAD GEAR A	1
38	621-0621-20	THREAD GEAR B	1
39	621-0622-21	ROLLER SLEEVE	2
40	621-0623-23	LS-HOLDER	1
41	621-0624-22	GUIDE RAIL	1
42	816-2593-00	LEAD WIRE (PUR)	1
43	816-2624-50	FLAT WIRE (10P)	1
44	716-3473-00	IT SCREW (M2x3)	2
45	621-0709-20	SH-BASE	1
46	621-0711-20	LOADING ROLLER	2
47	345-5476-20	CUSHION RUBBER	1
48	622-1660-20	ROLLER SHAFT	1

NO.	PART NO.	DESCRIPTION	Q'TY
49	624-0018-01	LEAD SCREW	1
50	629-0086-20	DAMPER F	2
51	629-0087-20	DAMPER R	1
52	714-2003-81	SCREW (M2x3)	2
53	716-1507-00	SCREW (M2x3)	7
54	716-1733-00	SCREW (M1.7x2.3)	2
55	716-3469-00	SCREW (3x4)	2
56	716-3446-00	SCREW (M1.4x2.5)	2
57	750-3465-21	ROLLER SPRING L	1
58	750-3466-20	ROLLER SPRING R	1
59	750-3467-21	SHIFT SPRING	1
60	750-3468-20	RACK SPRING	1
61	750-3469-20	CLAMPER SPRING	1
62	750-3470-20	ID-LOCK SPRING	1
63	816-2592-00	LEAD WIRE (BLU)	1
64	750-3472-21	DR-SPRING F	2
65	750-3473-20	DR-SPRING RA	1
66	750-3474-20	DR-SPRING RB	1
67	750-3475-21	DR-SPRING C	1
68	716-1670-00	SCREW (M2x4)	2
69	620-1023-23	CLAMPER PLATE	1
70	620-1721-20	SENSOR ARM	1
71	621-0708-20	CLAMPER RING	1
72	621-0626-21	STOPPER LINK	1
73	621-0627-21	DISC STOPPER	1
74	750-3471-20	SENSOR SPRING	1

ELECTRICAL PARTS LIST

Main PWB (B1) section

Note)Several different parts of the same reference number are alternative parts. One of those parts is used in the set.

REF No.	PART No.	DESCRIPTION
ANT1	092-4000-51	ANT-RECEPT
BL1	880-2090B	AM-FM TUNER
C1	166-2201-50	50V 22pF CH
C2	168-1032-55	50V 0.01uF
C4	166-2096-50	50V 2pF
C5	168-2732-55	25V 0.027uF
C6	168-2732-55	25V 0.027uF
C7	166-2201-50	50V 22pF CH
C8	187-3353-65	50V 3.3uF
C9	187-4763-35	16V 47uF
C10	168-2232-55	25V 0.022uF
C11	168-1032-55	50V 0.01uF
C13	168-2232-55	25V 0.022uF
C16	168-2232-55	25V 0.022uF
C17	168-2232-55	25V 0.022uF
C18	168-1022-55	50V 1000pF
C19	166-2701-50	50V 27pF CH
C20	166-1201-50	50V 12pF CH
C21	168-1022-55	50V 1000pF
C22	166-1011-50	50V 100pF
C23	166-1011-50	50V 100pF
C24	187-1073-35	16V 100uF
C25	187-4763-35	16V 47uF
C26	187-2273-15	6.3V 220uF
C27	042-1505-80	25V 1uF
C29	166-1011-50	50V 100pF
C30	166-1011-50	50V 100pF
C32	166-1011-50	50V 100pF
C33	166-3311-50	50V 330pF
C34	168-1022-55	50V 1000pF
C36	187-1053-65	50V 1uF
C40	168-1832-55	25V 0.018uF
C41	163-4763-15	6.3V 47uF
C43	168-1032-55	50V 0.01uF
C51	043-0505-50	2.2uF
C52	168-1022-55	50V 1000pF
C53	168-1032-55	50V 0.01uF
C54	168-1032-55	50V 0.01uF
C60	168-1042-78	25V 0.1uF
C106	163-1063-35	16V 10uF

REF No.	PART No.	DESCRIPTION
C107	178-1052-78	1uF
C108	172-2231-15	50V 0.022pF
C109	187-1053-65	50V 1uF
C114	042-1545-00	16V 2200uF
C118	178-2242-78	25V 0.22uF
C119	178-2242-78	25V 0.22uF
C120	178-2242-78	25V 0.22uF
C121	178-2242-78	25V 0.22uF
C122	168-1022-55	50V 1000pF
C123	168-1022-55	50V 1000pF
C124	168-1022-55	50V 1000pF
C125	168-1022-55	50V 1000pF
C126	168-1022-55	50V 1000pF
C127	168-1022-55	50V 1000pF
C128	168-1022-55	50V 1000pF
C129	168-1022-55	50V 1000pF
C130	166-1011-50	50V 100pF
C131	168-1042-78	25V 0.1uF
C132	163-1053-65	50V 1F
C138	168-1042-78	25V 0.1uF
C210	187-3363-25	10V 33uF
C213	042-1631-50	10V 100uF
C214	187-1073-15	6.3V 100uF
C215	187-1063-35	16V 10uF
C216	187-2273-15	6.3V 220uF
C401	168-1522-55	1500pF
C402	168-1522-55	1500pF
C456	166-4711-50	470pF
C457	168-1032-55	50V 0.01uF
C458	187-1063-35	16V 10uF
C459	187-1063-35	16V 10uF
C460	187-1063-35	16V 10uF
C461	187-1063-35	16V 10uF
C501	187-2253-65	50V 2.2uF
C502	187-2253-65	50V 2.2uF
C503	187-2253-65	50V 2.2uF
C504	187-2253-65	50V 2.2uF
C505	168-3322-55	3300pF
C506	168-3322-55	3300pF
C507	168-1042-78	25V 0.1uF

REF No.	PART No.	DESCRIPTION
C509	187-2263-35	16V 22uF
C510	168-2722-55	2700pF
C511	168-2722-55	2700pF
C512	178-4742-78	25V 0.47uF
C513	178-4742-78	25V 0.47uF
C514	187-2253-65	50V 2.2uF
C515	187-2253-65	50V 2.2uF
C516	168-1042-78	25V 0.1uF
C517	168-1042-78	25V 0.1uF
C518	168-1042-78	25V 0.1uF
C519	168-1042-78	25V 0.1uF
C520	168-1222-55	1200pF
C521	168-1222-55	1200pF
C525	166-1211-50	120pF
C526	166-1211-50	120pF
C527	166-1211-50	120pF
C528	166-1211-50	120pF
C600	168-1032-55	50V 0.01uF
C601	042-0650-00	5.5V 0.1F
C602	187-1063-35	16V 10uF
C603	168-1032-55	50V 0.01uF
C605	042-1577-00	6.3V 100uF
C609	168-4732-78	25V 0.047uF
C610	168-1042-78	25V 0.1uF
C611	168-1042-78	25V 0.1uF
C612	187-4763-35	16V 47uF
C613	042-1631-50	10V 100uF
C614	168-1042-78	25V 0.1uF
C615	168-1042-78	25V 0.1uF
C619	168-1022-55	50V 1000pF
C629	168-1022-55	50V 1000pF
C708	187-1063-35	16V 10uF
C806	187-2263-35	16V 22uF
D2	001-0466-60	DIODE
D110	001-0347-41	MA4075M
D201	001-1310-00	KDS160
D202	001-1310-00	KDS160
D203	001-0592-61	IN5404
D204	001-0466-60	DIODE
D205	001-0466-60	DIODE

REF No.	PART No.	DESCRIPTION
D208	001-0347-32	MA4056M
D210	001-0347-28	MA4051M
D501	001-1310-00	KDS160
D502	001-1310-00	KDS160
D602	001-0347-46	MA4091L
D606	001-4301-35	HZU6.2B2
D613	001-0466-60	DIODE
D615	001-0466-60	DIODE
IC2	051-6212-08	LC72191JM
IC101	051-2057-00	TB2906HQ
IC102	051-3324-00	HA13168
IC201	051-3325-90	NJM2880U33
IC501	051-5033-90	PT2311
IC600	052-3949-00	M30622MGP-193GP
IC601	051-5437-08	S-80821ANMP
IC603	051-5443-08	BD4850G
J601	074-1214-00	OUTLET SOCKET
J602	074-1217-50	OUTLET SOCKET
J603	074-1138-70	OUTLET SOCKET
J605	076-0312-03	3P
L1	010-3406-54	2.2uH
L2	010-6026-50	220uH
L52	010-2003-04	30uH
L101	009-9006-71	CHOKE
L201	010-2230-69	5.6uH
L401	010-3100-66	2.2uH
L402	010-3100-66	2.2uH
L501	010-3105-62	1k ohm 100MHz
L502	010-3105-62	1k ohm 100MHz
L605	010-3100-66	2.2uH
L606	010-3100-66	2.2uH
L607	010-3100-66	2.2uH
L635	010-2230-64	2.2uH
L636	010-2230-64	2.2uH
Q1	192-4155-51	2SC4155A-T111-1S,T
Q2	192-4155-51	2SC4155A-T111-1S,T
Q4	125-2041-93	RT1N241M
Q4	125-2027-92	DTC124EUA-T106
Q7	190-1602-00	2SA1602A
Q8	190-1602-00	2SA1602A
Q203	192-4155-49	2SC4155A
Q205	193-1858-50	2SD1858 Q,R
Q206	193-1858-50	2SD1858 Q,R
Q207	125-2041-93	RT1N241M
Q207	125-2027-92	DTC124EUA-T106
Q208	125-0034-92	RT1P141M
Q452	192-3440-50	2SC3440-T
Q452	193-1306-00	2SD1306-DE-TL
Q452	193-2114-00	2SD2114K T146
Q453	192-3440-50	2SC3440-T
Q453	193-1306-00	2SD1306-DE-TL
Q453	193-2114-00	2SD2114K T146
Q454	192-3440-50	2SC3440-T
Q454	193-1306-00	2SD1306-DE-TL
Q454	193-2114-00	2SD2114K T146
Q455	192-3440-50	2SC3440-T
Q455	193-1306-00	2SD1306-DE-TL
Q455	193-2114-00	2SD2114K T146

REF No.	PART No.	DESCRIPTION
Q501	125-2041-96	RT1N436M
Q501	125-2027-95	DTC143ZUA-T106
Q502	125-0034-96	RT1P436M
Q503	125-0034-96	RT1P436M
Q504	192-4155-49	2SC4155A
Q514	125-2041-96	RT1N436M
Q514	125-2027-95	DTC143ZUA-T106
Q604	190-1602-00	2SA1602A
Q605	125-3005-90	KTA1273
Q606	125-2041-93	RT1N241M
Q606	125-2027-92	DTC124EUA-T106
Q607	125-4011-90	KTD863
Q615	125-2041-93	RT1N241M
Q615	125-2027-92	DTC124EUA-T106
Q616	125-2041-93	RT1N241M
Q616	125-2027-92	DTC124EUA-T106
Q802	125-4011-90	KTD863
R1	119-2221-15	1/16W 2.2k ohm
R2	119-1021-15	1/16W 1k ohm
R3	119-1021-15	1/16W 1k ohm
R4	119-1031-15	1/16W 10k ohm
R9	119-1021-15	1/16W 1k ohm
R14	119-4741-15	1/16W 470k ohm
R15	119-1021-15	1/16W 1k ohm
R16	119-1231-15	1/16W 12k ohm
R17	119-5631-15	1/16W 56k ohm
R21	119-8201-15	1/16W 82 ohm
R25	119-1041-15	1/16W 100k ohm
R26	119-3331-15	1/16W 33k ohm
R28	119-1021-15	1/16W 1k ohm
R30	119-1021-15	1/16W 1k ohm
R31	119-1021-15	1/16W 1k ohm
R32	119-1031-15	1/16W 10k ohm
R33	119-1031-15	1/16W 10k ohm
R34	119-1031-15	1/16W 10k ohm
R35	119-4721-15	1/16W 4.7k ohm
R36	119-4721-15	1/16W 4.7k ohm
R37	119-1521-15	1/16W 1.5k ohm
R38	119-1521-15	1/16W 1.5k ohm
R39	119-1031-15	1/16W 10k ohm
R53	119-1021-15	1/16W 1k ohm
R55	119-1041-15	1/16W 100k ohm
R102	119-4731-15	1/16W 47k ohm
R105	119-1021-15	1/16W 1k ohm
R120	119-1031-15	1/16W 10k ohm
R202	119-0000-05	JW
R203	119-0000-05	JW
R205	116-4721-15	1/4W 4.7k ohm
R208	119-4721-15	1/16W 4.7k ohm
R211	119-4731-15	1/16W 47k ohm
R212	116-4721-15	1/4W 4.7k ohm
R213	116-2291-15	1/4WS 2.2 ohm
R214	116-2291-15	1/4WS 2.2 ohm
R215	116-1511-15	1/4WS 150 ohm
R222	119-1031-15	1/16W 10k ohm
R470	119-2231-15	1/16W 22k ohm
R471	119-2231-15	1/16W 22k ohm
R472	119-2231-15	1/16W 22k ohm

REF No.	PART No.	DESCRIPTION
R473	119-2231-15	1/16W 22k ohm
R476	119-3311-15	1/16W 330 ohm
R477	119-3311-15	1/16W 330 ohm
R478	119-3311-15	1/16W 330 ohm
R479	119-3311-15	1/16W 330 ohm
R481	119-1021-15	1/16W 1k ohm
R482	119-1021-15	1/16W 1k ohm
R483	119-4721-15	1/16W 4.7k ohm
R484	119-4721-15	1/16W 4.7k ohm
R485	119-4721-15	1/16W 4.7k ohm
R486	119-4721-15	1/16W 4.7k ohm
R503	119-5621-15	1/16W 5.6k ohm
R504	119-5621-15	1/16W 5.6k ohm
R507	119-4721-15	1/16W 4.7k ohm
R508	119-4721-15	1/16W 4.7k ohm
R509	119-4721-15	1/16W 4.7k ohm
R510	119-4721-15	1/16W 4.7k ohm
R511	119-1011-15	1/16W 100 ohm
R512	119-1011-15	1/16W 100 ohm
R513	119-1011-15	1/16W 100 ohm
R514	119-1011-15	1/16W 100 ohm
R520	119-2231-15	1/16W 22k ohm
R521	119-2231-15	1/16W 22k ohm
R522	119-2721-15	1/16W 2.7k ohm
R523	119-2721-15	1/16W 2.7k ohm
R532	119-1021-15	1/16W 1k ohm
R537	119-8221-15	1/16W 8.2k ohm
R538	119-1021-15	1/16W 1k ohm
R540	119-2231-15	1/16W 22k ohm
R604	119-1031-15	1/16W 10k ohm
R605	119-1031-15	1/16W 10k ohm
R606	119-5621-15	1/16W 5.6k ohm
R607	119-1041-15	1/16W 100k ohm
R609	119-6831-15	1/16W 68k ohm
R611	119-0000-05	JW(PE-2731B-A)
R612	119-0000-05	JW(PE-2732K-A/B)
R613	119-0000-05	JW(PE-2731B-A)
R617	119-2231-15	1/16W 22k ohm
R618	116-1021-15	1/4W 1k ohm
R622	116-4711-15	1/4W 470 ohm
R623	119-1031-15	1/16W 10k ohm
R626	119-1031-15	1/16W 10k ohm
R627	119-1031-15	1/16W 10k ohm
R628	119-1541-15	1/16W 150k ohm
R629	119-2221-15	1/16W 2.2k ohm
R635	119-1021-15	1/16W 1k ohm
R636	119-1021-15	1/16W 1k ohm
R637	119-1021-15	1/16W 1k ohm
R638	116-1031-15	1/4W 10k ohm
R640	119-1011-15	1/16W 100 ohm
R807	116-3311-15	1/4W 330 ohm
S600	013-6103-00	TACT SWITCH
SUP1	060-0122-91	DSP-141N-A21F
X2	061-9013-10	7.2MHZ
X601	060-1904-90	10MHZ
PWB	039-2641-00	PWB(WITHOUT COMPONENT)

Switch PWB(B2) section

REF No.	PART No.	DESCRIPTION
C701	168-4732-78	25V 0.047uF
C702	168-4732-78	25V 0.047uF
C703	168-4732-78	25V 0.047uF
C704	168-1022-55	50V 1000pF
C707	042-0423-97	16V 10uF
C725	042-0423-97	16V 10uF
D701	001-7046-01	DIODE
D701	001-7046-00	DIODE
D702	001-0529-19	MA8036H
D703	001-4301-41	HZU7.5B2
D704	001-4301-41	HZU7.5B2
D705	001-4301-41	HZU7.5B2
D706	001-4301-41	HZU7.5B2
D707	001-4301-41	HZU7.5B2
D711	001-1310-00	KDS160

REF No.	PART No.	DESCRIPTION
D712	001-4301-29	HZU5.1B2
IC701	051-6013-00	LC75854
IR701	060-4017-90	RS-671
J701	076-0615-00	2P
LCD701	379-1323-41	INDICATOR(LCD)
PL701	017-0444-00	14V 50mA
PL701	017-0461-00	14V 50mA
PL702	017-0444-00	14V 50mA
PL702	017-0461-00	14V 50mA
Q701	190-1365-50	2SA1365-T
Q701	191-1197-50	2SB1197K
R701	119-1031-15	1/16W 10k ohm
R702	119-4731-15	1/16W 47k ohm
R703	119-6841-15	1/16W 680k ohm
R704	119-2231-15	1/16W 22k ohm

REF No.	PART No.	DESCRIPTION
R705	119-2221-15	1/16W 2.2k ohm
R706	119-2221-15	1/16W 2.2k ohm
R707	119-2221-15	1/16W 2.2k ohm
R708	119-3311-15	1/16W 330 ohm
R709	119-3311-15	1/16W 330 ohm
R710	119-6811-15	1/16W 680 ohm
R712	119-1011-15	1/16W 100 ohm
R713	119-1021-15	1/16W 1k ohm
R714	119-1511-15	1/16W 150 ohm
R715	119-1511-15	1/16W 150 ohm
R716	119-3311-15	1/16W 330 ohm
S716	016-9900-84	VRW/SHAFT
PWB	039-2639-00	PWB(WITHOUT

Slot PWB(B3) section

REF No.	PART No.	DESCRIPTION
C 290	168-1032-55	0.01uF
D 290	001-2601-90	MA728-TX
J 901	074-8001-00	0 9P
J 902	074-1158-57	7P
P 901	076-0488-03	3P
R 291	119-4731-15	1/16W 47K ohm
R 292	119-4731-15	1/16W 47K ohm
R 293	119-4731-15	1/16W 47K ohm
R 294	119-4731-15	1/16W 47K ohm
R 295	119-4731-15	1/16W 47K ohm
R 296	119-4731-15	1/16W 47K ohm
R 297	119-1011-15	1/16W 100 ohm
R 298	119-4701-15	1/16W 47 ohm
R 299	119-1011-15	1/16W 100 ohm
TM901	073-0762-90	TERMINAL
TM902	073-0762-90	TERMINAL
PWB	039-2463-00	PWB(WITHOUT COMPONENT)

CD PWB (B4) section: 929-0601-81

REF No.	PART No.	DESCRIPTION
C1	168-4732-78	0.047uF
C2	046-3922-58	3900pF
C3	046-3332-78	0.033uF
C4	045-2201-50	22pF
C5	045-3901-50	39pF
C6	168-4732-78	0.047uF
C7	045-2096-50	2pF
C8	042-0416-52	10V10uF TAN
C9	042-0416-52	10V10uF TAN
C10	046-5622-58	5600pF
C11	178-1052-78	1uF
C12	163-1073-05	4V100uF
C13	178-1052-78	1uF
C14	168-1045-56	0.1uF
C15	046-6822-58	6800pF
C16	046-3332-78	0.033uF
C17	178-2242-78	0.22uF
C18	168-4732-78	0.047uF
C19	045-1511-50	150pF
C20	046-2212-58	220pF
C21	178-1052-78	1uF
C22	046-4722-58	4700pF
C23	163-1073-05	4V100uF
C30	168-1045-56	0.1uF
C31	163-1073-05	4V100uF
C32	046-1032-78	0.01uF
C33	046-1032-78	0.01uF
C34	168-1045-56	0.1uF
C35	168-1045-56	0.1uF
C36	046-1022-58	1000pF
C37	042-0416-52	10V10uF TAN
C38	046-4722-58	4700pF
C39	178-2242-78	0.22uF
C40	168-1045-56	0.1uF
C41	046-2232-78	0.022uF
C42	046-6812-58	680pF
C43	046-1022-58	1000pF
C50	168-1045-56	0.1uF
C51	045-1011-50	100pF
C52	046-1522-58	1500pF
C53	046-1522-58	1500pF
C54	046-6812-58	680pF
C55	163-1073-35	16V100uF
C56	168-1045-56	0.1uF
C57	046-1022-58	1000pF
C60	045-1801-50	18pF
C61	045-1801-50	18pF
C62	046-1032-78	0.01uF
C63	168-1045-56	0.1uF
C64	168-1045-56	0.1uF
C65	168-1045-56	0.1uF
C66	046-1032-78	0.01uF
C67	168-1045-56	0.1uF
C68	046-1032-78	0.01uF
C70	168-1045-56	0.1uF
C71	168-1045-56	0.1uF
C72	168-1045-56	0.1uF
C75	046-1032-78	0.01uF
C76	168-1045-56	0.1uF
C77	163-2273-05	4V220uF
C78	168-1045-56	0.1uF
C80	168-1045-56	0.1uF
C81	168-1045-56	0.1uF
C82	178-1052-78	1uF
C83	046-4722-58	4700pF
C84	178-1052-78	1uF
C85	046-1032-78	0.01uF
C86	168-1045-56	0.1uF
C87	168-1045-56	0.1uF
C88	045-1011-50	100pF
C89	045-1011-50	100pF
C90	046-1032-78	0.01uF
C91	046-1032-78	0.01uF
C92	168-1045-56	0.1uF
C93	046-1032-78	0.01uF
C95	168-1045-56	0.1uF
C96	163-4763-05	4V47uF
C97	042-0416-52	10V10uF TAN
C98	168-1045-56	0.1uF
C99	046-1032-78	0.01uF
CCT1	050-0145-54	1/10W 47k ohm x4
CCT2	050-0145-54	1/10W 47k ohm x4
CCT3	050-0146-53	1/10W 100k ohm x2
CCT4	050-0146-53	1/10W 100k ohm x2
CCT5	050-0146-55	1/10W 68k ohm x2
CCT6	050-0145-54	1/10W 47k ohm x4
CCT8	050-0146-53	1/10W 100k ohm x2
CCT9	050-0145-54	1/10W 47k ohm x4
D1	001-2610-90	RB480KTL
D2	001-2610-90	RB480KTL
D3	001-0367-91	1SS226
D4	001-2610-90	RB480KTL
IC1	051-5709-90	AN8399SA-E1
IC2	051-6393-00	MN6627482WB
IC3	051-6062-08	BA5996FM-E2
IC4	051-7221-58	SN74AHC1G04HD
IC5	052-5056-00	MN102H60KCK
IC6	051-6372-00	TMS320DA150P
IC7	051-3314-90	TA48S033F
IC8	051-3315-90	TPS76316DBVR
IC9	051-5442-08	BD4826G
IC10	051-9814-00	MBM29DL800BA-90PFTN
IC11	051-7519-08	SN74LV273APWR
IC12	051-7519-08	SN74LV273APWR
IC13	051-7239-38	SN74AHCT08PWR
IC14	051-9330-00	K4S641632F-TC60
IC15	051-7518-08	SN74LV139APWR
IC16	051-7203-48	SN74LV74APW
IC17	051-3263-90	NJU7200U33
IC18	051-7222-48	SN74AHC1G08D
J1	074-1138-65	15P
J2	074-1138-60	10P
J3	074-1237-70	20P
J4	074-1138-57	7P
Q1	125-0002-92	RN2402
Q02	125-2004-92	RN1402
Q3	131-1188-50	2SB1188PQR
Q4	190-1586-50	2SA1586Y,G
Q5	125-2004-92	RN1402
Q50	125-2004-92	RN1402
R1	033-3341-15	1/10W 330k ohm
R2	033-4741-15	1/10W 470k ohm
R3	033-1521-15	1/10W 1.5k ohm
R4	033-3321-15	1/10W 3.3k ohm
R5	033-4721-15	1/10W 4.7k ohm
R6	117-1001-15	1/8W 10 ohm
R7	033-2251-15	1/10W 2.2M ohm
R8	033-6831-15	1/10W 68k ohm
R9	033-1021-15	1/10W 1k ohm
R10	033-3331-15	1/10W 33k ohm
R11	033-1231-15	1/10W 12k ohm
R12	033-1231-15	1/10W 12k ohm
R14	033-6831-15	1/10W 68k ohm
R17	033-1811-15	1/10W 180 ohm
R30	033-1011-15	1/10W 100 ohm
R31	033-6811-15	1/10W 680 ohm
R32	033-6811-15	1/10W 680 ohm
R33	033-2211-15	1/10W 220 ohm
R35	033-3311-15	1/10W 330 ohm
R36	033-5631-15	1/10W 56k ohm
R37	033-8231-15	1/10W 82k ohm
R38	033-5631-15	1/10W 56k ohm
R39	033-3331-15	1/10W 33k ohm
R40	033-8221-15	1/10W 8.2k ohm
R41	033-1031-15	1/10W 10k ohm
R42	033-2731-15	1/10W 27k ohm
R43	033-1031-15	1/10W 10k ohm
R44	033-1531-15	1/10W 15k ohm
R45	033-5621-15	1/10W 5.6k ohm
R46	033-4741-15	1/10W 470k ohm
R47	033-1541-15	1/10W 150k ohm
R48	033-2241-15	1/10W 220k ohm
R50	117-6811-15	1/8W 680 ohm
R51	033-1031-15	1/10W 10k ohm
R52	033-1031-15	1/10W 10k ohm
R53	033-1031-15	1/10W 10k ohm
R54	033-1031-15	1/10W 10k ohm
R55	033-8221-15	1/10W 8.2k ohm
R56	033-1041-15	1/10W 100k ohm
R57	033-1011-15	1/10W 100 ohm
R62	033-1041-15	1/10W 100k ohm
R63	033-1041-15	1/10W 100k ohm
R66	119-4741-15	1/10W 470k ohm
R71	033-0000-05	1/10W 0 ohm
R72	033-0000-05	1/10W 0 ohm
R73	033-0000-05	1/10W 0 ohm
R82	033-0000-15	1/10W 0 ohm
R83	033-1211-15	1/10W 120 ohm
R84	033-0000-05	1/10W 0 ohm
R94	033-1041-15	1/10W 100k ohm
R95	033-2231-15	1/10W 22k ohm
R96	033-1021-15	1/10W 1k ohm
R97	033-4721-15	1/10W 4.7k ohm
TM1	073-0768-90	TERMIMAL
X1	060-1535-90	16.934MHz
X2	060-1535-90	16.934MHz
PWB	039-2439-20	PWB (WITHOUT COMPONENT)

LED PWB (B5) section: 929-0601-81

REF No.	PART No.	DESCRIPTION
D1	001-7058-90	AN1105W-RR
D2	001-7058-90	AN1105W-RR
J1	074-1138-60	10P
Q1	060-4015-90	PS1192H
Q2	060-4015-90	PS1192H
S1	013-7414-50	CHUCKING
S2	013-7413-50	LIMIT
PWB	039-1944-21	PWB (WITHOUT COMPONENT)