pin134: Frnt Im Sel 2 : O : Front image signal selection. Refer Table 1.
pin135: Frnt Im Sel 1 : O : Front image signal selection. Refer Table 1.
pin136: SEL 3 : IN : The selection signal input.
pin137: SEL 2 : IN : The selection signal input.
pin138: PKB : IN : The parking brake signal input.
pin139: PHONE INT : IN : The telephone interrupt signal input.
pin140: NU : - : Not in use.
pin141: AMP REM DT : IN : Remote controller wire short detection.
pin142: AMP REM O : O : ON signal output to the amplifier.
pin143: AUTO ANT : O : Auto antenna control signal output.
pin144: ACC IN : IN : ACC ON flag input.

Table 1. Front image signal selection

	Visual	TV	DVD	CCD
Frnt Im Sel 1 (pin 135)	L	H	L	L
Frnt Im Sel 2 (pin 134)	L	L	H	L
Frnt Im Sel 3 (pin 133)	H	H	H	L

Table 2. Rear image signal selection

	Visual	TV	DVD	DVD A/C
Rear Im Sel 1 (pin 132)	L	H	L	L
Rear Im Sel 2 (pin 131)	L	L	H	L
Rear Im Sel 3 (pin 128)	H	H	H	L
Rear Im Sel 4 (pin 127)	L	L	L	H

052-7079-20 TC58FVM5B3AFTG65 CMOS Flash Memory

Terminal Description

pin 1: A 15 : IN : Address signal input.
pin 2: A 14 : IN : Address signal input.
pin 3: A 13 : IN : Address signal input.
pin 4: A 12 : IN : Address signal input.
pin 5: A 11 : IN : Address signal input.
pin 6: A 10 : IN : Address signal input.
pin 7: A 9 : IN : Address signal input.
pin 8: A 8 : IN : Address signal input.
pin 9: A 19 : IN : Address signal input.
pin 10: A 20 : IN : Address signal input.
pin 11: WE : IN : Write enable signal input.
pin 12: RESET : IN : Reset signal input.
pin 13: NU : - : Not in use.
pin 14: WP/ACC : IN : The write protection signal input / The acceleration signal input.
pin 15: RY/BY : O : The ready/busy signal output.
pin 16: A 18 : IN : Address signal input.
pin 17: A 17 : IN : Address signal input.
pin 18: A 7 : IN : Address signal input.
pin 19: A 6 : IN : Address signal input.
pin 20: A 5 : IN : Address signal input.
pin 21: A 4 : IN : Address signal input.
pin 22: A 3 : IN : Address signal input.
pin 23: A 2 : IN : Address signal input.
pin 24: A 1 : IN : Address signal input.
pin 25: A 0 : IN : Address signal input.
pin 26: CE : IN : Chip enable signal input.
pin 27: VSS : - : Negative supply voltage.
pin 28: OE : IN : Output enable signal input.
pin 29: D 0 : I/O: Data input/output.
pin 30: D 8 : I/O: Data input/output.
pin 31: D 1 : I/O: Data input/output.
pin 32: D 9 : I/O: Data input/output.
pin 33: D 2 : I/O: Data input/output.
pin 34: D 10 : I/O: Data input/output.
pin 35: D 3 : I/O: Data input/output.
pin 36: D 11 : I/O: Data input/output.
pin 37: VDD : - : Positive supply voltage.
pin 38: D 4 : I/O: Data input/output.
pin 39: D 12 : I/O: Data input/output.
pin 40: D 5 : I/O: Data input/output.
pin 41: D 13 : I/O: Data input/output.
pin 42: D 6 : I/O: Data input/output.
pin 43: D 14 : I/O: Data input/output.
pin 44: D 7 : I/O: Data input/output.
pin 45: D 15/A-1 : I/O: Data input/output. A-1 address input.
pin 46: VSS : - : Negative supply voltage.
pin 47: BYTE/WORD : IN : Byte / Word selection.
pin 48: A 16 : IN : Address signal input.

EXPLODED VIEW : PARTS LIST


Main section

Note) Same parts depend on each model.The model name is specified in the description.
(B-A;QC-6824B-A,K-A;QC-6824K-A,K-B;QC-6824K-BA,K-C;QC-6824K-C)

NO.	PART NO.	DESCRIPTION	Q'TY
1	DCP-583-600 DCP-584-800	DCP ASSY DCP-ASSY(K-A,K-B,K-C) (Refer to page 19)	1
2	----------	INNER-ES-SECTION (Refer to page 19)	1
3	335-7790-20	TOP-CVR	1
4	370-6925-00	PANEL-ES	1
5	378-0553-00	BADGE(CLARION)	1
6	948-0692-05	SLIDE-MECH-ASSY	1
7	013-9717-00	TOUCH PANEL	1
8	020-3042-01	DC-MOTOR	1
9	039-2793-25	FPC(MAIN-LCD) (WITHOUT COMPONENT)	1
10	039-2509-25	FPC(45P) (WITHOUT COMPONENT)	1
11	276-0200-00 276-0221-00 276-0222-00 276-0223-00	SETPLATE(B-A) SETPLATE(K-A) SETPLATE(K-B) SETPLATE(K-C)	1
12	311-1921-00	LOWER CASE	1
13	331-4174-00	MECH-CVR	1

NO.	PART NO.	DESCRIPTION	Q'TY
14	331-4175-00	MECH-BRKT	1
15	331-4176-00	HEAT SINK CVR	1
16	331-3884-01	LCD BRKT	1
17	335-7163-20	SIDE-CVR(L)	1
18	335-7164-20	SIDE-CVR(R)	1
19	345-3799-20	RCA CAP	1
20	345-5470-20	RUBBER PART	1
21	347-6085-20	DOUBLE FACE	2
22	331-4177-00	FPC-CVR(SIDE)	1
23	347-7038-20	SPACER	2
24	347-8253-00	INSULATOR	1
25	331-4173-00	FPC COVER	1
26	347-7262-20	INSULATOR	1
27	347-7739-20	DOUBLE FACE	1
28	347-8029-20	INSULATOR	1
29	347-8028-20	SHADE	1
30	347-7282-20	FILM	1
31	347-7300-20	INSULATOR	1
32	347-7301-20	FILM	2
33	347-7302-20	DOUBLE FACE	1
34	347-8030-20	PROTECT SHEET	1
35	347-8031-20	PROTECT SHEET	1
36	379-0468-00	INDICATOR(TFT)	1
37	347-8032-20	PROTECT SHEET	1
38	714-2604-8B	MACHINE SCREW(M2.6 x 4)	25
39	714-5008-4B	MACHINE SCREW(M5 x 8)	2
40	716-0872-61	PAD SCREW(M1.7 x 6 BLK)	7
41	716-0878-50	IT SCREW(M2.6 x 5)	4
42	331-4231-00	EARTH PLATE	2
43	716-1816-50	IT SCREW(M2 x 4)	2
44	731-2608-8B	TAPTIGHT	4
45	331-3946-00	COVER PLATE	1
46	039-2792-25	FPC(DVD-MECH) (WITHOUT COMPONENT)	1
47	816-2650-50	FLAT WIRE(14P L39)	1
48	780-2612-50	SCREW(M2.6 x 12)	2
49	781-1722-50	PLATE SCREW(M1.7 x 2.2)	4
50	781-1750-50	SCREW(1.7 x 2.2)	4
51	781-2002-50	PLATE SCREW(M2 x 2)	4
52	750-3137-03	SPRING(R)	1
53	750-3137-02	SPRING(L)	1
54	929-2506-10	DVD MECHANISM	1
55	347-5867-20	DOUBLE FACE	1
56	076-0349-03	PLUG(3P)	1
57	716-1468-01	SCREW (M2 x 2.5)	2
58	347-8033-20	INSULATOR	1
59	855-5436-50	RCA PIN CORD	1


NO.	PART NO.	DESCRIPTION	Q'TY
60	353-0585-20	SHADE	2
61	----------	SUB PWB	1
62	074-2001-64	OUTLET SOCKET	3
63	074-2225-62	OUTLET SOCKET	1
64	880-2091D	TUNER	1
65	347-7283-20	FILM	1
66	074-2238-80	OUTLET SOCKET(30P DVD)	1
67	074-0881-17	OUTLET SOCKET	1
68	060-8045-00	BUZZER	1
69	074-1194-00	OUTLET SOCKET	1
70	074-1214-00	OUTLET SOCKET	1
71	075-0385-00	JACK	1
72	076-0349-02	PLUG	2
73	076-0353-17	PLUG	1
74	076-0714-20	PLUG	1
75	313-1970-00	HEAT SINK(TR)	1
76	313-1905-00	HEAT SINK(POWER IC)	1
77	074-2209-93	OUTLET SOCKET	1
78	331-4178-00	IC-HOLDER	1
79	331-3850-00	CONECTOR HOLDER	1
80	331-4179-00	IC HOLDER(POWER IC)	1
81	331-4180-00	CONNECTOR HOLD	1
82	331-4182-00	SHIELD CVR	1
83	076-0349-05	PLUG(5P)	1
84	855-2500-00	MINI DIN CORD(RGB)	1
85	347-7285-20	SPACER(FPC)	1
86	----------	MAIN PWB	1
87	714-2606-8B	MACHINE SCREW(M2.6 x 6)	4
88	731-2612-8B	TAPTIGHT	2
89	816-3013-50	FLAT WIRE(14P L65)	1
90	074-2011-70	OUTLET SOCKET(20P)	1
91	714-3005-8B	MACHINE SCREW(M3 x 5)	1
92	074-1171-10	OUTLET SOCKET	1
93	331-4181-00	SHIELD CVR(R)	1
94	074-4020-00	OUTLET SOCKET(ANT)	1
95	092-2226-00	ANT-RECEPT	1
96	331-4199-00	SHIELD CVR	1
97	074-2225-95	OUTLET SOCKET(45)	2
98	074-2215-54	OUTLET SOCKET(4P)	1
99	074-2001-80	OUTLET SOCKET(30P)	1
100	076-0568-00	PLUG(2P)	1
101	074-2201-85	OUTLET SOCKET(35P)	1
102	321-1036-00	CLAMP(MINI DIN CORD)	1
103	074-2225-70	OUTLET SOCKET(20P)	1
104	----------	LCD PWB	1
105	855-0609-50	EXTENSION LEAD	1

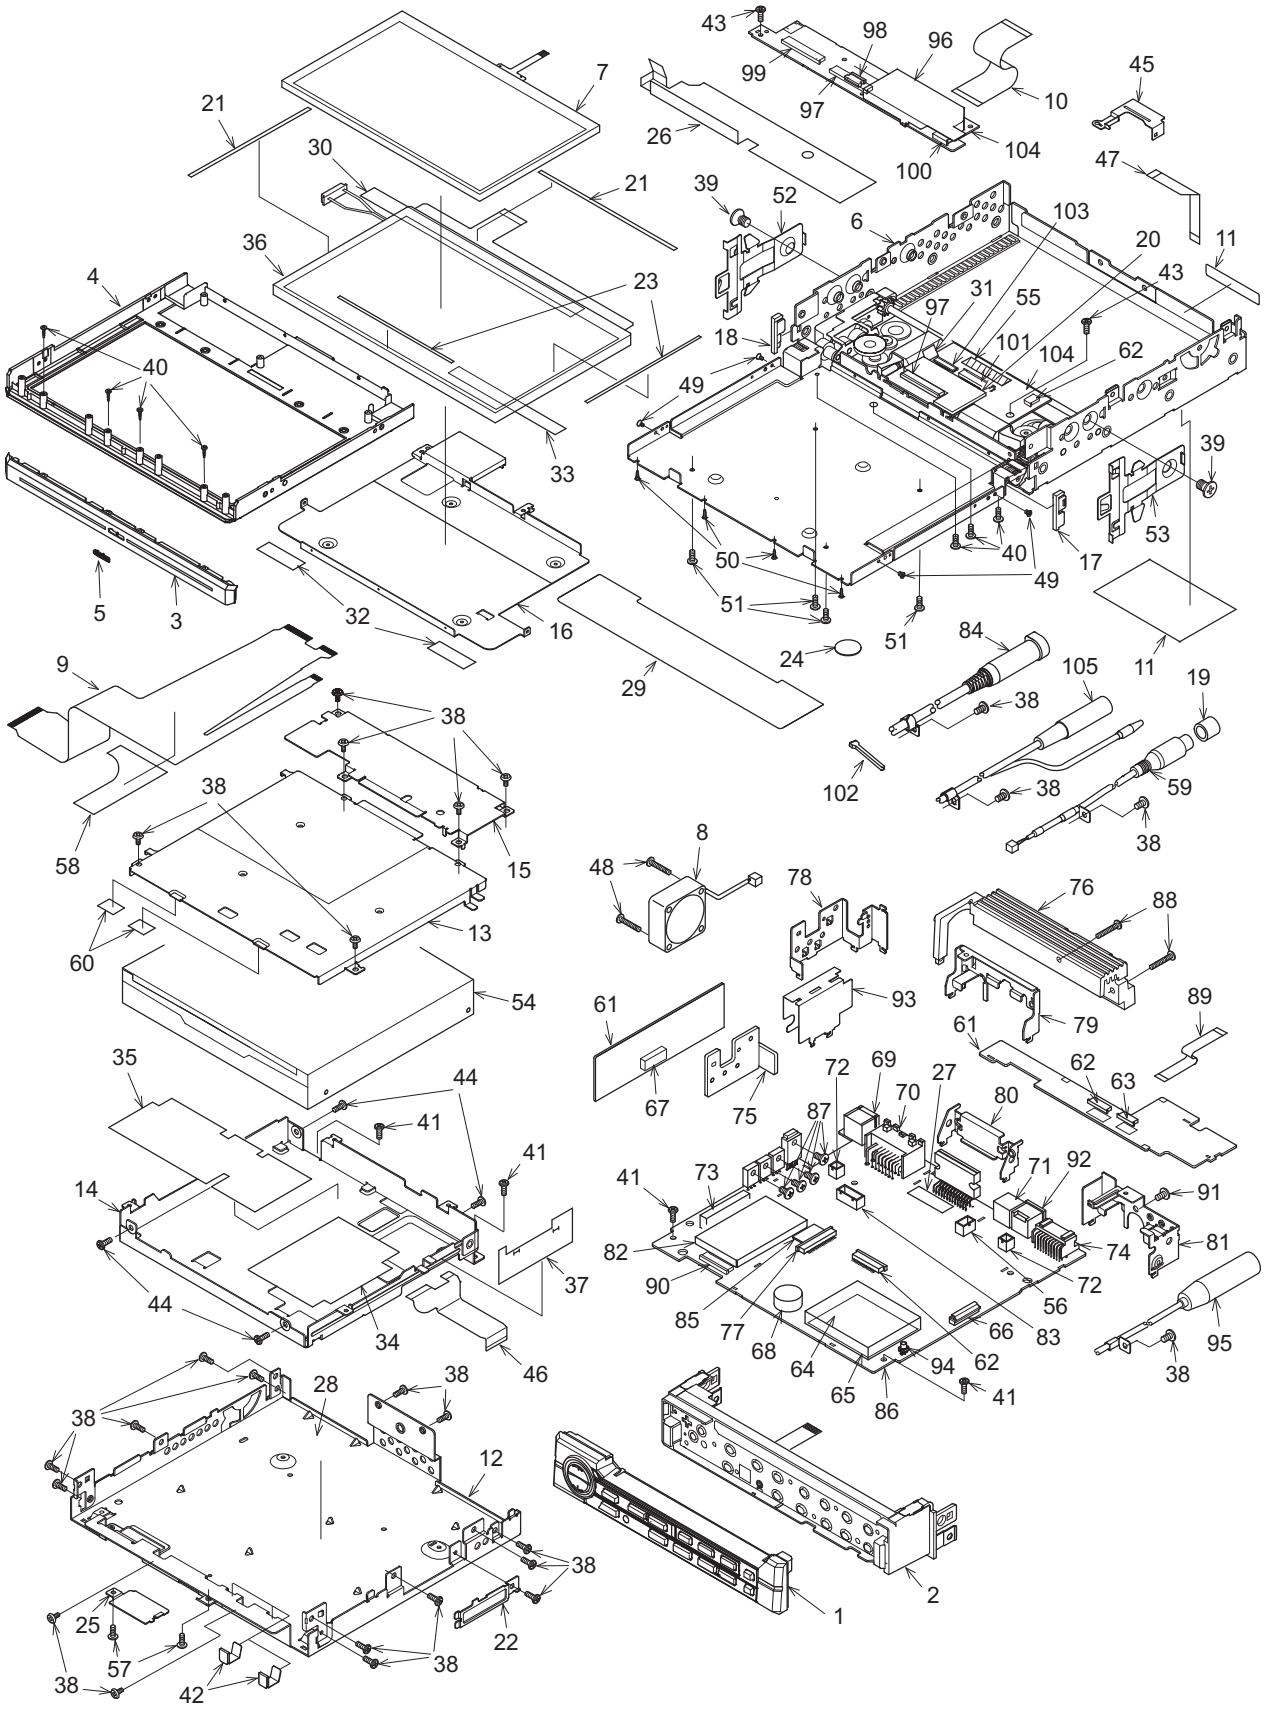
43
98
96
99
97
10
104
100
45
47
7
21
26
30
21
39
52
6
103
20
11
43
36
4
23
97
31
55
18
101
104
62
40
49
39
53
17
50
40
49
51
51
24
51
84
105
19
38
102
38
59
38
9
38
58
38
15
13
60
54
8
48
78
76
88
93
79
89
61
67
75
61
62
63
35
44
41
41
72
69
70
27
87
80
14
41
73
71
92
91
82
90
85
77
68
64
65
86
74
81
72
56
66
83
94
62
41
37
44
34
46
95
38
38
28
38
12
38
25
57
22
38
38
42
1
2

Inner Escutcheon section


NO.	PART NO.	DESCRIPTION	Q'TY
1	----------	SW PWB	1
2	370-6924-00	ESCUTCHEON(INNER)	1
3	382-7862-00	INNER-BUTTON(L)	1
4	382-7863-00	INNER-BUTTON(M)	1
5	382-7864-00	INNER-BUTTON(R)	1
6	335-7788-00	DISC GUIDE	1
7	346-0200-00	LEATHER SHEET	1
8	331-4168-00	DISCGUIDE PLATE	1
9	331-4169-00	ES-PLATE	1
10	382-7865-00	RESET BUTTON	1
11	074-1289-70	OUTLET SOCKET(20P)	1
12	335-7791-20	LED HOLDER(L)	1
13	335-7789-20	LED HOLDER(R)	1
14	347-7854-20	SLIDER	2
15	816-3012-50	FLAT WIRE(20P)	1
16	716-0872-51	PAD SCREW(M1.7 x 6)	13
17	716-0872-21	PAD SCREW(M1.7 x 4)	3
18	624-0016-00	MAGNET	1
19	335-7787-00	IR PLATE	1
20	946-0088-00	MAGNET PLATE ASSY	1
21	331-4170-00	LED COVER(L)	1
22	331-4171-00	LED COVER(R)	1
23	076-0708-02	PLUG(2P)	1
24	076-2010-03	PLUG(3P)	1
25	013-7411-51	SWITCH	1

NO.	PART NO.	DESCRIPTION	Q'TY
26	001-7097-90	DIODE(CL-194S-W)	7
27	013-6312-50	SWITCH	15
28	060-4017-90	IR-RECIEVER	1
29	013-6513-50	LUMI-SWITCH	1

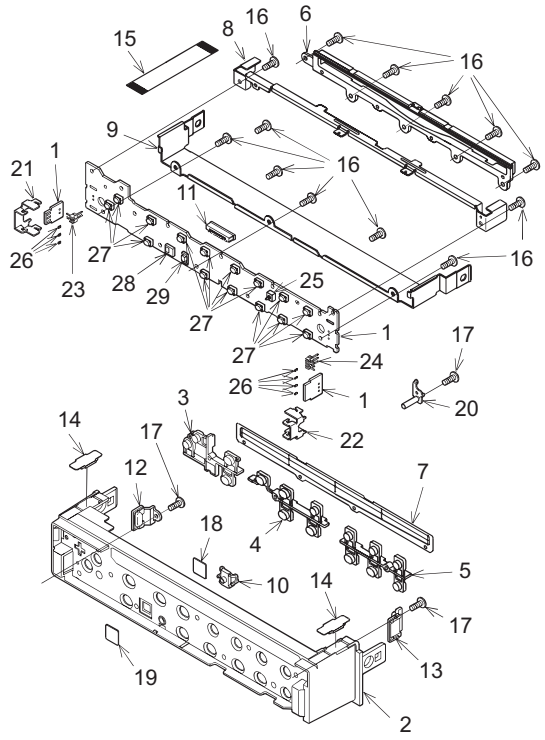

DCP section

NO.	PART NO.	DESCRIPTION	Q'TY
1	DCP-583-600 DCP-584-800	DCP ASSY(B-A) DCP ASSY(K-A,K-B,K-C)	1
1-1	370-6923-20	ESCUTCHEON(F)	1
1-2	373-1102-03 373-1102-04	DIAL-CVR(B-A) DIAL-CVR(B-A)	1

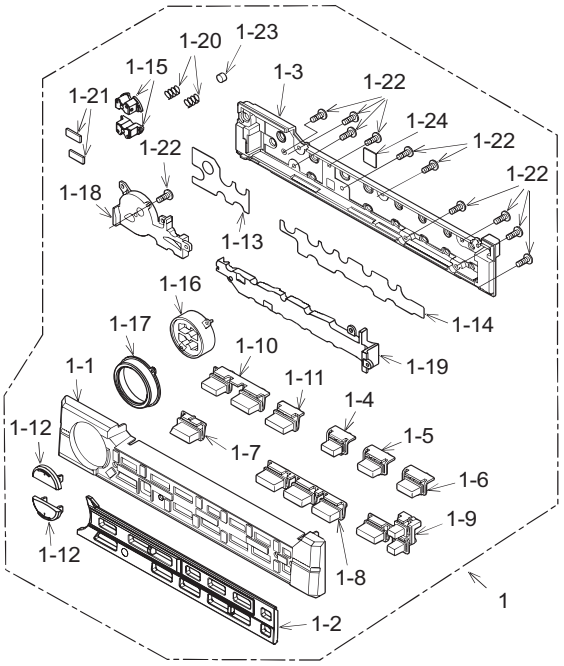

NO.	PART NO.	DESCRIPTION	Q'TY
1-3	335-7781-00	REAR-CVR	1
1-4	382-7852-00	BUTTON(IPOD)	1
1-5	382-7853-01 382-7853-00	BUTTON(MAP) BUTTON(CONT)	1
1-6	382-7854-00	BUTTON(MENU)	1
1-7	382-7855-00	BUTTON(SRC)	1
1-8	382-7856-00	BUTTON(BND/ADJ/M)	1
1-9	382-7857-00	BUTTON(ISR/OP/EJ)	1
1-10	382-7858-00	BUTTON(MUTE/DOWN)	1
1-11	382-7859-00	BUTTON(T-UP)	1
1-12	382-7860-00	BUTTON(VOL)	2
1-13	347-8023-20	REFLECTOR(L)	1
1-14	347-8024-20	REFLECTOR(R)	1
1-15	335-7782-00	BUTTON HOLDER(VOL)	2
1-16	335-7783-00	RING PLATE	1
1-17	335-7784-00	RING COVER	1
1-18	335-7785-00	ILLUMI PLATE(L)	1
1-19	335-7786-00	ILLUMI PLATE(R)	1
1-20	750-6816-00	SPRING	2
1-21	347-8022-20	DOUBLE FACE(VOL)	2
1-22	716-0872-61	PAD SCREW(M1.7 x 6 BLK)	11
1-23	354-7593-00	MAGNET	1
1-24	335-7787-00	IR PLATE	1

ELECTRICAL PARTS LIST

Note) Same parts depend on each model.The model name is specified in the description.
(B-A;QC-6824B-A,K-A;QC-6824K-A,K-B;QC-6824K-BA,K-C;QC-6824K-C)
Note) Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.

Main PWB(B1) section

REF No.	PART No.	DESCRIPTION
ANT101	092-2226-00	ANT-RECEPT
BL101	880-2091D	AM/FM TUNER
C101	166-2201-50	22pF CH
C102	166-1511-50	150pF CH
C104	168-1032-55	0.01uF K
C105	042-0643-51	16V 100uF LOW-SR
C106	168-2232-55	0.022uF K
C107	166-1011-50	100pF CH
C108	168-1022-55	1000pF K
C109	168-1042-78	16V 0.1uF
C110	168-1042-78	16V 0.1uF
C111	042-0560-84	16V 47uF
C112	043-0540-00	6.3V 10uF
C113	043-0540-00	6.3V 10uF
C114	043-0540-00	6.3V 10uF
C115	043-0540-00	6.3V 10uF
C116	168-1042-78	16V 0.1uF
C117	043-0540-00	6.3V 10uF
C118	043-0540-00	6.3V 10uF
C119	043-0540-00	6.3V 10uF
C120	166-2201-50	22pF CH
C121	166-2201-50	22pF CH
C122	178-1052-78	1uF
C123	042-0592-58	16V 10uF
C124	043-0540-00	6.3V 10uF(B-A)
C125	043-0540-00	6.3V 10uF(B-A)
C126	168-1042-78	16V 0.1uF
C127	042-0592-58	16V 10uF
C128	168-1042-78	16V 0.1uF
C129	042-0595-84	10V 100uF
C130	168-1045-56	0.1uF Z
C131	163-4753-55	35V 4.7uF
C132	166-1011-50	100pF CH
C133	166-1011-50	100pF CH
C134	166-1011-50	100pF CH
C135	166-1011-50	100pF CH
C136	168-1042-78	16V 0.1uF
C137	168-1045-56	0.1uF Z
C138	163-1073-15	6.3V 100uF
C139	163-2263-35	16V 22uF
C140	168-4735-56	0.047uF Z
C141	043-0540-00	6.3V 10uF
C142	043-0540-00	6.3V 10uF
C143	166-4701-50	47pF CH
C144	166-4701-50	47pF CH
C145	168-1042-78	16V 0.1uF
C146	166-1011-50	100pF CH
C147	043-0540-00	6.3V 10uF
C148	043-0540-00	6.3V 10uF
C149	043-0540-00	6.3V 10uF
C150	166-1011-50	100pF CH
C151	178-2242-78	0.22uF(B-A)
C152	166-1011-50	100pF CH(B-A)
C153	166-1011-50	100pF CH
C154	178-1052-78	1uF
C155	168-1045-56	0.1uF Z
C156	166-1011-50	100pF CH
C157	168-1042-78	16V 0.1uF
C158	042-0560-84	16V 47uF
C159	168-1045-56	0.1uF Z
C160	042-0643-51	16V 100uF LOW-SR
C161	168-1045-56	0.1uF Z
C162	042-0423-20	10V 10uF
C163	168-3335-56	0.033uF Z
C164	168-3322-55	3300pF K
C165	168-3322-55	3300pF K
C166	168-1045-56	0.1uF Z
C167	163-1073-15	6.3V 100uF
C168	168-3322-55	3300pF K
C169	168-3322-55	3300pF K
C170	168-2232-55	0.022uF K
C171	168-4712-55	470pF K
C173	168-2242-58	0.22uF B
C174	168-2232-55	0.022uF K
C175	168-2232-55	0.022uF K
C178	168-2232-55	0.022uF K
C181	166-1007-50	10pF CH
C182	166-1007-50	10pF CH
C184	168-1022-55	1000pF K
C185	168-1022-55	1000pF K
C186	168-1042-78	16V 0.1uF
C187	166-1011-50	100pF CH
C188	163-4753-55	35V 4.7uF
C189	168-1042-78	16V 0.1uF
C190	168-1022-55	1000pF K
C191	168-1022-55	1000pF K
C192	163-4753-55	35V 4.7uF
C193	168-1042-78	16V 0.1uF
C194	166-1811-50	180pF CH
C195	168-1045-56	0.1uF Z
C196	163-4753-55	35V 4.7uF
C197	042-0416-57	10V 47uF M TAN
C198	168-1042-78	16V 0.1uF
C199	168-1042-78	16V 0.1uF
C201	168-1022-55	1000pF K
C202	043-0540-00	6.3V 10uF
C203	168-1022-55	1000pF K
C204	168-1022-55	1000pF K
C205	043-0540-00	6.3V 10uF
C206	043-0540-00	6.3V 10uF
C207	168-1022-55	1000pF K
C208	168-1022-55	1000pF K
C209	043-0540-00	6.3V 10uF
C210	042-2273-25	10V 220uF M
C211	043-0540-00	6.3V 10uF
C212	168-1022-55	1000pF K
C213	168-4712-55	470pF K
C214	168-4712-55	470pF K
C215	043-0540-00	6.3V 10uF
C217	168-4712-55	470pF K
C218	168-4712-55	470pF K
C219	043-0540-00	6.3V 10uF
C221	168-4712-55	470pF K
C222	168-4712-55	470pF K
C223	043-0540-00	6.3V 10uF
C225	168-4712-55	470pF K
C226	168-4712-55	470pF K
C227	043-0540-00	6.3V 10uF
C229	168-6812-55	680pF K
C230	168-6812-55	680pF K
C231	043-0540-00	6.3V 10uF
C233	168-6812-55	680pF K
C234	168-6812-55	680pF K
C235	043-0540-00	6.3V 10uF
C237	168-6812-55	680pF K
C238	168-6812-55	680pF K
C239	043-0540-00	6.3V 10uF
C241	168-6812-55	680pF K
C242	168-6812-55	680pF K
C243	042-0592-58	16V 10uF
C244	168-1042-78	16V 0.1uF
C245	042-0592-58	16V 10uF
C246	168-1042-78	16V 0.1uF
C247	043-0567-90	25V 22uF
C249	043-0264-56	270pF
C250	166-2701-50	27pF CH
C251	043-0567-90	25V 22uF
C253	043-0264-56	270pF
C254	166-2701-50	27pF CH
C256	043-0567-90	25V 22uF
C258	043-0264-56	270pF
C259	166-2701-50	27pF CH
C260	043-0567-90	25V 22uF
C262	043-0264-56	270pF
C263	166-2701-50	27pF CH
C265	043-0567-90	25V 22uF
C266	043-0264-56	270pF
C267	166-2701-50	27pF CH
C268	043-0567-90	25V 22uF
C269	043-0264-56	270pF
C270	166-2701-50	27pF CH
C271	168-1032-55	0.01uF K
C272	043-0567-90	25V 22uF
C273	043-0264-56	270pF
C274	166-2701-50	27pF CH
C275	043-0567-90	25V 22uF
C276	043-0264-56	270pF
C277	166-2701-50	27pF CH
C280	168-1032-55	0.01uF K
C281	042-0592-58	16V 10uF
C282	042-0592-58	16V 10uF
C283	042-0592-58	16V 10uF
C284	042-0592-58	16V 10uF
C285	178-4742-78	0.47uF
C286	178-4742-78	0.47uF
C287	178-4742-78	0.47uF
C288	178-4742-78	0.47uF
C301	168-1042-78	16V 0.1uF
C302	168-1042-78	16V 0.1uF
C304	042-0592-58	16V 10uF
C306	168-1042-78	16V 0.1uF
C307	042-0423-97	16V 10uF
C308	168-1042-78	16V 0.1uF
C310	042-0423-20	10V 10uF
C311	168-1042-78	16V 0.1uF
C312	042-0423-20	10V 10uF
C313	168-1042-78	16V 0.1uF
C314	042-0423-20	10V 10uF
C316	168-1042-78	16V 0.1uF
C317	168-1045-56	0.1uF Z
C318	042-0630-50	16V 100uF
C319	042-0630-50	16V 100uF
C320	168-1042-78	16V 0.1uF
C322	042-0643-51	16V 100uF LOW-SR
C324	042-0643-51	16V 100uF LOW-SR
C325	042-0643-51	16V 100uF LOW-SR
C326	168-1045-56	0.1uF Z
C327	178-1052-78	1uF
C328	178-1052-78	1uF
C329	168-1032-55	0.01uF K
C330	168-1032-55	0.01uF K
C331	168-1032-55	0.01uF K
C332	168-1032-55	0.01uF K
C336	163-4763-15	6.3V 47uF
C337	163-4763-15	6.3V 47uF
C338	166-3096-50	3pF CJ
C339	163-4763-15	6.3V 47uF
C340	163-4763-15	6.3V 47uF
C341	168-1042-78	16V 0.1uF
C342	163-1073-35	16V 100uF
C343	042-1737-90	6.3V 1000uF M
C344	168-4712-55	470pF K
C345	168-4712-55	470pF K
C401	168-1042-78	16V 0.1uF
C402	043-0540-00	6.3V 10uF
C403	043-0540-00	6.3V 10uF
C404	168-1042-78	16V 0.1uF

REF No.	PART No.	DESCRIPTION
C405	168-1042-78	16V 0.1uF
C406	168-1042-78	16V 0.1uF
C407	168-4722-55	4700pF K
C408	166-2211-50	220pF CH
C409	168-1042-78	16V 0.1uF
C410	043-0540-00	6.3V 10uF
C411	168-1042-78	16V 0.1uF
C412	166-1007-50	10pF CH
C413	166-1007-50	10pF CH
C414	166-1011-50	100pF CH
C415	168-1042-78	16V 0.1uF
C416	168-1042-78	16V 0.1uF
C417	168-1042-78	16V 0.1uF
C418	168-1042-78	16V 0.1uF
C421	168-1042-78	16V 0.1uF
C422	168-1042-78	16V 0.1uF
C423	043-0540-00	6.3V 10uF
C424	168-1042-78	16V 0.1uF
C425	168-1042-78	16V 0.1uF
C426	168-1042-78	16V 0.1uF
C427	168-1042-78	16V 0.1uF
C428	043-0540-00	6.3V 10uF
C429	168-1042-78	16V 0.1uF
C430	043-0540-00	6.3V 10uF
C431	168-1042-78	16V 0.1uF
C432	168-1042-78	16V 0.1uF
C433	166-1011-50	100pF CH
C434	168-1042-78	16V 0.1uF
C435	166-1011-50	100pF CH
C436	043-0540-00	6.3V 10uF
C437	176-2221-50	2200pF CH
C438	168-2222-55	2200pF K
C439	168-1042-78	16V 0.1uF
C441	168-1042-78	16V 0.1uF
C450	168-1042-78	16V 0.1uF
C451	168-1042-78	16V 0.1uF
C452	166-5601-50	56pF CH
C454	168-1042-78	16V 0.1uF
C455	168-1042-78	16V 0.1uF
C456	168-1042-78	16V 0.1uF
C457	043-0540-00	6.3V 10uF
C458	168-1042-78	16V 0.1uF
C459	168-1042-78	16V 0.1uF
C460	168-1042-78	16V 0.1uF
C461	168-1042-78	16V 0.1uF
C462	168-1042-78	16V 0.1uF
C463	043-0532-50	10V 10uF
C464	043-0532-50	10V 10uF
C465	168-1042-78	16V 0.1uF
C466	166-1201-50	12pF CH
C467	168-1042-78	16V 0.1uF
C468	178-1052-78	1uF
C469	178-1052-78	1uF
C470	178-1052-78	1uF
C471	178-1052-78	1uF
C472	178-1052-78	1uF
C473	178-1052-78	1uF
C474	178-1052-78	1uF
C475	178-1052-78	1uF
C476	178-1052-78	1uF
C477	168-1042-78	16V 0.1uF
C478	168-1042-78	16V 0.1uF
C479	168-1042-78	16V 0.1uF
C480	168-1042-78	16V 0.1uF
C484	168-1042-78	16V 0.1uF
C485	168-1042-78	16V 0.1uF
C486	168-1042-78	16V 0.1uF
C487	166-5601-50	56pF CH
C488	178-1052-78	1uF
C490	168-1022-55	1000pF K
C501	043-0540-00	6.3V 10uF
C502	168-1042-78	16V 0.1uF
C503	043-0540-00	6.3V 10uF
C504	168-1042-78	16V 0.1uF

REF No.	PART No.	DESCRIPTION
C505	043-0551-90	6.3V 4.7uF M
C506	166-1801-50	18pF CH
C507	166-2201-50	22pF CH
C508	166-1011-50	100pF CH
C509	168-1042-78	16V 0.1uF
C510	168-1042-78	16V 0.1uF
C511	178-1052-78	1uF
C512	166-1011-50	100pF CH
C513	168-1032-55	0.01uF K
C514	168-1032-55	0.01uF K
C515	168-1022-55	1000pF K
C516	178-1052-78	1uF
C517	168-1042-78	16V 0.1uF
C518	168-1022-55	1000pF K
C519	178-1052-78	1uF
C521	042-1596-00	5.5V0.33F
C523	163-4763-15	6.3V 47uF
C605	178-4742-78	0.47uF
C606	042-0592-58	16V 10uF
C607	163-2253-65	50V 2.2uF
C608	178-1052-78	1uF
C609	042-1545-00	16V2200uF
C610	172-2241-11	0.22uF
C611	168-1022-55	1000pF K
C612	168-1022-55	1000pF K
C613	168-1022-55	1000pF K
C614	168-1022-55	1000pF K
C615	168-1022-55	1000pF K
C616	168-1022-55	1000pF K
C617	168-1022-55	1000pF K
C618	168-1022-55	1000pF K
C619	168-1042-78	16V 0.1uF
C620	042-1545-00	16V2200uF
C621	042-0627-90	16V 100uF
C622	042-0643-51	16V 100uF LOW-SR
C623	168-1042-78	16V 0.1uF
C624	168-1042-78	16V 0.1uF
C625	042-0627-90	16V 100uF
C626	168-1032-55	0.01uF K
C627	168-1032-55	0.01uF K
C628	042-0643-51	16V 100uF LOW-SR
C629	042-1736-90	16V 470uF M
C630	042-1736-90	16V 470uF M
C631	163-4763-35	16V 47uF
C632	042-1727-90	16V 33uF TAN
C633	168-1042-78	16V 0.1uF
C634	178-3342-78	0.33uF
C635	043-0561-90	0.1uF
C636	163-3363-45	25V 33uF
C637	042-0595-84	10V 100uF
C638	163-2263-35	16V 22uF
C639	168-4732-78	0.047uF K
C640	166-1011-50	100pF CH
C641	166-1011-50	100pF CH
C642	166-1011-50	100pF CH
C643	168-1045-56	0.1uF Z
C644	043-0561-92	0.47uF
C645	178-1052-78	1uF
C646	172-2241-11	0.22uF
C648	168-1042-78	16V 0.1uF
CCT403	050-0140-75	1/32W 330 ohm X4j
CCT408	050-0140-75	1/32W 330 ohm X4j
CCT411	050-0140-75	1/32W 330 ohm X4j
CCT412	050-0140-75	1/32W 330 ohm X4j
CCT413	050-0140-75	1/32W 330 ohm X4j
CCT414	050-0140-75	1/32W 330 ohm X4j
CCT415	050-0140-63	1/32W 47k ohm x4J
CCT416	050-0140-63	1/32W 47k ohm x4J
CCT417	050-0140-75	1/32W 330 ohm X4j
CCT418	050-0140-75	1/32W 330 ohm X4j
CCT419	050-0140-75	1/32W 330 ohm X4j
CCT420	050-0140-75	1/32W 330 ohm X4j
CCT421	050-0140-63	1/32W 47k ohm x4J
CCT422	050-0140-63	1/32W 47k ohm x4J

REF No.	PART No.	DESCRIPTION
CCT505	050-0140-52	1/32W 100 ohm x4J
CCT506	050-0140-52	1/32W 100 ohm x4J
CCT507	050-0140-52	1/32W 100 ohm x4J
CCT508	050-0140-52	1/32W 100 ohm x4J
D101	001-0517-90	1SS355
D102	001-0517-90	1SS355
D103	001-0517-90	1SS355
D104	001-0529-21	MA8039-H
D201	001-0529-29	MA8051-M
D202	001-0517-90	1SS355
D203	001-0517-90	1SS355
D204	001-0529-44	MA8082-M
D301	001-0517-90	1SS355
D302	001-0517-90	1SS355
D303	001-0517-90	1SS355
D304	001-1305-90	DAN217U-T106
D305	001-1305-90	DAN217U-T106
D306	001-1305-90	DAN217U-T106
D451	001-1305-90	DAN217U-T106(B-A)
D452	001-1305-90	DAN217U-T106(B-A)
D453	001-1305-90	DAN217U-T106(B-A)
D454	001-1305-90	DAN217U-T106(B-A)
D455	001-1305-90	DAN217U-T106(B-A)
D501	001-0529-43	MA8082-L
D502	001-0517-90	1SS355
D601	001-4311-00	ST70-27F-7072
D602	001-0517-90	1SS355
D603	001-0517-90	1SS355
D604	001-0517-90	1SS355
D605	001-0517-90	1SS355
D606	001-0517-90	1SS355
D607	001-2403-90	M1F60
D608	001-2403-90	M1F60
D609	001-2403-90	M1F60
D610	001-2403-90	M1F60
D611	001-0517-90	1SS355
D612	001-2403-90	M1F60
D613	001-0517-90	1SS355
D614	001-0517-90	1SS355
D615	001-0517-90	1SS355
D616	001-0517-90	1SS355
D617	001-0529-26	MA8047-M
D618	001-0504-47	HZS9B3L
D619	001-0529-43	MA8082-L
D620	001-2403-90	M1F60
D621	001-0517-90	1SS355
F601	060-8066-90	4A
IC101	051-3049-90	HA17558AFEL
IC102	051-3049-90	HA17558AFEL
IC103	051-1905-91	AN77L05M
IC104	----------	SAF7730H
IC105	051-3351-90	BA033CC0FP-E2
IC201	051-6703-08	AK4384VT
IC202	051-6703-08	AK4384VT
IC203	051-3026-90	NJM4580V
IC204	051-3026-90	NJM4580V
IC205	051-3026-90	NJM4580V
IC206	051-3026-90	NJM4580V
IC301	051-7243-48	SN74AHCT1G08 DCKR
IC302	051-3317-90	LM1086IS-ADJ
IC303	051-3317-90	LM1086IS-ADJ
IC304	051-3289-00	BA09ST
IC305	051-5348-90	BA7652AF-E2
IC306	051-5348-90	BA7652AF-E2
IC308	051-5326-90	TK15420MTL
IC401	051-6456-00	YGV629-VZ
IC402	051-7509-90	SN74LV123APWR
IC403	051-7269-08	SN74AHC2G53 HDCTR
IC405	052-7079-20	TC58FVM5B3AF TG65
IC451	051-7221-18	TC7SH04FU
IC452	051-7221-18	TC7SH04FU

REF No.	PART No.	DESCRIPTION
IC454	051-5336-90	MM1227XFBE
IC455	051-7275-08	TC7W32FU TE12L
IC456	051-7221-18	TC7SH04FU
IC457	051-5342-90	NJM2524V
IC458	051-7275-08	TC7W32FU TE12L
IC501	052-7078-10	UPD70F3339GJ-UEN-A
IC502	051-9402-68	BR93L56F-W
IC503	051-5440-08	S-80931CNMC-G81
IC504	051-3406-90	NJM2078M
IC505	051-5410-38	BU4820G-TR
IC601	051-2057-00	TB2906HQ
IC602	051-3294-90	TA78DS10F
IC603	051-3335-90	AN77L04M
IC604	051-1855-08	TC7W14F
IC605	051-6600-58	HA12187FP
J101	074-4020-00	ANT
J301	074-2238-80	30P
J302	075-0385-00	JACK
J303	074-2209-93	43P
J501	074-2011-70	20p
J502	074-2001-64	14P
J503	076-0478-55	PLUG(B-A)
J601	074-1214-00	16P
J602	076-0353-17	PLUG 17P
J603	074-1171-10	10P DIN iPOD
J604	074-1194-00	13P Ce-NET
L101	010-2003-04	30uH COIL
L102	010-2279-50	4.7uH
L103	010-2279-50	4.7uH
L104	010-3105-62	1k ohm/100MHz
L105	010-3105-62	1k ohm/100MHz
L106	010-3105-62	1k ohm/100MHz
L107	010-3105-62	1k ohm/100MHz
L108	010-3109-63	1k ohm/100MHz
L109	010-3105-62	1k ohm/100MHz
L110	010-3105-62	1k ohm/100MHz
L111	010-3103-64	1.5k ohm/100MHz
L112	010-3105-62	1k ohm/100MHz
L113	010-3105-62	1k ohm/100MHz
L201	010-3103-64	1.5k ohm/100MHz
L202	010-3103-64	1.5k ohm/100MHz
L203	010-3105-62	1k ohm/100MHz
L204	010-3103-64	1.5k ohm/100MHz
L205	010-3103-64	1.5k ohm/100MHz
L206	010-3105-62	1k ohm/100MHz
L207	010-3103-64	1.5k ohm/100MHz
L208	010-3103-64	1.5k ohm/100MHz
L209	010-3103-64	1.5k ohm/100MHz
L210	010-3103-64	1.5k ohm/100MHz
L211	010-3103-64	1.5k ohm/100MHz
L212	010-3103-64	1.5k ohm/100MHz
L213	010-3103-64	1.5k ohm/100MHz
L214	010-3103-64	1.5k ohm/100MHz
L301	010-3103-50	1500 ohm/100MHz
L302	010-3103-50	1500 ohm/100MHz
L303	010-3103-50	1500 ohm/100MHz
L305	010-3104-50	30 ohm/100MHz
L306	010-3104-50	30 ohm/100MHz
L307	010-3104-50	30 ohm/100MHz
L308	010-3104-50	30 ohm/100MHz
L309	010-3104-50	30 ohm/100MHz
L310	010-3104-50	30 ohm/100MHz
L311	010-3104-50	30 ohm/100MHz
L312	010-3406-66	22uH J
L401	010-3104-50	30 ohm/100MHz
L402	010-2279-50	4.7uH
L403	010-3104-50	30 ohm/100MHz
L404	010-2279-50	4.7uH
L405	010-3104-50	30 ohm/100MHz
L406	010-3104-50	30 ohm/100MHz
L407	010-3104-50	30 ohm/100MHz
L501	010-2279-50	4.7uH
L502	010-2279-50	4.7uH

REF No.	PART No.	DESCRIPTION
P201	076-0714-20	20P
P301	076-0349-02	2P
P401	076-0349-05	5P
P504	076-0349-03	3P
P601	076-0349-02	2P
Q102	190-1298-00	2SA1298
Q103	125-2041-96	RT1N436M
Q104	190-1298-00	2SA1298
Q105	125-2041-96	RT1N436M
Q106	125-7005-90	PHK04P02T
Q201	193-1306-00	2SD1306
Q202	193-1306-00	2SD1306
Q203	193-1306-00	2SD1306
Q204	193-1306-00	2SD1306
Q205	193-1306-00	2SD1306
Q206	193-1306-00	2SD1306
Q207	193-1306-00	2SD1306
Q208	193-1306-00	2SD1306
Q209	125-0034-96	RT1P436M
Q210	125-0034-96	RT1P436M
Q211	125-2041-96	RT1N436M
Q212	125-2041-96	RT1N436M
Q213	192-4155-51	2SC4155A S,T
Q214	192-4155-51	2SC4155A S,T
Q301	190-2071-00	2SA2071
Q302	125-2041-96	RT1N436M
Q303	190-2071-00	2SA2071
Q304	125-2041-96	RT1N436M
Q305	190-2071-00	2SA2071
Q306	125-2041-96	RT1N436M
Q401	125-9025-90	HN1C01FU-TE85N
Q501	125-2041-92	RT1N141M
Q502	125-2041-92	RT1N141M
Q503	190-1602-00	2SA1602A
Q504	192-4155-51	2SC4155A S,T
Q505	192-4155-51	2SC4155A S,T
Q506	192-4155-51	2SC4155A S,T
Q601	190-1298-00	2SA1298
Q602	125-2041-96	RT1N436M
Q603	101-1143-00	2SB1143
Q604	190-2071-00	2SA2071
Q605	125-2041-96	RT1N436M
Q606	125-0034-96	RT1P436M
Q607	125-0034-96	RT1P436M
Q608	190-2071-00	2SA2071
Q609	125-2041-96	RT1N436M
Q610	190-1298-00	2SA1298
Q611	125-2041-92	RT1N141M
Q612	101-1143-00	2SB1143
Q613	190-1736-00	2SA1736
Q614	125-2041-96	RT1N436M
Q615	190-1736-00	2SA1736
Q616	125-2041-96	RT1N436M
Q617	192-4155-51	2SC4155A S,T
Q618	190-1602-00	2SA1602A
Q619	192-4155-51	2SC4155A S,T
Q620	190-1298-00	2SA1298
Q621	125-2041-93	RT1N241M
Q622	102-3420-50	2SC3420GR,BL
Q623	198-0302-50	2SK302 Y,GR
Q624	190-1602-00	2SA1602A
Q625	125-2041-93	RT1N241M
Q626	125-2041-93	RT1N241M
Q627	125-2041-93	RT1N241M
Q628	125-2041-93	RT1N241M
Q629	190-1736-00	2SA1736
Q630	125-2041-96	RT1N436M
Q631	125-2041-93	RT1N241M
Q632	125-0034-96	RT1P436M
Q633	192-4155-51	2SC4155A S,T
R101	119-1041-15	1/10W 100k ohm
R102	119-1011-15	1/10W 100 ohm
R104	119-0000-05	1/10W 0 ohm JW
R105	119-0000-05	1/10W 0 ohm JW

REF No.	PART No.	DESCRIPTION
R106	119-1031-15	1/10W 10k ohm
R107	119-1031-15	1/10W 10k ohm
R108	119-1031-15	1/10W 10k ohm
R109	119-1021-15	1/10W 1k ohm
R110	119-1031-15	1/10W 10k ohm
R111	119-1021-15	1/10W 1k ohm
R112	119-2231-15	1/10W 22k ohm
R113	119-2231-15	1/10W 22k ohm
R114	119-1011-15	1/10W 100 ohm
R115	119-4731-15	1/10W 47k ohm(B-A)
R115	032-0140-89	1/10W 47k ohm F (K-A,B,C)
R116	119-1831-15	1/10W 18k ohm(B-A)
R116	032-0140-80	1/10W 18k ohm F (K-A,B,C)
R117	119-4731-15	1/10W 47k ohm(B-A)
R117	032-0140-89	1/10W 47k ohm F (K-A,B,C)
R118	119-1831-15	1/10W 18k ohm(B-A)
R118	032-0140-80	1/10W 18k ohm F (K-A,B,C)
R119	119-4731-15	1/10W 47k ohm(B-A)
R119	032-0140-89	1/10W 47k ohm F (K-A,B,C)
R120	119-1831-15	1/10W 18k ohm(B-A)
R120	032-0140-80	1/10W 18k ohm F (K-A,B,C)
R121	119-4731-15	1/10W 47k ohm(B-A)
R121	032-0140-89	1/10W 47k ohm F (K-A,B,C)
R122	119-1831-15	1/10W 18k ohm(B-A)
R122	032-0140-80	1/10W 18k ohm F (K-A,B,C)
R123	119-1031-15	1/10W 10k ohm(B-A)
R124	119-1031-15	1/10W 10k ohm(B-A)
R125	119-4721-15	1/10W 4.7k ohm
R126	119-1031-15	1/10W 10k ohm(B-A)
R127	119-4721-15	1/10W 4.7k ohm (B-A)
R127	119-0000-15	1/10W 0 ohm JW (K-A,B,C)
R128	119-1021-15	1/10W 1k ohm
R129	119-1221-15	1/10W 1.2k ohm
R130	119-1041-15	1/10W 100k ohm
R131	119-1241-15	1/10W 120k ohm
R132	119-1031-15	1/10W 10k ohm
R133	119-2231-15	1/10W 22k ohm
R134	119-1031-15	1/10W 10k ohm
R135	119-2231-15	1/10W 22k ohm
R136	119-2231-15	1/10W 22k ohm
R137	119-1031-15	1/10W 10k ohm
R138	119-2231-15	1/10W 22k ohm
R139	119-1031-15	1/10W 10k ohm
R140	119-1001-15	1/10W 10 ohm
R141	119-1031-15	1/10W 10k ohm
R142	119-8221-15	1/10W 8.2k ohm
R143	119-8221-15	1/10W 8.2k ohm
R144	119-1031-15	1/10W 10k ohm
R145	032-0140-89	1/10W 47k ohm F
R146	032-0140-89	1/10W 47k ohm F
R147	032-0140-89	1/10W 47k ohm F
R148	032-0140-89	1/10W 47k ohm F
R149	032-0140-89	1/10W 47k ohm F
R150	032-0140-89	1/10W 47k ohm F
R151	032-0140-89	1/10W 47k ohm F
R152	032-0140-89	1/10W 47k ohm F
R153	119-1031-15	1/10W 10k ohm
R154	119-8221-15	1/10W 8.2k ohm (B-A)
R155	119-1011-15	1/10W 100 ohm
R156	119-1011-15	1/10W 100 ohm
R157	119-1011-15	1/10W 100 ohm
R158	119-4721-15	1/10W 4.7k ohm
R159	119-4721-15	1/10W 4.7k ohm

REF No.	PART No.	DESCRIPTION
R161	119-1001-15	1/10W 10 ohm
R162	119-1011-15	1/10W 100 ohm
R163	119-4721-15	1/10W 4.7k ohm
R164	119-1011-15	1/10W 100 ohm
R165	119-1011-15	1/10W 100 ohm
R166	119-1031-15	1/10W 10k ohm
R167	119-1031-15	1/10W 10k ohm
R168	119-1031-15	1/10W 10k ohm
R169	119-1011-15	1/10W 100 ohm
R170	119-4721-15	1/10W 4.7k ohm
R171	119-1031-15	1/10W 10k ohm
R172	119-1011-15	1/10W 100 ohm
R173	119-1011-15	1/10W 100 ohm
R174	119-1031-15	1/10W 10k ohm
R175	119-1011-15	1/10W 100 ohm
R176	119-1011-15	1/10W 100 ohm
R177	119-1031-15	1/10W 10k ohm
R178	119-1021-15	1/10W 1k ohm
R180	119-1011-15	1/10W 100 ohm
R181	119-1011-15	1/10W 100 ohm
R182	119-1011-15	1/10W 100 ohm
R183	119-1011-15	1/10W 100 ohm
R201	119-1021-15	1/10W 1k ohm
R202	119-1011-15	1/10W 100 ohm
R203	119-2711-15	1/10W 270 ohm
R204	119-2711-15	1/10W 270 ohm
R205	119-2711-15	1/10W 270 ohm
R206	119-1011-15	1/10W 100 ohm
R207	119-2711-15	1/10W 270 ohm
R208	119-2711-15	1/10W 270 ohm
R209	119-2711-15	1/10W 270 ohm
R210	116-6801-15	1/4W 68 ohm
R211	119-1031-15	1/10W 10k ohm
R212	119-1031-15	1/10W 10k ohm
R213	119-4731-15	1/10W 47k ohm
R214	119-1831-15	1/10W 18k ohm
R215	119-1031-15	1/10W 10k ohm
R216	119-1031-15	1/10W 10k ohm
R217	119-1031-15	1/10W 10k ohm
R218	119-4731-15	1/10W 47k ohm
R219	119-1831-15	1/10W 18k ohm
R220	119-1031-15	1/10W 10k ohm
R221	119-1031-15	1/10W 10k ohm
R222	119-1031-15	1/10W 10k ohm
R223	119-4731-15	1/10W 47k ohm
R224	119-1831-15	1/10W 18k ohm
R225	119-1031-15	1/10W 10k ohm
R226	119-1031-15	1/10W 10k ohm
R227	119-1031-15	1/10W 10k ohm
R228	119-4731-15	1/10W 47k ohm
R229	119-1831-15	1/10W 18k ohm
R230	119-1031-15	1/10W 10k ohm
R231	119-1031-15	1/10W 10k ohm
R232	119-1031-15	1/10W 10k ohm
R233	119-4731-15	1/10W 47k ohm
R234	119-1231-15	1/10W 12k ohm
R235	119-1031-15	1/10W 10k ohm
R236	119-1031-15	1/10W 10k ohm
R237	119-1031-15	1/10W 10k ohm
R238	119-4731-15	1/10W 47k ohm
R239	119-1231-15	1/10W 12k ohm
R240	119-1031-15	1/10W 10k ohm
R241	119-1031-15	1/10W 10k ohm
R242	119-1031-15	1/10W 10k ohm
R243	119-4731-15	1/10W 47k ohm
R244	119-1231-15	1/10W 12k ohm
R245	119-1031-15	1/10W 10k ohm
R246	119-1031-15	1/10W 10k ohm
R247	119-1031-15	1/10W 10k ohm
R248	119-4731-15	1/10W 47k ohm
R249	119-1231-15	1/10W 12k ohm
R250	119-1031-15	1/10W 10k ohm
R251	119-2231-15	1/10W 22k ohm
R252	119-3311-15	1/10W 330 ohm

REF No.	PART No.	DESCRIPTION
R253	119-1021-15	1/10W 1k ohm
R254	119-1041-15	1/10W 100k ohm
R255	119-2231-15	1/10W 22k ohm
R256	119-3311-15	1/10W 330 ohm
R257	119-1021-15	1/10W 1k ohm
R258	119-1041-15	1/10W 100k ohm
R259	119-2231-15	1/10W 22k ohm
R260	119-3311-15	1/10W 330 ohm
R261	119-1021-15	1/10W 1k ohm
R262	119-1041-15	1/10W 100k ohm
R263	119-2231-15	1/10W 22k ohm
R264	119-3311-15	1/10W 330 ohm
R265	119-1021-15	1/10W 1k ohm
R266	119-1041-15	1/10W 100k ohm
R267	119-2231-15	1/10W 22k ohm
R268	119-3311-15	1/10W 330 ohm
R269	119-1021-15	1/10W 1k ohm
R270	119-1041-15	1/10W 100k ohm
R271	119-2231-15	1/10W 22k ohm
R272	119-3311-15	1/10W 330 ohm
R273	119-1021-15	1/10W 1k ohm
R274	119-1041-15	1/10W 100k ohm
R275	119-2231-15	1/10W 22k ohm
R276	119-3311-15	1/10W 330 ohm
R277	119-1021-15	1/10W 1k ohm
R278	119-1041-15	1/10W 100k ohm
R279	119-2231-15	1/10W 22k ohm
R280	119-3311-15	1/10W 330 ohm
R281	119-1021-15	1/10W 1k ohm
R282	119-1041-15	1/10W 100k ohm
R291	119-1021-15	1/10W 1k ohm
R292	119-8221-15	1/10W 8.2k ohm
R293	119-1021-15	1/10W 1k ohm
R294	119-8221-15	1/10W 8.2k ohm
R295	119-1021-15	1/10W 1k ohm
R296	119-2231-15	1/10W 22k ohm
R297	119-1021-15	1/10W 1k ohm
R298	119-2231-15	1/10W 22k ohm
R302	119-2211-15	1/10W 220 ohm
R303	119-1031-15	1/10W 10k ohm
R304	119-3901-15	1/10W 39 ohm
R305	119-3901-15	1/10W 39 ohm
R306	119-1031-15	1/10W 10k ohm
R307	119-3901-15	1/10W 39 ohm
R308	119-3901-15	1/10W 39 ohm
R309	119-3901-15	1/10W 39 ohm
R310	119-3901-15	1/10W 39 ohm
R311	032-0140-66	1/10W 220 ohm F
R312	032-0140-98	1/10W 330 ohm F
R313	032-0140-13	1/10W 33 ohm F
R314	116-2211-15	1/4W 220 ohm
R315	032-0140-68	1/10W 680 ohm F
R316	032-0140-11	1/10W 300 ohm F
R317	119-0000-05	1/10W 0 ohm JW
R318	119-1031-15	1/10W 10k ohm
R319	119-4731-15	1/10W 47k ohm
R320	119-7501-15	1/10W 75 ohm
R321	119-7501-15	1/10W 75 ohm
R322	119-7501-15	1/10W 75 ohm
R323	119-2221-15	1/10W 2.2k ohm
R324	119-4721-15	1/10W 4.7k ohm
R325	119-2221-15	1/10W 2.2k ohm
R326	119-1011-15	1/10W 100 ohm
R327	119-4721-15	1/10W 4.7k ohm
R328	119-1031-15	1/10W 10k ohm
R329	119-1031-15	1/10W 10k ohm
R330	119-3901-15	1/10W 39 ohm
R331	119-7501-15	1/10W 75 ohm
R332	119-4731-15	1/10W 47k ohm
R333	119-1031-15	1/10W 10k ohm
R334	116-3311-15	1/4W 330 ohm
R335	116-3311-15	1/4W 330 ohm
R337	119-0000-05	1/10W 0 ohm JW
R401	119-4731-15	1/10W 47k ohm

REF No.	PART No.	DESCRIPTION
R402	119-1021-15	1/10W 1k ohm
R403	119-2021-15	1/10W 2k ohm
R404	119-4731-15	1/10W 47k ohm
R406	119-4731-15	1/10W 47k ohm
R407	119-4731-15	1/10W 47k ohm
R414	119-2721-15	1/10W 2.7k ohm
R421	119-1031-15	1/10W 10k ohm
R423	119-1051-15	1/10W 1M ohm
R426	119-2211-15	1/10W 220 ohm
R427	119-3311-15	1/10W 330 ohm
R428	119-2231-15	1/10W 22k ohm
R429	119-2231-15	1/10W 22k ohm
R430	119-2231-15	1/10W 22k ohm
R431	119-2231-15	1/10W 22k ohm
R433	119-3311-15	1/10W 330 ohm
R435	119-4731-15	1/10W 47k ohm
R436	119-4731-15	1/10W 47k ohm
R437	119-3311-15	1/10W 330 ohm
R438	032-0140-72	1/10W 470 ohm F
R439	032-0140-23	1/10W 68 ohm F
R440	119-2211-15	1/10W 220 ohm
R441	119-2211-15	1/10W 220 ohm
R442	119-4731-15	1/10W 47k ohm
R445	032-0140-23	1/10W 68 ohm F
R446	119-4731-15	1/10W 47k ohm
R450	119-1031-15	1/10W 10k ohm
R451	119-1031-15	1/10W 10k ohm
R456	119-4731-15	1/10W 47k ohm
R463	119-4731-15	1/10W 47k ohm
R464	119-3311-15	1/10W 330 ohm
R465	119-0000-05	1/10W 0 ohm JW
R466	119-1011-15	1/10W 100 ohm
R467	119-1021-15	1/10W 1k ohm
R468	119-2221-15	1/10W 2.2k ohm
R469	119-4731-15	1/10W 47k ohm
R471	119-1011-15	1/10W 100 ohm
R473	032-0140-12	1/10W 75 ohm F
R474	032-0140-12	1/10W 75 ohm F
R475	032-0140-12	1/10W 75 ohm F
R478	119-7501-15	1/10W 75 ohm
R479	119-7501-15	1/10W 75 ohm
R480	119-7501-15	1/10W 75 ohm
R481	119-7501-15	1/10W 75 ohm
R482	119-1011-15	1/10W 100 ohm
R483	119-1011-15	1/10W 100 ohm
R484	119-4731-15	1/10W 47k ohm
R486	119-1011-15	1/10W 100 ohm
R487	119-2201-15	1/10W 22 ohm
R489	119-1011-15	1/10W 100 ohm
R504	119-4721-15	1/10W 4.7k ohm
R505	119-4721-15	1/10W 4.7k ohm
R506	119-4721-15	1/10W 4.7k ohm
R507	119-4721-15	1/10W 4.7k ohm
R508	119-1021-15	1/10W 1k ohm
R509	119-1041-15	1/10W 100k ohm
R510	119-1031-15	1/10W 10k ohm
R511	119-1031-15	1/10W 10k ohm
R512	119-4731-15	1/10W 47k ohm
R513	119-1041-15	1/10W 100k ohm
R514	119-4711-15	1/10W 470 ohm
R515	119-1031-15	1/10W 10k ohm
R516	119-2231-15	1/10W 22k ohm
R518	119-1031-15	1/10W 10k ohm
R519	119-1031-15	1/10W 10k ohm
R520	119-1031-15	1/10W 10k ohm
R521	119-1021-15	1/10W 1k ohm
R522	119-1031-15	1/10W 10k ohm
R523	119-1031-15	1/10W 10k ohm
R524	119-1021-15	1/10W 1k ohm
R525	119-1041-15	1/10W 100k ohm
R526	119-1031-15	1/10W 10k ohm
R527	119-4721-15	1/10W 4.7k ohm
R528	119-1031-15	1/10W 10k ohm
R529	119-1031-15	1/10W 10k ohm

REF No.	PART No.	DESCRIPTION
R530	119-1031-15	1/10W 10k ohm
R531	119-1031-15	1/10W 10k ohm (B-A,K-B)
R532	119-1031-15	1/10W 10k ohm (K-A,C)
R533	119-1031-15	1/10W 10k ohm
R535	119-1031-15	1/10W 10k ohm (K-A,C)
R536	119-1031-15	1/10W 10k ohm (B-A,K-B)
R537	119-1031-15	1/10W 10k ohm
R538	119-1011-15	1/10W 100 ohm
R539	119-1021-15	1/10W 1k ohm
R540	119-1021-15	1/10W 1k ohm
R541	119-1031-15	1/10W 10k ohm
R543	119-4731-15	1/10W 47k ohm
R544	119-2231-15	1/10W 22k ohm
R545	119-1031-15	1/10W 10k ohm
R546	119-1031-15	1/10W 10k ohm
R547	119-1031-15	1/10W 10k ohm
R548	119-1031-15	1/10W 10k ohm
R549	119-1031-15	1/10W 10k ohm
R550	119-1031-15	1/10W 10k ohm
R551	119-1031-15	1/10W 10k ohm
R552	119-1031-15	1/10W 10k ohm
R553	119-1031-15	1/10W 10k ohm
R554	119-4741-15	1/10W 470k ohm
R555	032-0140-03	1/10W 220k ohm F
R556	032-0140-16	1/10W 180k ohm F
R557	119-1041-15	1/10W 100k ohm
R558	119-1041-15	1/10W 100k ohm
R559	119-1031-15	1/10W 10k ohm
R560	119-1041-15	1/10W 100k ohm
R561	119-1031-15	1/10W 10k ohm
R562	119-1041-15	1/10W 100k ohm
R563	032-0140-66	1/10W 220 ohm F
R564	032-0140-67	1/10W 3.3k ohm F
R565	119-1051-15	1/10W 1M ohm
R566	032-0140-03	1/10W 220k ohm F
R567	032-0140-52	1/10W 33k ohm F
R568	032-0140-56	1/10W 12k ohm F
R569	119-1041-15	1/10W 100k ohm

REF No.	PART No.	DESCRIPTION
R570	119-1031-15	1/10W 10k ohm
R571	119-1031-15	1/10W 10k ohm
R572	119-1011-15	1/10W 100 ohm
R573	119-1011-15	1/10W 100 ohm
R605	119-1031-15	1/10W 10k ohm
R606	119-2731-15	1/10W 27k ohm
R608	119-1031-15	1/10W 10k ohm
R609	116-1221-15	1/4W 1.2k ohm
R610	119-1001-15	1/10W 10 ohm
R611	119-1031-15	1/10W 10k ohm
R612	116-3311-15	1/4W 330 ohm
R613	116-3311-15	1/4W 330 ohm
R614	119-1031-15	1/10W 10k ohm
R615	119-1031-15	1/10W 10k ohm
R616	032-0140-50	1/10W 10k ohm F
R617	119-1031-15	1/10W 10k ohm
R618	116-3311-15	1/4W 330 ohm
R619	116-3311-15	1/4W 330 ohm
R620	119-1031-15	1/10W 10k ohm
R621	119-5611-15	1/10W 560 ohm
R622	119-2201-15	1/10W 22 ohm
R623	119-1031-15	1/10W 10k ohm
R624	032-0176-06	1/3W 220 ohm J
R625	116-1521-15	1/4W 1.5k ohm
R626	119-1031-15	1/10W 10k ohm
R627	032-0176-06	1/3W 220 ohm J
R628	119-2231-15	1/10W 22k ohm
R629	116-1591-15	1/4W 1.5 ohm
R630	116-1591-15	1/4W 1.5 ohm
R631	116-1591-15	1/4W 1.5 ohm
R632	116-1591-15	1/4W 1.5 ohm
R633	116-1591-15	1/4W 1.5 ohm
R634	116-1591-15	1/4W 1.5 ohm
R635	119-3321-15	1/10W 3.3k ohm
R636	119-1031-15	1/10W 10k ohm
R637	119-3321-15	1/10W 3.3k ohm
R638	116-1591-15	1/4W 1.5 ohm
R639	032-0176-06	1/3W 220 ohm J
R640	032-0176-06	1/3W 220 ohm J
R641	119-1031-15	1/10W 10k ohm
R642	119-4721-15	1/10W 4.7k ohm
R643	119-4721-15	1/10W 4.7k ohm

REF No.	PART No.	DESCRIPTION
R644	119-4731-15	1/10W 47k ohm
R645	119-1011-15	1/10W 100 ohm
R646	119-1031-15	1/10W 10k ohm
R647	119-4721-15	1/10W 4.7k ohm
R648	032-0140-21	1/10W 549k ohm F
R649	119-4711-15	1/10W 470 ohm
R650	119-1021-15	1/10W 1k ohm
R651	119-1021-15	1/10W 1k ohm
R652	119-1031-15	1/10W 10k ohm
R653	119-1031-15	1/10W 10k ohm
R654	119-1021-15	1/10W 1k ohm
R655	119-1031-15	1/10W 10k ohm
R656	032-0176-06	1/3W 220 ohm J
R657	032-0176-06	1/3W 220 ohm J
R659	119-3321-15	1/10W 3.3k ohm
R660	116-6801-15	1/4W 68 ohm
R661	119-1001-15	1/10W 10 ohm
R662	119-3321-15	1/10W 3.3k ohm
R663	119-2231-15	1/10W 22k ohm
R664	032-0145-68	1/2W 1k ohm J
R681	119-1031-15	1/10W 10k ohm
R682	119-1031-15	1/10W 10k ohm
R683	119-1031-15	1/10W 10k ohm
R684	119-1031-15	1/10W 10k ohm
R685	119-2231-15	1/10W 22k ohm
R686	119-2231-15	1/10W 22k ohm
R687	119-2231-15	1/10W 22k ohm
R688	119-2231-15	1/10W 22k ohm
SUP101	060-0122-10	DSP-201M-S00B
TH501	002-0315-00	TN10-3U153JT
TM301	073-0768-90	TERMINAL
TM601	073-0768-90	TERMINAL
VR401	012-6009-53	2.2k ohm B VR
VR451	012-6009-53	2.2k ohm B VR
X101	061-3537-90	41.6MHz
X401	061-3554-90	9.5979MHz
X501	060-1541-90	3.14MHz
X502	061-3522-90	32.768KHz
X503	060-8045-00	PKLCS1212E4001-R
PWB	039-3054-00	PWB(WITHOUT COMPONENT)

Sub PWB(B2) section

REF No.	PART No.	DESCRIPTION
C501	163-1073-35	16V 100uF
C502	043-0561-90	0.1uF
C503	043-0561-90	0.1uF
C551	042-0643-50	35V 22uF LOW-SR
C552	042-0630-50	16V 100uF
C553	042-0643-57	16V 220uF
C554	042-0630-50	16V 100uF
C555	042-0643-50	35V 22uF LOW-SR
C556	168-1042-78	16V 0.1uF
C557	042-0643-51	16V 100uF LOW-SR
C558	042-0560-58	16V 10uF
C559	042-0643-55	35V 4.7uF
C560	168-1022-55	1000pF K
C561	168-2222-55	2200pF K
C562	042-0643-50	35V 22uF LOW-SR
C563	042-0630-50	16V 100uF
C564	042-0630-50	16V 100uF
C565	042-0643-50	35V 22uF LOW-SR
C566	042-0643-50	35V 22uF LOW-SR
C567	042-0643-50	35V 22uF LOW-SR
C575	043-0510-51	25V 10uF
C576	042-0643-56	16V 470uF M
C577	178-1052-78	1uF
C578	168-1042-78	16V 0.1uF
C579	168-1042-78	16V 0.1uF
C580	168-4732-78	0.047uF K
C581	166-1021-50	1000pF CH
C582	168-1042-78	16V 0.1uF

REF No.	PART No.	DESCRIPTION
C583	168-1022-55	1000pF K
C584	166-1511-50	150pF CH
C585	168-1042-78	16V 0.1uF
C586	168-2232-55	0.022uF K
C587	042-0643-52	6.3V 1000uF
C588	178-1052-78	1uF
C589	178-1052-78	1uF
C590	042-0643-52	6.3V 1000uF
C591	042-0643-51	16V 100uF LOW-SR
D501	001-0529-32	MA8056-M
D502	001-0529-42	MA8075-H
D552	001-0516-90	MA111
D553	001-0516-90	MA111
D554	001-2628-90	RB160M-40
D555	001-0516-90	MA111
D556	001-0516-90	MA111
D575	001-0608-90	D1FS4
D576	001-0507-90	DAP202K
IC501	051-1014-00	TA7291P
IC502	051-1014-00	TA7291P
IC552	051-3913-90	NJM2368E
IC576	051-3924-90	MD1424R
J502	074-2225-62	12P
J503	074-2001-64	14P
J551	074-0881-17	17P
L553	010-3057-90	100uH
L554	010-3057-90	100uH
L555	010-3406-74	100uH J

REF No.	PART No.	DESCRIPTION
L556	010-3406-74	100uH J
L557	010-3406-74	100uH J
L558	010-3406-74	100uH J
L576	010-3404-53	33uH
L579	010-3041-90	10uH
Q501	125-2032-92	RN1302
Q552	192-2873-00	2SC2873
Q575	125-2032-93	RN1303
Q576	190-1586-00	2SA1586
Q577	125-2032-93	RN1303
R501	119-4711-15	1/10W 470 ohm
R502	119-0000-05	1/10W 0 ohm JW
R555	119-1001-15	1/10W 10 ohm
R556	119-1841-15	1/10W 180k ohm
R557	119-6841-15	1/10W 680k ohm
R558	119-3931-15	1/10W 39k ohm
R559	119-3311-15	1/10W 330 ohm
R560	119-6841-15	1/10W 680k ohm
R561	119-2231-15	1/10W 22k ohm
R562	119-2221-15	1/10W 2.2k ohm
R575	119-1031-15	1/10W 10k ohm
R576	119-1031-15	1/10W 10k ohm
R577	119-1031-15	1/10W 10k ohm
R578	119-5631-15	1/10W 56k ohm
R579	119-1051-15	1/10W 1M ohm
R580	119-1041-15	1/10W 100k ohm
R581	119-1031-15	1/10W 10k ohm
R582	119-3301-15	1/10W 33 ohm

REF No.	PART No.	DESCRIPTION
R583	119-1001-15	1/10W 10 ohm
R584	032-0140-53	1/10W 2.2k ohm F
R585	032-0164-50	0.1ohm F
R586	032-0164-50	0.1ohm F
R587	119-1031-15	1/10W 10k ohm

REF No.	PART No.	DESCRIPTION
R588	032-0140-56	1/10W 12k ohm F
R589	032-0164-50	0.1ohm F
R590	032-0164-50	0.1ohm F
R591	032-0164-50	0.1ohm F
R592	032-0164-50	0.1ohm F

REF No.	PART No.	DESCRIPTION
R598	119-0000-05	1/10W 0 ohm JW
T551	007-1168-90	TR11-A-S
VR551	012-6009-52	1k ohm B VR
PWB	039-2862-00	PWB(WITHOUT COMPONENT)

LCD PWB(B3) section

REF No.	PART No.	DESCRIPTION
C701	043-0561-90	0.1uF
C703	168-1042-78	16V 0.1uF
C704	042-1727-90	16V 33uF TAN
C705	168-1042-78	16V 0.1uF
C706	042-1727-90	16V 33uF TAN
C707	168-4712-55	470pF K
C708	168-1042-78	16V 0.1uF
C709	168-1042-78	16V 0.1uF
C710	168-1022-55	1000pF K
C711	168-1022-55	1000pF K
C712	168-1022-55	1000pF K
C713	168-1022-55	1000pF K
C714	168-1045-56	0.1uF Z
C715	168-1042-78	16V 0.1uF
C716	042-1727-90	16V 33uF TAN
C801	178-1055-79	1uF
C802	178-1055-79	1uF
C803	178-1055-79	1uF
C804	178-1055-79	1uF
C805	168-1045-56	0.1uF Z
C806	168-1045-56	0.1uF Z
C807	042-0636-50	6.3V 100uF
C808	178-1055-79	1uF
C809	166-5601-50	56pF CH
C810	168-2232-55	0.022uF K
C811	178-1055-79	1uF
C812	178-1055-79	1uF
C813	042-0423-20	10V 10uF
C814	042-0397-55	6.3V 3.3uF TAN
C815	168-1032-55	0.01uF K
C816	168-1032-55	0.01uF K
C817	168-1032-55	0.01uF K
C818	168-1032-55	0.01uF K
C819	168-1032-55	0.01uF K
C820	168-1032-55	0.01uF K
C821	042-1727-90	16V 33uF TAN
C822	043-0504-50	10V 4.7uF
C823	166-1201-50	12pF CH
C824	166-8211-50	820pF
C825	166-2201-50	22pF CH
C826	166-6811-50	680pF
C827	166-5601-50	56pF CH
C828	168-1032-55	0.01uF K
C829	168-1045-56	0.1uF Z
C830	168-1032-55	0.01uF K
C831	168-4732-78	0.047uF K
C832	168-1032-55	0.01uF K
C833	168-1032-55	0.01uF K
C834	168-1032-55	0.01uF K
C835	166-8201-50	82pF CH
C836	168-1032-55	0.01uF K
C837	168-1052-78	1uF
C838	168-1032-55	0.01uF K
C839	168-1032-55	0.01uF K
C840	178-1055-79	1uF
C841	168-1052-78	1uF
C842	168-1052-78	1uF
C843	168-1032-55	0.01uF K
C844	042-1727-90	16V 33uF TAN
C845	168-1052-78	1uF
C846	042-0397-53	25V 0.47uF TAN
C847	168-1032-55	0.01uF K
C848	168-1045-56	0.1uF Z
C850	166-2096-50	2pF CK
C851	168-1045-56	0.1uF Z

REF No.	PART No.	DESCRIPTION
C852	042-0416-54	16V 10uF M TAN
C853	168-1032-55	0.01uF K
C854	042-0416-54	16V 10uF M TAN
C855	178-1055-79	1uF
C856	178-1055-79	1uF
C857	168-1032-55	0.01uF K
C858	042-0416-54	16V 10uF M TAN
C859	178-1055-79	1uF
C860	166-1021-50	1000pF CH
C901	168-1032-55	0.01uF K
C902	042-0416-54	16V 10uF M TAN
C903	168-1045-56	0.1uF Z
C904	166-1007-50	10pF CH
C905	166-4711-50	470pF CH
C906	168-1045-56	0.1uF Z
C907	168-1045-56	0.1uF Z
C908	168-1045-56	0.1uF Z
C909	168-6832-78	0.068uF K
C910	168-1032-55	0.01uF K
C911	168-1032-55	0.01uF K
C912	168-1032-55	0.01uF K
C913	168-1032-55	0.01uF K
C914	168-1032-55	0.01uF K
C915	168-1045-56	0.1uF Z
C916	042-0416-57	10V 47uF M TAN
C917	168-1032-55	0.01uF K
C918	168-1032-55	0.01uF K
C919	168-1032-55	0.01uF K
C920	166-1801-50	18pF CH
C921	168-1032-55	0.01uF K
C922	168-1032-55	0.01uF K
C923	168-1045-56	0.1uF Z
C924	168-1045-56	0.1uF Z
C925	042-0416-57	10V 47uF M TAN
C926	042-1727-90	16V 33uF TAN
C927	168-2242-58	0.22uF B
C928	168-2242-58	0.22uF B
C929	168-1045-56	0.1uF Z
C930	168-1045-56	0.1uF Z
C931	042-0416-57	10V 47uF M TAN
C932	042-1727-90	16V 33uF TAN
C933	178-2255-79	2.2uF
C934	168-1032-55	0.01uF K
C935	166-1811-50	180pF CH
C936	168-4722-55	4700pF K
C937	168-2232-55	0.022uF K
C938	178-2255-79	2.2uF
C939	168-2232-55	0.022uF K
C940	168-1052-78	1uF
C941	168-1045-56	0.1uF Z
C942	168-1045-56	0.1uF Z
C943	168-1042-78	16V 0.1uF
C944	166-6811-50	680pF
C945	168-1045-56	0.1uF Z
C946	168-1045-56	0.1uF Z
C947	168-1022-55	1000pF K
C948	166-1011-50	100pF CH
C949	166-4701-50	47pF CH
C950	166-2096-50	2pF CK
C951	168-1045-56	0.1uF Z
C952	043-0510-50	16V 22uF
C953	043-0549-50	3KV10PF
C954	168-1032-55	0.01uF K
C958	168-1022-55	1000pF K
C960	168-1032-55	0.01uF K

REF No.	PART No.	DESCRIPTION
C961	042-0636-51	16V 47uF
C962	168-1045-56	0.1uF Z
C963	042-0636-51	16V 47uF
C964	168-1045-56	0.1uF Z
C966	042-1727-90	16V 33uF TAN
C991	168-4712-55	470pF K
C992	168-4712-55	470pF K
C993	168-4712-55	470pF K
C994	168-4712-55	470pF K
C995	168-1022-55	1000pF K
CCT701	050-0140-58	1/32W 470 ohm x4J
CCT703	050-0140-57	1/32W 10k ohm x4J
CCT704	050-0140-63	1/32W 47k ohm x4J
CCT706	050-0140-54	1/32W 1k ohm x4J
CCT707	050-0140-67	1/32W 220 ohm x4J
CCT801	050-0140-58	1/32W 470 ohm x4J
CCT802	050-0140-52	1/32W 100 ohm x4J
CCT901	050-0140-58	1/32W 470 ohm x4J
CCT902	050-0140-52	1/32W 100 ohm x4J
CCT903	050-0140-52	1/32W 100 ohm x4J
D701	001-1305-90	DAN217U-T106
D702	001-1305-90	DAN217U-T106
D703	001-1305-90	DAN217U-T106
D704	001-1305-90	DAN217U-T106
D941	001-4301-29	HZU 5.1B2
D943	001-0516-90	MA111
D944	001-4301-29	HZU 5.1B2
D945	001-3218-90	1SV231
D961	001-0529-29	MA8051-M
D964	001-1315-90	HSM123TL-E
D965	001-1315-90	HSM123TL-E
F701	060-8058-90	ERBSEOR75U
FIL901	060-3118-50	FK2125T25
IC701	052-7066-01	M30102M2-561FP
IC801	051-7256-08	SN74AHCT1G32DCKR
IC802	051-5313-10	IR3Y29BM
IC803	051-7269-08	SN74AHC2G53HDCTR
IC804	051-1292-90	NJM4565M-D
IC901	051-7243-48	SN74AHCT1G08DCKR
IC902	051-1964-18	TC7S14FU
IC903	051-1964-18	TC7S14FU
IC904	051-6443-00	TC200G02AF-0104Z
IC941	051-3025-90	NJM2107F
IC942	125-9023-90	TPCF8402TE85L,F
IC943	125-9023-90	TPCF8402TE85L,F
IC944	051-3925-90	OZ9910ISN-T2
J701	074-2201-85	35P
J702	074-2225-70	20P
J703	074-2001-64	14P
J801	074-2225-95	45P
J901	074-2225-95	45P
J902	074-2215-54	4P
J903	074-2001-80	30P
L701	010-2279-50	4.7uH
L801	010-3407-66	22uH J
L802	010-3407-71	56uH J
L803	010-3200-90	19.8uH +/- 2%
L901	010-3407-68	33uH J
L902	010-3407-62	10uH J
L903	010-3407-62	10uH J
L904	010-3407-62	10uH J
L941	010-3406-59	5.6uH J

REF No.	PART No.	DESCRIPTION
L961	010-3059-90	200 ohm FILTER
P701	076-0478-52	2P
P961	076-0568-00	2P
Q701	125-2026-94	UN521M
Q702	125-2026-94	UN521M
Q703	125-0020-94	UN511M
Q704	125-0020-94	UN511M
Q801	192-3326-00	2SC3326
Q802	125-2026-91	UN5211
Q803	192-4116-00	2SC4116
Q804	125-2026-91	UN5211
Q805	125-0020-91	UN5111
Q806	125-2026-91	UN5211
Q807	190-1738-00	2SA1738
Q808	192-3265-00	2SC3265
Q809	190-1298-00	2SA1298
Q810	190-1298-00	2SA1298
Q811	192-3265-00	2SC3265
Q901	125-2026-90	UN521L
Q902	125-2026-90	UN521L
Q903	125-2026-91	UN5211
Q941	192-4118-00	2SC4118
Q942	125-2032-92	RN1302
Q961	125-0025-92	RN2302
R701	119-2231-15	1/10W 22k ohm
R702	119-2231-15	1/10W 22k ohm
R705	119-4711-15	1/10W 470 ohm
R706	119-4711-15	1/10W 470 ohm
R707	119-6811-15	1/10W 680 ohm
R709	119-1051-15	1/10W 1M ohm
R710	119-3321-15	1/10W 3.3k ohm
R711	119-4731-15	1/10W 47k ohm
R712	119-2211-15	1/10W 220 ohm
R713	119-2211-15	1/10W 220 ohm
R801	119-4721-15	1/10W 4.7k ohm
R802	119-1021-15	1/10W 1k ohm
R803	119-4711-15	1/10W 470 ohm
R804	119-2211-15	1/10W 220 ohm
R805	119-1021-15	1/10W 1k ohm
R806	032-0140-99	1/10W 39k ohm F
R807	119-2221-15	1/10W 2.2k ohm
R808	032-0140-54	1/10W 22k ohm F
R809	032-0140-89	1/10W 47k ohm F
R810	119-2231-15	1/10W 22k ohm
R811	119-3341-15	1/10W 330k ohm
R812	119-5621-15	1/10W 5.6k ohm
R813	119-2231-15	1/10W 22k ohm
R814	119-2231-15	1/10W 22k ohm
R815	119-2431-15	1/10W 24k ohm
R816	119-2731-15	1/10W 27k ohm
R817	032-0140-80	1/10W 18k ohm F
R818	119-3341-15	1/10W 330k ohm
R819	119-1521-15	1/10W 1.5k ohm
R820	119-5611-15	1/10W 560 ohm

REF No.	PART No.	DESCRIPTION
R821	119-5641-15	1/10W 560k ohm
R822	119-1021-15	1/10W 1k ohm
R823	119-3351-15	1/10W 3.3M ohm
R824	119-3931-15	1/10W 39k ohm
R825	119-2731-15	1/10W 27k ohm
R826	119-3931-15	1/10W 39k ohm
R827	119-2731-15	1/10W 27k ohm
R828	119-3931-15	1/10W 39k ohm
R829	119-2231-15	1/10W 22k ohm
R830	119-1051-15	1/10W 1M ohm
R831	119-6821-15	1/10W 6.8k ohm
R832	119-3311-15	1/10W 330 ohm
R833	119-4731-15	1/10W 47k ohm
R834	119-1831-15	1/10W 18k ohm
R835	119-5621-15	1/10W 5.6k ohm
R836	119-1521-15	1/10W 1.5k ohm
R837	032-0140-89	1/10W 47k ohm F
R838	032-0140-99	1/10W 39k ohm F
R839	032-0140-89	1/10W 47k ohm F
R840	032-0140-52	1/10W 33k ohm F
R842	119-6811-15	1/10W 680 ohm
R843	119-1011-15	1/10W 100 ohm
R844	119-5621-15	1/10W 5.6k ohm
R845	119-2221-15	1/10W 2.2k ohm
R846	119-1011-15	1/10W 100 ohm
R847	119-1011-15	1/10W 100 ohm
R848	119-8221-15	1/10W 8.2k ohm
R849	032-0140-89	1/10W 47k ohm F
R850	119-1031-15	1/10W 10k ohm
R853	032-0140-17	1/10W 270k ohm F
R854	119-0000-05	1/10W 0 ohm JW
R855	119-0000-05	1/10W 0 ohm JW
R856	032-0140-89	1/10W 47k ohm F
R859	119-6821-15	1/10W 6.8k ohm
R861	119-5621-15	1/10W 5.6k ohm
R862	119-5621-15	1/10W 5.6k ohm
R863	119-6821-15	1/10W 6.8k ohm
R864	119-1831-15	1/10W 18k ohm
R865	119-1011-15	1/10W 100 ohm
R866	119-1231-15	1/10W 12k ohm
R867	119-4321-15	1/10W 4.3k ohm
R868	119-0000-05	1/10W 0 ohm JW
R901	119-1021-15	1/10W 1k ohm
R902	032-0140-75	1/10W 1.5k ohm F
R903	119-0000-05	1/10W 0 ohm JW (K-A,B,C)
R904	032-0140-14	1/10W 1.2k ohm F
R904	119-1011-15	1/10W 100 ohm (K-A,B,C)
R905	119-6811-15	1/10W 680 ohm
R906	119-1011-15	1/10W 100 ohm
R907	119-1011-15	1/10W 100 ohm
R908	119-1021-15	1/10W 1k ohm
R909	119-1021-15	1/10W 1k ohm

REF No.	PART No.	DESCRIPTION
R910	119-1021-15	1/10W 1k ohm
R911	119-1031-15	1/10W 10k ohm
R912	119-0000-05	1/10W 0 ohm JW
R913	119-0000-05	1/10W 0 ohm JW
R916	119-3301-15	1/10W 33 ohm
R917	119-4711-15	1/10W 470 ohm
R919	119-0000-05	1/10W 0 ohm JW
R941	119-4721-15	1/10W 4.7k ohm
R942	032-0140-55	1/10W 4.7k ohm F
R943	032-0140-79	1/10W 2.7k ohm F
R944	119-4731-15	1/10W 47k ohm
R945	119-6831-15	1/10W 68k ohm
R946	119-1531-15	1/10W 15k ohm
R947	119-1051-15	1/10W 1M ohm
R948	119-6831-15	1/10W 68k ohm
R949	119-3621-15	1/10W 3.6k ohm
R950	119-2031-15	1/10W 20k ohm
R951	119-1531-15	1/10W 15k ohm
R952	119-1821-15	1/10W 1.8k ohm
R953	119-3321-15	1/10W 3.3k ohm
R954	119-1011-15	1/10W 100 ohm
R955	119-3311-15	1/10W 330 ohm
R956	119-3931-15	1/10W 39k ohm
R957	119-1031-15	1/10W 10k ohm
R961	119-1021-15	1/10W 1k ohm
R964	119-1021-15	1/10W 1k ohm
R965	119-1021-15	1/10W 1k ohm
R966	119-1021-15	1/10W 1k ohm
R967	119-1021-15	1/10W 1k ohm
R982	116-6811-15	1/4W 680 ohm
R983	119-8231-15	1/10W 82k ohm
R984	119-1031-15	1/10W 10k ohm
R985	119-3351-15	1/10W 3.3M ohm
R986	119-1041-15	1/10W 100k ohm
R987	119-1051-15	1/10W 1M ohm
R988	032-0140-90	1/10W 560 ohm F
R992	119-6841-15	1/10W 680k ohm
T901	007-1165-00	CIUH7D45 TRANS
VR801	012-6009-58	33k ohm B VR
VR802	012-6009-58	33k ohm B VR
VR803	012-6009-58	33k ohm B VR
VR804	012-6009-57	22k ohm B VR
VR805	012-6009-58	33k ohm B VR
VR806	012-6009-57	22k ohm B VR
VR807	012-6009-53	2.2k ohm B VR
VR901	012-4997-55	4.7k ohm VR(B-A)
VR941	012-6009-56	10k ohm B VR
X701	060-1531-90	CSTCR4M91G53-RO
X801	061-3520-95	3.57945MHz
X802	061-3524-90	4.433618MHz
PWB	039-2863-00	PWB(WITHOUT COMPONENT)


Switch PWB(B4) section

REF No.	PART No.	DESCRIPTION
C1101	178-1055-79	1uF
D1101	001-7097-90	CL194S-WM-D-T
D1102	001-7097-90	CL194S-WM-D-T
D1103	001-7097-90	CL194S-WM-D-T
D1106	001-7097-90	CL194S-WM-D-T
D1107	001-7097-90	CL194S-WM-D-T
D1108	001-7097-90	CL194S-WM-D-T
D1111	001-7097-90	CL194S-WM-D-T
IR1101	060-4017-90	IR RECEIVER
J1101	074-1289-70	20P
P1101	076-2010-03	3P
P1103	076-0708-02	2P
Q1101	125-2017-97	RN1427
Q1102	125-2032-96	RN1306
R1101	119-6811-15	1/10W 680 ohm

REF No.	PART No.	DESCRIPTION
R1102	119-6811-15	1/10W 680 ohm
R1103	119-4711-15	1/10W 470 ohm
R1106	119-3311-15	1/10W 330 ohm
R1107	119-8211-15	1/10W 820 ohm
R1108	119-8211-15	1/10W 820 ohm
R1109	119-4711-15	1/10W 470 ohm
R1112	119-3311-15	1/10W 330 ohm
R1113	119-3311-15	1/10W 330 ohm
R1114	119-1021-15	1/10W 1k ohm
R1115	119-4701-15	1/10W 47 ohm
R1116	119-2221-15	1/10W 2.2k ohm
S1101	013-7411-51	ESE2131BTXN
S1102	013-6513-50	LS9J2M-1UR
S1103	013-6312-50	SKRP-ABE-010
S1104	013-6312-50	SKRP-ABE-010

REF No.	PART No.	DESCRIPTION
S1105	013-6312-50	SKRP-ABE-010
S1106	013-6312-50	SKRP-ABE-010
S1107	013-6312-50	SKRP-ABE-010
S1108	013-6312-50	SKRP-ABE-010
S1109	013-6312-50	SKRP-ABE-010
S1110	013-6312-50	SKRP-ABE-010
S1111	013-6312-50	SKRP-ABE-010
S1112	013-6312-50	SKRP-ABE-010
S1113	013-6312-50	SKRP-ABE-010
S1114	013-6312-50	SKRP-ABE-010
S1115	013-6312-50	SKRP-ABE-010
S1116	013-6312-50	SKRP-ABE-010
S1117	013-6312-50	SKRP-ABE-010
PWB	039-2866-00	PWB(WITHOUT COMPONENT)

EXPLODED VIEW / PARTS LIST

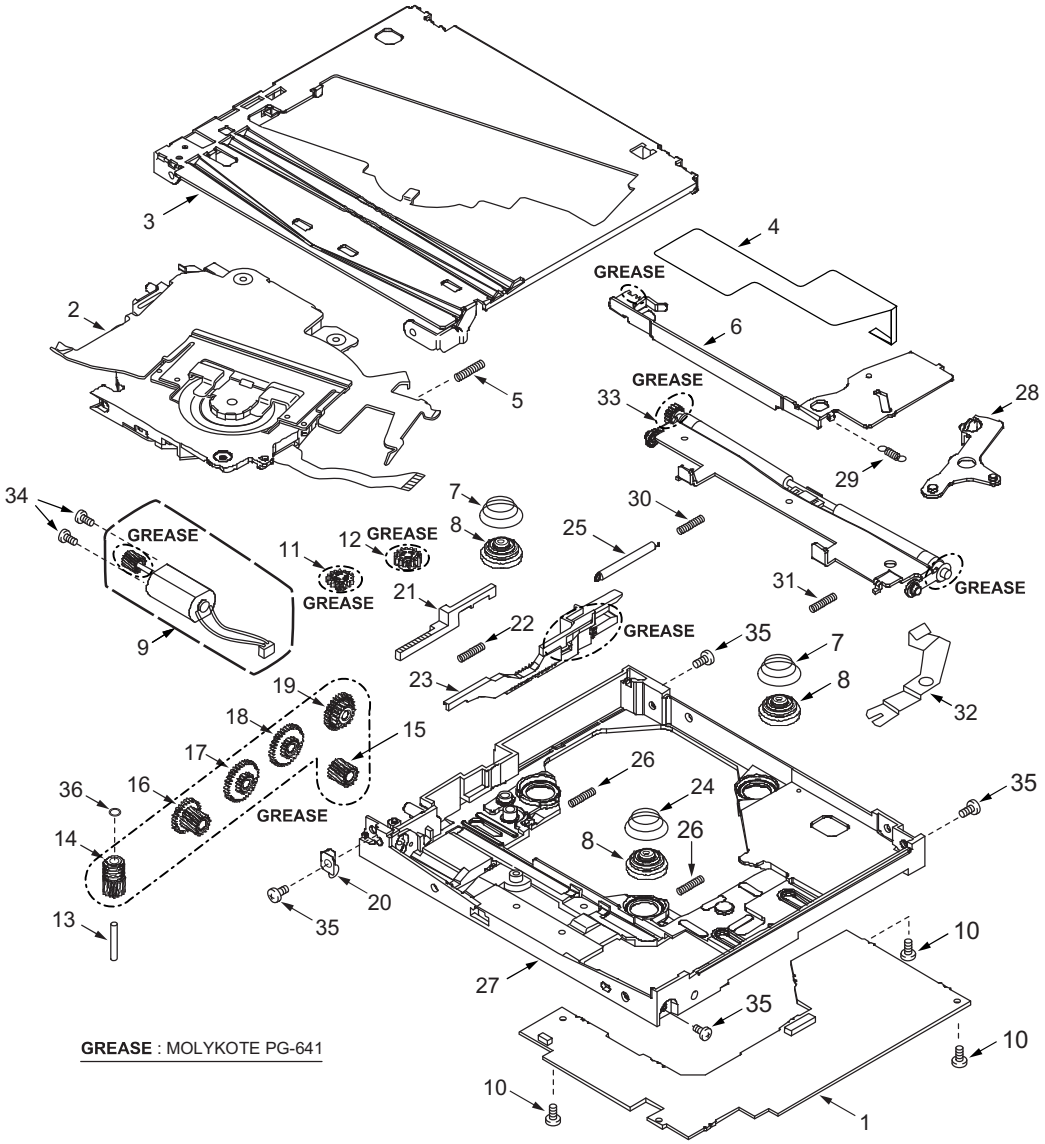

NO.	PART NO.	DESCRIPTION	Q'TY
1	----------	Servo PWB	1
2	658-0247-01	Suspension Assy	1
3	658-0244-16	Upper Chassis	1
4	658-0250-02	Sensor FPC Assy	1
5	658-0237-88	Earth Spring	1
6	658-0239-06	Suspension Lock Lever (L)	1
7	658-0237-90	Suspension Spring	2
8	658-0239-07	Damper	3
9	658-0247-03	Loading Motor Assy	1
10	658-0238-23	Screw	3
11	658-0237-94	Lock Gear (1)	1
12	658-0237-95	Lock Gear (2)	1
13	658-0246-01	Loading Gear Shaft	1
14	658-0246-02	Laoding Gear (1)	1
15	658-0237-98	Laoding Gear (2)	1
16	658-0237-99	Laoding Gear (3)	1
17	658-0238-01	Laoding Gear (4)	1
18	658-0238-02	Laoding Gear (5)	1

NO.	PART NO.	DESCRIPTION	Q'TY
19	658-0238-03	Laoding Gear (6)	1
20	658-0238-04	Worm Gear Housing Spring	1
21	658-0238-05	Clamp Rack	1
22	658-0238-06	Clamp Rack Spring	1
23	658-0238-07	Slide Lever	1
24	658-0238-08	Suspension Spring (F)	1
25	658-0238-09	Slide Lever Spring	1
26	658-0238-10	Offset Spring	2
27	658-0250-03	Main Chassis	1
28	658-0238-12	Suspension Lock Lever (R)	1
29	658-0238-13	Suspension Lock Lever L Spring	1
30	658-0238-15	Feeder Spring (L)	1
31	658-0238-16	Feeder Spring (R)	1
32	658-0238-17	Upper Spring	1
33	658-0244-19	Feeder Arm Assy	1
34	658-0238-21	Screw	2
35	658-0244-20	Screw	4
36	658-0247-04	Load Gear 1 Collar	1

ELECTRICAL PARTS LIST

Servo PWB(BM1) section

REF No.	PART No.	DESCRIPTION
C101	658-0246-12	50V560pF
C102	658-0240-12	0.1uF 10WV
C103	658-0246-13	50V0.001uF
C104	658-0246-13	50V0.001uF
C113	658-0240-12	0.1uF 10WV
C114	658-0240-13	10uF 6.3WV
C115	658-0240-13	10uF 6.3WV
C116	658-0246-13	50V0.001uF
C117	658-0240-13	10uF 6.3WV
C121	658-0246-14	50V6pF
C122	658-0240-13	10uF 6.3WV
C124	658-0240-12	0.1uF 10WV
C125	658-0240-12	0.1uF 10WV
C126	658-0237-28	25V0.027uF
C127	658-0237-27	16V0.047uF
C128	658-0240-12	0.1uF 10WV
C129	658-0246-22	50V100pF
C131	658-0246-12	50V560pF
C132	658-0246-12	50V560pF
C133	658-0240-12	0.1uF 10WV
C134	658-0240-12	0.1uF 10WV
C136	658-0240-12	0.1uF 10WV
C137	658-0240-13	10uF 6.3WV
C141	658-0247-06	16V0.01uF
C142	658-0240-12	0.1uF 10WV
C143	658-0240-12	0.1uF 10WV
C144	658-0240-12	0.1uF 10WV
C145	658-0240-12	0.1uF 10WV
C151	658-0240-12	0.1uF 10WV
C152	658-0249-04	6.3V47uF Tan
C153	658-0240-12	0.1uF 10WV
C154	658-0249-04	6.3V47uF Tan
C201	658-0240-12	0.1uF 10WV
C202	658-0240-12	0.1uF 10WV
C203	658-0240-12	0.1uF 10WV
C204	658-0240-12	0.1uF 10WV
C205	658-0240-12	0.1uF 10WV
C206	658-0246-22	50V100pF
C207	658-0240-13	10uF 6.3WV
C208	658-0240-13	10uF 6.3WV
C211	658-0240-12	0.1uF 10WV
C213	658-0246-22	50V100pF
C214	658-0246-22	50V100pF
C215	658-0247-06	16V0.01uF
C216	658-0247-06	16V0.01uF
C221	658-0246-17	Ceramic,50WV22PF
C222	658-0246-17	Ceramic,50WV22PF
C223	658-0240-12	0.1uF 10WV
C224	658-0240-12	0.1uF 10WV
C225	658-0240-12	0.1uF 10WV
C226	658-0240-12	0.1uF 10WV
C231	658-0247-06	16V0.01uF
C232	658-0240-12	0.1uF 10WV
C234	658-0247-06	16V0.01uF
C235	658-0240-13	10uF 6.3WV
C236	658-0240-12	0.1uF 10WV
C237	658-0247-07	16V0.022uF
C239	658-0247-08	50V47pF
C240	658-0240-12	0.1uF 10WV
C241	658-0240-12	0.1uF 10WV
C242	658-0246-13	50V0.001uF
C243	658-0240-12	0.1uF 10WV
C244	658-0237-34	50V0.0056uF
C245	658-0246-13	50V0.001uF
C246	658-0246-13	50V0.001uF
C247	658-0246-13	50V0.001uF
C248	658-0246-12	50V560pF
C249	658-0246-12	50V560pF
C250	658-0240-12	0.1uF 10WV
C251	658-0246-20	50V0.0022uF
C252	658-0246-21	50V470pF

REF No.	PART No.	DESCRIPTION
C253	658-0240-12	0.1uF 10WV
C261	658-0240-12	0.1uF 10WV
C262	658-0240-12	0.1uF 10WV
C263	658-0240-12	0.1uF 10WV
C264	658-0240-12	0.1uF 10WV
C265	658-0240-12	0.1uF 10WV
C266	658-0240-12	0.1uF 10WV
C271	658-0240-12	0.1uF 10WV
C272	658-0240-12	0.1uF 10WV
C275	658-0240-12	0.1uF 10WV
C311	658-0240-12	0.1uF 10WV
C312	658-0244-07	Ceramic,50WV0.1uF
C313	658-0240-12	0.1uF 10WV
C314	658-0244-07	Ceramic,50WV0.1uF
C315	658-0240-12	0.1uF 10WV
C316	658-0240-12	0.1uF 10WV
C321	658-0240-12	0.1uF 10WV
C322	658-0244-07	Ceramic,50WV0.1uF
C323	658-0240-12	0.1uF 10WV
C324	658-0240-12	0.1uF 10WV
C325	658-0240-12	0.1uF 10WV
C401	658-0246-13	50V0.001uF
C402	658-0246-13	50V0.001uF
C403	658-0246-13	50V0.001uF
C404	658-0246-13	50V0.001uF
C405	658-0240-12	0.1uF 10WV
C406	658-0240-14	47uF 6.3WV
C411	658-0244-07	Ceramic,50WV0.1uF
C412	658-0240-43	10uF 16WV
C413	658-0240-42	1uF 6.3WV
C414	658-0240-14	47uF 6.3WV
C421	658-0244-07	Ceramic,50WV0.1uF
C422	658-0240-14	47uF 6.3WV
C423	658-0240-12	0.1uF 10WV
C431	658-0240-12	0.1uF 10WV
C432	658-0240-12	0.1uF 10WV
C433	658-0240-12	0.1uF 10WV
C441	658-0240-12	0.1uF 10WV
C501	658-0246-22	50V100pF
C502	658-0246-22	50V100pF
C503	658-0246-22	50V100pF
C504	658-0246-22	50V100pF
C505	658-0246-22	50V100pF
C506	658-0246-22	50V100pF
C507	658-0246-22	50V100pF
C508	658-0246-22	50V100pF
C509	658-0246-22	50V100pF
C511	658-0240-13	10uF 6.3WV
C512	658-0240-13	10uF 6.3WV
C513	658-0246-22	50V100pF
C514	658-0240-12	0.1uF 10WV
C515	658-0246-22	50V100pF
C516	658-0240-12	0.1uF 10WV
C517	658-0246-22	50V100pF
C518	658-0240-12	0.1uF 10WV
C521	658-0240-12	0.1uF 10WV
C522	658-0240-13	10uF 6.3WV
C523	658-0240-13	10uF 6.3WV
C524	658-0240-12	0.1uF 10WV
C525	658-0240-12	0.1uF 10WV
C526	658-0240-13	10uF 6.3WV
C527	658-0240-12	0.1uF 10WV
C528	658-0240-12	0.1uF 10WV
C529	658-0240-12	0.1uF 10WV
C530	658-0240-13	10uF 6.3WV
C531	658-0240-13	10uF 6.3WV
C532	658-0240-12	0.1uF 10WV
C534	658-0240-12	0.1uF 10WV
C541	658-0240-13	10uF 6.3WV
C542	658-0240-13	10uF 6.3WV
C543	658-0240-12	0.1uF 10WV

REF No.	PART No.	DESCRIPTION
C544	658-0240-12	0.1uF 10WV
C545	658-0240-12	0.1uF 10WV
C546	658-0240-12	0.1uF 10WV
C547	658-0240-12	0.1uF 10WV
C548	658-0240-12	0.1uF 10WV
C551	658-0240-12	0.1uF 10WV
C552	658-0240-12	0.1uF 10WV
C553	658-0240-12	0.1uF 10WV
C554	658-0240-12	0.1uF 10WV
C555	658-0240-12	0.1uF 10WV
C556	658-0240-12	0.1uF 10WV
C557	658-0246-22	50V100pF
C561	658-0240-12	0.1uF 10WV
C601	658-0240-42	1uF 6.3WV
C602	658-0246-22	50V100pF
C603	658-0246-22	50V100pF
C604	658-0246-22	50V100pF
C605	658-0246-22	50V100pF
C606	658-0246-22	50V100pF
C607	658-0246-22	50V100pF
C608	658-0246-22	50V100pF
C609	658-0246-22	50V100pF
C611	658-0240-42	1uF 6.3WV
C612	658-0246-22	50V100pF
C613	658-0246-22	50V100pF
C614	658-0246-22	50V100pF
C616	658-0246-22	50V100pF
C621	658-0240-12	0.1uF 10WV
C622	658-0246-22	50V100pF
C623	658-0240-12	0.1uF 10WV
C631	658-0240-12	0.1uF 10WV
C641	658-0240-12	0.1uF 10WV
C651	658-0240-12	0.1uF 10WV
C652	658-0240-13	10uF 6.3WV
C653	658-0240-12	0.1uF 10WV
C701	658-0240-44	330PF 50WV
C702	658-0240-44	330PF 50WV
C703	658-0246-23	50WV120PF
C722	658-0240-13	10uF 6.3WV
C723	658-0240-12	0.1uF 10WV
CN101	658-0247-09	Connector 30P
CN201	658-0247-10	Connector 40P
CN301	658-0247-11	Connector 4P
CN302	658-0246-27	Connector 2P
CN303	658-0247-12	Connector 20P
CN401	658-0247-13	Connector 12P
CN701	658-0247-09	Connector 30P
D311	658-0237-19	MA721TX
IC101	658-0237-01	AN8703FH-V
IC201	658-0240-01	MNZS26EDCUB
IC271	658-0246-03	C0JBAA000372
IC275	658-0250-01	C0JBAZ002826
IC311	658-0237-08	C0GBY0000012
IC321	658-0237-09	C0GBH0000006
IC411	658-0246-05	C0CBADC00084
IC421	658-0244-02	YEAM17805FP
IC431	658-0246-06	C0JBAA000356
IC441	658-0246-07	MN13821SJP
IC501	658-0247-05	C1AB00002402
IC561	658-0250-01	C0JBAZ002826
IC601	658-0246-09	C3ABPJ000074
IC621	658-0246-10	C3FBMD000282
IC631	658-0249-05	C0JBAH000127
IC641	658-0249-05	C0JBAH000127
IC651	658-0246-11	C3GBCA000001
IC652	658-0249-06	C0JBAB000890
IC721	658-0245-02	C0FBBK000048
L101	658-0240-30	J0JCC0000152
L102	658-0240-30	J0JCC0000152
L201	658-0240-30	J0JCC0000152
L401	658-0240-32	YELTBMHS800T

REF No.	PART No.	DESCRIPTION
L403	658-0240-32	YELTBMHS800T
L404	658-0240-32	YELTBMHS800T
L406	658-0240-32	YELTBMHS800T
L511	658-0240-52	J0JCC0000042
L512	658-0240-56	J0MAB0000134
L513	658-0240-30	J0JCC0000152
L514	658-0240-30	J0JCC0000152
L515	658-0240-30	J0JCC0000152
L516	658-0240-30	J0JCC0000152
L541	658-0240-30	J0JCC0000152
L701	658-0240-46	470PF 50WV
L702	658-0240-46	470PF 50WV
L703	658-0240-57	J0MAB0000015
L704	658-0240-57	J0MAB0000015
L705	658-0246-31	G1C2R2K00013
L721	658-0246-32	J0JCC0000159
L722	658-0246-32	J0JCC0000159
L723	658-0246-32	J0JCC0000159
L724	658-0246-32	J0JCC0000159
Q151	658-0237-14	TR 2SB766ATX
Q152	658-0237-14	TR 2SB766ATX
Q153	658-0240-10	B1GDCFNN0007
Q154	658-0240-11	B1GBCFNN0009
Q251	658-0244-04	Transistor B3HB00000023
Q252	658-0244-04	Transistor B3HB00000023
Q253	658-0244-04	Transistor B3HB00000023
Q301	658-0237-18	TR B1GBGEEA0001
Q321	658-0244-05	Transistor B1GBGFGG0001
R101	033-1231-15	1/16W 12k ohm
R102	033-1231-15	1/16W 12k ohm
R103	658-0237-41	1/16W 24k ohm
R104	658-0237-42	1/16W 3.9k ohm Metal
R106	658-0237-43	1/16W 18k ohm Metal
R107	033-4721-15	1/16W 4.7k ohm
R110	033-2021-15	1/16W 2k ohm
R121	033-1221-15	1/16W 1.2k ohm
R131	033-1051-15	1/16W 1M ohm
R132	033-1051-15	1/16W 1M ohm
R141	033-1031-15	1/16W 10k ohm
R142	033-1031-15	1/16W 10k ohm
R151	033-2291-15	1/16W 2.2 ohm
R152	658-0237-40	1/2W 20 ohm
R153	033-2291-15	1/16W 2.2 ohm
R154	658-0237-40	1/2W 20 ohm
R155	033-1021-15	1/16W 1k ohm
R156	033-3331-15	1/16W 33k ohm
R157	033-2231-15	1/16W 22k ohm
R201	033-4711-15	1/16W 470 ohm
R202	033-1031-15	1/16W 10k ohm
R203	033-1031-15	1/16W 10k ohm
R212	658-0240-18	150 ohm 1/16W
R214	033-4721-15	1/16W 4.7k ohm
R215	033-4721-15	1/16W 4.7k ohm
R216	033-2731-15	1/16W 27k ohm
R217	033-2731-15	1/16W 27k ohm
R218	033-1031-15	1/16W 10k ohm
R219	033-3321-15	1/16W 3.3k ohm
R220	033-3321-15	1/16W 3.3k ohm
R221	033-1051-15	1/16W 1M ohm
R222	033-4711-15	1/16W 470 ohm

REF No.	PART No.	DESCRIPTION
R223	033-3931-15	1/16W 39k ohm
R227	033-0000-05	1/16W 0 ohm
R231	033-1021-15	1/16W 1k ohm
R232	033-1531-15	1/16W 15k ohm
R234	033-1051-15	1/16W 1M ohm
R235	033-5621-15	1/16W 5.6k ohm
R236	033-5621-15	1/16W 5.6k ohm
R251	033-1031-15	1/16W 10k ohm
R252	033-4731-15	1/16W 47k ohm
R253	033-1531-15	1/16W 15k ohm
R254	033-1531-15	1/16W 15k ohm
R255	033-1531-15	1/16W 15k ohm
R261	658-0237-56	Resistor Network
R262	658-0244-14	NetworkResistor
R263	658-0244-09	Chip,1/16W27 ohm
R264	033-2201-15	1/16W 22 ohm
R265	033-2201-15	1/16W 22 ohm
R266	033-0000-05	1/16W 0 ohm
R267	033-1031-15	1/16W 10k ohm
R268	033-1021-15	1/16W 1k ohm
R269	033-1031-15	1/16W 10k ohm
R270	033-3931-15	1/16W 39k ohm
R271	658-0237-56	Resistor Network
R272	658-0237-58	Resistor Network
R273	658-0237-58	Resistor Network
R274	658-0244-14	NetworkResistor
R275	033-2201-15	1/16W 22 ohm
R276	033-2201-15	1/16W 22 ohm
R277	033-2201-15	1/16W 22 ohm
R278	033-2201-15	1/16W 22 ohm
R279	033-2201-15	1/16W 22 ohm
R280	033-2201-15	1/16W 22 ohm
R281	033-2201-15	1/16W 22 ohm
R282	033-2201-15	1/16W 22 ohm
R283	033-2201-15	1/16W 22 ohm
R284	033-2201-15	1/16W 22 ohm
R285	033-2201-15	1/16W 22 ohm
R286	033-2201-15	1/16W 22 ohm
R287	033-2201-15	1/16W 22 ohm
R288	033-2201-15	1/16W 22 ohm
R289	033-2201-15	1/16W 22 ohm
R290	033-2201-15	1/16W 22 ohm
R291	033-3931-15	1/16W 39k ohm
R292	033-3931-15	1/16W 39k ohm
R293	033-3931-15	1/16W 39k ohm
R294	033-3931-15	1/16W 39k ohm
R295	033-3931-15	1/16W 39k ohm
R296	033-3931-15	1/16W 39k ohm
R297	033-3931-15	1/16W 39k ohm
R298	033-3931-15	1/16W 39k ohm
R301	033-1811-15	1/16W 180 ohm
R302	033-1811-15	1/16W 180 ohm
R303	033-1811-15	1/16W 180 ohm
R311	033-4731-15	1/16W 47k ohm
R312	033-1811-15	1/16W 180 ohm
R313	033-6821-15	1/16W 6.8k ohm
R314	033-5621-15	1/16W 5.6k ohm
R315	033-5621-15	1/16W 5.6k ohm
R316	033-1031-15	1/16W 10k ohm
R317	033-5621-15	1/16W 5.6k ohm
R321	033-4721-15	1/16W 4.7k ohm
R322	033-4731-15	1/16W 47k ohm
R323	658-0244-10	Chip,1/8W0.51 ohm
R324	033-1011-15	1/16W 100 ohm
R325	033-1011-15	1/16W 100 ohm
R327	117-0000-10	0 ohm

REF No.	PART No.	DESCRIPTION
R431	658-0240-23	100k ohm 1/16W
R441	033-4731-15	1/16W 47k ohm
R501	033-1011-15	1/16W 100 ohm
R511	658-0240-47	33 ohm 1/16W
R512	033-1011-15	1/16W 100 ohm
R513	033-1011-15	1/16W 100 ohm
R514	658-0240-18	150 ohm 1/16W
R515	033-3931-15	1/16W 39k ohm
R516	033-4731-15	1/16W 47k ohm
R517	033-4731-15	1/16W 47k ohm
R518	033-2201-15	1/16W 22 ohm
R519	033-2201-15	1/16W 22 ohm
R521	033-1011-15	1/16W 100 ohm
R522	658-0240-47	33 ohm 1/16W
R523	116-1001-10	1/8W 10 ohm
R524	658-0240-47	33 ohm 1/16W
R525	658-0240-47	33 ohm 1/16W
R526	658-0240-18	150 ohm 1/16W
R527	658-0244-11	Chip,1/16W1k ohm
R528	658-0240-48	75 ohm 1/10W
R541	033-3321-15	1/16W 3.3k ohm
R543	033-4711-15	1/16W 470 ohm
R552	033-1031-15	1/16W 10k ohm
R553	033-1031-15	1/16W 10k ohm
R554	033-2021-15	1/16W 2k ohm
R555	033-3931-15	1/16W 39k ohm
R556	033-3931-15	1/16W 39k ohm
R557	033-3931-15	1/16W 39k ohm
R570	033-4711-15	1/16W 470 ohm
R571	033-4711-15	1/16W 470 ohm
R572	033-4711-15	1/16W 470 ohm
R573	033-4711-15	1/16W 470 ohm
R574	033-4711-15	1/16W 470 ohm
R575	033-4711-15	1/16W 470 ohm
R576	033-4711-15	1/16W 470 ohm
R577	033-4711-15	1/16W 470 ohm
R621	658-0240-18	150 ohm 1/16W
R623	033-1031-15	1/16W 10k ohm
R631	658-0240-50	75 ohm 1/16W
R651	033-2021-15	1/16W 2k ohm
R701	033-1011-15	1/16W 100 ohm
R702	033-1011-15	1/16W 100 ohm
R703	033-1011-15	1/16W 100 ohm
R704	033-0000-05	1/16W 0 ohm
R705	033-0000-05	1/16W 0 ohm
R706	033-0000-05	1/16W 0 ohm
R707	033-1011-15	1/16W 100 ohm
R708	033-1011-15	1/16W 100 ohm
R709	033-2211-15	1/16W 220 ohm
R711	118-0000-10	0 ohm
R712	118-0000-10	0 ohm
R713	033-2211-15	1/16W 220 ohm
R714	033-2211-15	1/16W 220 ohm
R715	033-2211-15	1/16W 220 ohm
R716	033-2211-15	1/16W 220 ohm
R717	033-1011-15	1/16W 100 ohm
R718	033-1011-15	1/16W 100 ohm
R721	033-1011-15	1/16W 100 ohm
R722	033-1011-15	1/16W 100 ohm
R723	033-1011-15	1/16W 100 ohm
R724	033-1011-15	1/16W 100 ohm
R725	033-1011-15	1/16W 100 ohm
SW301	658-0244-13	Switch K0L1BA000104
XL201	658-0237-52	H0J168500003
XL501	658-0239-02	Crystal Oscillator