



EXPLODED VIEW (MECHANISM)

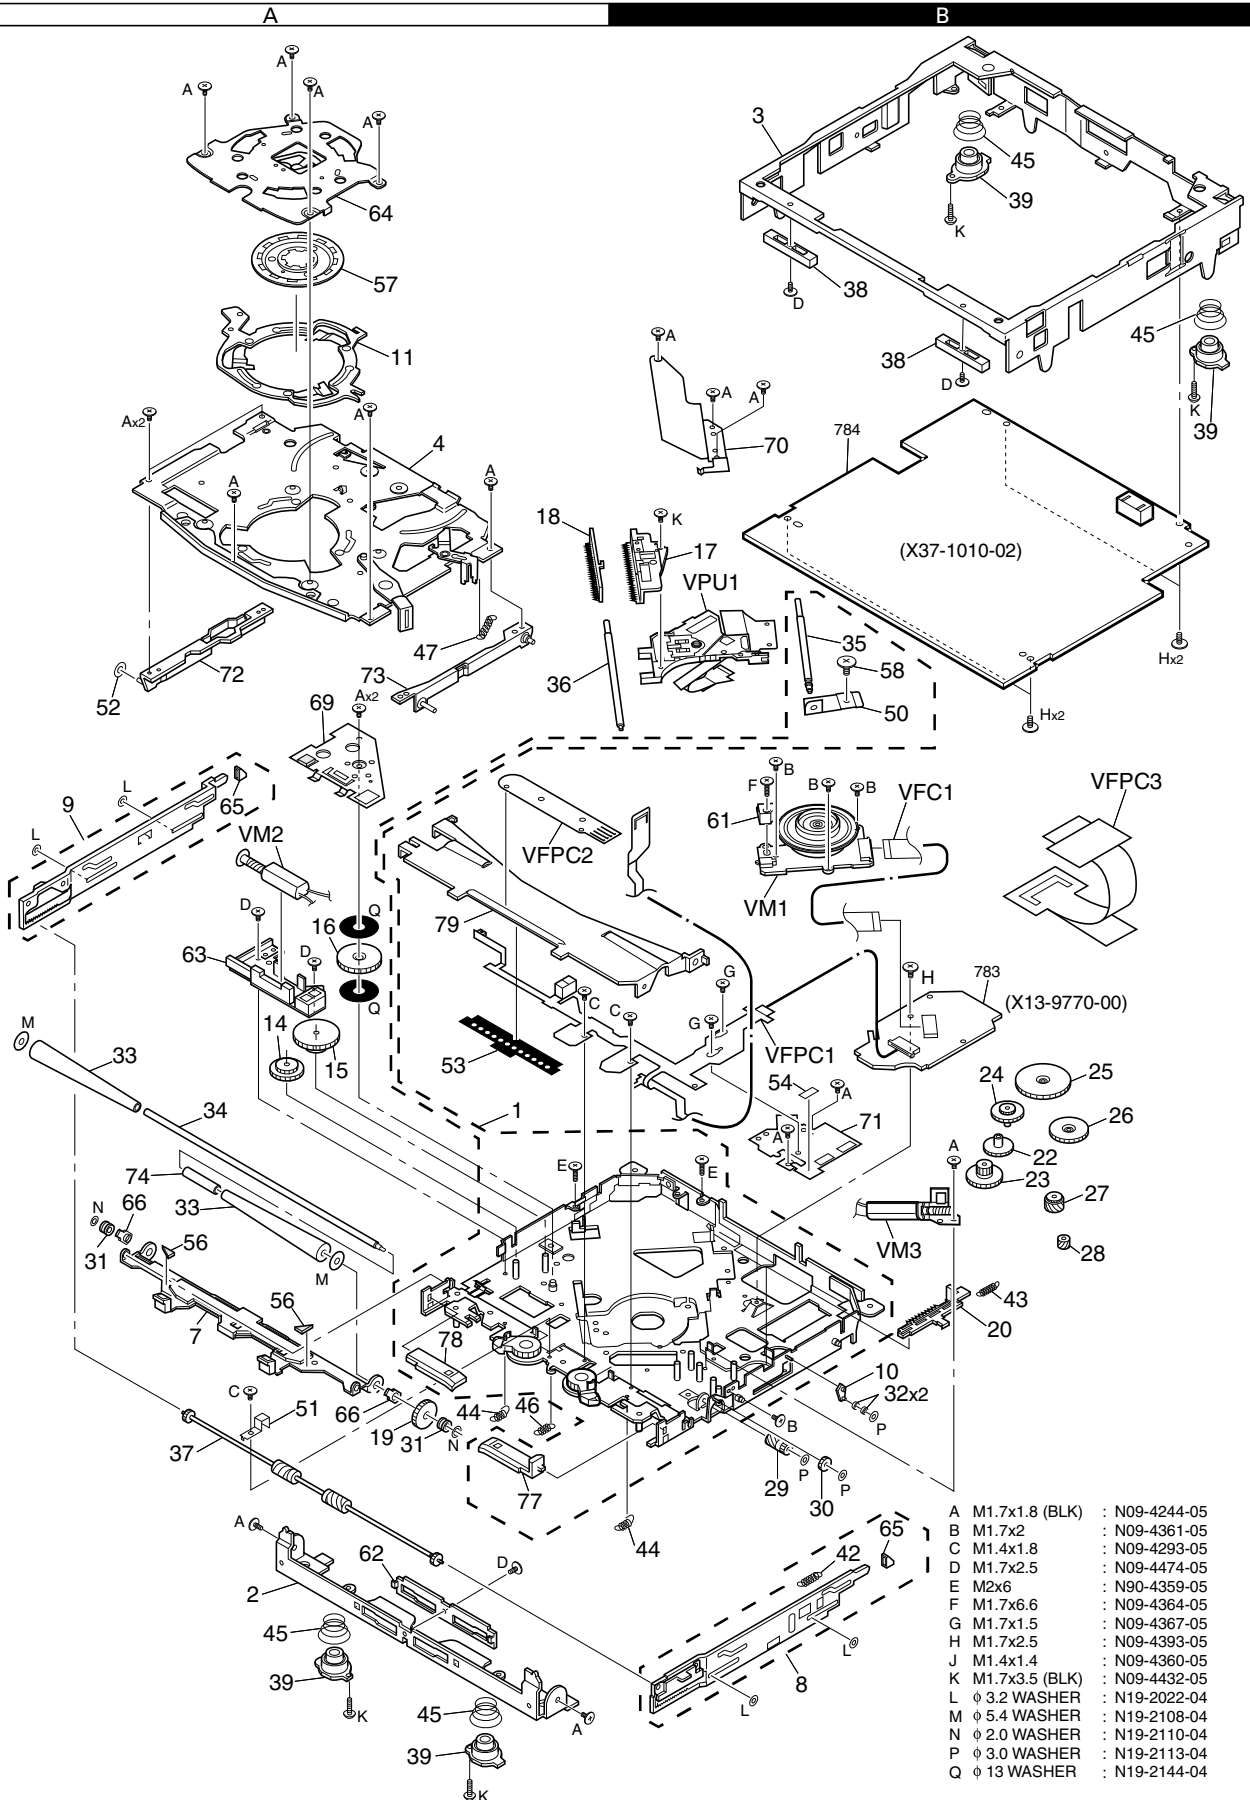


A	M1.7x1.8 (BLK)	: N09-4244-05
B	M1.7x2	: N09-4361-05
C	M1.4x1.8	: N09-4293-05
D	M1.7x2.5	: N09-4474-05
E	M2x6	: N90-4359-05
F	M1.7x6.6	: N09-4364-05
G	M1.7x1.5	: N09-4367-05
H	M1.7x2.5	: N09-4393-05
J	M1.4x1.4	: N09-4360-05
K	M1.7x3.5 (BLK)	: N09-4432-05
L	φ 3.2 WASHER	: N19-2022-04
M	φ 5.4 WASHER	: N19-2108-04
N	φ 2.0 WASHER	: N19-2110-04
P	φ 3.0 WASHER	: N19-2113-04
Q	φ 13 WASHER	: N19-2144-04

Parts with the exploded numbers larger than 700 are not supplied.

EXPLODED VIEW (UNIT)

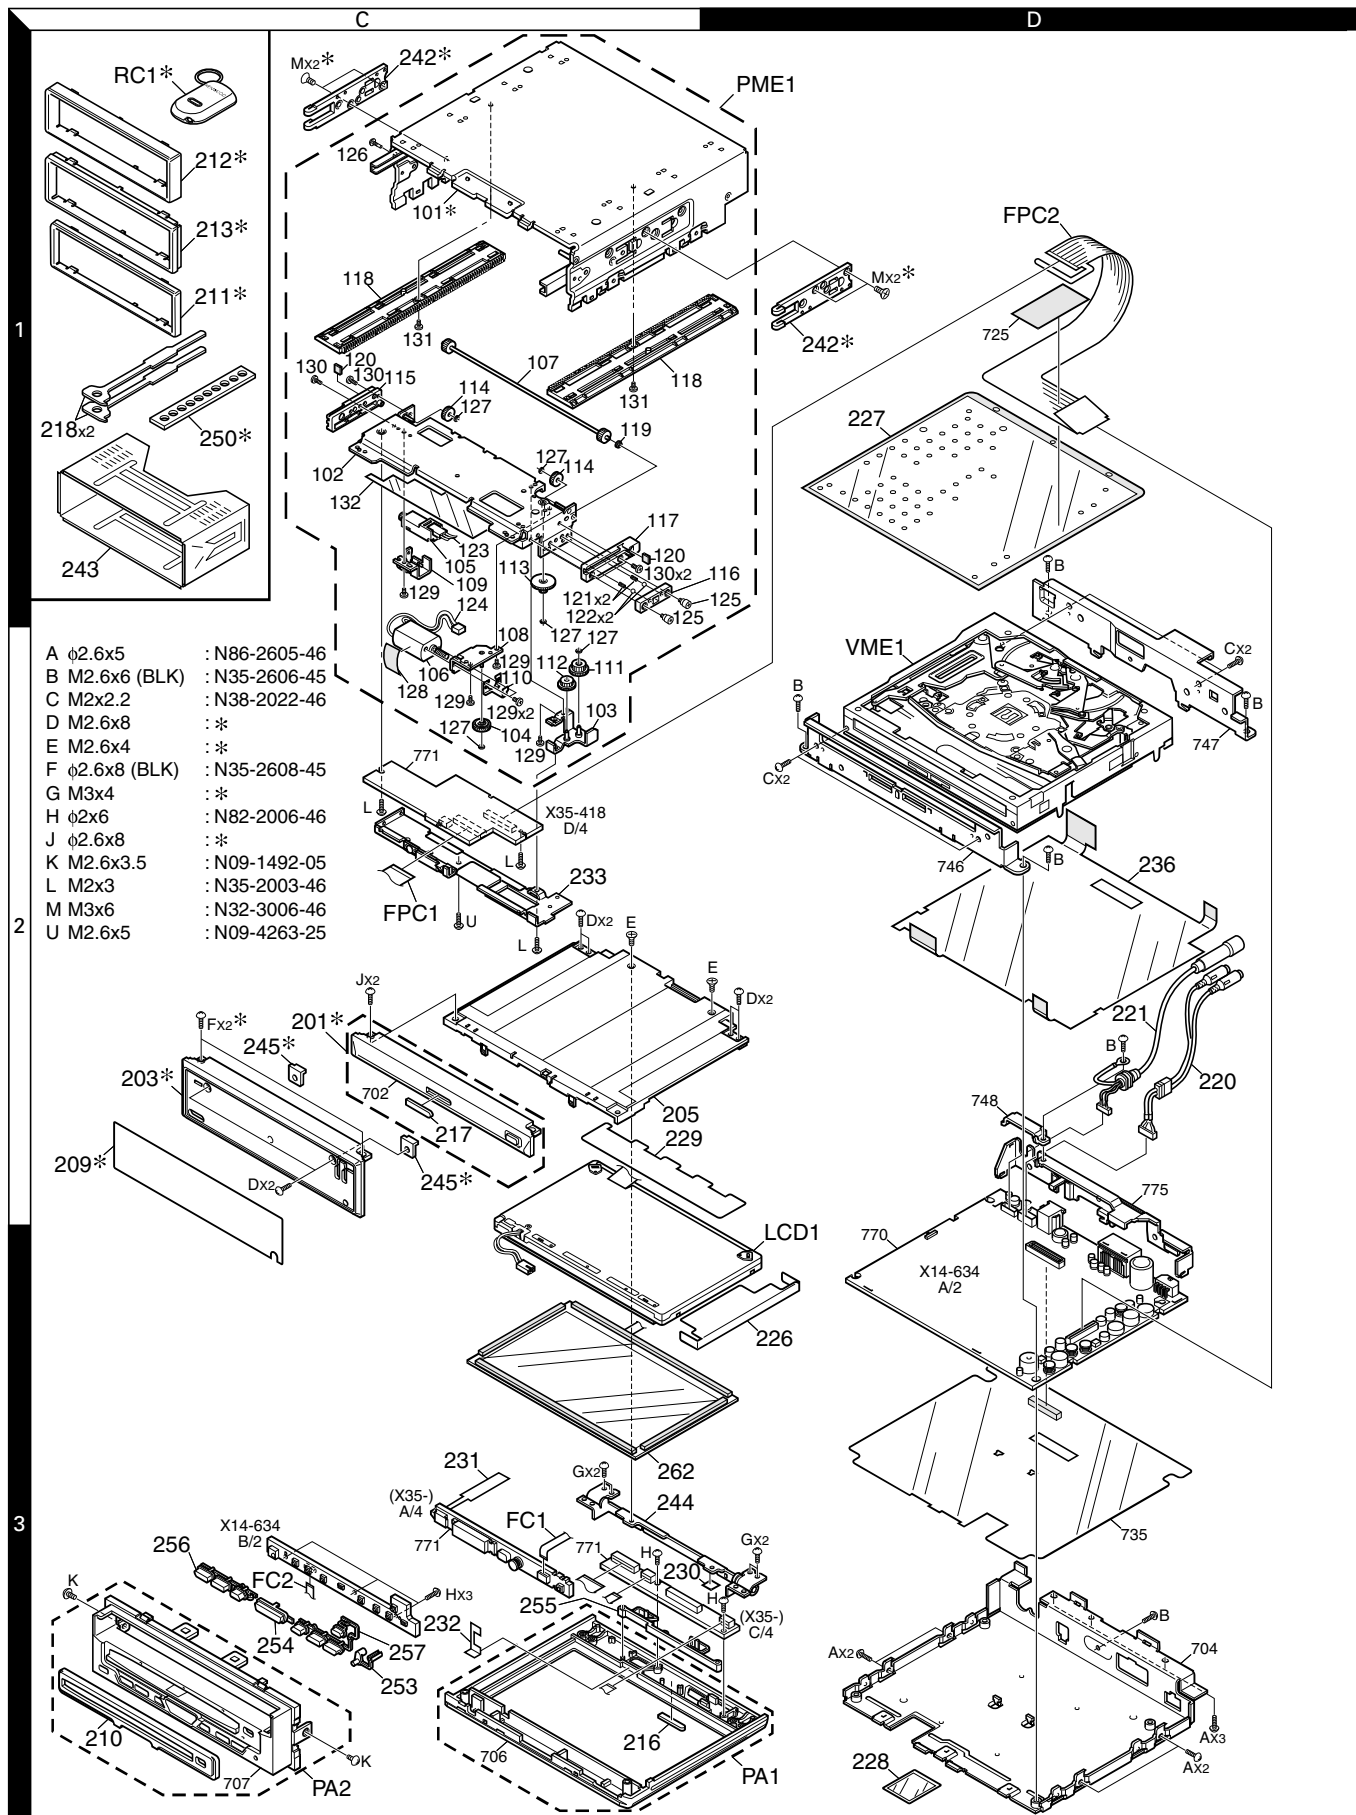

EXPLODED VIEW (UNIT)

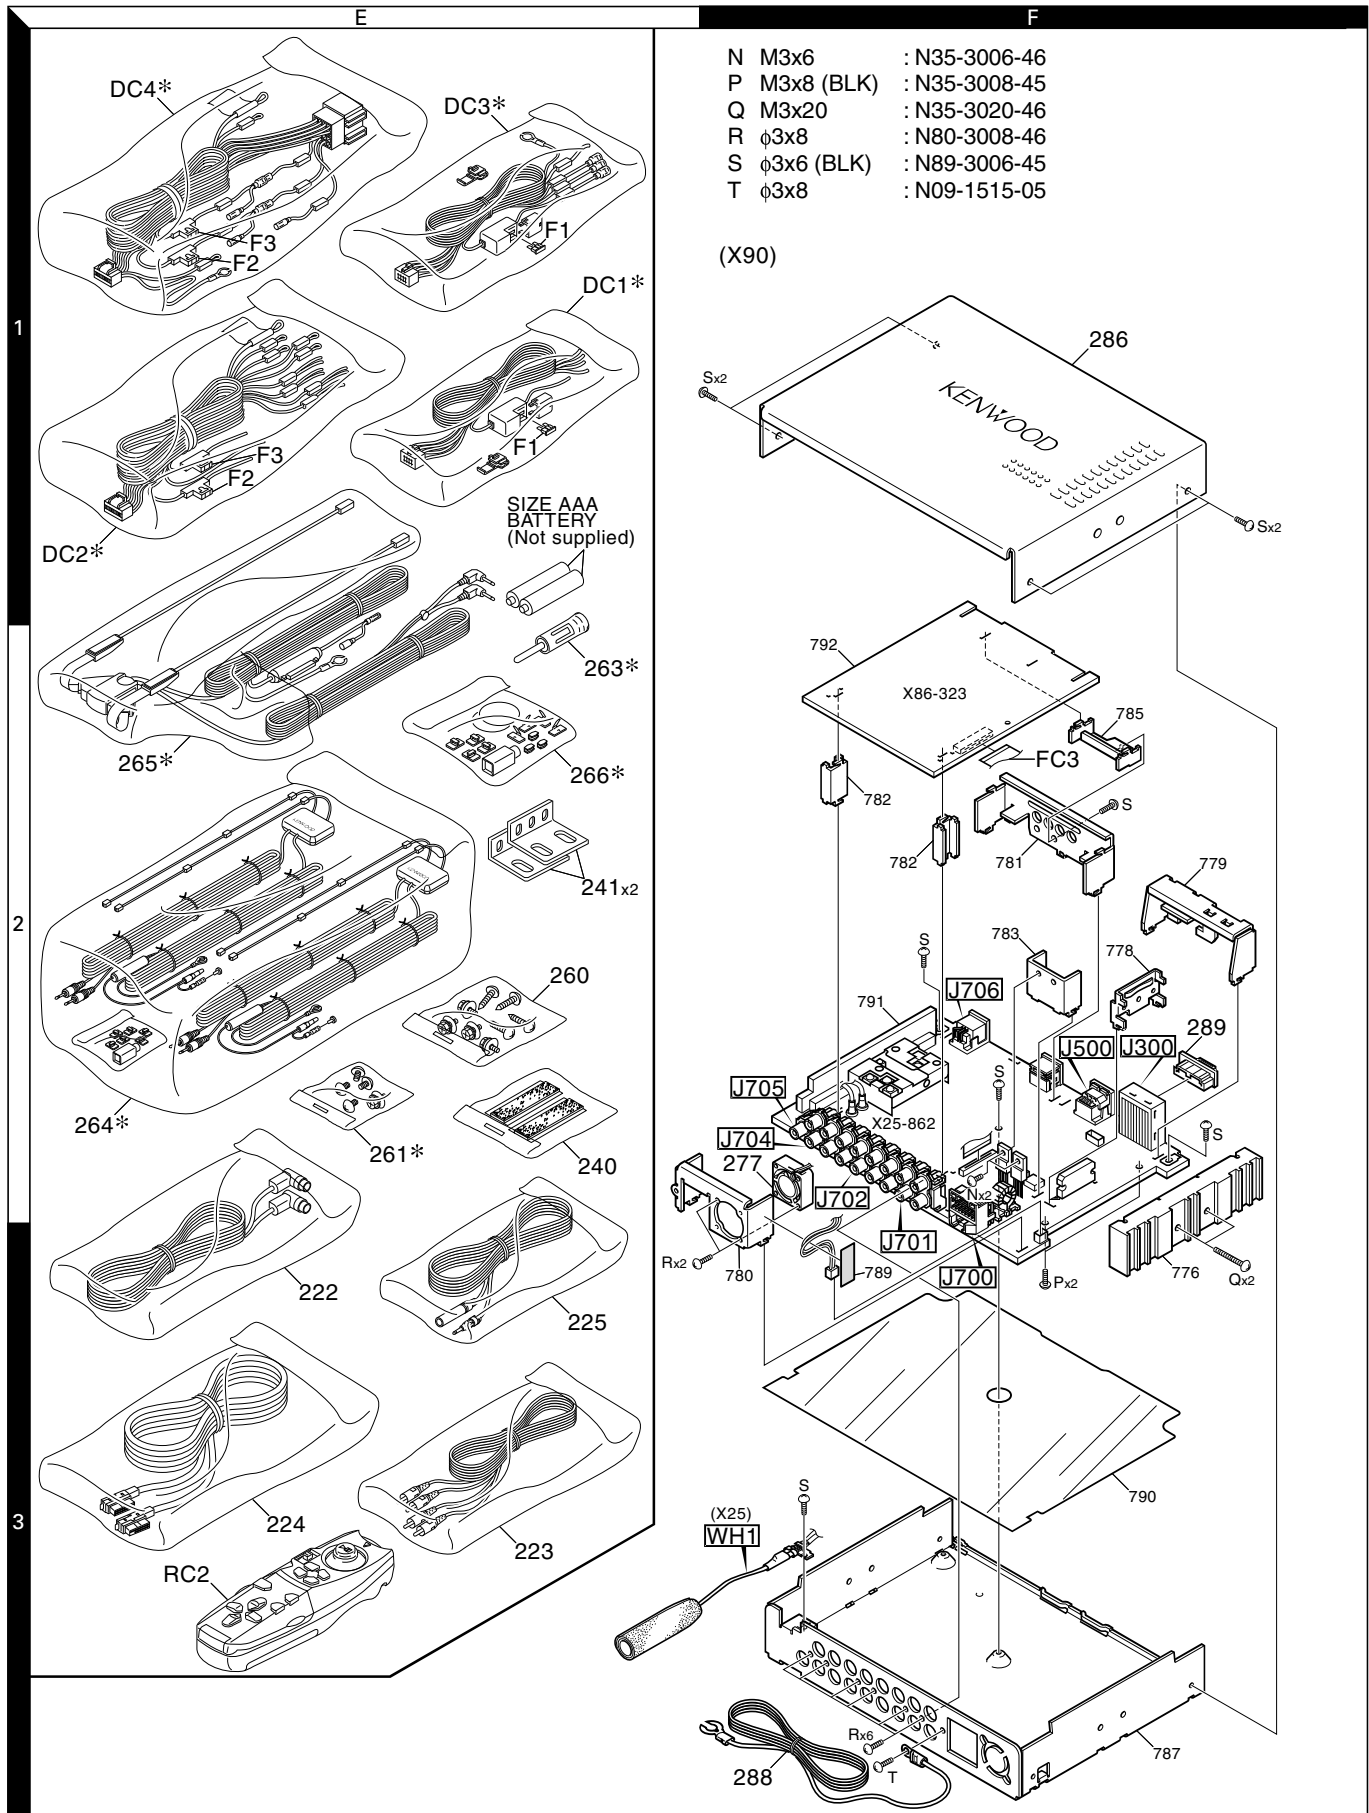

*Depends on the model. Refer to the parts list.

Parts with the exploded numbers larger than 700 are not supplied.

PARTS LIST

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	A d d	N e w	Parts No.	Description	Des t i n a t i o n
KVT-910DVD/920DVD/930DVD/940DVD/960DVD					
201	2C	*	A21-4074-13	DRESSING PANEL ASSY	KR
201	2C	*	A21-4075-13	DRESSING PANEL ASSY	MCH
201	2C	*	A21-4075-13	DRESSING PANEL ASSY	X
203	2C	*	A21-4078-02	DRESSING PANEL	EW
205	3C	*	A46-1698-11	REAR COVER	MCH
205	3C	*	A46-1698-11	REAR COVER	X
205	3C	*	A46-1707-11	REAR COVER	KREW
PA1	3C	*	A64-2249-12	PANEL ASSY (DISPLAY)	KR
PA1	3C	*	A64-2250-12	PANEL ASSY (DISPLAY)	MCH
PA1	3C	*	A64-2250-12	PANEL ASSY (DISPLAY)	X
PA1	3C	*	A64-2294-12	PANEL ASSY (DISPLAY)	EW
PA2	3C	*	A64-2253-02	PANEL ASSY (FRONT)	KR
PA2	3C	*	A64-2254-02	PANEL ASSY (FRONT)	EW
PA2	3C	*	A64-2255-02	PANEL ASSY (FRONT)	M
PA2	3C	*	A64-2296-12	PANEL ASSY (FRONT)	C
PA2	3C	*	A64-2297-12	PANEL ASSY (FRONT)	X
PA2	3C	*	A64-2403-02	PANEL ASSY (FRONT)	H
RC1	1C	*	A70-0886-15	REMOTE CONTROLLER ASSY (MASK)	EW
RC2	3E	*	A70-2013-05	REMOTE CONTROLLER ASSY	
209	2C	*	B03-3077-04	DRESSING PLATE	EW
210	3C	*	B03-3078-03	DRESSING PLATE	KR
210	3C	*	B03-3079-03	DRESSING PLATE	M
210	3C	*	B03-3082-13	DRESSING PLATE	C
210	3C	*	B03-3083-13	DRESSING PLATE	X
210	3C	*	B03-3084-03	DRESSING PLATE	EW
210	3C	*	B03-3091-03	DRESSING PLATE	H
211	1C	*	B07-2094-12	ESCUTCHEON (BLACK)	KR
211	1C	*	B07-3021-02	ESCUTCHEON (GRAY)	MCH
211	1C	*	B07-3021-02	ESCUTCHEON (GRAY)	X
212	1C		B07-2177-02	ESCUTCHEON (BLACK)	EW
213	1C		B07-2178-02	ESCUTCHEON (BLACK)	EW
216 ,217	3C	*	B43-1270-04	KENWOOD BADGE (SILVER)	
217	2C	*	B43-1271-04	KENWOOD BADGE (BLACK)	KR
-			B46-0100-50	WARRANTY CARD	
-			B46-0612-14	ID CARD	EW
-		*	B46-0631-13	USER CARD	KR
-		*	B64-1782-00	INSTRUCTION MANUAL(ENGLISH)	KR
-		*	B64-1783-00	INSTRUCTION MANUAL(FRENCH)	KR
-		*	B64-1784-00	INSTRUCTION MANUAL(ENGLISH)	E
-		*	B64-1785-00	INSTRUCTION MANUAL(FRENCH)	E
-		*	B64-1786-00	INSTRUCTION MANUAL(GERMAN)	E
-		*	B64-1787-00	INSTRUCTION MANUAL(ITALIAN)	EW
-		*	B64-1788-00	INSTRUCTION MANUAL(ARABIC)	C
-		*	B64-1789-00	INSTRUCTION MANUAL(ENG.,CHI.)	MHX
-		*	B64-2029-00	INSTRUCTION MANUAL(DUTCH)	E
-		*	B64-2030-00	INSTRUCTION MANUAL(SPANISH)	E
-		*	B64-2031-00	INSTRUCTION MANUAL(PTUGUESE)	E
LCD1	3D	*	B38-1067-05	LIQUID CRYSTAL	
218	1C		D10-3031-04	LEVER (121X25)	KRMC
218	1C		D10-3031-04	LEVER (121X25)	HX
218	1C		D10-4395-04	LEVER (156X25)	EW
PME1	1C	*	D40-1142-05	PANEL MECHANISM ASSY	KRMC
PME1	1C	*	D40-1142-05	PANEL MECHANISM ASSY	HX

Ref. No.	A d d	N e w	Parts No.	Description	Des t i n a t i o n
PME1	1C	*	D40-1143-05	PANEL MECHANISM ASSY	EW
220	2D	*	E30-4832-05	AUDIO CORD	
221	2D	*	E30-4833-05	CORD WITH PLUG (RGB)	
222	3E	*	E30-4834-05	CORD WITH PLUG (RGB)	
223	3E	*	E30-4908-05	AUDIO CORD	
224	3E	*	E30-4740-05	CORD WITH PLUG (BUS)	
225	3E	*	E30-4953-05	CORD WITH PLUG (ANT)	
DC1	1E	*	E30-4831-05	DC CORD (8P)	KRMC
DC1	1E	*	E30-4831-05	DC CORD (8P)	HX
DC2	1E	*	E30-4909-05	DC CORD (16P)	KRMC
DC2	1E	*	E30-4909-05	DC CORD (16P)	HX
DC3	1E	*	E30-4910-05	DC CORD (8P)	EW
DC4	1E	*	E30-4911-05	DC CORD (16P)	EW
FC1	3C	*	E39-0376-05	FLAT CABLE (10P)	
FC2	3C	*	E39-0379-05	FLAT CABLE (14P)	
226	3D	*	F09-1655-14	SHEET	
227	1D	*	F09-1661-04	SHEET	
228	3D	*	F09-1662-04	SHEET	
229	2C	*	F09-1678-04	SHEET	
230	3C	*	F09-1705-04	SHEET	
231	3C	*	F12-0736-14	SHIELDING SHEET	
232	3C	*	F12-0747-04	SHIELDING SHEET	
233	2C	*	F19-1373-13	BLIND PLATE ASSY	
236	2D	*	F20-2125-04	INSULATING SHEET	
F1	1E		F52-0004-05	MINI FUSE (5A)	
F2	1E		F52-0002-05	MINI FUSE (3A)	
F3	1E		F52-0006-05	MINI FUSE (10A)	
240	3E		H30-0051-05	MAGIC TAPE	
-		*	H02-0832-03	INNER CARTON CASE	
-		*	H10-4738-02	POLYSTYRENE FOAMED FIXTURE	
-		*	H10-4739-02	POLYSTYRENE FOAMED FIXTURE	
-		*	H13-1792-04	CARTON BOARD	KRMC
-		*	H13-1792-04	CARTON BOARD	HX
-		*	H13-2004-04	CARTON BOARD	
-			H25-0338-04	PROTECTION BAG (250X350X0.03)	
-			H25-1115-04	PROTECTION BAG	
-		*	H54-1865-03	ITEM CARTON CASE	KR
-		*	H54-1866-03	ITEM CARTON CASE	EW
-		*	H54-1867-03	ITEM CARTON CASE	MH
-		*	H54-1868-03	ITEM CARTON CASE	X
-		*	H54-1869-03	ITEM CARTON CASE	C
-		*	H54-2168-03	ITEM CARTON CASE	R
241	2E		J21-3801-04	MOUNTING HARDWARE	
242	1C		J21-9473-04	MOUNTING HARDWARE	EW
243	1C		J21-9491-13	MOUNTING HARDWARE ASSY	
244	3C		J21-9630-15	MOUNTING HARDWARE ASSY	
245	2C	*	J21-9668-04	MOUNTING HARDWARE	EW
250	1C		J54-0606-04	STAY	KRMC
250	1C		J54-0606-04	STAY	HX
FPC1	2C	*	J84-0124-04	FLEXIBLE PRINTED WIRING BOARD	
FPC2	1D	*	J84-0126-03	FLEXIBLE PRINTED WIRING BOARD	
253	3C	*	K24-3662-04	KNOB (RESET)	
254	3C	*	K24-3663-04	KNOB (SOURCE)	

PARTS LIST

* New Parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	A d d	N e w	Parts No.	Description	Dest inati on
255	3C	*	K25-1245-03	KNOB (V/M)(BLACK)	KREW
255	3C	*	K25-1246-03	KNOB (V/M)(SILVER)	MCH
255	3C	*	K25-1246-03	KNOB (V/M)(SILVER)	X
256	3C	*	K25-1247-03	KNOB (VOLUME/ATT)(BLACK)	KREW
256	3C	*	K25-1248-03	KNOB (VOLUME/ATT)(SILVER)	MCH
256	3C	*	K25-1248-03	KNOB (VOLUME/ATT)(SILVER)	X
257	3C	*	K25-1249-03	KNOB (TI/SEEK/EJECT)(BLACK)	KREW
257	3C	*	K25-1250-03	KNOB (TI/SEEK/EJECT)(SILVER)	M
257	3C	*	K25-1316-03	KNOB (LOUD/SEEK/EJECT)(SILVER)	CHX
260	3E		N99-1558-05	SCREW SET	KRMC
261	3E		N99-1571-05	SCREW SET	HX
261	3E		N99-1571-05	SCREW SET	
A	3D		N86-2605-46	BINDING HEAD TAPTITE SCREW	
B	2D		N35-2606-45	BINDING HEAD MACHINE SCREW	
C	2D		N38-2022-46	PAN HEAD MACHIN SCREW	
D	2C	*	N09-4418-05	MACHINE SCREW (M2.6X8)	MCH
D	2C	*	N09-4418-05	MACHINE SCREW (M2.6X8)	X
D	2C	*	N09-4438-05	MACHINE SCREW (M2.6X8)	KREW
E	2C	*	N09-4459-05	MACHINE SCREW (M2.6X4)	MCH
E	2C	*	N09-4459-05	MACHINE SCREW (M2.6X4)	X
E	2C	*	N09-4462-05	MACHINE SCREW (M2.6X4)	KREW
F	2C		N35-2608-45	BINDING HEAD MACHINE SCREW	EW
G	3C	*	N09-4417-05	MACHINE SCREW (M3X4)	MCH
G	3C	*	N09-4417-05	MACHINE SCREW (M3X4)	X
G	3C	*	N09-4437-05	MACHINE SCREW (M3X4)	KREW
H	3C		N82-2006-46	BINDING HEAD TAPTITE SCREW	
J	2C		N82-2608-41	BINDING HEAD TAPTITE SCREW	MCH
J	2C		N82-2608-41	BINDING HEAD TAPTITE SCREW	X
J	2C		N82-2608-45	BINDING HEAD TAPTITE SCREW	KREW
K	3C		N09-1492-05	MACHINE SCREW (2.6X3.5)	
L	2C		N35-2003-46	BINDING HEAD MACHINE SCREW	
M	1C		N32-3006-46	FLAT HEAD MACHIN SCREW	EW
U	2C		N09-4263-25	MACHINE SCREW (M2.6x5)	
262	3D	*	S79-0815-05	SWITCH ASSY	
263	2E		T90-0512-05	ANTENNA ADAPTOR	EW
264	2E		T90-0518-35	ANTENNA ASSY	KREW
265	2E	*	T90-0545-05	ANTENNA ASSY	MCH
265	2E	*	T90-0545-05	ANTENNA ASSY	X
266	2E	*	W01-1552-05	ACCESSORY	MCH
266	2E	*	W01-1552-05	ACCESSORY	X
VME1	2D	*	X92-3550-03	DVD MECHANISM ASSY	
SUB-CIRCUIT UNIT (X13-9770-00)					
C1 -3			CK73GB1C104K	CHIP C 0.10UF K	
CN1		*	E40-9781-05	FLAT CABLE CONNECTOR	
CN2		*	E40-9788-05	FLAT CABLE CONNECTOR	
CN3		*	E40-9789-05	FLAT CABLE CONNECTOR	
R1			RK73FB2A301J	CHIP R 300 J 1/10W	
R2 ,3			RK73FB2A331J	CHIP R 330 J 1/10W	
R4			RK73FB2A4R7J	CHIP R 4.7 J 1/10W	
R5			RK73GB1J153J	CHIP R 15K J 1/16W	
R6			RK73GB1J104J	CHIP R 100K J 1/16W	

Ref. No.	A d d	N e w	Parts No.	Description	Dest inati on
R7			RK73GB1J105J	CHIP R 1.0M J 1/16W	
R8			RK73GB1J332J	CHIP R 3.3K J 1/16W	
R9 ,10			RK73GB1J103J	CHIP R 10K J 1/16W	
S1		*	S68-0846-05	PUSH SWITCH	
IC1			NJM2406F	ANALOGUE IC	
TH1			NT732ATD33KJ	THERMISTOR	
VIDEO CONTROL UNIT (X14-634X-XX)					
D500			B30-1523-05	LED	
D501,502			B30-1545-05	LED(BLUE)	
D503			B30-1559-05	LED	
C1 -4			CK73GB1H102K	CHIP C 1000PF K	
C5			C92-1359-05	CHIP-TAN 10UF 16WV	
C6			C92-0606-05	CHIP-TAN 4.7UF 10WV	
C7			CK73GB1C104K	CHIP C 0.10UF K	
C8			CK73GB1H102K	CHIP C 1000PF K	
C9			CC73GCH1H470J	CHIP C 47PF J	
C10			CK73GB1H103K	CHIP C 0.010UF K	
C11			CK73FB1C474K	CHIP C 0.47UF K	
C12,13			CK73GB1C104K	CHIP C 0.10UF K	
C14,15			C92-1359-05	CHIP-TAN 10UF 16WV	
C16,17			CK73GB1C104K	CHIP C 0.10UF K	
C19			C92-0606-05	CHIP-TAN 4.7UF 10WV	
C20			CK73GB1C104K	CHIP C 0.10UF K	
C21			CK73GB1H102K	CHIP C 1000PF K	
C22			CK73GB1C104K	CHIP C 0.10UF K	
C23			CK73GB1H102K	CHIP C 1000PF K	
C24			CK73GB1C104K	CHIP C 0.10UF K	
C25			CC73GCH1H470J	CHIP C 47PF J	
C26			CK73GB1C104K	CHIP C 0.10UF K	
C27			CK73EB0J106K	CHIP C 10UF K	
C28			C92-0606-05	CHIP-TAN 4.7UF 10WV	
C29			CK73GB1C104K	CHIP C 0.10UF K	
C30			C92-0606-05	CHIP-TAN 4.7UF 10WV	
C31			CK73GB1H102K	CHIP C 1000PF K	
C32 -40			CK73GB1C104K	CHIP C 0.10UF K	
C41			CK73GB1H102K	CHIP C 1000PF K	
C42			CK73GB1C104K	CHIP C 0.10UF K	
C43			C92-1359-05	CHIP-TAN 10UF 16WV	
C44 -46			CK73GB1C104K	CHIP C 0.10UF K	
C47			CC73GCH1H471J	CHIP C 470PF J	
C48 -64			CK73GB1C104K	CHIP C 0.10UF K	
C65,66			CK73GB1H102K	CHIP C 1000PF K	
C67			C92-1359-05	CHIP-TAN 10UF 16WV	
C68			CK73GB1C104K	CHIP C 0.10UF K	
C70			CK73GB1C104K	CHIP C 0.10UF K	
C72,73			CC73GCH1H180J	CHIP C 18PF J	
C74,75			C92-1359-05	CHIP-TAN 10UF 16WV	
C76,77			CK73GB1C104K	CHIP C 0.10UF K	
C78			CK73GB1H102K	CHIP C 1000PF K	
C79,80			CK73GB1C104K	CHIP C 0.10UF K	
C82,83			CK73GB1C104K	CHIP C 0.10UF K	
C84			CK73GB1H102K	CHIP C 1000PF K	
C85			CK73GB1C104K	CHIP C 0.10UF K	

K: KVT-910DVD (for North America)
E: KVT-920DVD (for Europe Without Italy)
H: KVT-930DVD (for Korea,Taiwan,Philippines)
X: KVT-940DVD (for Australia)

R: KVT-910DVD (for South America)
W: KVT-920DVD (for Italy)
M: KVT-930DVD (for Southeastern Asia)
C: KVT-960DVD (for China)

△ indicates safety critical components.

PARTS LIST

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

VIDEO CONTROL UNIT (X14-634X-XX)

Ref. No.	A d d	N e w	Parts No.	Description	Dest inati on
C87			C92-1359-05	CHIP-TAN	10UF 16WV
C88,89			C92-0675-05	ELECTRO	4.7UF 25WV
C90,91			CK73GB1C104K	CHIP C	0.10UF K
C92			C92-1359-05	CHIP-TAN	10UF 16WV
C93			CK73GB1C104K	CHIP C	0.10UF K
C94			C92-1359-05	CHIP-TAN	10UF 16WV
C95			CK73GB1C104K	CHIP C	0.10UF K
C96,97			CC73GCH1H221J	CHIP C	220PF J
C98			CK73GB1C104K	CHIP C	0.10UF K
C99,100			CC73GCH1H391J	CHIP C	390PF J
C101,102			C92-1359-05	CHIP-TAN	10UF 16WV
C103,104			CK73GB1C104K	CHIP C	0.10UF K
C105,106			CK73GB1E223K	CHIP C	0.022UF K
C107-110			C92-1359-05	CHIP-TAN	10UF 16WV
C113,114			C92-1359-05	CHIP-TAN	10UF 16WV
C115			CK73GB1E223K	CHIP C	0.022UF K
C116			CK73GB1C104K	CHIP C	0.10UF K
C117			C92-0675-05	ELECTRO	4.7UF 25WV
C118,119			C92-0093-05	CHIP C	100UF 6.3WV
C120			C92-0092-05	CHIP C	47UF 6.3WV
C121			CK73GB1H102K	CHIP C	1000PF K
C122-125			CK73GB1C104K	CHIP C	0.10UF K
C126			CC73GCH1H150J	CHIP C	15PF J
C127			CK73GB1C104K	CHIP C	0.10UF K
C128			CK73FB1C334K	CHIP C	0.33UF K
C129			C92-0606-05	CHIP-TAN	4.7UF 10WV
C130-132			CK73GB1C104K	CHIP C	0.10UF K
C133-135			CC73GCH1H150J	CHIP C	15PF J
C136			CK73GB1C104K	CHIP C	0.10UF K
C137			CC73GCH1H391J	CHIP C	390PF J
C138-140			CC73GCH1H150J	CHIP C	15PF J
C141			CK73GB1E223K	CHIP C	0.022UF K
C142			C92-1359-05	CHIP-TAN	10UF 16WV
C143			CK73GB1C104K	CHIP C	0.10UF K
C144,145			CK73GB1H102K	CHIP C	1000PF K
C146,147			C92-1359-05	CHIP-TAN	10UF 16WV
C148,149			CC73GCH1H180J	CHIP C	18PF J
C150-153			CK73GB1C104K	CHIP C	0.10UF K
C154			C92-0606-05	CHIP-TAN	4.7UF 10WV
C155			C92-1359-05	CHIP-TAN	10UF 16WV
C156			CK73GB1H102K	CHIP C	1000PF K
C157-160			C92-0606-05	CHIP-TAN	4.7UF 10WV
C161,162			CK73GB1C104K	CHIP C	0.10UF K
C163			CK73GB1H102K	CHIP C	1000PF K
C164			CK73GB1C104K	CHIP C	0.10UF K
C165			CK73GB1H102K	CHIP C	1000PF K
C168-178			CK73GB1H102K	CHIP C	1000PF K
C179			CC73GCH1H471J	CHIP C	470PF J
C182,183			CK73GB1H102K	CHIP C	1000PF K
C190			C92-1359-05	CHIP-TAN	10UF 16WV
C200			CK73GB1H103K	CHIP C	0.010UF K
C201			C90-2843-05	ELECTRO	2200UF 16WV
C202			CK73GB1H103K	CHIP C	0.010UF K
C203			CK73GB1E223K	CHIP C	0.022UF K
C204			CK73FB1A105K	CHIP C	1.0UF K

Ref. No.	A d d	N e w	Parts No.	Description	Dest inati on
C205			C93-1032-05	CERAMIC	0.10UF K
C206			CK73FB1H104K	CHIP C	0.10UF K
C207			C92-0090-05	CHIP C	22UF 6.3WV
C208			CK73GB1C104K	CHIP C	0.10UF K
C209			CK73GB1H103K	CHIP C	0.010UF K
C210			CK73FB1C334K	CHIP C	0.33UF K
C211			CK73GB1H152K	CHIP C	1500PF K
C212			CC73GCH1H471J	CHIP C	470PF J
C213			CK73GB1H472K	CHIP C	4700PF K
C214			C93-1032-05	CERAMIC	0.10UF K
C215			CK73FB1C334K	CHIP C	0.33UF K
C216			CC73GCH1H471J	CHIP C	470PF J
C217			CK73GB1H472K	CHIP C	4700PF K
C218			CK73GB1C104K	CHIP C	0.10UF K
C219		*	C92-1610-05	ELECTRO	220UF 16WV
C220			CK73GB1H102K	CHIP C	1000PF K
C221			CK73GB1C104K	CHIP C	0.10UF K
C222		*	C93-1158-05	CERAMIC C	4.7UF 50WV
C223			CK73GB1H102K	CHIP C	1000PF K
C224		*	C92-1607-05	ELECTRO	82UF 6WV
C225			CK73GB1C104K	CHIP C	0.10UF K
C226		*	C92-1476-05	ELECTRO	39UF 16WV
C227			CK73GB1C104K	CHIP C	0.10UF K
C228			CK73FB1C334K	CHIP C	0.33UF K
C229			CC73GCH1H471J	CHIP C	470PF J
C230			CK73GB1H472K	CHIP C	4700PF K
C231			C93-1032-05	CERAMIC	0.10UF K
C232			CK73FB1C334K	CHIP C	0.33UF K
C233			CC73GCH1H471J	CHIP C	470PF J
C234			CK73GB1H472K	CHIP C	4700PF K
C235			CK73GB1C104K	CHIP C	0.10UF K
C236			C92-0671-05	ELECTRO	10UF 16WV
C237		*	C92-1610-05	ELECTRO	220UF 16WV
C238			CK73GB1H102K	CHIP C	1000PF K
C239			CK73GB1C104K	CHIP C	0.10UF K
C240		*	C93-1158-05	CERAMIC C	4.7UF 50WV
C241			CK73GB1H102K	CHIP C	1000PF K
C242		*	C92-1476-05	ELECTRO	39UF 16WV
C243			CK73GB1C104K	CHIP C	0.10UF K
C244		*	C92-1474-05	ELECTRO	56UF 10WV
C245			CK73GB1C104K	CHIP C	0.10UF K
C248-250			CK73EB1A475K	CHIP C	4.7UF K
C252			CK73EB1A475K	CHIP C	4.7UF K
C254			CK73EB1A475K	CHIP C	4.7UF K
C256			CK73GB1H332K	CHIP C	3300PF K
C257			CC73GCH1H820J	CHIP C	82PF J
C258			C92-0628-05	CHIP-TAN	10UF 10WV
C259			CK73GB1H103K	CHIP C	0.010UF K
C260			C92-0628-05	CHIP-TAN	10UF 10WV
C262			C92-0667-05	ELECTRO	10UF 10WV
C263-271			CK73GB1C104K	CHIP C	0.10UF K
C272			C92-0628-05	CHIP-TAN	10UF 10WV
C273-276			CK73GB1C104K	CHIP C	0.10UF K
C277-279			C92-0628-05	CHIP-TAN	10UF 10WV
C280-284			CK73GB1C104K	CHIP C	0.10UF K

PARTS LIST

* New Parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

VIDEO CONTROL UNIT (X14-634X-XX)

Ref. No.	A d d	N e w	Parts No.	Description	Dest ination
C285			C92-0628-05	CHIP-TAN 10UF 10WV	
C286,287			CK73GB1C104K	CHIP C 0.10UF K	
C288			CC73GCH1H471J	CHIP C 470PF J	
C289			C92-0628-05	CHIP-TAN 10UF 10WV	
C290			CK73GB1C104K	CHIP C 0.10UF K	
C291			CK73FB1A105K	CHIP C 1.0UF K	
C292			CK73GB1C104K	CHIP C 0.10UF K	
C293			CK73GB1H103K	CHIP C 0.010UF K	
C294			C92-0092-05	CHIP C 47UF 6.3WV	
C295,296			CK73GB1C104K	CHIP C 0.10UF K	
C297			C92-0628-05	CHIP-TAN 10UF 10WV	
C298-300			CK73GB1C104K	CHIP C 0.10UF K	
C301,302			C92-0628-05	CHIP-TAN 10UF 10WV	
C303			CK73GB1C104K	CHIP C 0.10UF K	
C304			CK73GB1H222K	CHIP C 2200PF K	
C305,306			CC73GCH1H471J	CHIP C 470PF J	
C307,308			CK73GB1C104K	CHIP C 0.10UF K	
C309,310			CC73GCH1H220J	CHIP C 22PF J	
C311			CK73FB1C105K	CHIP C 1.0UF K	
C312-314			CK73GB1C104K	CHIP C 0.10UF K	
C315			CK73GB1H103K	CHIP C 0.010UF K	
C316			CK73GB1C104K	CHIP C 0.10UF K	
C317			CK73GB1H103K	CHIP C 0.010UF K	
C318-320			CK73GB1C104K	CHIP C 0.10UF K	
C321			C92-0628-05	CHIP-TAN 10UF 10WV	
C322,323			CK73GB1C104K	CHIP C 0.10UF K	
C324			C92-0628-05	CHIP-TAN 10UF 10WV	
C325-331			CK73GB1C104K	CHIP C 0.10UF K	
C332			CC73GCH1H471J	CHIP C 470PF J	
C333			C90-2945-05	ELECTRO 0.047F 5.5WV	
C334			CK73GB1C104K	CHIP C 0.10UF K	
C335			C92-0628-05	CHIP-TAN 10UF 10WV	
C338			C92-0628-05	CHIP-TAN 10UF 10WV	
C339,340			CK73GB1C104K	CHIP C 0.10UF K	
C341			C92-0628-05	CHIP-TAN 10UF 10WV	
C342			CK73GB1H103K	CHIP C 0.010UF K	
C343			CK73GB1C104K	CHIP C 0.10UF K	
C344			CK73GB1H103K	CHIP C 0.010UF K	
C345,346			CC73GCH1H471J	CHIP C 470PF J	
C349,350			CC73GCH1H180J	CHIP C 18PF J	
C351-354			CK73GB1C104K	CHIP C 0.10UF K	
C355			CC73GCH1H471J	CHIP C 470PF J	
C357			CK73GB1C104K	CHIP C 0.10UF K	
C358,359			CK73GB1H102K	CHIP C 1000PF K	
C360			CC73GCH1H101J	CHIP C 100PF J	
C361			C92-0628-05	CHIP-TAN 10UF 10WV	
C392,393			C92-0675-05	ELECTRO 4.7UF 25WV	
C400			CC73GCH1H471J	CHIP C 470PF J	
C401			CK73GB1C104K	CHIP C 0.10UF K	
C402			CK73EB1C225K	CHIP C 2.2UF K	
C403-407			CK73GB1H103K	CHIP C 0.010UF K	
C408-413			CK73GB1H102K	CHIP C 1000PF K	
C414			CC73GCH1H221J	CHIP C 220PF J	
C500			CK73GB1H103K	CHIP C 0.010UF K	
C501			C92-0606-05	CHIP-TAN 4.7UF 10WV	

Ref. No.	A d d	N e w	Parts No.	Description	Dest ination
CN1		*	E41-0022-05	PIN ASSY	
CN2		*	E56-0836-05	CYLINDRICAL RECEPTACLE	
CN200		*	E58-0899-05	RECTANGULAR RECEPTACLE	
CN201			E40-5737-05	PIN ASSY	
CN202			E40-3239-05	PIN ASSY	
CN203		*	E41-0032-05	FLAT CABLE CONNECTOR	
CN204		*	E41-0108-05	FLAT CABLE CONNECTOR	
CN500		*	E41-0107-05	FLAT CABLE CONNECTOR	
J200			E58-0886-05	RECTANGULAR RECEPTACLE	
L5			L40-1001-78	SMALL FIXED INDUCTOR (10UH)	
L5		*	L40-1001-93	SMALL FIXED INDUCTOR	
L6 -10		*	L92-0330-05	CHIP FERRITE	
L12			L40-1001-78	SMALL FIXED INDUCTOR (10UH)	
L12		*	L40-1001-93	SMALL FIXED INDUCTOR	
L14 -16		*	L92-0330-05	CHIP FERRITE	
L18		*	L92-0330-05	CHIP FERRITE	
L19		*	L92-0315-05	CHIP FERRITE	
L21		*	L92-0330-05	CHIP FERRITE	
L22 ,23			L40-1001-78	SMALL FIXED INDUCTOR (10UH)	
L22 ,23		*	L40-1001-93	SMALL FIXED INDUCTOR	
L25		*	L40-1001-78	SMALL FIXED INDUCTOR (10UH)	
L25		*	L40-1001-93	SMALL FIXED INDUCTOR	
L201		*	L33-1177-05	CHOKE COIL (22UH)	
L202		*	L33-1176-05	CHOKE COIL	
L203		*	L33-1177-05	CHOKE COIL (22UH)	
L204		*	L33-1166-05	CHOKE COIL (100UH)	
L205		*	L92-0319-05	CHIP FERRITE	
L206,207		*	L33-1177-05	CHOKE COIL (22UH)	
L208		*	L33-1176-05	CHOKE COIL	
L209		*	L33-1166-05	CHOKE COIL (100UH)	
L210-222		*	L92-0319-05	CHIP FERRITE	
L223-226		*	L72-0780-05	CERAMIC FILTER	
L228		*	L92-0319-05	CHIP FERRITE	
L231-233		*	L92-0326-05	CHIP FERRITE	
L234		*	L92-0330-05	CHIP FERRITE	
X1		*	L77-2770-05	CRYSTAL RESONATOR (7.08MHZ)	
X200			L78-0533-05	RESONATOR (32.768KHZ)	
X201			L78-0575-05	RESONATOR (12.58MHZ)	
X202		*	L77-2770-05	CRYSTAL RESONATOR (7.08MHZ)	
CP1 -6			R90-0714-05	MULTI-COMP 10K X4	
CP7 -9			R90-1017-05	MULTI-COMP 68 X4	
CP10			R90-1014-05	MULTI-COMP 100 X4	
CP11			R90-1017-05	MULTI-COMP 68 X4	
CP12			R90-1014-05	MULTI-COMP 100 X4	
CP13,14			R90-1017-05	MULTI-COMP 68 X4	
CP15			R90-1014-05	MULTI-COMP 100 X4	
CP16-21			R90-0714-05	MULTI-COMP 10K X4	
CP22			R90-1017-05	MULTI-COMP 68 X4	
CP23			R90-1014-05	MULTI-COMP 100 X4	
CP24			R90-0724-05	MULTI-COMP 1K X4	
CP25-28			R90-0714-05	MULTI-COMP 10K X4	
CP29-34			R90-1033-05	MULTI-COMP 22 X4	
CP200			R90-1014-05	MULTI-COMP 100 X4	
CP201			R90-1019-05	MULTI-COMP 100 X2	

K: KVT-910DVD (for North America)
 E: KVT-920DVD (for Europe Without Italy)
 H: KVT-930DVD (for Korea,Taiwan,Philippines)
 X: KVT-940DVD (for Australia)

R: KVT-910DVD (for South America)
 W: KVT-920DVD (for Italy)
 M: KVT-930DVD (for Southeastern Asia)
 C: KVT-960DVD (for China)

△ indicates safety critical components.

KVT-910DVD/920DVD/930DVD/
940DVD/960DVD

PARTS LIST

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	A d d	N e w	Parts No.	Description	Dest inati on
CP202-207			R90-1014-05	MULTI-COMP 100 X4	
CP208			R90-0714-05	MULTI-COMP 10K X4	
CP209			R90-1019-05	MULTI-COMP 100 X2	
CP210			R90-0725-05	MULTI-COMP 1K X2	
CP211			R90-0724-05	MULTI-COMP 1K X4	
CP212-221			R90-1014-05	MULTI-COMP 100 X4	
R1 -2			RK73GB1J103J	CHIP R 10K J 1/16W	
R3			RK73GB1J224J	CHIP R 220K J 1/16W	
R4			RK73GB1J101J	CHIP R 100 J 1/16W	
R5 -7			R92-1252-05	CHIP R 0 OHM	
R8			RK73GB1J152J	CHIP R 1.5K J 1/16W	
R9 ,10			RK73GB1J220J	CHIP R 22 J 1/16W	
R11 ,12			RK73GB1J104J	CHIP R 100K J 1/16W	
R15			RK73GB1J101J	CHIP R 100 J 1/16W	
R16			RK73GB1J151J	CHIP R 150 J 1/16W	
R17			RK73GB1J101J	CHIP R 100 J 1/16W	
R18			RK73GB1J151J	CHIP R 150 J 1/16W	
R19 ,20			RK73GB1J681J	CHIP R 680 J 1/16W	
R21 -24			RK73GB1J220J	CHIP R 22 J 1/16W	
R25 ,26			RK73GB1J151J	CHIP R 150 J 1/16W	
R27 -30			RK73GB1J104J	CHIP R 100K J 1/16W	
R31 ,32			RK73GB1J203J	CHIP R 20K J 1/16W	
R33 ,34			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R35			RK73GB1J103J	CHIP R 10K J 1/16W	
R36 ,37			RK73GB1J220J	CHIP R 22 J 1/16W	
R38 ,39			RK73GB1J101J	CHIP R 100 J 1/16W	
R40			RK73GB1J103J	CHIP R 10K J 1/16W	
R42			RK73GB1J302J	CHIP R 3.0K J 1/16W	
R43			RK73GB1J151J	CHIP R 150 J 1/16W	
R44			RK73GB1J201J	CHIP R 200 J 1/16W	
R45			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R46			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R47 -49			RK73GB1J103J	CHIP R 10K J 1/16W	
R50			RK73GB1J470J	CHIP R 47 J 1/16W	
R51			RK73GB1J103J	CHIP R 10K J 1/16W	
R52 -54			RK73GB1J750J	CHIP R 75 J 1/16W	
R55			RK73GB1J103J	CHIP R 10K J 1/16W	
R56 -58			RK73GB1J220J	CHIP R 22 J 1/16W	
R59			R92-1252-05	CHIP R 0 OHM	
R60		*	RN73GH1J471D	CHIP R 470 D 1/16W	
R61 ,62			RK73GB1J103J	CHIP R 10K J 1/16W	
R63 ,64			RK73GB1J104J	CHIP R 100K J 1/16W	
R65			R92-1252-05	CHIP R 0 OHM	
R66			RK73GB1J220J	CHIP R 22 J 1/16W	
R67			RK73GB1J183J	CHIP R 18K J 1/16W	
R68			RK73GB1J4R7J	CHIP R 4.7 J 1/16W	
R69			RK73GB1J470J	CHIP R 47 J 1/16W	
R71			RK73GB1J470J	CHIP R 47 J 1/16W	
R72 ,73			RK73GB1J124J	CHIP R 120K J 1/16W	
R74 ,75			RK73GB1J103J	CHIP R 10K J 1/16W	
R76			RK73GB1J511J	CHIP R 510 J 1/16W	
R77 ,78			RK73GB1J103J	CHIP R 10K J 1/16W	
R79			RK73GB1J511J	CHIP R 510 J 1/16W	
R80 ,81			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R82			RK73GB1J103J	CHIP R 10K J 1/16W	

VIDEO CONTROL UNIT (X14-634X-XX)

Ref. No.	A d d	N e w	Parts No.	Description	Dest inati on
R83 ,84			RK73GB1J154J	CHIP R 150K J 1/16W	
R85			RK73GB1J273J	CHIP R 27K J 1/16W	
R86			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R87			RK73GB1J391J	CHIP R 390 J 1/16W	
R88 ,89			RK73GB1J104J	CHIP R 100K J 1/16W	
R90			RK73EB2B391J	CHIP R 390 J 1/8W	
R91			RK73GB1J152J	CHIP R 1.5K J 1/16W	
R92			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R93 -95		*	RN73GH1J151D	CHIP R 150 D 1/16W	
R96			RK73FB2A750J	CHIP R 75 J 1/10W	
R97		*	RN73GH1J151D	CHIP R 150 D 1/16W	
R98 ,99			RK73GB1J103J	CHIP R 10K J 1/16W	
R100-102			RK73GB1J470J	CHIP R 47 J 1/16W	
R103			RK73GB1J103J	CHIP R 10K J 1/16W	
R105			RK73GB1J470J	CHIP R 47 J 1/16W	
R112			RK73GB1J103J	CHIP R 10K J 1/16W	
R120			RK73GB1J101J	CHIP R 100 J 1/16W	
R121			RK73GB1J4R7J	CHIP R 4.7 J 1/16W	
R126			RK73GB1J103J	CHIP R 10K J 1/16W	
R130			R92-1252-05	CHIP R 0 OHM	
R200			RK73GB1J123J	CHIP R 12K J 1/16W	
R201		*	R92-3270-05	CHIP R 3.3K J 1/2W	
R202			RK73GB1J183J	CHIP R 18K J 1/16W	
R203			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R204			RK73GB1J393J	CHIP R 39K J 1/16W	
R205			RK73GB1J473J	CHIP R 47K J 1/16W	
R206			RK73GB1J223J	CHIP R 22K J 1/16W	
R207			RK73EB2B472J	CHIP R 4.7K J 1/8W	
R208			RK73GB1J104J	CHIP R 100K J 1/16W	
R209			RK73GB1J473J	CHIP R 47K J 1/16W	
R210			RK73GB1J183J	CHIP R 18K J 1/16W	
R211,212			RK73GB1J223J	CHIP R 22K J 1/16W	
R213			RK73GB1J104J	CHIP R 100K J 1/16W	
R214			RK73GB1J363J	CHIP R 36K J 1/16W	
R215,216			RK73GB1J473J	CHIP R 47K J 1/16W	
R217,218			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R219-222			RK73EB2B102J	CHIP R 1.0K J 1/8W	
R223,224			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R225			RK73GB1J224J	CHIP R 220K J 1/16W	
R226			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R227			RK73GB1J473J	CHIP R 47K J 1/16W	
R228			RK73GB1J103J	CHIP R 10K J 1/16W	
R229			R92-0365-05	CHIP R 1.0K J 1/2W	
R230			RK73GB1J104J	CHIP R 100K J 1/16W	
R231,232			RK73GB1J103J	CHIP R 10K J 1/16W	
R233			RK73GB1J392J	CHIP R 3.9K J 1/16W	
R234,235			RK73GB1J473J	CHIP R 47K J 1/16W	
R236			RK73GB1J103J	CHIP R 10K J 1/16W	
R237			RK73GB1J104J	CHIP R 100K J 1/16W	
R238			RK73GB1J103J	CHIP R 10K J 1/16W	
R239			RK73GB1J392J	CHIP R 3.9K J 1/16W	
R240			RK73GB1J104J	CHIP R 100K J 1/16W	
R241,242			RK73GB1J303J	CHIP R 30K J 1/16W	
R243			RK73GB1J104J	CHIP R 100K J 1/16W	
R244			RK73GB1J752J	CHIP R 7.5K J 1/16W	

PARTS LIST

* New Parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

VIDEO CONTROL UNIT (X14-634X-XX)

Ref. No.	A d d	N e w	Parts No.	Description	Dest inati on
R245			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R246			R92-0686-05	CHIP R 33 J 1/2W	
R247			RK73GB1J104J	CHIP R 100K J 1/16W	
R248			RK73GB1J303J	CHIP R 30K J 1/16W	
R249			RK73GB1J104J	CHIP R 100K J 1/16W	
R250			RK73GB1J303J	CHIP R 30K J 1/16W	
R251			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R252			R92-1280-05	CHIP R 390 J 1/2W	
R253,254			RK73GB1J101J	CHIP R 100 J 1/16W	
R255		*	RN73GH1J363D	CHIP R 36K D 1/16W	
R256			RN73GH1J223D	CHIP R 22K D 1/16W	
R257			RN73GH1J513D	CHIP R 51K D 1/16W	
R258		*	RN73GH1J123D	CHIP R 12K D 1/16W	
R259			RK73GB1J104J	CHIP R 100K J 1/16W	
R260			RK73GB1J303J	CHIP R 30K J 1/16W	
R261			RK73GB1J104J	CHIP R 100K J 1/16W	
R262			RK73GB1J303J	CHIP R 30K J 1/16W	
R263			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R264			RK73GB1J104J	CHIP R 100K J 1/16W	
R265			RK73GB1J303J	CHIP R 30K J 1/16W	
R266			RK73GB1J104J	CHIP R 100K J 1/16W	
R267			RK73GB1J303J	CHIP R 30K J 1/16W	
R268			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R269			RK73GB1J101J	CHIP R 100 J 1/16W	
R270			R92-1280-05	CHIP R 390 J 1/2W	
R271			RK73GB1J101J	CHIP R 100 J 1/16W	
R272			R92-0686-05	CHIP R 33 J 1/2W	
R273			RN73GH1J683D	CHIP R 68K D 1/16W	
R274			RN73GH1J123D	CHIP R 12K D 1/16W	
R275			RN73GH1J473D	CHIP R 47K D 1/16W	
R276		*	RN73GH1J133D	CHIP R 13K D 1/16W	
R277			RN73GH1J562D	CHIP R 5.6K D 1/16W	
R278-280			RK73GB1J103J	CHIP R 10K J 1/16W	
R282			R92-1252-05	CHIP R 0 OHM	
R283			RK73GB1J303J	CHIP R 30K J 1/16W	
R284,285			RK73GB1J154J	CHIP R 150K J 1/16W	
R286			RK73GB1J100J	CHIP R 10 J 1/16W	
R287			RK73GB1J103J	CHIP R 10K J 1/16W	
R288			RK73GB1J123J	CHIP R 12K J 1/16W	
R289			RK73GB1J473J	CHIP R 47K J 1/16W	
R291,292			RK73GB1J332J	CHIP R 3.3K J 1/16W	
R293			RK73GB1J244J	CHIP R 240K J 1/16W	
R294			RK73GB1J224J	CHIP R 220K J 1/16W	
R295			RK73GB1J124J	CHIP R 120K J 1/16W	
R296			RK73GB1J623J	CHIP R 62K J 1/16W	
R297,298			RK73GB1J220J	CHIP R 22 J 1/16W	
R299			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R300-302			RK73GB1J221J	CHIP R 220 J 1/16W	
R303			RK73GB1J622J	CHIP R 6.2K J 1/16W	
R304			RK73GB1J302J	CHIP R 3.0K J 1/16W	
R305			RK73GB1J473J	CHIP R 47K J 1/16W	
R306			RK73GB1J101J	CHIP R 100 J 1/16W	
R307			RK73GB1J681J	CHIP R 680 J 1/16W	
R308			RK73GB1J332J	CHIP R 3.3K J 1/16W	
R309,310			RK73GB1J222J	CHIP R 2.2K J 1/16W	

Ref. No.	A d d	N e w	Parts No.	Description	Dest inati on
R311			RK73GB1J101J	CHIP R 100 J 1/16W	
R312,313			RK73GB1J562J	CHIP R 5.6K J 1/16W	
R314			RK73GB1J470J	CHIP R 47 J 1/16W	
R315			RK73GB1J392J	CHIP R 3.9K J 1/16W	
R316			RK73GB1J473J	CHIP R 47K J 1/16W	
R317			RK73GB1J104J	CHIP R 100K J 1/16W	
R318,319			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R320			RK73GB1J223J	CHIP R 22K J 1/16W	
R321			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R322			RK73GB1J473J	CHIP R 47K J 1/16W	
R323			RK73GB1J684J	CHIP R 680K J 1/16W	
R324,325			RK73GB1J473J	CHIP R 47K J 1/16W	
R326			RK73GB1J913J	CHIP R 91K J 1/16W	KREW
R326,327			RK73GB1J913J	CHIP R 91K J 1/16W	H
R327			RK73GB1J913J	CHIP R 91K J 1/16W	MCX
R328			RK73GB1J913J	CHIP R 91K J 1/16W	EW
R329			RK73GB1J913J	CHIP R 91K J 1/16W	MCX
R330			RK73GB1J913J	CHIP R 91K J 1/16W	EW
R330,331			RK73GB1J913J	CHIP R 91K J 1/16W	KR
R331			RK73GB1J913J	CHIP R 91K J 1/16W	MCH
R331			RK73GB1J913J	CHIP R 91K J 1/16W	X
R332			RK73GB1J104J	CHIP R 100K J 1/16W	
R333			RK73GB1J473J	CHIP R 47K J 1/16W	
R334			RK73GB1J201J	CHIP R 200 J 1/16W	
R335			RK73GB1J302J	CHIP R 3.0K J 1/16W	
R337			RK73GB1J471J	CHIP R 470 J 1/16W	
R338			RK73GB1J470J	CHIP R 47 J 1/16W	
R339			RK73GB1J104J	CHIP R 100K J 1/16W	
R340			RK73GB1J101J	CHIP R 100 J 1/16W	
R341			RK73GB1J104J	CHIP R 100K J 1/16W	
R342			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R343,344			RK73GB1J100J	CHIP R 10 J 1/16W	
R345			RK73GB1J473J	CHIP R 47K J 1/16W	
R346			RK73GB1J100J	CHIP R 10 J 1/16W	
R347,348			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R349			RK73GB1J100J	CHIP R 10 J 1/16W	
R350-353			RK73GB1J750J	CHIP R 75 J 1/16W	
R354-356			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R357-359			RK73GB1J101J	CHIP R 100 J 1/16W	
R360			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R361-365			RK73GB1J473J	CHIP R 47K J 1/16W	
R366,367			RK73GB1J103J	CHIP R 10K J 1/16W	
R368			RK73GB1J471J	CHIP R 470 J 1/16W	
R369			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R370,371			RK73GB1J221J	CHIP R 220 J 1/16W	
R372-374			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R375			RK73GB1J101J	CHIP R 100 J 1/16W	
R377,378			RK73GB1J101J	CHIP R 100 J 1/16W	
R379			RK73GB1J471J	CHIP R 470 J 1/16W	
R380			RN73GH1J332D	CHIP R 3.3K D 1/16W	
R381			RK73GB1J272J	CHIP R 2.7K J 1/16W	
R382-384			RK73GB1J473J	CHIP R 47K J 1/16W	
R385			RK73GB1J101J	CHIP R 100 J 1/16W	
R401			RK73GB1J104J	CHIP R 100K J 1/16W	
R402			RK73GB1J473J	CHIP R 47K J 1/16W	

K: KVT-910DVD (for North America)
E: KVT-920DVD (for Europe Without Italy)
H: KVT-930DVD (for Korea,Taiwan,Philippines)
X: KVT-940DVD (for Australia)

R: KVT-910DVD (for South America)
W: KVT-920DVD (for Italy)
M: KVT-930DVD (for Southeastern Asia)
C: KVT-960DVD (for China)

△ indicates safety critical components.

KVT-910DVD/920DVD/930DVD/
940DVD/960DVD

PARTS LIST

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

Teile ohne Parts No. werden nicht geliefert.						VIDEO CONTROL UNIT (X14-634X-XX)						
Ref. No.	A d d	N e w	Parts No.	Description		Dest inati on	Ref. No.	A d d	N e w	Parts No.	Description	Dest inati on
R403			RK73GB1J101J	CHIP R	100 J 1/16W		IC13		*	PLL1700E	MOS-IC	
R500			RK73FB2A151J	CHIP R	150 J 1/10W		IC14		*	LHF40V13-0N3	MEMORY IC	
R501			RK73FB2A221J	CHIP R	220 J 1/10W		IC15		*	MSM5118165B60T	MEMORY IC	
R502,503			RK73FB2A391J	CHIP R	390 J 1/10W		IC16		*	ADV7170KSU	MOS-IC	
R504			RK73FB2A331J	CHIP R	330 J 1/10W		IC17		*	NJU7222U50	ANALOGUE IC	
R510-513			RK73GB1J104J	CHIP R	100K J 1/16W		IC18,19		*	NJM4565V	ANALOGUE IC	
R514			RK73FB2A151J	CHIP R	150 J 1/10W		IC20		*	AN7708SP	ANALOGUE IC	
R515			RK73GB1J101J	CHIP R	100 J 1/16W		IC21			NJM2267V	ANALOGUE IC	
VR1		*	R32-0258-05	SEMI FIXED VARIABLE RESI.(330)			IC22		*	TC74LCX245FT	MOS-IC	
W200-202			R92-2052-05	CHIP R	0 J 1/10W		IC23		*	TC74LCX16244AF	MOS-IC	
W500			R92-2052-05	CHIP R	0 J 1/10W	KRMC	IC24		*	NJU7222U50	ANALOGUE IC	
W500			R92-2052-05	CHIP R	0 J 1/10W	HX	IC25		*	S-80942ANMP	ANALOGUE IC	
W501,502			R92-2052-05	CHIP R	0 J 1/10W	EW	IC26			TC7W00FU	MOS-IC	
W503			R92-2052-05	CHIP R	0 J 1/10W	KRMC	IC27		*	NJM4565V	ANALOGUE IC	
W503			R92-2052-05	CHIP R	0 J 1/10W	HX	IC28			TC7SH04F	MOS-IC	
S200			S62-0863-05	SLIDE SWITCH		EW	IC29,30			TC4W66FU	MOS-IC	
S500-502			S70-0841-05	TACT SWITCH			IC200			TA78DS05AF	ANALOGUE IC	
S503,504			S70-0826-05	TACT SWITCH			IC201		*	NJM2403V	ANALOGUE IC	
S505-508			S70-0841-05	TACT SWITCH			IC202,203		*	BA9743AFV	ANALOGUE IC	
BZ200			T95-0228-05	PIEZOELECTRIC VIBRATOR			IC205		*	NJM4565V	IC(OP AMP X2)	
D1 -2			DA204U	DIODE			IC206			BA3830F	ANALOGUE IC	
D3			AD1580ART-REEL	ZENER DIODE			IC207			PST9137NR	ANALOGUE IC	
D4			HZM3.9N(B)	ZENER DIODE			IC208			MM1234XFBE	ANALOGUE IC	
D5			DA204U	DIODE			IC209			MM1389XFBE	ANALOGUE IC	
D6			AVRM1608270MAB	VARISTOR			IC210			BU3616K	MOS-IC	
D200			DAP202U	DIODE			IC211			NJM2235M	ANALOGUE IC	
D201			1SR154-400	DIODE			IC212			HA12187FP	ANALOGUE IC	
D202,203			RD6.8M(B2)	ZENER DIODE			IC213		*	MSM5118165B60T	MEMORY IC	
D204			RB491D	DIODE			IC214			HD64412F	MOS-IC	
D205			1SR154-400	DIODE			IC215			TC7SHU04F	MOS-IC	
D206		*	D3F60	DIODE			IC216			TC7W04FU	MOS-IC	
D207-210			RB051L-40	DIODE			IC217		*	703035AGC-013	MI-COM IC	
D211			RB491D	DIODE			IC218		*	MSM531622F76TS	MEMORY IC	
D212			MA3056WA	ZENER DIODE			IC219			TC9246F	MOS-IC	
D213			DA204U	DIODE			IC220		*	*****	E2PROM IC	
D214			RB491D	DIODE			IC221			M62354FP	MOS-IC	
D215			MA3091-M	ZENER DIODE			IC222		*	TA8428F	ANALOGUE IC	
D217			DA227	DIODE			IC223		*	TC74VHCT08AF	MOS-IC	
D219			DAP202U	DIODE			IC224			TC7WH123FU	ANALOGUE IC	
D220-225			DA204U	DIODE			IC225		*	LC351016AT-70U	SRAM IC	
D226			DAP202U	DIODE			IC226			MSM514265CP-60	MEMORY IC	
D227-229			DA204U	DIODE			IC227		*	HD6417041AFI28	MI-COM IC	
D230-232			MA3056WA	ZENER DIODE			IC229			TC7SHU04F	IC	
D233			DAP202U	DIODE			IC500			RS-141	ANALOGUE IC	
IC1		*	TC74VHCT125AFT	MOS-IC			Q1			2SC3437	TRANSISTOR	
IC3			TC9246F	MOS-IC			Q4			2SC4081	TRANSISTOR	
IC4			TC74LCX16244AF	MOS-IC			Q5			DTC124EUA	DIGITAL TRANSISTOR	
IC6		*	HY57V16160DTC8	MEMORY IC			Q200			DTA124EUA	DIGITAL TRANSISTOR	
IC7		*	TC74LCX74FT	MOS-IC			Q201			2SC4081	TRANSISTOR	
IC8			TA48M025F	ANALOGUE IC			Q202			DTC124EUA	DIGITAL TRANSISTOR	
IC9		*	L64021H-G11	MOS-IC			Q203			2SC4081	TRANSISTOR	
IC10		*	HD6417040AFI28	MI-COM IC			Q204			DTC144EUA	DIGITAL TRANSISTOR	
IC11		*	NJU7222U33	ANALOGUE IC			Q205-208			2SA1576A	TRANSISTOR	
IC12		*	AK4353VF	MOS-IC			Q209		*	2SA2013	TRANSISTOR	
							Q210			2SB1203-FA	TRANSISTOR	

PARTS LIST

* New Parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

VIDEO CONTROL UNIT (X14-634X-XX)

Ref. No.	A d d	N e w	Parts No.	Description	Dest inati on
Q211		*	2SA2013	TRANSISTOR	
Q212			2SB1203-FA	TRANSISTOR	
Q213			FMG2	DIGITAL TRANSISTOR	
Q214			FMA2	TRANSISTOR	
Q215,216			DTC144EUA	DIGITAL TRANSISTOR	
Q217			DTA114EUA	DIGITAL TRANSISTOR	
Q218			DTC144EUA	DIGITAL TRANSISTOR	
Q219			2SD2114K	TRANSISTOR	
Q220			DTA144EUA	DIGITAL TRANSISTOR	
Q221			DTC144EUA	DIGITAL TRANSISTOR	
Q225,226			2SD2114K	TRANSISTOR	
Q227			DTC124EUA	DIGITAL TRANSISTOR	
Q228			DTA124EUA	DIGITAL TRANSISTOR	
Q229,230			DTC124EUA	DIGITAL TRANSISTOR	
Q231		*	2SC5566	TRANSISTOR	
Q232		*	2SA2013	TRANSISTOR	
Q233			DTC124EUA	DIGITAL TRANSISTOR	
Q234			2SA1576A	TRANSISTOR	
Q235-239			2SC4081	TRANSISTOR	
Q240			DTC124EUA	DIGITAL TRANSISTOR	
Q255			DTA124EUA	DIGITAL TRANSISTOR	
Q256-260		*	DTC124EUA	DIGITAL TRANSISTOR	
Q261			2SJ377	FET	
Q262			2SC4081	TRANSISTOR	
Q500			DTC124EUA	DIGITAL TRANSISTOR	
IC228		*	W02-3152-05	OSCILLATING MODULE	
X2			W02-3268-05	OSCILLATING MODULE (27.00M)	
ELECTRIC UNIT (X25-862X-XX)					
C100			CK73GB1C104K	CHIP C 0.10UF K	
C101			CK73GB1C683K	CHIP C 0.068UF K	
C102			CE04DW1H3R3M	ELECTRO 3.3UF 50WV	
C103			CE04DW1E4R7M	ELECTRO 4.7UF 25WV	
C104			CK73GB1H103K	CHIP C 0.010UF K	
C105			C90-2682-05	ELECTRO 47UF 16WV	
C106			CE04DW1C101M	ELECTRO 100UF 16WV	
C107-110			CK73EB1C225K	CHIP C 2.2UF K	
C111			CE04DW1C220M	ELECTRO 22UF 16WV	
C112			CK73GB1E223K	CHIP C 0.022UF K	
C113			CK73GB1H103K	CHIP C 0.010UF K	
C114			CE04DW1H100M	ELECTRO 10UF 50WV	
C300,301			CC73GCH1H220J	CHIP C 22PF J	
C302,303			CK73GB1H103K	CHIP C 0.010UF K	
C304			CK73GB1E223K	CHIP C 0.022UF K	
C305			CK73GB1H103K	CHIP C 0.010UF K	
C306			CK73GB1C104K	CHIP C 0.10UF K	
C307			CK73GB1H102K	CHIP C 1000PF K	
C308			CK73FB1A105K	CHIP C 1.0UF K	
C308			CK73FB1C105K	CHIP C 1.0UF K	
C309-312			CK73GB1H103K	CHIP C 0.010UF K	
C313-316			CK73GB1C104K	CHIP C 0.10UF K	
C317			CK73GB1H103K	CHIP C 0.010UF K	
C500			CE04DW1H100M	ELECTRO 10UF 50WV	
C501			CK73GB1A224K	CHIP C 0.22UF K	
C502			C90-2672-05	ELECTRO 100UF 10WV	

Ref. No.	A d d	N e w	Parts No.	Description	Dest inati on
C503-505			CK73GB1A224K	CHIP C 0.22UF K	
C506			C90-5308-05	ELECTRO 1.0UF 50WV	
C507			CE04DW1H3R3M	ELECTRO 3.3UF 50WV	
C511,512			CK73GB1C104K	CHIP C 0.10UF K	
C513			CE04DW1H010M	ELECTRO 1.0UF 50WV	
C514-517			CK73FB1C274K	CHIP C 0.27UF K	
C518			CK73GB1H103K	CHIP C 0.010UF K	
C519-522			CK73FB1C274K	CHIP C 0.27UF K	
C523,524			CE04DW1A330M	ELECTRO 33UF 10WV	
C525			CE04DW1A101M	ELECTRO 100UF 10WV	
C526-529			CK73EB1C225K	CHIP C 2.2UF K	
C530			CK73GB1C104K	CHIP C 0.10UF K	
C531,532			CK73EB1C225K	CHIP C 2.2UF K	
C533			CK73GB1H103K	CHIP C 0.010UF K	
C535			CE04DW1H010M	ELECTRO 1.0UF 50WV	
C536			CK73GB1H103K	CHIP C 0.010UF K	
C537			CK73GB1C104K	CHIP C 0.10UF K	
C538			CK73GB1E223K	CHIP C 0.022UF K	
C539			CE04DW1A330M	ELECTRO 33UF 10WV	
C540			CC73GCH1H220J	CHIP C 22PF J	
C541			CK73GB1H103K	CHIP C 0.010UF K	
C542			CE04DW1C100M	ELECTRO 10UF 16WV	
C543			CE04DW0J470M	ELECTRO 47UF 6.3WV	
C544			CK73GB1H103K	CHIP C 0.010UF K	
C545			CE04NW1C100M	ELECTRO 10UF 16WV	
C546			CE04DW1C100M	ELECTRO 10UF 16WV	
C547			CK73GB1C104K	CHIP C 0.10UF K	
C548,549			CE04DW1C100M	ELECTRO 10UF 16WV	
C550			CK73GB1C104K	CHIP C 0.10UF K	
C551			CK73FB1A105K	CHIP C 1.0UF K	
C551			CK73FB1C105K	CHIP C 1.0UF K	
C552			CK73GB1H153K	CHIP C 0.015UF K	
C553,554			CK73FB1A105K	CHIP C 1.0UF K	
C553,554			CK73FB1C105K	CHIP C 1.0UF K	
C555			CE04DW1E4R7M	ELECTRO 4.7UF 25WV	
C556			CE04DW0J470M	ELECTRO 47UF 6.3WV	
C557			CE04DW1E4R7M	ELECTRO 4.7UF 25WV	
C558			CC73GCH1H220J	CHIP C 22PF J	
C559			CK73GB1H103K	CHIP C 0.010UF K	
C560,561			CE04DW1E4R7M	ELECTRO 4.7UF 25WV	
C562			CK73GB1H102K	CHIP C 1000PF K	MCH
C562			CK73GB1H102K	CHIP C 1000PF K	XEW
C563			CC73GCH1H471J	CHIP C 470PF J	MCH
C563			CC73GCH1H471J	CHIP C 470PF J	XEW
C564			CK73GB1H102K	CHIP C 1000PF K	MCH
C564			CK73GB1H102K	CHIP C 1000PF K	XEW
C565			CC73GCH1H121J	CHIP C 120PF J	MCH
C565			CC73GCH1H121J	CHIP C 120PF J	XEW
C566			CC73GCH1H180J	CHIP C 18PF J	MCH
C566			CC73GCH1H180J	CHIP C 18PF J	XEW
C567			CK73GB1H103K	CHIP C 0.010UF K	KRME
C567			CK73GB1H103K	CHIP C 0.010UF K	W
C568			CE04DW1C100M	ELECTRO 10UF 16WV	KRME
C568			CE04DW1C100M	ELECTRO 10UF 16WV	W
C569			CC73GCH1H271J	CHIP C 270PF J	KRME

K: KVT-910DVD (for North America)
 E: KVT-920DVD (for Europe Without Italy)
 H: KVT-930DVD (for Korea,Taiwan,Philippines)
 X: KVT-940DVD (for Australia)

R: KVT-910DVD (for South America)
 W: KVT-920DVD (for Italy)
 M: KVT-930DVD (for Southeastern Asia)
 C: KVT-960DVD (for China)

△ indicates safety critical components.

KVT-910DVD/920DVD/930DVD/
940DVD/960DVD

PARTS LIST

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

Teile ohne Parts No. werden nicht geliefert.						ELECTRIC UNIT (X25-862X-XX)							
Ref. No.	A d d	N e w	Parts No.	Description		Dest inati on	Ref. No.	A d d	N e w	Parts No.	Description		Dest inati on
C569			CC73GCH1H271J	CHIP C	270PF J	W	C709			CK73GB1H102K	CHIP C	1000PF K	
C570			CE04DW1C100M	ELECTRO	10UF 16WV	KRME	C710			C90-2856-05	ELECTRO	3900UF 16WV	
C570			CE04DW1C100M	ELECTRO	10UF 16WV	W	C711			CK73GB1E223K	CHIP C	0.022UF K	
C571			CC73GCH1H471J	CHIP C	470PF J	MCH	C712,713			CK73GB1H103K	CHIP C	0.010UF K	
C571			CC73GCH1H471J	CHIP C	470PF J	XEW	C714			CK73GB1C473K	CHIP C	0.047UF K	
C572			CK73GB1H682K	CHIP C	6800PF K	MCH	C715-717			CE04DW1C470M	ELECTRO	47UF 16WV	
C572			CK73GB1H682K	CHIP C	6800PF K	XEW	C718			CE04NW1C470M	ELECTRO	47UF 16WV	
C573			CC73GCH1H820J	CHIP C	82PF J	MCH	C719			CK73GB1H103K	CHIP C	0.010UF K	
C573			CC73GCH1H820J	CHIP C	82PF J	XEW	C720			CK73FB1A105K	CHIP C	1.0UF K	
C574			CK73GB1H222K	CHIP C	2200PF K	MCH	C720			CK73FB1C105K	CHIP C	1.0UF K	
C574			CK73GB1H222K	CHIP C	2200PF K	XEW	C721,722			C90-2673-05	ELECTRO	220UF 10WV	
C575			CK73GB1H102K	CHIP C	1000PF K	MCH	C724-727			CE04DW1C470M	ELECTRO	47UF 16WV	
C575			CK73GB1H102K	CHIP C	1000PF K	XEW	C728			CE04DW0J101M	ELECTRO	100UF 6.3WV	
C576			CK73GB1H103K	CHIP C	0.010UF K		C729-732			CK73GB1C104K	CHIP C	0.10UF K	
C577			CE04DW1C100M	ELECTRO	10UF 16WV		C733,734			CK73GB1H103K	CHIP C	0.010UF K	
C578			CK73GB1H103K	CHIP C	0.010UF K		C735-738			CE04DW1C470M	ELECTRO	47UF 16WV	
C579			CK73FB1A105K	CHIP C	1.0UF K	MCH	C739,740			CK73GB1H222K	CHIP C	2200PF K	
C579			CK73FB1A105K	CHIP C	1.0UF K	XEW	C741,742			CE04DW1C470M	ELECTRO	47UF 16WV	
C579			CK73FB1C105K	CHIP C	1.0UF K	MCH	C743,744			CK73FB1A105K	CHIP C	1.0UF K	
C579			CK73FB1C105K	CHIP C	1.0UF K	XEW	C743,744			CK73FB1C105K	CHIP C	1.0UF K	
C581			CK73GB1H103K	CHIP C	0.010UF K		C745,746			CE04DW1C470M	ELECTRO	47UF 16WV	
C582			CC73GCH1H471J	CHIP C	470PF J	MCH	C747			CE04DW1A101M	ELECTRO	100UF 10WV	
C582			CC73GCH1H471J	CHIP C	470PF J	XEW	C748,749			CC73GCH1H220J	CHIP C	22PF J	
C583			CK73GB1H103K	CHIP C	0.010UF K		C750-752			CK73GB1C104K	CHIP C	0.10UF K	
C584			CE04DW1C100M	ELECTRO	10UF 16WV		C753			CK73GB1H103K	CHIP C	0.010UF K	
C585			CK73GB1E333K	CHIP C	0.033UF K		C754			C90-2759-05	ELECTRO	10UF 16WV	
C586			CC73GCH1H151J	CHIP C	150PF J		C755			CK73FB1A105K	CHIP C	1.0UF K	
C587			CC73GCH1H060D	CHIP C	6.0PF D	MCH	C755			CK73FB1C105K	CHIP C	1.0UF K	
C587			CC73GCH1H060D	CHIP C	6.0PF D	XEW	C756,757			CK73GB1H103K	CHIP C	0.010UF K	
C588			CE04DW1C100M	ELECTRO	10UF 16WV	MCH	C758			CK73GB1C104K	CHIP C	0.10UF K	
C588			CE04DW1C100M	ELECTRO	10UF 16WV	XEW	C759,760			CE04DW1C470M	ELECTRO	47UF 16WV	
C589			CK73GB1E223K	CHIP C	0.022UF K	MCH	C761			CE04NW1C470M	ELECTRO	47UF 16WV	
C589			CK73GB1E223K	CHIP C	0.022UF K	XEW	C762			CK73FB1A105K	CHIP C	1.0UF K	
C590,591			CC73GCH1H100D	CHIP C	10PF D	KRME	C762			CK73FB1C105K	CHIP C	1.0UF K	
C590,591			CC73GCH1H100D	CHIP C	10PF D	W	C763-765			CK73GB1C473K	CHIP C	0.047UF K	
C592-595			CK73GB1C104K	CHIP C	0.10UF K		C766-769			CK73EB1C225K	CHIP C	2.2UF K	
C596			CK73GB1H103K	CHIP C	0.010UF K		C770			CE04NW1C220M	ELECTRO	22UF 16WV	
C597,598			CK73FB1A105K	CHIP C	1.0UF K		C771,772			CE04DW0J331M	ELECTRO	330UF 6.3WV	
C597,598			CK73FB1C105K	CHIP C	1.0UF K		C773			CK73GB1C104K	CHIP C	0.10UF K	
C599,600			CC73GCH1H221J	CHIP C	220PF J	MCH	C776			CE04DW0J331M	ELECTRO	330UF 6.3WV	
C599,600			CC73GCH1H221J	CHIP C	220PF J	XEW	C777,778			CK73GB1C104K	CHIP C	0.10UF K	
C601			CK73GB1H152K	CHIP C	1500PF K	MCH	C779			CK73FB1A105K	CHIP C	1.0UF K	
C601			CK73GB1H152K	CHIP C	1500PF K	XEW	C779			CK73FB1C105K	CHIP C	1.0UF K	
C602,603			CK73FB1A105K	CHIP C	1.0UF K		C780			CE04DW1C100M	ELECTRO	10UF 16WV	
C602,603			CK73FB1C105K	CHIP C	1.0UF K		C781			CK73GB1A474K	CHIP C	0.47UF K	
C615			CC73GCH1H151J	CHIP C	150PF J		C783			CE04DW1C220M	ELECTRO	22UF 16WV	
C700			C90-2673-05	ELECTRO	220UF 10WV		C784			CK73FB1A105K	CHIP C	1.0UF K	
C701			CK73GB1H103K	CHIP C	0.010UF K		C784			CK73FB1C105K	CHIP C	1.0UF K	
C702			CK73GB1H102K	CHIP C	1000PF K		C785			CK73GB1C104K	CHIP C	0.10UF K	
C703			C90-2672-05	ELECTRO	100UF 10WV		C786,787			CK73EB1C225K	CHIP C	2.2UF K	
C704			C90-2683-05	ELECTRO	100UF 16WV		C789			CK73FB1A105K	CHIP C	1.0UF K	
C705			C90-2759-05	ELECTRO	10UF 16WV		C789			CK73FB1C105K	CHIP C	1.0UF K	
C706			CK73GB1E223K	CHIP C	0.022UF K		C790			CE04DW0J331M	ELECTRO	330UF 6.3WV	
C707			CK73GB1H103K	CHIP C	0.010UF K		C791			CK73FB1A105K	CHIP C	1.0UF K	
C708			CE04DW0J101M	ELECTRO	100UF 6.3WV		C791			CK73FB1C105K	CHIP C	1.0UF K	

PARTS LIST

* New Parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

ELECTRIC UNIT (X25-862X-XX)

Ref. No.	A d d	N e w	Parts No.	Description	Dest ination
C794			CK73FB1A105K	CHIP C 1.0UF K	
C794			CK73FB1C105K	CHIP C 1.0UF K	
C796			CK73GB1A474K	CHIP C 0.47UF K	
C797			CK73FB1A105K	CHIP C 1.0UF K	
C797			CK73FB1C105K	CHIP C 1.0UF K	
C799			CK73FB1A105K	CHIP C 1.0UF K	
C799			CK73FB1C105K	CHIP C 1.0UF K	
C800			CK73GB1C104K	CHIP C 0.10UF K	
C801			CK73GB1A474K	CHIP C 0.47UF K	
C802-804			CK73FB1A105K	CHIP C 1.0UF K	
C802-804			CK73FB1C105K	CHIP C 1.0UF K	
C806			CE04DW1C100M	ELECTRO 10UF 16WV	
C808,809			CK73FB1A105K	CHIP C 1.0UF K	
C808,809			CK73FB1C105K	CHIP C 1.0UF K	
C810			CK73GB1A474K	CHIP C 0.47UF K	
C812,813			CK73FB1A105K	CHIP C 1.0UF K	
C812,813			CK73FB1C105K	CHIP C 1.0UF K	
C814			CK73GB1A474K	CHIP C 0.47UF K	
C816			CE04DW1C100M	ELECTRO 10UF 16WV	
C817			CE04DW1C220M	ELECTRO 22UF 16WV	
C820			CK73GB1H103K	CHIP C 0.010UF K	
C821			CE04DW1C100M	ELECTRO 10UF 16WV	
C822			CE04CWOJ331M	ELECTRO 330UF 6.3WV	
C823			CK73GB1C104K	CHIP C 0.10UF K	
C825			CK73GB1H103K	CHIP C 0.010UF K	
C826			CE04NW1C220M	ELECTRO 22UF 16WV	
C828			CE04DW1C100M	ELECTRO 10UF 16WV	
C829			CE04NWJ221M	ELECTRO 220UF 6.3WV	
C830			CK73GB1H103K	CHIP C 0.010UF K	
C831-833			CK73GB1C104K	CHIP C 0.10UF K	
C834			CE04NWJ221M	ELECTRO 220UF 6.3WV	
C835-837			CK73GB1C104K	CHIP C 0.10UF K	
C838			CK73GB1H103K	CHIP C 0.010UF K	
C839			CK73GB1C104K	CHIP C 0.10UF K	
C840			CE04DW1C100M	ELECTRO 10UF 16WV	
C841			CK73GB1C104K	CHIP C 0.10UF K	
C842			CE04NWJ221M	ELECTRO 220UF 6.3WV	
C843			CK73GB1C104K	CHIP C 0.10UF K	
C844			CK73GB1C473K	CHIP C 0.047UF K	
C850			CK73GB1H103K	CHIP C 0.010UF K	
C851			CK73GB1C104K	CHIP C 0.10UF K	
C852			CE04DW1C100M	ELECTRO 10UF 16WV	
C853,854			CK73GB1H103K	CHIP C 0.010UF K	
C855			C90-2759-05	ELECTRO 10UF 16WV	
C856,857			CE04DW1A101M	ELECTRO 100UF 10WV	
C858			C90-2759-05	ELECTRO 10UF 16WV	
C859			CE04DW1A101M	ELECTRO 100UF 10WV	
C860,861			C90-2759-05	ELECTRO 10UF 16WV	
C862			CE04DW1A101M	ELECTRO 100UF 10WV	
C900			CK73GB1C104K	CHIP C 0.10UF K	
C901			CK73FB1C224K	CHIP C 0.22UF K	
C902			CK73GB1C104K	CHIP C 0.10UF K	
C903			CK73FB1A105K	CHIP C 1.0UF K	
C903			CK73FB1C105K	CHIP C 1.0UF K	
Ref. No.	A d d	N e w	Parts No.	Description	Dest ination
CN30			E40-3640-05	PIN ASSY	
CN50,51			E40-9421-05	PIN ASSY	
CN52,53			E40-9423-05	SOCKET FOR PIN ASSY	
CN70			E40-9706-05	PIN ASSY	
CN71		*	E40-9656-05	FLAT CABLE CONNECTOR	
CN72			E40-3246-05	PIN ASSY	
J300			E58-0870-05	RECTANGULAR RECEPTACLE	
J500			E56-0825-05	CYLINDRICAL RECEPTACLE	
J700			E58-0836-05	RECTANGULAR RECEPTACLE	
J701		*	E63-0864-05	PIN JACK	
J702		*	E63-0865-05	PIN JACK	
J704		*	E63-0866-05	PIN JACK	
J705		*	E63-0867-05	PIN JACK	
J706			E56-0823-05	CYLINDRICAL RECEPTACLE	
J707			E56-0811-05	CYLINDRICAL RECEPTACLE	
P1_2			E23-0745-05	TERMINAL	
WH1			E30-4762-15	CORD WITH PLUG	
277	2D	*	F09-1274-05	FAN	
L100			L40-4795-34	SMALL FIXED INDUCTOR	
L101			L40-2205-34	SMALL FIXED INDUCTOR(22UH)	
L300,301			L92-0319-05	CHIP FERRITE	
L302			L40-4795-34	SMALL FIXED INDUCTOR	
L303-308			L92-0331-05	CHIP FERRITE	
L309-314			L92-0329-05	CHIP FERRITE	
L500			L92-0329-05	CHIP FERRITE	
L501-505			L40-4795-34	SMALL FIXED INDUCTOR	
L501-505			L40-4795-34	SMALL FIXED INDUCTOR	
L502-505			L40-4795-34	SMALL FIXED INDUCTOR	
L506			L33-1001-05	SMALL FIXED INDUCTOR	
L507			L40-4795-34	SMALL FIXED INDUCTOR	
L508			L92-0329-05	CHIP FERRITE	
L601			L40-1095-34	SMALL FIXED INDUCTOR(1UH)	
L601			L40-1095-79	SMALL FIXED INDUCTOR(1UH)	
L603			L33-1123-05	LINE FILTER COIL	
L700			L92-0319-05	CHIP FERRITE	
L701			L33-1063-15	CHOKE COIL	
L702-707			L92-0329-05	CHIP FERRITE	
X301		*	L78-0574-15	RESONATOR	
X302			L78-0576-05	RESONATOR (6.29MHZ)	
X303			L78-0533-05	RESONATOR (32.768KHZ)	
X500			L77-2002-05	CRYSTAL RESONATOR	
X500			L77-2002-05	CRYSTAL RESONATOR	
X700			L78-0575-05	RESONATOR (12.58MHZ)	
N	2F		N35-3006-46	BINDING HEAD MACHINE SCREW	
P	3F		N35-3008-45	BINDING HEAD MACHINE SCREW	
Q	3F		N35-3020-46	BINDING HEAD MACHINE SCREW	
R	3F		N80-3008-46	PAN HEAD TAPTITE SCREW	
CP30			R90-0722-05	MULTI-COMP 2.2K X4	
CP31			R90-0724-05	MULTI-COMP 1K X4	
CP33			R90-1013-05	MULTI-COMP 2.2K X2	
CP34			R90-0737-05	MULTI-COMP 100K X2	
CP35			R90-0722-05	MULTI-COMP 2.2K X4	
CP36			R90-0737-05	MULTI-COMP 100K X2	

K: KVT-910DVD (for North America)
E: KVT-920DVD (for Europe Without Italy)
H: KVT-930DVD (for Korea,Taiwan,Philippines)
X: KVT-940DVD (for Australia)

R: KVT-910DVD (for South America)
W: KVT-920DVD (for Italy)
M: KVT-930DVD (for Southeastern Asia)
C: KVT-960DVD (for China)

△ indicates safety critical components.

PARTS LIST

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	A d d	N e w	Parts No.	Description	Dest inati on
CP39,40 CP41 CP41,42 CP41,42 CP43			R90-0725-05 R90-1013-05 R90-1013-05 R90-1013-05 R90-0737-05	MULTI-COMP 1K X2 MULTI-COMP 2.2K X2 MULTI-COMP 2.2K X2 MULTI-COMP 2.2K X2 MULTI-COMP 100K X2	CHX KRME W CHX
CP70 R81 R82 -85 R100,101 R102			R90-0725-05 RK73GB1J473J RK73GB1J750J R92-0365-05 RK73GB1J223J	MULTI-COMP 1K X2 CHIP R 47K J 1/16W CHIP R 75 J 1/16W CHIP R 1.0K J 1/2W CHIP R 22K J 1/16W	
R103 R104 R105 R106 R107			RK73GB1J472J RK73GB1J102J RK73GB1J104J RK73GB1J750J RK73GB1J272J	CHIP R 4.7K J 1/16W CHIP R 1.0K J 1/16W CHIP R 100K J 1/16W CHIP R 75 J 1/16W CHIP R 2.7K J 1/16W	
R108 R109 R110 R111 R112			RK73GB1J470J RK73GB1J153J RK73GB1J163J RK73GB1J913J RK73GB1J563J	CHIP R 47 J 1/16W CHIP R 15K J 1/16W CHIP R 16K J 1/16W CHIP R 91K J 1/16W CHIP R 56K J 1/16W	
R113 R114 R115,116 R117 R118			RK73GB1J470J RK73GB1J103J RK73GB1J913J R92-0366-05 RK73GB1J223J	CHIP R 47 J 1/16W CHIP R 10K J 1/16W CHIP R 91K J 1/16W CHIP R 560 J 1W CHIP R 22K J 1/16W	KR KR
R119 R119 R120 R300 R301			R92-1252-05 R92-1252-05 RK73GB1J472J RK73GB1J104J RK73GB1J684J	CHIP R 0 OHM CHIP R 0 OHM CHIP R 4.7K J 1/16W CHIP R 100K J 1/16W CHIP R 680K J 1/16W	MCH XEW KR
R302 R303-307 R308 R308 R309			RK73GB1J104J RK73EB2B102J RK73GB1J222J RK73GB1J222J RK73GB1J223J	CHIP R 100K J 1/16W CHIP R 1.0K J 1/8W CHIP R 2.2K J 1/16W CHIP R 2.2K J 1/16W CHIP R 22K J 1/16W	MCH XEW
R310 R311 R312 R313 R314			RK73GB1J124J RK73GB1J562J RK73GB1J273J RK73GB1J562J RK73GB1J102J	CHIP R 120K J 1/16W CHIP R 5.6K J 1/16W CHIP R 27K J 1/16W CHIP R 5.6K J 1/16W CHIP R 1.0K J 1/16W	MCH
R314 R314 R315 R316 R317 R318			RK73GB1J102J RK73GB1J104J RK73GB1J222J RK73GB1J102J RK73GB1J104J	CHIP R 1.0K J 1/16W CHIP R 100K J 1/16W CHIP R 2.2K J 1/16W CHIP R 1.0K J 1/16W CHIP R 100K J 1/16W	XEW
R319 R320 R321,322 R323 R324			RK73GB1J222J RK73GB1J104J RK73GB1J222J RK73GB1J473J RK73GB1J104J	CHIP R 2.2K J 1/16W CHIP R 100K J 1/16W CHIP R 2.2K J 1/16W CHIP R 47K J 1/16W CHIP R 100K J 1/16W	
R325 R326 R327,328 R329 R330			RK73GB1J222J RK73GB1J473J RK73GB1J220J RK73GB1J101J RK73GB1J104J	CHIP R 2.2K J 1/16W CHIP R 47K J 1/16W CHIP R 22 J 1/16W CHIP R 100 J 1/16W CHIP R 100K J 1/16W	KRCH

ELECTRIC UNIT (X25-862X-XX)

Ref. No.	A d d	N e w	Parts No.	Description	Dest inati on
R330 R330,331 R332 R333 R334,335			RK73GB1J104J RK73GB1J104J RK73GB1J102J RK73GB1J104J RK73GB1J473J	CHIP R 100K J 1/16W CHIP R 100K J 1/16W CHIP R 1.0K J 1/16W CHIP R 100K J 1/16W CHIP R 47K J 1/16W	X MEW
R336,337 R339 R340 R340,341 R341			RK73GB1J102J RK73GB1J104J RK73GB1J104J RK73GB1J104J RK73GB1J104J	CHIP R 1.0K J 1/16W CHIP R 100K J 1/16W CHIP R 100K J 1/16W CHIP R 100K J 1/16W CHIP R 100K J 1/16W	CHX MEW KR CHX
R342,343 R342,343 R344 R345 R346-347			RK73GB1J102J RK73GB1J102J RK73GB1J561J RK73GB1J222J R92-1252-05	CHIP R 1.0K J 1/16W CHIP R 1.0K J 1/16W CHIP R 560 J 1/16W CHIP R 2.2K J 1/16W CHIP R 0 OHM	MCH XEW KR
R400,401 R403,404 R405,406 R405,406 R408,409			R92-1252-05 R92-1252-05 R92-1252-05 R92-1252-05 R92-1252-05	CHIP R 0 OHM CHIP R 0 OHM CHIP R 0 OHM CHIP R 0 OHM CHIP R 0 OHM	EW KRMC HX KR
R410 R411 R500 R501 R502			R92-1252-05 R92-1252-05 RK73GB1J103J RK73GB1J472J RK73GB1J101J	CHIP R 0 OHM CHIP R 0 OHM CHIP R 10K J 1/16W CHIP R 4.7K J 1/16W CHIP R 100 J 1/16W	CHX
R503-505 R506 R507 R508 R509			RK73GB1J472J RK73GB1J751J RK73GB1J154J RK73GB1J431J RK73GB1J221J	CHIP R 4.7K J 1/16W CHIP R 750 J 1/16W CHIP R 150K J 1/16W CHIP R 430 J 1/16W CHIP R 220 J 1/16W	
R510 R511 R512 R514 R515,516			RK73GB1J562J RK73GB1J473J RK73GB1J472J RK73GB1J204J RK73GB1J682J	CHIP R 5.6K J 1/16W CHIP R 47K J 1/16W CHIP R 4.7K J 1/16W CHIP R 200K J 1/16W CHIP R 6.8K J 1/16W	
R517 R519 R520 R521 R522			RK73GB1J101J RK73GB1J101J RK73GB1J682J RK73GB1J103J RK73GB1J473J	CHIP R 100 J 1/16W CHIP R 100 J 1/16W CHIP R 6.8K J 1/16W CHIP R 10K J 1/16W CHIP R 47K J 1/16W	
R523 R524,525 R526,527 R528,529 R530			RK73EB2B101J RK73GB1J473J RK73EB2B102J RK73GB1J102J RK73GB1J473J	CHIP R 100 J 1/8W CHIP R 47K J 1/16W CHIP R 1.0K J 1/8W CHIP R 1.0K J 1/16W CHIP R 47K J 1/16W	
R531 R532 R533 R534 R535			RK73GB1J101J RK73EB2B102J RK73GB1J101J RK73GB1J472J RK73EB2B222J	CHIP R 100 J 1/16W CHIP R 1.0K J 1/8W CHIP R 100 J 1/16W CHIP R 4.7K J 1/16W CHIP R 2.2K J 1/8W	
R536 R537 R538 R539 R540			RK73GB1J473J RK73EB2B222J RK73GB1J473J RK73EB2B101J RK73GB1J204J	CHIP R 47K J 1/16W CHIP R 2.2K J 1/8W CHIP R 47K J 1/16W CHIP R 100 J 1/8W CHIP R 200K J 1/16W	

PARTS LIST

* New Parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

ELECTRIC UNIT (X25-862X-XX)

Ref. No.	A d d	N e w	Parts No.	Description	Dest inati on
R541			RK73EB2B101J	CHIP R 100 J 1/8W	
R542,543			RK73EB2B102J	CHIP R 1.0K J 1/8W	
R544			RK73GB1J473J	CHIP R 47K J 1/16W	
R545			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R546			RK73GB1J562J	CHIP R 5.6K J 1/16W	MCH
R546			RK73GB1J562J	CHIP R 5.6K J 1/16W	XEW
R547			RK73GB1J222J	CHIP R 2.2K J 1/16W	MCH
R547			RK73GB1J222J	CHIP R 2.2K J 1/16W	XEW
R548,549			RK73GB1J103J	CHIP R 10K J 1/16W	MCH
R548,549			RK73GB1J103J	CHIP R 10K J 1/16W	XEW
R550			RK73GB1J272J	CHIP R 2.7K J 1/16W	MCH
R550			RK73GB1J272J	CHIP R 2.7K J 1/16W	XEW
R551,552			RK73EB2B102J	CHIP R 1.0K J 1/8W	
R553			RK73GB1J333J	CHIP R 33K J 1/16W	MCH
R553			RK73GB1J333J	CHIP R 33K J 1/16W	XEW
R554,555			RK73GB1J223J	CHIP R 22K J 1/16W	
R556			RK73GB1J562J	CHIP R 5.6K J 1/16W	MCH
R556			RK73GB1J562J	CHIP R 5.6K J 1/16W	XEW
R557-559			RK73GB1J103J	CHIP R 10K J 1/16W	MCH
R557-559			RK73GB1J103J	CHIP R 10K J 1/16W	XEW
R560			RK73GB1J153J	CHIP R 15K J 1/16W	MCH
R560			RK73GB1J153J	CHIP R 15K J 1/16W	XEW
R561			RK73GB1J104J	CHIP R 100K J 1/16W	MCH
R561			RK73GB1J104J	CHIP R 100K J 1/16W	XEW
R562			RK73GB1J105J	CHIP R 1.0M J 1/16W	MCH
R562			RK73GB1J105J	CHIP R 1.0M J 1/16W	XEW
R562			R92-1252-05	CHIP R 0 OHM	KR
R563			RK73GB1J272J	CHIP R 2.7K J 1/16W	
R564			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R565,566			RK73GB1J103J	CHIP R 10K J 1/16W	MCH
R565,566			RK73GB1J103J	CHIP R 10K J 1/16W	XEW
R567			RK73GB1J823J	CHIP R 82K J 1/16W	MCH
R567			RK73GB1J823J	CHIP R 82K J 1/16W	XEW
R568			RK73EB2B220J	CHIP R 22 J 1/8W	MCH
R568			RK73EB2B220J	CHIP R 22 J 1/8W	XEW
R570			RK73GB1J361J	CHIP R 360 J 1/16W	
R571			RK73GB1J473J	CHIP R 47K J 1/16W	
R572			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R573			RK73GB1J473J	CHIP R 47K J 1/16W	
R574			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R575			RK73GB1J361J	CHIP R 360 J 1/16W	
R576,577			RK73GB1J473J	CHIP R 47K J 1/16W	
R578,579			RK73GB1J361J	CHIP R 360 J 1/16W	
R580,581			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R582-585			RK73GB1J103J	CHIP R 10K J 1/16W	
R599			R92-1252-05	CHIP R 0 OHM	KR
R608,609			RK73GB1J103J	CHIP R 10K J 1/16W	
R610			RK73GB1J473J	CHIP R 47K J 1/16W	
R611,612			RK73GB1J103J	CHIP R 10K J 1/16W	
R700			RK73EB2B103J	CHIP R 10K J 1/8W	
R701			RK73EB2B102J	CHIP R 1.0K J 1/8W	
R702,703			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R704			RK73GB1J223J	CHIP R 22K J 1/16W	
R705			RK73GB1J101J	CHIP R 100 J 1/16W	
R706		*	R92-3243-05	CARBON FILM RESISTOR	

Ref. No.	A d d	N e w	Parts No.	Description	Dest inati on
R707			RK73EB2B103J	CHIP R 10K J 1/8W	
R708			RK73GB1J473J	CHIP R 47K J 1/16W	
R709			RK73EB2B153J	CHIP R 15K J 1/8W	
R710			RK73GB1J223J	CHIP R 22K J 1/16W	
R712			RK73GB1J183J	CHIP R 18K J 1/16W	
R713			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R714			RK73GH1J273D	CHIP R 27K D 1/16W	
R715			RK73GB1J473J	CHIP R 47K J 1/16W	
R716			RK73GH1J472D	CHIP R 4.7K D 1/16W	
R717			RK73GB1J183J	CHIP R 18K J 1/16W	
R718-721			RK73GB1J361J	CHIP R 360 J 1/16W	
R722			RK73GB1J912J	CHIP R 9.1K J 1/16W	
R723-727			RK73GB1J223J	CHIP R 22K J 1/16W	
R728,729			R92-2041-05	CHIP R 47K D 1/10W	
R730			RK73EB2B221J	CHIP R 220 J 1/8W	
R731			R92-2063-05	CHIP R 680 J 1/2W	
R732			RK73GB1J153J	CHIP R 15K J 1/16W	
R733			RK73EB2B221J	CHIP R 220 J 1/8W	
R734-737			RK73GB1J223J	CHIP R 22K J 1/16W	
R738			R92-2046-05	CHIP R 4.3K D 1/10W	
R739-742			RK73GB1J104J	CHIP R 100K J 1/16W	
R743-746			RK73GB1J153J	CHIP R 15K J 1/16W	
R747,748			RK73GB1J562J	CHIP R 5.6K J 1/16W	
R749,750			RK73GB1J223J	CHIP R 22K J 1/16W	
R751			RK73GB1J101J	CHIP R 100 J 1/16W	
R752,753			RK73GB1J223J	CHIP R 22K J 1/16W	
R754			RK73GB1J101J	CHIP R 100 J 1/16W	
R755-758			RK73GB1J820J	CHIP R 82 J 1/16W	
R759			RK73GB1J473J	CHIP R 47K J 1/16W	
R760			RK73GB1J104J	CHIP R 100K J 1/16W	
R761			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R762			RK73GB1J332J	CHIP R 3.3K J 1/16W	
R763			RK73GB1J203J	CHIP R 20K J 1/16W	
R764,765			RK73GB1J103J	CHIP R 10K J 1/16W	
R766,767			RK73GB1J473J	CHIP R 47K J 1/16W	
R768,769			RK73GB1J361J	CHIP R 360 J 1/16W	
R770			R92-0686-05	CHIP R 33 J 1/2W	
R771			RK73FB2A102J	CHIP R 1.0K J 1/10W	
R772			RK73GB1J104J	CHIP R 100K J 1/16W	
R773			RK73EB2B221J	CHIP R 220 J 1/8W	
R774			RK73GB1J153J	CHIP R 15K J 1/16W	
R775			RK73GH1J123D	CHIP R 12K D 1/16W	
R776			RK73GH1J432D	CHIP R 4.3K D 1/16W	
R778,779			RK73GB1J223J	CHIP R 22K J 1/16W	
R780			RK73EB2B102J	CHIP R 1.0K J 1/8W	
R781			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R782,783			RK73GB1J101J	CHIP R 100 J 1/16W	
R784			R92-1252-05	CHIP R 0 OHM	
R792,793			RK73GB1J223J	CHIP R 22K J 1/16W	
R794-796			RK73GB1J104J	CHIP R 100K J 1/16W	
R797,798			RK73GB1J153J	CHIP R 15K J 1/16W	
R799			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R800,801			RK73GB1J473J	CHIP R 47K J 1/16W	
R802			RK73EB2B221J	CHIP R 220 J 1/8W	
R803-806			RK73GB1J562J	CHIP R 5.6K J 1/16W	

K: KVT-910DVD (for North America)
 E: KVT-920DVD (for Europe Without Italy)
 H: KVT-930DVD (for Korea,Taiwan,Philippines)
 X: KVT-940DVD (for Australia)

R: KVT-910DVD (for South America)
 W: KVT-920DVD (for Italy)
 M: KVT-930DVD (for Southeastern Asia)
 C: KVT-960DVD (for China)

△ indicates safety critical components.

PARTS LIST

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	A d d	N e w	Parts No.	Description	Dest inati on
R807			RK73GB1J223J	CHIP R 22K J 1/16W	
R808,809			RK73GB1J562J	CHIP R 5.6K J 1/16W	
R810			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R811			RK73GB1J104J	CHIP R 100K J 1/16W	
R812			RK73GB1J223J	CHIP R 22K J 1/16W	
R813			RK73GB1J473J	CHIP R 47K J 1/16W	KRH
R814			RK73GB1J820J	CHIP R 82 J 1/16W	
R815,816			RK73GB1J473J	CHIP R 47K J 1/16W	MCX
R815,816			RK73GB1J473J	CHIP R 47K J 1/16W	EW
R817			RK73GB1J473J	CHIP R 47K J 1/16W	KRH
R818			RK73GB1J820J	CHIP R 82 J 1/16W	
R819			RK73GB1J473J	CHIP R 47K J 1/16W	KREW
R820			RK73GB1J473J	CHIP R 47K J 1/16W	MCH
R820			RK73GB1J473J	CHIP R 47K J 1/16W	X
R821			RK73GB1J153J	CHIP R 15K J 1/16W	
R822			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R823			RK73GH1J273D	CHIP R 27K D 1/16W	
R824,825			RK73GB1J223J	CHIP R 22K J 1/16W	
R826			RK73EB2B102J	CHIP R 1.0K J 1/8W	
R827			RK73GH1J472D	CHIP R 4.7K D 1/16W	
R828-831			RK73EB2B102J	CHIP R 1.0K J 1/8W	
R832			RN73GH1J392D	CHIP R 3.9K D 1/16W	
R833			RN73GH1J103D	CHIP R 10K D 1/16W	
R834			RK73GB1J101J	CHIP R 100 J 1/16W	
R835			RK73GB1J820J	CHIP R 82 J 1/16W	
R836			RN73GH1J103D	CHIP R 10K D 1/16W	
R837,838			RN73GH1J392D	CHIP R 3.9K D 1/16W	
R839			RK73GB1J750J	CHIP R 75 J 1/16W	
R840			RK73GB1J562J	CHIP R 5.6K J 1/16W	
R841			RK73GB1J101J	CHIP R 100 J 1/16W	
R842			RK73GB1J562J	CHIP R 5.6K J 1/16W	
R843			RK73GB1J203J	CHIP R 20K J 1/16W	
R844			RN73GH1J103D	CHIP R 10K D 1/16W	
R845			RK73GB1J750J	CHIP R 75 J 1/16W	
R846			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R847			RK73EB2B102J	CHIP R 1.0K J 1/8W	
R848			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R849			RK73GB1J152J	CHIP R 1.5K J 1/16W	
R850			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R851			RK73EB2B102J	CHIP R 1.0K J 1/8W	
R853,854			RK73GB1J393J	CHIP R 39K J 1/16W	
R855,856			RK73GB1J220J	CHIP R 22 J 1/16W	
R857,858			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R859			RK73GB1J562J	CHIP R 5.6K J 1/16W	
R860			RK73GB1J750J	CHIP R 75 J 1/16W	
R861			RK73GB1J562J	CHIP R 5.6K J 1/16W	
R862			RK73GB1J473J	CHIP R 47K J 1/16W	
R863			RK73GB1J102J	CHIP R 1.0K J 1/16W	EW
R864			RK73GB1J361J	CHIP R 360 J 1/16W	
R865			RK73GB1J223J	CHIP R 22K J 1/16W	
R866			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R867			RK73GB1J223J	CHIP R 22K J 1/16W	
R868			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R869			RK73GB1J750J	CHIP R 75 J 1/16W	
R870			RK73GB1J361J	CHIP R 360 J 1/16W	

ELECTRIC UNIT (X25-862X-XX)

Ref. No.	A d d	N e w	Parts No.	Description	Dest inati on
R871			RK73GB1J750J	CHIP R 75 J 1/16W	
R872,873			RK73EB2B102J	CHIP R 1.0K J 1/8W	
R874			RN73GH1J103D	CHIP R 10K D 1/16W	
R875-877			RK73GB1J750J	CHIP R 75 J 1/16W	
R878			R92-2063-05	CHIP R 680 J 1/2W	
R879			RK73GB1J223J	CHIP R 22K J 1/16W	
R883-885			RK73GB1J102J	CHIP R 1.0K J 1/16W	MCX
R883-885			RK73GB1J102J	CHIP R 1.0K J 1/16W	EW
R886			RN73GH1J392D	CHIP R 3.9K D 1/16W	
R887			RK73GB1J473J	CHIP R 47K J 1/16W	
R888			RN73GH1J392D	CHIP R 3.9K D 1/16W	
R889,890			RN73GH1J103D	CHIP R 10K D 1/16W	
R891-893			RK73GB1J473J	CHIP R 47K J 1/16W	
R894,895			RN73GH1J392D	CHIP R 3.9K D 1/16W	
R896			RK73GB1J473J	CHIP R 47K J 1/16W	
R897			RN73GH1J392D	CHIP R 3.9K D 1/16W	
R898,899			RN73GH1J103D	CHIP R 10K D 1/16W	
R900			RK73GB1J153J	CHIP R 15K J 1/16W	
R901			RK73GB1J273J	CHIP R 27K J 1/16W	
R902-904			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R905			RK73GB1J473J	CHIP R 47K J 1/16W	
R906			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R980,981			RK73GB1J101J	CHIP R 100 J 1/16W	
VR50			R32-0229-05	SEMI FIXED VARIABLE RESISTOR	MCH
VR50			R32-0229-05	SEMI FIXED VARIABLE RESISTOR	XEW
D100			1SR154-400	DIODE	
D101			DAP202U	DIODE	
D102			AM01Z	DIODE	
D103			MA3110-M	ZENER DIODE	
D104			MA8056-M	ZENER DIODE	
D105			AM01Z	DIODE	KR
D300			DAN202U	DIODE	
D301			HZM6.8WA	ZENER DIODE	
D302			DAP202U	DIODE	
D303			HZM5.6N(B2)	ZENER DIODE	
D500-506			1SR154-400	DIODE	
D507			DAP202U	DIODE	
D508			1SR154-400	DIODE	
D509,510			DA204U	DIODE	
D511,512			MA3062WA	ZENER DIODE	
D513,514			DA204U	DIODE	
D515,516			MA3062WA	ZENER DIODE	
D517-519			DA204U	DIODE	
D520			DAN202U	DIODE	MCH
D520			DAN202U	DIODE	XEW
D521			MA8068-M	ZENER DIODE	
D522-524			DAP202U	DIODE	
D603			IMSA-6801	SURGE ABSORBER	
D700			AM01Z	DIODE	
D701			DAP202U	DIODE	
D702			RM10ZLF	DIODE	
D703			HZS7A3L	ZENER DIODE	
D704			MA8056-M	ZENER DIODE	
D705			DAN202U	DIODE	
D707,708			DAP202U	DIODE	

PARTS LIST

* New Parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

ELECTRIC UNIT (X25-862X-XX)

Ref. No.	A d d	N e w	Parts No.	Description	Dest inati on
D709			HZS7A3L	ZENER DIODE	
D710			MA3047-M	ZENER DIODE	
D712			DAP202U	DIODE	
D713			DAN202U	DIODE	
D715-723			DA204U	DIODE	
D724			HZM6.8WA	ZENER DIODE	
D725			MA3056WA	ZENER DIODE	
D726			DAP202U	DIODE	
D727-733			DA204U	DIODE	
D734			DAN202U	DIODE	
D735-737			DA204U	DIODE	
D740-747			DA204U	DIODE	
D748			MA3056-M	ZENER DIODE	
IC10			ICL7660SIBA	ANALOGUE IC	
IC30			PST9130NR	ANALOGUE IC	
IC31		*	UPD784215GC206	MI-COM IC	
IC32		*	UPD72042BGT	MOS-IC	
IC33			TC7W02F	MOS-IC	
IC34			BR24C01AF-W	MEMORY IC	
IC40,41			BA3129F	IC(SWITCH)	
IC42,43			NJM4565M-TE2	ANALOGUE IC	
IC50			TDA7386	ANALOGUE IC	
IC51			TDA7401	ANALOGUE IC	
IC54			TC4W66F	IC	
IC55			TDA7400D	ANALOGUE IC	
IC56			TC4W66F	IC	
IC57-59			NJM4565M-TE2	ANALOGUE IC	
IC60			M5280FP	IC(ISOLATOR AMP)	
IC61			NJM4565M-TE2	ANALOGUE IC	MCH
IC61			NJM4565M-TE2	ANALOGUE IC	XEW
IC62			TDA7479D	ANALOGUE IC	
IC62			TDA7479D	ANALOGUE IC	KRME
IC65,66			BU4066BF	IC(ANALOG SWITCH X4)	W
IC70			M5237ML	IC(VOLTAGE REGULATOR)	
IC71			TA78DS05F	ANALOGUE IC	
IC72,73			NJM4565M-TE2	ANALOGUE IC	
IC74			NJM4565V	ANALOGUE IC	
IC75-77			M5237ML	IC(VOLTAGE REGULATOR)	
IC78			703035AGC-014	MI-COM IC	
IC79		*	PST9137NR	ANALOGUE IC	
IC80			NJM4565M-TE2	ANALOGUE IC	
IC83,84			M5280FP	IC(ISOLATOR AMP)	
IC85			HA12187FP	ANALOGUE IC	
IC86			CXA2089Q	MOS-IC	
IC87		*	M5280FP	IC(ISOLATOR AMP)	
IC88			M5222FP	ANALOGUE IC	
IC89			M5280FP	IC(ISOLATOR AMP)	
IC90			NJM2267V	ANALOGUE IC	
IC91			MM1234XFB	ANALOGUE IC	
IC92			NJM2267V	ANALOGUE IC	
Q100			DTC114EUA	DIGITAL TRANSISTOR	
Q101			DTA124EUA	DIGITAL TRANSISTOR	
Q102			2SA1576A	TRANSISTOR	
Q103			2SB1188(Q,R)	TRANSISTOR	
Q104			2SB1443	TRANSISTOR	

Ref. No.	A d d	N e w	Parts No.	Description	Dest inati on
Q105			2SC4081	TRANSISTOR	
Q106			2SA1576A	TRANSISTOR	
Q107			2SC4081	TRANSISTOR	
Q108			2SA1576A	TRANSISTOR	
Q109			2SC4081	TRANSISTOR	
Q110			2SA1576A	TRANSISTOR	
Q111			2SC4081	TRANSISTOR	
Q112			DTC114EUA	DIGITAL TRANSISTOR	KR
Q113			2SB1188(Q,R)	TRANSISTOR	KR
Q300			DTC144EUA	DIGITAL TRANSISTOR	
Q301			FMG2	DIGITAL TRANSISTOR	
Q302			FMA2	TRANSISTOR	
Q303			DTA124EUA	DIGITAL TRANSISTOR	
Q304			DTA144EUA	DIGITAL TRANSISTOR	
Q305			DTC144EUA	DIGITAL TRANSISTOR	
Q306			DTA123JK	DIGITAL TRANSISTOR	
Q500-502			DTC144EUA	DIGITAL TRANSISTOR	
Q503			DTA144EUA	DIGITAL TRANSISTOR	
Q504			2SD2114K	TRANSISTOR	
Q505,506			DTC144EUA	DIGITAL TRANSISTOR	
Q507			DTA124EUA	DIGITAL TRANSISTOR	
Q511			2SD2114K	TRANSISTOR	
Q512			DTA144EUA	DIGITAL TRANSISTOR	
Q513			DTC144EUA	DIGITAL TRANSISTOR	
Q514,515			DTC124EUA	DIGITAL TRANSISTOR	
Q516			DTA124EUA	DIGITAL TRANSISTOR	MCH
Q516			DTA124EUA	DIGITAL TRANSISTOR	XEW
Q517			DTC114TUA	DIGITAL TRANSISTOR	MCH
Q517			DTC114TUA	DIGITAL TRANSISTOR	XEW
Q518,519			2SB1277(Q,R)	TRANSISTOR	
Q520			DTC124EUA	DIGITAL TRANSISTOR	MCH
Q520			DTC124EUA	DIGITAL TRANSISTOR	XEW
Q521			2SC4081	TRANSISTOR	MCH
Q521			2SC4081	TRANSISTOR	XEW
Q522-525			2SD2114K	TRANSISTOR	
Q526			DTC144EUA	DIGITAL TRANSISTOR	
Q527			DTC124EUA	DIGITAL TRANSISTOR	
Q528			DTC144EUA	DIGITAL TRANSISTOR	
Q529			DTC124EUA	DIGITAL TRANSISTOR	
Q601			DTC144EUA	DIGITAL TRANSISTOR	
Q700			2SA1906	TRANSISTOR	
Q701			2SB1443	TRANSISTOR	
Q702			DTB123YK	DIGITAL TRANSISTOR	
Q703			2SC4081	TRANSISTOR	
Q704			DTC144EUA	DIGITAL TRANSISTOR	
Q705			2SB1565(E,F)	TRANSISTOR	
Q706			DTC144EUA	DIGITAL TRANSISTOR	
Q707			2SB1565(E,F)	TRANSISTOR	
Q708			2SB1443	TRANSISTOR	
Q709			2SA1906	TRANSISTOR	
Q710			2SA1576A	TRANSISTOR	
Q711,712			2SC4081	TRANSISTOR	
Q713-716			2SD2114K	TRANSISTOR	
Q718			DTC114YUA	DIGITAL TRANSISTOR	
Q719			DTA124EUA	DIGITAL TRANSISTOR	

K: KVT-910DVD (for North America)
E: KVT-920DVD (for Europe Without Italy)
H: KVT-930DVD (for Korea,Taiwan,Philippines)
X: KVT-940DVD (for Australia)

R: KVT-910DVD (for South America)
W: KVT-920DVD (for Italy)
M: KVT-930DVD (for Southeastern Asia)
C: KVT-960DVD (for China)

△ indicates safety critical components.

PARTS LIST

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	A d d	N e w	Parts No.	Description	Dest inati on
Q720 Q721,722 Q723 Q724 Q725			DTC144EUA 2SD2114K DTC144EUA FMG2 DTA124EUA	DIGITAL TRANSISTOR TRANSISTOR DIGITAL TRANSISTOR DIGITAL TRANSISTOR DIGITAL TRANSISTOR	
Q728,729 Q730 Q731,732 Q733 Q734			2SA1576A DTC144EUA 2SD2114K 2SB1443 DTC114YUA	TRANSISTOR DIGITAL TRANSISTOR TRANSISTOR TRANSISTOR DIGITAL TRANSISTOR	
Q735 Q736 Q737 Q738 Q739			DTC144EUA DTA124EUA DTC144EUA DTA124EUA DTC144EUA	DIGITAL TRANSISTOR DIGITAL TRANSISTOR DIGITAL TRANSISTOR DIGITAL TRANSISTOR DIGITAL TRANSISTOR	
Q740 Q741 Q742 Q743 Q744			DTA124EUA DTC144EUA DTA124EUA 2SB1184 2SC4081	DIGITAL TRANSISTOR DIGITAL TRANSISTOR DIGITAL TRANSISTOR TRANSISTOR TRANSISTOR	
TH50			PT722A100C	POSITIVE RESISTOR	
A500 A500 A500			W02-3119-15 W02-3163-05 W02-3163-05	FM/AM FRONT-END FM/AM FRONT-END FM/AM FRONT-END	KR MCH XEW
VIDEO UNIT (X35-418X-XX)					
D4 D4		*	B30-1606-05 B30-1606-05	LED LED	KRMC HX
C1 C2 C3 ,4 C5 ,6 C10			CK73GB1C104K C93-1126-05 CK73GB1H103K CK73GB1C104K CK73GB1H103K	CHIP C CERAMIC C CHIP C CHIP C CHIP C	0.10UF K 10UF 25WV 0.010UF K 0.10UF K 0.010UF K
C11 C21 C22 ,23 C24 C25 -27		*	C93-1129-05 C92-1493-05 CK73GB1H103K C92-1485-05 CK73GB1H103K	CERAMIC C ELECTRO CHIP C CHIP-C CHIP C	0.15UF 100WV 100UF 6.3V 0.010UF K 22UF 6.3WV 0.010UF K
C40 ,41 C42 C43 -45 C46 C47			CK73GB1C104K CC73GCH1H820J CK73GB1C104K CK73GB1A224K CC73GCH1H120J	CHIP C CHIP C CHIP C CHIP C CHIP C	0.10UF K 82PF J 0.10UF K 0.22UF K 12PF J
C48 C49 C51 ,52 C53 C54		*	C92-1479-05 CK73GB1C104K CK73GB1C104K CC73GCH1E102J CK73GB1C104K	ELECTRO CHIP C CHIP C CHIP C CHIP C	100UF 16WV 0.10UF K 0.10UF K 1000PF J 0.10UF K
C55 ,56 C57 C58 -60 C61 ,62 C63 -65			CC73GCH1H330J CK73FB1C105K CK73GB1C104K CC73GCH1H330J CK73GB1C104K	CHIP C CHIP C CHIP C CHIP C CHIP C	33PF J 1.0UF K 0.10UF K 33PF J 0.10UF K
C66			CC73GCH1H101J	CHIP C	100PF J

ELECTRIC UNIT (X25-862X-XX)

Ref. No.	A d d	N e w	Parts No.	Description	Dest inati on
C70 C71 C72 C73 C74			CK73GB1C104K CK73FB1C105K CC73GCH1H221J CC73GCH1E102J CC73GCH1H101J	CHIP C CHIP C CHIP C CHIP C CHIP C	0.10UF K 1.0UF K 220PF J 1000PF J 100PF J
C75 C76 C77 C78 C79			CK73FB1H104K CC73GCH1H561J CK73GB1C104K CC73GCH1H331J CK73FB1H104K	CHIP C CHIP C CHIP C CHIP C CHIP C	0.10UF K 560PF J 0.10UF K 330PF J 0.10UF K
C80 C81 C90 C91 C92 ,93			CK73GB1C104K CK73FB0J475K CK73GB1H103K C92-1480-05 CK73GB1H103K	CHIP C CHIP C CHIP C ELECTRO CHIP C	0.10UF K 4.7UF K 0.010UF K 22UF 6.3WV 0.010UF K
C94 ,95 C96 -101 C102 C103 C104			CK73DF1E106Z CK73GB1H103K CK73GB1C683K CK73GB1H103K CK73EB1A475K	CERAMIC CHIP C CHIP C CHIP C CHIP C	10UF 0.010UF K 0.068UF K 0.010UF K 4.7UF K
C105,106 C107 C108 C109 C110		*	CK73GB1H103K C92-1318-05 CK73GB1C683K CK73GB1H103K CK73GB1C104K	CHIP C TANTALUM C CHIP C CHIP C CHIP C	0.010UF K 10UF 16WV 0.068UF K 0.010UF K 0.10UF K
C111 C112,113 C114 C115 C116		*	CK73GB1C683K CK73GB1C104K C92-1485-05 CK73GB1H103K CK73EB1E105K	CHIP C CHIP C CHIP-C CHIP C CHIP C	0.068UF K 0.10UF K 22UF 6.3WV 0.010UF K 1.0UF K
C117,118 C119-121 C122 C123 C124			CK73GB1H103K CK73FB1C105K CK73EB1A475K CK73GB1H103K CK73DF1E106Z	CHIP C CHIP C CHIP C CHIP C CERAMIC	0.010UF K 1.0UF K 4.7UF K 0.010UF K 10UF
C125 C126 C130 C131-134 C140		*	C92-1481-05 CK73GB1H103K CK73GB1C104K CK73EB1E105K C92-1482-05	ELECTRO CHIP C CHIP C CHIP C ELECTRO	22UF 25WV 0.010UF K 0.10UF K 1.0UF K 33UF 25WV
C141 C142 C143-145 C146 C147		*	C92-1493-05 C92-1492-05 CK73GB1H103K C92-1494-05 C92-1467-05	ELECTRO ELECTRO CHIP C ELECTRO ELECTRO	100UF 6.3WV 33UF 16WV 0.010UF K 33UF 25WV 22UF 6.3WV
C148 C152 C153 C154 C155		*	C92-1494-05 CK73GB1H103K CK73GB1H471K CK73GB1E333K C92-1491-05	ELECTRO CHIP C CHIP C CHIP C ELECTRO	33UF 25WV 0.010UF K 470PF K 0.033UF K 47UF 35WV
C156 C157 C158 C160,161 C162,163			C92-0667-05 CK73GB1H103K CC73GCH1H101J CK73GB1H103K CC73GCH1H101J	ELECTRO CHIP C CHIP C CHIP C CHIP C	10UF 10WV 0.010UF K 100PF J 0.010UF K 100PF J

PARTS LIST

* New Parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

VIDEO UNIT (X35-418X-XX)

Ref. No.	A d d	N e w	Parts No.	Description	Dest inati on
C164-166			CC73GCH1H471J	CHIP C 470PF J	
C167			CK73GB1C104K	CHIP C 0.10UF K	
C168,169			CK73DF1E106Z	CERAMIC 10UF	
C170			CK73EB1E105K	CHIP C 1.0UF K	
C171			CK73FB1H104K	CHIP C 0.10UF K	
C172,173			CK73DF1C106Z	CERAMIC 10UF	
C174			CC73GCH1H471J	CHIP C 470PF J	
CN1			E40-5823-05	FLAT CABLE CONNECTOR	
CN2		*	E40-9797-05	PIN ASSY	
CN20		*	E41-0078-05	FLAT CABLE CONNECTOR	
CN21		*	E40-9796-05	FLAT CABLE CONNECTOR	
CN22			E40-5823-05	FLAT CABLE CONNECTOR	
CN23		*	E40-9798-05	FLAT CABLE CONNECTOR	
CN30		*	E40-9799-05	PIN ASSY	
CN31		*	E41-0078-05	FLAT CABLE CONNECTOR	
CN32		*	E41-0079-05	FLAT CABLE CONNECTOR	
CN33			E40-8078-05	PIN ASSY	
CN34		*	E40-9708-05	PIN ASSY	
F1		*	F53-0198-05	FUSE (1.5A)	
F140		*	F53-0210-05	FUSE (0.5A)	
L1		*	L33-1174-05	CHOKE COIL	
L2		*	L19-0592-05	TRANSFORMER FOR CONVERTER	
L20, 21			L40-1001-78	SMALL FIXED INDUCTOR(10UH)	
L40			L40-1001-78	SMALL FIXED INDUCTOR(10UH)	
L41			L40-1505-34	SMALL FIXED INDUCTOR(15UH)	
L70			L40-2795-34	SMALL FIXED INDUCTOR(2.7UH)	
L91 -93			L40-1001-78	SMALL FIXED INDUCTOR(10UH)	
L140			L40-1011-18	SMALL FIXED INDUCTOR	
L141			L33-1106-05	CHOKE COIL	
L142			L40-1011-18	SMALL FIXED INDUCTOR	
L143		*	L19-0593-05	TRANSFORMER FOR CONVERTER	
L144			L33-1057-05	SMALL FIXED INDUCTOR	
L160-162			L40-1001-78	SMALL FIXED INDUCTOR(10UH)	
CP160			R90-0724-05	MULTI-COMP 1K X4	
R1			RK73GB1J100J	CHIP R 10 J 1/16W	
R2			RN73GH1J332D	CHIP R 3.3K D 1/16W	
R3			RN73GH1J243D	CHIP R 24K D 1/16W	
R4			RK73GB1J473J	CHIP R 47K J 1/16W	
R5, 6			RK73GB1J105J	CHIP R 1.0M J 1/16W	
R7			RK73GB1J515J	CHIP R 5.1M J 1/16W	
R8			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R9			RK73GB1J390J	CHIP R 39 J 1/16W	
R10		*	RK73GH1J224D	CHIP R 220K D 1/16W	
R11			RK73GB1J103J	CHIP R 10K J 1/16W	
R12			RK73GH1J184D	CHIP R 180K D 1/16W	
R14, 15			RK73EB2B102J	CHIP R 1.0K J 1/8W	
R16			RK73GB1J751J	CHIP R 750 J 1/16W	
R17			RK73FB2A271J	CHIP R 270 J 1/10W	KRMC
R17			RK73FB2A271J	CHIP R 270 J 1/10W	
R18		*	RK73GH1J224D	CHIP R 220K D 1/16W	HX
R19		*	RK73GH1J154D	CHIP R 150K D 1/16W	
R20			RK73GB1J153J	CHIP R 15K J 1/16W	
R22			RK73EB2B472J	CHIP R 4.7K J 1/8W	

Ref. No.	A d d	N e w	Parts No.	Description	Dest inati on
R23			RK73GB1J103J	CHIP R 10K J 1/16W	
R24			RK73EB2B472J	CHIP R 4.7K J 1/8W	
R25			RK73EB2B561J	CHIP R 560 J 1/8W	
R26, 27			RK73GB1J333J	CHIP R 33K J 1/16W	
R28 -31			RK73EB2B100J	CHIP R 10 J 1/8W	
R32			RK73EB2B561J	CHIP R 560 J 1/8W	
R33		*	RN73GH1J512D	CHIP R 5.1K D 1/16W	
R40			RK73GB1J224J	CHIP R 220K J 1/16W	
R41			RK73GB1J564J	CHIP R 560K J 1/16W	
R43			RN73GH1J391D	CHIP R 390 D 1/16W	
R44			RK73GB1J564J	CHIP R 560K J 1/16W	
R45 -48			RK73GB1J561J	CHIP R 560 J 1/16W	
R49			RK73GB1J105J	CHIP R 1.0M J 1/16W	
R50 -59			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R70			RN73GH1J362D	CHIP R 3.6K D 1/16W	
R71			RK73GB1J272J	CHIP R 2.7K J 1/16W	
R72			RK73GB1J101J	CHIP R 100 J 1/16W	
R73			RK73GB1J683J	CHIP R 68K J 1/16W	
R74			RK73GB1J473J	CHIP R 47K J 1/16W	
R75			RK73GB1J243J	CHIP R 24K J 1/16W	
R76			RK73GB1J103J	CHIP R 10K J 1/16W	
R77			RK73GB1J683J	CHIP R 68K J 1/16W	
R78			RN73GH1J562D	CHIP R 5.6K D 1/16W	
R79			RK73GB1J105J	CHIP R 1.0M J 1/16W	
R80			RK73GB1J272J	CHIP R 2.7K J 1/16W	
R81			RK73GB1J331J	CHIP R 330 J 1/16W	
R82			RK73GB1J122J	CHIP R 1.2K J 1/16W	
R83			RK73GB1J822J	CHIP R 8.2K J 1/16W	
R90			RK73FB2A681J	CHIP R 680 J 1/10W	
R91			RK73FB2A102J	CHIP R 1.0K J 1/10W	
R92, 93			RK73GB1J203J	CHIP R 20K J 1/16W	
R94			RK73GB1J123J	CHIP R 12K J 1/16W	
R95			RK73GB1J153J	CHIP R 15K J 1/16W	
R96, 97			RK73GB1J183J	CHIP R 18K J 1/16W	
R98			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R99, 100			RK73GB1J303J	CHIP R 30K J 1/16W	
R101			RK73GB1J243J	CHIP R 24K J 1/16W	
R102			RK73GB1J273J	CHIP R 27K J 1/16W	
R103, 104			RK73GB1J223J	CHIP R 22K J 1/16W	
R105			RK73GB1J154J	CHIP R 150K J 1/16W	
R106			RK73GB1J101J	CHIP R 100 J 1/16W	
R107			RK73GB1J471J	CHIP R 470 J 1/16W	
R108			RK73GB1J333J	CHIP R 33K J 1/16W	
R109			RK73GB1J303J	CHIP R 30K J 1/16W	
R110			RK73GB1J433J	CHIP R 43K J 1/16W	
R111			RK73GB1J101J	CHIP R 100 J 1/16W	
R112			RK73GB1J103J	CHIP R 10K J 1/16W	
R113			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R114			RK73GB1J123J	CHIP R 12K J 1/16W	
R115, 116			RK73GB1J101J	CHIP R 100 J 1/16W	
R117			RK73GB1J822J	CHIP R 8.2K J 1/16W	
R118			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R119			RK73GB1J271J	CHIP R 270 J 1/16W	
R120			RK73GB1J822J	CHIP R 8.2K J 1/16W	
R121			RK73GB1J222J	CHIP R 2.2K J 1/16W	

K: KVT-910DVD (for North America)
E: KVT-920DVD (for Europe Without Italy)
H: KVT-930DVD (for Korea, Taiwan, Philippines)
X: KVT-940DVD (for Australia)

R: KVT-910DVD (for North America)
W: KVT-920DVD (for Italy)
M: KVT-930DVD (for Southeastern Asia)
C: KVT-960DVD (for China)

△ indicates safety critical components.

PARTS LIST

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	A d d	N e w	Parts No.	Description	Des t i n a t i o n
R122			RK73GB1J123J	CHIP R 12K J 1/16W	
R123			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R124			RK73GB1J103J	CHIP R 10K J 1/16W	
R125			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R126			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R127			RK73FB2A150J	CHIP R 15 J 1/10W	
R140			RN73GH1J103D	CHIP R 10K D 1/16W	
R141			RK73GB1J101J	CHIP R 100 J 1/16W	
R142			RN73GH1J112D	CHIP R 1.1K D 1/16W	
R144			RK73GB1J684J	CHIP R 680K J 1/16W	
R145			RK73GB1J333J	CHIP R 33K J 1/16W	
R146			RK73GB1J184J	CHIP R 180K J 1/16W	
R147			RK73GB1J754J	CHIP R 750K J 1/16W	
R160			RK73GB1J561J	CHIP R 560 J 1/16W	
R161			RN73GH1J242D	CHIP R 2.4K D 1/16W	
R162			RK73GB1J103J	CHIP R 10K J 1/16W	
R163			RN73GH1J332D	CHIP R 3.3K D 1/16W	
R164-166			RK73GB1J561J	CHIP R 560 J 1/16W	
R168-171			RK73GB1J471J	CHIP R 470 J 1/16W	
R172			RK73GB1J561J	CHIP R 560 J 1/16W	
R180			RK73GB1J123J	CHIP R 12K J 1/16W	
VR40			R32-0246-05	SEMI FIXED VARIABLE RESISTOR	
VR70			R32-0244-05	SEMI FIXED VARIABLE RESISTOR	
VR90			R32-0235-05	SEMI FIXED VARIABLE RESISTOR	
VR91			R32-0245-05	SEMI FIXED VARIABLE RESISTOR	
VR92,93			R32-0235-05	SEMI FIXED VARIABLE RESISTOR	
VR94-96			R32-0245-05	SEMI FIXED VARIABLE RESISTOR	
W130,131			R92-1252-05	CHIP R 0 OHM	
W140			R92-1252-05	CHIP R 0 OHM	
S1			S70-0841-05	TACT SWITCH	
S20		*	S68-0855-05	PUSH SWITCH	
S21 ,22			S70-0841-05	TACT SWITCH	
D2			RB160L-40	DIODE	
D3			1SS193	DIODE	
D5			1SS193	DIODE	
D6		*	UMZ6.8N	ZENER DIODE	
D23 ,24			DA204U	DIODE	
D40			MA716	DIODE	
D70			MA152K	DIODE	
D71			MA335	VARIABLE CAPACITANCE DIODE	
D72 ,73			MA3051-M	ZENER DIODE	
D90			MA3082-M	ZENER DIODE	
D91			DAN202U	DIODE	
D120			MA716	DIODE	
D140			SB05-05CP	DIODE	
D141,142			1SS184	DIODE	
D160			MA3051-M	ZENER DIODE	
D161,162			MA3056WA	ZENER DIODE	
D163			MA8056-M	ZENER DIODE	
IC1		*	TL5001ID	ANALOGUE IC	
IC2			NJM2403V	ANALOGUE IC	
IC20			PNA4603H	ANALOGUE IC	
IC40		*	LZ9GJ24	MOS-IC	
IC70			NJM2107F	ANALOGUE IC	

VIDEO UNIT (X35-418X-XX)

Ref. No.	A d d	N e w	Parts No.	Description	Des t i n a t i o n
IC90		*	IR3Y26A1	ANALOGUE IC	
IC91			NJM4580V	ANALOGUE IC	
IC130			TC74AC74FT	MOS-IC	
IC140			NJM2368V	ANALOGUE IC	
IC180			TC7WH123FU	ANALOGUE IC	
Q1			2SC2412K	TRANSISTOR	
Q2			2SA1037K	TRANSISTOR	
Q3 ,4			2SC2873	TRANSISTOR	
Q5			DTC124EUA	DIGITAL TRANSISTOR	KRMC HX
Q5			DTC124EUA	DIGITAL TRANSISTOR	
Q6		*	2SJ518	FET	
Q20			DTC124EUA	DIGITAL TRANSISTOR	
Q21			DTA124EUA	DIGITAL TRANSISTOR	
Q22 ,23			DTC124EUA	DIGITAL TRANSISTOR	
Q24			DTA124EUA	DIGITAL TRANSISTOR	
Q25			DTC124EUA	DIGITAL TRANSISTOR	
Q40			DTC124EUA	DIGITAL TRANSISTOR	
Q70			2SC2411K	TRANSISTOR	
Q90 ,91			2SC4081	TRANSISTOR	
Q140		*	2SC5566	TRANSISTOR	
DVD UNIT (X37-1010-02)					
C1 -6			CK73GB1C104K	CHIP C 0.10UF K	
C7 -10			CK73GB1H222K	CHIP C 2200PF K	
C11			CC73GCH1H271J	CHIP C 270PF J	
C12 ,13			C92-0628-05	CHIP-TAN 10UF 10WV	
C14			CK73GB1C104K	CHIP C 0.10UF K	
C15			C92-0628-05	CHIP-TAN 10UF 10WV	
C16			CK73GB1H102K	CHIP C 1000PF K	
C17			C92-0635-05	CHIP-TAN 10UF 6.3WV	
C18 -25			CK73GB1C104K	CHIP C 0.10UF K	
C26 ,27			CK73GB1C333K	CHIP C 0.033UF K	
C28			CK73GB1E473K	CHIP C 0.047UF K	
C29			CK73GB1C104K	CHIP C 0.10UF K	
C30			CC73GCH1H681J	CHIP C 680PF J	
C31			CK73GB1H102K	CHIP C 1000PF K	
C32			CK73FB1C224K	CHIP C 0.22UF K	
C33			C92-0628-05	CHIP-TAN 10UF 10WV	
C34 -37			CK73GB1C104K	CHIP C 0.10UF K	
C38			CC73GCH1H151J	CHIP C 150PF J	
C39 -42			CK73GB1C104K	CHIP C 0.10UF K	
C43			CC73GCH1H101J	CHIP C 100PF J	
C44			C92-0628-05	CHIP-TAN 10UF 10WV	
C45			CK73EB1C225K	CHIP C 2.2UF K	
C46 ,47			CK73GB1H102K	CHIP C 1000PF K	
C48 ,49			CK73GB1E223K	CHIP C 0.022UF K	
C50 -52			CK73FB1A105K	CHIP C 1.0UF K	
C53 ,54			CK73EB1A475K	CHIP C 4.7UF K	
C55 -59			CK73GB1H102K	CHIP C 1000PF K	
C60			CK73GB1H103K	CHIP C 0.010UF K	
C61 ,62			CK73FB1A105K	CHIP C 1.0UF K	
C63 ,64			CK73EB1A475K	CHIP C 4.7UF K	
C65			CK73GB1C104K	CHIP C 0.10UF K	
C66			CC73GCH1H471J	CHIP C 470PF J	
C67			CC73GCH1H101J	CHIP C 100PF J	
C68			CK73GB1H103K	CHIP C 0.010UF K	

PARTS LIST

* New Parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

DVD UNIT (X37-1010-02)

Ref. No.	A d d	N e w	Parts No.	Description	Dest inati on
C69,70			CK73GB1C104K	CHIP C 0.10UF K	
C71			CK73FB1C474K	CHIP C 0.47UF K	
C72-75			CK73GB1C104K	CHIP C 0.10UF K	
C76			C92-0628-05	CHIP-TAN 10UF 10WV	
C77			CK73GB1H102K	CHIP C 1000PF K	
C78-80			CK73GB1C104K	CHIP C 0.10UF K	
C81			CK73GB1H103K	CHIP C 0.010UF K	
C82			CC73GCH1H101J	CHIP C 100PF J	
C83			CK73GB1C104K	CHIP C 0.10UF K	
C84			CK73GB1H103K	CHIP C 0.010UF K	
C85			CK73GB1C104K	CHIP C 0.10UF K	
C86			CK73FB1C474K	CHIP C 0.47UF K	
C87			C92-0628-05	CHIP-TAN 10UF 10WV	
C88-107			CK73GB1C104K	CHIP C 0.10UF K	
C108			C92-0635-05	ELECTRO 10UF 6.3WV	
C109,110			C92-0628-05	CHIP-TAN 10UF 10WV	
C111-114			CK73GB1C104K	CHIP C 0.10UF K	
C115			C92-0628-05	CHIP-TAN 10UF 10WV	
C116			CK73GB1H102K	CHIP C 1000PF K	
C118			CK73GB1H103K	CHIP C 0.010UF K	
C119-121			CK73FB1A105K	CHIP C 1.0UF K	
C122			CK73GB1C104K	CHIP C 0.10UF K	
C123			CC73GCH1H221J	CHIP C 220PF J	
C124			CK73GB1H152K	CHIP C 1500PF K	
C125			CK73GB1C104K	CHIP C 0.10UF K	
C126			CK73GB1C823K	CHIP C 0.082UF K	
C127			CC73GCH1H151J	CHIP C 150PF J	
C128			CK73GB1H102K	CHIP C 1000PF K	
C129			CK73GB1C104K	CHIP C 0.10UF K	
C130			CK73GB0J105K	CHIP C 1.0UF K	
C131			CK73GB1H103K	CHIP C 0.010UF K	
C132			C92-0628-05	CHIP-TAN 10UF 10WV	
C133			CK73GB1C104K	CHIP C 0.10UF K	
C135			CK73GB1C104K	CHIP C 0.10UF K	
C136			CC73GCH1H101J	CHIP C 100PF J	
C137			CK73GB1E223K	CHIP C 0.022UF K	
C138			CK73GB1C104K	CHIP C 0.10UF K	
C139			CC73GCH1H221J	CHIP C 220PF J	
C140			CK73GB1C104K	CHIP C 0.10UF K	
C141			CK73GB1H102K	CHIP C 1000PF K	
C142			CK73GB1C104K	CHIP C 0.10UF K	
C143			C92-0628-05	CHIP-TAN 10UF 10WV	
C144			CK73GB1C104K	CHIP C 0.10UF K	
C145			C92-0628-05	CHIP-TAN 10UF 10WV	
C146			CC73GCH1H101J	CHIP C 100PF J	
C147			CK73EB1C225K	CHIP C 2.2UF K	
C148			CK73GB1H103K	CHIP C 0.010UF K	
C149-152			CK73GB1C104K	CHIP C 0.10UF K	
C153			CK73EB0J106K	CHIP C 10UF K	
C154,155			CK73GB1C104K	CHIP C 0.10UF K	
C157		*	C92-1452-05	ELECTRO 100UF 10WV	
C158			CK73EB0J106K	CHIP C 10UF K	
C159,160			CK73FB1A105K	CHIP C 1.0UF K	
C161			CK73GB1C104K	CHIP C 0.10UF K	
C199			CK73GB1E473K	CHIP C 0.047UF K	

Ref. No.	A d d	N e w	Parts No.	Description	Dest inati on
C200			CK73GB1C104K	CHIP C 0.10UF K	
CN1		*	E40-9782-05	FLAT CABLE CONNECTOR	
CN2		*	E40-9744-05	FLAT CABLE CONNECTOR	
CN3		*	E40-9617-05	PIN ASSY	
CN6		*	E40-9745-05	PIN ASSY	
CN20		*	E41-0015-05	PIN ASSY	
L1			L40-1001-78	SMALL FIXED INDUCTOR(10UH)	
L2 -6			L92-0308-05	FERRITE CORE	
L7		*	L92-0336-05	CHIP FERRITE	
L8 -10			L92-0308-05	FERRITE CORE	
L17		*	L92-0336-05	CHIP FERRITE	
L20		*	L92-0336-05	CHIP FERRITE	
X1		*	L78-0801-05	RESONATOR (CSTCV33.86MXJ)	
X2		*	L78-0811-05	RESONATOR (CSTCV16.00MXJ)	
CP2			R90-1013-05	MULTI-COMP 2.2K X2	
CP3		*	R90-1033-05	MULTI-COMP 22 X4	
CP4			R90-1031-05	MULTI-COMP 22 X2	
CP5		*	R90-1033-05	MULTI-COMP 22 X4	
CP6		*	R90-1018-05	MULTI-COMP 82 X4	
CP7			R90-1012-05	MULTI-COMP 22 X4	
CP8			R90-1031-05	MULTI-COMP 22 X2	
CP9		*	R90-1033-05	MULTI-COMP 22 X4	
CP11			R90-1031-05	MULTI-COMP 22 X2	
CP12,13			R90-0720-05	MULTI-COMP 100K X4	
CP14-17		*	R90-1033-05	MULTI-COMP 22 X4	
CP18			R90-0719-05	MULTI-COMP 4.7K X2	
CP19			R90-0737-05	MULTI-COMP 100K X2	
CP20,21		*	R90-1018-05	MULTI-COMP 82 X4	
CP22			R90-1031-05	MULTI-COMP 22 X2	
CP23-26		*	R90-1033-05	MULTI-COMP 22 X4	
CP27-30		*	R90-1032-05	MULTI-COMP 12K X4	
CP31			R90-0720-05	MULTI-COMP 100K X4	
CP32		*	R90-1033-05	MULTI-COMP 22 X4	
CP33		*	R90-1032-05	MULTI-COMP 12K X4	
CP34,35		*	R90-1059-05	MULTI-COMP 12K X2	
R1 ,2			RK73GB1J910J	CHIP R 91 J 1/16W	
R3 -6			RK73GB1J152J	CHIP R 1.5K J 1/16W	
R7 ,8			RK73GB1J332J	CHIP R 3.3K J 1/16W	
R9 ,10			RK73GB1J123J	CHIP R 12K J 1/16W	
R11			RK73GB1J223J	CHIP R 22K J 1/16W	
R12			R92-3273-05	CHIP R 6.8 F 1/4W	
R13			RK73GB1J223J	CHIP R 22K J 1/16W	
R14 ,15			RK73GB1J100J	CHIP R 10 J 1/16W	
R16		*	RK73GH1J123D	CHIP R 12K D 1/16W	
R17			RK73GB1J103J	CHIP R 10K J 1/16W	
R18			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R19			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R20			RK73GB1J220J	CHIP R 22 J 1/16W	
R21			RK73GB1J101J	CHIP R 100 J 1/16W	
R22			RK73GB1J512J	CHIP R 5.1K J 1/16W	
R23			RK73GB1J204J	CHIP R 200K J 1/16W	
R24			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R25			RK73GB1J473J	CHIP R 47K J 1/16W	
R26			RK73GB1J102J	CHIP R 1.0K J 1/16W	

K: KVT-910DVD (for North America)
 E: KVT-920DVD (for Europe Without Italy)
 H: KVT-930DVD (for Korea,Taiwan,Philippines)
 X: KVT-940DVD (for Australia)

R: KVT-910DVD (for South America)
 W: KVT-920DVD (for Italy)
 M: KVT-930DVD (for Southeastern Asia)
 C: KVT-960DVD (for China)

△ indicates safety critical components.

PARTS LIST

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	A d d	N e w	Parts No.	Description	Dest inati on
R27			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R28			RK73GB1J332J	CHIP R 3.3K J 1/16W	
R29			RK73GB1J243J	CHIP R 24K J 1/16W	
R30			RK73GB1J105J	CHIP R 1.0M J 1/16W	
R31			RK73GB1J152J	CHIP R 1.5K J 1/16W	
R32 -34			RK73GB1J103J	CHIP R 10K J 1/16W	
R35			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R36			RK73GB1J334J	CHIP R 330K J 1/16W	
R37			RK73GB1J103J	CHIP R 10K J 1/16W	
R38			RK73GB1J105J	CHIP R 1.0M J 1/16W	
R39			RK73GB1J153J	CHIP R 15K J 1/16W	
R40			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R41			RK73GB1J122J	CHIP R 1.2K J 1/16W	
R42			RK73GB1J332J	CHIP R 3.3K J 1/16W	
R43 ,44			RK73GB1J103J	CHIP R 10K J 1/16W	
R45			RK73GB1J105J	CHIP R 1.0M J 1/16W	
R46			RK73GB1J101J	CHIP R 100 J 1/16W	
R47			RK73GB1J332J	CHIP R 3.3K J 1/16W	
R48			RK73FB2A100J	CHIP R 10 J 1/10W	
R49			RK73GB1J103J	CHIP R 10K J 1/16W	
R50			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R51		*	RK73GH1J752D	CHIP R 7.5K D 1/16W	
R52		*	RK73GH1J113D	CHIP R 11K D 1/16W	
R53		*	RK73GH1J752D	CHIP R 7.5K D 1/16W	
R54		*	RK73GH1J113D	CHIP R 11K D 1/16W	
R55 -58			RK73GH1J472D	CHIP R 4.7K D 1/16W	
R59 ,60			RK73GH1J103D	CHIP R 10K D 1/16W	
R61			RK73GB1J103J	CHIP R 10K J 1/16W	
R62 ,63			RK73GB1J154J	CHIP R 150K J 1/16W	
R64			RK73GB1J103J	CHIP R 10K J 1/16W	
R65			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R66			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R67			RK73FB2A100J	CHIP R 10 J 1/10W	
R68			RK73GH1J472D	CHIP R 4.7K D 1/16W	
R69			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R70			RK73GH1J472D	CHIP R 4.7K D 1/16W	
R71			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R72			RK73GB1J471J	CHIP R 470 J 1/16W	
R73 ,74			RK73GH1J273D	CHIP R 27K D 1/16W	
R76 ,77			RK73GB1J103J	CHIP R 10K J 1/16W	
R78			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R79			RK73FB2A4R7J	CHIP R 4.7 J 1/10W	
R80		*	R92-3099-05	CHIP R 0.22 J 1/2W	
R81 ,82			RK73GB1J103J	CHIP R 10K J 1/16W	
R83			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R84 ,85			RK73GB1J103J	CHIP R 10K J 1/16W	
R86			RK73GB1J303J	CHIP R 30K J 1/16W	
R87			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R88			RK73GB1J105J	CHIP R 1.0M J 1/16W	
R89 ,90			RK73EB2B100J	CHIP R 10 J 1/8W	
R91			RK73GB1J332J	CHIP R 3.3K J 1/16W	
R92			RK73GB1J153J	CHIP R 15K J 1/16W	
R93			RK73GB1J242J	CHIP R 2.4K J 1/16W	
R94			RK73GB1J103J	CHIP R 10K J 1/16W	
R95			RK73GB1J101J	CHIP R 100 J 1/16W	

DVD UNIT (X37-1010-02)

Ref. No.	A d d	N e w	Parts No.	Description	Dest inati on
R96			RK73GB1J105J	CHIP R 1.0M J 1/16W	
R97			RK73GB1J683J	CHIP R 68K J 1/16W	
R98			RK73GB1J103J	CHIP R 10K J 1/16W	
R99			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R100			RK73GB1J103J	CHIP R 10K J 1/16W	
R101			RK73GB1J752J	CHIP R 7.5K J 1/16W	
R102,103			RK73GH1J103D	CHIP R 10K D 1/16W	
R104			RK73GB1J104J	CHIP R 100K J 1/16W	
R105			RK73GB1J103J	CHIP R 10K J 1/16W	
R106			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R107			RK73GB1J220J	CHIP R 22 J 1/16W	
R108			RK73GB1J330J	CHIP R 33 J 1/16W	
R109			RK73GB1J151J	CHIP R 150 J 1/16W	
R110			RK73GB1J103J	CHIP R 10K J 1/16W	
R111			RK73GB1J330J	CHIP R 33 J 1/16W	
R112			RK73GB1J104J	CHIP R 100K J 1/16W	
R113			RK73GB1J225J	CHIP R 2.2M J 1/16W	
R114			RK73GB1J105J	CHIP R 1.0M J 1/16W	
R115			RK73GB1J473J	CHIP R 47K J 1/16W	
R116			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R117			RK73GB1J184J	CHIP R 180K J 1/16W	
R118			RK73GB1J103J	CHIP R 10K J 1/16W	
R119			RK73GB1J104J	CHIP R 100K J 1/16W	
R120			RK73GB1J103J	CHIP R 10K J 1/16W	
R121			RK73GB1J333J	CHIP R 33K J 1/16W	
R122			RK73GB1J473J	CHIP R 47K J 1/16W	
R123			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R124			RK73GB1J333J	CHIP R 33K J 1/16W	
R125			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R126			RK73GB1J104J	CHIP R 100K J 1/16W	
R127,128			RK73GB1J220J	CHIP R 22 J 1/16W	
R129			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R130,131			RK73GB1J103J	CHIP R 10K J 1/16W	
R132,133			RK73GB1J104J	CHIP R 100K J 1/16W	
R134			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R135			RK73GB1J223J	CHIP R 22K J 1/16W	
R136			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R137			RK73GB1J223J	CHIP R 22K J 1/16W	
R138			RK73GH1J103D	CHIP R 10K D 1/16W	
R139			RK73GB1J474J	CHIP R 470K J 1/16W	
R140			RK73GB1J223J	CHIP R 22K J 1/16W	
R141			RK73GB1J474J	CHIP R 470K J 1/16W	
R143			RK73GB1J474J	CHIP R 470K J 1/16W	
R144			RK73GB1J220J	CHIP R 22 J 1/16W	
R145			RK73GB1J223J	CHIP R 22K J 1/16W	
R146			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R147			RK73GB1J101J	CHIP R 100 J 1/16W	
R148			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R149			RK73GB1J471J	CHIP R 470 J 1/16W	
R150			RK73GB1J220J	CHIP R 22 J 1/16W	
R151			RK73GB1J103J	CHIP R 10K J 1/16W	
R152,153			RK73GB1J104J	CHIP R 100K J 1/16W	
R154			RK73GB1J101J	CHIP R 100 J 1/16W	
R155			RK73GB1J204J	CHIP R 200K J 1/16W	
R156			RK73GB1J101J	CHIP R 100 J 1/16W	

PARTS LIST

* New Parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

DVD UNIT (X37-1010-02)

Ref. No.	A d d	N e w	Parts No.	Description	Dest ination
R157			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R158,159			RK73GB1J101J	CHIP R 100 J 1/16W	
R160			RK73GB1J220J	CHIP R 22 J 1/16W	
R161,162			RK73GH1J124D	CHIP R 120K D 1/16W	
R163,164			RK73GH1J203D	CHIP R 20K D 1/16W	
R165			RK73GB1J473J	CHIP R 47K J 1/16W	
R166			RK73GB1J103J	CHIP R 10K J 1/16W	
R167			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R168			RK73GB1J104J	CHIP R 100K J 1/16W	
R169-172			RK73GB1J332J	CHIP R 3.3K J 1/16W	
R173,174			RK73GB1J104J	CHIP R 100K J 1/16W	
R175			RK73GB1J473J	CHIP R 47K J 1/16W	
R197,198			RK73GB1J203J	CHIP R 20K J 1/16W	
R199			RK73GB1J123J	CHIP R 12K J 1/16W	
R200			RK73GB1J223J	CHIP R 22K J 1/16W	
W1			R92-1252-05	CHIP R 0 OHM	
W10			R92-1252-05	CHIP R 0 OHM	
D1 ,2			DAN217	DIODE	
D3			DAN202U	DIODE	
D4 ,5			DA114	DIODE	
D6			DAN202U	DIODE	
D7			DAN217	DIODE	
D8 -10		*	SB02-03Q	DIODE	
IC1		*	SP3721A	ANALOGUE IC	
IC2		*	NJM2125F	ANALOGUE IC	
IC3		*	NJU7093A	MOS-IC	
IC4		*	NJM2406F	ANALOGUE IC	
IC5		*	NJM2100M	MOS-IC	
IC6		*	LA6393M	ANALOGUE IC	
IC7		*	L88MS05T	ANALOGUE IC	
IC8		*	LA6553	ANALOGUE IC	
IC9		*	BD6661FV	ANALOGUE IC	
IC10		*	NJU7096AR	MOS-IC	
IC11		*	SN74AHC1G08D	MOS-IC	
IC12		*	NJM2125F	ANALOGUE IC	
IC13		*	SN74AHC1G08D	MOS-IC	
IC14		*	CXD1867R	MOS-IC	
IC15			L88M33T	ANALOGUE IC	
IC16		*	IS41C16256	MEMORY IC	
IC17		*	SN74AHC2GU04H	MOS-IC	
IC19		*	SN74AHC1GU04D	MOS-IC	
IC20			CXD3008Q	MOS-IC	
IC21		*	L88MS05T	ANALOGUE IC	
IC22		*	HD6433062G24XI	MI-COM IC	
IC23		*	BR24C04FV-W	MEMORY IC	
Q1 ,2			MCH6101	TRANSISTOR	
Q3			2SB1295	TRANSISTOR	
Q4		*	3LN01M	FET	
Q5			DTC124EUA	DIGITAL TRANSISTOR	
Q6		*	3LP01M	FET	
Q7			DTC124EUA	DIGITAL TRANSISTOR	
Q8			2SB1295	TRANSISTOR	
Q9			DTC124EUA	DIGITAL TRANSISTOR	
Q10			2SC4081	TRANSISTOR	

Ref. No.	A d d	N e w	Parts No.	Description	Dest ination
Q11			2SA1576A	TRANSISTOR	
Q12			2SC4081	TRANSISTOR	
Q13			DTC124EUA	DIGITAL TRANSISTOR	
Q14			2SB1295	TRANSISTOR	
Q15			DTC124EUA	DIGITAL TRANSISTOR	
Q16		*	3LP01M	FET	
Q17 ,18			DTC124EUA	DIGITAL TRANSISTOR	
Q23			DTC124EUA	DIGITAL TRANSISTOR	
Q24			2SB1295	TRANSISTOR	
Q25		*	3LN01M	FET	
Q26			UMC2N	TRANSISTOR	
Q27			CPH3105	TRANSISTOR	
TUNER UNIT (X86-323X-XX)					
C1 -4			CC73GCH1H101J	CHIP C 100PF J	
C5			CK73GB1H222K	CHIP C 2200PF K	
C6 ,7			CC73GCH1H101J	CHIP C 100PF J	
C8			CK73GB1C104K	CHIP C 0.10UF K	EW
C8			CK73GB1H104K	CHIP C 0.10UF K	EW
C9 ,10			CC73GCH1H101J	CHIP C 100PF J	
C11			CK73GB1H103K	CHIP C 0.010UF K	KRMC
C11			CK73GB1H103K	CHIP C 0.010UF K	HX
C11 -14			CK73GB1H103K	CHIP C 0.010UF K	EW
C15 -18			CK73GB1H102K	CHIP C 1000PF K	
C19			CK73GB1E223K	CHIP C 0.022UF K	
C19			CK73GB1H223K	CHIP C 0.022UF K	
C20			CK73GB1H472K	CHIP C 4700PF K	
C21			CK73GB1H332K	CHIP C 3300PF K	
C22 ,23			CK73GB1H103K	CHIP C 0.010UF K	
C24			CE04NWOJ470M	ELECTRO 47UF 6.3WV	
C25			CC73GCH1H330J	CHIP C 33PF J	
C26 ,27			CK73GB1H222K	CHIP C 2200PF K	EW
C28			CK73GB1H103K	CHIP C 0.010UF K	
C29 -32			CC73GCH1H101J	CHIP C 100PF J	
C33			CK73GB1H222K	CHIP C 2200PF K	EW
C34 ,35			CK73GB1H103K	CHIP C 0.010UF K	EW
C38			CK73GB1H103K	CHIP C 0.010UF K	
C39			CK73GB1H222K	CHIP C 2200PF K	
C40			CK73GB1H102K	CHIP C 1000PF K	
C41			CE04NW1H4R7M	ELECTRO 4.7UF 50WV	
C42			CK73GB1H103K	CHIP C 0.010UF K	
C43			CE04NWOJ470M	ELECTRO 47UF 6.3WV	
C44			CK73GB1H103K	CHIP C 0.010UF K	
C45 ,46			CE04DW1A221M	ELECTRO 220UF 10WV	
C47			CK73GB1H222K	CHIP C 2200PF K	
C48			CE04NW1C220M	ELECTRO 22UF 16WV	
C49			CK73GB1H103K	CHIP C 0.010UF K	
C50 ,51			CE04NW1H4R7M	ELECTRO 4.7UF 50WV	
C52			CE04NW1C330M	ELECTRO 33UF 16WV	
C53 -56			CC73GCH1H101J	CHIP C 100PF J	
C57			CK73GB1H103K	CHIP C 0.010UF K	
C58 -63			CK73GB1H102K	CHIP C 1000PF K	
C101			CC73GCH1H221J	CHIP C 220PF J	
C102			CK73GB1H103K	CHIP C 0.010UF K	
C103			CK73GB1E223K	CHIP C 0.022UF K	

K: KVT-910DVD (for North America)
 E: KVT-920DVD (for Europe Without Italy)
 H: KVT-930DVD (for Korea,Taiwan,Philippines)
 X: KVT-940DVD (for Australia)

R: KVT-910DVD (for South America)
 W: KVT-920DVD (for Italy)
 M: KVT-930DVD (for Southeastern Asia)
 C: KVT-960DVD (for China)

△ indicates safety critical components.

PARTS LIST

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

TUNER UNIT (X86-323X-XX)

Ref. No.	A d d	N e w	Parts No.	Description	Dest inati on
C103			CK73GB1H223K	CHIP C 0.022UF K	
C104,105			CK73GB1C104K	CHIP C 0.10UF K	
C104,105			CK73GB1H104K	CHIP C 0.10UF K	
C106			CK73GB1H103K	CHIP C 0.010UF K	
C107			CK73GB1C104K	CHIP C 0.10UF K	
C107			CK73GB1H104K	CHIP C 0.10UF K	
C108			CK73GB1H103K	CHIP C 0.010UF K	
C109			CK73GB1E223K	CHIP C 0.022UF K	
C109			CK73GB1H223K	CHIP C 0.022UF K	
C110,111			CK73GB1C104K	CHIP C 0.10UF K	
C110,111			CK73GB1H104K	CHIP C 0.10UF K	
C112			CC73GCH1H100D	CHIP C 10PF D	KRH
C112,113			CC73GCH1H100D	CHIP C 10PF D	MCX
C112,113			CC73GCH1H100D	CHIP C 10PF D	EW
C114			CK73GB1H103K	CHIP C 0.010UF K	
C115			CC73GCH1H560J	CHIP C 56PF J	
C116			CK73GB1H222K	CHIP C 2200PF K	EW
C117			CC73GCH1H220J	CHIP C 22PF J	EW
C118			CK73GB1H102K	CHIP C 1000PF K	MCX
C118			CK73GB1H102K	CHIP C 1000PF K	EW
C119			CK73GB1H103K	CHIP C 0.010UF K	KRMC
C119			CK73GB1H103K	CHIP C 0.010UF K	HX
C120			CE04NW1C470M	ELECTRO 47UF 16WV	
C121			CK73GB1H103K	CHIP C 0.010UF K	
C122			CK73GB1E473K	CHIP C 0.047UF K	
C122			CK73GB1H473K	CHIP C 0.047UF K	
C123			CK73GB1H103K	CHIP C 0.010UF K	
C124			CE04NW1C470M	ELECTRO 47UF 16WV	KRMC
C124			CE04NW1C470M	ELECTRO 47UF 16WV	HX
C125			CK73GB1A474K	CHIP C 0.47UF K	EW
C125			CK73GB1E473K	CHIP C 0.047UF K	KRMC
C125			CK73GB1E473K	CHIP C 0.047UF K	HX
C125			CK73GB1H473K	CHIP C 0.047UF K	KRMC
C126			CK73GB1C104K	CHIP C 0.10UF K	HX
C126			CK73GB1H104K	CHIP C 0.10UF K	
C127			CC73GCH1H471J	CHIP C 470PF J	
C128			CK73GB1H472K	CHIP C 4700PF K	
C129			CK73GB1C104K	CHIP C 0.10UF K	
C129			CK73GB1H104K	CHIP C 0.10UF K	
C130			CC73GCH1H330J	CHIP C 33PF J	
C131			CC73GCH1H270J	CHIP C 27PF J	
C132			CK73GB1H102K	CHIP C 1000PF K	
C133			CK73GB1C104K	CHIP C 0.10UF K	
C133			CK73GB1H104K	CHIP C 0.10UF K	
C134			CE04NW1H010M	ELECTRO 1.0UF 50WV	
C135			CK73GB1H222K	CHIP C 2200PF K	
C136			CK73GB1A224K	CHIP C 0.22UF K	
C137			CK73GB1H472K	CHIP C 4700PF K	
C138			CE04NW1H010M	ELECTRO 1.0UF 50WV	
C139			CK73GB1E473K	CHIP C 0.047UF K	
C139			CK73GB1H473K	CHIP C 0.047UF K	
C140			CK73GB1A224K	CHIP C 0.22UF K	
C141-143			CK73GB1H103K	CHIP C 0.010UF K	
C144			CE04NW1HR47M	ELECTRO 0.47UF 50WV	
C145			CC73GCH1H100D	CHIP C 10PF D	
C146			CE04NW1C470M	ELECTRO 47UF 16WV	
C147			CK73GB1C104K	CHIP C 0.10UF K	
C147			CK73GB1H104K	CHIP C 0.10UF K	
C148			CK73GB1E223K	CHIP C 0.022UF K	
C148			CK73GB1H223K	CHIP C 0.022UF K	
C149			CE04NW1H2R2M	ELECTRO 2.2UF 50WV	
C150			CK73GB1H103K	CHIP C 0.010UF K	
C151			CK73GB1C104K	CHIP C 0.10UF K	
C151			CK73GB1H104K	CHIP C 0.10UF K	
C152,153			CK73GB1H102K	CHIP C 1000PF K	
C154			CK73GB1C104K	CHIP C 0.10UF K	
C154			CK73GB1H104K	CHIP C 0.10UF K	
C155			CC73GCH1H101J	CHIP C 100PF J	EW
C156			CC73GCH1H101J	CHIP C 100PF J	KRMC
C156			CC73GCH1H101J	CHIP C 100PF J	
C157			CK73GB1A224K	CHIP C 0.22UF K	
C201			CE04NW1C100M	ELECTRO 10UF 16WV	
C202			CK73GB1H103K	CHIP C 0.010UF K	
C203			CK73GB1A224K	CHIP C 0.22UF K	
C203			CK73GB1A474K	CHIP C 0.47UF K	KRMC
C203			CK73GB1A474K	CHIP C 0.47UF K	HX
C204,205			CK73GB1H222K	CHIP C 2200PF K	
C206,207			CK73GB1E223K	CHIP C 0.022UF K	
C206,207			CK73GB1H223K	CHIP C 0.022UF K	
C208			CE04NW1HR47M	ELECTRO 0.47UF 50WV	
C209			CE04NW1E4R7M	ELECTRO 4.7UF 25WV	
C210-212			CK73GB1H103K	CHIP C 0.010UF K	
C211,212			CK73GB1H103K	CHIP C 0.010UF K	
C211,212			CK73GB1H103K	CHIP C 0.010UF K	
C213			CE04NW1C100M	ELECTRO 10UF 16WV	
C214			CK73GB1H103K	CHIP C 0.010UF K	
C218-220			CK73FB1C105K	CHIP C 1.0UF K	
C221			CK73GB1A474K	CHIP C 0.47UF K	KRMC
C221			CK73GB1A474K	CHIP C 0.47UF K	HX
C221			CK73GB1C104K	CHIP C 0.10UF K	
C221			CK73GB1H104K	CHIP C 0.10UF K	
C224			CK73GB1H103K	CHIP C 0.010UF K	
C225			CK73GB1C104K	CHIP C 0.10UF K	
C225			CK73GB1H104K	CHIP C 0.10UF K	
C226			CC73GCH1H560J	CHIP C 56PF J	
C227			CK73FB1C105K	CHIP C 1.0UF K	
C229,230			CK73GB1H103K	CHIP C 0.010UF K	
C231,232			CK73GB1E223K	CHIP C 0.022UF K	
C231,232			CK73GB1H153K	CHIP C 0.015UF K	KRH
C231,232			CK73GB1H153K	CHIP C 0.015UF K	MCX
C231,232			CK73GB1H223K	CHIP C 0.022UF K	
C233-236			CK73GB1H102K	CHIP C 1000PF K	
C237,238			CC73GCH1H121J	CHIP C 120PF J	
C239,240			CK73GB1H102K	CHIP C 1000PF K	
C241,242			CK73GB1H103K	CHIP C 0.010UF K	
C243			CE04NW1C470M	ELECTRO 47UF 16WV	
C245,246			CK73GB1A474K	CHIP C 0.47UF K	
CN1			E40-9527-05	FLAT CABLE CONNECTOR	

PARTS LIST

* New Parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

TUNER UNIT (X86-323X-XX)

Ref. No.	A d d	N e w	Parts No.	Description	Dest inati on
CN2			E40-9184-05	PIN ASSY	
CN3			E40-3640-05	PIN ASSY	
J1 -4			E11-0625-05	PHONE JACK	
CF1			L72-0766-05	CERAMIC FILTER	KRH
CF1			L72-0771-05	CERAMIC FILTER	MCX
CF2			L72-0758-05	CERAMIC FILTER	EW
CF3			L72-0759-05	CERAMIC FILTER	EW
CF101			L72-0742-05	CERAMIC FILTER	
CF102			L72-0707-05	CERAMIC FILTER	KRH
CF102			L72-0751-05	CERAMIC FILTER	MCX
CF103			L72-0751-05	CERAMIC FILTER	EW
L1			L40-1585-34	SMALL FIXED INDUCTOR(0.15UH)	
L2			L40-5685-34	SMALL FIXED INDUCTOR(0.56UH)	
L3			L40-1585-34	SMALL FIXED INDUCTOR(0.15UH)	
L4			L40-5685-34	SMALL FIXED INDUCTOR(0.56UH)	
L5			L40-1585-34	SMALL FIXED INDUCTOR(0.15UH)	
L6			L40-5685-34	SMALL FIXED INDUCTOR(0.56UH)	
L7			L40-1585-34	SMALL FIXED INDUCTOR(0.15UH)	
L8			L40-5685-34	SMALL FIXED INDUCTOR(0.56UH)	
L9			L40-6805-34	SMALL FIXED INDUCTOR	
L10			L92-0329-05	CHIP FERRITE	
L11			L40-2795-34	SMALL FIXED INDUCTOR(2.7UH)	EW
L12 , 13			L40-1295-34	SMALL FIXED INDUCTOR	EW
L13 , 14			L40-1095-34	SMALL FIXED INDUCTOR(1UH)	KRMC
L13 , 14			L40-1095-34	SMALL FIXED INDUCTOR(1UH)	HX
L14			L40-1095-34	SMALL FIXED INDUCTOR(1UH)	EW
L15 , 16			L40-1005-34	SMALL FIXED INDUCTOR	
L17			L33-1152-05	CHOKE COIL	
L101			L30-0756-05	TV IFT	
L102			L40-1005-34	SMALL FIXED INDUCTOR	KRH
L102			L40-8295-34	SMALL FIXED INDUCTOR(8.2UH)	MCX
L103			L30-0745-05	TV IFT	KRH
L103			L30-0749-05	TV IFT	MCX
L103			L30-0749-05	TV IFT	EW
L104			L40-1001-78	SMALL FIXED INDUCTOR(10UH)	
L105			L40-5695-34	SMALL FIXED INDUCTOR(5.6UH)	EW
L106			L40-1001-78	SMALL FIXED INDUCTOR(10UH)	
L201,202			L40-1005-34	SMALL FIXED INDUCTOR	EW
L202			L40-1005-34	SMALL FIXED INDUCTOR	KRMC
L202			L40-1005-34	SMALL FIXED INDUCTOR	HX
X101			L77-2084-05	CRYSTAL RESONATOR(30.55MHZ)	KRH
X102			L77-2100-05	CRYSTAL RESONATOR(21.80MHZ)	MCX
X102			L77-2720-05	CRYSTAL RESONATOR(22.70MHZ)	EW
X103			L77-2099-05	CRYSTAL RESONATOR(21.30MHZ)	MCX
X103			L77-2721-05	CRYSTAL RESONATOR(22.20MHZ)	EW
X104			L77-2098-05	CRYSTAL RESONATOR(20.80MHZ)	MCX
X104			L77-2722-05	CRYSTAL RESONATOR(21.70MHZ)	EW
X105			L77-2095-05	CRYSTAL RESONATOR(3.58MHZ)	
X106			L77-2096-05	CRYSTAL RESONATOR(4.43MHZ)	
R1			RK73GB1J471J	CHIP R 470 J 1/16W	
R2 -5			RK73GB1J101J	CHIP R 100 J 1/16W	
R6			RK73GB1J472J	CHIP R 4.7K J 1/16W	MCX
R6			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R7			RK73GB1J101J	CHIP R 100 J 1/16W	EW

Ref. No.	A d d	N e w	Parts No.	Description	Dest inati on
R8			RK73GB1J473J	CHIP R 47K J 1/16W	
R9			RK73GB1J333J	CHIP R 33K J 1/16W	
R10			RK73GB1J822J	CHIP R 8.2K J 1/16W	
R11			RK73GB1J223J	CHIP R 22K J 1/16W	
R12 -15			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R16			RK73GB1J682J	CHIP R 6.8K J 1/16W	EW
R17 , 18			RK73GB1J103J	CHIP R 10K J 1/16W	EW
R19			RK73GB1J222J	CHIP R 2.2K J 1/16W	EW
R20			RK73GB1J470J	CHIP R 47 J 1/16W	EW
R21			RK73GB1J681J	CHIP R 680 J 1/16W	EW
R22			RK73GB1J222J	CHIP R 2.2K J 1/16W	EW
R23			RK73GB1J123J	CHIP R 12K J 1/16W	EW
R24			RK73GB1J470J	CHIP R 47 J 1/16W	EW
R25			RK73GB1J151J	CHIP R 150 J 1/16W	EW
R26 , 27			RK73GB1J101J	CHIP R 100 J 1/16W	EW
R28			RK73GB1J151J	CHIP R 150 J 1/16W	
R29			RK73GB1J681J	CHIP R 680 J 1/16W	
R30			RK73GB1J123J	CHIP R 12K J 1/16W	
R31			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R32			RK73GB1J470J	CHIP R 47 J 1/16W	
R33			RK73GB1J122J	CHIP R 1.2K J 1/16W	
R34			RK73GB1J392J	CHIP R 3.9K J 1/16W	
R101			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R102			RK73GB1J682J	CHIP R 6.8K J 1/16W	
R103,104			RK73GB1J471J	CHIP R 470 J 1/16W	EW
R105			RK73GB1J333J	CHIP R 33K J 1/16W	
R106			RK73GB1J563J	CHIP R 56K J 1/16W	
R107			RK73GB1J152J	CHIP R 1.5K J 1/16W	
R108,109			RK73GB1J331J	CHIP R 330 J 1/16W	
R110			RK73GB1J273J	CHIP R 27K J 1/16W	EW
R111			RK73GB1J181J	CHIP R 180 J 1/16W	KRMC
R111			RK73GB1J181J	CHIP R 180 J 1/16W	HX
R112			RK73GB1J333J	CHIP R 33K J 1/16W	
R113			RK73GB1J473J	CHIP R 47K J 1/16W	
R114,115			RK73GB1J331J	CHIP R 330 J 1/16W	KRMC
R114,115			RK73GB1J331J	CHIP R 330 J 1/16W	HX
R116			RK73GB1J272J	CHIP R 2.7K J 1/16W	
R117			RK73GB1J103J	CHIP R 10K J 1/16W	EW
R117,118			RK73GB1J103J	CHIP R 10K J 1/16W	MCX
R118			RK73GB1J103J	CHIP R 10K J 1/16W	KRH
R119			RK73GB1J222J	CHIP R 2.2K J 1/16W	MCX
R119			RK73GB1J222J	CHIP R 2.2K J 1/16W	EW
R120			RK73GB1J182J	CHIP R 1.8K J 1/16W	KRMC
R120			RK73GB1J182J	CHIP R 1.8K J 1/16W	HX
R121			RK73GB1J103J	CHIP R 10K J 1/16W	
R122			RK73GB1J223J	CHIP R 22K J 1/16W	KRMC
R122			RK73GB1J223J	CHIP R 22K J 1/16W	HX
R123			RK73GB1J103J	CHIP R 10K J 1/16W	EW
R124			RK73GB1J222J	CHIP R 2.2K J 1/16W	MCX
R124			RK73GB1J222J	CHIP R 2.2K J 1/16W	EW
R125			RK73GB1J272J	CHIP R 2.7K J 1/16W	
R126			RK73GB1J104J	CHIP R 100K J 1/16W	MCX
R126			RK73GB1J104J	CHIP R 100K J 1/16W	EW
R127			RK73GB1J222J	CHIP R 2.2K J 1/16W	MCX
R127			RK73GB1J222J	CHIP R 2.2K J 1/16W	EW

K: KVT-910DVD (for North America)
 E: KVT-920DVD (for Europe Without Italy)
 H: KVT-930DVD (for Korea,Taiwan,Philippines)
 X: KVT-940DVD (for Australia)

R: KVT-910DVD (for South America)
 W: KVT-920DVD (for Italy)
 M: KVT-930DVD (for Southeastern Asia)
 C: KVT-960DVD (for China)

△ indicates safety critical components.

KVT-910DVD/920DVD/930DVD/
940DVD/960DVD

PARTS LIST

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	A d d	N e w	Parts No.	Description	Dest inati on
R128			RK73GB1J104J	CHIP R 100K J 1/16W	MCX
R128			RK73GB1J104J	CHIP R 100K J 1/16W	EW
R129			RK73GB1J332J	CHIP R 3.3K J 1/16W	KRMC
R129			RK73GB1J332J	CHIP R 3.3K J 1/16W	HX
R130			RK73GB1J104J	CHIP R 100K J 1/16W	MCX
R130			RK73GB1J104J	CHIP R 100K J 1/16W	EW
R131,132			RK73GB1J103J	CHIP R 10K J 1/16W	EW
R133			RK73GB1J472J	CHIP R 4.7K J 1/16W	EW
R134			RK73GB1J103J	CHIP R 10K J 1/16W	
R135			RK73GB1J273J	CHIP R 27K J 1/16W	
R136			RK73GB1J103J	CHIP R 10K J 1/16W	
R137			RK73GB1J393J	CHIP R 39K J 1/16W	
R138			RK73GB1J103J	CHIP R 10K J 1/16W	
R139			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R140			RK73GB1J103J	CHIP R 10K J 1/16W	
R141			RK73GB1J223J	CHIP R 22K J 1/16W	
R142			RK73GB1J471J	CHIP R 470 J 1/16W	
R144			RK73GB1J471J	CHIP R 470 J 1/16W	
R145			RK73GB1J470J	CHIP R 47 J 1/16W	
R146,147			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R148			RK73GB1J471J	CHIP R 470 J 1/16W	
R150,151			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R152			RK73GB1J471J	CHIP R 470 J 1/16W	
R153			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R154			RK73GB1J104J	CHIP R 100K J 1/16W	
R155			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R157			RK73GB1J471J	CHIP R 470 J 1/16W	
R158			RK73GB1J153J	CHIP R 15K J 1/16W	
R160			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R161			RK73GB1J273J	CHIP R 27K J 1/16W	
R162			RK73GB1J104J	CHIP R 100K J 1/16W	
R163			RK73GB1J103J	CHIP R 10K J 1/16W	EW
R164			RK73GB1J223J	CHIP R 22K J 1/16W	EW
R165,166			RK73GB1J391J	CHIP R 390 J 1/16W	EW
R167			RK73GB1J393J	CHIP R 39K J 1/16W	
R168			RK73GB1J391J	CHIP R 390 J 1/16W	
R169,170			RK73GB1J101J	CHIP R 100 J 1/16W	
R171			RK73GB1J470J	CHIP R 47 J 1/16W	EW
R172			RK73GB1J471J	CHIP R 470 J 1/16W	EW
R173			RK73GB1J473J	CHIP R 47K J 1/16W	
R174			RK73GB1J513J	CHIP R 51K J 1/16W	
R175			RK73GB1J473J	CHIP R 47K J 1/16W	
R176			RK73GB1J333J	CHIP R 33K J 1/16W	
R201			RK73GB1J822J	CHIP R 8.2K J 1/16W	EW
R202			RK73GB1J392J	CHIP R 3.9K J 1/16W	EW
R203			RK73GB1J473J	CHIP R 47K J 1/16W	EW
R204			RK73GB1J823J	CHIP R 82K J 1/16W	
R205			RK73GB1J124J	CHIP R 120K J 1/16W	
R207			RK73GB1J334J	CHIP R 330K J 1/16W	
R208			RK73GB1J474J	CHIP R 470K J 1/16W	
R211-214			RK73GB1J153J	CHIP R 15K J 1/16W	
R215,216			RK73GB1J683J	CHIP R 68K J 1/16W	
R217,218			RK73GB1J273J	CHIP R 27K J 1/16W	
R219			RK73GB1J823J	CHIP R 82K J 1/16W	
R220			RK73GB1J104J	CHIP R 100K J 1/16W	

TUNER UNIT (X86-323X-XX)

Ref. No.	A d d	N e w	Parts No.	Description	Dest inati on
R221			RK73GB1J223J	CHIP R 22K J 1/16W	KRH
R221			RK73GB1J683J	CHIP R 68K J 1/16W	MCX
R221			RK73GB1J683J	CHIP R 68K J 1/16W	EW
R222			RK73GB1J124J	CHIP R 120K J 1/16W	KRH
R222			RK73GB1J473J	CHIP R 47K J 1/16W	MCX
R222			RK73GB1J473J	CHIP R 47K J 1/16W	
R223			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R227			RK73GB1J472J	CHIP R 4.7K J 1/16W	
VR1			R32-0234-05	SEMI FIXED VARIABLE RESISTOR	
VR101			R32-0234-05	SEMI FIXED VARIABLE RESISTOR	KRMC
VR101			R32-0234-05	SEMI FIXED VARIABLE RESISTOR	HX
VR102			R32-0246-05	SEMI FIXED VARIABLE RESISTOR	KRMC
VR102			R32-0246-05	SEMI FIXED VARIABLE RESISTOR	HX
W1 -4			R92-1252-05	CHIP R 0 OHM	KRMC
W1 -4			R92-1252-05	CHIP R 0 OHM	HX
W6			R92-1252-05	CHIP R 0 OHM	EW
W101-103			R92-1252-05	CHIP R 0 OHM	KRH
W102,103			R92-1252-05	CHIP R 0 OHM	MCX
W104			R92-1252-05	CHIP R 0 OHM	EW
W201,202			R92-1252-05	CHIP R 0 OHM	KRMC
W201,202			R92-1252-05	CHIP R 0 OHM	HX
W202			R92-1252-05	CHIP R 0 OHM	EW
D1 -4			RN739F	DIODE	
D5			DAN235U	DIODE	EW
D6			1SS250	DIODE	
D101			DA204U	DIODE	
D102,103			DAP236U	DIODE	MCX
D102,103			DAP236U	DIODE	EW
D104			DAN235U	DIODE	EW
D105			DA204U	DIODE	
D106			DA204U	DIODE	EW
IC1			BA7652AF	ANALOGUE IC	EW
IC2			CM0018AM	MOS-IC	
IC3			BA6161F	ANALOGUE IC	
IC101			AN5186FB	ANALOGUE IC	
IC102			TDA8842H	ANALOGUE IC	
IC201			TDA9830T	ANALOGUE IC	EW
IC202		*	AN5281SC	ANALOGUE IC	
IC203,204			NJM4565M-TE2	ANALOGUE IC	
Q1			DTA114EUA	DIGITAL TRANSISTOR	EW
Q2			DTC124EUA	DIGITAL TRANSISTOR	EW
Q3			DTC143TUA	DIGITAL TRANSISTOR	EW
Q4 ,5			2SC2714(Y)	TRANSISTOR	EW
Q5			2SC2714(Y)	TRANSISTOR	KRMC
Q5			2SC2714(Y)	TRANSISTOR	HX
Q101,102			2SC4081	TRANSISTOR	EW
Q102,103			2SC4081	TRANSISTOR	KRMC
Q102,103			2SC4081	TRANSISTOR	
Q104-106			DTC124EUA	DIGITAL TRANSISTOR	HX
Q104-107			DTC124EUA	DIGITAL TRANSISTOR	MCX
Q108-114			2SC4081	TRANSISTOR	EW
Q108-114			2SC4081	TRANSISTOR	KRMC
Q108-114			2SC4081	TRANSISTOR	HX
Q108-115			2SC4081	TRANSISTOR	EW
Q116			2SA1576A	TRANSISTOR	EW

PARTS LIST

* New Parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	A d d	N e w	Parts No.	Description	Dest inati on
Q117-119 Q201,202			DTC144EUA DTC144EUA	DIGITAL TRANSISTOR DIGITAL TRANSISTOR	
A1			W02-3127-15	TUNER ASSY	KRH
A1			W02-3157-05	TUNER ASSY	MCX
A1			W02-3191-05	TUNER ASSY	EW
COMPOUND ASSY UNIT (X90-361x-xx)					
286	1F		A01-2741-01	METALLIC CABINET	
288	3F	*	E30-4972-05	GROUND WIRE	
FC3	2F	*	E39-0378-05	FLAT CABLE	
289	2F		F07-1079-05	COVER	
-			H25-0338-04	PROTECTION BAG (250X350X0.03)	KRMC
-			H25-0338-04	PROTECTION BAG (250X350X0.03)	HX
-			H25-1111-04	PROTECTION BAG (280X450X0.03)	EW
R	3F		N80-3008-46	PAN HEAD TAPTITE SCREW	
S	1F		N89-3006-46	BINDING HEAD TAPTITE SCREW	
T	3F		N09-1515-05	TAPPING SCREW (3X8)	
DVD MECHANISM ASSY (X92-3550-03)					
1	2A	*	A10-4684-22	CHASSIS ASS'Y	
2	3A	*	A10-4692-02	CHASSIS	
3	1B	*	A10-4690-01	CHASSIS	
4	1A	*	A10-4709-13	CHASSIS CALKING ASS'Y	
7	3A	*	D10-4467-11	LEVER	
8	3B	*	D10-4468-13	SLIDER ASS'Y	
9	2A	*	D10-4471-14	SLIDER ASS'Y	
10	3B	*	D10-4474-14	ARM ASS'Y	
11	1A	*	D10-4487-13	ARM ASS'Y	
14	2A	*	D13-2062-04	GEAR	
15	2A	*	D13-2063-04	GEAR	
16	2A	*	D13-2064-04	GEAR	
17	1B	*	D13-2065-04	GEAR ASS'Y	
18	1A	*	D13-2067-04	RACK (GEAR)	
19	3A	*	D13-2068-04	GEAR	
20	3B	*	D13-2069-13	RACK (GEAR)	
22	2B	*	D13-2072-04	GEAR	
23	2B	*	D13-2073-04	GEAR	
24	2B	*	D13-2074-04	GEAR	
25	2B	*	D13-1377-14	GEAR	
26	2B	*	D13-2075-04	GEAR	
27	2B	*	D13-2076-04	GEAR	
28	3B	*	D13-2077-04	GEAR	
29	3B	*	D13-2070-04	GEAR	
30	3B	*	D13-2071-04	GEAR	
31	3A	*	D14-0735-04	ROLLER	
32	3B	*	D14-0736-04	ROLLER	
33	2A	*	D14-0694-04	ROLLER	
34	2A	*	D21-2279-14	SHAFT	
35	2B	*	D21-2330-04	SHAFT	
36	2A	*	D21-2331-04	SHAFT	
37	3A	*	D21-2332-04	SHAFT ASS'Y	
38	1B	*	D32-0634-04	STOPPER	
39	1B	*	D39-0240-05	DAMPER	

Ref. No.	A d d	N e w	Parts No.	Description	Dest inati on
66	3A	*	D23-0942-24	RETAINER	
VFC1	2B	*	E39-0335-05	FLAT CABLE	
42	3B	*	G01-2998-04	EXTENSION SPRING	
43	3B	*	G01-2999-04	EXTENSION SPRING	
44	3A	*	G01-3000-04	EXTENSION SPRING	
45	1B	*	G01-3001-04	COMPRESSION SPRING	
46	3A	*	G01-3002-04	EXTENSION SPRING	
47	2A	*	G01-3020-04	EXTENSION SPRING	
50	2B	*	G02-1346-04	FLAT SPRING	
51	3A	*	G02-1356-04	FLAT SPRING	
52	2A	*	G02-1400-04	FLAT SPRING	
53	2A	*	G16-1160-04	SHEET	
54	2B	*	G16-1180-04	SHEET	
56	3A	*	G16-1199-04	SHEET	
57	1A	*	J11-0636-22	CLAMPER	
58	2B	*	J12-1070-04	PIN	
61	2B	*	J19-4986-04	HOLDER	
62	3A	*	J19-4989-03	HOLDER	
63	2A	*	J19-4991-13	HOLDER ASS'Y	
64	1A	*	J19-5000-04	HOLDER ASS'Y	
65	2A	*	J19-5026-04	HOLDER	
69	2A	*	J21-9510-24	MOUNTING HARDWARE ASS'Y	
70	1B	*	J21-9512-33	MOUNTING HARDWARE	
71	2B	*	J21-9518-03	MOUNTING HARDWARE	
72	2A	*	J21-9544-04	MOUNTING HARDWARE ASS'Y	
73	2A	*	J21-9546-04	MOUNTING HARDWARE ASS'Y	
74	2A	*	J31-1037-04	COLLAR	
77	3A	*	J90-0963-03	GUIDE	
78	3A	*	J90-0964-03	GUIDE	
79	2A	*	J90-0968-02	GUIDE	
VFPC1	2B	*	J26-4038-05	PRINTED WIRING BOARD ASSY	
VFPC2	2A	*	J26-4040-05	PRINTED WIRING BOARD ASSY	
VFPC3	2B	*	J84-0109-05	FLEXIBLE PRINTED WIRING BOARD	
A	1A		N09-4244-05	MACHINE SCREW (M1.7X1.8)	
B	2B	*	N09-4361-05	MACHINE SCREW (M1.7X2.0)	
C	2A		N09-4293-05	MACHINE SCREW (M1.4X1.8)	
D	1B	*	N09-4474-05	MACHINE SCREW (M1.7X2.5)	
E	2A	*	N09-4359-05	MACHINE SCREW (M2X6 FINE)	
F	2B	*	N09-4364-05	MACHINE SCREW (M1.7X6.6)	
G	2B	*	N09-4367-05	STEPPED SCREW (M1.7X1.5)	
H	2B	*	N09-4393-05	MACHINE SCREW (M1.7X2.5)	
J	2B	*	N09-4360-05	MACHINE SCREW (M1.4X1.4)	
K	1B	*	N09-4432-05	MACHINE SCREW (M1.7X3.5)	
L	2A		N19-2022-04	FLAT WASHER (1.6X3.2X0.25)	
M	2A		N19-2108-04	FLAT WASHER (3X5.4X0.35)	
N	3A		N19-2110-04	FLAT WASHER (0.8X2X0.188 CW)	
P	3B		N19-2113-04	FLAT WASHER (1.2X3X0.25 CW)	
Q	2A	*	N19-2144-04	FLAT WASHER (4.7X13X0.25)	
VM1	2B	*	T42-1014-05	MOTOR ASS'Y (SP)	
VM2	2A	*	T42-1050-04	MOTOR ASS'Y(SL)	
VM3	2B	*	T42-1051-04	MOTOR ASS'Y(ROAD)	
VPU1	1B	*	T25-0217-05	OPTICAL PICKUP HEAD	

K: KVT-910DVD (for North America)
E: KVT-920DVD (for Europe Without Italy)
H: KVT-930DVD (for Korea,Taiwan,Philippines)
X: KVT-940DVD (for Australia)

R: KVT-910DVD (for South America)
W: KVT-920DVD (for Italy)
M: KVT-930DVD (for Southeastern Asia)
C: KVT-960DVD (for China)

△ indicates safety critical components.

Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	A d d	N e w	Parts No.	Description	Dest inati on

⚠ indicates safety critical components.