EXPLODED VIEW

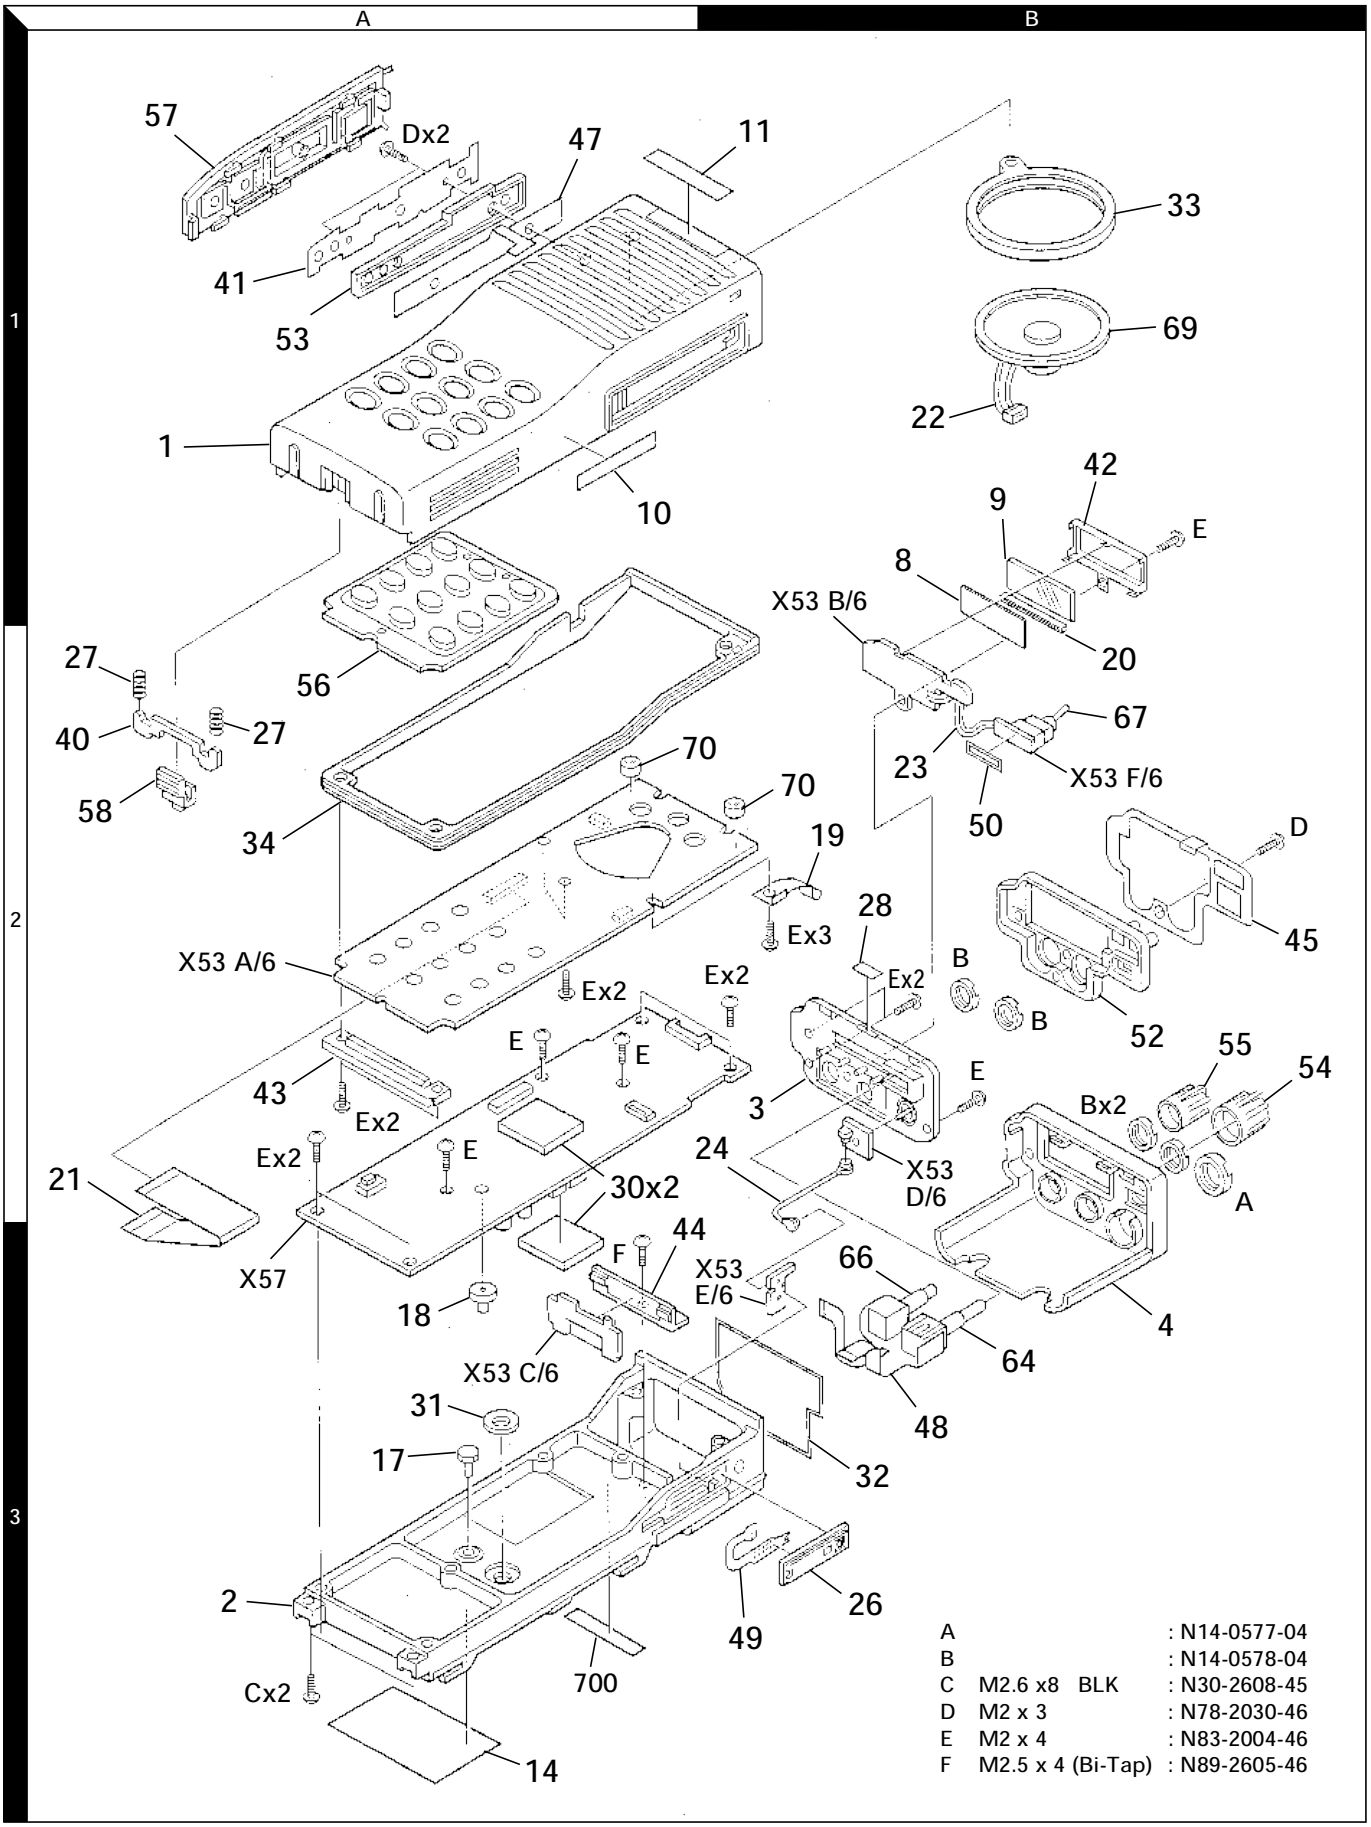

Parts with the exploded numbers larger than 700 are not supplied.

PACKING

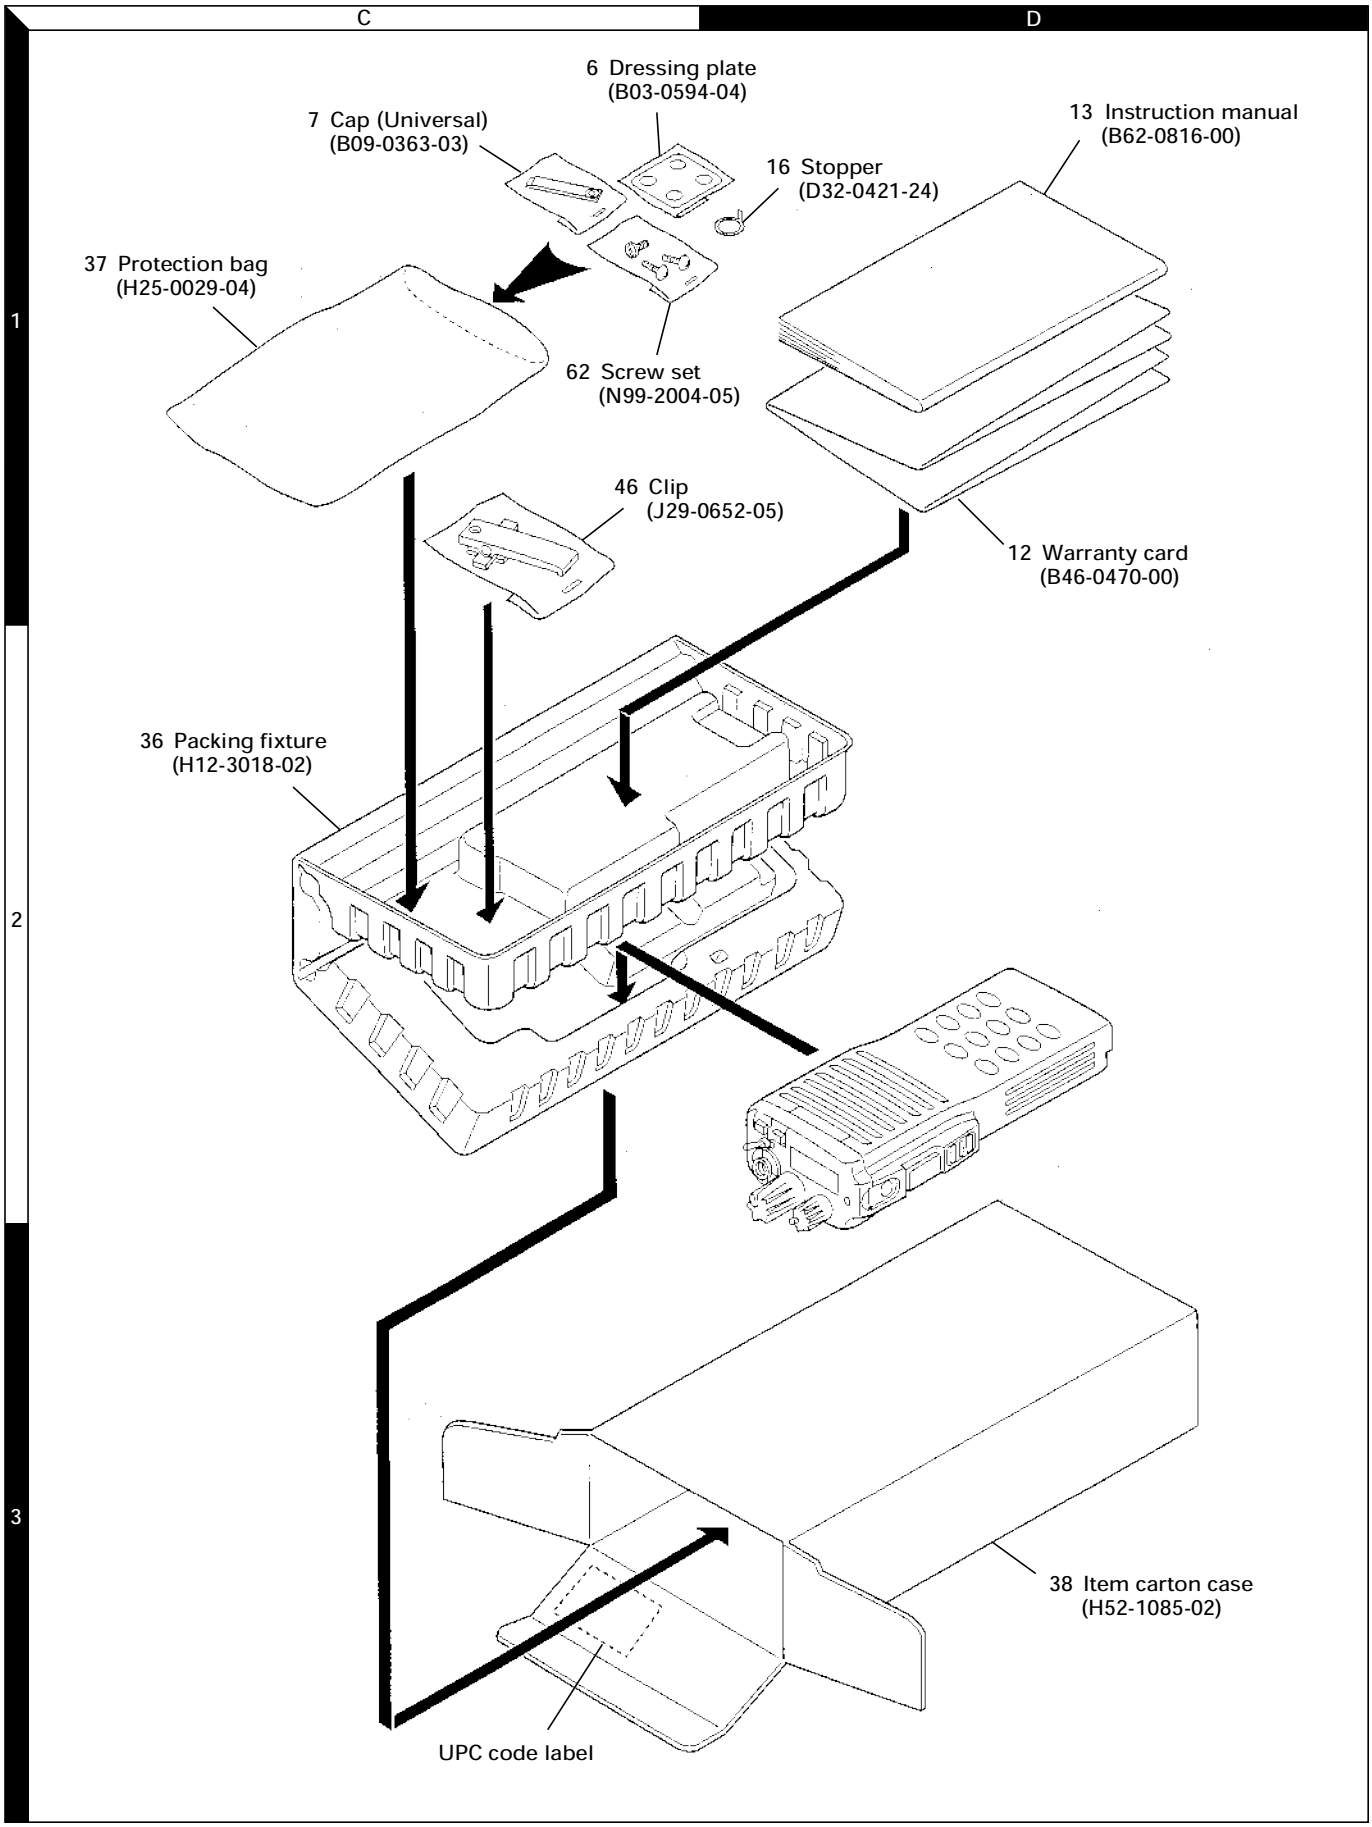
C
D
1
2
3
6 Dressing plate
(B03-0594-04)
7 Cap (Universal)
(B09-0363-03)
16 Stopper
(D32-0421-24)
13 Instruction manual
(B62-0816-00)
37 Protection bag
(H25-0029-04)
62 Screw set
(N99-2004-05)
46 Clip
(J29-0652-05)
12 Warranty card
(B46-0470-00)
36 Packing fixture
(H12-3018-02)
38 Item carton case
(H52-1085-02)
UPC code label

TK-390

* New Parts. ⚠ indicates safety critical components.
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

L : Scandinavia **K** : USA **P** : Canada
Y : PX (Far East, Hawaii) **T** : England **E** : Europe
Y : AAFES (Europe) **X** : Australia **M**: Other Areas

TK-390
CONTROL UNIT (X53-3780-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination
TK-390					
1	1A	*	A02-2139-43	CABINET ASSY	K
1	1A	*	A02-2140-43	CABINET ASSY (10KEY)	K4
2	3A	*	A10-1374-31	CHASSIS	
3	2B	*	A22-2501-15	SUB PANEL ASSY	
4	3B	*	A62-0537-33	PANEL ASSY	
6	1C	*	B03-0594-04	DRESSING PLATE ACSY	
7	1C	*	B09-0363-03	CAP (UNIVERSAL) ACSY	
8	1B	*	B11-1183-14	REFLECTOR LCD	
9	1B	*	B38-0786-05	LCD	
10	1A		B42-3394-14	STANDARD LABEL	
11	1A	*	B43-1111-04	BADGE KENWOOD	
12	1D		B46-0470-00	WARRANTY CARD	
13	1D	*	B62-0816-00	INSTRUCTION MANUAL	
14	3A	*	B72-1344-04	MODEL NAME PLATE	
16	1D	*	D32-0421-24	STOPPER ACSY	
17	3A		E23-1048-05	TERMINAL (BATT-)	
18	3A	*	E23-1062-05	TERMINAL (BATT +)	
19	2B	*	E23-1102-04	TERMINAL (TX/RX-GND)	
20	1B	*	E29-1165-05	INTER CONNECTOR (LCD)	
21	2A	*	E37-0682-05	FLAT CABLE (TX/RX-CONT)	
22	1B	*	E37-0684-05	LEAD WIRE WITH CONNECTOR (SP)	
23	2B	*	E37-0692-05	PROCESSED LEAD WIRE (TOGGLE SW)	
24	2B	*	E37-0722-05	LEAD WIRE WITH CONNECTOR (ANTCOAXIAL)	
-		*	E37-0777-05	PROCESSED LEAD WIRE (UNIVERSAL-GND)	
26	3B	*	E58-0443-15	UNIVERSAL CONNECTOR	
27	2A	*	G01-0891-04	COIL SPRING (BATT RELEASE)	
28	2B	*	G11-2537-04	SCHLEGEL SHEET	
-		*	G11-2538-04	SHEET (UNIVERSAL-CHASSIS)	
30	2A,3A	*	G13-1678-04	CUSHION	
-	-	*	G13-1688-04	CUSHION (CAP)	
31	3A	*	G53-0814-04	PACKING (BATT +)	
32	3B	*	G53-0822-04	PACKING (CHASSIS)	
33	1B	*	G53-0823-04	PACKING (SP)	
34	2A	*	G53-0824-13	PACKING (CABINET)	
36	2C	*	H12-3018-02	PACKING FIXTURE	
37	1C		H25-0029-04	PROTECTION BAG ACSY	
38	3D	*	H52-1085-02	ITEM CARTON CASE	
40	2A	*	J19-5330-14	HOLDER(BATT RELEASE)	
41	1A	*	J21-8326-14	HARDWARE FIXTURE (SIDE KEY)	
42	1B	*	J21-8328-14	HARDWARE FIXTURE (LCD)	
43	2A	*	J21-8329-14	HARDWARE FIXTURE (CONT UNIT)	
44	3A	*	J21-8330-04	HARDWARE FIXTURE (POWER MUDULE)	
45	2B	*	J21-8343-04	HARDWARE FIXTURE	
46	1C	*	J29-0652-05	CLIP ACSY	
47	1A	*	J82-0047-05	FPC (SIDE KEY)	
48	3B	*	J82-0049-05	FPC (VOL-ENC)	
49	3B	*	J82-0052-15	FPC (UNIVERSAL)	
50	2B	*	J99-0346-14	ADHESIVE TAPE (TOGGLE SW)	
52	2B	*	K29-5172-12	KEY TOP (TOP)	
53	1A	*	K29-5173-13	KEY TOP (SIDE KEY)	
54	2B	*	K29-5282-04	KNOB ASSY (SEL)	
55	2B	*	K29-5283-04	KNOB ASSY (VOL)	
56	1A	*	K29-5193-13	KEY TOP (10KEY)	K4
57	1A	*	K29-5216-24	KNOB ASSY (SIDE KEY)	
58	2A	*	K29-5220-13	LEVER KNOB (BATT RELEASE)	
-			L33-0680-05	CHOKE COIL (POWER MUDULE)	
A	1B	*	N14-0577-04	CIRCULAR NUT (COAXIAL CON)	
B	2B	*	N14-0578-04	CIRCULAR NUT (VOL/ENC)	
C	3A		N30-2608-45	PAN HEAD MACHINE SCREW	
D	1A,2B	*	N78-2030-46	PAN HEAD TAPTITE SCREW	
E	2A,2B		N83-2004-46	PAN HEAD TAPTITE SCREW	
F	3A		N89-2605-46	BAINDING HEAD TAPTITE SCREW	
62	1C		N99-2004-05	SCREW SET ACSY	
64	3B		R31-0626-05	VARIABLE RESISTOR	
66	3B	*	S60-0408-15	ROTARY SWITCH	
67	2B	*	S72-0402-05	TOGGLE SWITCH	
69	1B	*	T07-0349-05	SPEAKER	
70	2A,2B		T91-0575-05	MIC ELEMENT	
CONTROL UNIT (X53-3780-XX) -12 : K -13 : K4					
D6-9			B30-2171-05	LED (10KEY BACK LIGHT)	K4
D102,103		*	B30-2190-05	LED (LCD BACK LIGHT)	
D104			B30-2019-05	LED (TX/BUSY)	
C1,2			CK73GB1H471K	CHIP C 470PF K	
C5			CK73GB1H471K	CHIP C 470PF K	
C8			CK73FB1C474K	CHIP C 0.47UF K	
C12,13			CK73FB1C474K	CHIP C 0.47UF K	
C14			CK73FB1C104KTD	CHIP C 0.10UF K	
C15			CK73GB1H471K	CHIP C 470PF K	
C16		*	C92-0734-05	ELRCTRO 100UF 10WV	
C19			CK73FB1C474K	CHIP C 0.47UF K	
C22			CK73GB1H471K	CHIP C 470PF K	
C27-29			CK73GB1C104K	CHIP C 0.10UF K	
C30			CK73FB1C474K	CHIP C 0.47UF K	
C31			CK73GB1E223K	CHIP C 0.022UF K	
C32			CK73FB1C474K	CHIP C 0.47UF K	
C33,34			CK73GB1H471K	CHIP C 470PF K	
C35			CK73GB1H102K	CHIP C 1000PF K	
C37			CC73GCH1H101J	CHIP C 100PF J	
C38			CK73GB1H471K	CHIP C 470PF K	
C43			CK73GB1H471K	CHIP C 470PF K	
C104			CC73GCH1H101J	CHIP C 100PF J	
C501			CK73GB1H183K	CHIP C 0.018UF K	
CN1		*	E40-5947-05	FLAT CABLE CONNECTOR	
CN2			E40-5662-05	PIN ASSY SOCKET	
CN3		*	E40-5948-05	FLAT CABLE CONNECTOR	
CN4			E40-5662-05	PIN ASSY SOCKET	
CN101		*	E40-5920-05	FLAT CABLE CONNECTOR	
CN501,502			E04-0403-05	PIN SOCKET	
L1-4			L92-0141-05	FERRITE CHIP	
L5			L92-0138-05	FERRITE CHIP	
L6			L92-0149-05	FERRITE CHIP	
L101			L92-0138-05	FERRITE CHIP	

CONTROL UNIT (X53-3780-XX)
TX-RX UNIT (X57-5400-10)

Ref. No.	Address	New parts	Parts No.	Description	Destination
CP1			R90-0723-05	MULTI-COMP 47K X 2	
R1			RK73GB1J273J	CHIP R 27K J 1/16W	
R2			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R3			RK73GB1J470J	CHIP R 47 J 1/16W	
R4,5			RK73GB1J473J	CHIP R 47K J 1/16W	
R6-8			R92-1252-05	CHIP R 0 OHM	
R9,10			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R11			R92-1252-05	CHIP R 0 OHM	
R12			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R13			RK73GB1J473J	CHIP R 47K J 1/16W	
R14			RK73GB1J104J	CHIP R 100K J 1/16W	
R15			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R16			R92-1252-05	CHIP R 0 OHM	
R17,18			RK73GB1J473J	CHIP R 47K J 1/16W	
R19,20			RK73GB1J101J	CHIP R 100 J 1/16W	K4
R22,23			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R26-28			RK73GB1J103J	CHIP R 10K J 1/16W	
R29,30			RK73GB1J223J	CHIP R 22K J 1/16W	
R32			RK73GB1J680J	CHIP R 68 J 1/16W	
R33			RK73GB1J223J	CHIP R 22K J 1/16W	
R34			RK73GB1J182J	CHIP R 1.8K J 1/16W	
R35			RK73GB1J103J	CHIP R 10K J 1/16W	
R36			RK73GB1J182J	CHIP R 1.8K J 1/16W	K
R36-42			RK73GB1J102J	CHIP R 1.0K J 1/16W	K4
R43,44			RK73GB1J473J	CHIP R 47K J 1/16W	
R45-49			RK73GB1J102J	CHIP R 1.0K J 1/16W	K
R45-55			RK73GB1J102J	CHIP R 1.0K J 1/16W	K4
R56			RK73GB1J153J	CHIP R 15K J 1/16W	
R57			R92-1252-05	CHIP R 0 OHM	
R59			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R101-104			RK73GB1J103J	CHIP R 10K J 1/16W	
R105			RK73GB1J332J	CHIP R 3.3K J 1/16W	
R106			RK73GB1J274J	CHIP R 270K J 1/16W	
R502			RK73GB1J102J	CHIP R 1.0K J 1/16W	
D2			DTZ3.9(B)	ZENER DIODE	
D11			IMN10	DIODE	K4
D12,13			MA2S111	DIODE	
D14			IMN10	DIODE	K4
D15			MA2S111	DIODE	
D16			IMN10	DIODE	K
D16-18			IMN10	DIODE	K4
D19,20			MA2S111	DIODE	
D101			1SS373	DIODE	
IC1			TDA7053AT	IC (AUDIO AMP)	
IC2			MC74HC4017F	IC (GATE CMOS)	
IC3			NJM2904V	IC (APC)	
IC4-6			TC7SH08FU	IC (2ch AND GATE)	
IC101		*	LC75824W	IC (LCD DRIVER)	
IC501		*	XHW2727-2	IC	
Q5			2SC4617(S)	TRANSISTOR	
Q6			2SB798(DL,DK)	TRANSISTOR	
Q7,8			2SK1824	FET	
Q14			UMC4	TRANSISTOR	
Q15			2SK1824	FET	

Ref. No.	Address	New parts	Parts No.	Description	Destination
TX-RX UNIT (X57-5400-10)					
C1			C92-0560-05	CHIP-TAN 10UF 6.3WV	
C5			CK73GB1H102K	CHIP C 1000PF K	
C6			C92-0560-05	CHIP-TAN 10UF 6.3WV	
C8-10			CK73GB1H102K	CHIP C 1000PF K	
C11			C92-0588-05	CHIP-TAN 1.5UF 16V	
C13			CK73GB1C104K	CHIP C 0.10UF K	
C14,15			C92-0588-05	CHIP-TAN 1.5UF 16V	
C16			CK73GB1C104K	CHIP C 0.10UF K	
C17			CK73GB1H102K	CHIP C 1000PF K	
C18			C92-0588-05	CHIP-TAN 1.5UF 16V	
C19,20			CK73GB1C104K	CHIP C 0.10UF K	
C21			C92-0560-05	CHIP-TAN 10UF 6.3WV	
C22			CK73GB1H103K	CHIP C 0.010UF K	
C23			CC73GCH1H101J	CHIP C 100PF J	
C24			C92-0002-05	CHIP-TAN 0.22UF 35WV	
C27			CK73GB1C104K	CHIP C 0.10UF K	
C28			CK73GB1E223K	CHIP C 0.022UF K	
C30			CC73GCH1H060D	CHIP C 6.0PF D	
C31			CK73GB1H471K	CHIP C 470PF K	
C32			C92-0002-05	CHIP-TAN 0.22UF 35WV	
C33			CC73GCH1H060D	CHIP C 6.0PF D	
C34			CC73GCH1H331J	CHIP C 330PF J	
C36			CC73GCH1H040C	CHIP C 4.0PF C	
C37			CK73GB1H471K	CHIP C 470PF K	
C38			CC73GCH1H010C	CHIP C 1.0PF C	
C39			CK73GB1H102K	CHIP C 1000PF K	
C40			C92-0560-05	CHIP-TAN 10UF 6.3WV	
C41			CK73GB1H471K	CHIP C 470PF K	
C42			CC73GCH1H060D	CHIP C 6.0PF D	
C43			C92-0507-05	CHIP-TAN 4.7UF 6.3WV	
C45			CC73GCH1H060D	CHIP C 6.0PF D	
C46			CK73GB1H102K	CHIP C 1000PF K	
C47			CK73GB1H471K	CHIP C 470PF K	
C48			CK73GB1H102K	CHIP C 1000PF K	
C49,50			CK73GB1H471K	CHIP C 470PF K	
C52			CK73GB1H102K	CHIP C 1000PF K	
C53-57			CK73GB1H471K	CHIP C 470PF K	
C58			CC73GCH1H101J	CHIP C 100PF J	
C59			CC73GCH1H100D	CHIP C 10PF D	
C60-64			CK73GB1H471K	CHIP C 470PF K	
C66,67			CK73GB1H471K	CHIP C 470PF K	
C69			CC73GCH1H050C	CHIP C 5.0PF C	
C70			CC73GCH1H101J	CHIP C 100PF J	
C71			CK73FB1C474K	CHIP C 0.47UF K	
C73			C92-0543-05	CHIP-TAN 3.3UF 10WV	
C76			CC73GCH1H101J	CHIP C 100PF J	
C77			CC73GCH1H020C	CHIP C 2.0PF C	
C78			CK73GB1H103K	CHIP C 0.010UF K	
C79			CK73FB1C474K	CHIP C 0.47UF K	
C81,82			CK73GB1H102K	CHIP C 1000PF K	
C83			CC73GCH1H010C	CHIP C 1.0PF C	
C84,85			CK73GB1H102K	CHIP C 1000PF K	
C86			CC73GCH1H010C	CHIP C 1.0PF C	
C87			CK73GB1H102K	CHIP C 1000PF K	
C88			CC73GCH1H090D	CHIP C 9.0PF D	
C89			CC73GCH1H010C	CHIP C 1.0PF C	
C90			CC73GCH1H180J	CHIP C 18PF J	
C91			CC73GCH1H010C	CHIP C 1.0PF C	

TX-RX UNIT (X57-5400-10)

Ref. No.	Address	New parts	Parts No.	Description			Destination
C92			CC73GCH1H080D	CHIP C	8.0PF	D	
C93,94			CC73GCH1H100D	CHIP C	10PF	D	
C95			CK73GB1H102K	CHIP C	1000PF	K	
C96			CC73GCH1H101J	CHIP C	100PF	J	
C97			CK73GB1H102K	CHIP C	1000PF	K	
C99			CK73GB1H102K	CHIP C	1000PF	K	
C100			C92-0560-05	CHIP-TAN	10UF	6.3WV	
C150			CC73GCH1H010C	CHIP C	1.0PF	C	
C200			CC73GCH1H2R5B	CHIP C	2.5PF	B	
C202			CC73GCH1H040C	CHIP C	4.0PF	C	
C203,204			CK73GB1H471K	CHIP C	470PF	K	
C206			CC73GCH1H040C	CHIP C	4.0PF	C	
C207			CC73GCH1H101J	CHIP C	100PF	J	
C209,210			CC73GCH1H050C	CHIP C	5.0PF	C	
C211			CK73GB1H102K	CHIP C	1000PF	K	
C212,213			CK73GB1H471K	CHIP C	470PF	K	
C215			CC73GCH1H050C	CHIP C	5.0PF	C	
C216			CC73GCH1H080D	CHIP C	8.0PF	D	
C218			CC73GCH1H050C	CHIP C	5.0PF	C	
C219,220			CK73GB1H471K	CHIP C	470PF	K	
C222			CC73GCH1H050C	CHIP C	5.0PF	C	
C223			CC73GCH1H101J	CHIP C	100PF	J	
C225,226			CC73GCH1H050C	CHIP C	5.0PF	C	
C227,228			CK73GB1H471K	CHIP C	470PF	K	
C229			CC73GCH1H050C	CHIP C	5.0PF	C	
C230			CC73GCH1H030C	CHIP C	3.0PF	C	
C231			CC73GCH1H120J	CHIP C	12PF	J	
C233			CC73GCH1H050C	CHIP C	5.0PF	C	
C234			CC73GCH1H151J	CHIP C	150PF	J	
C236			CC73GCH1H151J	CHIP C	150PF	J	
C237-240			CK73GB1H471K	CHIP C	470PF	K	
C241,242			CK73GB1C104K	CHIP C	0.10UF	K	
C244			CC73GCH1H151J	CHIP C	150PF	J	
C245			CK73GB1H102K	CHIP C	1000PF	K	
C247,248			CK73GB1H471K	CHIP C	470PF	K	
C251			CC73GCH1H030C	CHIP C	3.0PF	C	
C302,303			CC73GCH1H040C	CHIP C	4.0PF	C	
C304			CK73GB1H102K	CHIP C	1000PF	K	
C305			CK73GB1H103K	CHIP C	0.010UF	K	
C306-308			CK73GB1H102K	CHIP C	1000PF	K	
C309			C92-0560-05	CHIP-TAN	10UF	6.3WV	
C310,311			CK73GB1C104K	CHIP C	0.10UF	K	
C312			CK73GB1H103K	CHIP C	0.010UF	K	
C313,314			CC73GCH1H220J	CHIP C	22PF	J	
C315			CK73GB1H102K	CHIP C	1000PF	K	
C316			CC73GCH1H820J	CHIP C	82PF	J	
C317			CK73GB1H102K	CHIP C	1000PF	K	
C318			CK73GB1C104K	CHIP C	0.10UF	K	
C319			CK73GB1H103K	CHIP C	0.010UF	K	
C320			C92-0560-05	CHIP-TAN	10UF	6.3WV	
C321			CK73GB1C104K	CHIP C	0.10UF	K	
C322			CK73GB1H103K	CHIP C	0.010UF	K	
C323			C92-0560-05	CHIP-TAN	10UF	6.3WV	
C327-331			CK73GB1H103K	CHIP C	0.010UF	K	
C400,401			CC73GCH1H101J	CHIP C	100PF	J	
C403-411			CC73GCH1H101J	CHIP C	100PF	J	
C413			CK73GB1H471K	CHIP C	470PF	K	
C414			CK73GB1H103K	CHIP C	0.010UF	K	
C415			CK73FB0J105K	CHIP C	1.0UF	K	
C416,417			CK73GB1H471K	CHIP C	470PF	K	

Ref. No.	Address	New parts	Parts No.	Description			Destination
C419			C92-0589-05	CHIP-TAN	47UF	6.3WV	
C420		*	C92-0702-05	ELECTRO	47UF	6.3WV	
C421			CK73GB1H471K	CHIP C	470PF	K	
C422			CK73FF1C105Z	CHIP C	1.0UF	Z	
C423,424			CK73GB1H471K	CHIP C	470PF	K	
C425			CK73GB1H103K	CHIP C	0.010UF	K	
C426			CK73GB1H471K	CHIP C	470PF	K	
C427			CK73GB1H103K	CHIP C	0.010UF	K	
C428			C92-0004-05	CHIP-TAN	1.0UF	16WV	
C429			CK73GB1H102K	CHIP C	1000PF	K	
C430			CK73FB0J105K	CHIP C	1.0UF	K	
C431			CK73GB1H471K	CHIP C	470PF	K	
C432			CK73FB0J105K	CHIP C	1.0UF	K	
C433		*	C92-0698-05	ELECTRO	47UF	16WV	
C434,435			CK73GB1H471K	CHIP C	470PF	K	
C436			CK73FF1C105Z	CHIP C	1.0UF	Z	
C437			CK73GB1H472K	CHIP C	4700PF	K	
C438			CK73GB1H103K	CHIP C	0.010UF	K	
C439			CK73GB1E103K	CHIP C	0.010UF	K	
C440			CK73GB1C273K	CHIP C	0.027UF	K	
C441			CK73HB1C103K	CHIP C	0.010UF	K	
C442			CK73FB1C474K	CHIP C	0.47UF	K	
C443			CK73GB1H222K	CHIP C	2200PF	K	
C444			CC73GCH1H680J	CHIP C	68PF	J	
C445,446			CK73GB1H222K	CHIP C	2200PF	K	
C447,448			CC73GCH1H270J	CHIP C	27PF	J	
C449			CK73GB1H103K	CHIP C	0.010UF	K	
C450			C92-0560-05	CHIP-TAN	10UF	6.3WV	
C451-454			CC73GCH1H101J	CHIP C	100PF	J	
C456-477			CC73GCH1H101J	CHIP C	100PF	J	
C478			CK73GB1C104K	CHIP C	0.10UF	K	
C479			CC73GCH1H271J	CHIP C	270PF	J	
C480			CC73GCH1H221J	CHIP C	220PF	J	
C481			CK73GB1H102K	CHIP C	1000PF	K	
C485			CC73GCH1H101J	CHIP C	100PF	J	
C600			CK73GB1C473K	CHIP C	0.047UF	K	
C601			C92-0003-05	CHIP-TAN	0.47UF	25WV	
C602			CK73GB1C104K	CHIP C	0.10UF	K	
C603			CK73GB1C683K	CHIP C	0.068UF	K	
C604			CK73GB1H103K	CHIP C	0.010UF	K	
C606			CK73GB1H222K	CHIP C	2200PF	K	
C607			CC73GCH1H101J	CHIP C	100PF	J	
C608			CK73GB1H103K	CHIP C	0.010UF	K	
C609			CC73GCH1H121J	CHIP C	120PF	J	
C610			CK73GB1H103K	CHIP C	0.010UF	K	
C611			CK73GB1E123K	CHIP C	0.012UF	K	
C612			C92-0507-05	CHIP-TAN	4.7UF	6.3WV	
C613			CK73GB1H103K	CHIP C	0.010UF	K	
C615			CC73GCH1H200J	CHIP C	20PF	J	
C619			CC73GCH1H471J	CHIP C	470PF	J	
C621			CK73GB1C104K	CHIP C	0.10UF	K	
C623			CK73GB1E103K	CHIP C	0.010UF	K	
C625,626			CK73GB1C104K	CHIP C	0.10UF	K	
C627			CK73GB1H122K	CHIP C	1200PF	K	
C629,630			CK73GB1H103K	CHIP C	0.010UF	K	
C631,632			CK73GB1C104K	CHIP C	0.10UF	K	
C633			CK73GB1H103K	CHIP C	0.010UF	K	
C634,635			CK73GB1H562K	CHIP C	5600PF	K	
C636			CK73GB1C333K	CHIP C	0.033UF	K	
C637			CK73GB1H562K	CHIP C	5600PF	K	

TX-RX UNIT (X57-5400-10)

Ref. No.	Address	New parts	Parts No.	Description	Destination
C638			CK73GB1H272K	CHIP C 2700PF K	
C639			CC73GCH1H090D	CHIP C 9.0PF D	
C640,641			CK73GB1H272K	CHIP C 2700PF K	
C642			CC73GCH1H151J	CHIP C 150PF J	
C643			CK73GB1H122K	CHIP C 1200PF K	
C644			CK73GB1H102K	CHIP C 1000PF K	
C645			CC73GCH1H090D	CHIP C 9.0PF D	
C646			C92-0560-05	CHIP-TAN 10UF 6.3WV	
C647			CK73GB1C104K	CHIP C 0.10UF K	
C648			CC73GCH1H101J	CHIP C 100PF J	
C649-651			CK73GB1C104K	CHIP C 0.10UF K	
C652			C92-0507-05	CHIP-TAN 4.7UF 6.3WV	
C653,654			CK73GB1H472K	CHIP C 4700PF K	
C655			CC73GCH1H101J	CHIP C 100PF J	
C656			CK73FB1H563K	CHIP C 0.056UF K	
C657			C92-0507-05	CHIP-TAN 4.7UF 6.3WV	
C659			CK73GB1C104K	CHIP C 0.10UF K	
C660			C92-0560-05	CHIP-TAN 10UF 6.3WV	
C661			CK73GB1C104K	CHIP C 0.10UF K	
C663			CC73GCH1H101J	CHIP C 100PF J	
C664			CK73GB1C104K	CHIP C 0.10UF K	
C665			CK73GB1C333K	CHIP C 0.033UF K	
C666			CK73GB1E153K	CHIP C 0.015UF K	
C667			CC73GCH1H120J	CHIP C 12PF J	
C668			CK73GB1H102K	CHIP C 1000PF K	
C669			CC73GCH1H101J	CHIP C 100PF J	
C681			CK73GB1E103K	CHIP C 0.010UF K	
C700-710			CC73HCH1H101J	CHIP C 100PF J	
C714-720			CC73HCH1H101J	CHIP C 100PF J	
C722-728			CC73HCH1H101J	CHIP C 100PF J	
CN400		*	E40-5563-05	FLAT CABLE CONNECTOR	
CN401		*	E40-5947-05	FLAT CABLE CONNECTOR	
CN402			E40-5662-05	PIN ASSY SOCKET	
CN403		*	E40-5856-05	FLAT CABLE CONNECTOR	
CN404,405			E23-0342-05	TEST TERMINAL	
F400		*	F53-0143-05	CHIP FUSE 3A	
CD300			L79-1072-05	CERAMIC DISCRI	
CF300,301			L72-0916-05	CERAMIC FILTER	
CF302,303			L72-0939-05	CERAMIC FILTER	
L1			L92-0138-05	FERRITE CHIP	
L3			L92-0140-05	FERRITE CHIP	
L5			L40-3981-37	SMALL FIXED INDUCTOR (0.390UH)	
L7			L40-2275-44	SMALL FIXED INDUCTOR (22.0NH)	
L8		*	L40-1275-44	SMALL FIXED INDUCTOR (12.0NH)	
L9			L40-1575-44	SMALL FIXED INDUCTOR (15.0NH)	
L10,11			L92-0149-05	FERRITE CHIP	
L12			L33-0760-05	SMALL FIXED INDUCTOR	
L13			L40-1095-34	SMALL FIXED INDUCTOR (1UH)	
L14		*	L33-1224-05	SMALL FIXED INDUCTOR	
L15,16			L33-0761-05	SMALL FIXED INDUCTOR	
L17			L40-1092-81	SMALL FIXED INDUCTOR	
L18			L40-4791-37	SMALL FIXED INDUCTOR (4.700UH)	
L19		*	L40-2775-44	SMALL FIXED INDUCTOR (27.0NH)	
L20,21			L92-0140-05	FERRITE CHIP	
L150			L33-0760-05	SMALL FIXED INDUCTOR	
L152			L40-1075-44	SMALL FIXED INDUCTOR (10.0NH)	
L153			L40-3975-44	SMALL FIXED INDUCTOR (39.0NH)	
L200		*	L40-4775-34	SMALL FIXED INDUCTOR (47NH)	
L201			L40-2275-44	SMALL FIXED INDUCTOR (22.0NH)	

Ref. No.	Address	New parts	Parts No.	Description	Destination
L202		*	L40-8275-44	SMALL FIXED INDUCTOR (82.0NH)	
L203			L40-6875-44	SMALL FIXED INDUCTOR (68.0NH)	
L204		*	L40-3375-44	SMALL FIXED INDUCTOR (33.0NH)	
L205		*	L79-1470-05	HELICAL BLOCK	
L206			L40-2275-44	SMALL FIXED INDUCTOR (22.0NH)	
L207		*	L40-8275-44	SMALL FIXED INDUCTOR (82.0NH)	
L208			L40-6875-44	SMALL FIXED INDUCTOR (68.0NH)	
L209		*	L40-3375-44	SMALL FIXED INDUCTOR (33.0NH)	
L210		*	L79-1470-05	HELICAL BLOCK	
L212		*	L40-8275-44	SMALL FIXED INDUCTOR (82.0NH)	
L214		*	L40-8275-44	SMALL FIXED INDUCTOR (82.0NH)	
L215,216			L39-1272-05	TOROIDAL COIL	
L217			L92-0140-05	FERRITE CHIP	
L218			L39-1272-05	TOROIDAL COIL	
L219		*	L40-8275-44	SMALL FIXED INDUCTOR (82.0NH)	
L220			L40-1575-44	SMALL FIXED INDUCTOR (15.0NH)	
L300			L40-1095-34	SMALL FIXED INDUCTOR (1UH/8)	
L301			L40-3391-37	SMALL FIXED INDUCTOR (3.300UH)	
L400			L92-0136-05	FERRITE CHIP	
L401-403			L92-0138-05	FERRITE CHIP	
X1		*	L77-1704-05	TCXO (16.8MHz)	
X300		*	L77-1741-05	CRYSTAL RESONATOR (44.395MHz)	
X400			L78-0431-05	RESONATOR (14.7456MHz)	
X600			L77-1708-05	CRYSTAL RESONATOR (3.579545MHz)	
XF300		*	L71-0523-05	MCF (44.85MHz)	
XF301			L71-0502-05	MCF (44.85MHz)	
CP1			R90-0714-05	MULTI-COMP 10K X 4	
CP700-707			R90-0741-05	MULTIPLE RESISTOR	
CP711-716			R90-0741-05	MULTIPLE RESISTOR	
CP718-720			R90-0741-05	MULTIPLE RESISTOR	
R4			R92-1252-05	CHIP R 0 OHM	
R5			RK73GB1J104J	CHIP R 100K J 1/16W	
R6			RK73GB1J473J	CHIP R 47K J 1/16W	
R7			RK73GB1J104J	CHIP R 100K J 1/16W	
R8			RK73GB1J683J	CHIP R 68K J 1/16W	
R9			RK73GB1J183J	CHIP R 18K J 1/16W	
R11			RK73GB1J273J	CHIP R 27K J 1/16W	
R13			RK73GB1J104J	CHIP R 100K J 1/16W	
R14			RK73GB1J184J	CHIP R 180K J 1/16W	
R15			RK73GB1J682J	CHIP R 6.8K J 1/16W	
R16			RK73GB1J151J	CHIP R 150 J 1/16W	
R17			RK73GB1J394J	CHIP R 390K J 1/16W	
R18			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R19			RK73GB1J100J	CHIP R 10 J 1/16W	
R24			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R25			RK73GB1J224J	CHIP R 220K J 1/16W	
R27			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R28			RK73GB1J223J	CHIP R 22K J 1/16W	
R29			RK73GB1J184J	CHIP R 180K J 1/16W	
R31			RK73GB1J101J	CHIP R 100 J 1/16W	
R32			RK73GB1J122J	CHIP R 1.2K J 1/16W	
R33			RK73GB1J103J	CHIP R 10K J 1/16W	
R34			RK73GB1J223J	CHIP R 22K J 1/16W	
R35			RK73EB2ER39K	CHIP R 0.39 K 1/4W	
R37			RK73EB2ER39K	CHIP R 0.39 K 1/4W	
R38			RK73GB1J272J	CHIP R 2.7K J 1/16W	
R39			RK73EB2ER39K	CHIP R 0.39 K 1/4W	
R40			RK73GB1J682J	CHIP R 6.8K J 1/16W	
R41,42			RN73GH1J154D	CHIP R 150K D 1/16W	

TX-RX UNIT (X57-5400-10)

Ref. No.	Address	New parts	Parts No.	Description	Destination
R43			RK73GB1J220J	CHIP R 22 J 1/16W	
R44,45			RN73GH1J154D	CHIP R 150K D 1/16W	
R46			RK73GB1J152J	CHIP R 1.5K J 1/16W	
R47,48			RN73GH1J154D	CHIP R 150K D 1/16W	
R49			RK73GB1J101J	CHIP R 100 J 1/16W	
R50			RK73GB1J471J	CHIP R 470 J 1/16W	
R51			RK73GB1J221J	CHIP R 220 J 1/16W	
R52			RK73GB1J103J	CHIP R 10K J 1/16W	
R53			RK73GB1J820J	CHIP R 82 J 1/16W	
R54			RK73GB1J681J	CHIP R 680 J 1/16W	
R55			RK73GB1J100J	CHIP R 10 J 1/16W	
R56			RK73GB1J473J	CHIP R 47K J 1/16W	
R57			RK73GB1J104J	CHIP R 100K J 1/16W	
R58			RK73GB1J105J	CHIP R 1.0M J 1/16W	
R59			RK73GB1J104J	CHIP R 100K J 1/16W	
R60			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R61			R92-1252-05	CHIP R 0 OHM	
R63			R92-1252-05	CHIP R 0 OHM	
R65			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R69-71			RK73GB1J821J	CHIP R 820 J 1/16W	
R73			RK73GB1J223J	CHIP R 22K J 1/16W	
R74			RK73GB1J101J	CHIP R 100 J 1/16W	
R75			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R76			RK73GB1J101J	CHIP R 100 J 1/16W	
R79			RK73GB1J104J	CHIP R 100K J 1/16W	
R80			RK73GB1J560J	CHIP R 56 J 1/16W	
R82			R92-1252-05	CHIP R 0 OHM	
R200			RK73GB1J124J	CHIP R 120K J 1/16W	
R201			RK73GB1J103J	CHIP R 10K J 1/16W	
R202			RK73GB1J561J	CHIP R 560 J 1/16W	
R203			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R204			RK73GB1J121J	CHIP R 120 J 1/16W	
R205,206			RK73GB1J104J	CHIP R 100K J 1/16W	
R207			RK73GB1J124J	CHIP R 120K J 1/16W	
R208			RK73GB1J103J	CHIP R 10K J 1/16W	
R209			RK73GB1J561J	CHIP R 560 J 1/16W	
R210			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R211			RK73GB1J100J	CHIP R 10 J 1/16W	
R212,213			RK73GB1J104J	CHIP R 100K J 1/16W	
R214			R92-1252-05	CHIP R 0 OHM	
R215			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R216			RK73GB1J271J	CHIP R 270 J 1/16W	
R217			RK73GB1J101J	CHIP R 100 J 1/16W	
R218,219			R92-1252-05	CHIP R 0 OHM	
R220			RK73GB1J274J	CHIP R 270K J 1/16W	
R221			RK73GB1J224J	CHIP R 220K J 1/16W	
R222			RK73GB1J274J	CHIP R 270K J 1/16W	
R223			RK73GB1J184J	CHIP R 180K J 1/16W	
R300			RK73GB1J220J	CHIP R 22 J 1/16W	
R301			RK73GB1J122J	CHIP R 1.2K J 1/16W	
R303,304			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R305,306			R92-1252-05	CHIP R 0 OHM	
R307,308			RK73GB1J221J	CHIP R 220 J 1/16W	
R309,310			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R312			RK73GB1J122J	CHIP R 1.2K J 1/16W	
R313			RK73GB1J331J	CHIP R 330 J 1/16W	
R315			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R317,318			RK73GB1J223J	CHIP R 22K J 1/16W	
R319			RK73GB1J123J	CHIP R 12K J 1/16W	
R320			RK73GB1J392J	CHIP R 3.9K J 1/16W	

Ref. No.	Address	New parts	Parts No.	Description	Destination
R321			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R322			RK73GB1J272J	CHIP R 2.7K J 1/16W	
R324,325			RK73GB1J223J	CHIP R 22K J 1/16W	
R326			RK73GB1J473J	CHIP R 47K J 1/16W	
R328			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R329			RK73GB1J104J	CHIP R 100K J 1/16W	
R330			R92-1252-05	CHIP R 0 OHM	
R331			RK73GB1J104J	CHIP R 100K J 1/16W	
R332			RK73GB1J224J	CHIP R 220K J 1/16W	
R333			R92-1252-05	CHIP R 0 OHM	
R334			RK73GB1J100J	CHIP R 10 J 1/16W	
R335			RK73GB1J473J	CHIP R 47K J 1/16W	
R336,337			R92-1252-05	CHIP R 0 OHM	
R338			RK73GB1J220J	CHIP R 22 J 1/16W	
R400			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R401			RK73GB1J272J	CHIP R 2.7K J 1/16W	
R402			RK73GB1J332J	CHIP R 3.3K J 1/16W	
R403			RK73GB1J473J	CHIP R 47K J 1/16W	
R404			RK73GB1J182J	CHIP R 1.8K J 1/16W	
R405			RK73GB1J332J	CHIP R 3.3K J 1/16W	
R407			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R408			RK73GB1J104J	CHIP R 100K J 1/16W	
R409			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R410			RK73GB1J272J	CHIP R 2.7K J 1/16W	
R411			RK73GB1J821J	CHIP R 820 J 1/16W	
R412			RK73GB1J182J	CHIP R 1.8K J 1/16W	
R413			RK73GB1J473J	CHIP R 47K J 1/16W	
R414			R92-1252-05	CHIP R 0 OHM	
R415			RK73GB1J471J	CHIP R 470 J 1/16W	
R416,417			RK73GB1J104J	CHIP R 100K J 1/16W	
R420			RK73GB1J103J	CHIP R 10K J 1/16W	
R421			RK73GB1J223J	CHIP R 22K J 1/16W	
R422			RK73GB1J103J	CHIP R 10K J 1/16W	
R423			RK73GB1J473J	CHIP R 47K J 1/16W	
R424			RK73GB1J103J	CHIP R 10K J 1/16W	
R425			R92-1252-05	CHIP R 0 OHM	
R426			RK73GB1J103J	CHIP R 10K J 1/16W	
R428			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R429			RK73GB1J103J	CHIP R 10K J 1/16W	
R430			RK73GB1J473J	CHIP R 47K J 1/16W	
R432,433			RK73GB1J473J	CHIP R 47K J 1/16W	
R434			RK73GB1J103J	CHIP R 10K J 1/16W	
R435,436			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R438-440			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R442			RK73GB1J152J	CHIP R 1.5K J 1/16W	
R443			RK73GB1J821J	CHIP R 820 J 1/16W	
R444			R92-0670-05	CHIP R 0 OHM	
R445			R92-1252-05	CHIP R 0 OHM	
R446			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R447			RK73GB1J473J	CHIP R 47K J 1/16W	
R448			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R449,450			RK73GB1J473J	CHIP R 47K J 1/16W	
R452-455			RK73GB1J104J	CHIP R 100K J 1/16W	
R456-460			RK73GB1J473J	CHIP R 47K J 1/16W	
R463,464			RK73GB1J473J	CHIP R 47K J 1/16W	
R465			RK73GB1J104J	CHIP R 100K J 1/16W	
R466			R92-1252-05	CHIP R 0 OHM	
R467,468			RK73GB1J473J	CHIP R 47K J 1/16W	
R470-472			R92-1252-05	CHIP R 0 OHM	
R474			RK73GB1J103J	CHIP R 10K J 1/16W	

TX-RX UNIT (X57-5400-10)

Ref. No.	Address	New parts	Parts No.	Description	Destination
R475-477			RK73GB1J101J	CHIP R 100 J 1/16W	
R481			R92-1252-05	CHIP R 0 OHM	
R601			RK73GB1J153J	CHIP R 15K J 1/16W	
R602			RK73GB1J223J	CHIP R 22K J 1/16W	
R603			R92-1252-05	CHIP R 0 OHM	
R605,606			R92-1252-05	CHIP R 0 OHM	
R607			RK73GB1J153J	CHIP R 15K J 1/16W	
R608			RK73GB1J103J	CHIP R 10K J 1/16W	
R609			RK73GB1J154J	CHIP R 150K J 1/16W	
R610			RK73GB1J563J	CHIP R 56K J 1/16W	
R611			RK73GB1J184J	CHIP R 180K J 1/16W	
R612			RK73GB1J334J	CHIP R 330K J 1/16W	
R614			RK73GB1J184J	CHIP R 180K J 1/16W	
R615,616			RK73GB1J103J	CHIP R 10K J 1/16W	
R617			R92-1252-05	CHIP R 0 OHM	
R618			RK73GB1J683J	CHIP R 68K J 1/16W	
R620			RK73GB1J334J	CHIP R 330K J 1/16W	
R621			RK73GB1J683J	CHIP R 68K J 1/16W	
R622			RK73GB1J223J	CHIP R 22K J 1/16W	
R623			RK73GB1J154J	CHIP R 150K J 1/16W	
R624			RK73GB1J104J	CHIP R 100K J 1/16W	
R625			RK73GB1J333J	CHIP R 33K J 1/16W	
R626			RK73GB1J104J	CHIP R 100K J 1/16W	
R627			RK73GB1J684J	CHIP R 680K J 1/16W	
R628			RK73GB1J334J	CHIP R 330K J 1/16W	
R629			RK73GB1J223J	CHIP R 22K J 1/16W	
R632			RK73GB1J103J	CHIP R 10K J 1/16W	
R635			RK73GB1J393J	CHIP R 39K J 1/16W	
R637			R92-1252-05	CHIP R 0 OHM	
R638			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R639			RK73GB1J104J	CHIP R 100K J 1/16W	
R640			RN73GH1J683D	CHIP R 68K D 1/16W	
R641			RK73GB1J104J	CHIP R 100K J 1/16W	
R642			RN73GH1J333D	CHIP R 33K D 1/16W	
R643			RK73GB1J564J	CHIP R 560K J 1/16W	
R644			RK73GB1J474J	CHIP R 470K J 1/16W	
R645			RN73GH1J274D	CHIP R 270K D 1/16W	
R646			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R647			R92-1252-05	CHIP R 0 OHM	
R648			RK73GB1J104J	CHIP R 100K J 1/16W	
R649			RN73GH1J682D	CHIP R 6.8K D 1/16W	
R650			RK73GB1J103J	CHIP R 10K J 1/16W	
R651			RK73GB1J155J	CHIP R 1.5M J 1/16W	
R652			RK73GB1J473J	CHIP R 47K J 1/16W	
R653			RK73GB1J184J	CHIP R 180K J 1/16W	
R654			RN73GH1J683D	CHIP R 68K D 1/16W	
R655			RK73GB1J474J	CHIP R 470K J 1/16W	
R656			RN73GH1J682D	CHIP R 6.8K D 1/16W	
R657			RK73GB1J101J	CHIP R 100 J 1/16W	
R658			RK73GB1J224J	CHIP R 220K J 1/16W	
R659			RK73GB1J103J	CHIP R 10K J 1/16W	
R660			RK73GB1J223J	CHIP R 22K J 1/16W	
R661			RK73GB1J394J	CHIP R 390K J 1/16W	
R662			RK73GB1J470J	CHIP R 47 J 1/16W	
R663			RK73GB1J220J	CHIP R 22 J 1/16W	
R664			RK73GB1J333J	CHIP R 33K J 1/16W	
R665,666			R92-1252-05	CHIP R 0 OHM	
R668			RK73GB1J334J	CHIP R 330K J 1/16W	
R669			R92-1252-05	CHIP R 0 OHM	
R670-673			RK73GB1J472J	CHIP R 4.7K J 1/16W	

Ref. No.	Address	New parts	Parts No.	Description	Destination
R674			RK73GB1J104J	CHIP R 100K J 1/16W	
R675			RK73GB1J473J	CHIP R 47K J 1/16W	
R676			RK73GB1J684J	CHIP R 680K J 1/16W	
R677			RK73GB1J333J	CHIP R 33K J 1/16W	
R678			RK73GB1J184J	CHIP R 180K J 1/16W	
R700			RK73HB1J100J	CHIP R 10 J 1/16W	
R701,702			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R703-705			RK73HB1J100J	CHIP R 10 J 1/16W	
R706			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R707			R92-1368-05	CHIP R 0 OHM	
R708,709			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R710			RK73HB1J100J	CHIP R 10 J 1/16W	
R711-716			RK73HB1J102J	CHIP R 1.0K J 1/16W	
D4			MA2S111	DIODE	
D6			MA2S111	DIODE	
D7			DAN235E	DIODE	
D8			DA221	DIODE	
D9			MA8062	ZENER DIODE	
D10			MI809	DIODE	
D11			1SS312	DIODE	
D200			HSM88AS	DIODE	
D201-204			1SV273	VARIABLE CAPACITANCE DIODE	
D300-303			DAN235E	DIODE	
D400			1SR154-400	DIODE	
D401			MA2S111	DIODE	
D402,403			NNCD6.8G	ZENER DIODE	
D409			MA2S111	DIODE	
D601			MA742	DIODE	
IC2			LMC7101BIM5	IC (OP AMP)	
IC3		*	M62354GP	IC (D/A CONVERTER)	
IC4		*	MAX865	IC (DC/DC CONVERTER)	
IC5			SA7025DK	IC (PLL SYSTEM)	
IC6			LMC7101BIM5	IC (OP AMP)	
IC7			NJM2904V	IC (APC)	
IC10		*	KCH41	HIC (VCO)	
IC200			GN2011(Q)	IC	
IC300			TA31136FN	IC (FM IF DETECTOR)	
IC301			TC7S66FU	IC (ANALOG SWITCH)	
IC400			BU4094BCFV	IC (8bit SHIFT/STORE REGISTER)	
IC401,402			TK11250BM	IC (VOLTAGE REGULATOR)	
IC403-405			BU4094BCFV	IC (8bit SHIFT/STORE REGISTER)	
IC406		*	MC-8800-802	IC (MICRO PROCESSOR)	
IC407			RN5VL45C	IC (REGULATOR)	
IC408			TC7S08FU	IC (2INPUT AND GATE)	
IC409			PST9140NR	IC (RESET SW)	
IC410			TC7S32FU	IC (2INPUT OR GATE)	
IC411			TC7S02FU	IC (2∆INPUT NOR GATE)	
IC412			AT2408N10SI2.5	IC (8kbit SERIAL EEPROM)	
IC413			TA75S01F	IC (OP AMP)	
IC600			LC73872M	IC (DTMF RECEIVER)	
IC601			TC75W51FU	IC (OP AMP X2)	
IC602			TA75W01FU	IC (OP AMP X2)	
IC603			M62364FP	IC (D/A CONVERTER)	
IC604-606			TC75W51FU	IC (OP AMP X2)	
IC607			TC35453F	IC (AUDIO PROCESSOR)	
Q2			2SJ144(GR)	FET	
Q3			2SC5066(O)	TRANSISTOR	
Q4			2SC4617(S)	TRANSISTOR	
Q5			2SC5108(Y)	TRANSISTOR	

TX-RX UNIT (X57-5400-10)

Ref. No.	Address	New parts	Parts No.	Description	Destination
Q6			2SC5110(O)	TRANSISTOR	
Q7			DTC114EE	DIGITAL TRANSISTOR	
Q8			2SC4988	TRANSISTOR	
Q9			DTA144EE	DIGITAL TRANSISTOR	
Q10			DTC144EE	DIGITAL TRANSISTOR	
Q13			2SK1824	FET	
Q200,201			3SK274	FET	
Q300			DTA144EE	DIGITAL TRANSISTOR	
Q301			DTC144EE	DIGITAL TRANSISTOR	
Q302			2SK1215(E)	FET	
Q303			DTA144EE	DIGITAL TRANSISTOR	
Q304			DTC144EE	DIGITAL TRANSISTOR	
Q305			UMC4	TRANSISTOR	
Q307			UMH6	TRANSISTOR	
Q400			UMG3N	TRANSISTOR	
Q401			UPA572T	FET	
Q402			MP5A02	TRANSISTOR	
Q403			2SJ243	FET	
Q404			DTC144EE	DIGITAL TRANSISTOR	
Q405			UMG3N	TRANSISTOR	
Q406			DTA123JE	DIGITAL TRANSISTOR	
Q407			2SC4215(Y)	TRANSISTOR	
Q408-410			2SC4617(S)	TRANSISTOR	
Q411			2SB1132(Q,R)	TRANSISTOR	
Q600			DTC144EE	DIGITAL TRANSISTOR	
Q601-603			2SK1824	FET	

Ref. No.	Address	New parts	Parts No.	Description	Destination