


# EXPLODED VIEW (UNIT)

Block No.M1MM

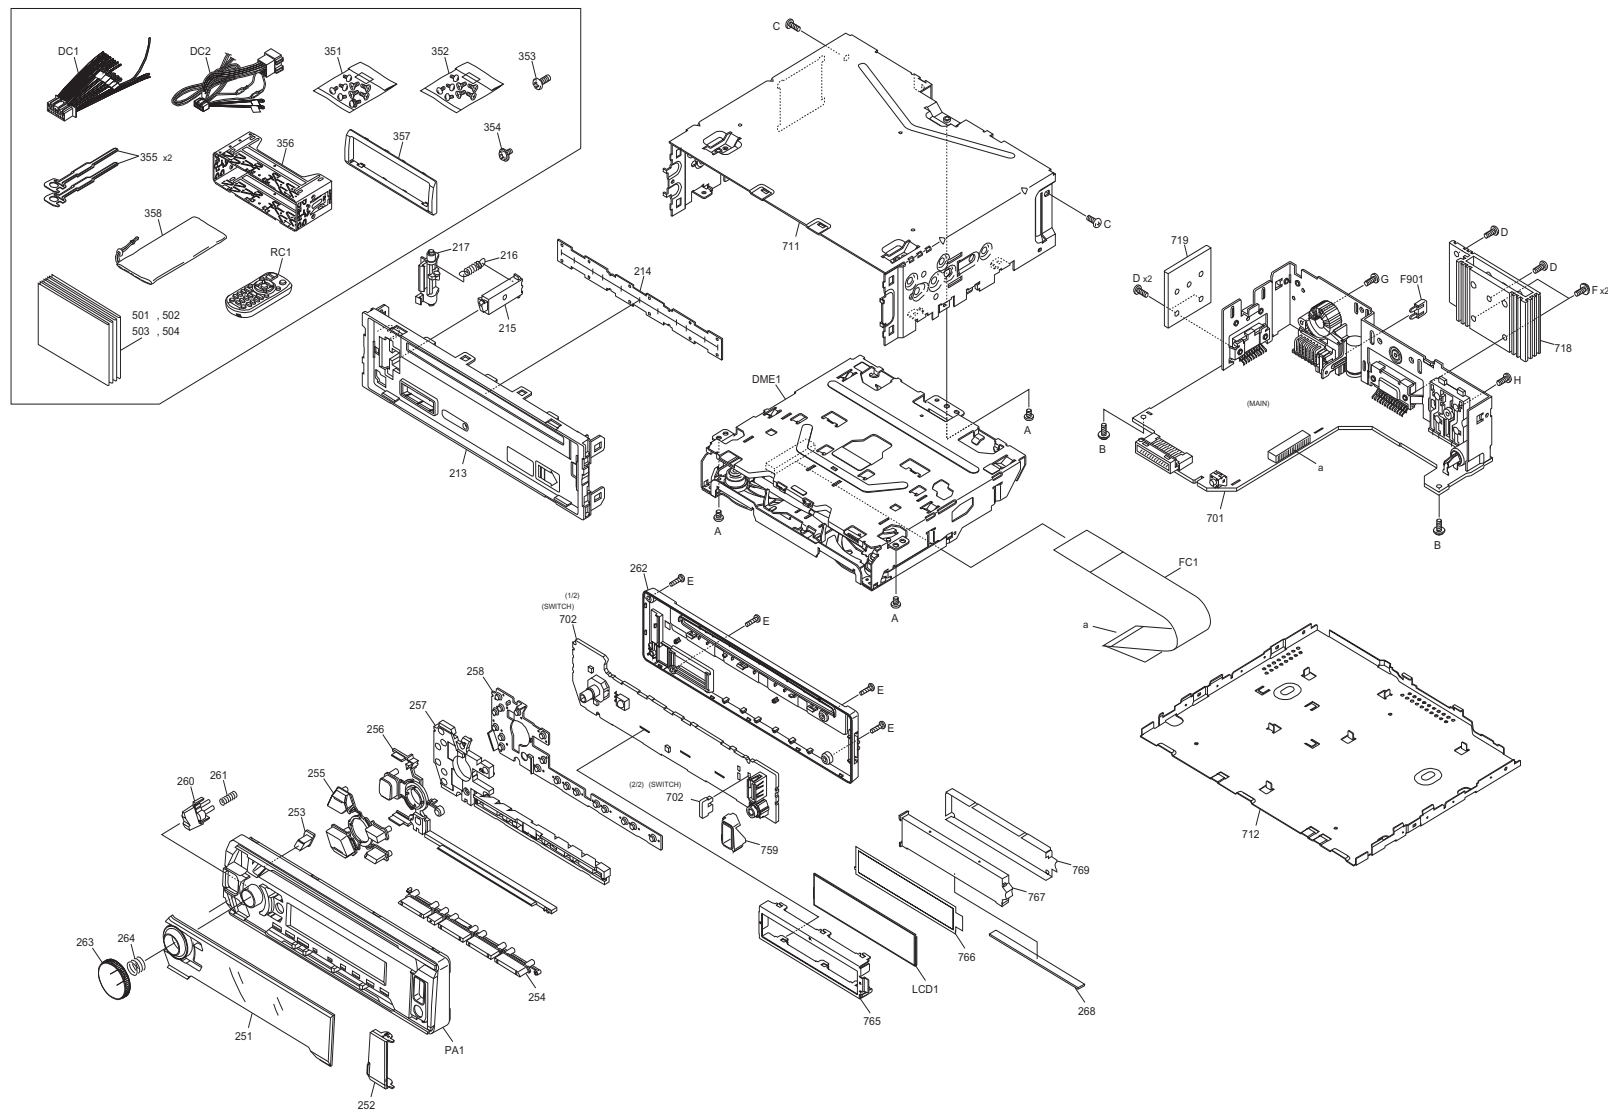

| MODEL      | MARK | MODEL      | MARK | MODEL      | MARK | MODEL      | MARK |
|------------|------|------------|------|------------|------|------------|------|
| KDC-100UA  | A1   | KDC-100UA  | M0   | KDC-100UB  | E5   | KDC-100UB  | H1   |
| KDC-100UB  | M2   | KDC-100UBS | E7   | KDC-100UG  | E4   | KDC-100UG  | M8   |
| KDC-100UR  | E3   | KDC-100UR  | M4   | KDC-100UW  | A2   | KDC-100UW  | M3   |
| KDC-1010U  | M6   | KDC-10UR   | E2   | KDC-115U   | K1   | KDC-125U   | K2   |
| KDC-150RY  | E6   | KDC-151UBM | M7   | KDC-161URM | M5   | KDC-165U   | K3   |
| KDC-181UWM | M9   | KDC-200UB  | E1   | KDC-230U   | K4   | KDC-MP165U | K0   |


| Safe                        | Symbol No. | Parts No.      | Parts Name      | Description     | QTY | Local                                                                |
|-----------------------------|------------|----------------|-----------------|-----------------|-----|----------------------------------------------------------------------|
| EXPLODED VIEW (UNIT) <M1MM> |            |                |                 |                 |     |                                                                      |
| △                           | DC1        | QAM1623-002    | DC CORD         |                 | 1   | A1,M0,H1,M2,M8,M4,A2,M3,M6,K1,K2,K3,K4,K0                            |
| △                           | DC2        | QAM1333-001    | DC CORD         |                 | 1   | E5,E7,E4,E3,E2,E6,M7,M5,M9,E1                                        |
| △                           | DME1       | XJJ-0370-00    | MECHANISM ASSY  |                 | 1   |                                                                      |
|                             | F901       | FZB10BT-100    | BLADE FUSE      |                 | 1   |                                                                      |
|                             | FC1        | WJT0335-001A-E | E-CARD WIRE     |                 | 1   |                                                                      |
|                             | LCD1       | B3H-0034-00    | LCD             |                 | 1   |                                                                      |
|                             | PA1        | A6D-0052-01    | PANEL           |                 | 1   | A1,M0,E5,H1,M2,E4,M8,E3,M4,A2,M3,E2,K1,K2,E6,K3,E1,K4,K0             |
|                             | PA1        | A6D-0052-02    | PANEL           |                 | 1   | E7                                                                   |
|                             | PA1        | A6D-0053-05    | PANEL           |                 | 1   | M6,M7,M5,M9                                                          |
|                             | RC1        | QAL1303-004    | REMOCON         |                 | 1   | A1,M0,H1,M2,M8,M4,A2,M3,M6,K1,K4,K0                                  |
|                             | A          | QYSDST2604ZA   | TAP SCREW       | M2.6 x 4mm      | 3   |                                                                      |
|                             | B          | GE40377-002A   | SPECIAL SCREW   |                 | 2   |                                                                      |
|                             | C          | QYSDST2606ZA   | TAP SCREW       | M2.6 x 6mm      | 2   |                                                                      |
|                             | D          | QYSDST2610ZA   | TAP SCREW       | M2.6 x 10mm     | 4   |                                                                      |
|                             | E          | QYSDSF2008ZA   | TAP SCREW       | M2 x 8mm        | 4   |                                                                      |
|                             | F          | GE40377-005A   | SPECIAL SCREW   |                 | 2   |                                                                      |
|                             | G          | QYSPSG3008ZA   | TAP SCREW       | M3 x 8mm        | 1   |                                                                      |
|                             | H          | QYSDSF2608ZA   | TAP SCREW       | M2.6 x 8mm      | 1   | A1,M0,E5,H1,M2,E7,E4,M8,E3,M4,A2,M3,M6,K1,K2,E6,M7,M5,K3,M9,E1,K4,K0 |
|                             | 213        | A2C-0021-01    | SUB PANEL       |                 | 1   |                                                                      |
|                             | 214        | F1K-0035-00    | BLIND PLATE     |                 | 1   |                                                                      |
|                             | 215        | D1A-0023-00    | LEVER           |                 | 1   |                                                                      |
|                             | 216        | G0A-0027-00    | EXTEN.SPRING    |                 | 1   |                                                                      |
|                             | 217        | D1A-0022-00    | LEVER           |                 | 1   |                                                                      |
|                             | 251        | B1A-0032-0Q    | FRONT GLASS     |                 | 1   | A1,M0,H1,M2,M8,M4,A2,M3                                              |
|                             | 251        | B1A-0032-0G    | FRONT GLASS     |                 | 1   | E5,E7,E4,E3                                                          |
|                             | 251        | B1A-0032-0R    | FRONT GLASS     |                 | 1   | M6                                                                   |
|                             | 251        | B1A-0032-05    | FRONT GLASS     |                 | 1   | E2                                                                   |
|                             | 251        | B1A-0033-00    | FRONT GLASS     |                 | 1   | K1                                                                   |
|                             | 251        | B1A-0032-00    | FRONT GLASS     |                 | 1   | K2                                                                   |
|                             | 251        | B1A-0032-0H    | FRONT GLASS     |                 | 1   | E6                                                                   |
|                             | 251        | B1A-0032-0U    | FRONT GLASS     |                 | 1   | M7                                                                   |
|                             | 251        | B1A-0032-0V    | FRONT GLASS     |                 | 1   | M5                                                                   |
|                             | 251        | B1A-0032-01    | FRONT GLASS     |                 | 1   | K3                                                                   |
|                             | 251        | B1A-0033-01    | FRONT GLASS     |                 | 1   | M9                                                                   |
|                             | 251        | B1A-0032-0K    | FRONT GLASS     |                 | 1   | E1                                                                   |
|                             | 251        | B1A-0032-02    | FRONT GLASS     |                 | 1   | K4                                                                   |
|                             | 251        | B1A-0032-03    | FRONT GLASS     |                 | 1   | K0                                                                   |
|                             | 252        | F0G-0096-00    | COVER           |                 | 1   |                                                                      |
|                             | 253        | K2F-0028-00    | PUSH KNOB       |                 | 1   |                                                                      |
|                             | 254        | K2F-0030-00    | PUSH KNOB       |                 | 1   |                                                                      |
|                             | 255        | K2F-0029-00    | PUSH KNOB       |                 | 1   |                                                                      |
|                             | 256        | B1B-0041-01    | LENS            |                 | 1   | A1,M0,E5,H1,M2,E7,E4,M8,E3,M4,A2,M3,M6,E2,E6,M7,M5,M9                |
|                             | 256        | B1B-0041-04    | LENS            |                 | 1   | K1,K2,K0                                                             |
|                             | 256        | B1B-0041-00    | LENS            |                 | 1   | K3,E1,K4                                                             |
|                             | 257        | B1K-0035-00    | LIGHTING BOARD  |                 | 1   |                                                                      |
|                             | 258        | E2K-0024-00    | CONDUCT RUBBER  |                 | 1   |                                                                      |
|                             | 260        | K2K-0162-00    | KNOB            |                 | 1   |                                                                      |
|                             | 261        | GE30999-013A   | COMP.SPRING     |                 | 1   |                                                                      |
|                             | 262        | A4G-0023-00    | REAR COVER      |                 | 1   |                                                                      |
|                             | 263        | K2K-0165-00    | KNOB BASE       |                 | 1   | A1,M0,E5,H1,M2,E7,E4,M8,E3,M4,A2,M3,M6,E6,E1                         |
|                             | 263        | K2K-0101-00    | KNOB            |                 | 1   | E2,K1,K2,M7,M5,K3,M9,K4,K0                                           |
|                             | 264        | GE40127-005A   | KNOB SPRING     |                 | 1   |                                                                      |
|                             | 268        | QNZ1117-001    | RUBBER CONNE    |                 | 1   |                                                                      |
|                             | 351        | GE40531-001A   | SCREW SET       |                 | 1   | A1,M0,H1,M2,M8,M4,A2,M3,M6,K0                                        |
|                             | 352        | GE40536-001A   | SCREW SET       |                 | 1   | M7,M5,M9                                                             |
|                             | 353        | QYSPSF2008ZA   | TAP SCREW       | M2 x 8mm        | 1   | A1,M0,H1,M2,M8,M4,A2,M3,M6,K1,K2,K3,K4,K0                            |
|                             | 354        | QYSPSPD4008ZA  | SCREW           | M4 x 8mm        | 1   | M7,M5,M9                                                             |
|                             | 355        | GE40685-001A   | HOOK            |                 | 2   |                                                                      |
|                             | 356        | GE20362-002A   | MOUNTING SLEEVE |                 | 1   |                                                                      |
|                             | 357        | B0H-0013-00    | ESCUTCHEON      |                 | 1   | A1,M0,H1,M2,M8,M4,A2,M3,M6,M7,M5,M9,E1                               |
|                             | 357        | B0H-0014-00    | ESCUTCHEON      |                 | 1   | E5,E7,E4,E3,E2,K1,K2,E6,K3,K4,K0                                     |
|                             | 358        | GE40521-001A   | CARRYING CASE   |                 | 1   | A1,M0,H1,M2,M8,M4,A2,M3,M6,M7,M5,M9                                  |
|                             | 501        | B5A-0873-00    | INST.MANUAL     | INA             | 1   | A1,A2                                                                |
|                             | 501        | B5A-0872-00    | INST.MANUAL     | ENG ARA         | 1   | M0,H1,M2,M8,M4,M3,M6,M7,M5,M9                                        |
|                             | 501        | B5A-0871-00    | INST.MANUAL     | FRE SPA POR DUT | 1   | E5,E7,E4,E3,E2,E1                                                    |
|                             | 501        | B5A-0869-00    | INST.MANUAL     | ENG FRE SPA     | 1   | K1,K2,K3,K4,K0                                                       |
|                             | 502        | B5A-0871-01    | INST.MANUAL     | ENG GER UKR     | 1   | E5,E7,E4,E3,E2,E6,E1                                                 |

| MODEL      | MARK | MODEL      | MARK | MODEL      | MARK | MODEL      | MARK |
|------------|------|------------|------|------------|------|------------|------|
| KDC-100UA  | A1   | KDC-100UA  | M0   | KDC-100UB  | E5   | KDC-100UB  | H1   |
| KDC-100UB  | M2   | KDC-100UBS | E7   | KDC-100UG  | E4   | KDC-100UG  | M8   |
| KDC-100UR  | E3   | KDC-100UR  | M4   | KDC-100UW  | A2   | KDC-100UW  | M3   |
| KDC-1010U  | M6   | KDC-10UR   | E2   | KDC-115U   | K1   | KDC-125U   | K2   |
| KDC-150RY  | E6   | KDC-151UBM | M7   | KDC-161URM | M5   | KDC-165U   | K3   |
| KDC-181UWM | M9   | KDC-200UB  | E1   | KDC-230U   | K4   | KDC-MP165U | K0   |

| Safe | Symbol No. | Parts No.   | Parts Name      | Description     | QTY | Local                                     |
|------|------------|-------------|-----------------|-----------------|-----|-------------------------------------------|
|      | 502        | B5A-0872-01 | INST.MANUAL     | RUS PER TUR     | 1   | M7,M5,M9                                  |
|      | 503        | B5A-0871-02 | INST.MANUAL     | ITA             | 1   | E5,E7,E4,E3,E2,E6,E1                      |
|      | 504        | B5A-0871-03 | INST.MANUAL     | RUS             | 1   | E5,E4,E3,E6,E1                            |
|      | 701        | -----       | MAIN PWB ASSY   | NO SERVICE PART | 1   | A1,M0,H1,M2,M8,M4,A2,M3,M6                |
|      | 701        | -----       | MAIN PWB ASSY   | NO SERVICE PART | 1   | E5,E7,E4,E3                               |
|      | 701        | -----       | MAIN PWB ASSY   | NO SERVICE PART | 1   | E2                                        |
|      | 701        | -----       | MAIN PWB ASSY   | NO SERVICE PART | 1   | K1                                        |
|      | 701        | -----       | MAIN PWB ASSY   | NO SERVICE PART | 1   | K2                                        |
|      | 701        | -----       | MAIN PWB ASSY   | NO SERVICE PART | 1   | E6                                        |
|      | 701        | -----       | MAIN PWB ASSY   | NO SERVICE PART | 1   | M7,M5,M9                                  |
|      | 701        | -----       | MAIN PWB ASSY   | NO SERVICE PART | 1   | K3                                        |
|      | 701        | -----       | MAIN PWB ASSY   | NO SERVICE PART | 1   | E1                                        |
|      | 701        | -----       | MAIN PWB ASSY   | NO SERVICE PART | 1   | K4                                        |
|      | 701        | -----       | MAIN PWB ASSY   | NO SERVICE PART | 1   | K0                                        |
|      | 702        | -----       | SWITCH PWB ASSY | NO SERVICE PART | 1   | A1,M0                                     |
|      | 702        | -----       | SWITCH PWB ASSY | NO SERVICE PART | 1   | E5,E7,E1                                  |
|      | 702        | -----       | SWITCH PWB ASSY | NO SERVICE PART | 1   | H1,M2                                     |
|      | 702        | -----       | SWITCH PWB ASSY | NO SERVICE PART | 1   | E4                                        |
|      | 702        | -----       | SWITCH PWB ASSY | NO SERVICE PART | 1   | M8                                        |
|      | 702        | -----       | SWITCH PWB ASSY | NO SERVICE PART | 1   | E3,E2,K2,E6,K3                            |
|      | 702        | -----       | SWITCH PWB ASSY | NO SERVICE PART | 1   | M4,K1,K4                                  |
|      | 702        | -----       | SWITCH PWB ASSY | NO SERVICE PART | 1   | A2,M3                                     |
|      | 702        | -----       | SWITCH PWB ASSY | NO SERVICE PART | 1   | M6,M9                                     |
|      | 702        | -----       | SWITCH PWB ASSY | NO SERVICE PART | 1   | M7                                        |
|      | 702        | -----       | SWITCH PWB ASSY | NO SERVICE PART | 1   | M5                                        |
|      | 702        | -----       | SWITCH PWB ASSY | NO SERVICE PART | 1   | K0                                        |
|      | 711        | -----       | TOP COVER       | NO SERVICE PART | 1   | A1,M0,H1,M2,M8,M4,A2,M3,M6,K1,K2,K3,K4,K0 |
|      | 711        | -----       | TOP COVER       | NO SERVICE PART | 1   | E5,E7,E4,E3,E2,E6,M7,M5,M9,E1             |
|      | 712        | -----       | BOTTOM PLATE    | NO SERVICE PART | 1   |                                           |
|      | 718        | -----       | HEAT SINK       | NO SERVICE PART | 1   |                                           |
|      | 719        | -----       | HEAT SINK       | NO SERVICE PART | 1   |                                           |
|      | 759        | -----       | LIGHTING BOARD  | NO SERVICE PART | 1   | M6,M7,M5,M9                               |
|      | 765        | -----       | LCD CASE        | NO SERVICE PART | 1   |                                           |
|      | 766        | -----       | OPTI.DIFFUSER   | NO SERVICE PART | 1   |                                           |
|      | 767        | -----       | LIGHTING BOARD  | NO SERVICE PART | 1   |                                           |
|      | 769        | -----       | REF.SHEET       | NO SERVICE PART | 1   |                                           |

## Block No.MBMM

- ★W01-1738-08
- W01-2067-08



| MODEL      | MARK | MODEL      | MARK | MODEL      | MARK | MODEL      | MARK |
|------------|------|------------|------|------------|------|------------|------|
| KDC-100UA  | A1   | KDC-100UA  | M0   | KDC-100UB  | E5   | KDC-100UB  | H1   |
| KDC-100UB  | M2   | KDC-100UBS | E7   | KDC-100UG  | E4   | KDC-100UG  | M8   |
| KDC-100UR  | E3   | KDC-100UR  | M4   | KDC-100UW  | A2   | KDC-100UW  | M3   |
| KDC-1010U  | M6   | KDC-10UR   | E2   | KDC-115U   | K1   | KDC-125U   | K2   |
| KDC-150RY  | E6   | KDC-151UBM | M7   | KDC-161URM | M5   | KDC-165U   | K3   |
| KDC-181UWM | M9   | KDC-200UB  | E1   | KDC-230U   | K4   | KDC-MP165U | K0   |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|------|------------|-----------|------------|-------------|-----|-------|
|------|------------|-----------|------------|-------------|-----|-------|

# EXPLODED VIEW (CD MECHANISM: XJJ-0370-00) <MBMM>

|      |               |                    |                 |   |
|------|---------------|--------------------|-----------------|---|
| DM1  | CM-FC2-MD     | MD CHASSIS ASSY    |                 | 1 |
| DM2  | CM-FC2-M      | LOADING MOTOR ASSY |                 | 1 |
| DPU1 | T2F-0002-00   | CD OPT PICKUP      |                 | 1 |
| FPC1 | QAL1465-001   | FPC                |                 | 1 |
| A    | LV45568-001A  | MINI SCREW         |                 | 2 |
| B    | QYSPSGT1745ZA | TAP SCREW          | M1.7 x 4.5mm    | 1 |
| C    | QYSPSPT2025MA | SCREW              | M2 x 2.5mm      | 2 |
| D    | VKZ4539-054   | MINI SCREW         |                 | 5 |
| E    | LV45818-001A  | G.HOLDER SCREW     |                 | 5 |
| F    | LV45815-001A  | M. SHAFT SCREW     |                 | 1 |
| G    | LV45816-001A  | ROLLER WASHER      |                 | 2 |
| 1    | LV11877-003A  | OUTER CHASSIS      |                 | 1 |
| 2    | LV11878-003A  | LOWER CHASSIS      |                 | 1 |
| 3    | LV3A174-002A  | DISC ARM L         |                 | 1 |
| 4    | LV3A175-001A  | DISC ARM R         |                 | 1 |
| 5    | LV23057-001A  | SLIDER R           |                 | 1 |
| 6    | LV3A178-001A  | TRIGGER SLIDER     |                 | 1 |
| 7    | LV23058-001A  | SLIDER L           |                 | 1 |
| 8    | LV3A179-002A  | TRIGGER ARM        |                 | 1 |
| 9    | LV3A173-001A  | JOINT LEVER        |                 | 1 |
| 10   | LV23055-003A  | ROLLER LEVER       |                 | 1 |
| 12   | LV3A181-002A  | TRANSFER ARM       |                 | 1 |
| 13   | LV45797-002A  | SL LOCK CAM        |                 | 1 |
| 14   | LV3A182-003A  | SL LOCK ARM        |                 | 1 |
| 15   | LV3A183-001A  | PICK LOCK ARM      |                 | 1 |
| 18   | LV3A187-002A  | HELICAL GEAR 1     |                 | 1 |
| 19   | LV3A188-001A  | TRANSFER GEAR      |                 | 1 |
| 20   | LV3A189-001A  | LOAD GEAR H        |                 | 1 |
| 21   | LV3A190-001A  | DRIVE GEAR         |                 | 1 |
| 22   | LV3A191-001A  | JOINT GEAR         |                 | 1 |
| 23   | LV3A192-001A  | WORM GEAR 2        |                 | 1 |
| 24   | LV3A193-001A  | HELICAL GEAR 2     |                 | 1 |
| 25   | LV3A194-001A  | LOAD GEAR V        |                 | 1 |
| 26   | LV3A195-001A  | PICK GEAR 1        |                 | 1 |
| 27   | LV3A196-001A  | PICK GEAR 2        |                 | 1 |
| 28   | LV3A197-001A  | RACK GEAR          |                 | 1 |
| 32   | LV45796-001A  | R.RETAINER L       |                 | 1 |
| 33   | D39-0403-05   | DAMPER             |                 | 2 |
| 38   | LV45809-001A  | FLOAT SPRING(F)    |                 | 2 |
| 39   | LV45810-001A  | TRIGGER SPRING     |                 | 1 |
| 40   | LV45811-001A  | LOAD SPRING        |                 | 1 |
| 41   | LV45812-001A  | ROLLER SPRING      |                 | 1 |
| 42   | LV45813-002A  | CLAMP SPRING       |                 | 1 |
| 43   | LV45814-001A  | PICK SPRING        |                 | 1 |
| 44   | LV36813-201A  | SUB GUIDE CAP      |                 | 1 |
| 46   | D2B-0037-00   | SHAFT              |                 | 1 |
| 49   | LV11881-002A  | GEAR HOLDER        |                 | 1 |
| 50   | LV11880-003A  | DISC GUIDE         |                 | 1 |
| 54   | CM-FC2-R      | ROLLER ASSY        |                 | 1 |
| 55   | D10-7176-03   | ARM                |                 | 1 |
| 56   | G01-4809-04   | EXTEN.SPRING       |                 | 1 |
| 57   | D39-0404-05   | DAMPER             |                 | 1 |
| 58   | LV45835-001A  | FLOAT SPRING(R)    |                 | 2 |
| 60   | LV3A271-001A  | CL BASE ASSY       |                 | 1 |
| 811  | -----         | CLAMP ARM          | NO SERVICE PART | 1 |
| 816  | -----         | ROLLER GEAR        | NO SERVICE PART | 1 |
| 817  | -----         | WORM GEAR 1        | NO SERVICE PART | 1 |
| 829  | -----         | ROLLER             | NO SERVICE PART | 2 |
| 830  | -----         | ROLLER SHAFT       | NO SERVICE PART | 1 |
| 831  | -----         | R.RETAINER R       | NO SERVICE PART | 1 |
| 834  | -----         | SIN TWIST WIRE     | NO SERVICE PART | 1 |
| 835  | -----         | SIN TWIST WIRE     | NO SERVICE PART | 1 |
| 836  | -----         | SIN TWIST WIRE     | NO SERVICE PART | 2 |
| 845  | -----         | HC TURN TABLE      | NO SERVICE PART | 1 |
| 847  | -----         | CLAMPER            | NO SERVICE PART | 1 |
| 848  | -----         | WIRE HOLDER        | NO SERVICE PART | 1 |
| 851  | -----         | MD CHASSIS ASSY    | NO SERVICE PART | 1 |
| 852  | -----         | SPINDLE MOTOR      | NO SERVICE PART | 1 |
| 853  | -----         | CD MECHA PWB ASSY  | NO SERVICE PART | 1 |
| 859  | -----         | MOTOR              | NO SERVICE PART | 1 |

| MODEL      | MARK | MODEL      | MARK | MODEL      | MARK | MODEL      | MARK |
|------------|------|------------|------|------------|------|------------|------|
| KDC-100UA  | A1   | KDC-100UA  | M0   | KDC-100UB  | E5   | KDC-100UB  | H1   |
| KDC-100UB  | M2   | KDC-100UBS | E7   | KDC-100UG  | E4   | KDC-100UG  | M8   |
| KDC-100UR  | E3   | KDC-100UR  | M4   | KDC-100UW  | A2   | KDC-100UW  | M3   |
| KDC-1010U  | M6   | KDC-10UR   | E2   | KDC-115U   | K1   | KDC-125U   | K2   |
| KDC-150RY  | E6   | KDC-151UBM | M7   | KDC-161URM | M5   | KDC-165U   | K3   |
| KDC-181UWM | M9   | KDC-200UB  | E1   | KDC-230U   | K4   | KDC-MP165U | K0   |

| Safe | Symbol No. | Parts No. | Parts Name | Description | QTY | Local |
|------|------------|-----------|------------|-------------|-----|-------|
|------|------------|-----------|------------|-------------|-----|-------|

# MAIN PWB ASSY (XJ1-095x-xx) <XJ1>

|   |       |                |                 |              |   |                                                                      |
|---|-------|----------------|-----------------|--------------|---|----------------------------------------------------------------------|
| △ | IC161 | TDA7718C       | ANALOG IC       |              | 1 |                                                                      |
|   | IC301 | JCV8034        | IC              |              | 1 |                                                                      |
|   | IC411 | MF1337S395901  | MCU IC          |              | 1 | K3,E1,K4                                                             |
| △ | IC540 | MN6627553APA   | IC              |              | 1 |                                                                      |
| △ | IC601 | TEF6657HN-X    | IC              |              | 1 |                                                                      |
| △ | IC701 | R5S726A0D216FP | IC              |              | 1 |                                                                      |
| △ | IC821 | W3F-0110-00    | ROM IC          |              | 1 |                                                                      |
|   | IC831 | BU4228F        | ANALOG IC       |              | 1 |                                                                      |
|   | IC841 | BR24T02FJ-W-X  | IC              |              | 1 |                                                                      |
|   | IC851 | BU1CTD3WG      | MOS IC          |              | 1 |                                                                      |
|   | IC861 | MP9942AGJ      | ANALOG IC       |              | 1 |                                                                      |
|   | IC891 | BD2242G-G      | MOS IC          |              | 1 |                                                                      |
| △ | IC901 | LV5685PV-H     | ANALOG IC       |              | 1 |                                                                      |
|   | IC941 | BU33TD3WG      | MOS IC          |              | 1 |                                                                      |
|   | Q250  | LTC043TEB-X    | DIGI TRANSISTOR |              | 1 | A1,M0,E5,H1,M2,E7,E4,M8,E3,M4,A2,M3,M6,K1,K2,E6,M7,M5,K3,M9,E1,K4,K0 |
|   | Q260  | LTC043TEB-X    | DIGI TRANSISTOR |              | 1 | A1,M0,E5,H1,M2,E7,E4,M8,E3,M4,A2,M3,M6,K1,K2,E6,M7,M5,K3,M9,E1,K4,K0 |
|   | Q270  | LTA024EEB-X    | DIGI TRANSISTOR |              | 1 |                                                                      |
|   | Q271  | LSAR523UBFS8   | TRANSISTOR      |              | 1 |                                                                      |
|   | Q272  | LTC024EEB-X    | DIGI TRANSISTOR |              | 1 |                                                                      |
|   | Q273  | LTA024EEB-X    | DIGI TRANSISTOR |              | 1 | A1,M0,E5,H1,M2,E7,E4,M8,E3,M4,A2,M3,M6,K1,K2,E6,M7,M5,K3,M9,E1,K4,K0 |
|   | Q320  | LTC043TEB-X    | DIGI TRANSISTOR |              | 1 | A1,M0,H1,M2,M8,M4,A2,M3,M6,E6,M7,M5,M9,K0                            |
|   | Q330  | LTC043TEB-X    | DIGI TRANSISTOR |              | 1 | A1,M0,H1,M2,M8,M4,A2,M3,M6,E6,M7,M5,M9,K0                            |
|   | Q540  | 2SA2188/E-X    | TRANSISTOR      |              | 1 |                                                                      |
|   | Q701  | LTA014YEB-X    | DIGI TRANSISTOR |              | 1 |                                                                      |
|   | D100  | RSB6.8SM-X     | BP Z DIODE      |              | 1 |                                                                      |
|   | D101  | RSB6.8SM-X     | BP Z DIODE      |              | 1 |                                                                      |
|   | D270  | BAW56-TP-X     | SI DIODE        |              | 1 |                                                                      |
|   | D271  | BAW56-TP-X     | SI DIODE        |              | 1 | A1,M0,E5,H1,M2,E7,E4,M8,E3,M4,A2,M3,M6,K1,K2,E6,M7,M5,K3,M9,E1,K4,K0 |
|   | D273  | DA2J101        | DIODE           |              | 1 |                                                                      |
|   | D370  | BAW56-TP-X     | SI DIODE        |              | 1 |                                                                      |
|   | D390  | MBRX130        | SCHOTTKY DIODE  |              | 1 |                                                                      |
|   | D391  | MBR0530-X      | SB DIODE        |              | 1 |                                                                      |
|   | D400  | RB521SM-30-X   | SB DIODE        |              | 1 |                                                                      |
|   | D401  | DZ2J051M       | ZENER DIODE     |              | 1 |                                                                      |
|   | D861  | DB22306        | SCHOTTKY DIODE  |              | 1 |                                                                      |
|   | D902  | SK34A-L-X      | SB DIODE        |              | 1 |                                                                      |
|   | D903  | SK34A-L-X      | SB DIODE        |              | 1 |                                                                      |
| △ | D990  | 1N5401-BPC04   | SI DIODE        |              | 1 |                                                                      |
|   | C100  | CK73GXR1H104K  | C CAPACITOR     | 0.1uF 50V K  | 1 |                                                                      |
|   | C101  | CK73GBB1H472K  | C CAPACITOR     | 4700pF 50V K | 1 |                                                                      |
|   | C102  | CK73GBB1H472K  | C CAPACITOR     | 4700pF 50V K | 1 |                                                                      |
|   | C103  | CK73GXR1C105K  | C CAPACITOR     | 1uF 16V K    | 1 |                                                                      |
|   | C104  | CK73GXR1C105K  | C CAPACITOR     | 1uF 16V K    | 1 |                                                                      |
|   | C105  | CK73GXR1C105K  | C CAPACITOR     | 1uF 16V K    | 1 |                                                                      |
|   | C161  | CK73GXR1A105K  | C CAPACITOR     | 1uF 10V K    | 1 |                                                                      |
|   | C162  | CK73GXR1A105K  | C CAPACITOR     | 1uF 10V K    | 1 |                                                                      |
|   | C163  | CD04AV1V4R7M   | E CAPACITOR     | 4.7uF 35V M  | 1 |                                                                      |
|   | C164  | CD04AV1V4R7M   | E CAPACITOR     | 4.7uF 35V M  | 1 |                                                                      |
|   | C165  | CD04AV1C100M   | E CAPACITOR     | 10uF 16V M   | 1 |                                                                      |
|   | C167  | CK73GXR1A105K  | C CAPACITOR     | 1uF 10V K    | 1 |                                                                      |
|   | C168  | CK73GXR1A105K  | C CAPACITOR     | 1uF 10V K    | 1 |                                                                      |
|   | C169  | CK73GXR1A105K  | C CAPACITOR     | 1uF 10V K    | 1 |                                                                      |
|   | C171  | CK73GXR1A105K  | C CAPACITOR     | 1uF 10V K    | 1 |                                                                      |
|   | C177  | CK73GXR1A105K  | C CAPACITOR     | 1uF 10V K    | 1 |                                                                      |
|   | C251  | CK73EBB1C475K  | C CAPACITOR     | 4.7uF 16V K  | 1 | A1,M0,E5,H1,M2,E7,E4,M8,E3,M4,A2,M3,M6,K1,K2,E6,M7,M5,K3,M9,E1,K4,K0 |
|   | C261  | CK73EBB1C475K  | C CAPACITOR     | 4.7uF 16V K  | 1 | A1,M0,E5,H1,M2,E7,E4,M8,E3,M4,A2,M3,M6,K1,K2,E6,M7,M5,K3,M9,E1,K4,K0 |
|   | C303  | CC73GCH1H820J  | C CAPACITOR     | 82pF 50V J   | 1 |                                                                      |
|   | C304  | CD04AV1C470M   | E CAPACITOR     | 47uF 16V M   | 1 |                                                                      |
|   | C312  | CK730AV1C105K  | C CAPACITOR     | 1uF 16V K    | 1 |                                                                      |
|   | C316  | CK730AV1C224K  | C CAPACITOR     | 0.22uF 16V K | 1 |                                                                      |
|   | C317  | CK730AV1C224K  | C CAPACITOR     | 0.22uF 16V K | 1 |                                                                      |
|   | C318  | CK730AV1C224K  | C CAPACITOR     | 0.22uF 16V K | 1 |                                                                      |
|   | C319  | CK730AV1C224K  | C CAPACITOR     | 0.22uF 16V K | 1 |                                                                      |
|   | C321  | CK73EBB1C475K  | C CAPACITOR     | 4.7uF 16V K  | 1 | A1,M0,H1,M2,M8,M4,A2,M3,M6,E6,M7,M5,M9,K0                            |
|   | C331  | CK73EBB1C475K  | C CAPACITOR     | 4.7uF 16V K  | 1 | A1,M0,H1,M2,M8,M4,A2,M3,M6,E6,M7,M5,M9,K0                            |

| MODEL      | MARK | MODEL      | MARK | MODEL      | MARK | MODEL      | MARK |
|------------|------|------------|------|------------|------|------------|------|
| KDC-100UA  | A1   | KDC-100UA  | M0   | KDC-100UB  | E5   | KDC-100UB  | H1   |
| KDC-100UB  | M2   | KDC-100UBS | E7   | KDC-100UG  | E4   | KDC-100UG  | M8   |
| KDC-100UR  | E3   | KDC-100UR  | M4   | KDC-100UW  | A2   | KDC-100UW  | M3   |
| KDC-1010U  | M6   | KDC-10UR   | E2   | KDC-115U   | K1   | KDC-125U   | K2   |
| KDC-150RY  | E6   | KDC-151UBM | M7   | KDC-161URM | M5   | KDC-165U   | K3   |
| KDC-181UWM | M9   | KDC-200UB  | E1   | KDC-230U   | K4   | KDC-MP165U | K0   |

| Safe | Symbol No. | Parts No.     | Parts Name  | Description   | QTY | Local    |
|------|------------|---------------|-------------|---------------|-----|----------|
|      | C368       | CK73GXR1A105K | C CAPACITOR | 1uF 10V K     | 1   | K3,E1,K4 |
|      | C369       | CK73FBB0J475K | C CAPACITOR | 4.7uF 6.3V K  | 1   |          |
|      | C370       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |          |
|      | C390       | CK73FBB1H224K | C CAPACITOR | 0.22uF 50V K  | 1   |          |
|      | C391       | CK73FBB1H224K | C CAPACITOR | 0.22uF 50V K  | 1   |          |
|      | C410       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |          |
|      | C510       | CK73GBB1H471K | C CAPACITOR | 470pF 50V K   | 1   |          |
|      | C540       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |          |
|      | C541       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |          |
|      | C544       | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |          |
|      | C545       | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |          |
|      | C546       | CK73GBB1H682K | C CAPACITOR | 6800pF 50V K  | 1   |          |
|      | C547       | CK73GBB1H682K | C CAPACITOR | 6800pF 50V K  | 1   |          |
|      | C548       | CK73FXR1C475K | C CAPACITOR | 4.7uF 16V K   | 1   |          |
|      | C549       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |          |
|      | C550       | CK73GBB1C154K | C CAPACITOR | 0.15uF 16V K  | 1   |          |
|      | C552       | CK73GBB1H682K | C CAPACITOR | 6800pF 50V K  | 1   |          |
|      | C553       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |          |
|      | C555       | CK73GBB1H223K | C CAPACITOR | 0.022uF 50V K | 1   |          |
|      | C556       | CK73GBB1H332K | C CAPACITOR | 3300pF 50V K  | 1   |          |
|      | C557       | CK73GBB1A334K | C CAPACITOR | 0.33uF 10V K  | 1   |          |
|      | C558       | CK73FXR1A475K | C CAPACITOR | 4.7uF 10V K   | 1   |          |
|      | C559       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |          |
|      | C560       | CK73GBB1H681K | C CAPACITOR | 680pF 50V K   | 1   |          |
|      | C561       | CK73EXR1A106K | C CAPACITOR | 10uF 10V K    | 1   |          |
|      | C562       | CK73GBB1H153K | C CAPACITOR | 0.015uF 50V K | 1   |          |
|      | C563       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |          |
|      | C564       | CK73GBB1H102K | C CAPACITOR | 1000pF 50V K  | 1   |          |
|      | C565       | CK73GBB1E823K | C CAPACITOR | 0.082uF 25V K | 1   |          |
|      | C567       | CK73GBB1H102K | C CAPACITOR | 1000pF 50V K  | 1   |          |
|      | C568       | CK73GBB1A334K | C CAPACITOR | 0.33uF 10V K  | 1   |          |
|      | C570       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |          |
|      | C571       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |          |
|      | C572       | CK73FXR0J106K | C CAPACITOR | 10uF 6.3V K   | 1   |          |
|      | C573       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |          |
|      | C576       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |          |
|      | C577       | CC73GCH1H100D | C CAPACITOR | 10pF 50V D    | 1   |          |
|      | C578       | CC73GCH1H100D | C CAPACITOR | 10pF 50V D    | 1   |          |
|      | C579       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |          |
|      | C583       | CK73GBB1H821K | C CAPACITOR | 820pF 50V K   | 1   |          |
|      | C584       | CK73GBB1H821K | C CAPACITOR | 820pF 50V K   | 1   |          |
|      | C588       | CK73GBB1H681K | C CAPACITOR | 680pF 50V K   | 1   |          |
|      | C589       | CK73GBB1H681K | C CAPACITOR | 680pF 50V K   | 1   |          |
|      | C601       | CK73FXR0J106K | C CAPACITOR | 10uF 6.3V K   | 1   |          |
|      | C602       | CK73FXR0J106K | C CAPACITOR | 10uF 6.3V K   | 1   |          |
|      | C603       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |          |
|      | C604       | CK73GBB1H152K | C CAPACITOR | 1500pF 50V K  | 1   |          |
|      | C605       | CK73GBB1H102K | C CAPACITOR | 1000pF 50V K  | 1   |          |
|      | C606       | CC73GCH1H090D | C CAPACITOR | 9pF 50V D     | 1   |          |
| △    | C607       | CC73GCH1H010C | C CAPACITOR | 1pF 50V C     | 1   |          |
|      | C608       | CK73GBB1H102K | C CAPACITOR | 1000pF 50V K  | 1   |          |
|      | C609       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |          |
|      | C610       | CC73GCH1H120J | C CAPACITOR | 12pF 50V J    | 1   |          |
| △    | C611       | CC73GCH1H010C | C CAPACITOR | 1pF 50V C     | 1   |          |
|      | C612       | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |          |
|      | C614       | CC73GCH1H220J | C CAPACITOR | 22pF 50V J    | 1   |          |
|      | C615       | CC73GCH1H330J | C CAPACITOR | 33pF 50V J    | 1   |          |
|      | C616       | CK73GBB1H102K | C CAPACITOR | 1000pF 50V K  | 1   |          |
|      | C617       | CK73GBB1C224K | C CAPACITOR | 0.22uF 16V K  | 1   |          |
|      | C618       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |          |
|      | C619       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |          |
|      | C624       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |          |
|      | C700       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |          |
|      | C701       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |          |
|      | C702       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |          |
|      | C703       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |          |
|      | C704       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |          |
|      | C705       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |          |
|      | C706       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |          |
|      | C707       | CC73GCH1H100D | C CAPACITOR | 10pF 50V D    | 1   |          |
|      | C708       | CC73GCH1H100D | C CAPACITOR | 10pF 50V D    | 1   |          |
|      | C709       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |          |
|      | C710       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |          |
|      | C711       | CK73GBB1H472K | C CAPACITOR | 4700pF 50V K  | 1   |          |
|      | C712       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |          |
|      | C713       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |          |
|      | C716       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |          |
|      | C717       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |          |
|      | C718       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |          |
|      | C722       | CK73GBB1H472K | C CAPACITOR | 4700pF 50V K  | 1   |          |
|      | C723       | CK73GBB1H472K | C CAPACITOR | 4700pF 50V K  | 1   |          |
|      | C724       | CK73GBB1H472K | C CAPACITOR | 4700pF 50V K  | 1   |          |
|      | C820       | CK73GBB1H472K | C CAPACITOR | 4700pF 50V K  | 1   |          |
|      | C830       | CK73GBB1H682K | C CAPACITOR | 6800pF 50V K  | 1   |          |
|      | C831       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |          |
|      | C832       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |          |
|      | C840       | CK73GBB1C473K | C CAPACITOR | 0.047uF 16V K | 1   |          |
|      | C850       | CK73GBB1C474K | C CAPACITOR | 0.47uF 16V K  | 1   |          |

| MODEL      | MARK | MODEL      | MARK | MODEL      | MARK | MODEL      | MARK |
|------------|------|------------|------|------------|------|------------|------|
| KDC-100UA  | A1   | KDC-100UA  | M0   | KDC-100UB  | E5   | KDC-100UB  | H1   |
| KDC-100UB  | M2   | KDC-100UBS | E7   | KDC-100UG  | E4   | KDC-100UG  | M8   |
| KDC-100UR  | E3   | KDC-100UR  | M4   | KDC-100UW  | A2   | KDC-100UW  | M3   |
| KDC-1010U  | M6   | KDC-10UR   | E2   | KDC-115U   | K1   | KDC-125U   | K2   |
| KDC-150RY  | E6   | KDC-151UBM | M7   | KDC-161URM | M5   | KDC-165U   | K3   |
| KDC-181UWM | M9   | KDC-200UB  | E1   | KDC-230U   | K4   | KDC-MP165U | K0   |

| Safe | Symbol No. | Parts No.     | Parts Name  | Description   | QTY | Local                                                                |
|------|------------|---------------|-------------|---------------|-----|----------------------------------------------------------------------|
|      | C851       | CK73GBB1C474K | C CAPACITOR | 0.47uF 16V K  | 1   |                                                                      |
|      | C852       | CD04AS0J101M  | E CAPACITOR | 100uF 6.3V M  | 1   |                                                                      |
|      | C860       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |                                                                      |
|      | C861       | CK73EXR1A106K | C CAPACITOR | 10uF 10V K    | 1   |                                                                      |
|      | C862       | CK73EXR1A106K | C CAPACITOR | 10uF 10V K    | 1   |                                                                      |
|      | C863       | CK73GBB1C224K | C CAPACITOR | 0.22uF 16V K  | 1   |                                                                      |
|      | C864       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |                                                                      |
|      | C866       | CK73EXR1A106K | C CAPACITOR | 10uF 10V K    | 1   |                                                                      |
|      | C867       | CK73EXR1A106K | C CAPACITOR | 10uF 10V K    | 1   |                                                                      |
|      | C868       | QE20850-157Z  | E CAPACITOR | 150uF         | 1   |                                                                      |
|      | C869       | CK73GBB1C224K | C CAPACITOR | 0.22uF 16V K  | 1   |                                                                      |
|      | C870       | CC73GCH1H150J | C CAPACITOR | 15pF 50V J    | 1   |                                                                      |
|      | C891       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |                                                                      |
|      | C892       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |                                                                      |
|      | C893       | CK73GXR0J106M | C CAPACITOR | 10uF 6.3V M   | 1   |                                                                      |
|      | C903       | CD04AS1C220M  | E CAPACITOR | 22uF 16V M    | 1   |                                                                      |
|      | C904       | CK73GXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |                                                                      |
|      | C905       | CD04AR1C471M  | E CAPACITOR | 470uF 16V M   | 1   |                                                                      |
|      | C906       | CK73GXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |                                                                      |
|      | C907       | CD04AS0J101M  | E CAPACITOR | 100uF 6.3V M  | 1   |                                                                      |
|      | C908       | CK73GXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |                                                                      |
|      | C909       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |                                                                      |
|      | C911       | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |                                                                      |
|      | C912       | CK73GXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |                                                                      |
|      | C914       | CK73GXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |                                                                      |
|      | C916       | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |                                                                      |
|      | C940       | CK73FXR0J106K | C CAPACITOR | 10uF 6.3V K   | 1   |                                                                      |
|      | C941       | CK73GXR1A105K | C CAPACITOR | 1uF 10V K     | 1   |                                                                      |
|      | C942       | CK73FXR0J106K | C CAPACITOR | 10uF 6.3V K   | 1   |                                                                      |
|      | C990       | QE20981-228   | E CAPACITOR | 2200uF        | 1   |                                                                      |
|      | C1000      | CK73GBB1H472K | C CAPACITOR | 4700pF 50V K  | 1   |                                                                      |
|      | C1010      | CK73GBB1H471K | C CAPACITOR | 470pF 50V K   | 1   | A1,M0,H1,M2,M8,M4,A2,M3,M6,K1,M7,M5,M9,K0                            |
|      | C1011      | CK73GBB1H471K | C CAPACITOR | 470pF 50V K   | 1   | A1,M0,H1,M2,M8,M4,A2,M3,M6,K1,M7,M5,M9,K0                            |
|      | C1012      | CK73GBB1H471K | C CAPACITOR | 470pF 50V K   | 1   | A1,M0,H1,M2,M8,M4,A2,M3,M6,K1,M7,M5,M9,K0                            |
|      | C1013      | CK73GBB1H471K | C CAPACITOR | 470pF 50V K   | 1   | A1,M0,H1,M2,M8,M4,A2,M3,M6,K1,M7,M5,M9,K0                            |
|      | C1014      | CK73GBB1H471K | C CAPACITOR | 470pF 50V K   | 1   | A1,M0,H1,M2,M8,M4,A2,M3,M6,K1,M7,M5,M9,K0                            |
|      | C1015      | CK73GBB1H471K | C CAPACITOR | 470pF 50V K   | 1   | A1,M0,H1,M2,M8,M4,A2,M3,M6,K1,M7,M5,M9,K0                            |
|      | C1016      | CK73GBB1H471K | C CAPACITOR | 470pF 50V K   | 1   | A1,M0,H1,M2,M8,M4,A2,M3,M6,K1,M7,M5,M9,K0                            |
|      | C1017      | CK73GBB1H471K | C CAPACITOR | 470pF 50V K   | 1   | A1,M0,H1,M2,M8,M4,A2,M3,M6,K1,M7,M5,M9,K0                            |
|      | C1022      | CK73GBB1H472K | C CAPACITOR | 4700pF 50V K  | 1   |                                                                      |
|      | C1023      | CK73GBB1H472K | C CAPACITOR | 4700pF 50V K  | 1   |                                                                      |
|      | C1028      | CK73GBB1H472K | C CAPACITOR | 4700pF 50V K  | 1   |                                                                      |
|      | C1033      | CK73GBB1H472K | C CAPACITOR | 4700pF 50V K  | 1   |                                                                      |
|      | C1034      | CK73GBB1H472K | C CAPACITOR | 4700pF 50V K  | 1   |                                                                      |
|      | C1035      | CK73GBB1H472K | C CAPACITOR | 4700pF 50V K  | 1   |                                                                      |
|      | C1051      | CK73GBB1H221K | C CAPACITOR | 220pF 50V K   | 1   | E5,E7,E4,E3,E2,K2,E6,K3,E1,K4                                        |
|      | C1054      | CK73GBB1H223K | C CAPACITOR | 0.022uF 50V K | 1   | E5,E7,E4,E3,E2,K2,E6,K3,E1,K4                                        |
|      | C1320      | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |                                                                      |
|      | C1600      | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |                                                                      |
|      | C1601      | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   | A1,M0,E5,H1,M2,E7,E4,M8,E3,M4,A2,M3,M6,K1,K2,E6,M7,M5,K3,M9,E1,K4,K0 |
|      | C1602      | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |                                                                      |
|      | C1603      | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   | A1,M0,E5,H1,M2,E7,E4,M8,E3,M4,A2,M3,M6,K1,K2,E6,M7,M5,K3,M9,E1,K4,K0 |
|      | C1604      | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   | A1,M0,E5,H1,M2,E7,E4,M8,E3,M4,A2,M3,M6,K1,K2,E6,M7,M5,K3,M9,E1,K4,K0 |
|      | C1605      | CK73GXR1H104K | C CAPACITOR | 0.1uF 50V K   | 1   |                                                                      |
|      | C1900      | CK73GBB1H103K | C CAPACITOR | 0.01uF 50V K  | 1   |                                                                      |
|      | C1901      | CK73GBB1H471K | C CAPACITOR | 470pF 50V K   | 1   |                                                                      |
|      | R100       | RK73GB2A471J  | MG RESISTOR | 470Ω 1/10W J  | 1   |                                                                      |
|      | R103       | RK73GB2A473J  | MG RESISTOR | 47kΩ 1/10W J  | 1   |                                                                      |
|      | R104       | RK73GB2A473J  | MG RESISTOR | 47kΩ 1/10W J  | 1   |                                                                      |
|      | R167       | RK73GB2A000J  | MG RESISTOR | 0Ω 1/10W J    | 1   |                                                                      |
|      | R168       | RK73GB2A101J  | MG RESISTOR | 100Ω 1/10W J  | 1   |                                                                      |
|      | R169       | RK73GB2A101J  | MG RESISTOR | 100Ω 1/10W J  | 1   |                                                                      |
|      | R170       | RK73GB2A000J  | MG RESISTOR | 0Ω 1/10W J    | 1   |                                                                      |
|      | R171       | RK73GB2A103J  | MG RESISTOR | 10kΩ 1/10W J  | 1   |                                                                      |
|      | R250       | RK73GB2A181J  | MG RESISTOR | 180Ω 1/10W J  | 1   | A1,M0,E5,H1,M2,E7,E4,M8,E3,M4,A2,M3,M6,K1,K2,E6,M7,M5,K3,M9,E1,K4,K0 |
|      | R251       | RK73GB2A223J  | MG RESISTOR | 22kΩ 1/10W J  | 1   | A1,M0,E5,H1,M2,E7,E4                                                 |

| MODEL      | MARK | MODEL      | MARK | MODEL      | MARK | MODEL      | MARK |
|------------|------|------------|------|------------|------|------------|------|
| KDC-100UA  | A1   | KDC-100UA  | M0   | KDC-100UB  | E5   | KDC-100UB  | H1   |
| KDC-100UB  | M2   | KDC-100UBS | E7   | KDC-100UG  | E4   | KDC-100UG  | M8   |
| KDC-100UR  | E3   | KDC-100UR  | M4   | KDC-100UW  | A2   | KDC-100UW  | M3   |
| KDC-1010U  | M6   | KDC-10UR   | E2   | KDC-115U   | K1   | KDC-125U   | K2   |
| KDC-150RY  | E6   | KDC-151UBM | M7   | KDC-161URM | M5   | KDC-165U   | K3   |
| KDC-181UWM | M9   | KDC-200UB  | E1   | KDC-230U   | K4   | KDC-MP165U | K0   |

| Safe | Symbol No. | Parts No.    | Parts Name  | Description   | QTY | Local                                                                            |
|------|------------|--------------|-------------|---------------|-----|----------------------------------------------------------------------------------|
|      | R252       | RK73GB2A331J | MG RESISTOR | 330Ω 1/10W J  | 1   | ,M8,E3,M4,A2,M3,M6,K1,<br>K2,E6,M7,M5,K3,M9,E1,K<br>4,K0                         |
|      | R260       | RK73GB2A181J | MG RESISTOR | 180Ω 1/10W J  | 1   | A1,M0,E5,H1,M2,E7,E4<br>,M8,E3,M4,A2,M3,M6,K1,<br>K2,E6,M7,M5,K3,M9,E1,K<br>4,K0 |
|      | R261       | RK73GB2A223J | MG RESISTOR | 22kΩ 1/10W J  | 1   | A1,M0,E5,H1,M2,E7,E4<br>,M8,E3,M4,A2,M3,M6,K1,<br>K2,E6,M7,M5,K3,M9,E1,K<br>4,K0 |
|      | R262       | RK73GB2A331J | MG RESISTOR | 330Ω 1/10W J  | 1   | A1,M0,E5,H1,M2,E7,E4<br>,M8,E3,M4,A2,M3,M6,K1,<br>K2,E6,M7,M5,K3,M9,E1,K<br>4,K0 |
|      | R270       | RK73GB2A104J | MG RESISTOR | 100kΩ 1/10W J | 1   |                                                                                  |
|      | R271       | RK73GB2A331J | MG RESISTOR | 330Ω 1/10W J  | 1   |                                                                                  |
|      | R273       | RK73GB2A223J | MG RESISTOR | 22kΩ 1/10W J  | 1   |                                                                                  |
|      | R302       | RK73GB2A222J | MG RESISTOR | 2.2kΩ 1/10W J | 1   |                                                                                  |
|      | R303       | RK73EB2E5R1J | MG RESISTOR | 5.1Ω 1/4W J   | 1   |                                                                                  |
|      | R304       | RK73GB2A473J | MG RESISTOR | 47kΩ 1/10W J  | 1   |                                                                                  |
|      | R320       | RK73GB2A181J | MG RESISTOR | 180Ω 1/10W J  | 1   | A1,M0,H1,M2,M8,M4,A2<br>,M3,M6,E6,M7,M5,M9,K0                                    |
|      | R321       | RK73GB2A223J | MG RESISTOR | 22kΩ 1/10W J  | 1   | A1,M0,H1,M2,M8,M4,A2<br>,M3,M6,E6,M7,M5,M9,K0                                    |
|      | R323       | RK73GB2A331J | MG RESISTOR | 330Ω 1/10W J  | 1   | A1,M0,H1,M2,M8,M4,A2<br>,M3,M6,E6,M7,M5,M9,K0                                    |
|      | R330       | RK73GB2A181J | MG RESISTOR | 180Ω 1/10W J  | 1   | A1,M0,H1,M2,M8,M4,A2<br>,M3,M6,E6,M7,M5,M9,K0                                    |
|      | R331       | RK73GB2A223J | MG RESISTOR | 22kΩ 1/10W J  | 1   | A1,M0,H1,M2,M8,M4,A2<br>,M3,M6,E6,M7,M5,M9,K0                                    |
|      | R333       | RK73GB2A331J | MG RESISTOR | 330Ω 1/10W J  | 1   | A1,M0,H1,M2,M8,M4,A2<br>,M3,M6,E6,M7,M5,M9,K0                                    |
|      | R370       | RK73GB2A683J | MG RESISTOR | 68kΩ 1/10W J  | 1   |                                                                                  |
|      | R371       | RK73GB2A123J | MG RESISTOR | 12kΩ 1/10W J  | 1   |                                                                                  |
|      | R372       | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J  | 1   |                                                                                  |
|      | R381       | RK73EB2E000J | MG RESISTOR | 0Ω 1/4W J     | 1   | E5,E7,E4,E3,E2,E6,M7<br>,M5,M9,E1                                                |
|      | R390       | RK73EB2E472J | MG RESISTOR | 4.7kΩ 1/4W J  | 1   |                                                                                  |
|      | R400       | RK73GB2A102J | MG RESISTOR | 1kΩ 1/10W J   | 1   |                                                                                  |
|      | R402       | RK73GB2A225J | MG RESISTOR | 2.2MΩ 1/10W J | 1   | A1,M0,H1,M2,M8,M4,A2<br>,M3,M6,K1,M7,M5,M9,K4,<br>K0                             |
|      | R403       | RK73GB2A473J | MG RESISTOR | 47kΩ 1/10W J  | 1   | E5,E7,E4,E3,E2,K2,E6<br>,K3,E1                                                   |
|      | R410       | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J  | 1   | K3,E1,K4                                                                         |
|      | R411       | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J  | 1   | K3,E1,K4                                                                         |
|      | R412       | RK73GB2A472J | MG RESISTOR | 4.7kΩ 1/10W J | 1   | K3,E1,K4                                                                         |
|      | R413       | RK73GB2A472J | MG RESISTOR | 4.7kΩ 1/10W J | 1   | K3,E1,K4                                                                         |
|      | R414       | RK73GB2A472J | MG RESISTOR | 4.7kΩ 1/10W J | 1   | K3,E1,K4                                                                         |
|      | R421       | RK73GB2A473J | MG RESISTOR | 47kΩ 1/10W J  | 1   |                                                                                  |
|      | R541       | RK73GB2A562J | MG RESISTOR | 5.6kΩ 1/10W J | 1   |                                                                                  |
|      | R542       | RK73GB2A223J | MG RESISTOR | 22kΩ 1/10W J  | 1   |                                                                                  |
|      | R543       | RK73GB2A562J | MG RESISTOR | 5.6kΩ 1/10W J | 1   |                                                                                  |
|      | R544       | RK73GB2A183J | MG RESISTOR | 18kΩ 1/10W J  | 1   |                                                                                  |
|      | R546       | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J  | 1   |                                                                                  |
|      | R548       | RK73GB2A123J | MG RESISTOR | 12kΩ 1/10W J  | 1   |                                                                                  |
|      | R550       | RK73GB2A222J | MG RESISTOR | 2.2kΩ 1/10W J | 1   |                                                                                  |
|      | R551       | RK73GB2A222J | MG RESISTOR | 2.2kΩ 1/10W J | 1   |                                                                                  |
|      | R554       | RK73GB2A225J | MG RESISTOR | 2.2MΩ 1/10W J | 1   |                                                                                  |
|      | R556       | RK73GB2A472J | MG RESISTOR | 4.7kΩ 1/10W J | 1   |                                                                                  |
|      | R557       | RK73EB2E4R7J | MG RESISTOR | 4.7Ω 1/4W J   | 1   |                                                                                  |
|      | R558       | RK73GB2A821J | MG RESISTOR | 820Ω 1/10W J  | 1   |                                                                                  |
|      | R559       | RK73GB2A272J | MG RESISTOR | 2.7kΩ 1/10W J | 1   |                                                                                  |
|      | R562       | RK73EB2E823J | MG RESISTOR | 82kΩ 1/4W J   | 1   |                                                                                  |
|      | R567       | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J  | 1   |                                                                                  |
|      | R569       | RK73EB2E102J | MG RESISTOR | 1kΩ 1/4W J    | 1   |                                                                                  |
|      | R570       | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J  | 1   |                                                                                  |
|      | R571       | RK73GB2A103J | MG RESISTOR | 10kΩ 1/10W J  | 1   |                                                                                  |
|      | R572       | RK73GB2A102J | MG RESISTOR | 1kΩ 1/10W J   | 1   |                                                                                  |
|      | R573       | RK73GB2A105J | MG RESISTOR | 1MΩ 1/10W J   | 1   |                                                                                  |
|      | R579       | RK73GB2A222J | MG RESISTOR | 2.2kΩ 1/10W J | 1   |                                                                                  |
|      | R580       | RK73GB2A222J | MG RESISTOR | 2.2kΩ 1/10W J | 1   |                                                                                  |
|      | R587       | RK73GB2A220J | MG RESISTOR | 22Ω 1/10W J   | 1   |                                                                                  |
|      | R589       | RK73GB2A821J | MG RESISTOR | 820Ω 1/10W J  | 1   |                                                                                  |
|      | R590       | RK73GB2A821J | MG RESISTOR | 820Ω 1/10W J  | 1   |                                                                                  |
|      | R600       | RK73FB2B102J | MG RESISTOR | 1kΩ 1/8W J    | 1   |                                                                                  |
|      | R601       | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J  | 1   |                                                                                  |
|      | R602       | RK73GB2A820J | MG RESISTOR | 82Ω 1/10W J   | 1   |                                                                                  |
|      | R603       | RK73GB2A105J | MG RESISTOR | 1MΩ 1/10W J   | 1   |                                                                                  |
|      | R604       | RK73GB2A105J | MG RESISTOR | 1MΩ 1/10W J   | 1   |                                                                                  |
|      | R605       | RK73GB2A4R7J | MG RESISTOR | 4.7Ω 1/10W J  | 1   |                                                                                  |
|      | R611       | RK73GB2A101J | MG RESISTOR | 100Ω 1/10W J  | 1   |                                                                                  |
|      | R701       | RK73GB2A162J | MG RESISTOR | 1.6kΩ 1/10W J | 1   |                                                                                  |

| MODEL      | MARK | MODEL      | MARK | MODEL      | MARK | MODEL      | MARK |
|------------|------|------------|------|------------|------|------------|------|
| KDC-100UA  | A1   | KDC-100UA  | M0   | KDC-100UB  | E5   | KDC-100UB  | H1   |
| KDC-100UB  | M2   | KDC-100UBS | E7   | KDC-100UG  | E4   | KDC-100UG  | M8   |
| KDC-100UR  | E3   | KDC-100UR  | M4   | KDC-100UW  | A2   | KDC-100UW  | M3   |
| KDC-1010U  | M6   | KDC-10UR   | E2   | KDC-115U   | K1   | KDC-125U   | K2   |
| KDC-150RY  | E6   | KDC-151UBM | M7   | KDC-161URM | M5   | KDC-165U   | K3   |
| KDC-181UWM | M9   | KDC-200UB  | E1   | KDC-230U   | K4   | KDC-MP165U | K0   |

| Safe | Symbol No. | Parts No.    | Parts Name    | Description   | QTY | Local                |
|------|------------|--------------|---------------|---------------|-----|----------------------|
|      | R702       | RK73GB2A472J | MG RESISTOR   | 4.7kΩ 1/10W J | 1   |                      |
|      | R703       | RK73GB2A162J | MG RESISTOR   | 1.6kΩ 1/10W J | 1   |                      |
|      | R704       | RK73GB2A162J | MG RESISTOR   | 1.6kΩ 1/10W J | 1   |                      |
|      | R705       | RK73GB2A103J | MG RESISTOR   | 10kΩ 1/10W J  | 1   |                      |
|      | R707       | RK73GB2A162J | MG RESISTOR   | 1.6kΩ 1/10W J | 1   |                      |
|      | R709       | RK73GB2A332J | MG RESISTOR   | 3.3kΩ 1/10W J | 1   |                      |
|      | R711       | RK73GB2A222J | MG RESISTOR   | 2.2kΩ 1/10W J | 1   |                      |
|      | R712       | RK73GB2A102J | MG RESISTOR   | 1kΩ 1/10W J   | 1   |                      |
|      | R713       | RK73GB2A222J | MG RESISTOR   | 2.2kΩ 1/10W J | 1   |                      |
|      | R714       | RK73GB2A102J | MG RESISTOR   | 1kΩ 1/10W J   | 1   |                      |
|      | R715       | RK73GB2A222J | MG RESISTOR   | 2.2kΩ 1/10W J | 1   |                      |
|      | R716       | RK73GB2A222J | MG RESISTOR   | 2.2kΩ 1/10W J | 1   |                      |
|      | R717       | RK73GB2A104J | MG RESISTOR   | 100kΩ 1/10W J | 1   |                      |
|      | R719       | RK73GB2A911J | MG RESISTOR   | 910Ω 1/10W J  | 1   |                      |
|      | R720       | RK73GB2A473J | MG RESISTOR   | 47kΩ 1/10W J  | 1   |                      |
|      | R721       | RK73GB2A473J | MG RESISTOR   | 47kΩ 1/10W J  | 1   |                      |
|      | R722       | RK73GB2A911J | MG RESISTOR   | 910Ω 1/10W J  | 1   |                      |
|      | R723       | RK73GB2A473J | MG RESISTOR   | 47kΩ 1/10W J  | 1   |                      |
|      | R724       | RK73GB2A105J | MG RESISTOR   | 1MΩ 1/10W J   | 1   |                      |
|      | R725       | RK73GB2A332J | MG RESISTOR   | 3.3kΩ 1/10W J | 1   |                      |
|      | R726       | RK73GB2A220J | MG RESISTOR   | 22Ω 1/10W J   | 1   |                      |
|      | R727       | RK73GB2A153J | MG RESISTOR   | 15kΩ 1/10W J  | 1   |                      |
|      | R728       | RK73GB2A220J | MG RESISTOR   | 22Ω 1/10W J   | 1   |                      |
|      | R729       | RK73GB2A153J | MG RESISTOR   | 15kΩ 1/10W J  | 1   |                      |
|      | R730       | RK73GB2A473J | MG RESISTOR   | 47kΩ 1/10W J  | 1   |                      |
|      | R731       | RK73GB2A473J | MG RESISTOR   | 47kΩ 1/10W J  | 1   |                      |
|      | R732       | RK73GB2A393J | MG RESISTOR   | 39kΩ 1/10W J  | 1   | E5,E7,E4,E3,E6,K3,K4 |
|      | R732       | RK73GB2A273J | MG RESISTOR   | 27kΩ 1/10W J  | 1   | M7,M5,M9             |
|      | R732       | RK73GB2A333J | MG RESISTOR   | 33kΩ 1/10W J  | 1   | E1,K0                |
|      | R733       | RK73GB2A473J | MG RESISTOR   | 47kΩ 1/10W J  | 1   | A1,M0,H1,M2,M8,M4,A2 |
|      | R733       | RK73GB2A822J | MG RESISTOR   | 8.2kΩ 1/10W J | 1   | ,M3,M6,E2,K1,K2      |
|      | R733       | RK73GB2A223J | MG RESISTOR   | 22kΩ 1/10W J  | 1   | E5,E7,E4,E3,E6,K3,K4 |
|      | R733       | RK73GB2A153J | MG RESISTOR   | 15kΩ 1/10W J  | 1   | M7,M5,M9             |
|      | R734       | RK73GB2A333J | MG RESISTOR   | 33kΩ 1/10W J  | 1   | E1,K0                |
|      | R734       | RK73GB2A393J | MG RESISTOR   | 39kΩ 1/10W J  | 1   | A1,M0,H1,M2,M8,M4,A2 |
|      | R735       | RK73GB2A153J | MG RESISTOR   | 15kΩ 1/10W J  | 1   | ,M3,M6               |
|      | R735       | RK73GB2A822J | MG RESISTOR   | 8.2kΩ 1/10W J | 1   | E5,E7,E4,E3,E2,E6,M7 |
|      | R735       | RK73GB2A473J | MG RESISTOR   | 47kΩ 1/10W J  | 1   | ,M5,M9,E1            |
|      | R743       | RK73GB2A473J | MG RESISTOR   | 47kΩ 1/10W J  | 1   | K1,K2,K3,K4,K0       |
|      | R744       | RK73GB2A473J | MG RESISTOR   | 47kΩ 1/10W J  | 1   |                      |
|      | R745       | RK73EB2E222J | MG RESISTOR   | 2.2kΩ 1/4W J  | 1   |                      |
|      | R746       | RK73GB2A472J | MG RESISTOR   | 4.7kΩ 1/10W J | 1   |                      |
|      | R747       | RK73GB2A472J | MG RESISTOR   | 4.7kΩ 1/10W J | 1   |                      |
|      | R748       | RK73GB2A472J | MG RESISTOR   | 4.7kΩ 1/10W J | 1   |                      |
|      | R749       | RK73GB2A473J | MG RESISTOR   | 47kΩ 1/10W J  | 1   |                      |
|      | R750       | RK73GB2A101J | MG RESISTOR   | 100Ω 1/10W J  | 1   |                      |
|      | R751       | RK73GB2A473J | MG RESISTOR   | 47kΩ 1/10W J  | 1   |                      |
|      | R752       | RK73GB2A101J | MG RESISTOR   | 100Ω 1/10W J  | 1   |                      |
|      | R753       | RK73EB2E102J | MG RESISTOR   | 1kΩ 1/4W J    | 1   |                      |
|      | R754       | RK73GB2A100J | MG RESISTOR   | 10Ω 1/10W J   | 1   |                      |
|      | R755       | NQR0713-001X | FERRITE BEADS |               | 1   |                      |
|      | R756       | RK73GB2A473J | MG RESISTOR   | 47kΩ 1/10W J  | 1   |                      |
|      | R757       | RK73GB2A473J | MG RESISTOR   | 47kΩ 1/10W J  | 1   |                      |
|      | R758       | RK73GB2A473J | MG RESISTOR   | 47kΩ 1/10W J  | 1   |                      |
|      | R760       | RK73GB2A473J | MG RESISTOR   | 47kΩ 1/10W J  | 1   |                      |
|      | R761       | RK73GB2A473J | MG RESISTOR   | 47kΩ 1/10W J  | 1   |                      |
|      | R762       | RK73GB2A473J | MG RESISTOR   | 47kΩ 1/10W J  | 1   |                      |
|      | R763       | RK73GB2A472J | MG RESISTOR   | 4.7kΩ 1/10W J | 1   |                      |
|      | R764       | RK73GB2A472J | MG RESISTOR   | 4.7kΩ 1/10W J | 1   |                      |
|      | R820       | RK73EB2E473J | MG RESISTOR   | 47kΩ 1/4W J   | 1   |                      |
|      | R821       | RK73GB2A473J | MG RESISTOR   | 47kΩ 1/10W J  | 1   |                      |
|      | R822       | RK73GB2A473J | MG RESISTOR   | 47kΩ 1/10W J  | 1   |                      |
|      | R830       | RK73EB2E101J | MG RESISTOR   | 100Ω 1/4W J   | 1   |                      |
|      | R840       | RK73GB2A101J | MG RESISTOR   | 100Ω 1/10W J  | 1   |                      |
|      | R841       | RK73GB2A101J | MG RESISTOR   | 100Ω 1/10W J  | 1   |                      |
|      | R850       | RK73EB2E000J | MG RESISTOR   | 0Ω 1/4W J     | 1   |                      |
|      | R861       | RK73GB2A200J | MG RESISTOR   | 20Ω 1/10W J   | 1   |                      |
|      | R864       | RK73GB2A393J | MG RESISTOR   | 39kΩ 1/10W J  | 1   |                      |
|      | R865       | RK73GH2A683D | MG RESISTOR   | 68kΩ 1/10W D  | 1   |                      |
|      | R867       | RK73GH2A393D | MG RESISTOR   | 39kΩ 1/10W D  | 1   |                      |
|      | R868       | RK73GH2A183D | MG RESISTOR   | 18kΩ 1/10W D  | 1   |                      |
|      | R890       | RK73GH2A163D | MG RESISTOR   | 16kΩ 1/10W D  | 1   |                      |
|      | R892       | RK73GB2A222J | MG RESISTOR   | 2.2kΩ 1/10W J | 1   |                      |
|      | R894       | RK73GB2A000J | MG RESISTOR   | 0Ω 1/10W J    | 1   |                      |
|      | R900       | RK73EB2E473J | MG RESISTOR   | 47kΩ 1/4W J   | 1   |                      |
|      | R901       | RK73EB2E473J | MG RESISTOR   | 47kΩ 1/4W J   | 1   |                      |
|      | R902       | RK73EB2E682J | MG RESISTOR   | 6.8kΩ 1/4W J  | 1   |                      |
|      | R903       | RK73EB2E682J | MG RESISTOR   | 6.8kΩ 1/4W J  | 1   |                      |
|      | R905       | RK73GB2A101J | MG RESISTOR   | 100Ω 1/10W J  | 1   |                      |
|      | R940       | RK73EB2E100J | MG RESISTOR   | 10Ω 1/4W J    | 1   |                      |
|      | R1006      | RK73GB2A000J | MG RESISTOR   | 0Ω 1/10W J    | 1   |                      |
|      | R1017      | RK73GB2A000J | MG RESISTOR   | 0Ω 1/10W J    | 1   |                      |
|      | R1029      | RK73EB2E000J | MG RESISTOR   | 0Ω 1/4W J     | 1   |                      |

| MODEL      | MARK | MODEL      | MARK | MODEL      | MARK | MODEL      | MARK |
|------------|------|------------|------|------------|------|------------|------|
| KDC-100UA  | A1   | KDC-100UA  | M0   | KDC-100UB  | E5   | KDC-100UB  | H1   |
| KDC-100UB  | M2   | KDC-100UBS | E7   | KDC-100UG  | E4   | KDC-100UG  | M8   |
| KDC-100UR  | E3   | KDC-100UR  | M4   | KDC-100UW  | A2   | KDC-100UW  | M3   |
| KDC-1010U  | M6   | KDC-10UR   | E2   | KDC-115U   | K1   | KDC-125U   | K2   |
| KDC-150RY  | E6   | KDC-151UBM | M7   | KDC-161URM | M5   | KDC-165U   | K3   |
| KDC-181UWM | M9   | KDC-200UB  | E1   | KDC-230U   | K4   | KDC-MP165U | K0   |

| Safe                                | Symbol No. | Parts No.     | Parts Name      | Description    | QTY | Local                                                                |
|-------------------------------------|------------|---------------|-----------------|----------------|-----|----------------------------------------------------------------------|
|                                     | R1036      | RK73GB2A000J  | MG RESISTOR     | 0Ω 1/10W J     | 1   |                                                                      |
|                                     | R1043      | RK73GB2A000J  | MG RESISTOR     | 0Ω 1/10W J     | 1   |                                                                      |
|                                     | R1045      | CK73GBB1H471K | C CAPACITOR     | 470pF 50V K    | 1   |                                                                      |
|                                     | R1047      | RK73EB2E000J  | MG RESISTOR     | 0Ω 1/4W J      | 1   |                                                                      |
|                                     | R1049      | RK73EB2E000J  | MG RESISTOR     | 0Ω 1/4W J      | 1   |                                                                      |
|                                     | R1051      | RK73GB2A000J  | MG RESISTOR     | 0Ω 1/10W J     | 1   | E5,E7,E4,E3,E2,K2,E6,K3,E1,K4                                        |
|                                     | R1064      | RK73GB2A100J  | MG RESISTOR     | 10Ω 1/10W J    | 1   |                                                                      |
|                                     | R1065      | RK73GB2A100J  | MG RESISTOR     | 10Ω 1/10W J    | 1   |                                                                      |
|                                     | R1070      | RK73GB2A102J  | MG RESISTOR     | 1kΩ 1/10W J    | 1   |                                                                      |
|                                     | R1071      | RK73GB2A000J  | MG RESISTOR     | 0Ω 1/10W J     | 1   | A1,M0,E5,H1,M2,E7,E4,M8,E3,M4,A2,M3,M6,K1,K2,E6,M7,M5,K3,M9,E1,K4,K0 |
|                                     | R1080      | RK73GB2A000J  | MG RESISTOR     | 0Ω 1/10W J     | 1   |                                                                      |
|                                     | R1091      | RK73GB2A000J  | MG RESISTOR     | 0Ω 1/10W J     | 1   |                                                                      |
|                                     | R1160      | RK73EB2E000J  | MG RESISTOR     | 0Ω 1/4W J      | 1   |                                                                      |
|                                     | R1300      | NRZ0084-0R0X  | MG RESISTOR     | 0Ω             | 1   |                                                                      |
|                                     | R1600      | RK73EB2E000J  | MG RESISTOR     | 0Ω 1/4W J      | 1   |                                                                      |
|                                     | R1715      | RK73EB2E000J  | MG RESISTOR     | 0Ω 1/4W J      | 1   |                                                                      |
|                                     | R1717      | RK73EB2E000J  | MG RESISTOR     | 0Ω 1/4W J      | 1   |                                                                      |
|                                     | R1861      | RK73EB2E000J  | MG RESISTOR     | 0Ω 1/4W J      | 1   |                                                                      |
|                                     | RA580      | RK74GB1J471J  | NET RESISTOR    | 470Ω 1/16W J   | 1   |                                                                      |
|                                     | RA701      | RK74GB1J473J  | NET RESISTOR    | 47kΩ 1/16W J   | 1   |                                                                      |
|                                     | L540       | NQR0713-001X  | FERRITE BEADS   |                | 1   |                                                                      |
|                                     | L574       | NQR0713-001X  | FERRITE BEADS   |                | 1   |                                                                      |
|                                     | L600       | LR7320AD4R7M  | CHIP INDUCTOR   | 4.7uH          | 1   |                                                                      |
|                                     | L601       | LK73G0BE4R7K  | M.CHIP INDUCTOR |                | 1   |                                                                      |
|                                     | L602       | LK73G0BER47K  | M.CHIP INDUCTOR |                | 1   |                                                                      |
|                                     | L603       | NQLM93K-R10X  | INDUCTOR        | 0.1uH K        | 1   |                                                                      |
|                                     | L604       | LK73G0BE1R0K  | M.CHIP INDUCTOR |                | 1   |                                                                      |
|                                     | L605       | LK73G0BER22K  | M.CHIP INDUCTOR |                | 1   |                                                                      |
|                                     | L606       | LK73G0BER12K  | M.CHIP INDUCTOR |                | 1   |                                                                      |
|                                     | L607       | LK73G0BER15K  | M.CHIP INDUCTOR |                | 1   |                                                                      |
|                                     | L700       | NQR0713-001X  | FERRITE BEADS   |                | 1   |                                                                      |
|                                     | L701       | LB73G0BK-006  | CHIP FERRITE    |                | 1   |                                                                      |
|                                     | L709       | NQR0713-001X  | FERRITE BEADS   |                | 1   |                                                                      |
|                                     | L710       | NQR0713-001X  | FERRITE BEADS   |                | 1   |                                                                      |
|                                     | L777       | NQR0713-001X  | FERRITE BEADS   |                | 1   |                                                                      |
|                                     | L778       | NQR0713-001X  | FERRITE BEADS   |                | 1   |                                                                      |
|                                     | L820       | NQR0713-001X  | FERRITE BEADS   |                | 1   |                                                                      |
|                                     | L821       | NQR0713-001X  | FERRITE BEADS   |                | 1   |                                                                      |
|                                     | L822       | NQR0713-001X  | FERRITE BEADS   |                | 1   |                                                                      |
|                                     | L823       | NQR0713-001X  | FERRITE BEADS   |                | 1   |                                                                      |
|                                     | L824       | NQR0713-001X  | FERRITE BEADS   |                | 1   |                                                                      |
|                                     | L825       | LB73G0CA-002  | CHIP FERRITE    |                | 1   |                                                                      |
|                                     | L826       | LB73G0CK-001  | CHIP FERRITE    |                | 1   |                                                                      |
|                                     | L827       | LB73G0BK-006  | CHIP FERRITE    |                | 1   |                                                                      |
|                                     | L860       | NQLL6EM-100X  | INDUCTOR        | 10uH M         | 1   |                                                                      |
|                                     | L861       | NQLH65M-4R7X  | INDUCTOR        | 4.7uH M        | 1   |                                                                      |
|                                     | L990       | QQR1927-001   | CHOKE COIL      |                | 1   |                                                                      |
|                                     | CN502      | QGF1040F1-24  | FFC/FPC CONNE   | FFC/FPC (1-24) | 1   |                                                                      |
|                                     | CN701      | QGZ2006J1-20  | DETACHABLE CONN | (1-20)         | 1   |                                                                      |
|                                     | CN990      | QNZ0607-001   | CAR CONNECTOR   |                | 1   |                                                                      |
| △                                   | F321       | F53-0513-08   | PATTERN FUSE    | 4A             | 1   |                                                                      |
|                                     | J321       | QNN0868-001   | PIN JACK        |                | 1   | A1,M0,H1,M2,M8,M4,A2,M3,M6,E6,M7,M5,M9,K0                            |
|                                     | J321       | QNN0874-001   | PIN JACK        |                | 1   | E5,E7,E4,E3,K1,K2,K3,E1,K4                                           |
|                                     | J600       | QNB0356-001   | ANT TERMINAL    |                | 1   |                                                                      |
|                                     | S830       | QSW0648-001Z  | TACT SWITCH     |                | 1   |                                                                      |
|                                     | VA600      | F0K-0010-00   | SURGE ABSORBER  |                | 1   |                                                                      |
|                                     | X540       | L7J-0093-00   | QUARTZ CRYSTAL  |                | 1   |                                                                      |
|                                     | X600       | QAX0969-001Z  | CRYSTAL         |                | 1   |                                                                      |
|                                     | X701       | L7J-0060-00   | QUARTZ CRYSTAL  |                | 1   |                                                                      |
| SWITCH PWB ASSY (XJ6-050x-xx) <XJ6> |            |               |                 |                |     |                                                                      |
|                                     | IC1        | BU97520AKV-M  | MOS IC          |                | 1   |                                                                      |
|                                     | IC90       | SIR8630B6T    | IR DETECT UNIT  |                | 1   | A1,M0,H1,M2,M8,M4,A2,M3,M6,K1,M7,M5,M9,K4,K0                         |
|                                     | Q1         | LSCR523UBFS8  | TRANSISTOR      |                | 1   |                                                                      |
|                                     | Q51        | LSCR523EBFS8  | TRANSISTOR      |                | 1   |                                                                      |
|                                     | Q52        | LSCR523UBFS8  | TRANSISTOR      |                | 1   | K0                                                                   |
|                                     | D1         | DZ2J056M      | ZENER DIODE     |                | 1   |                                                                      |
|                                     | D2         | MBRX130       | SCHOTTKY DIODE  |                | 1   |                                                                      |
|                                     | D20        | SML-D12V8WT   | LED             |                | 1   |                                                                      |
|                                     | D21        | LOT67DU2AA241 | LED             |                | 1   | A1,M0                                                                |
|                                     | D21        | ASMTUBB5ZT3Y2 | LED             |                | 1   | E5,H1,M2,E7,M7,E1                                                    |
|                                     | D21        | ASMTUGB5ZV7Y2 | LED             |                | 1   | E4,M8                                                                |
|                                     | D21        | LRT67DU1V211  | LED             |                | 1   | E3,M4,E2,K1,K2,E6,M5,K3,K4,K0                                        |
|                                     | D21        | ASMPWH1ZCEB2  | LED             |                | 1   | A2,M3,M6,M9                                                          |
|                                     | D22        | LOT67DU2AA241 | LED             |                | 1   | A1,M0                                                                |
|                                     | D22        | ASMTUBB5ZT3Y2 | LED             |                | 1   | E5,H1,M2,E7,M7,E1                                                    |
|                                     | D22        | ASMTUGB5ZV7Y2 | LED             |                | 1   | E4,M8                                                                |
|                                     | D22        | LRT67DU1V211  | LED             |                | 1   | E3,M4,E2,K1,K2,E6,M5,K3,K4,K0                                        |
|                                     | D22        | ASMPWH1ZCEB2  | LED             |                | 1   | A2,M3,M6,M9                                                          |

| MODEL      | MARK | MODEL      | MARK | MODEL      | MARK | MODEL      | MARK |
|------------|------|------------|------|------------|------|------------|------|
| KDC-100UA  | A1   | KDC-100UA  | M0   | KDC-100UB  | E5   | KDC-100UB  | H1   |
| KDC-100UB  | M2   | KDC-100UBS | E7   | KDC-100UG  | E4   | KDC-100UG  | M8   |
| KDC-100UR  | E3   | KDC-100UR  | M4   | KDC-100UW  | A2   | KDC-100UW  | M3   |
| KDC-1010U  | M6   | KDC-10UR   | E2   | KDC-115U   | K1   | KDC-125U   | K2   |
| KDC-150RY  | E6   | KDC-151UBM | M7   | KDC-161URM | M5   | KDC-165U   | K3   |
| KDC-181UWM | M9   | KDC-200UB  | E1   | KDC-230U   | K4   | KDC-MP165U | K0   |

| Safe | Symbol No. | Parts No.      | Parts Name      | Description   | QTY | Local                  |
|------|------------|----------------|-----------------|---------------|-----|------------------------|
|      | D23        | LOT67DU2AA241  | LED             |               | 1   | A1,M0                  |
|      | D23        | ASMTUBB5ZT3Y2  | LED             |               | 1   | E5,H1,M2,E7,M7,E1      |
|      | D23        | ASMTUGB5ZV7Y2  | LED             |               | 1   | E4,M8                  |
|      | D23        | LRT67DU1V211   | LED             |               | 1   | E3,M4,E2,K1,K2,E6,M5   |
|      | D23        | ASMPICWH1ZCEB2 | LED             |               | 1   | ,K3,K4,K0              |
|      | D24        | ASMPICWH1ZCEB2 | LED             |               | 1   | A2,M3,M6,M9            |
|      | D25        | QSMR-C13SBCMN  | LED             |               | 1   | M6,M9                  |
|      | D25        | SML-D12V8WT    | LED             |               | 1   | M7                     |
|      | D26        | QSMR-C13SBCMN  | LED             |               | 1   | M5                     |
|      | D26        | SML-D12V8WT    | LED             |               | 1   | M7                     |
|      | D49        | NHSW157B       | LED             |               | 1   | M5                     |
|      | D80        | DZ2J051M       | ZENER DIODE     |               | 1   |                        |
|      | D81        | DZ2J051M       | ZENER DIODE     |               | 1   |                        |
|      | C1         | CK73GXR1C105K  | C CAPACITOR     | 1uF 16V K     | 1   |                        |
|      | C4         | CK73GXR1C105K  | C CAPACITOR     | 1uF 16V K     | 1   |                        |
|      | C5         | CK73GXR1C105K  | C CAPACITOR     | 1uF 16V K     | 1   |                        |
|      | C6         | CK73EXR1C106K  | C CAPACITOR     | 10uF 16V K    | 1   |                        |
|      | C7         | CK73GBB1H472K  | C CAPACITOR     | 4700pF 50V K  | 1   |                        |
|      | C60        | CK73GBB1H102K  | C CAPACITOR     | 1000pF 50V K  | 1   |                        |
|      | C61        | CK73GBB1H102K  | C CAPACITOR     | 1000pF 50V K  | 1   |                        |
|      | C80        | CC73GCH1H270J  | C CAPACITOR     | 27pF 50V J    | 1   |                        |
|      | C81        | CC73GCH1H270J  | C CAPACITOR     | 27pF 50V J    | 1   |                        |
|      | C82        | CK73EXR1C106K  | C CAPACITOR     | 10uF 16V K    | 1   |                        |
|      | C83        | CK73GBB1H471K  | C CAPACITOR     | 470pF 50V K   | 1   |                        |
|      | C84        | CK73GBB1H472K  | C CAPACITOR     | 4700pF 50V K  | 1   |                        |
|      | C85        | CK73GBB1H471K  | C CAPACITOR     | 470pF 50V K   | 1   |                        |
|      | C86        | CK73GBB1H472K  | C CAPACITOR     | 4700pF 50V K  | 1   |                        |
|      | C91        | CK73GXR1A105K  | C CAPACITOR     | 1uF 10V K     | 1   | A1,M0,H1,M2,M8,M4,A2   |
|      | R1         | RK73GB2A101J   | MG RESISTOR     | 100Ω 1/10W J  | 1   | ,M3,M6,K1,M7,M5,M9,K4, |
|      | R3         | RK73GB2A471J   | MG RESISTOR     | 470Ω 1/10W J  | 1   | K0                     |
|      | R5         | RK73EB2E331J   | MG RESISTOR     | 330Ω 1/4W J   | 1   |                        |
|      | R6         | RK73GB2A102J   | MG RESISTOR     | 1kΩ 1/10W J   | 1   |                        |
|      | R7         | RK73EB2E000J   | MG RESISTOR     | 0Ω 1/4W J     | 1   |                        |
|      | R20        | RK73GB2A152J   | MG RESISTOR     | 1.5kΩ 1/10W J | 1   | A1,M0,E5,H1,M2,E7,E4   |
|      | R21        | RK73GB2A152J   | MG RESISTOR     | 1.5kΩ 1/10W J | 1   | ,M8,E3,M4,A2,M3,M6,E2, |
|      | R22        | RK73FB2B102J   | MG RESISTOR     | 1kΩ 1/8W J    | 1   | K1,K2,E6,M7,M5,K3,M9,E |
|      | R22        | RK73FB2B681J   | MG RESISTOR     | 680Ω 1/8W J   | 1   | 1,K4                   |
|      | R22        | RK73FB2B821J   | MG RESISTOR     | 820Ω 1/8W J   | 1   | K0                     |
|      | R23        | RK73FB2B102J   | MG RESISTOR     | 1kΩ 1/8W J    | 1   | A1,M0,E3,M4,A2,M3,M6   |
|      | R23        | RK73FB2B681J   | MG RESISTOR     | 680Ω 1/8W J   | 1   | ,E2,K1,K2,E6,M5,K3,M9, |
|      | R23        | RK73FB2B821J   | MG RESISTOR     | 820Ω 1/8W J   | 1   | K4,K0                  |
|      | R24        | RK73EB2E122J   | MG RESISTOR     | 1.2kΩ 1/4W J  | 1   | E5,H1,M2,E7,M7,E1      |
|      | R24        | RK73EB2E471J   | MG RESISTOR     | 470Ω 1/4W J   | 1   | E4,M8                  |
|      | R24        | RK73EB2E102J   | MG RESISTOR     | 1kΩ 1/4W J    | 1   | A2,M3,M6,M9            |
|      | R24        | RK73EB2E821J   | MG RESISTOR     | 820Ω 1/4W J   | 1   | M6,M9                  |
|      | R25        | RK73FB2B132J   | MG RESISTOR     | 1.3kΩ 1/8W J  | 1   | M7                     |
|      | R26        | RK73FB2B821J   | MG RESISTOR     | 820Ω 1/8W J   | 1   | M5                     |
|      | R26        | RK73FB2B911J   | MG RESISTOR     | 910Ω 1/8W J   | 1   |                        |
|      | R48        | RK73EB2E431J   | MG RESISTOR     | 430Ω 1/4W J   | 1   |                        |
|      | R50        | RK73EB2E472J   | MG RESISTOR     | 4.7kΩ 1/4W J  | 1   | K0                     |
|      | R51        | RK73EB2E682J   | MG RESISTOR     | 6.8kΩ 1/4W J  | 1   |                        |
|      | R60        | RK73FB2B101J   | MG RESISTOR     | 100Ω 1/8W J   | 1   |                        |
|      | R61        | RK73FB2B101J   | MG RESISTOR     | 100Ω 1/8W J   | 1   |                        |
|      | R62        | RK73FB2B4R7J   | MG RESISTOR     | 4.7Ω 1/8W J   | 1   |                        |
|      | R80        | RK73EB2E221J   | MG RESISTOR     | 220Ω 1/4W J   | 1   |                        |
|      | R1001      | RK73GB2A000J   | MG RESISTOR     | 0Ω 1/10W J    | 1   | A1,M0,E5,H1,M2,E7,E4   |
|      | R1006      | RK73GB2A000J   | MG RESISTOR     | 0Ω 1/10W J    | 1   | ,M8,E3,M4,A2,M3,M6,E2, |
|      | RA1        | RK74GB1J101J   | NET RESISTOR    | 100Ω 1/16W J  | 1   | K1,K2,E6,M7,M5,K3,M9,E |
|      | RA2        | RK74GB1J101J   | NET RESISTOR    | 100Ω 1/16W J  | 1   | 1,K4                   |
|      | RA3        | RK74GB1J101J   | NET RESISTOR    | 100Ω 1/16W J  | 1   | A1,M0,H1,M2,M8,M4,A2   |
|      | CN1        | QGZ2006K1-20X  | DETACHABLE CONN | (1-20)        | 1   | ,M3,M6,K1,M7,M5,M9,K4, |
|      | FL80       | L7K-0030-00    | FILTER          |               | 1   | K0                     |
|      | J60        | QNS0320-001    | 3.5 JACK        |               | 1   |                        |
|      | J80        | E5J-0069-00    | USB TERMINAL    |               | 1   |                        |
|      | S20        | T9K-0007-00    | ROTARY ENCODER  |               | 1   |                        |

CD MECHA PWB ASSY (LVA20106-01A) <L20>

|     |               |             |               |  |   |  |
|-----|---------------|-------------|---------------|--|---|--|
| IC1 | BD8266EFV-M-X | IC          |               |  | 1 |  |
| C26 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K    |  | 1 |  |
| C54 | NCB31HK-104X  | C CAPACITOR | 0.1uF 50V K   |  | 1 |  |
| C55 | CK73FXR1C106K | C CAPACITOR | 10uF 16V K    |  | 1 |  |
| R18 | RK73GB2A822J  | MG RESISTOR | 8.2kΩ 1/10W J |  | 1 |  |

| MODEL      | MARK | MODEL      | MARK | MODEL      | MARK | MODEL      | MARK |
|------------|------|------------|------|------------|------|------------|------|
| KDC-100UA  | A1   | KDC-100UA  | M0   | KDC-100UB  | E5   | KDC-100UB  | H1   |
| KDC-100UB  | M2   | KDC-100UBS | E7   | KDC-100UG  | E4   | KDC-100UG  | M8   |
| KDC-100UR  | E3   | KDC-100UR  | M4   | KDC-100UW  | A2   | KDC-100UW  | M3   |
| KDC-1010U  | M6   | KDC-10UR   | E2   | KDC-115U   | K1   | KDC-125U   | K2   |
| KDC-150RY  | E6   | KDC-151UBM | M7   | KDC-161URM | M5   | KDC-165U   | K3   |
| KDC-181UWM | M9   | KDC-200UB  | E1   | KDC-230U   | K4   | KDC-MP165U | K0   |

| Safe | Symbol No. | Parts No.     | Parts Name    | Description           | QTY | Local |
|------|------------|---------------|---------------|-----------------------|-----|-------|
|      | R21        | RK73GB2A822J  | MG RESISTOR   | 8.2k $\Omega$ 1/10W J | 1   |       |
|      | R24        | RK73GB2A272J  | MG RESISTOR   | 2.7k $\Omega$ 1/10W J | 1   |       |
|      | R27        | RK73GB2A562J  | MG RESISTOR   | 5.6k $\Omega$ 1/10W J | 1   |       |
|      | R28        | RK73GB2A114J  | MG RESISTOR   | 110k $\Omega$ 1/10W J | 1   |       |
|      | R29        | RK73GB2A101J  | MG RESISTOR   | 100 $\Omega$ 1/10W J  | 1   |       |
|      | R30        | RK73GB2A101J  | MG RESISTOR   | 100 $\Omega$ 1/10W J  | 1   |       |
|      | R36        | RK73GB2A000J  | MG RESISTOR   | 0 $\Omega$ 1/10W J    | 1   |       |
|      | R37        | RK73GB2A000J  | MG RESISTOR   | 0 $\Omega$ 1/10W J    | 1   |       |
|      | R38        | RK73GB2A000J  | MG RESISTOR   | 0 $\Omega$ 1/10W J    | 1   |       |
|      | R40        | RK73GB2A000J  | MG RESISTOR   | 0 $\Omega$ 1/10W J    | 1   |       |
|      | R42        | RK73EB2E000J  | MG RESISTOR   | 0 $\Omega$ 1/4W J     | 1   |       |
|      | R47        | RK73EB2E000J  | MG RESISTOR   | 0 $\Omega$ 1/4W J     | 1   |       |
|      | R48        | RK73EB2E000J  | MG RESISTOR   | 0 $\Omega$ 1/4W J     | 1   |       |
|      | R50        | RK73GB2A131J  | MG RESISTOR   | 130 $\Omega$ 1/10W J  | 1   |       |
|      | CN1        | QGF1044F2-24X | FFC/FPC CONNE | FFC/FPC (1-24)        | 1   |       |
|      | CN2        | QGF0522F6-15W | FFC/FPC CONNE | FFC/FPC (1-15)        | 1   |       |
|      | SW1        | NSW0291-001X  | DETECT SWITCH |                       | 1   |       |
|      | SW2        | NSW0291-001X  | DETECT SWITCH |                       | 1   |       |
|      | SW3        | NSW0313-001X  | DETECT SWITCH |                       | 1   |       |