

NOTES :

- Parts marked by " * " are generally unavailable because they are not in our Master Spare Parts List.
- The mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
- Screw adjacent to mark on the product are used for disassembly.
- For the applying amount of lubricants or glue, follow the instructions in this manual.
(In the case of no amount instructions, apply as you think it appropriate.)

This exploded view diagram illustrates the assembly of the HP DesignJet Z6800 printer. The components are numbered 1 through 24, and their assembly sequence is indicated by arrows and callouts:

- 1**: UC, RC, RD, RI, ID (Cable assembly)
- 2**: UC (Bracket)
- 3**: (Cover plate)
- 4**: UC, EW5, UW5 (Bracket)
- 5**: (Bracket)
- 6**: (Cover plate)
- 7**: (Cover plate)
- 8**: (Cover plate)
- 9**: (Cover plate)
- 10**: (Cover plate)
- 11**: RC, RD, RI, ID (Cover plate)
- 12**: (Cover plate)
- 13**: (Cover plate)
- 14**: (Cover plate)
- 15**: (Cover plate)
- 16**: UC (Cover plate)
- 17**: EW5, UW5, RI (Cover plate)
- 18**: EW5 (Cover plate)
- 19**: (Cover plate)
- 20**: ID (Cover plate)
- 21**: (Cover plate)
- 22**: (Cover plate)
- 23**: (Cover plate)
- 24**: (Cover plate)

The diagram also shows the assembly of the printer's main body (8) and the installation of the HP DesignJet Z6800 printer (9) into the main body. The HP logo is visible on the front of the printer.

(1) PACKING SECTION PARTS LIST

<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>	<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
1	Cord Assy	See Contrast table(2)	17	Handle	See Contrast table(2)
2	Screw	See Contrast table(2)	18	IM CD-ROM	See Contrast table(2)
3	Polyethylene Bag	CEG1160	19-1	Owner's Manual	See Contrast table(2)
4	Screw	See Contrast table(2)	19-2	Quick Start Guide	See Contrast table(2)
5	Screw	TRZ50P080FTC			
			19-3	Installation Manual	See Contrast table(2)
6	Polyethylene Bag	See Contrast table(2)	*	19-4 Warranty Card	See Contrast table(2)
7	Detach Grille Case	YEG5016	*	19-5 Caution Card	See Contrast table(2)
8	Unit Box	See Contrast table(2)	*	19-6 Caution Card	See Contrast table(2)
9	Contain Box	See Contrast table(2)	*	19-7 Service Network	See Contrast table(2)
10	Protector	See Contrast table(2)			
			*	19-8 Caution Card	See Contrast table(2)
11	Panel	See Contrast table(2)	20	Microphone Assy	See Contrast table(2)
12	Microphone Assy	YPM5003	21	Cap	CNW2617
13	*****		22	Holder	YND5131
14	*****		23	Screw	BMZ30P050FTC
15	USB Extended Cable	CDP1587			
			24	Cord	YDE5138
16	Card Remote Control Unit	See Contrast table(2)			

(2) CONTRAST TABLE

AVH-X8500BHS/XNUC, AVH-X8500BT/XNEW5, AVH-X8500BT/XNUW5, AVH-X8550BT/XNRC, AVH-X8550BT/XNRD, AVH-X8550BT/XNRI and AVH-X8590BT/XNID are constructed the same except for the following:

Mark	No.	Description	AVH-X8500BHS /XNUC	AVH-X8500BT /XNEW5	AVH-X8500BT /XNUW5	AVH-X8550BT /XNRC
	1	Cord Assy	CDP1435	CDP1436	CDP1436	CDP1435
	2	Screw	BPZ20P060FTC	Not used	Not used	Not used
	4	Screw	CRZ50P090FTC	CRZ50P090FTC	CRZ50P090FTC	Not used
	6	Polyethylene Bag	CEG1402	CEG1356	CEG1356	CEG1401
	8	Unit Box	YHG5715	YHG5716	YHG5717	YHG5718
	9	Contain Box	YHL5715	YHL5716	YHL5717	YHL5718
	10	Protector	CHP4598	CHP4599	CHP4599	CHP4598
	11	Panel	Not used	Not used	Not used	CNS9475
	16	Card Remote Control Unit	CXE5117	Not used	Not used	CXE5117
	17	Handle	Not used	CND6289	CND6289	Not used
	18	IM CD-ROM	Not used	YPJ5030	Not used	Not used
	19-1	Owner's Manual	YRD5376	Not used	YRB5258	YRD5377
	19-2	Quick Start Guide	Not used	YRD5373	Not used	Not used
	19-3	Installation Manual	Not used	YRD5375	Not used	Not used
*	19-4	Warranty Card	QRY3001	CRY1377	CRY1330	Not used
*	19-5	Caution Card	Not used	CRP1436	Not used	Not used
*	19-6	Caution Card	Not used	CRP1441	Not used	Not used
*	19-7	Service Network	Not used	Not used	Not used	Not used
*	19-8	Caution Card	YRM5016	Not used	Not used	YRM5015
	20	Microphone Assy	Not used	Not used	Not used	Not used

Mark	No.	Description	AVH-X8550BT /XNRD	AVH-X8550BT /XNRI	AVH-X8590BT /XNID
	1	Cord Assy	CDP1435	CDP1435	CDP1435
	2	Screw	Not used	Not used	Not used
	4	Screw	Not used	Not used	Not used
	6	Polyethylene Bag	CEG1401	CEG1356	CEG1401
	8	Unit Box	YHG5719	YHG5720	YHG5721
	9	Contain Box	YHL5719	YHL5720	YHL5721
	10	Protector	CHP4598	CHP4599	CHP4598
	11	Panel	CNS9475	CNS9475	CNS9475

Mark	No.	Description	AVH-X8550BT /XNRD	AVH-X8550BT /XNRI	AVH-X8590BT /XNID
	16	Card Remote Control Unit	CXE5117	CXE5117	CXE5117
	17	Handle	Not used	CND6289	Not used
	18	IM CD-ROM	Not used	Not used	Not used
	19-1	Owner's Manual	YRD5379	YRD5378	YRB5266
	19-2	Quick Start Guide	Not used	Not used	Not used
	19-3	Installation Manual	Not used	Not used	Not used
*	19-4	Warranty Card	Not used	Not used	CRY1304
*	19-5	Caution Card	Not used	Not used	Not used
*	19-6	Caution Card	Not used	Not used	Not used
*	19-7	Service Network	Not used	Not used	CRY1305
*	19-8	Caution Card	YRM5015	YRM5015	YRM5015
	20	Microphone Assy	Not used	Not used	CPM1086

Owner's Manual, Installation Manual

Part No.	Language
YRD5376	English, French, Spanish(Espanol)
YRD5373	English, French, Italian, Spanish(Espanol), German, Dutch
YRD5375	English, French, Italian, Spanish(Espanol), German, Dutch
YRB5258	Russian
YRD5377	English, Traditional Chinese, Korean
YRD5379	English, Spanish(Espanol), Portuguese(B)
YRD5378	English, Arabic, Persian
YRB5266	English

CONTENTS OF CD-ROM (Operation Manual), YPJ5030

Part No.	Language
* YRB5269	English
* YRB5270	French
* YRB5271	Italian
* YRB5272	Spanish(Espanol)
* YRB5273	German
* YRB5274	Dutch
* YRB5275	Swedish
* YRB5276	Norwegian
* YRB5277	Finnish
* YRB5278	Danish
* YRB5279	Portuguese
* YRB5280	Greek
* YRB5281	Turkish

All operation manuals are supplied in PDF files by the CD-ROM.

Regarding the availability of paper manual, contact Pioneer Service representative in your region.

9.2 EXTERIOR (1)

A


B

C

D

E

F

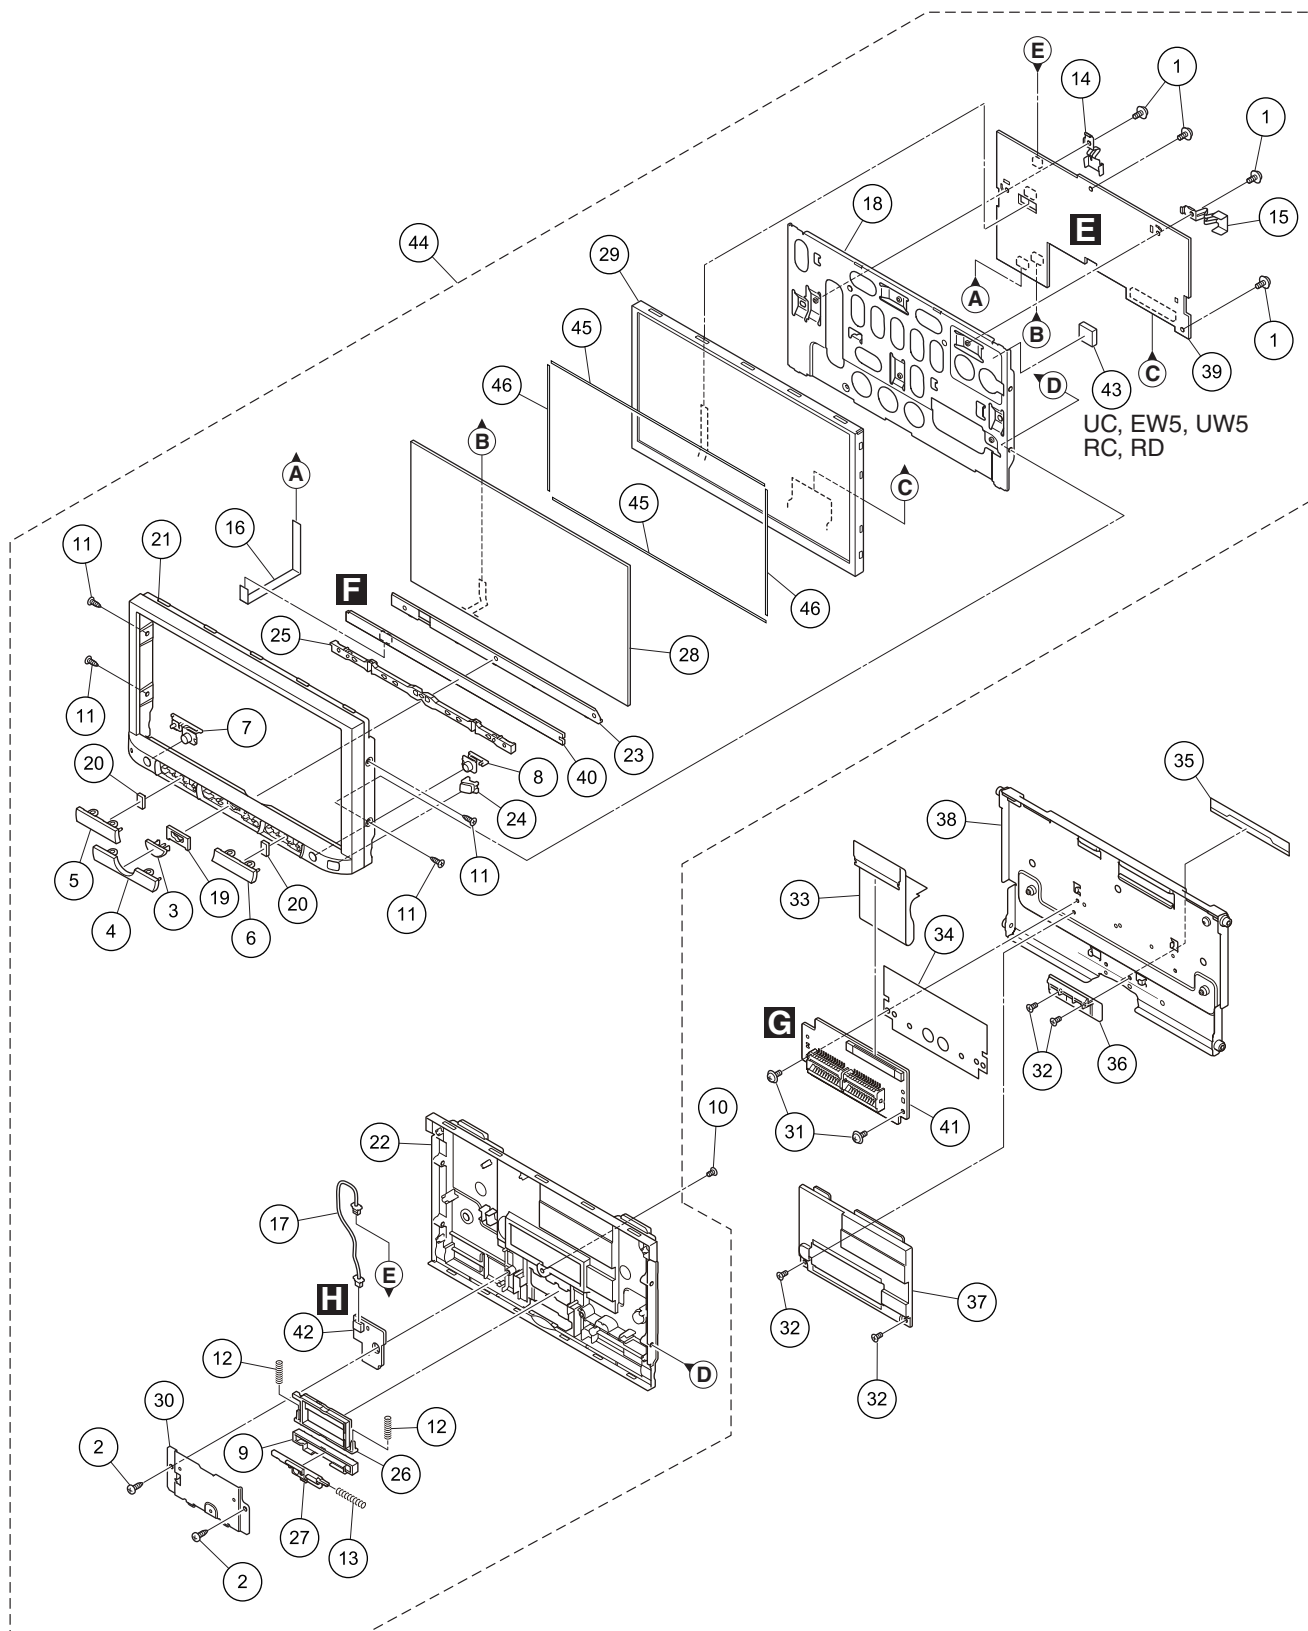

Mark No.	Description	Part No.	Mark No.	Description	Part No.
1	Screw	AMZ20P030FTC	26	Lever	CNW2422
2	Screw	BPZ20P060FTC	27	Lever	CNW2423
3	Button (HOME)	CAI3737	28	Touch Panel	CSX1194
4	Button (MUTE, MODE)	CAI3738	29	TFT LCD	CWX4182
5	Button (VOL)	CAI3739	30	Holder Unit	CXE4883
6	Button (TRK)	CAI3740	31	Screw	AMZ20P030FTC
7	Button (SRC, OFF)	CAI3741	32	Screw (M2 x 3)	CBA1877
8	Button (EJECT)	CAI3742	33	FFC	CDE9561
9	Button (DETACH)	CAI3743	34	Insulator	CNN3890
10	Screw (M2 x 3)	CBA1877	35	Cover	CNN4167
11	Screw	CBA2132	36	Holder	CNW2424
12	Coil Spring	CBH3099	37	Cover	CNW2425
13	Coil Spring	CBH3100	38	Case Unit	CXE4884
14	Plate Spring	CBL1832	39	Monitor Unit (Service)	YXX5128
15	Plate Spring	CBL1833	40	Key Unit (Service)	YXX5126
16	FFC	CDE9393	41	Case Unit (Service)	YXX5127
17	Cable Harness	CDE9563	42	SW Unit (Service)	YXX5129
18	Holder	CND6398	43	Gasket	See Contrast table(2)
19	Cushion	CNN3888	44	Detach Unit (Service)	See Contrast table(2)
20	Cushion	CNN3889	45	Cushion	CNN4271
21	Grille	See Contrast table(2)	46	Cushion	CNN4272
22	Cover	CNU1825			
23	Spacer	CNW2111			
24	Lighting Conductor	CNW2420			
25	Lighting Conductor	CNW2421			


(2) CONTRAST TABLE

AVH-X8500BHS/XNUC, AVH-X8500BT/XNEW5, AVH-X8500BT/XNUW5, AVH-X8550BT/XNRC, AVH-X8550BT/XNRD, AVH-X8550BT/XNRI and AVH-X8590BT/XNID are constructed the same except for the following:

Mark	No.	Description	AVH-X8500BHS /XNUC	AVH-X8500BT /XNEW5	AVH-X8500BT /XNUW5	AVH-X8550BT /XNRC
	21	Grille	YNS5726	YNS5727	YNS5727	YNS5728
	43	Gasket	CNN2529	CNN2529	CNN2529	CNN2529
	44	Detach Unit (Service)	YXX5132	YXX5130	YXX5131	YXX5133

Mark	No.	Description	AVH-X8550BT /XNRD	AVH-X8550BT /XNRI	AVH-X8590BT /XNID
	21	Grille	YNS5728	YNS5728	YNS5729
	43	Gasket	CNN2529	Not used	Not used
	44	Detach Unit (Service)	YXX5133	YXX5134	YXX5135

9.3 EXTERIOR (2)

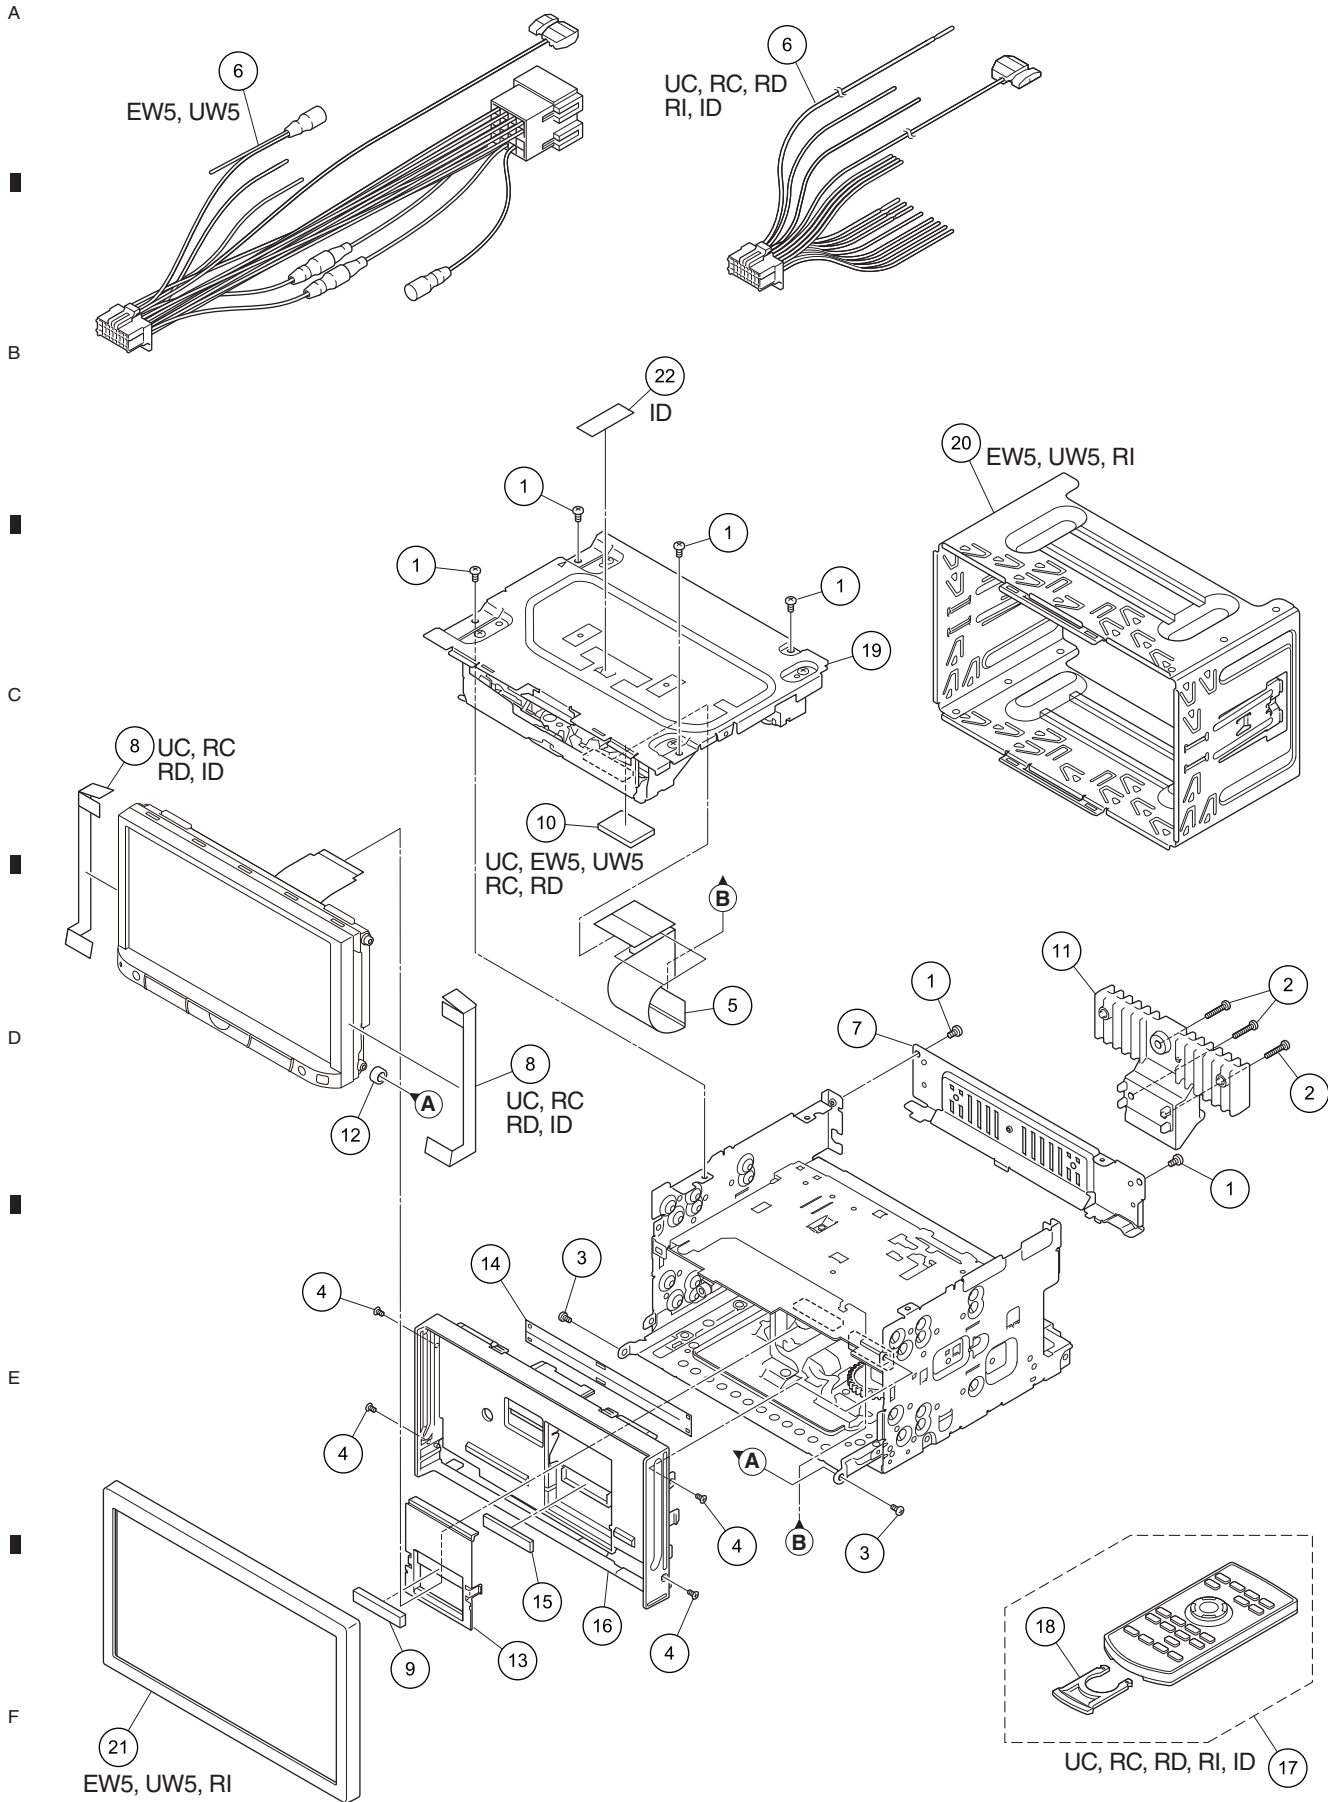

5

6

7

8

(1) EXTERIOR (2) SECTION PARTS LIST

Mark No.	Description	Part No.	Mark No.	Description	Part No.
1	Screw	BSZ26P060FTC	16	Panel	See Contrast table(2)
2	Screw	BSZ26P120FTC	17	Card Remote Control Unit	See Contrast table(2)
3	Screw	CBA1735	18	Battery Cover	See Contrast table(2)
4	Screw (M2 x 3)	CBA1877	19	DVD Mechanism Module (LS2)	CXK8004
5	FFC	CDE9558	20	Holder	See Contrast table(2)
6	Cord Assy	See Contrast table(2)	21	Panel	See Contrast table(2)
7	Holder	CND6246	22	Label	See Contrast table(2)
8	Sheet	See Contrast table(2)			
9	Cushion	CNN3893			
10	Spacer	See Contrast table(2)			
11	Heat Sink	CNR2147			
12	Collar	CNW2038			
13	Cover	CNW2316			
14	Cover	QNM3029			
15	Cushion	CNN3206			


(2) CONTRAST TABLE

AVH-X8500BHS/XNUC, AVH-X8500BT/XNEW5, AVH-X8500BT/XNUW5, AVH-X8550BT/XNRC, AVH-X8550BT/XNRD, AVH-X8550BT/XNRI and AVH-X8590BT/XNID are constructed the same except for the following:

Mark	No.	Description	AVH-X8500BHS /XNUC	AVH-X8500BT /XNEW5	AVH-X8500BT /XNUW5	AVH-X8550BT /XNRC
	6	Cord Assy	CDP1435	CDP1436	CDP1436	CDP1435
	8	Sheet	CNN3089	Not used	Not used	CNN3089
	10	Spacer	CNN4042	CNN4042	CNN4042	CNN4042
	16	Panel	YNS5733	YNS5734	YNS5734	YNS5735
	17	Card Remote Control Unit	CXE5117	Not used	Not used	CXE5117
	18	Battery Cover	CNU1624	Not used	Not used	CNU1624
	20	Holder	Not used	CND6288	CND6288	Not used
	21	Panel	Not used	CNS9952	CNS9952	Not used
	22	Label	Not used	Not used	Not used	Not used

Mark	No.	Description	AVH-X8550BT /XNRD	AVH-X8550BT /XNRI	AVH-X8590BT /XNID
	6	Cord Assy	CDP1435	CDP1435	CDP1435
	8	Sheet	CNN3089	Not used	CNN3089
	10	Spacer	CNN4042	Not used	Not used
	16	Panel	YNS5735	YNS5735	YNS5735
	17	Card Remote Control Unit	CXE5117	CXE5117	CXE5117
	18	Battery Cover	CNU1624	CNU1624	CNU1624
	20	Holder	Not used	CND6288	Not used
	21	Panel	Not used	CNS9952	Not used
	22	Label	Not used	Not used	CNN3533

9.4 EXTERIOR (3)

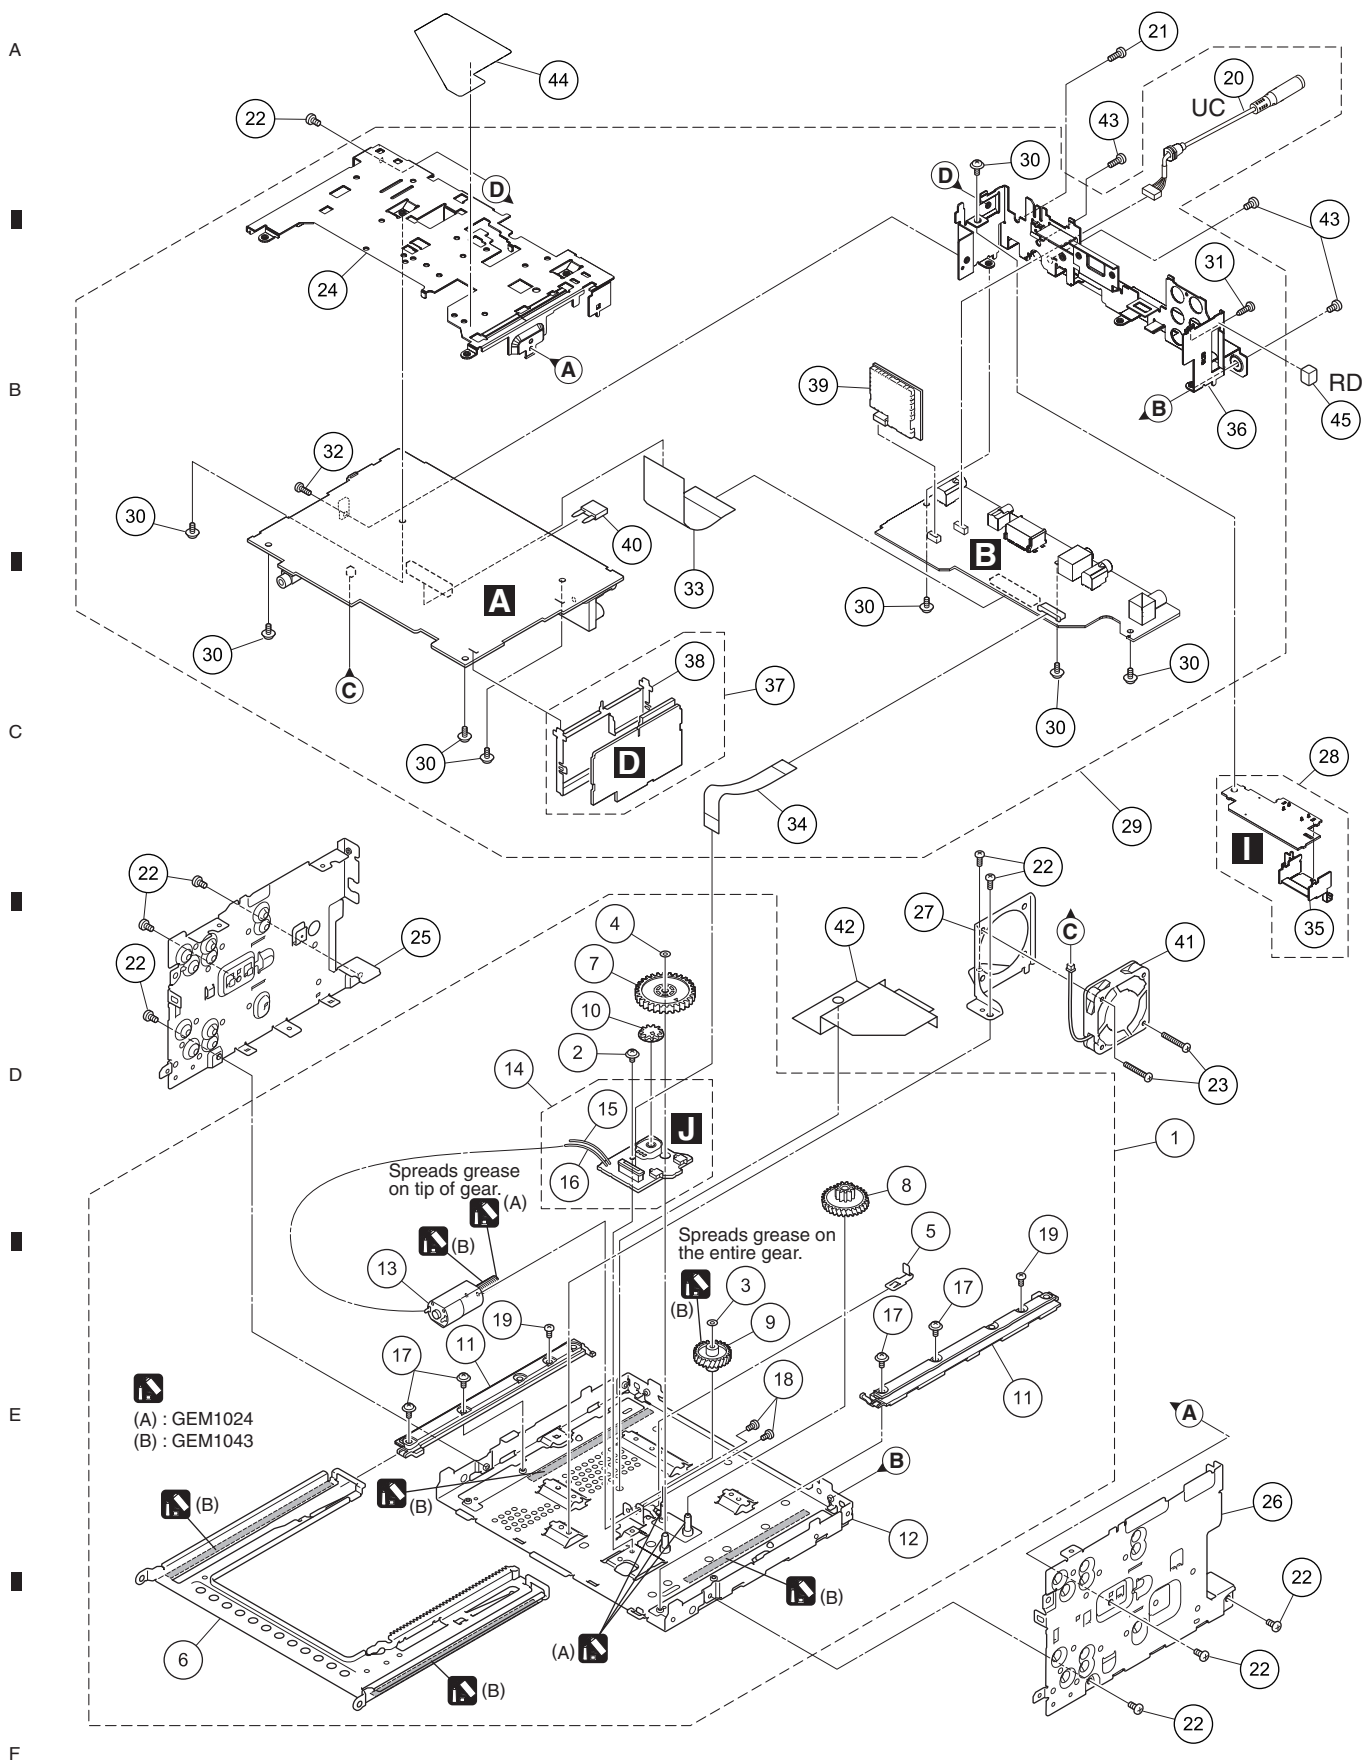

Mark No.	Description	Part No.	Mark No.	Description	Part No.
1	Drive Unit	CXE3878	26	Bracket	CND6335
2	Screw	AMZ26P030FTC	27	Bracket	CND6399
3	Washer	CBF1039	28	HDMI Unit	YWM5608
4	Washer	CBF1064	29	Mother Unit (Service)	See Contrast table(2)
5	Spring	EBL1034	30	Screw	ASZ26P050FTC
6	Frame	ENC2001	31	Screw	BPZ26P080FTC
7	Gear	ENV1630	32	Screw	BSZ26P080FTC
8	Gear	ENV1631	33	FFC	See Contrast table(2)
9	Gear	ENV1632	34	FFC	CDE9560
10	Gear	ENV1635	35	Holder	YND5130
11	Guide	ENV3001	36	Holder	See Contrast table(2)
12	Chassis Unit	EXA4001	37	WWR Core TUN Unit	See Contrast table(2)
13	Motor Unit	EXA4003	38	Holder	CND5830
14	PCB Unit (Service)	EXX2001	39	BT Module	CWX4356
* 15	Cord (Green)	CDC1056	⚠ 40	Fuse (10 A)	YEK5001
* 16	Cord (White)	CDC1057	41	Fan Motor	CXM1446
17	Screw	IMS26P060FTC	42	Sheet	CNN4190
18	Screw	JFZ20P025FTC	43	Screw	BSZ26P060FTC
19	Screw	EBA2002	44	Sheet	YNN5068
20	Cord	See Contrast table(2)	45	Gasket	See Contrast table(2)
21	Screw	BMZ30P060FTC			
22	Screw	BSZ26P050FTC			
23	Screw	BPZ30P140FTC			
24	Holder	YND5129			
25	Bracket	CND6275			

(2) CONTRAST TABLE

AVH-X8500BHS/XNUC, AVH-X8500BT/XNEW5, AVH-X8500BT/XNUW5, AVH-X8550BT/XNRC, AVH-X8550BT/XNRD, AVH-X8550BT/XNRI and AVH-X8590BT/XNID are constructed the same except for the following:

Mark	No.	Description	AVH-X8500BHS /XNUC	AVH-X8500BT /XNEW5	AVH-X8500BT /XNUW5	AVH-X8550BT /XNRC
	20	Cord	YDE5137	Not used	Not used	Not used
	29	Mother Unit (Service)	YXX5120	YXX5118	YXX5119	YXX5121
	33	FFC	YDE5146	CDE9559	CDE9559	CDE9559
	36	Holder	YND5127	YND5128	YND5126	YND5126
	37	WWR Core TUN Unit	CWE2347	*Tuner PCB	*Tuner PCB	*Tuner PCB
	45	Gasket	Not used	Not used	Not used	Not used

Mark	No.	Description	AVH-X8550BT /XNRD	AVH-X8550BT /XNRI	AVH-X8590BT /XNID
	20	Cord	Not used	Not used	Not used
	29	Mother Unit (Service)	YXX5122	YXX5123	YXX5124
	33	FFC	CDE9559	CDE9559	CDE9559
	36	Holder	YND5126	YND5126	YND5126
	37	WWR Core TUN Unit	*Tuner PCB	*Tuner PCB	*Tuner PCB
	45	Gasket	CNN4172	Not used	Not used

9.5 DVD MECHANISM MODULE (1)

A


B

C

D

E

F

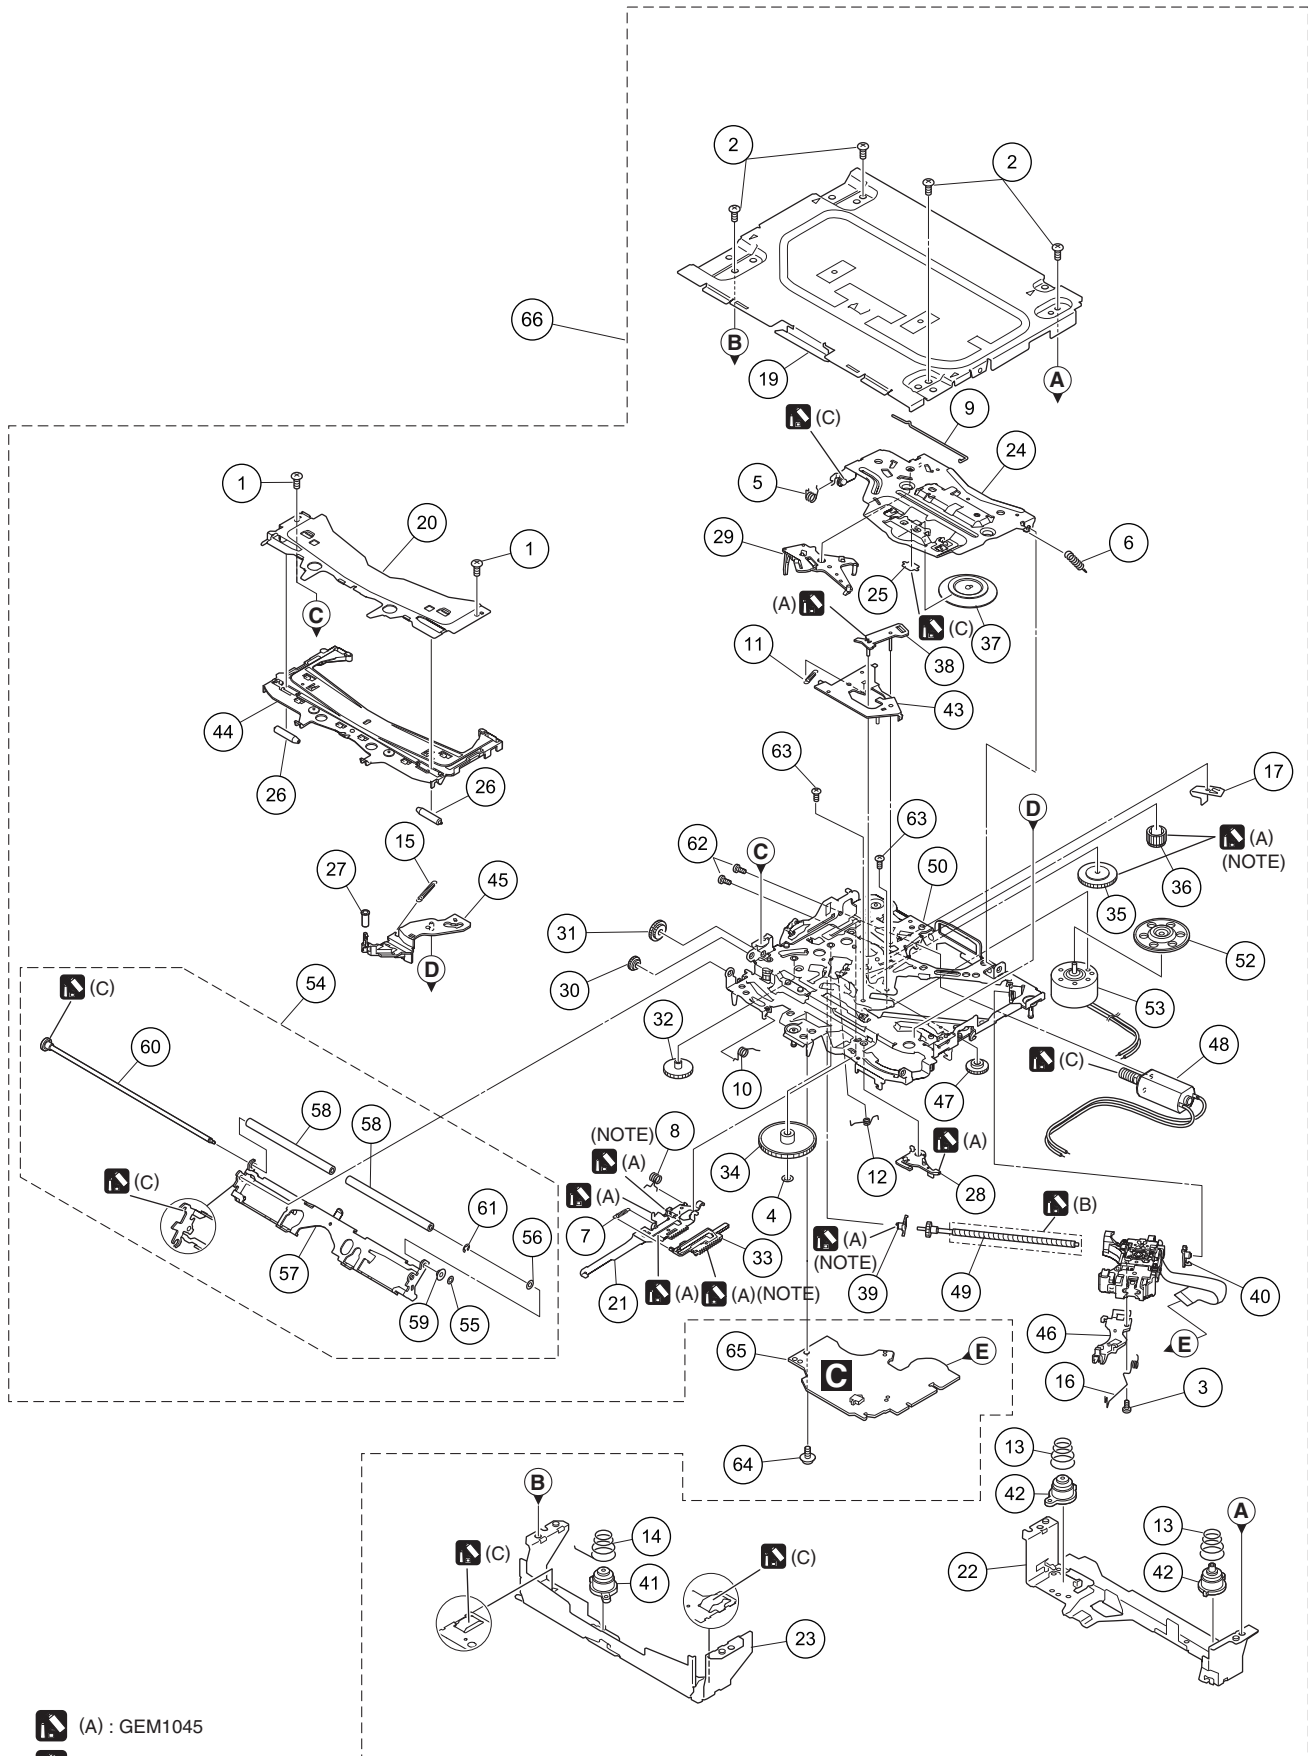

(NOTE) Apply grease to the whole part.

<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>	<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>	
1	Screw	BSZ20P040FTC	49	Screw Unit	CXC8894	
2	Screw	BSZ26P060FTC	* 50	Chassis Unit	CXE4047	A
3	Screw (M2 x 4)	CBA1835	51	*****		
4	Washer	CBF1038	* 52	Support Wheel	CNW2052	
5	Spring	CBH2855	* 53	Spindle Motor(M2)(SPINDLE)	EXM2002	
6	Spring	CBH2860	54	Arm Assy	CXE5027	
7	Spring	CBH3010	55	Washer	CBF1037	
8	Spring	CBH3011	56	Washer	CBF1038	
9	Spring	CBH3014	57	Arm	CND6242	
10	Spring	CBH3015	58	Roller	CNW1196	
11	Spring	CBH3016	59	Collar	CNW2444	B
12	Spring	CBH3017	60	Gear Unit	CXC8893	
13	Spring	CBH3019	61	Washer	YE15FTC	
14	Spring	CBH3086	62	Screw	JFZ20P025FTC	
15	Spring	CBH3095	63	Screw	JGZ17P020FTC	
16	Spring	CBH3096	64	Screw (M2 x 5)	EBA1028	
17	Plate Spring	CBL1824	65	DVD Core Unit	YWX5033	
18	*****		66	Mechanism Unit(Service)	CXX4549	
19	Case	CNB3762				C
20	Bracket	CND4553				
21	Lever	CND5398				
22	Bracket	CND5710				
23	Bracket	CND6127				
24	Arm	CND6406				
25	Sheet	CNN3678				
26	Roller	CNW1172				
27	Roller	CNW1175				
28	Arm	CNW1177				
29	Arm	CNW1178				D
30	Gear	CNW1180				
31	Gear	CNW1181				
32	Gear	CNW1183				
33	Rack	CNW1184				
34	Gear	CNW1185				
35	Gear	CNW1186				
36	Gear	CNW1187				
37	Clamper	CNW1190				E
38	Arm	CNW1192				
39	Holder	CNW1193				
40	Holder	CNW1194				
41	Damper	CNW1197				
42	Damper	CNW1198				
43	Arm	CNW1726				
44	Guide	CNW2240				
45	Arm	CNW2241				
46	Rack	CNW2265				F
47	Gear	CNW2287				
48	Motor Unit(M1)(CRG(L/E))	CXC4026				

Pickup, Spindle Motor and Support Wheel are not available as service parts, because they need adjustment by special equipment after replacing.

12. ELECTRICAL PARTS LIST

NOTE:

- Parts whose parts numbers are omitted are subject to being not supplied.
- The part numbers shown below indicate chip components.

Chip Resistor

RS1/○○○○○J, RS1/○○○○○J

Chip Capacitor (except for CQS.....)

CKS....., CCS....., CSZS.....

- The Δ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
- Meaning of the figures and others in the parentheses in the parts list.

Example) IC 301 is on the point (face A, 91 of x-axis, and 111 of y-axis) of the corresponding PC board.

IC 301 (A, 91, 111) IC NJM2068V

- The expression of the unit in this manual is shown by u instead of μ . Please do not make a mistake.

Circuit Symbol and No.

Part No.

A:AVH-X8500BHS/XNUC

B:AVH-X8500BT/XNEW5

C:AVH-X8500BT/XNUW5

D:AVH-X8550BT/XNRC

E:AVH-X8550BT/XNRD

F:AVH-X8550BT/XNRI

G:AVH-X8590BT/XNID

Unit Number : YXX5120(A)

Unit Name : Mother Unit(Service) (A)

Unit Number : YXX5118(B)

Unit Number : YXX5119(C)

Unit Number : YXX5121(D)

Unit Number : YXX5122(E)

Unit Number : YXX5123(F)

Unit Number : YXX5124(G)

Unit Name : Mother Unit(Service)
(B,C,D,E,F,G)

Unit Number : YWX5033

Unit Name : DVD Core Unit

Unit Number : YXX5128

Unit Name : Monitor Unit(Service)

Unit Number : YXX5126

Unit Name : Key Unit(Service)

Unit Number : YXX5127

Unit Name : Case Unit(Service)

Unit Number : YXX5129

Circuit Symbol and No.

Part No.

Unit Name : SW Unit(Service)

Unit Number : YWM5608

Unit Name : HDMI Unit

Unit Number : EXX2001

Unit Name : PCB Unit(Service)

Mother Unit(Service) (A)

Consists of

Tuner Amp PCB

IF PCB

AB (A)

Unit Number : YXX5120(A)

Unit Name : Mother Unit(Service) (A)

MISCELLANEOUS

IC 101	(A,97,121) IC	PA2030A
IC 181	(B,40,96) IC	PML020A
IC 231	(B,48,63) IC	NJM4565V
IC 232	(A,59,64) IC	NJM4565V
IC 261	(B,40,78) IC	AK4223VQ
IC 401	(B,167,33) IC	337S3959
IC 421	(A,147,76) D/A Converter	PCM1753DBQ
IC 422	(A,158,83) D/A Converter	PCM1753DBQ
IC 471	(B,139,91) LSI	ML86V7675TBZ03A
IC 472	(A,134,91) IC	BH7673G
IC 521	(A,96,41) IC	BH7673G
IC 522	(B,100,41) IC	BH7673G
IC 523	(B,94,41) IC	BH7673G
IC 524	(B,94,44) IC	BH7673G
IC 601	(A,39,42) IC	PEQ135A8
IC 602	(B,58,35) RESET IC	S-80829CNMC-B8O
IC 831	(B,119,110) IC	AN33014UA
IC 832	(B,118,95) IC	AN33014UA

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
IC 901	(B,25,74) IC	NJM4565V		Q 782	(B,36,111) Chip Transistor	HN1C03FU	
IC 951	(B,161,98) IC	AK8814VQ		Q 783	(B,44,111) Chip Transistor	HN1C03FU	
IC 1002	(A,159,72) Logic IC	TC7SHU04FUS1		Q 821	(A,150,11) Transistor	UMF23N	A
IC 1003	(B,166,72) Logic IC	TC7SHU04FUS1		Q 822	(A,145,12) Transistor	LSAR523UB	
IC 1004	(A,143,55) IC	R8A77240D500BG1		Q 871	(B,124,40) Chip Transistor	2SB1689	
IC 1006	(B,158,69) Logic IC	TC74VHC125FK		Q 1301	(A,33,71) Transistor	2SB1184F5	
IC 1201	(A,132,27) RAM IC	H5PS5162GFR-S5C		Q 1302	(A,49,76) Transistor	2SD1664	
IC 1202	(A,154,27) RAM IC	H5PS5162GFR-S5C		Q 1321	(A,89,80) FET	SFT1342	
IC 1241	(B,162,50) Flash ROM Unit(Service)	YXX5109		Q 1322	(A,89,66) FET	SFT1342	
IC 1301	(A,35,65) IC	S-812C33AUA-C2N		Q 1361	(B,83,29) Chip Transistor	2SB1689	
IC 1311	(A,165,80) IC	NJM2388F84		Q 1362	(B,84,35) Transistor	LTC043ZEB	
IC 1321	(B,90,73) IC	AN33012UA		Q 1381	(B,87,89) Transistor	LSAR523UB	
IC 1361	(A,86,59) IC	S-1142B50I-E6		Q 1382	(B,93,89) Transistor	LTC043ZEB	
IC 1371	(A,120,11) IC	NJM2886DL3-33		Q 1393	(B,112,45) Transistor	2SA1577	B
IC 1381	(B,97,94) IC	S-1172B33-E6		Q 1400	(B,109,47) Transistor	LTC043ZEB	
IC 1383	(B,100,102) IC	NJM2878F3-15		Q 1401	(A,103,44) Transistor	LSCR523UB	
IC 1391	(A,116,86) IC	S-1172B33-E6		Q 1422	(B,77,93) Transistor	2SB1132	
IC 1401	(A,107,49) IC	AL2010		Q 1423	(B,82,86) Transistor	LTC014EEB	
IC 1402	(A,114,71) IC	S-1172B13-E6		Q 1431	(A,112,11) Transistor	2SD2118	
IC 1441	(B,65,69) IC	TK11840L		Q 1432	(A,97,15) Transistor	LTC014EEB	
IC 1461	(A,38,83) IC	NJM2846DL3-05		Q 1433	(A,65,59) Transistor	KTX213U	
IC 1471	(B,22,34) IC	NJM2886DL3-33		Q 1434	(A,71,59) Transistor	LTC014EEB	
IC 1472	(A,23,57) IC	S-1172B11-E6		Q 1435	(A,68,64) Transistor	2SD1760F5	
IC 1473	(B,25,54) IC	NJM2855DL1-33		Q 1441	(B,70,82) Transistor	LSCR523UB	
IC 1601	(B,152,80) IC	TC74VHC541FK		Q 1442	(B,66,72) FET	RSF014N03	C
IC 1602	(B,157,89) IC	TC74VHC541FK		Q 1443	(B,71,66) Transistor	LTC043EEB	
IC 1605	(A,41,101) IC	TPD1052F		Q 1444	(A,108,111) Transistor	LTC014YEB	
IC 1610	(A,52,69) IC	TC4066BFT		Q 1445	(A,46,61) Chip Transistor	RN1904	
IC 1612	(B,28,86) IC	TC4066BFT		Q 1446	(B,24,93) Chip Transistor	RN1904	
IC 2101	(B,111,49) IC	NJM2856DL3-18		Q 1447	(B,74,101) Transistor	2SD2153	
IC 2102	(A,112,49) IC	NJM2886DL3-33		Q 2031	(B,52,31) Chip Transistor	HN1C03FU	
IC 2122	(A,141,48) IC	WM8761BGED		D 121	(A,51,105) Diode	CRG03	
Q 101	(A,110,110) Chip Transistor	RN4982		D 122	(A,51,107) Diode	CRG03	
Q 131	(A,97,102) Transistor	LTA024EEB		D 131	(A,93,103) Diode	DA2J101	
Q 132	(A,102,94) Transistor	LTA024EEB		D 132	(A,104,104) Diode	MC2848-11	
Q 133	(A,101,101) Transistor	LSCR523UB		D 133	(A,101,103) Diode	MC2848-11	D
Q 134	(A,97,104) Chip Transistor	RN4983		D 136	(A,83,107) Diode	MC2848-11	
Q 135	(A,102,108) Chip Transistor	RN1903		D 151	(B,56,98) Diode	MC2848-11	
Q 151	(B,57,94) Chip Transistor	HN1A01FU		D 152	(B,54,124) Diode	HZU7L(A1)	
Q 152	(B,71,124) Chip Transistor	HN1C01FU		D 153	(B,75,120) Diode	HZU7L(C3)	
Q 153	(B,75,124) Transistor	LSCR523UB		D 154	(B,78,123) Diode	RKZ20KG(B2)	
Q 154	(B,66,119) Transistor	LTC014EEB		D 155	(B,65,123) Diode	DA2J101	
Q 155	(B,68,123) Transistor	LTC014EEB		D 156	(B,63,125) Diode	RKZ5.6KG(B2)	
Q 231	(B,36,64) Transistor	LSCR523UB		D 231	(B,41,62) Diode	RKZ4.7KG(B2)	
Q 401	(B,163,32) Transistor	LSAR523UB		D 601	(B,59,39) Diode	DA2J101	
Q 421	(B,120,57) Chip Transistor	RN4982		D 702	(B,54,20) Diode	EMZC6.8N	
Q 422	(B,119,55) Chip Transistor	HN1C03FU		D 703	(B,55,25) Diode	EMZC6.8N	E
Q 423	(B,119,63) Chip Transistor	RN4982		D 704	(B,56,20) Diode	EMZC6.8N	
Q 424	(B,119,66) Chip Transistor	HN1C03FU		D 705	(B,58,25) Diode	EMZC6.8N	
Q 471	(A,129,85) Transistor	LSAR523UB		D 706	(B,58,20) Diode	EMZC6.8N	
Q 521	(B,97,48) Transistor	LSCR523UB		D 707	(B,60,25) Diode	EMZC6.8N	
Q 522	(B,100,46) Transistor	LSCR523UB		D 708	(B,61,20) Diode	EMZC6.8N	
Q 523	(B,107,42) Transistor	LSCR523UB		D 709	(B,62,25) Diode	EMZC6.8N	
Q 524	(A,103,39) Transistor	LSCR523UB		D 710	(B,63,20) Diode	EMZC6.8N	
Q 571	(A,25,12) Chip Transistor	RN4982		D 711	(B,64,25) Diode	EMZC6.8N	
Q 572	(A,28,15) Chip Transistor	HN1C03FU		D 712	(B,65,20) Diode	EMZC6.8N	
Q 591	(A,48,90) Transistor	UMF23N		D 713	(B,80,20) Diode	DZ2S068C	F
Q 601	(A,60,48) Transistor	LSCR523UB		D 714	(B,82,25) Diode	DZ2S068C	
Q 602	(B,83,19) Transistor	LSCR523UB		D 715	(B,81,25) Diode	DZ2S068C	
Q 781	(B,28,111) Chip Transistor	HN1C03FU		D 716	(B,79,25) Diode	DZ2S068C	

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

D 717 (B,78,25) Diode

DZ2S068C

D 1475 (A,45,97) Diode

CRG03

D 718 (B,78,20) Diode

DZ2S068C

D 2012 (B,66,31) Diode

DZ2S068C

D 719 (B,77,20) Diode

DZ2S068C

D 2013 (B,69,33) Diode

DZ2S068C

D 720 (B,76,20) Diode

DZ2S068C

D 2014 (B,62,31) Diode

DZ2S068C

D 721 (B,75,20) Diode

DZ2S068C

D 722 (B,81,20) Diode

DZ2S068C

L 103 (A,110,112) Inductor

CTF1389

L 121 (A,66,99) Choke Coil 600 uH

CTH1221

L 131 (A,79,108) Chip Coil

BTH1101

L 151 (B,59,102) Chip Coil

BTH1101

D 723 (B,73,20) Diode

DZ2S068C

D 724 (B,72,20) Diode

DZ2S068C

D 725 (B,70,20) Diode

DZ2S068C

D 726 (B,71,25) Diode

DZ2S068C

D 727 (B,68,25) Diode

DZ2S068C

L 152 (B,59,125) Inductor

CTF1547

L 472 (B,147,87) Chip Beads

VTL1132

L 521 (B,107,40) Inductor

CTF1545

L 522 (B,102,47) Inductor

CTF1545

L 523 (A,101,41) Inductor

CTF1545

D 728 (B,68,20) Diode

DZ2S068C

D 729 (B,67,20) Diode

DZ2S068C

D 730 (B,66,25) Diode

DZ2S068C

D 731 (B,77,25) Diode

DZ2S068C

D 732 (B,51,21) Diode

DZ2S068C

L 524 (B,104,45) Inductor

CTF1545

L 601 (A,28,59) Ferrite Bead

CTF1528

L 701 (A,74,24) Inductor

XTL3010

L 831 (A,127,109) Inductor

CTH1524

L 832 (A,160,102) Inductor

CTF1713

D 733 (B,54,25) Diode

DZ2S068C

D 761 (A,139,119) Diode

DZ2S068C

D 762 (A,116,116) Diode

DZ2S068C

D 763 (A,116,120) Diode

DZ2S068C

D 765 (A,116,118) Diode

DZ2S068C

L 833 (A,151,110) Inductor

CTF1713

L 836 (A,126,98) Inductor

CTH1524

L 951 (B,171,102) Inductor

LCTAW2R7J2520

L 952 (B,152,100) Inductor

LCTAW2R7J2520

L 1001 (A,130,42) Chip Beads

VTL1127

D 811 (A,143,14) Diode

DZ2S068C

D 812 (A,143,11) Diode

DZ2S068C

D 821 (A,148,16) Diode

RKZ3.9KG(B2)

D 831 (B,125,108) Diode

DB2X41400

D 832 (A,164,105) Diode

EZAEG2A50AX

L 1002 (A,127,51) Chip Beads

VTL1126

L 1003 (A,125,52) Chip Beads

VTL1126

L 1004 (A,127,49) Chip Beads

VTL1126

L 1005 (A,125,50) Chip Beads

VTL1126

L 1006 (A,127,50) Chip Beads

VTL1126

D 833 (B,124,93) Diode

DB2X41400

D 834 (A,153,109) Diode

EZAEG2A50AX

D 835 (A,154,119) Diode

DZ2S068C

D 836 (A,154,114) Diode

DZ2S068C

D 837 (A,109,104) Diode

RSX201L-30

L 1007 (A,125,51) Chip Beads

VTL1126

L 1008 (A,127,48) Chip Beads

VTL1126

L 1009 (A,125,49) Chip Beads

VTL1126

L 1010 (A,127,47) Chip Beads

VTL1126

L 1011 (A,125,48) Chip Beads

VTL1126

D 838 (A,162,105) Diode

EZAEG2A50AX

D 839 (A,154,111) Diode

EZAEG2A50AX

D 840 (A,110,92) Diode

RSX201L-30

D 871 (B,119,36) Diode

EZAEG2A50AX

D 872 (B,115,37) Diode

EZAEG2A50AX

L 1012 (A,125,46) Chip Beads

VTL1126

L 1013 (A,127,46) Chip Beads

VTL1126

L 1014 (A,125,47) Chip Beads

VTL1126

L 1015 (A,125,45) Chip Beads

VTL1126

L 1016 (A,127,45) Chip Beads

VTL1126

D 873 (B,106,37) Diode

EZAEG2A50AX

D 874 (B,104,37) Diode

EZAEG2A50AX

D 875 (B,102,37) Diode

EZAEG2A50AX

D 876 (B,112,36) Diode

EZAEG2A50AX

D 877 (B,128,17) Diode

DZ2S068C

L 1017 (A,125,43) Chip Beads

VTL1126

L 1018 (A,127,43) Chip Beads

VTL1126

L 1019 (A,125,44) Chip Beads

VTL1126

L 1020 (A,127,44) Chip Beads

VTL1126

L 1021 (B,156,73) Chip Beads

VTL1132

D 878 (B,122,36) Diode

DZ2S068C

D 879 (B,128,14) Diode

DZ2S068C

D 1303 (A,52,77) Diode

RKZ18KG(B2)

D 1304 (A,44,77) Diode

1SR154-400

D 1321 (A,91,75) Diode

RB080L-30

L 1022 (A,127,42) Chip Beads

VTL1126

L 1023 (B,151,64) Chip Beads

VTL1132

L 1024 (A,156,60) Chip Beads

VTL1126

L 1025 (B,156,66) Chip Beads

VTL1132

L 1026 (B,158,66) Chip Beads

VTL1132

D 1322 (A,91,71) Diode

RB080L-30

D 1323 (A,93,88) Diode

CMS03

D 1324 (A,89,88) Diode

CMS03

D 1401 (A,108,56) Diode

DB2X206

D 1421 (B,78,101) Diode

RKZ16KG(B2)

L 1321 (A,101,86) Inductor

ATH1219

L 1322 (A,101,61) Inductor

CTH1541

L 1323 (A,78,85) Choke Coil 6.8 uH

CTH1434

L 1401 (A,112,60) Inductor

CTH1526

L 1441 (A,64,71) Choke Coil 47 uH

CTH1388

D 1432 (A,105,17) Diode

HZU6R2(B3)

D 1433 (A,77,62) Diode

RKZ8.2KG(B2)

D 1434 (A,73,59) Diode

RKZ6.8KG(B2)

D 1441 (B,67,81) Diode

HZU13(B1)

D 1442 (B,70,74) Diode

RB551VM-30

L 1442 (B,62,66) Inductor

CTF1735

L 1601 (B,157,84) Chip Beads

VTL1126

L 2011 (B,61,31) Inductor

CTF1545

L 2012 (B,70,35) Inductor

CTF1545

L 2013 (B,65,34) Inductor

CTF1545

D 1461 (A,33,95) Diode

1SR154-400

D 1462 (A,33,99) Diode

1SR154-400

D 1463 (A,31,90) Diode

1SR154-400

D 1464 (A,34,90) Diode

1SR154-400

L 2031 (B,49,29) Inductor

CTF1545

1

2

3

4

5			6			7			8		
<u>Circuit Symbol and No.</u>			<u>Part No.</u>			<u>Circuit Symbol and No.</u>			<u>Part No.</u>		
L 2032	(B,55,29)	Inductor	CTF1545			R 132	(A,104,100)		RS1/16SS472J		
L 2041	(A,165,27)	Inductor	CTF1545			R 133	(A,103,100)		RS1/16SS473J		
L 2042	(A,161,24)	Inductor	CTF1545			R 134	(A,97,107)		RS1/16SS222J		
						R 135	(A,99,107)		RS1/16SS823J		A
L 2111	(B,130,25)	Inductor	CTF1545								
L 2112	(B,126,25)	Inductor	CTF1639			R 136	(A,104,108)		RS1/16SS101J		
X 471	(B,144,81)	Crystal Resonator 32.000 MHz	CSS1818			R 137	(A,98,107)		RS1/16SS152J		
X 601	(A,59,39)	Resonator 3.932 16 MHz	CSS1772			R 141	(A,81,106)		RS1/16SS153J		
X 1002	(A,155,72)	Resonator 27.000 MHz	CSS1768			R 142	(A,87,107)		RS1/10SR472J		
						R 153	(B,59,99)		RS1/16SS103J		
X 1003	(B,166,68)	Resonator 22 579.2 kHz	CSS1812								
X 1004	(A,127,66)	Resonator 48.000 MHz	CSS1760			R 154	(B,55,93)		RS1/16SS473J		
X 1005	(A,127,59)	Crystal Resonator 33.333 333 MHz	CSS1825			R 155	(B,57,92)		RS1/16SS473J		
P 761	(A,113,116)	Poly Switch	FSMD075-24R			R 156	(B,59,94)		RS1/16SS473J		
P 781	(A,24,110)	Poly Switch	FSMD075-24R			R 157	(B,57,96)		RS1/16SS473J		
						R 158	(B,53,123)		RS1/16SS472J		
P 901	(B,19,88)	Surge Absorber	IMSA-6803-01Y900								B
⚠ P1321	(A,70,82)	Fuse 6.3 A	CEK1262			R 159	(B,55,122)		RS1/16SS473J		
⚠ P1322	(A,22,12)	Fuse 1.25 A	CEK1382			R 160	(B,55,126)		RS1/16SS103J		
⚠ P1323	(A,21,23)	Fuse 3.0 A	CEK1386			R 163	(B,73,120)		RS1/16SS473J		
⚠ P1361	(A,96,25)	Fuse 4.0 A	CEK1387			R 164	(B,73,123)		RS1/16SS104J		
						R 165	(B,75,121)		RS1/16SS103J		
⚠ P1381	(A,111,78)	Fuse 3.0 A	CEK1386								
⚠ P1382	(B,94,103)	Fuse 0.5 A	CEK1379			R 166	(B,77,124)		RS1/16SS103J		
⚠ P1391	(B,111,50)	Fuse 1.0 A	CEK1381			R 167	(B,64,119)		RS1/16SS103J		
⚠ P1421	(B,78,97)	Fuse 0.75 A	CEK1380			R 168	(B,60,125)		RS1/16SS103J		
⚠ P1431	(A,100,14)	Fuse 2.5 A	CEK1385			R 169	(B,69,121)		RS1/16SS104J		
						R 171	(B,64,123)		RS1/10SR472J		
⚠ P1435	(A,113,28)	Fuse 0.5 A	CEK1379								
⚠ P1441	(B,60,65)	Fuse 0.5 A	CEK1379			R 181	(B,36,108)		RS1/16SS182J		C
P 2031	(B,46,38)	Poly Switch	FSMD075-24R			R 182	(B,39,109)		RS1/16SS182J		
P 2051	(A,121,31)	Poly Switch	FSMD075-24R			R 183	(B,36,109)		RS1/16SS272J		
BZ2161	(A,39,29)	Buzzer	CPV1062			R 184	(B,40,109)		RS1/16SS272J		
CN571	(A,29,20)	Connector	VKN1620			R 185	(B,39,107)		RS1/16SS182J		
CN591	(A,80,48)	Connector	CKS6136								
						R 186	(B,42,107)		RS1/16SS182J		
CN702	(A,67,17)	Connector	CKS6536			R 187	(B,43,106)		RS1/16SS272J		
CN761	(A,132,124)	Connector	CKS6504			R 188	(B,43,107)		RS1/16SS272J		
CN1346	(A,152,95)	Connector	CKS6503			R 196	(B,32,90)		RS1/16SS473J		
CN1435	(A,113,24)	Connector	CKS4822			R 198	(B,52,86)		RS1/16SS0R0J		
CN2051	(A,109,15)	Connector	CKS4497								
						R 231	(B,52,57)		RS1/10SR153J		
CN2091	(A,53,54)	Connector	CKS6095			R 232	(B,48,59)		RS1/10SR153J		D
CN2121	(A,145,62)	Connector	CKS6346			R 233	(B,45,59)		RS1/10SR153J		
CN2161	(B,80,50)	Connector	DKN1396			R 234	(A,58,59)		RS1/10SR153J		
CN2201	(A,149,35)	Connector	CKS6007			R 235	(B,50,66)		RS1/10SR153J		
JA121	(A,62,118)	Plug	CKM1376								
						R 236	(B,53,59)		RS1/10SR153J		
JA781	(A,35,120)	Pin Jack	XKB7001			R 237	(A,54,58)		RS1/10SR273J		
JA811	(A,138,10)	Jack	CKS6437			R 238	(B,51,60)		RS1/10SR153J		
JA831	(A,163,114)	Connector	DKN1417			R 239	(A,53,58)		RS1/10SR273J		
JA871	(B,110,20)	Connector	CKS6282			R 240	(B,49,58)		RS1/10SR153J		
JA901	(A,14,111)	Antenna Jack	YKS5041								
						R 242	(B,38,64)		RS1/16SS102J		
JA2001	(A,13,21)	RCA Jack	CKB1106			R 243	(B,36,61)		RS1/16SS472J		
JA2011	(A,69,9)	Mini Jack	AKN1073			R 246	(A,62,62)		RS1/10SR153J		E
JA2031	(A,54,17)	Jack	CKS6437			R 247	(A,61,59)		RS1/10SR473J		
JA2041	(A,166,17)	Jack	CKS6437			R 248	(A,56,63)		RS1/10SR153J		
JA2111	(A,130,16)	Jack	CKN1040								
						R 249	(A,56,61)		RS1/10SR153J		
						R 250	(A,56,66)		RS1/10SR153J		
						R 251	(A,58,58)		RS1/10SR153J		
						R 252	(B,46,66)		RS1/10SR153J		
						R 261	(B,40,68)		RS1/16SS0R0J		
						R 262	(B,51,70)		RS1/16SS0R0J		
						R 263	(B,51,79)		RS1/16SS0R0J		
						R 264	(B,51,84)		RS1/16SS0R0J		
						R 267	(B,35,84)		RS1/16SS0R0J		F
						R 268	(B,30,75)		RS1/16SS2200D		
						R 271	(B,28,81)		RS1/16SS750J		
WWR C-TUN Unit			CWE2347								
RESISTORS											
R 101	(A,110,113)		RS1/16SS103J								
R 102	(A,111,108)		RS1/16SS473J								
R 121	(B,60,121)		RS1/4SA102J								
R 122	(B,54,120)		RS1/4SA102J								
R 123	(B,58,121)		RS1/4SA102J								
R 131	(A,94,100)		RS1/16SS102J								

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

R 272 (B,31,75)
R 273 (B,31,76)
R 274 (B,31,77)
R 275 (B,30,79)

RS1/16SS0R0J
RS1/16SS101J
RS1/16SS101J
RS1/16SS0R0J

R 444 (B,148,82)
R 445 (B,116,56)
R 446 (B,40,66)
R 449 (A,151,79)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

A

R 276 (B,30,80)
R 277 (B,30,81)
R 279 (B,44,87)
R 280 (B,45,85)
R 282 (A,45,91)

RS1/16SS101J
RS1/16SS101J
RS1/10SR0R0J
RS1/10SR0R0J
RS1/16SS75R0D

R 451 (A,147,83)
R 452 (A,151,77)
R 471 (A,126,86)
R 474 (A,126,85)
R 475 (B,153,70)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS101J
RS1/16SS301J
RS1/16SS0R0J

R 283 (B,36,84)
R 284 (B,35,71)
R 285 (B,36,71)
R 287 (B,38,67)
R 288 (B,41,68)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

R 476 (B,153,71)
R 477 (B,132,84)
R 478 (B,129,87)
R 479 (B,129,94)
R 480 (A,126,90)

RS1/16SS0R0J
RS1/16SS151J
RS1/16SS151J
RS1/16SS151J
RS1/16SS0R0J

B

R 289 (B,42,68)
R 290 (B,44,68)
R 292 (B,31,74)
R 293 (B,30,78)
R 295 (A,46,89)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS470J

R 481 (A,132,83)
R 483 (B,139,81)
R 484 (B,140,99)
R 485 (B,142,83)
R 487 (B,145,84)

RS1/16SS0R0J
RS1/16SS472J
RS1/16SS473J
RS1/16SS105J
RS1/16SS101J

R 310 (B,46,68)
R 326 (B,51,69)
R 327 (B,51,72)
R 328 (B,51,73)
R 329 (B,51,75)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

R 488 (B,145,83)
R 489 (B,141,82)
R 490 (A,131,85)
R 492 (B,149,90)
R 493 (B,147,90)

RS1/16SS101J
RS1/16SS821J
RS1/16SS0R0J
RS1/16SS181J
RS1/16SS181J

C

R 330 (B,51,77)
R 331 (B,51,78)
R 333 (B,51,81)
R 342 (B,31,73)
R 343 (B,31,72)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

R 494 (B,149,91)
R 495 (B,147,91)
R 496 (B,149,92)
R 497 (B,147,92)
R 498 (B,149,93)

RS1/16SS181J
RS1/16SS181J
RS1/16SS181J
RS1/16SS181J
RS1/16SS181J

R 345 (A,37,76)
R 346 (B,30,82)
R 347 (B,30,83)
R 373 (A,36,76)
R 374 (B,51,82)

RS1/16SS101J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS103J
RS1/16SS0R0J

R 499 (B,147,93)
R 500 (B,149,94)
R 501 (B,147,94)
R 502 (B,149,95)
R 503 (B,133,79)

RS1/16SS181J
RS1/16SS560J
RS1/16SS560J
RS1/16SS560J
RS1/16SS0R0J

D

R 375 (B,51,85)
R 401 (B,164,34)
R 402 (B,170,30)
R 403 (B,164,27)
R 404 (B,163,27)

RS1/16SS0R0J
RS1/16SS472J
RS1/16SS272J
RS1/16SS101J
RS1/16SS101J

R 504 (B,149,83)
R 505 (B,148,83)
R 506 (B,147,85)
R 507 (B,148,86)
R 508 (B,141,99)

RS1/16SS222J
RS1/16SS222J
RS1/16SS101J
RS1/16SS473J
RS1/16SS101J

R 405 (B,167,31)
R 406 (B,165,30)
R 421 (B,120,59)
R 422 (B,119,53)
R 423 (B,116,54)

RS1/16SS103J
RS1/16SS103J
RS1/16SS102J
RS1/16SS472J
RS1/16SS472J

R 510 (B,128,92)
R 512 (B,149,87)
R 514 (A,130,90)
R 515 (A,130,88)
R 516 (A,131,90)

RS1/16SS151J
RS1/16SS331J
RS1/16SS750J
RS1/16SS0R0J
RS1/16SS750J

E

R 424 (A,156,76)
R 425 (A,154,78)
R 426 (A,151,75)
R 427 (A,152,78)
R 428 (A,148,71)

RS1/16SS104J
RS1/16SS104J
RS1/16SS821J
RS1/16SS821J
RS1/16SS0R0J

R 536 (A,99,39)
R 540 (B,96,46)
R 551 (B,100,43)
R 552 (B,103,42)
R 553 (B,98,44)

RS1/16SS101J
RS1/16SS101J
RS1/10SR101J
RS1/16SS101J
RS1/16SS101J

R 429 (A,145,81)
R 430 (A,146,82)
R 431 (B,117,66)
R 432 (B,117,64)
R 433 (B,119,60)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS472J
RS1/16SS472J
RS1/16SS102J

R 554 (A,124,86)
R 571 (A,24,14)
R 572 (A,27,13)
R 573 (A,28,13)
R 574 (A,32,16)

RS1/16SS0R0J
RS1/16SS102J
RS1/16SS472J
RS1/16SS472J
RS1/16SS0R0J

F

R 434 (A,149,84)
R 435 (A,149,83)
R 436 (A,152,83)
R 437 (A,154,83)
R 438 (A,160,79)

RS1/16SS104J
RS1/16SS104J
RS1/16SS821J
RS1/16SS821J
RS1/16SS0R0J

R 577 (A,31,25)
R 578 (A,29,25)
R 579 (A,30,25)
R 580 (A,33,25)
R 581 (A,32,25)

RS1/16SS471J
RS1/16SS221J
RS1/16SS221J
RS1/16SS221J
RS1/16SS221J

R 443 (B,117,61)

RS1/16SS0R0J

R 582 (A,34,25)

RS1/16SS221J

1

2

3

4

5		6		7		8		
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>		
R 591	(A,48,93)	RS1/16SS562J		R 666	(A,24,41)	RS1/16SS221J		
R 592	(A,49,97)	RS1/16SS332J		R 667	(B,31,41)	RS1/16SS221J		
R 593	(A,81,45)	RS1/16SS471J		R 668	(B,30,41)	RS1/16SS221J		
R 594	(A,79,45)	RS1/16SS471J						A
				R 669	(A,24,39)	RS1/16SS104J		
R 595	(A,50,90)	RS1/16SS222J		R 670	(B,32,41)	RS1/16SS221J		
R 601	(A,33,57)	RS1/16SS221J		R 673	(B,30,33)	RS1/16SS223J		
R 602	(A,31,57)	RS1/16SS221J		R 674	(B,30,34)	RS1/16SS223J		
R 603	(A,32,57)	RS1/16SS221J						
R 604	(B,52,44)	RS1/16SS473J		R 675	(B,30,35)	RS1/10SR0R0J		
				R 676	(A,55,55)	RS1/16SS222J		
R 606	(A,63,52)	RS1/16SS473J		R 677	(A,37,27)	RS1/16SS0R0J		
R 607	(A,61,52)	RS1/16SS473J		R 679	(A,24,42)	RS1/16SS473J		
R 608	(B,60,39)	RS1/16SS104J		R 680	(A,24,40)	RS1/16SS104J		
R 609	(B,50,40)	RS1/16SS104J						
				R 681	(A,55,52)	RS1/16SS472J		
R 610	(B,50,42)	RS1/16SS104J		R 682	(A,51,27)	RS1/16SS222J		
R 611	(A,55,46)	RS1/16SS104J		R 683	(B,41,56)	RS1/16SS222J		B
R 612	(B,52,29)	RS1/16SS0R0J		R 684	(A,44,58)	RS1/16SS0R0J		
R 613	(B,55,35)	RS1/10SR0R0J		R 685	(A,45,58)	RS1/16SS0R0J		
R 614	(A,55,39)	RS1/16SS100J						
				R 687	(A,48,27)	RS1/16SS222J		
R 615	(B,48,49)	RS1/10SR0R0J		R 688	(B,47,27)	RS1/16SS473J		
R 616	(B,52,36)	RS1/16SS104J		R 689	(A,45,25)	RS1/16SS154J		
R 617	(B,54,38)	RS1/16SS102J		R 690	(B,58,48)	RS1/16SS471J		
R 618	(B,52,42)	RS1/16SS473J		R 691	(B,58,47)	RS1/16SS471J		
R 620	(B,54,43)	RS1/16SS681J						
				R 695	(A,34,27)	RS1/16SS0R0J		
R 621	(B,54,42)	RS1/16SS273J		R 697	(B,82,23)	RS1/16SS104J		
R 622	(A,58,48)	RS1/16SS473J		R 698	(B,83,23)	RS1/16SS224J		C
R 623	(A,54,33)	RS1/16SS101J		R 699	(A,54,31)	RS1/16SS101J		
R 624	(B,49,50)	RS1/16SS472J		R 700	(A,52,22)	RS1/16SS101J		
R 625	(B,49,51)	RS1/16SS472J						
				R 701	(A,55,47)	RS1/16SS0R0J		
R 626	(A,55,53)	RS1/16SS473J		R 702	(A,57,48)	RS1/16SS0R0J		
R 627	(B,51,27)	RS1/16SS473J		R 703	(A,55,50)	RS1/16SS0R0J		
R 628	(B,52,27)	RS1/16SS473J		R 704	(A,54,52)	RS1/16SS0R0J		
R 629	(B,48,27)	RS1/16SS472J		R 705	(A,24,47)	RS1/16SS0R0J		
R 630	(B,49,27)	RS1/16SS472J						
				R 706	(B,72,18)	RS1/16SS472J		
R 631	(A,50,27)	RS1/16SS471J		R 707	(B,70,24)	RS1/16SS472J		
R 632	(A,49,27)	RS1/16SS471J		R 729	(B,78,17)	RS1/16SS222J		
R 633	(B,49,52)	RS1/16SS473J		R 738	(B,80,17)	RS1/16SS222J		D
R 634	(B,48,52)	RS1/16SS473J		R 761	(A,118,119)	RS1/16SS223J		
R 635	(B,47,52)	RS1/16SS473J						
				R 762	(A,118,117)	RS1/16SS223J		
R 636	(A,48,57)	RS1/16SS473J		R 781	(A,29,114)	RS1/16SS390J		
R 638	(A,42,58)	RS1/16SS104J		R 782	(A,43,114)	RS1/16SS390J		
R 639	(B,43,32)	RS1/16SS103J		R 783	(A,27,114)	RS1/16SS390J		
R 640	(B,42,57)	RS1/16SS103J		R 784	(A,38,114)	RS1/16SS390J		
R 641	(B,42,29)	RS1/16SS104J						
				R 785	(A,33,114)	RS1/16SS390J		
R 642	(B,42,56)	RS1/16SS103J		R 786	(A,45,114)	RS1/16SS390J		
R 644	(A,40,58)	RS1/16SS471J		R 787	(A,30,114)	RS1/16SS223J		
R 647	(B,41,57)	RS1/16SS681J		R 788	(A,41,114)	RS1/16SS223J		
R 652	(A,46,58)	RS1/16SS221J		R 789	(A,25,114)	RS1/16SS223J		E
R 653	(B,38,52)	RS1/16SS182J						
				R 790	(A,39,114)	RS1/16SS223J		
R 654	(A,39,58)	RS1/16SS221J		R 791	(A,31,114)	RS1/16SS223J		
R 655	(B,37,52)	RS1/16SS182J		R 792	(A,46,114)	RS1/16SS223J		
R 656	(A,38,25)	RS1/10SR0R0J		R 793	(B,33,111)	RS1/16SS472J		
R 657	(A,38,58)	RS1/16SS221J		R 794	(B,39,111)	RS1/16SS472J		
R 658	(B,37,54)	RS1/10SR0R0J						
				R 795	(B,46,111)	RS1/16SS472J		
R 659	(A,35,27)	RS1/16SS473J		R 796	(B,41,111)	RS1/16SS472J		
R 660	(B,37,32)	RS1/16SS473J		R 797	(B,31,111)	RS1/16SS472J		
R 661	(B,35,55)	RS1/16SS473J		R 798	(B,25,111)	RS1/16SS472J		
R 662	(A,34,57)	RS1/16SS473J		R 811	(A,144,16)	RS1/16SS102J		F
R 663	(A,34,61)	RS1/16SS473J						
				R 812	(A,144,14)	RS1/16SS473J		
R 664	(A,29,27)	RS1/16SS104J		R 821	(A,149,14)	RS1/16SS473J		
R 665	(B,29,27)	RS1/16SS104J		R 822	(A,151,14)	RS1/16SS104J		

	1			2			3			4	
	<u>Circuit Symbol and No.</u>			<u>Part No.</u>			<u>Circuit Symbol and No.</u>			<u>Part No.</u>	
	R 823	(A,148,10)		RS1/16SS473J			R 909	(B,21,72)		RS1/16SS103J	
	R 824	(A,148,12)		RS1/16SS104J			R 910	(B,26,68)		RS1/10SR103J	
A	R 825	(A,145,14)		RS1/16SS122J			R 911	(B,22,77)		RS1/16SS103J	
	R 826	(A,151,15)		RS1/16SS152J			R 912	(B,22,78)		RS1/16SS103J	
	R 831	(A,141,113)		RS1/16SS681J			R 913	(B,25,79)		RS1/10SR103J	
	R 832	(A,140,113)		RS1/16SS681J			R 919	(A,18,30)		RS1/16SS680J	
	R 833	(A,142,113)		RS1/16SS681J			R 920	(A,18,31)		RS1/16SS680J	
	R 836	(B,129,100)		RS1/16SS0R0J			R 921	(A,18,32)		RS1/16SS680J	
	R 837	(B,117,101)		RS1/16SS0R0J			R 922	(A,18,33)		RS1/16SS680J	
	R 839	(B,124,116)		RS1/16SS101J			R 923	(B,44,51)		RS1/16SS0R0J	
	R 840	(B,122,101)		RS1/16SS101J			R 924	(B,42,51)		RS1/16SS0R0J	
	R 841	(B,131,109)		RS1/16SS0R0J			R 925	(B,46,51)		RS1/16SS0R0J	
B	R 842	(B,118,116)		RS1/16SS0R0J			R 926	(A,32,78)		RS1/10SR0R0J	
	R 843	(B,116,116)		RS1/16SS224J			R 930	(A,24,74)		RS1/16SS102J	
	R 844	(B,119,117)		RS1/16SS4702D			R 931	(A,20,73)		RS1/16SS102J	
	R 845	(B,113,105)		RS1/16SS152J			R 932	(A,26,73)		RS1/16SS0R0J	
	R 846	(B,114,106)		RS1/16SS3302D			R 934	(A,25,75)		RS1/10SR0R0J	
	R 847	(B,113,107)		RS1/16SS8201D			R 952	(B,166,93)		RS1/16SS103J	
	R 848	(B,115,104)		RS1/16SS752J			R 953	(B,157,103)		RS1/16SS101J	
	R 849	(A,129,103)	0.056 ohm	ACN7160			R 954	(B,155,104)		RS1/16SS101J	
	R 850	(B,120,104)		RS1/16SS0R0J			R 955	(B,163,92)		RS1/16SS103J	
	R 851	(B,121,117)		RS1/16SS394J			R 956	(B,162,92)		RS1/16SS103J	
C	R 852	(B,121,116)		RS1/16SS204J			R 957	(B,160,91)		RS1/16SS221J	
	R 855	(B,114,107)		RS1/16SS0R0J			R 958	(B,159,93)		RS1/16SS221J	
	R 856	(B,113,106)		RS1/16SS0R0J			R 960	(B,154,98)		RS1/16SS6801D	
	R 857	(A,141,108)		RS1/16SS681J			R 961	(B,165,92)		RS1/16SS101J	
	R 858	(A,143,108)		RS1/16SS681J			R 962	(B,166,103)		RS1/16SS103J	
	R 860	(B,115,101)		RS1/16SS224J			R 964	(B,155,94)		RS1/10SR0R0J	
	R 861	(B,118,102)		RS1/16SS4702D			R 965	(B,150,100)		RS1/10SR0R0J	
	R 862	(B,112,90)		RS1/16SS152J			R 1001	(A,164,54)		RS1/16SS330J	
	R 863	(B,113,91)		RS1/16SS3302D			R 1002	(A,166,55)		RS1/16SS330J	
	R 864	(B,111,93)		RS1/16SS8201D			R 1003	(A,159,55)		RS1/16SS330J	
D	R 865	(B,115,89)		RS1/16SS752J			R 1004	(A,156,55)		RS1/16SS330J	
	R 866	(A,142,108)		RS1/16SS681J			R 1005	(A,166,54)		RS1/16SS330J	
	R 867	(A,133,95)	0.056 ohm	ACN7160			R 1006	(A,164,53)		RS1/16SS330J	
	R 868	(B,119,89)		RS1/16SS0R0J			R 1007	(A,159,54)		RS1/16SS330J	
	R 869	(B,120,102)		RS1/16SS394J			R 1008	(A,157,54)		RS1/16SS330J	
	R 870	(B,120,101)		RS1/16SS204J			R 1009	(A,166,53)		RS1/16SS330J	
	R 872	(B,126,16)		RS1/16SS0R0J			R 1010	(A,164,52)		RS1/16SS330J	
	R 873	(B,113,92)		RS1/16SS0R0J			R 1011	(A,159,53)		RS1/16SS330J	
	R 874	(B,120,36)		RS1/16SS101J			R 1012	(A,157,71)		RS1/16SS105J	
	R 875	(B,117,36)		RS1/16SS101J			R 1013	(B,127,68)		RS1/10SR0R0J	
E	R 877	(B,113,36)		RS1/16SS0R0J			R 1014	(A,158,53)		RS1/16SS330J	
	R 879	(B,106,36)		RS1/16SS220J			R 1015	(B,128,60)		RS1/10SR0R0J	
	R 880	(B,104,36)		RS1/16SS101J			R 1016	(A,166,52)		RS1/16SS330J	
	R 881	(B,101,36)		RS1/16SS101J			R 1017	(A,166,51)		RS1/16SS330J	
	R 882	(B,126,14)		RS1/16SS0R0J			R 1018	(B,166,70)		RS1/16SS105J	
	R 883	(B,120,39)		RAB4C223J			R 1019	(B,139,66)		RS1/10SR0R0J	
	R 884	(B,115,39)		RAB4C223J			R 1021	(A,164,51)		RS1/16SS330J	
	R 885	(B,119,42)		RS1/16SS102J			R 1022	(A,157,69)		RS1/16SS102J	
	R 886	(B,124,36)		RS1/16SS681J			R 1023	(A,159,52)		RS1/16SS330J	
	R 887	(B,124,38)		RS1/16SS103J			R 1024	(B,163,69)		RS1/16SS331J	
F	R 889	(B,112,91)		RS1/16SS0R0J			R 1025	(A,158,69)		RS1/16SS220J	
	R 901	(A,22,74)		RS1/16SS103J			R 1026	(B,162,69)		RS1/16SS220J	
	R 902	(A,23,74)		RS1/16SS103J			R 1027	(A,158,52)		RS1/16SS330J	
	R 903	(B,22,66)		RS1/10SR681J			R 1028	(A,162,72)		RS1/10SR0R0J	
	R 904	(A,18,45)		RS1/16SS680J			R 1029	(B,162,72)		RS1/10SR0R0J	
	R 905	(A,18,46)		RS1/16SS680J			R 1030	(B,148,72)		RS1/16SS221J	
	R 907	(A,18,47)		RS1/16SS473J			R 1031	(B,147,71)		RS1/16SS221J	
	R 908	(B,22,69)		RS1/16SS103J			R 1034	(A,164,50)		RS1/16SS330J	

5		6		7		8		
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>		
R 1035	(A,145,72)	RS1/16SS101J		R 1108	(B,147,40)	RS1/16SS100J		
R 1036	(A,147,72)	RS1/16SS101J		R 1109	(B,148,39)	RS1/16SS100J		
R 1037	(A,146,72)	RS1/16SS101J		R 1110	(B,146,39)	RS1/16SS100J		A
R 1038	(A,164,49)	RS1/16SS330J		R 1111	(B,138,39)	RS1/16SS100J		
R 1039	(A,159,88)	RS1/16SS101J		R 1112	(B,149,40)	RS1/16SS100J		
R 1040	(A,161,88)	RS1/16SS101J		R 1113	(B,141,39)	RS1/16SS100J		
R 1041	(A,160,88)	RS1/16SS101J		R 1114	(B,151,71)	RS1/16SS331J		
R 1042	(A,159,51)	RS1/16SS330J		R 1115	(B,151,70)	RS1/16SS331J		
R 1043	(A,158,51)	RS1/16SS330J		R 1116	(B,152,60)	RS1/16SS121J		
R 1044	(B,146,70)	RS1/10SR0R0J		R 1117	(A,148,67)	RS1/16SS472J		
R 1045	(B,144,70)	RS1/10SR0R0J		R 1118	(A,147,68)	RS1/16SS472J		
R 1046	(A,136,68)	RS1/16SS5601D		R 1119	(A,150,70)	RS1/16SS473J		
R 1047	(A,134,68)	RS1/16SS5601D		R 1120	(A,151,72)	RS1/16SS473J		
R 1048	(A,130,66)	RS1/16SS681J		R 1121	(A,152,68)	RS1/16SS473J		B
R 1050	(A,121,60)	RS1/16SS103J		R 1122	(A,166,47)	RS1/16SS561J		
R 1051	(A,122,63)	RS1/16SS103J		R 1123	(B,158,65)	RS1/16SS471J		
R 1052	(A,121,63)	RS1/16SS103J		R 1124	(B,154,66)	RS1/16SS471J		
R 1053	(A,122,61)	RS1/16SS103J		R 1126	(B,156,74)	RS1/16SS471J		
R 1054	(A,121,59)	RS1/16SS103J		R 1127	(B,148,69)	RS1/16SS472J		
R 1055	(A,121,62)	RS1/16SS103J		R 1128	(B,148,17)	RS1/16SS103J		
R 1056	(A,121,58)	RS1/16SS103J		R 1129	(B,130,48)	RS1/16SS103J		
R 1057	(A,122,58)	RS1/16SS103J		R 1130	(B,132,48)	RS1/16SS103J		
R 1058	(A,122,59)	RS1/16SS103J		R 1132	(A,127,55)	RS1/16SS0R0J		
R 1059	(A,121,61)	RS1/16SS103J		R 1133	(A,125,55)	RS1/16SS0R0J		
R 1061	(A,129,58)	RS1/16SS152J		R 1134	(A,127,53)	RS1/16SS0R0J		C
R 1062	(A,122,60)	RS1/16SS103J		R 1135	(A,125,54)	RS1/16SS0R0J		
R 1063	(A,123,55)	RS1/16SS0R0J		R 1136	(A,127,54)	RS1/16SS0R0J		
R 1064	(A,166,50)	RS1/16SS330J		R 1137	(A,158,47)	RS1/16SS561J		
R 1065	(A,159,50)	RS1/16SS330J		R 1138	(A,164,45)	RS1/16SS561J		
R 1066	(A,158,50)	RS1/16SS330J		R 1139	(A,125,53)	RS1/16SS0R0J		
R 1068	(B,129,49)	RS1/16SS101J		R 1140	(A,150,68)	RS1/16SS471J		
R 1069	(B,132,49)	RS1/16SS101J		R 1141	(A,149,68)	RS1/16SS471J		
R 1070	(A,158,57)	RS1/16SS102J		R 1142	(A,155,47)	RS1/16SS101J		
R 1071	(A,131,48)	RS1/16SS101J		R 1145	(B,128,56)	RS1/16SS0R0J		
R 1072	(A,131,49)	RS1/16SS101J		R 1146	(B,130,56)	RS1/16SS0R0J		
R 1073	(B,130,49)	RS1/16SS101J		R 1147	(B,127,56)	RS1/16SS0R0J		D
R 1075	(A,131,47)	RS1/16SS101J		R 1148	(B,128,57)	RS1/16SS0R0J		
R 1077	(B,135,48)	RS1/16SS0R0J		R 1149	(B,131,56)	RS1/16SS0R0J		
R 1079	(B,139,51)	RS1/16SS82R0D		R 1150	(B,129,56)	RS1/16SS0R0J		
R 1080	(B,137,48)	RS1/16SS82R0D		R 1159	(A,158,64)	RS1/16SS331J		
R 1086	(A,159,49)	RS1/16SS330J		R 1160	(A,158,65)	RS1/16SS331J		
R 1087	(B,116,63)	RS1/16SS0R0J		R 1161	(A,156,64)	RS1/16SS331J		
R 1088	(B,118,59)	RS1/16SS0R0J		R 1162	(A,158,63)	RS1/16SS331J		
R 1089	(A,132,69)	RS1/16SS102J		R 1163	(A,158,62)	RS1/16SS331J		
R 1090	(A,131,69)	RS1/16SS102J		R 1164	(A,158,61)	RS1/16SS331J		
R 1093	(A,156,63)	RS1/16SS331J		R 1165	(A,156,59)	RS1/16SS331J		
R 1094	(A,156,62)	RS1/16SS331J		R 1166	(A,156,65)	RS1/16SS331J		E
R 1095	(A,158,49)	RS1/16SS330J		R 1167	(B,139,39)	RS1/16SS100J		
R 1096	(A,159,48)	RS1/16SS561J		R 1168	(B,142,38)	RS1/16SS100J		
R 1097	(A,122,62)	RS1/16SS0R0J		R 1169	(B,137,39)	RS1/16SS100J		
R 1098	(B,151,50)	RS1/16SS0R0J		R 1170	(B,139,38)	RS1/16SS100J		
R 1099	(A,145,41)	RS1/16SS100J		R 1171	(B,143,39)	RS1/16SS100J		
R 1100	(A,144,41)	RS1/16SS100J		R 1172	(B,141,38)	RS1/16SS100J		
R 1101	(B,145,39)	RS1/16SS100J		R 1173	(A,142,41)	RS1/16SS100J		
R 1102	(B,140,39)	RS1/16SS100J		R 1174	(A,143,41)	RS1/16SS100J		
R 1103	(A,143,39)	RS1/16SS100J		R 1175	(A,127,52)	RS1/16SS0R0J		
R 1104	(B,143,38)	RS1/16SS100J		R 1176	(B,153,64)	RS1/16SS471J		F
R 1105	(B,140,38)	RS1/16SS100J		R 1177	(A,131,54)	RS1/16SS103J		
R 1106	(A,158,48)	RS1/16SS330J		R 1178	(B,159,74)	RS1/16SS101J		
R 1107	(B,149,39)	RS1/16SS100J		R 1179	(A,164,46)	RS1/16SS561J		

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

R 1180 (A,166,46)
R 1181 (A,159,47)

RS1/16SS561J
RS1/16SS561J

R 1327 (B,90,83)
R 1328 (B,94,79)

RS1/16SS822J
RS1/16SS0R0J

A

R 1182 (A,166,44)
R 1183 (A,166,45)
R 1184 (A,164,44)
R 1185 (A,158,46)
R 1186 (A,164,43)

RS1/16SS561J
RS1/16SS561J
RS1/16SS561J
RS1/16SS561J
RS1/16SS561J

R 1330 (B,95,67)
R 1331 (B,90,63)
R 1332 (B,87,66)
R 1333 (B,93,65)
R 1334 (B,94,65)

RS1/16SS224J
RS1/16SS822J
RS1/10SR0R0J
RS1/16SS1101D
RS1/16SS2701D

■

R 1187 (A,158,45)
R 1188 (A,159,46)
R 1189 (A,158,44)
R 1190 (A,159,45)
R 1191 (A,131,62)

RS1/16SS561J
RS1/16SS561J
RS1/16SS561J
RS1/16SS561J
RS1/16SS330J

R 1335 (B,92,65)
R 1336 (B,93,63)
R 1337 (B,97,74)
R 1338 (B,97,67)
R 1339 (B,95,63)

RS1/16SS2702D
RS1/16SS511J
RS1/16SS101J
RS1/16SS101J
RS1/16SS0R0J

B

R 1192 (B,133,57)
R 1193 (B,135,58)
R 1194 (A,156,67)
R 1196 (A,158,60)
R 1197 (A,123,51)

RS1/16SS472J
RS1/16SS102J
RS1/16SS103J
RS1/16SS331J
RS1/16SS121J

R 1340 (B,96,79)
R 1341 (B,97,79)
R 1342 (B,97,76)
R 1343 (B,96,74)
R 1344 (B,96,76)

RS1/16SS204J
RS1/16SS394J
RS1/16SS101J
RS1/16SS103J
RS1/16SS103J

■

R 1198 (A,121,52)
R 1199 (A,123,49)
R 1200 (A,121,50)
R 1201 (B,128,26)
R 1202 (B,128,24)

RS1/16SS121J
RS1/16SS121J
RS1/16SS121J
RS1/16SS82R0D
RS1/16SS82R0D

R 1361 (A,80,60)
R 1362 (A,81,60)
R 1365 (B,83,32)
R 1366 (B,83,31)
R 1367 (B,84,37)

RS1/16SS0R0J
RS1/16SS102J
RS1/16SS102J
RS1/16SS102J
RS1/16SS0R0J

C

R 1203 (A,123,50)
R 1204 (B,155,26)
R 1205 (B,153,24)
R 1206 (A,121,51)
R 1207 (B,144,44)

RS1/16SS121J
RS1/16SS82R0D
RS1/16SS82R0D
RS1/16SS121J
RS1/16SS100J

R 1372 (A,124,16)
R 1383 (B,100,104)
R 1384 (B,95,98)
R 1388 (B,89,89)
R 1389 (B,90,89)

RS1/16SS102J
RS1/16SS102J
RS1/16SS102J
RS1/16SS102J
RS1/16SS102J

■

R 1208 (B,145,44)
R 1209 (B,145,29)
R 1210 (A,123,48)
R 1211 (A,121,49)
R 1212 (A,123,47)

RS1/16SS100J
RS1/16SS431J
RS1/16SS121J
RS1/16SS121J
RS1/16SS121J

R 1396 (A,124,72)
R 1397 (A,119,85)
R 1399 (B,113,48)
R 1400 (B,111,49)
R 1402 (A,106,44)

RS1/10SR0R0J
RS1/16SS102J
RS1/16SS102J
RS1/10SR681J
RS1/16SS564J

D

R 1213 (A,121,48)
R 1214 (A,121,46)
R 1215 (A,123,46)
R 1216 (A,121,47)
R 1217 (A,121,45)

RS1/16SS121J
RS1/16SS121J
RS1/16SS121J
RS1/16SS121J
RS1/16SS121J

R 1403 (A,109,44)
R 1404 (A,108,44)
R 1405 (A,103,54)
R 1406 (A,113,48)
R 1407 (A,111,47)

RS1/16SS123J
RS1/16SS224J
RS1/16SS5R6J
RS1/16SS6800D
RS1/16SS1302D

■

R 1218 (A,123,45)
R 1219 (A,121,43)
R 1220 (A,123,43)
R 1221 (A,121,44)
R 1222 (A,123,44)

RS1/16SS121J
RS1/16SS121J
RS1/16SS121J
RS1/16SS121J
RS1/16SS121J

R 1408 (A,111,45)
R 1409 (A,109,54)
R 1411 (A,104,47)
R 1412 (A,117,68)
R 1415 (A,113,49)

RS1/16SS6801D
RS1/16SS5R6J
RS1/16SS102J
RS1/16SS102J
RS1/16SS0R0J

E

R 1223 (A,125,40)
R 1225 (A,123,42)
R 1227 (A,144,70)
R 1228 (B,152,54)
R 1229 (A,152,67)

RS1/16SS221J
RS1/16SS121J
RS1/16SS473J
RS1/16SS680J
RS1/16SS221J

R 1416 (A,103,46)
R 1420 (A,101,46)
R 1421 (A,105,45)
R 1422 (B,82,90)
R 1423 (B,82,88)

RS1/16SS471J
RS1/16SS102J
RS1/16SS102J
RS1/16SS1003F
RS1/16SS1802D

■

R 1230 (A,148,69)
R 1241 (B,161,63)
R 1242 (B,163,63)
R 1243 (B,163,38)
R 1301 (A,38,71)

RS1/16SS221J
RS1/16SS103J
RS1/16SS103J
RS1/8SQ0R0J
RS1/16SS391J

R 1424 (B,74,93)
R 1425 (B,79,89)
R 1426 (B,79,86)
R 1427 (B,75,97)
R 1431 (A,104,15)

RS1/16SS103J
RS1/4SA471J
RS1/4SA471J
RS1/16SS911J
RS1/10SR121J

F

R 1302 (A,49,79)
R 1312 (A,24,33)
R 1321 (B,95,83)
R 1322 (B,93,83)
R 1323 (B,93,81)

RS1/16SS911J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS561J
RS1/16SS3302D

R 1432 (A,106,9)
R 1433 (A,98,17)
R 1434 (A,68,60)
R 1435 (A,67,60)
R 1436 (A,65,60)

RS1/16SS473J
RS1/16SS220J
RS1/16SS221J
RS1/16SS221J
RS1/16SS221J

R 1324 (B,94,81)
R 1325 (B,95,81)
R 1326 (B,87,80)

RS1/16SS4301D
RS1/16SS3601D
RS1/10SR0R0J

R 1437 (A,63,60)
R 1438 (A,63,58)
R 1439 (A,65,57)

RS1/16SS473J
RS1/16SS103J
RS1/16SS0R0J

1

2

3

4

1

Circuit Symbol and No.

2

Part No.

3

Circuit Symbol and No.

4

Part No.

C 193 (B,32,99) CKSRYB105K10
 C 194 (B,32,98) CKSRYB105K10
 C 195 (B,51,89) CKSQYB225K10

C 306 (B,48,82) CKSRYB105K10
 C 307 (B,48,85) CKSRYB105K10
 C 309 (B,46,86) CKSSYB104K16

A

C 196 (B,45,88) CKSRYB474K16
 C 197 (A,37,91) 10 uF DCH1201
 C 198 (B,41,88) CKSSYB104K10
 C 199 (A,39,93) 10 uF DCH1201
 C 200 (B,32,92) CKSSYB104K10

C 310 (B,33,74) CKSSYB104K16
 C 311 (B,32,83) CKSSYB104K16
 C 312 (B,32,82) CKSSYB104K16
 C 401 (B,168,22) CKSSYB104K10
 C 402 (B,166,22) CKSSYB104K10

C 202 (B,39,105) CKSRYB104K16
 C 203 (A,42,106) 10 uF CCG1236
 C 204 (A,42,108) 10 uF CCG1236
 C 205 (B,50,100) CCSQCH223J50
 C 206 (B,50,98) CCSQCH223J50

C 421 (A,153,76) CKSQYB475K6R3
 C 422 (A,153,79) CKSQYB475K6R3
 C 423 (A,148,72) CKSSYB104K10
 C 424 (A,149,81) 10 uF DCH1201
 C 425 (A,145,85) CKSQYB475K6R3

B

C 210 (B,28,93) CKSRYB105K10
 C 212 (B,53,98) CKSRYB105K10
 C 213 (B,32,96) CKSRYB105K10
 C 233 (B,47,59) CCSSCH101J50
 C 234 (B,37,61) CKSSYB105K6R3

C 426 (A,153,81) CKSQYB475K6R3
 C 427 (A,158,88) CKSSYB104K10
 C 428 (A,158,78) 10 uF DCH1201
 C 472 (A,125,85) CKSSYB104K10
 C 473 (B,130,91) CKSSYB224K6R3

C 237 (B,39,61) CKSRYB105K10
 C 238 (B,52,60) CCSSCH101J50
 C 239 (B,53,62) CKSRYB104K16
 C 243 (A,59,69) CKSRYB104K16
 C 246 (A,55,64) CCSSCH101J50

C 474 (B,130,92) CKSSYB224K6R3
 C 475 (B,131,91) CKSSYB224K6R3
 C 476 (B,130,88) CKSRYB105K16
 C 477 (B,129,93) CKSRYB105K16
 C 478 (B,132,94) CKSSYB102K50

C

C 247 (A,56,59) CKSQYB225K10
 C 261 (B,39,69) CKSRYB105K10
 C 262 (B,48,70) CKSRYB105K10
 C 263 (B,48,79) CKSRYB105K10
 C 264 (B,48,84) CKSRYB105K10

C 479 (B,131,96) CKSRYB105K16
 C 480 (B,135,83) CKSSYB102K50
 C 481 (B,132,85) CKSRYB105K16
 C 482 (B,132,87) CKSSYB102K50
 C 483 (B,131,90) CKSSYB103K25

C 265 (B,32,78) CKSSYB104K16
 C 266 (B,33,75) CKSSYB104K16
 C 267 (B,33,76) CKSSYB104K16
 C 268 (B,33,77) CKSSYB104K16
 C 269 (B,32,79) CKSSYB104K16

C 484 (A,127,90) 10 uF DCH1201
 C 485 (B,136,99) CKSSYB104K10
 C 486 (A,134,89) 10 uF DCH1201
 C 487 (B,137,99) CKSSYB104K10
 C 488 (B,135,79) 10 uF DCH1201

D

C 270 (B,32,80) CKSSYB104K16
 C 271 (B,32,81) CKSSYB104K16
 C 272 (B,34,82) CKSSYB104K16
 C 273 (B,38,84) CKSSYB104K16
 C 274 (B,33,85) 10 uF DCH1201

C 489 (B,137,82) CKSRYB105K16
 C 490 (A,134,85) CKSSYB104K10
 C 491 (B,138,82) CKSSYB104K10
 C 492 (B,139,99) CKSSYB104K10
 C 493 (B,140,82) CKSSYB104K10

C 275 (B,40,84) CKSSYB104K16
 C 276 (B,37,84) CKSSYB104K16
 C 277 (B,38,86) 10 uF DCH1201
 C 279 (B,43,84) CKSSYB104K16
 C 280 (B,38,69) CKSRYB105K10

C 494 (B,142,99) CKSSYB104K10
 C 495 (B,143,99) CKSSYB104K10
 C 496 (B,144,78) CCSSCH4R0C50
 C 497 (B,141,81) CCSSCH5R0C50
 C 498 (B,148,88) CKSSYB104K10

E

C 281 (B,42,85) 10 uF DCH1201
 C 282 (B,41,70) CKSRYB105K10
 C 283 (B,43,70) CKSRYB105K10
 C 284 (B,44,70) CKSRYB105K10
 C 285 (B,46,70) CKSRYB105K10

C 499 (B,148,89) CKSSYB104K10
 C 500 (B,148,85) CKSSYB103K16
 C 501 (A,134,87) 10 uF DCH1201
 C 502 (B,131,87) CKSSYB103K16
 C 503 (B,131,94) CKSSYB103K16

C 286 (B,38,71) CKSSYB104K16
 C 287 (A,42,78) CKSRYB105K10
 C 288 (B,48,69) CKSRYB105K10
 C 289 (B,48,72) CKSRYB105K10
 C 290 (B,48,73) CKSRYB105K10

C 504 (B,135,82) CKSSYB103K16
 C 511 (A,134,84) CKSSYB103K16
 C 512 (A,130,92) CKSRYB105K10
 C 513 (A,131,87) CKSRYB105K10
 C 514 (A,137,91) CKSSYB104K10

F

C 295 (A,45,88) CKSSYB271K50
 C 299 (B,48,75) CKSRYB105K10
 C 300 (B,48,76) CKSRYB105K10
 C 301 (B,48,78) CKSRYB105K10
 C 302 (B,48,81) CKSRYB105K10

C 521 (B,107,41) CKSSYB104K10
 C 522 (B,103,45) CKSSYB104K10
 C 523 (B,101,48) CKSSYB104K10
 C 524 (A,103,41) CKSSYB104K10
 C 526 (B,103,40) CKSSYB104K10

C 304 (B,33,73) CKSSYB104K16
 C 305 (B,33,72) CKSSYB104K16

C 530 (B,90,44) 10 uF DCH1201
 C 531 (B,97,40) CKSSYB104K10

1

2

3

4

5		6		7		8		
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>		
C 532	(B,97,44)	CKSSYB104K10		C 848	(B,116,101)	CKSSYB102K50		
C 533	(A,99,41)	CKSSYB104K10		C 853	(A,153,119)	CKSRYB104K50		
C 571	(A,20,16) 0.1 uF	CCG1321		C 854	(A,153,114)	CKSRYB104K50		
C 572	(A,18,23) 0.1 uF	CCG1321		C 855	(B,117,90)	CKSSYB104K16		A
C 576	(A,47,24)	CCSRCH100D50		C 857	(A,144,108)	CKSSYB104K16		
C 591	(A,82,41)	CKSRYB105K10		C 858	(B,130,99) 22 uF	DCH1256		
C 592	(A,85,41)	CKSRYB105K10		C 859	(A,135,108)	XCEVW101M16		
C 593	(A,89,41)	CKSRYB105K10		C 860	(A,139,113)	CKSSYB104K16		
C 594	(A,93,41)	CKSRYB105K10		C 861	(B,114,98)	CKSSYB472K50		
C 595	(A,77,53)	CKSSYB105K6R3		C 862	(B,119,102)	CKSSYB104K16		
C 596	(A,91,41)	CKSRYB105K10		C 863	(B,113,90)	CCSSCH471J50		
C 597	(A,87,41)	CKSRYB105K10		C 864	(B,116,89)	CKSSYB222K50		
C 598	(A,84,41)	CKSRYB105K10		C 865	(B,115,90)	CCSSCH270J50		
C 599	(A,97,44)	CKSRYB105K10		C 866	(A,116,98)	XCEVW470M16		B
C 601	(A,33,59)	CCSSCH101J50		C 871	(B,118,36)	CCSSCH100D50		
C 602	(A,31,59)	CCSSCH101J50		C 872	(B,116,36)	CCSSCH100D50		
C 603	(A,32,59)	CCSSCH101J50		C 873	(B,107,36)	CCSSCH100D50		
C 604	(B,57,39)	CKSRYB105K10		C 874	(B,103,36)	CCSSCH100D50		
C 605	(A,55,40)	CCSSCH180J50		C 875	(B,102,36)	CCSSCH100D50		
C 606	(A,54,37)	CCSSCH180J50		C 876	(B,126,18)	CKSSYB104K10		
C 607	(B,51,50)	CKSSYB104K10		C 877	(B,123,36)	CKSSYB104K10		
C 608	(B,53,29)	CKSSYB104K10		C 878	(B,126,13)	CKSSYB104K10		
C 609	(B,55,37)	CKSSYB104K10		C 879	(B,117,42)	CKSSYB104K10		
C 610	(B,49,36)	CKSQYB475K6R3		C 880	(B,127,9)	CKSRYB104K16		
C 611	(A,52,27)	CKSSYB104K10		C 901	(B,21,70)	CKSQYB225K10		C
C 613	(A,39,27)	CKSSYB104K10		C 902	(B,20,73)	CKSQYB225K10		
C 614	(B,39,55)	CKSSYB104K10		C 903	(B,26,69)	CKSSYB681K50		
C 615	(B,30,36)	CKSSYB104K10		C 904	(B,19,76)	CKSQYB225K10		
C 619	(B,83,22)	CKSSYB104K10		C 905	(B,21,80)	CKSQYB225K10		
C 626	(A,43,25)	CKSSYB221K50		C 906	(B,25,78)	CKSSYB681K50		
C 702	(A,72,25)	CKSQYB475K6R3		C 907	(B,28,74)	CKSRYB104K16		
C 703	(A,70,25)	CKSQYB475K6R3		C 909	(A,17,40) 10 uF	DCH1201		
C 704	(A,93,16)	CKSRYB105K10		C 910	(A,18,51) 10 uF	DCH1201		
C 705	(B,53,27)	CKSSYB222K50		C 912	(A,18,81)	CKSSYB104K10		
C 707	(A,68,24)	CCSSCH220J50		C 913	(A,22,80)	XCEVW101M16		
C 711	(A,84,24)	CKSRYB105K10		C 918	(B,18,84)	CCSSCK2R0C50		D
C 761	(A,141,118)	CKSRYB104K50		C 919	(B,21,60)	CCSSCH220J50		
C 781	(A,29,112) 4.7 uF	CCG1201		C 951	(B,169,102) 10 uF	DCH1201		
C 782	(A,43,112) 4.7 uF	CCG1201		C 952	(B,155,98)	CKSSYB104K10		
C 783	(A,27,112) 4.7 uF	CCG1201		C 953	(B,163,104)	CKSSYB104K10		
C 784	(A,38,112) 4.7 uF	CCG1201		C 954	(B,161,104)	CKSSYB104K10		
C 785	(A,33,112) 4.7 uF	CCG1201		C 955	(B,167,98)	CKSSYB103K16		
C 786	(A,45,112) 4.7 uF	CCG1201		C 956	(B,155,96)	CKSSYB103K16		
C 788	(A,22,113)	CKSSYB102K50		C 957	(B,153,96) 10 uF	DCH1201		
C 831	(B,122,115)	CKSSYB104K16		C 958	(B,154,96)	CKSSYB103K16		
C 832	(B,125,103) 10 uF	CCG1236		C 959	(B,160,92)	CKSSYB103K16		
C 833	(B,114,109)	CKSRYB105K10		C 960	(B,155,101) 10 uF	DCH1201		E
C 834	(B,117,116)	CKSSYB102K50		C 961	(B,167,94)	CKSSYB102K50		
C 835	(B,114,113)	CKSSYB472K50		C 1002	(A,157,73)	CCSSCH100D50		
C 836	(B,120,117)	CKSSYB104K16		C 1003	(B,168,68)	CCSSCH120J50		
C 837	(B,114,105)	CCSSCH471J50		C 1004	(B,130,68) 4.7 uF	CCG1201		
C 838	(B,116,104)	CKSSYB222K50		C 1005	(B,128,65) 4.7 uF	CCG1201		
C 839	(B,116,105)	CCSSCH270J50		C 1006	(B,131,59) 4.7 uF	CCG1201		
C 840	(A,116,108)	XCEVW470M16		C 1007	(B,131,60) 4.7 uF	CCG1201		
C 841	(B,118,105)	CKSSYB104K16		C 1008	(B,132,64) 4.7 uF	CCG1201		
C 843	(B,129,104) 22 uF	DCH1256		C 1009	(B,136,66)	CKSSYB104K10		
C 844	(B,122,100)	CKSSYB104K16		C 1010	(B,136,64)	CKSSYB104K10		
C 845	(B,122,89) 10 uF	CCG1236		C 1011	(B,135,60)	CKSSYB104K10		F
C 846	(A,135,100)	XCEVW101M16		C 1012	(B,140,62)	CKSSYB104K10		
C 847	(B,113,94)	CKSRYB105K10		C 1013	(B,139,62)	CKSSYB104K10		

1

Circuit Symbol and No.

C 1014 (B,152,58)
C 1015 (A,155,69)
C 1016 (B,163,67)

2

Part No.

CCSSCH180J50
CCSSCH100D50
CCSSCH6R0D50

3

Circuit Symbol and No.

C 1079 (B,144,51)
C 1080 (B,147,54)
C 1081 (B,145,51)

4

Part No.

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

A

C 1017 (B,133,68)
C 1018 (B,135,64)
C 1019 (B,134,59)
C 1020 (B,133,61)
C 1021 (B,134,63)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

C 1082 (B,147,53)
C 1083 (B,138,53)
C 1084 (B,145,59)
C 1085 (B,138,54)
C 1087 (B,144,59)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

C 1026 (A,161,73)
C 1027 (B,163,72)
C 1028 (B,147,66)
C 1029 (B,147,67) 4.7 uF
C 1030 (B,143,67) 4.7 uF

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CCG1201
CCG1201

C 1088 (B,141,59)
C 1089 (B,138,56)
C 1090 (B,138,55)
C 1093 (B,145,61) 4.7 uF
C 1094 (B,161,72)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CCG1201
CKSSYB104K10

B

C 1031 (B,143,66)
C 1032 (B,141,62)
C 1033 (B,142,62)
C 1034 (A,129,67)
C 1035 (A,125,65)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CCSSCH120J50
CCSSCH8R0D50

C 1095 (B,138,51)
C 1096 (B,138,48)
C 1097 (B,136,48)
C 1098 (B,145,48)
C 1099 (B,141,46) 10 uF

CKSSYB104K10
CKSSYB104K10
CKSSYB105K6R3
CKSSYB105K6R3
DCH1201

C 1036 (B,147,62)
C 1037 (B,148,62)
C 1038 (B,149,62)
C 1039 (B,138,60)
C 1040 (B,136,59)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

C 1105 (B,120,49) 10 uF
C 1108 (A,129,41)
C 1201 (B,129,26)
C 1202 (B,129,24)
C 1203 (B,128,33)

DCH1201
CCSSCH330J50
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

C

C 1041 (A,129,60)
C 1042 (B,150,59)
C 1043 (B,150,58)
C 1044 (B,150,57)
C 1045 (A,125,57)

CCSSCH100D50
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CCSSCH9R0D50

C 1204 (B,128,31)
C 1205 (B,131,31)
C 1206 (B,128,30)
C 1207 (B,128,28)
C 1208 (B,131,28)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

C 1046 (B,150,56)
C 1047 (B,136,56)
C 1048 (B,150,55)
C 1049 (B,136,55)
C 1050 (B,136,54)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

C 1209 (A,126,26)
C 1210 (A,128,19)
C 1211 (B,135,33)
C 1212 (B,135,31)
C 1213 (B,133,31)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

D

C 1051 (B,136,53)
C 1052 (B,136,52)
C 1053 (B,150,52)
C 1054 (B,136,51)
C 1055 (B,150,51)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

C 1214 (B,135,30)
C 1215 (B,137,29)
C 1216 (B,133,28)
C 1217 (A,137,26)
C 1218 (A,137,23)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

C 1056 (B,136,50)
C 1057 (B,150,50)
C 1058 (B,126,48) 4.7 uF
C 1059 (B,150,46)
C 1060 (B,148,48)

CKSSYB104K10
CKSSYB104K10
CCG1201
CKSSYB104K10
CKSSYB104K10

C 1219 (B,154,26)
C 1220 (B,154,24)
C 1221 (B,150,33)
C 1222 (B,150,31)
C 1223 (B,153,31)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

E

C 1061 (B,147,48)
C 1062 (B,144,48)
C 1063 (B,143,48)
C 1064 (B,142,48)
C 1065 (B,141,48)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

C 1224 (B,150,30)
C 1225 (B,151,28)
C 1226 (B,152,27)
C 1227 (A,148,25)
C 1228 (A,150,18)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

C 1066 (B,140,48)
C 1067 (B,139,48)
C 1068 (B,134,46)
C 1069 (B,147,50)
C 1070 (B,146,48)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

C 1229 (B,157,33)
C 1230 (B,157,31)
C 1231 (B,155,31)
C 1232 (B,157,30)
C 1233 (B,157,28)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

F

C 1071 (B,147,57)
C 1072 (B,140,59)
C 1073 (B,138,57)
C 1074 (B,140,51)
C 1075 (B,147,56)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

C 1234 (B,156,28)
C 1235 (A,159,26)
C 1236 (A,159,23)
C 1237 (B,130,24)
C 1238 (B,155,24)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB105K6R3
CKSSYB105K6R3

C 1076 (B,141,51)
C 1078 (B,147,55)

CKSSYB104K10
CKSSYB104K10

C 1239 (B,131,23) 10 uF
C 1240 (B,157,25) 10 uF

DCH1201
DCH1201

1

2

3

4

5	6	7	8	
<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>	
C 1241 (B,161,38)	CKSSYB104K10	C 1403 (A,108,43)	CKSSYB392K50	A
C 1301 (A,38,64)	CKSSYB103K16	C 1404 (A,107,44)	CKSSYB104K10	
C 1302 (A,54,76)	CKSSYB104K16	C 1405 (A,117,54) 10 uF	DCH1201	
C 1303 (A,22,69)	XCEVW470M16	C 1406 (A,117,56) 10 uF	DCH1201	
C 1304 (A,31,65) 0.1 uF	CCG1321	C 1407 (A,102,51) 10 uF	DCH1201	
C 1306 (A,45,68)	XCEVW331M16	C 1408 (A,105,54)	CKSRYB681K50	
C 1307 (A,119,66)	CKSRYB102K50	C 1409 (A,111,48)	CCSSCH221J50	
C 1311 (A,168,83) 0.1 uF	CCG1321	C 1410 (A,117,53) 10 uF	DCH1201	
C 1312 (A,168,93)	XCEVW101M16	C 1411 (A,112,54)	CKSRYB103K50	B
C 1313 (A,169,78)	CKSYB105K35	C 1412 (A,109,74) 10 uF	DCH1201	
C 1314 (A,165,77)	CKSYB475K16	C 1414 (A,119,71) 10 uF	DCH1201	
C 1321 (B,106,73)	CKSSYB102K50	C 1415 (A,121,71) 10 uF	DCH1201	
C 1322 (A,97,77)	CKSSYB102K50	C 1416 (A,112,51) 10 uF	DCH1201	
C 1323 (A,98,77)	CKSSYB104K16	C 1417 (A,102,49) 10 uF	DCH1201	
C 1324 (A,99,77) 10 uF	DCH1201	C 1421 (B,79,101)	CKSSYB104K16	
C 1325 (A,102,77) 10 uF	DCH1201	C 1431 (A,100,15)	CKSSYB102K50	
C 1326 (A,104,76) 47 uF	CCG1233	C 1432 (A,98,9)	XCEVW101M16	C
C 1327 (A,82,76) 10 uF	CCG1236	C 1433 (A,105,8)	CKSRYB105K10	
C 1328 (A,79,76) 10 uF	CCG1236	C 1434 (A,101,17)	CKSSYB104K10	
C 1329 (B,91,82)	CCSSCH561J50	C 1435 (A,111,27)	CKSSYB103K16	
C 1330 (B,93,79)	CKSSYB104K10	C 1436 (A,78,65)	XCEVW100M16	D
C 1331 (B,90,82)	CKSSYB822K16	C 1437 (A,75,60)	CKSSYB103K16	
C 1332 (B,90,79)	CCSSCH8R0D50	C 1441 (B,69,84)	CKSSYB104K16	
C 1333 (B,84,73)	CKSYB105K35	C 1444 (B,68,67)	CKSSYB103K16	
C 1334 (B,88,80)	CKSSYB104K16	C 1445 (B,68,76) 4.7 uF	CCG1222	E
C 1335 (B,88,67)	CKSSYB104K16	C 1446 (B,68,69)	CKSRYB104K16	
C 1336 (B,90,67)	CCSSCH8R0D50	C 1447 (B,65,65)	CKSSYB104K16	
C 1337 (B,96,67)	CKSSYB103K16	C 1448 (B,64,64) 4.7 uF	CCG1222	
C 1338 (B,89,65)	CKSSYB103K16	C 1449 (B,70,69)	CCSSCH271J50	F
C 1339 (B,93,66)	CKSRYB105K10	C 1450 (B,62,65)	CKSSYB104K16	
C 1340 (B,91,65)	CCSSCH471J50	C 1463 (A,25,91)	XCEVW221M10	
C 1341 (A,66,82)	CKSSYB102K50	C 1464 (A,30,81)	CKSQYB225K10	
C 1342 (A,68,82) 10 uF	CCG1236	C 1465 (A,31,84)	CKSRYB105K10	
C 1343 (A,79,70) 10 uF	CCG1236	C 1471 (A,22,53) 10 uF	DCH1201	
C 1344 (A,59,83) 3 300 uF/16 V	CCH2027	C 1472 (B,20,48) 2.2 uF	CCG1218	
C 1345 (A,82,70) 10 uF	CCG1236	C 1473 (A,23,62) 10 uF	DCH1201	
C 1347 (A,104,69) 47 uF	CCG1233	C 1474 (B,21,42)	CKSRYB105K10	A
C 1348 (A,99,69) 10 uF	DCH1165	C 1475 (B,24,42) 2.2 uF	CCG1218	
C 1349 (A,102,69) 10 uF	DCH1165	C 1477 (B,27,47)	CKSRYB105K10	
C 1350 (A,98,69)	CKSSYB104K16	C 1601 (B,150,75)	CKSSYB103K16	
C 1351 (A,97,69)	CKSSYB102K50	C 1602 (B,149,74)	CKSRYB105K10	B
C 1352 (A,96,69)	CCSSCH101J50	C 1603 (B,156,85)	CKSSYB105K6R3	
C 1361 (A,81,58)	CKSRYB105K10	C 1604 (B,153,85)	CKSRYB103K50	
C 1362 (A,91,58)	CKSRYB105K10	C 1606 (A,45,95)	CKSRYB104K16	
C 1363 (A,93,59) 10 uF	DCH1201	C 1607 (A,41,98)	CKSRYB104K16	C
C 1365 (A,95,21)	CKSRYB104K16	C 1608 (A,49,101)	CKSRYB104K16	
C 1366 (A,90,23)	CEAT471M16	C 1611 (A,53,61)	CKSQYB225K10	
C 1371 (A,117,18)	CKSQYB475K6R3	C 1612 (A,51,61)	CKSQYB225K10	
C 1372 (A,121,18)	CKSQYB475K6R3	C 1618 (A,50,62)	CKSQYB225K10	D
C 1381 (B,103,92)	CKSQYB475K6R3	C 1619 (A,56,73)	CKSQYB225K10	
C 1382 (B,94,100)	CKSQYB475K6R3	C 1620 (B,23,60)	CKSRYB105K10	
C 1385 (B,97,101)	CKSRYB105K10	C 2001 (B,22,22)	CKSRYB104K50	
C 1386 (B,97,103)	CKSRYB105K10	C 2011 (B,70,31)	CKSRYB104K50	E
C 1391 (A,117,90)	CKSQYB475K6R3	C 2012 (B,69,31)	CCSSCH101J50	
C 1392 (A,115,79)	CKSQYB475K6R3	C 2031 (B,52,35) 4.7 uF	CCG1201	
C 1393 (A,115,81) 10 uF	DCH1201	C 2032 (B,57,33) 4.7 uF	CCG1201	
C 1396 (A,127,71) 10 uF	DCH1201	C 2033 (B,48,35)	CCSSCH101J50	F
C 1397 (A,127,73) 10 uF	DCH1201	C 2041 (A,162,25)	CKSRYB104K50	
C 1401 (A,112,53) 10 uF	DCH1201	C 2042 (A,166,26)	CKSRYB104K50	
C 1402 (A,102,52) 10 uF	DCH1201	C 2093 (A,53,46)	CKSRYB104K16	

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

C 2101 (B,121,49) 4.7 uF

CCG1201

IC 831 (B,119,110) IC

AN33014UA

C 2102 (B,119,51)

CKSRYB105K10

IC 832 (B,118,95) IC

AN33014UA

C 2103 (A,119,45)

XCEVW220M16

IC 901 (B,25,74) IC

NJM4565V

C 2104 (A,110,41)

CKSRYB105K10

IC 951 (B,161,98) IC

AK8814VQ

C 2113 (B,126,26)

CCSSCH101J50

IC 1002 (A,159,72) Logic IC

TC7SHU04FUS1

C 2114 (B,129,25)

CCSSCH101J50

IC 1003 (B,166,72) Logic IC

TC7SHU04FUS1

C 2126 (A,129,64) 10 uF

DCH1201

IC 1004 (A,143,55) IC

R8A77240D500BG1

C 2127 (A,134,64) 10 uF

DCH1201

IC 1006 (B,158,69) Logic IC

TC74VHC125FK

C 2129 (A,158,59)

CKSRYB105K10

IC 1201 (A,132,27) RAM IC

H5PS5162GFR-S5C

C 2134 (A,166,48)

XCEVW221M4

IC 1202 (A,154,27) RAM IC

H5PS5162GFR-S5C

C 2135 (A,166,41)

XCEVW221M4

IC 1241 (B,162,50) Flash ROM Unit(Service) (B,C,E,F,G) YXX5108
(B,162,50) Flash ROM Unit(Service) (D) YXX5109

C 2139 (A,141,54) 10 uF

DCH1201

IC 1301 (A,35,65) IC

S-812C33AUA-C2N

C 2141 (A,136,47)

CKSSYB104K10

IC 1311 (A,165,80) IC

NJM2388F84

C 2144 (B,147,55)

CKSSYB104K10

IC 1321 (B,90,73) IC

AN33012UA

C 2145 (A,134,48) 10 uF

DCH1201

C 2169 (A,105,27)

CKSQYB225K16

IC 1361 (A,86,59) IC

S-1142B50I-E6

C 2170 (A,105,29)

CKSQYB225K16

IC 1371 (A,120,11) IC

NJM2886DL3-33

C 2171 (A,105,31)

CKSQYB225K16

IC 1381 (B,97,94) IC

S-1172B33-E6

C 2172 (A,105,33)

CKSQYB225K16

IC 1383 (B,100,102) IC

NJM2878F3-15

C 2173 (A,108,34)

CKSQYB225K16

IC 1391 (A,116,86) IC

S-1172B33-E6

C 2202 (B,143,35)

CKSRYB104K25

IC 1401 (A,107,49) IC

AL2010

Mother Unit(Service) (B,C,D,E,F,G)**Consists of****Tuner Amp PCB****IF PCB****Tuner PCB****ABD (B,C,D,E,F,G)****Unit Number: YXX5118(B)****Unit Number: YXX5119(C)****Unit Number: YXX5121(D)****Unit Number: YXX5122(E)****Unit Number: YXX5123(F)****Unit Number: YXX5124(G)****Unit Name : Mother Unit(Service)****(B,C,D,E,F,G)****MISCELLANEOUS**

IC 101 (A,97,121) IC

PA2030A

IC 181 (B,40,96) IC

PML020A

IC 231 (B,48,63) IC

NJM4565V

IC 232 (A,59,64) IC

NJM4565V

IC 261 (B,40,78) IC

AK4223VQ

IC 401 (B,167,33) IC

337S3959

IC 421 (A,147,76) D/A Converter

PCM1753DBQ

IC 422 (A,158,83) D/A Converter

PCM1753DBQ

IC 471 (B,139,91) LSI

ML86V7675TBZ03A

IC 472 (A,134,91) IC

BH7673G

IC 521 (A,96,41) IC

BH7673G

IC 522 (B,100,41) IC

BH7673G

IC 523 (B,94,41) IC

BH7673G

IC 524 (B,94,44) IC

BH7673G

IC 601 (A,39,42) IC

PEQ136A8

IC 602 (B,58,35) RESET IC

S-80829CNMC-B80

IC 771 (B,147,107)L-MOS And Gate(C,D,E,F,G) TC7SET08FUS1

IC 2101 (B,111,49) IC

NJM2856DL3-18

IC 2102 (A,112,49) IC

NJM2886DL3-33

IC 2122 (A,141,48) IC

WM8761BGED

IC 6001 (A,55,27) IC

TDA7706

Q 101 (A,110,110) Chip Transistor

RN4982

Q 131 (A,97,102) Transistor

LTA024EEB

Q 132 (A,102,94) Transistor

LTA024EEB

Q 133 (A,101,101) Transistor

LSCR523UB

Q 134 (A,97,104) Chip Transistor

RN4983

Q 135 (A,102,108) Chip Transistor

RN1903

Q 151 (B,57,94) Chip Transistor

HN1A01FU

Q 152 (B,71,124) Chip Transistor

HN1C01FU

Q 153 (B,75,124) Transistor

LSCR523UB

Q 154 (B,66,119) Transistor

LTC014EEB

Q 155 (B,68,123) Transistor

LTC014EEB

Q 231 (B,36,64) Transistor

LSCR523UB

Q 401 (B,163,32) Transistor

LSAR523UB

Q 421 (B,120,57) Chip Transistor

RN4982

Q 422 (B,119,55) Chip Transistor

HN1C03FU

Q 423 (B,119,63) Chip Transistor

RN4982

Q 424 (B,119,66) Chip Transistor

HN1C03FU

Q 471 (A,129,85) Transistor

LSAR523UB

Q 521 (B,97,48) Transistor

LSCR523UB

Q 522 (B,100,46) Transistor

LSCR523UB

Q 523 (B,107,42) Transistor

LSCR523UB

Q 524 (A,103,39) Transistor

LSCR523UB

Q 571 (A,25,12) Chip Transistor

RN4982

Q 572 (A,28,15) Chip Transistor

HN1C03FU

Q 591 (A,48,90) Transistor

UMF23N

Q 601 (A,60,48) Transistor

LSCR523UB

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
Q 602	(B,83,19) Transistor	LSCR523UB		D 718	(B,78,20) Diode	DZ2S068C	
Q 771	(B,148,109) Transistor(C,D,E,F,G)	LSAR523UB		D 719	(B,77,20) Diode	DZ2S068C	
Q 781	(B,28,111) Chip Transistor	HN1C03FU		D 720	(B,76,20) Diode	DZ2S068C	
Q 782	(B,36,111) Chip Transistor	HN1C03FU		D 721	(B,75,20) Diode	DZ2S068C	A
Q 783	(B,44,111) Chip Transistor	HN1C03FU		D 722	(B,81,20) Diode	DZ2S068C	
Q 821	(A,150,11) Transistor	UMF23N		D 723	(B,73,20) Diode	DZ2S068C	
Q 822	(A,145,12) Transistor	LSAR523UB		D 724	(B,72,20) Diode	DZ2S068C	
Q 871	(B,124,40) Chip Transistor	2SB1689		D 725	(B,70,20) Diode	DZ2S068C	
Q 1301	(A,33,71) Transistor	2SB1184F5		D 726	(B,71,25) Diode	DZ2S068C	
Q 1302	(A,49,76) Transistor	2SD1664		D 727	(B,68,25) Diode	DZ2S068C	
Q 1321	(A,89,80) FET	SFT1342		D 728	(B,68,20) Diode	DZ2S068C	
Q 1322	(A,89,66) FET	SFT1342		D 729	(B,67,20) Diode	DZ2S068C	
Q 1361	(B,83,29) Chip Transistor	2SB1689		D 730	(B,66,25) Diode	DZ2S068C	
Q 1362	(B,84,35) Transistor	LTC043ZEB		D 731	(B,77,25) Diode	DZ2S068C	B
Q 1381	(B,87,89) Transistor	LSAR523UB		D 732	(B,51,21) Diode	DZ2S068C	
Q 1382	(B,93,89) Transistor	LTC043ZEB		D 733	(B,54,25) Diode	DZ2S068C	
Q 1393	(B,112,45) Transistor	2SA1577		D 761	(A,139,119) Diode	DZ2S068C	
Q 1400	(B,109,47) Transistor	LTC043ZEB		D 762	(A,116,116) Diode	DZ2S068C	
Q 1401	(A,103,44) Transistor	LSCR523UB		D 763	(A,116,120) Diode	DZ2S068C	
Q 1431	(A,112,11) Transistor	2SD2118		D 765	(A,116,118) Diode	DZ2S068C	
Q 1432	(A,97,15) Transistor	LTC014EEB		D 811	(A,143,14) Diode	DZ2S068C	
Q 1433	(A,65,59) Transistor	KTX213U		D 812	(A,143,11) Diode	DZ2S068C	
Q 1434	(A,71,59) Transistor	LTC014EEB		D 821	(A,148,16) Diode	RKZ3.9KG(B2)	
Q 1435	(A,68,64) Transistor	2SD1760F5		D 831	(B,125,108) Diode	DB2X41400	C
Q 1441	(B,70,82) Transistor	LSCR523UB		D 832	(A,164,105) Diode	EZAEG2A50AX	
Q 1442	(B,66,72) FET	RSF014N03		D 833	(B,124,93) Diode	DB2X41400	
Q 1443	(B,71,66) Transistor	LTC043EEB		D 834	(A,153,109) Diode	EZAEG2A50AX	
Q 1444	(A,108,111) Transistor	LTC014YEB		D 835	(A,154,119) Diode	DZ2S068C	
Q 1445	(A,46,61) Chip Transistor	RN1904		D 836	(A,154,114) Diode	DZ2S068C	
Q 1446	(B,24,93) Chip Transistor	RN1904		D 837	(A,109,104) Diode	RSX201L-30	
Q 2031	(B,52,31) Chip Transistor	HN1C03FU		D 838	(A,162,105) Diode	EZAEG2A50AX	
D 121	(A,51,105) Diode	CRG03		D 839	(A,154,111) Diode	EZAEG2A50AX	
D 122	(A,51,107) Diode	CRG03		D 840	(A,110,92) Diode	RSX201L-30	
D 131	(A,93,103) Diode	DA2J101		D 871	(B,119,36) Diode	EZAEG2A50AX	
D 132	(A,104,104) Diode	MC2848-11		D 872	(B,115,37) Diode	EZAEG2A50AX	
D 133	(A,101,103) Diode	MC2848-11		D 873	(B,106,37) Diode	EZAEG2A50AX	D
D 136	(A,83,107) Diode	MC2848-11		D 874	(B,104,37) Diode	EZAEG2A50AX	
D 151	(B,56,98) Diode	MC2848-11		D 875	(B,102,37) Diode	EZAEG2A50AX	
D 152	(B,54,124) Diode	HZU7L(A1)		D 876	(B,112,36) Diode	EZAEG2A50AX	
D 153	(B,75,120) Diode	HZU7L(C3)		D 877	(B,128,17) Diode	DZ2S068C	
D 154	(B,78,123) Diode	RKZ20KG(B2)		D 878	(B,122,36) Diode	DZ2S068C	
D 155	(B,65,123) Diode	DA2J101		D 879	(B,128,14) Diode	DZ2S068C	
D 156	(B,63,125) Diode	RKZ5.6KG(B2)		D 1303	(A,52,77) Diode	RKZ18KG(B2)	
D 231	(B,41,62) Diode	RKZ4.7KG(B2)		D 1304	(A,44,77) Diode	1SR154-400	
D 601	(B,59,39) Diode	DA2J101		D 1321	(A,91,75) Diode	RB080L-30	
D 702	(B,54,20) Diode	EMZC6.8N		D 1322	(A,91,71) Diode	RB080L-30	
D 703	(B,55,25) Diode	EMZC6.8N		D 1323	(A,93,88) Diode	CMS03	E
D 704	(B,56,20) Diode	EMZC6.8N		D 1324	(A,89,88) Diode	CMS03	
D 705	(B,58,25) Diode	EMZC6.8N		D 1401	(A,108,56) Diode	DB2X206	
D 706	(B,58,20) Diode	EMZC6.8N		D 1432	(A,105,17) Diode	HZU6R2(B3)	
D 707	(B,60,25) Diode	EMZC6.8N		D 1433	(A,77,62) Diode	RKZ8.2KG(B2)	
D 708	(B,61,20) Diode	EMZC6.8N		D 1434	(A,73,59) Diode	RKZ6.8KG(B2)	
D 709	(B,62,25) Diode	EMZC6.8N		D 1441	(B,67,81) Diode	HZU13(B1)	
D 710	(B,63,20) Diode	EMZC6.8N		D 1442	(B,70,74) Diode	RB551VM-30	
D 711	(B,64,25) Diode	EMZC6.8N		D 1461	(A,33,95) Diode	1SR154-400	
D 712	(B,65,20) Diode	EMZC6.8N		D 1462	(A,33,99) Diode	1SR154-400	
D 713	(B,80,20) Diode	DZ2S068C		D 1463	(A,31,90) Diode	1SR154-400	F
D 714	(B,82,25) Diode	DZ2S068C		D 1464	(A,34,90) Diode	1SR154-400	
D 715	(B,81,25) Diode	DZ2S068C		D 1475	(A,45,97) Diode	CRG03	
D 716	(B,79,25) Diode	DZ2S068C		D 2012	(B,66,31) Diode	DZ2S068C	
D 717	(B,78,25) Diode	DZ2S068C					

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

A	D 2013	(B,69,33) Diode	DZ2S068C
	D 2014	(B,62,31) Diode	DZ2S068C
	D 6001	(A,47,12) Diode	RN731VN
	D 6002	(A,48,15) Diode	RN731VN
	L 103	(A,110,112) Inductor	CTF1389
	L 121	(A,66,99) Choke Coil 600 uH	CTH1221
	L 131	(A,79,108) Chip Coil	BTH1101
	L 151	(B,59,102) Chip Coil	BTH1101
	L 152	(B,59,125) Inductor	CTF1547
	L 472	(B,147,87) Chip Beads	VTL1132
B	L 521	(B,107,40) Inductor	CTF1545
	L 522	(B,102,47) Inductor	CTF1545
	L 523	(A,101,41) Inductor	CTF1545
	L 524	(B,104,45) Inductor	CTF1545
	L 601	(A,28,59) Ferrite Bead	CTF1528
	L 701	(A,74,24) Inductor	XTL3010
	L 771	(B,145,109) Ferrite Bead(C,D,E,F,G)	CTF1528
	L 772	(B,147,116) Inductor(C,D,E,F,G)	CTF1787
	L 831	(A,127,109) Inductor	CTH1524
	L 832	(A,160,102) Inductor	CTF1713
	L 833	(A,151,110) Inductor	CTF1713
	L 836	(A,126,98) Inductor	CTH1524
C	L 951	(B,171,102) Inductor	LCTAW2R7J2520
	L 952	(B,152,100) Inductor	LCTAW2R7J2520
	L 1001	(A,130,42) Chip Beads	VTL1127
	L 1002	(A,127,51) Chip Beads	VTL1126
	L 1003	(A,125,52) Chip Beads	VTL1126
	L 1004	(A,127,49) Chip Beads	VTL1126
	L 1005	(A,125,50) Chip Beads	VTL1126
	L 1006	(A,127,50) Chip Beads	VTL1126
	L 1007	(A,125,51) Chip Beads	VTL1126
	L 1008	(A,127,48) Chip Beads	VTL1126
D	L 1009	(A,125,49) Chip Beads	VTL1126
	L 1010	(A,127,47) Chip Beads	VTL1126
	L 1011	(A,125,48) Chip Beads	VTL1126
	L 1012	(A,125,46) Chip Beads	VTL1126
	L 1013	(A,127,46) Chip Beads	VTL1126
	L 1014	(A,125,47) Chip Beads	VTL1126
	L 1015	(A,125,45) Chip Beads	VTL1126
	L 1016	(A,127,45) Chip Beads	VTL1126
	L 1017	(A,125,43) Chip Beads	VTL1126
	L 1018	(A,127,43) Chip Beads	VTL1126
E	L 1019	(A,125,44) Chip Beads	VTL1126
	L 1020	(A,127,44) Chip Beads	VTL1126
	L 1021	(B,156,73) Chip Beads	VTL1132
	L 1022	(A,127,42) Chip Beads	VTL1126
	L 1023	(B,151,64) Chip Beads	VTL1132
	L 1024	(A,156,60) Chip Beads	VTL1126
	L 1025	(B,156,66) Chip Beads	VTL1132
	L 1026	(B,158,66) Chip Beads	VTL1132
	L 1321	(A,101,86) Inductor	ATH1219
	L 1322	(A,101,61) Inductor	CTH1541
F	L 1323	(A,78,85) Choke Coil 6.8 uH	CTH1434
	L 1401	(A,112,60) Inductor	CTH1526
	L 1441	(A,64,71) Choke Coil 47 uH	CTH1388
	L 1442	(B,62,66) Inductor	CTF1735
	L 1601	(B,157,84) Chip Beads	VTL1126
	L 2011	(B,61,31) Inductor	CTF1545
	L 2012	(B,70,35) Inductor	CTF1545
	L 2013	(B,65,34) Inductor	CTF1545

L 2031	(B,49,29) Inductor	CTF1545
L 2032	(B,55,29) Inductor	CTF1545
L 2041	(A,165,27) Inductor	CTF1545
L 2042	(A,161,24) Inductor	CTF1545
L 2072	(B,163,35) Chip Beads(C,D,E,F,G)	VTL1126
L 2111	(B,130,25) Inductor	CTF1545
L 2112	(B,126,25) Inductor	CTF1639
L 6001	(A,52,10) Chip Coil	LCTAWR15J2520
L 6002	(A,54,15) Inductor	CTF1786
L 6003	(A,58,16) Inductor	CTF1786
L 6004	(A,52,13) Chip Coil	LCTAWR27J2520
L 6005	(A,61,13) Inductor	CTF1389
L 6006	(A,62,17) Inductor	LCTAW220J2520
L 6007	(A,51,16) Inductor	CTF1794
L 6008	(A,62,21) Inductor	LCYB68NJ1005
L 6009	(A,66,27) Chip Coil	LCTAW470J2520
L 6010	(A,66,32) Inductor	CTF1786
L 6011	(A,58,36) Inductor	CTF1786
L 6012	(A,50,37) Inductor	CTF1786
L 6015	(A,44,34) Inductor	CTF1786
L 6016	(A,45,21) Inductor	CTF1786
L 6017	(A,46,21) Inductor	CTF1786
X 471	(B,144,81) Crystal Resonator 32.000 MHz	CSS1818
X 601	(A,59,39) Resonator 3.932 16 MHz	CSS1772
X 1002	(A,155,72) Resonator 27.000 MHz	CSS1768
X 1003	(B,166,68) Resonator 22 579.2 kHz	CSS1812
X 1004	(A,127,66) Resonator 48.000 MHz	CSS1760
X 1005	(A,127,59)Crystal Resonator 33.333 333 MHz	CSS1825
X 6001	(A,42,30) Resonator 36.480 MHz	CSS1805
P 761	(A,113,116) Poly Switch	FSMD075-24R
P 781	(A,24,110) Poly Switch	FSMD075-24R
P 901	(B,19,88) Surge Absorber	IMSA-6803-01Y900
⚠ P1321	(A,70,82) Fuse 6.3 A	CEK1262
⚠ P1322	(A,22,12) Fuse 1.25 A	CEK1382
⚠ P1323	(A,21,23) Fuse 3.0 A	CEK1386
⚠ P1361	(A,96,25) Fuse 4.0 A	CEK1387
⚠ P1381	(A,111,78) Fuse 3.0 A	CEK1386
⚠ P1382	(B,94,103) Fuse 0.5 A	CEK1379
⚠ P1391	(B,111,50) Fuse 1.0 A	CEK1381
⚠ P1431	(A,100,14) Fuse 2.5 A	CEK1385
⚠ P1435	(A,113,28) Fuse 0.5 A	CEK1379
⚠ P1441	(B,60,65) Fuse 0.5 A	CEK1379
P 2031	(B,46,38) Poly Switch	FSMD075-24R
P 2051	(A,121,31) Poly Switch	FSMD075-24R
BZ2161	(A,39,29) Buzzer	CPV1062
CN571	(A,29,20) Connector	VKN1620
CN702	(A,67,17) Connector	CKS6536
CN761	(A,132,124) Connector	CKS6504
CN1346	(A,152,95) Connector	CKS6503
CN1435	(A,113,24) Connector	CKS4822
CN1437	(A,81,48) Connector	CKS6283
CN2051	(A,109,15) Connector	CKS4497
CN2091	(A,53,54) Connector	CKS6095
CN2121	(A,145,62) Connector	CKS6346
CN2162	(B,81,50) Connector	CKS6536
CN6001	(A,54,4) Connector	CKS6273
JA121	(A,62,118) Plug	CKM1376
JA771	(A,147,118) Jack(C,D,E,F,G)	CKN1042
JA781	(A,35,120) Pin Jack	XKB7001
JA811	(A,138,10) Jack	CKS6437

5		6	7		8
<u>Circuit Symbol and No.</u>		<u>Part No.</u>	<u>Circuit Symbol and No.</u>		<u>Part No.</u>
JA831	(A,163,114) Connector	DKN1417	R 240	(B,49,58)	RS1/10SR153J
JA871	(B,110,20) Connector	CKS6282			
JA901	(A,14,111) Antenna Jack	YKS5041	R 242	(B,38,64)	RS1/16SS102J
JA2001	(A,13,21) RCA Jack	CKB1106	R 243	(B,36,61)	RS1/16SS472J
JA2011	(A,69,9) Mini Jack	AKN1073	R 246	(A,62,62)	RS1/10SR153J
			R 247	(A,61,59)	RS1/10SR473J
			R 248	(A,56,63)	RS1/10SR153J
JA2031	(A,54,17) Jack	CKS6437			
JA2041	(A,166,17) Jack	CKS6437			
JA2071	(A,149,12) Connector(C,D,E,F,G)	CKS5271	R 249	(A,56,61)	RS1/10SR153J
JA2111	(A,130,16) Jack	CKN1040	R 250	(A,56,66)	RS1/10SR153J
			R 251	(A,58,58)	RS1/10SR153J
			R 252	(B,46,66)	RS1/10SR153J
			R 261	(B,40,68)	RS1/16SS0R0J
RESISTORS					
R 101	(A,110,113)	RS1/16SS103J			
R 102	(A,111,108)	RS1/16SS473J	R 262	(B,51,70)	RS1/16SS0R0J
R 121	(B,60,121)	RS1/4SA102J	R 263	(B,51,79)	RS1/16SS0R0J
R 122	(B,54,120)	RS1/4SA102J	R 264	(B,51,84)	RS1/16SS0R0J
R 123	(B,58,121)	RS1/4SA102J	R 267	(B,35,84)	RS1/16SS0R0J
			R 268	(B,30,75)	RS1/16SS2200D
R 131	(A,94,100)	RS1/16SS102J			
R 132	(A,104,100)	RS1/16SS472J	R 271	(B,28,81)	RS1/16SS750J
R 133	(A,103,100)	RS1/16SS473J	R 272	(B,31,75)	RS1/16SS0R0J
R 134	(A,97,107)	RS1/16SS222J	R 273	(B,31,76)	RS1/16SS101J
R 135	(A,99,107)	RS1/16SS823J	R 274	(B,31,77)	RS1/16SS101J
			R 275	(B,30,79)	RS1/16SS0R0J
R 136	(A,104,108)	RS1/16SS101J			
R 137	(A,98,107)	RS1/16SS152J	R 276	(B,30,80)	RS1/16SS101J
R 141	(A,81,106)	RS1/16SS153J	R 277	(B,30,81)	RS1/16SS101J
R 142	(A,87,107)	RS1/10SR472J	R 279	(B,44,87)	RS1/10SR0R0J
R 153	(B,59,99)	RS1/16SS103J	R 280	(B,45,85)	RS1/10SR0R0J
			R 282	(A,45,91)	RS1/16SS75R0D
R 154	(B,55,93)	RS1/16SS473J			
R 155	(B,57,92)	RS1/16SS473J	R 283	(B,36,84)	RS1/16SS0R0J
R 156	(B,59,94)	RS1/16SS473J	R 284	(B,35,71)	RS1/16SS0R0J
R 157	(B,57,96)	RS1/16SS473J	R 285	(B,36,71)	RS1/16SS0R0J
R 158	(B,53,123)	RS1/16SS472J	R 287	(B,38,67)	RS1/16SS0R0J
			R 288	(B,41,68)	RS1/16SS0R0J
R 159	(B,55,122)	RS1/16SS473J			
R 160	(B,55,126)	RS1/16SS103J	R 289	(B,42,68)	RS1/16SS0R0J
R 163	(B,73,120)	RS1/16SS473J	R 290	(B,44,68)	RS1/16SS0R0J
R 164	(B,73,123)	RS1/16SS104J	R 292	(B,31,74)	RS1/16SS0R0J
R 165	(B,75,121)	RS1/16SS103J	R 293	(B,30,78)	RS1/16SS0R0J
			R 295	(A,46,89)	RS1/16SS470J
R 166	(B,77,124)	RS1/16SS103J			
R 167	(B,64,119)	RS1/16SS103J	R 310	(B,46,68)	RS1/16SS0R0J
R 168	(B,60,125)	RS1/16SS103J	R 326	(B,51,69)	RS1/16SS0R0J
R 169	(B,69,121)	RS1/16SS104J	R 327	(B,51,72)	RS1/16SS0R0J
R 171	(B,64,123)	RS1/10SR472J	R 328	(B,51,73)	RS1/16SS0R0J
			R 329	(B,51,75)	RS1/16SS0R0J
R 181	(B,36,108)	RS1/16SS182J			
R 182	(B,39,109)	RS1/16SS182J	R 330	(B,51,77)	RS1/16SS0R0J
R 183	(B,36,109)	RS1/16SS272J	R 331	(B,51,78)	RS1/16SS0R0J
R 184	(B,40,109)	RS1/16SS272J	R 333	(B,51,81)	RS1/16SS0R0J
R 185	(B,39,107)	RS1/16SS182J	R 342	(B,31,73)	RS1/16SS0R0J
			R 343	(B,31,72)	RS1/16SS0R0J
R 186	(B,42,107)	RS1/16SS182J			
R 187	(B,43,106)	RS1/16SS272J	R 345	(A,37,76)	RS1/16SS101J
R 188	(B,43,107)	RS1/16SS272J	R 346	(B,30,82)	RS1/16SS0R0J
R 196	(B,32,90)	RS1/16SS473J	R 347	(B,30,83)	RS1/16SS0R0J
R 198	(B,52,86)	RS1/16SS0R0J	R 373	(A,36,76)	RS1/16SS103J
			R 374	(B,51,82)	RS1/16SS0R0J
R 231	(B,52,57)	RS1/10SR153J			
R 232	(B,48,59)	RS1/10SR153J	R 375	(B,51,85)	RS1/16SS0R0J
R 233	(B,45,59)	RS1/10SR153J	R 401	(B,164,34)	RS1/16SS472J
R 234	(A,58,59)	RS1/10SR153J	R 402	(B,170,30)	RS1/16SS272J
R 235	(B,50,66)	RS1/10SR153J	R 403	(B,164,27)	RS1/16SS101J
			R 404	(B,163,27)	RS1/16SS101J
R 236	(B,53,59)	RS1/10SR153J			
R 237	(A,54,58)	RS1/10SR273J	R 405	(B,167,31)	RS1/16SS103J
R 238	(B,51,60)	RS1/10SR153J	R 406	(B,165,30)	RS1/16SS103J
R 239	(A,53,58)	RS1/10SR273J	R 421	(B,120,59)	RS1/16SS102J
			R 422	(B,119,53)	RS1/16SS472J

	1	2	3	4
	<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>
	R 423 (B,116,54)	RS1/16SS472J	R 516 (A,131,90)	RS1/16SS750J
A	R 424 (A,156,76)	RS1/16SS104J	R 536 (A,99,39)	RS1/16SS101J
	R 425 (A,154,78)	RS1/16SS104J	R 540 (B,96,46)	RS1/16SS101J
	R 426 (A,151,75)	RS1/16SS821J	R 551 (B,100,43)	RS1/10SR101J
	R 427 (A,152,78)	RS1/16SS821J	R 552 (B,103,42)	RS1/16SS101J
	R 428 (A,148,71)	RS1/16SS0R0J	R 553 (B,98,44)	RS1/16SS101J
	R 429 (A,145,81)	RS1/16SS0R0J	R 554 (A,124,86)	RS1/16SS0R0J
	R 430 (A,146,82)	RS1/16SS0R0J	R 571 (A,24,14)	RS1/16SS102J
	R 431 (B,117,66)	RS1/16SS472J	R 572 (A,27,13)	RS1/16SS472J
	R 432 (B,117,64)	RS1/16SS472J	R 573 (A,28,13)	RS1/16SS472J
	R 433 (B,119,60)	RS1/16SS102J	R 574 (A,32,16)	RS1/16SS0R0J
B	R 434 (A,149,84)	RS1/16SS104J	R 575 (A,39,16) (C,D,E,F,G)	RS1/16SS101J
	R 435 (A,149,83)	RS1/16SS104J	R 577 (A,31,25)	RS1/16SS471J
	R 436 (A,152,83)	RS1/16SS821J	R 578 (A,29,25)	RS1/16SS221J
	R 437 (A,154,83)	RS1/16SS821J	R 579 (A,30,25)	RS1/16SS221J
	R 438 (A,160,79)	RS1/16SS0R0J	R 580 (A,33,25)	RS1/16SS221J
	R 443 (B,117,61)	RS1/16SS0R0J	R 581 (A,32,25)	RS1/16SS221J
	R 444 (B,148,82)	RS1/16SS0R0J	R 582 (A,34,25)	RS1/16SS221J
	R 445 (B,116,56)	RS1/16SS0R0J	R 591 (A,48,93)	RS1/16SS562J
	R 446 (B,40,66)	RS1/16SS0R0J	R 592 (A,49,97)	RS1/16SS332J
	R 449 (A,151,79)	RS1/16SS0R0J	R 593 (A,81,45)	RS1/16SS471J
C	R 451 (A,147,83)	RS1/16SS0R0J	R 594 (A,79,45)	RS1/16SS471J
	R 452 (A,151,77)	RS1/16SS0R0J	R 595 (A,50,90)	RS1/16SS222J
	R 471 (A,126,86)	RS1/16SS101J	R 601 (A,33,57)	RS1/16SS221J
	R 474 (A,126,85)	RS1/16SS301J	R 602 (A,31,57)	RS1/16SS221J
	R 475 (B,153,70)	RS1/16SS0R0J	R 603 (A,32,57)	RS1/16SS221J
	R 476 (B,153,71)	RS1/16SS0R0J	R 604 (B,52,44)	RS1/16SS473J
	R 477 (B,132,84)	RS1/16SS151J	R 606 (A,63,52)	RS1/16SS473J
	R 478 (B,129,87)	RS1/16SS151J	R 607 (A,61,52)	RS1/16SS473J
	R 479 (B,129,94)	RS1/16SS151J	R 608 (B,60,39)	RS1/16SS104J
	R 480 (A,126,90)	RS1/16SS0R0J	R 609 (B,50,40)	RS1/16SS104J
D	R 481 (A,132,83)	RS1/16SS0R0J	R 610 (B,50,42)	RS1/16SS104J
	R 483 (B,139,81)	RS1/16SS472J	R 611 (A,55,46)	RS1/16SS104J
	R 484 (B,140,99)	RS1/16SS473J	R 612 (B,52,29)	RS1/16SS0R0J
	R 485 (B,142,83)	RS1/16SS105J	R 613 (B,55,35)	RS1/10SR0R0J
	R 487 (B,145,84)	RS1/16SS101J	R 614 (A,55,39)	RS1/16SS100J
	R 488 (B,145,83)	RS1/16SS101J	R 615 (B,48,49)	RS1/10SR0R0J
	R 489 (B,141,82)	RS1/16SS821J	R 616 (B,52,36)	RS1/16SS104J
	R 490 (A,131,85)	RS1/16SS0R0J	R 617 (B,54,38)	RS1/16SS102J
	R 492 (B,149,90)	RS1/16SS181J	R 618 (B,52,42)	RS1/16SS473J
	R 493 (B,147,90)	RS1/16SS181J	R 620 (B,54,43)	RS1/16SS681J
E	R 494 (B,149,91)	RS1/16SS181J	R 621 (B,54,42)	RS1/16SS273J
	R 495 (B,147,91)	RS1/16SS181J	R 622 (A,58,48)	RS1/16SS473J
	R 496 (B,149,92)	RS1/16SS181J	R 623 (A,54,33)	RS1/16SS101J
	R 497 (B,147,92)	RS1/16SS181J	R 624 (B,49,50)	RS1/16SS472J
	R 498 (B,149,93)	RS1/16SS181J	R 625 (B,49,51)	RS1/16SS472J
	R 499 (B,147,93)	RS1/16SS181J	R 626 (A,55,53)	RS1/16SS473J
	R 500 (B,149,94)	RS1/16SS560J	R 627 (B,51,27)	RS1/16SS473J
	R 501 (B,147,94)	RS1/16SS560J	R 628 (B,52,27)	RS1/16SS473J
	R 502 (B,149,95)	RS1/16SS560J	R 629 (B,48,27)	RS1/16SS472J
	R 503 (B,133,79)	RS1/16SS0R0J	R 630 (B,49,27)	RS1/16SS472J
F	R 504 (B,149,83)	RS1/16SS222J	R 631 (A,50,27)	RS1/16SS471J
	R 505 (B,148,83)	RS1/16SS222J	R 632 (A,49,27)	RS1/16SS471J
	R 506 (B,147,85)	RS1/16SS101J	R 633 (B,49,52)	RS1/16SS473J
	R 507 (B,148,86)	RS1/16SS473J	R 634 (B,48,52)	RS1/16SS473J
	R 508 (B,141,99)	RS1/16SS101J	R 635 (B,47,52)	RS1/16SS473J
	R 510 (B,128,92)	RS1/16SS151J	R 636 (A,48,57)	RS1/16SS473J
	R 512 (B,149,87)	RS1/16SS331J	R 638 (A,42,58)	RS1/16SS104J
	R 514 (A,130,90)	RS1/16SS750J	R 639 (B,43,32)	RS1/16SS103J
	R 515 (A,130,88)	RS1/16SS0R0J	R 640 (B,42,57)	RS1/16SS103J

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
R 641	(B,42,29)	RS1/16SS104J		R 761	(A,118,119)	RS1/16SS223J	
R 642	(B,42,56)	RS1/16SS103J		R 762	(A,118,117)	RS1/16SS223J	
R 643	(A,40,25) (B,C,D)	RS1/16SS473J		R 771	(B,145,106) (C,D,E,F,G)	RS1/16SS0R0J	A
R 644	(A,40,58)	RS1/16SS471J		R 772	(B,145,108) (C,D,E,F,G)	RS1/16SS473J	
R 645	(A,40,27) (E,F,G)	RS1/16SS473J		R 773	(B,150,111) (C,D,E,F,G)	RS1/16SS121J	
R 646	(A,41,25) (B,D,E)	RS1/16SS473J		R 774	(B,145,110) (C,D,E,F,G)	RS1/16SS104J	
R 647	(B,41,57)	RS1/16SS681J		R 775	(B,145,116) (C,D,E,F,G)	RS1/16SS103J	
R 648	(A,41,27) (C,F,G)	RS1/16SS473J		R 781	(A,29,114)	RS1/16SS390J	
				R 782	(A,43,114)	RS1/16SS390J	
R 649	(A,42,25) (B,C,E,F)	RS1/16SS473J		R 783	(A,27,114)	RS1/16SS390J	
R 650	(A,42,27) (D,G)	RS1/16SS473J		R 784	(A,38,114)	RS1/16SS390J	
R 652	(A,46,58)	RS1/16SS221J					
R 653	(B,38,52)	RS1/16SS182J		R 785	(A,33,114)	RS1/16SS390J	
R 654	(A,39,58)	RS1/16SS221J		R 786	(A,45,114)	RS1/16SS390J	
R 655	(B,37,52)	RS1/16SS182J		R 787	(A,30,114)	RS1/16SS223J	
				R 788	(A,41,114)	RS1/16SS223J	B
R 656	(A,38,25)	RS1/10SR0R0J		R 789	(A,25,114)	RS1/16SS223J	
R 657	(A,38,58)	RS1/16SS221J					
R 658	(B,37,54)	RS1/10SR0R0J		R 790	(A,39,114)	RS1/16SS223J	
R 659	(A,35,27)	RS1/16SS473J		R 791	(A,31,114)	RS1/16SS223J	
R 660	(B,37,32)	RS1/16SS473J		R 792	(A,46,114)	RS1/16SS223J	
				R 793	(B,33,111)	RS1/16SS472J	
R 661	(B,35,55)	RS1/16SS473J		R 794	(B,39,111)	RS1/16SS472J	
R 662	(A,34,57)	RS1/16SS473J					
R 663	(A,34,61)	RS1/16SS473J		R 795	(B,46,111)	RS1/16SS472J	
R 664	(A,29,27)	RS1/16SS104J		R 796	(B,41,111)	RS1/16SS472J	
R 665	(B,29,27)	RS1/16SS104J		R 797	(B,31,111)	RS1/16SS472J	
				R 798	(B,25,111)	RS1/16SS472J	
R 666	(A,24,41)	RS1/16SS221J		R 811	(A,144,16)	RS1/16SS102J	C
R 667	(B,31,41)	RS1/16SS221J					
R 668	(B,30,41)	RS1/16SS221J		R 812	(A,144,14)	RS1/16SS473J	
R 669	(A,24,39)	RS1/16SS104J		R 821	(A,149,14)	RS1/16SS473J	
R 670	(B,32,41)	RS1/16SS221J		R 822	(A,151,14)	RS1/16SS104J	
				R 823	(A,148,10)	RS1/16SS473J	
R 673	(B,30,33)	RS1/16SS223J		R 824	(A,148,12)	RS1/16SS104J	
R 674	(B,30,34)	RS1/16SS223J					
R 675	(B,30,35)	RS1/10SR0R0J		R 825	(A,145,14)	RS1/16SS122J	
R 676	(A,55,55)	RS1/16SS222J		R 826	(A,151,15)	RS1/16SS152J	
				R 831	(A,141,113)	RS1/16SS681J	
R 677	(A,37,27)	RS1/16SS0R0J		R 832	(A,140,113)	RS1/16SS681J	
R 679	(A,24,42)	RS1/16SS473J		R 833	(A,142,113)	RS1/16SS681J	
R 680	(A,24,40)	RS1/16SS104J					D
R 681	(A,55,52) (C,D,E,F,G)	RS1/16SS472J		R 836	(B,129,100)	RS1/16SS0R0J	
R 682	(A,51,27)	RS1/16SS222J		R 837	(B,117,101)	RS1/16SS0R0J	
R 683	(B,41,56)	RS1/16SS222J		R 839	(B,124,116)	RS1/16SS101J	
				R 840	(B,122,101)	RS1/16SS101J	
R 684	(A,44,58)	RS1/16SS0R0J		R 841	(B,131,109)	RS1/16SS0R0J	
R 685	(A,45,58)	RS1/16SS0R0J					
R 687	(A,48,27)	RS1/16SS222J		R 842	(B,118,116)	RS1/16SS0R0J	
R 688	(B,47,27)	RS1/16SS473J		R 843	(B,116,116)	RS1/16SS224J	
R 689	(A,45,25)	RS1/16SS154J		R 844	(B,119,117)	RS1/16SS4702D	
				R 845	(B,113,105)	RS1/16SS152J	
R 690	(B,58,48)	RS1/16SS471J		R 846	(B,114,106)	RS1/16SS3302D	
R 691	(B,58,47)	RS1/16SS471J					
R 695	(A,34,27)	RS1/16SS0R0J		R 847	(B,113,107)	RS1/16SS8201D	E
R 697	(B,82,23)	RS1/16SS104J		R 848	(B,115,104)	RS1/16SS752J	
R 698	(B,83,23) (B,C,D,E,F)	RS1/16SS224J		R 849	(A,129,103) 0.056 ohm	ACN7160	
	(B,83,23) (G)	RS1/16SS104J		R 850	(B,120,104)	RS1/16SS0R0J	
				R 851	(B,121,117)	RS1/16SS394J	
R 699	(A,54,31)	RS1/16SS101J					
R 700	(A,52,22)	RS1/16SS101J		R 852	(B,121,116)	RS1/16SS204J	
R 701	(A,55,47)	RS1/16SS0R0J		R 855	(B,114,107)	RS1/16SS0R0J	
R 702	(A,57,48)	RS1/16SS0R0J		R 856	(B,113,106)	RS1/16SS0R0J	
R 703	(A,55,50) (C,D,E,F,G)	RS1/16SS0R0J		R 857	(A,141,108)	RS1/16SS681J	
R 704	(A,54,52) (C,D,E,F,G)	RS1/16SS0R0J		R 858	(A,143,108)	RS1/16SS681J	
R 705	(A,24,47)	RS1/16SS0R0J					
				R 860	(B,115,101)	RS1/16SS224J	F
R 706	(B,72,18)	RS1/16SS472J		R 861	(B,118,102)	RS1/16SS4702D	
R 707	(B,70,24)	RS1/16SS472J		R 862	(B,112,90)	RS1/16SS152J	
R 729	(B,78,17)	RS1/16SS222J		R 863	(B,113,91)	RS1/16SS3302D	
R 738	(B,80,17)	RS1/16SS222J		R 864	(B,111,93)	RS1/16SS8201D	

	1	2	3	4
	<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>
A	R 865 (B,115,89)	RS1/16SS752J	R 1013 (B,127,68)	RS1/10SR0R0J
	R 866 (A,142,108)	RS1/16SS681J	R 1014 (A,158,53)	RS1/16SS330J
	R 867 (A,133,95) 0.056 ohm	ACN7160	R 1015 (B,128,60)	RS1/10SR0R0J
	R 868 (B,119,89)	RS1/16SS0R0J	R 1016 (A,166,52)	RS1/16SS330J
	R 869 (B,120,102)	RS1/16SS394J	R 1017 (A,166,51)	RS1/16SS330J
■	R 870 (B,120,101)	RS1/16SS204J	R 1018 (B,166,70)	RS1/16SS105J
	R 872 (B,126,16)	RS1/16SS0R0J	R 1019 (B,139,66)	RS1/10SR0R0J
	R 873 (B,113,92)	RS1/16SS0R0J	R 1021 (A,164,51)	RS1/16SS330J
	R 874 (B,120,36)	RS1/16SS101J	R 1022 (A,157,69)	RS1/16SS102J
	R 875 (B,117,36)	RS1/16SS101J	R 1023 (A,159,52)	RS1/16SS330J
B	R 877 (B,113,36)	RS1/16SS0R0J	R 1024 (B,163,69)	RS1/16SS331J
	R 879 (B,106,36)	RS1/16SS220J	R 1025 (A,158,69)	RS1/16SS220J
	R 880 (B,104,36)	RS1/16SS101J	R 1026 (B,162,69)	RS1/16SS220J
	R 881 (B,101,36)	RS1/16SS101J	R 1027 (A,158,52)	RS1/16SS330J
	R 882 (B,126,14)	RS1/16SS0R0J	R 1028 (A,162,72)	RS1/10SR0R0J
■	R 883 (B,120,39)	RAB4C223J	R 1029 (B,162,72)	RS1/10SR0R0J
	R 884 (B,115,39)	RAB4C223J	R 1030 (B,148,72)	RS1/16SS221J
	R 885 (B,119,42)	RS1/16SS102J	R 1031 (B,147,71)	RS1/16SS221J
	R 886 (B,124,36)	RS1/16SS681J	R 1034 (A,164,50)	RS1/16SS330J
	R 887 (B,124,38)	RS1/16SS103J	R 1035 (A,145,72)	RS1/16SS101J
C	R 889 (B,112,91)	RS1/16SS0R0J	R 1036 (A,147,72)	RS1/16SS101J
	R 901 (A,22,74)	RS1/16SS103J	R 1037 (A,146,72)	RS1/16SS101J
	R 902 (A,23,74)	RS1/16SS103J	R 1038 (A,164,49)	RS1/16SS330J
	R 903 (B,22,66)	RS1/10SR681J	R 1039 (A,159,88)	RS1/16SS101J
	R 906 (B,20,66)	RS1/16SS0R0J	R 1040 (A,161,88)	RS1/16SS101J
■	R 908 (B,22,69)	RS1/16SS103J	R 1041 (A,160,88)	RS1/16SS101J
	R 909 (B,21,72)	RS1/16SS103J	R 1042 (A,159,51)	RS1/16SS330J
	R 910 (B,26,68)	RS1/10SR103J	R 1043 (A,158,51)	RS1/16SS330J
	R 911 (B,22,77)	RS1/16SS103J	R 1044 (B,146,70)	RS1/10SR0R0J
	R 912 (B,22,78)	RS1/16SS103J	R 1045 (B,144,70)	RS1/10SR0R0J
D	R 913 (B,25,79)	RS1/10SR103J	R 1046 (A,136,68)	RS1/16SS5601D
	R 926 (A,32,78)	RS1/10SR0R0J	R 1047 (A,134,68)	RS1/16SS5601D
	R 930 (A,24,74)	RS1/16SS102J	R 1048 (A,130,66)	RS1/16SS681J
	R 931 (A,20,73)	RS1/16SS102J	R 1050 (A,121,60)	RS1/16SS103J
	R 932 (A,26,73)	RS1/16SS0R0J	R 1051 (A,122,63)	RS1/16SS103J
■	R 934 (A,25,75)	RS1/10SR0R0J	R 1052 (A,121,63)	RS1/16SS103J
	R 952 (B,166,93)	RS1/16SS103J	R 1053 (A,122,61)	RS1/16SS103J
	R 953 (B,157,103)	RS1/16SS101J	R 1054 (A,121,59)	RS1/16SS103J
	R 954 (B,155,104)	RS1/16SS101J	R 1055 (A,121,62)	RS1/16SS103J
	R 955 (B,163,92)	RS1/16SS103J	R 1056 (A,121,58)	RS1/16SS103J
E	R 956 (B,162,92)	RS1/16SS103J	R 1057 (A,122,58)	RS1/16SS103J
	R 957 (B,160,91)	RS1/16SS221J	R 1058 (A,122,59)	RS1/16SS103J
	R 958 (B,159,93)	RS1/16SS221J	R 1059 (A,121,61)	RS1/16SS103J
	R 960 (B,154,98)	RS1/16SS6801D	R 1061 (A,129,58)	RS1/16SS152J
	R 961 (B,165,92)	RS1/16SS101J	R 1062 (A,122,60)	RS1/16SS103J
■	R 962 (B,166,103)	RS1/16SS103J	R 1063 (A,123,55)	RS1/16SS0R0J
	R 964 (B,155,94)	RS1/10SR0R0J	R 1064 (A,166,50)	RS1/16SS330J
	R 965 (B,150,100)	RS1/10SR0R0J	R 1065 (A,159,50)	RS1/16SS330J
	R 1001 (A,164,54)	RS1/16SS330J	R 1066 (A,158,50)	RS1/16SS330J
	R 1002 (A,166,55)	RS1/16SS330J	R 1068 (B,129,49)	RS1/16SS101J
F	R 1003 (A,159,55)	RS1/16SS330J	R 1069 (B,132,49)	RS1/16SS101J
	R 1004 (A,156,55)	RS1/16SS330J	R 1070 (A,158,57)	RS1/16SS102J
	R 1005 (A,166,54)	RS1/16SS330J	R 1071 (A,131,48)	RS1/16SS101J
	R 1006 (A,164,53)	RS1/16SS330J	R 1072 (A,131,49)	RS1/16SS101J
	R 1007 (A,159,54)	RS1/16SS330J	R 1073 (B,130,49)	RS1/16SS101J
■	R 1008 (A,157,54)	RS1/16SS330J	R 1075 (A,131,47)	RS1/16SS101J
	R 1009 (A,166,53)	RS1/16SS330J	R 1077 (B,135,48)	RS1/16SS0R0J
	R 1010 (A,164,52)	RS1/16SS330J	R 1079 (B,139,51)	RS1/16SS82R0D
	R 1011 (A,159,53)	RS1/16SS330J	R 1080 (B,137,48)	RS1/16SS82R0D
	R 1012 (A,157,71)	RS1/16SS105J	R 1086 (A,159,49)	RS1/16SS330J

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
R 1087	(B,116,63)	RS1/16SS0R0J		R 1161	(A,156,64)	RS1/16SS331J	A
R 1088	(B,118,59)	RS1/16SS0R0J		R 1162	(A,158,63)	RS1/16SS331J	
R 1089	(A,132,69)	RS1/16SS102J		R 1163	(A,158,62)	RS1/16SS331J	
R 1090	(A,131,69)	RS1/16SS102J		R 1164	(A,158,61)	RS1/16SS331J	
R 1093	(A,156,63)	RS1/16SS331J		R 1165	(A,156,59)	RS1/16SS331J	
R 1094	(A,156,62)	RS1/16SS331J		R 1166	(A,156,65)	RS1/16SS331J	
R 1095	(A,158,49)	RS1/16SS330J		R 1167	(B,139,39)	RS1/16SS100J	
R 1096	(A,159,48)	RS1/16SS561J		R 1168	(B,142,38)	RS1/16SS100J	
R 1097	(A,122,62)	RS1/16SS0R0J		R 1169	(B,137,39)	RS1/16SS100J	
R 1098	(B,151,50)	RS1/16SS0R0J		R 1170	(B,139,38)	RS1/16SS100J	
R 1099	(A,145,41)	RS1/16SS100J		R 1171	(B,143,39)	RS1/16SS100J	B
R 1100	(A,144,41)	RS1/16SS100J		R 1172	(B,141,38)	RS1/16SS100J	
R 1101	(B,145,39)	RS1/16SS100J		R 1173	(A,142,41)	RS1/16SS100J	
R 1102	(B,140,39)	RS1/16SS100J		R 1174	(A,143,41)	RS1/16SS100J	
R 1103	(A,143,39)	RS1/16SS100J		R 1175	(A,127,52)	RS1/16SS0R0J	
R 1104	(B,143,38)	RS1/16SS100J		R 1176	(B,153,64)	RS1/16SS471J	
R 1105	(B,140,38)	RS1/16SS100J		R 1177	(A,131,54)	RS1/16SS103J	
R 1106	(A,158,48)	RS1/16SS330J		R 1178	(B,159,74)	RS1/16SS101J	
R 1107	(B,149,39)	RS1/16SS100J		R 1179	(A,164,46)	RS1/16SS561J	
R 1108	(B,147,40)	RS1/16SS100J		R 1180	(A,166,46)	RS1/16SS561J	
R 1109	(B,148,39)	RS1/16SS100J		R 1181	(A,159,47)	RS1/16SS561J	C
R 1110	(B,146,39)	RS1/16SS100J		R 1182	(A,166,44)	RS1/16SS561J	
R 1111	(B,138,39)	RS1/16SS100J		R 1183	(A,166,45)	RS1/16SS561J	
R 1112	(B,149,40)	RS1/16SS100J		R 1184	(A,164,44)	RS1/16SS561J	
R 1113	(B,141,39)	RS1/16SS100J		R 1185	(A,158,46)	RS1/16SS561J	
R 1114	(B,151,71)	RS1/16SS331J		R 1186	(A,164,43)	RS1/16SS561J	
R 1115	(B,151,70)	RS1/16SS331J		R 1187	(A,158,45)	RS1/16SS561J	
R 1116	(B,152,60)	RS1/16SS121J		R 1188	(A,159,46)	RS1/16SS561J	
R 1117	(A,148,67)	RS1/16SS472J		R 1189	(A,158,44)	RS1/16SS561J	
R 1118	(A,147,68)	RS1/16SS472J		R 1190	(A,159,45)	RS1/16SS561J	
R 1119	(A,150,70)	RS1/16SS473J		R 1191	(A,131,62)	RS1/16SS330J	D
R 1120	(A,151,72)	RS1/16SS473J		R 1192	(B,133,57)	RS1/16SS472J	
R 1121	(A,152,68)	RS1/16SS473J		R 1193	(B,135,58)	RS1/16SS102J	
R 1122	(A,166,47)	RS1/16SS561J		R 1195	(A,156,66)	RS1/16SS103J	
R 1123	(B,158,65)	RS1/16SS471J		R 1196	(A,158,60)	RS1/16SS331J	
R 1124	(B,154,66)	RS1/16SS471J		R 1197	(A,123,51)	RS1/16SS121J	
R 1126	(B,156,74)	RS1/16SS471J		R 1198	(A,121,52)	RS1/16SS121J	
R 1127	(B,148,69)	RS1/16SS472J		R 1199	(A,123,49)	RS1/16SS121J	
R 1128	(B,148,17)	RS1/16SS103J		R 1200	(A,121,50)	RS1/16SS121J	
R 1129	(B,130,48)	RS1/16SS103J		R 1201	(B,128,26)	RS1/16SS82R0D	
R 1130	(B,132,48)	RS1/16SS103J		R 1202	(B,128,24)	RS1/16SS82R0D	
R 1132	(A,127,55)	RS1/16SS0R0J		R 1203	(A,123,50)	RS1/16SS121J	
R 1133	(A,125,55)	RS1/16SS0R0J		R 1204	(B,155,26)	RS1/16SS82R0D	
R 1134	(A,127,53)	RS1/16SS0R0J		R 1205	(B,153,24)	RS1/16SS82R0D	
R 1135	(A,125,54)	RS1/16SS0R0J		R 1206	(A,121,51)	RS1/16SS121J	
R 1136	(A,127,54)	RS1/16SS0R0J		R 1207	(B,144,44)	RS1/16SS100J	E
R 1137	(A,158,47)	RS1/16SS561J		R 1208	(B,145,44)	RS1/16SS100J	
R 1138	(A,164,45)	RS1/16SS561J		R 1209	(B,145,29)	RS1/16SS431J	
R 1139	(A,125,53)	RS1/16SS0R0J		R 1210	(A,123,48)	RS1/16SS121J	
R 1140	(A,150,68)	RS1/16SS471J		R 1211	(A,121,49)	RS1/16SS121J	
R 1141	(A,149,68)	RS1/16SS471J		R 1212	(A,123,47)	RS1/16SS121J	
R 1142	(A,155,47)	RS1/16SS101J		R 1213	(A,121,48)	RS1/16SS121J	
R 1145	(B,128,56)	RS1/16SS0R0J		R 1214	(A,121,46)	RS1/16SS121J	
R 1146	(B,130,56)	RS1/16SS0R0J		R 1215	(A,123,46)	RS1/16SS121J	
R 1147	(B,127,56)	RS1/16SS0R0J		R 1216	(A,121,47)	RS1/16SS121J	
R 1148	(B,128,57)	RS1/16SS0R0J		R 1217	(A,121,45)	RS1/16SS121J	F
R 1149	(B,131,56)	RS1/16SS0R0J		R 1218	(A,123,45)	RS1/16SS121J	
R 1150	(B,129,56)	RS1/16SS0R0J		R 1219	(A,121,43)	RS1/16SS121J	
R 1159	(A,158,64)	RS1/16SS331J		R 1220	(A,123,43)	RS1/16SS121J	
R 1160	(A,158,65)	RS1/16SS331J		R 1221	(A,121,44)	RS1/16SS121J	

1

Circuit Symbol and No.

2

Part No.

3

Circuit Symbol and No.

4

Part No.

A	R 1222	(A,123,44)	RS1/16SS121J	R 1415	(A,113,49)	RS1/16SS0R0J
	R 1223	(A,125,40)	RS1/16SS221J	R 1416	(A,103,46)	RS1/16SS471J
	R 1225	(A,123,42)	RS1/16SS121J	R 1420	(A,101,46)	RS1/16SS102J
	R 1227	(A,144,70)	RS1/16SS473J	R 1421	(A,105,45)	RS1/16SS102J
	R 1228	(B,152,54)	RS1/16SS680J	R 1431	(A,104,15)	RS1/10SR121J
■	R 1229	(A,152,67)	RS1/16SS221J	R 1432	(A,106,9)	RS1/16SS473J
	R 1230	(A,148,69)	RS1/16SS221J	R 1433	(A,98,17)	RS1/16SS220J
	R 1241	(B,161,63)	RS1/16SS103J	R 1434	(A,68,60)	RS1/16SS221J
	R 1242	(B,163,63)	RS1/16SS103J	R 1435	(A,67,60)	RS1/16SS221J
	R 1243	(B,163,38)	RS1/8SQ0R0J	R 1436	(A,65,60)	RS1/16SS221J
B	R 1301	(A,38,71)	RS1/16SS391J	R 1437	(A,63,60)	RS1/16SS473J
	R 1302	(A,49,79)	RS1/16SS911J	R 1438	(A,63,58)	RS1/16SS103J
	R 1312	(A,24,33)	RS1/16SS0R0J	R 1439	(A,65,57)	RS1/16SS0R0J
	R 1321	(B,95,83)	RS1/16SS0R0J	R 1441	(B,71,80)	RS1/16SS681J
	R 1322	(B,93,83)	RS1/16SS561J	R 1442	(B,69,66)	RS1/16SS0R0J
■	R 1323	(B,93,81)	RS1/16SS3302D	R 1443	(B,68,66)	RS1/16SS3303D
	R 1324	(B,94,81)	RS1/16SS4301D	R 1444	(B,66,65)	RS1/16SS1102D
	R 1325	(B,95,81)	RS1/16SS3601D	R 1445	(B,64,73)	RS1/16SS512J
	R 1326	(B,87,80)	RS1/10SR0R0J	R 1446	(B,64,72)	RS1/16SS0R0J
	R 1327	(B,90,83)	RS1/16SS822J	R 1447	(B,62,68)	RS1/16SS621J
C	R 1328	(B,94,79)	RS1/16SS0R0J	R 1448	(B,69,69)	RS1/16SS0R0J
	R 1330	(B,95,67)	RS1/16SS224J	R 1449	(B,69,71)	RS1/10SR4701D
	R 1331	(B,90,63)	RS1/16SS822J	R 1451	(B,59,67)	RS1/16SS0R0J
	R 1332	(B,87,66)	RS1/10SR0R0J	R 1481	(B,111,47)	RS1/10SR681J
	R 1333	(B,93,65)	RS1/16SS1101D	R 1601	(B,149,77)	RS1/16SS104J
■	R 1334	(B,94,65)	RS1/16SS2701D	R 1602	(B,148,75)	RS1/16SS0R0J
	R 1335	(B,92,65)	RS1/16SS2702D	R 1603	(B,151,77)	RS1/16SS331J
	R 1336	(B,93,63)	RS1/16SS511J	R 1604	(B,151,75)	RS1/16SS331J
	R 1337	(B,97,74)	RS1/16SS101J	R 1605	(B,152,77)	RS1/16SS331J
	R 1338	(B,97,67)	RS1/16SS101J	R 1606	(B,152,75)	RS1/16SS331J
D	R 1339	(B,95,63)	RS1/16SS0R0J	R 1607	(B,153,77)	RS1/16SS331J
	R 1340	(B,96,79)	RS1/16SS204J	R 1608	(B,153,75)	RS1/16SS331J
	R 1341	(B,97,79)	RS1/16SS394J	R 1609	(B,154,77)	RS1/16SS331J
	R 1342	(B,97,76)	RS1/16SS101J	R 1610	(B,154,75)	RS1/16SS331J
	R 1343	(B,96,74)	RS1/16SS103J	R 1611	(B,156,82)	RS1/16SS331J
■	R 1344	(B,96,76)	RS1/16SS103J	R 1612	(B,158,81)	RS1/16SS331J
	R 1361	(A,80,60)	RS1/16SS0R0J	R 1613	(B,158,83)	RS1/16SS331J
	R 1362	(A,81,60)	RS1/16SS102J	R 1614	(B,159,81)	RS1/16SS331J
	R 1365	(B,83,32)	RS1/16SS102J	R 1615	(B,159,83)	RS1/16SS331J
	R 1366	(B,83,31)	RS1/16SS102J	R 1617	(B,154,85)	RS1/16SS0R0J
E	R 1367	(B,84,37)	RS1/16SS0R0J	R 1618	(A,33,27)	RS1/16SS103J
	R 1372	(A,124,16)	RS1/16SS102J	R 1637	(A,57,53) (C,D,E,F,G)	RS1/16SS0R0J
	R 1383	(B,100,104)	RS1/16SS102J	R 1638	(A,56,51) (C,D,E,F,G)	RS1/16SS0R0J
	R 1384	(B,95,98)	RS1/16SS102J	R 1639	(A,49,59)	RS1/10SR273J
	R 1388	(B,89,89)	RS1/16SS102J	R 1640	(A,60,72)	RS1/10SR273J
■	R 1389	(B,90,89)	RS1/16SS102J	R 1641	(A,47,63)	RS1/16SS473J
	R 1396	(A,124,72)	RS1/10SR0R0J	R 1642	(A,48,63)	RS1/16SS473J
	R 1397	(A,119,85)	RS1/16SS102J	R 1643	(B,167,22)	RS1/16SS473J
	R 1399	(B,113,48)	RS1/16SS102J	R 1644	(B,24,90)	RS1/16SS223J
	R 1400	(B,111,49)	RS1/10SR681J	R 1645	(B,25,95)	RS1/16SS223J
F	R 1402	(A,106,44)	RS1/16SS564J	R 1646	(A,46,59)	RS1/16SS223J
	R 1403	(A,109,44)	RS1/16SS123J	R 1647	(A,48,61)	RS1/16SS223J
	R 1404	(A,108,44)	RS1/16SS224J	R 1648	(A,108,113)	RS1/16SS103J
	R 1405	(A,103,54)	RS1/16SS5R6J	R 1649	(A,71,45)	RS1/16SS0R0J
	R 1406	(A,113,48)	RS1/16SS6800D	R 2001	(B,24,25)	RS1/16SS750J
■	R 1407	(A,111,47)	RS1/16SS1302D	R 2012	(B,61,33)	RS1/16SS750J
	R 1408	(A,111,45)	RS1/16SS6801D	R 2013	(B,64,31)	RS1/10SR0R0J
	R 1409	(A,109,54)	RS1/16SS5R6J	R 2014	(B,67,31)	RS1/10SR0R0J
	R 1411	(A,104,47)	RS1/16SS102J	R 2017	(B,68,35)	RS1/16SS223J
	R 1412	(A,117,68)	RS1/16SS102J	R 2018	(B,67,34)	RS1/16SS223J

1

2

3

4

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
R 2031	(B,49,35)	RS1/16SS821J		R 6016	(A,49,35)	RS1/10SR0R0J	
R 2032	(B,55,34)	RS1/16SS472J		R 6017	(A,46,37)	RS1/10SR0R0J	
R 2033	(B,51,29)	RS1/16SS223J		R 6018	(A,40,18)	RS1/8SQ0R0J	
R 2034	(B,55,33)	RS1/16SS472J		R 6019	(B,59,25)	RS1/16SS0R0J	A
R 2035	(B,53,29)	RS1/16SS223J		CAPACITORS			
R 2036	(B,55,32)	RS1/16SS821J					
R 2041	(A,161,22)	RS1/10SR102J					
R 2042	(A,163,28)	RS1/10SR102J					
R 2052	(B,103,25)	RAB4CQ750J					
R 2055	(A,106,25)	RS1/16SS223J					
R 2056	(A,111,28)	RS1/10SR102J					
R 2057	(A,113,28)	RS1/10SR102J					
R 2058	(A,115,26)	RS1/10SR471J					
R 2059	(A,118,26)	RS1/10SR471J					
R 2061	(A,107,25)	RS1/16SS223J		C 101	(A,110,114)	CKSSYB104K16	
R 2071	(B,154,29) (C,D,E,F,G)	RS1/16SS150J		C 103	(A,92,111) 10 uF	CCG1236	
R 2072	(B,156,28) (C,D,E,F,G)	RS1/16SS470J		C 105	(A,102,110)	CKSRYB105K16	
R 2073	(B,153,32) (C,D,E,F,G)	RS1/16SS101J		C 110	(B,94,109)	CKSRYB224K16	
R 2074	(B,154,30) (C,D,E,F,G)	RS1/16SS101J		C 111	(B,96,109)	CKSRYB224K16	
R 2075	(B,153,34) (C,D,E,F,G)	RS1/16SS102J		C 112	(B,98,109)	CKSRYB224K16	
R 2077	(B,145,30) (C,D,E,F,G)	RS1/16SS181J		C 113	(B,99,109)	CKSRYB224K16	
R 2078	(B,134,25) (C,D,E,F,G)	RS1/16SS181J		C 121	(A,86,99) 3 300 uF/16 V	CCH2027	B
R 2079	(B,136,26) (C,D,E,F,G)	RS1/16SS223J		C 131	(A,97,96)	XCEVW101M16	
R 2080	(B,144,30) (C,D,E,F,G)	RS1/16SS223J		C 132	(A,101,106)	CKSQYB105K25	
R 2081	(B,142,29) (C,D,E,F,G)	RS1/16SS102J		C 134	(A,79,110)	CKSRYB104K50	
R 2082	(B,135,27) (C,D,E,F,G)	RS1/16SS102J		C 152	(B,56,102)	CKSRYB104K50	
R 2091	(A,52,48)	RS1/16SS681J		C 153	(B,56,100)	CKSRYB474K16	
R 2092	(A,55,48)	RS1/10SR473J		C 156	(B,62,120)	CKSRYB105K10	
R 2093	(A,54,49)	RS1/10SR473J		C 158	(B,66,125)	CKSRYB104K50	
R 2101	(B,118,53)	RS1/16SS102J		C 181	(B,53,95)	CKSRYB105K10	
R 2122	(A,154,54)	RS1/16SS102J		C 182	(B,49,96)	CKSRYB105K10	
R 2123	(A,154,55)	RS1/16SS102J		C 183	(B,28,95)	CKSRYB105K10	
R 2128	(A,145,55)	RS1/16SS681J		C 184	(B,49,94) (C,D,E,F,G)	CKSRYB105K10	C
R 2131	(A,144,55)	RS1/16SS681J		C 185	(B,28,92) (C,D,E,F,G)	CKSRYB105K10	
R 2133	(A,146,55)	RS1/16SS681J		C 186	(B,53,93) (C,D,E,F,G)	CKSRYB105K10	
R 2135	(A,147,55)	RS1/16SS681J		C 187	(B,32,94) (C,D,E,F,G)	CKSRYB105K10	
R 2139	(A,159,50)	RS1/16SS102J		C 188	(B,49,92)	CKSRYB105K10	
R 2142	(A,160,61)	RS1/16SS0R0J		C 189	(B,49,91)	CKSRYB105K10	
R 2146	(B,145,54)	RS1/16SS101J		C 190	(B,48,102)	CKSRYB105K10	
R 2148	(B,130,54)	RS1/16SS101J		C 191	(B,44,104)	CKSRYB105K10	
R 2161	(A,108,30)	RS1/10SR272J		C 192	(B,32,101)	CKSRYB105K10	
R 2162	(A,110,30)	RS1/10SR272J		C 193	(B,32,99)	CKSRYB105K10	
R 2163	(A,109,32)	RS1/10SR562J		C 194	(B,32,98)	CKSRYB105K10	
R 2164	(B,42,38)	RS1/16SS102J		C 195	(B,51,89)	CKSQYB225K10	
R 2165	(B,116,24)	RS1/16SS103J		C 196	(B,45,88)	CKSRYB474K16	
R 2253	(A,133,43)	RS1/16SS0R0J		C 197	(A,37,91) 10 uF	DCH1201	
R 2254	(A,70,51)	RS1/16SS0R0J		C 198	(B,41,88)	CKSSYB104K10	
R 6001	(A,45,14)	RS1/16SS221J		C 199	(A,39,93) 10 uF	DCH1201	
R 6002	(A,49,18)	RS1/16SS751J		C 200	(B,32,92)	CKSSYB104K10	
R 6003	(A,62,14)	RS1/16SS152J		C 202	(B,39,105)	CKSRYB104K16	
R 6004	(A,60,20)	RS1/16SS105J		C 203	(A,42,106) 10 uF	CCG1236	
R 6005	(A,58,9)	RS1/16SS105J		C 204	(A,42,108) 10 uF	CCG1236	
R 6006	(A,64,24)	RS1/16SS471J		C 205	(B,50,100)	CCSQCH223J50	
R 6007	(A,65,23)	RS1/16SS330J		C 206	(B,50,98)	CCSQCH223J50	E
R 6008	(A,66,30)	RS1/16SS681J		C 210	(B,28,93)	CKSRYB105K10	
R 6009	(A,62,38)	RS1/4SA5R6J		C 212	(B,53,98)	CKSRYB105K10	
R 6010	(B,58,33)	RS1/16SS102J		C 213	(B,32,96)	CKSRYB105K10	
R 6011	(A,45,29)	RS1/16SS0R0J		C 233	(B,47,59)	CCSSCH101J50	
R 6014	(A,64,38)	RS1/4SA5R6J		C 234	(B,37,61)	CKSSYB105K6R3	
R 6015	(A,66,38)	RS1/4SA5R6J		C 237	(B,39,61)	CKSRYB105K10	
				C 238	(B,52,60)	CCSSCH101J50	
				C 239	(B,53,62)	CKSRYB104K16	
				C 243	(A,59,69)	CKSRYB104K16	
				C 246	(A,55,64)	CCSSCH101J50	F
				C 247	(A,56,59)	CKSQYB225K10	
				C 261	(B,39,69)	CKSRYB105K10	
				C 262	(B,48,70)	CKSRYB105K10	

1

Circuit Symbol and No.

2

Part No.

3

Circuit Symbol and No.

4

Part No.

C 263 (B,48,79) CKSRYB105K10

C 482 (B,132,87)

CKSSYB102K50

C 264 (B,48,84) CKSRYB105K10

C 483 (B,131,90)

CKSSYB103K25

C 265 (B,32,78) CKSSYB104K16

C 484 (A,127,90) 10 uF

DCH1201

C 266 (B,33,75) CKSSYB104K16

C 485 (B,136,99)

CKSSYB104K10

C 267 (B,33,76) CKSSYB104K16

C 486 (A,134,89) 10 uF

DCH1201

C 268 (B,33,77) CKSSYB104K16

C 487 (B,137,99)

CKSSYB104K10

C 269 (B,32,79) CKSSYB104K16

C 488 (B,135,79) 10 uF

DCH1201

C 270 (B,32,80) CKSSYB104K16

C 489 (B,137,82)

CKSRYB105K16

C 271 (B,32,81) CKSSYB104K16

C 490 (A,134,85)

CKSSYB104K10

C 272 (B,34,82) CKSSYB104K16

C 491 (B,138,82)

CKSSYB104K10

C 273 (B,38,84) CKSSYB104K16

C 492 (B,139,99)

CKSSYB104K10

C 274 (B,33,85) 10 uF

DCH1201

C 493 (B,140,82)

CKSSYB104K10

C 275 (B,40,84) CKSSYB104K16

C 494 (B,142,99)

CKSSYB104K10

C 276 (B,37,84) CKSSYB104K16

C 495 (B,143,99)

CKSSYB104K10

C 277 (B,38,86) 10 uF

DCH1201

C 496 (B,144,78)

CCSSCH4R0C50

C 279 (B,43,84) CKSSYB104K16

C 497 (B,141,81)

CCSSCH5R0C50

C 280 (B,38,69) CKSRYB105K10

C 498 (B,148,88)

CKSSYB104K10

C 281 (B,42,85) 10 uF

DCH1201

C 499 (B,148,89)

CKSSYB104K10

C 282 (B,41,70) CKSRYB105K10

C 500 (B,148,85)

CKSSYB103K16

C 283 (B,43,70) CKSRYB105K10

C 501 (A,134,87) 10 uF

DCH1201

C 284 (B,44,70) CKSRYB105K10

C 502 (B,131,87)

CKSSYB103K16

C 285 (B,46,70) CKSRYB105K10

C 503 (B,131,94)

CKSSYB103K16

C 286 (B,38,71) CKSSYB104K16

C 504 (B,135,82)

CKSSYB103K16

C 287 (A,42,78) CKSRYB105K10

C 511 (A,134,84)

CKSSYB103K16

C 288 (B,48,69) CKSRYB105K10

C 512 (A,130,92)

CKSRYB105K10

C 289 (B,48,72) CKSRYB105K10

C 513 (A,131,87)

CKSRYB105K10

C 290 (B,48,73) CKSRYB105K10

C 514 (A,137,91)

CKSSYB104K10

C 295 (A,45,88) CKSSYB271K50

C 521 (B,107,41)

CKSSYB104K10

C 299 (B,48,75) CKSRYB105K10

C 522 (B,103,45)

CKSSYB104K10

C 300 (B,48,76) CKSRYB105K10

C 523 (B,101,48)

CKSSYB104K10

C 301 (B,48,78) CKSRYB105K10

C 524 (A,103,41)

CKSSYB104K10

C 302 (B,48,81) CKSRYB105K10

C 526 (B,103,40)

CKSSYB104K10

C 304 (B,33,73) CKSSYB104K16

C 530 (B,90,44) 10 uF

DCH1201

C 305 (B,33,72) CKSSYB104K16

C 531 (B,97,40)

CKSSYB104K10

C 306 (B,48,82) CKSRYB105K10

C 532 (B,97,44)

CKSSYB104K10

C 307 (B,48,85) CKSRYB105K10

C 533 (A,99,41)

CKSSYB104K10

C 309 (B,46,86) CKSSYB104K16

C 571 (A,20,16) 0.1 uF

CCG1321

C 310 (B,33,74) CKSSYB104K16

C 572 (A,18,23) 0.1 uF

CCG1321

C 311 (B,32,83) CKSSYB104K16

C 576 (A,47,24)

CCSRCH100D50

C 312 (B,32,82) CKSSYB104K16

C 591 (A,82,41)

CKSRYB105K10

C 401 (B,168,22) CKSSYB104K10

C 592 (A,85,41)

CKSRYB105K10

C 402 (B,166,22) CKSSYB104K10

C 593 (A,89,41)

CKSRYB105K10

C 421 (A,153,76) CKSQYB475K6R3

C 594 (A,93,41)

CKSRYB105K10

C 422 (A,153,79) CKSQYB475K6R3

C 595 (A,77,53)

CKSSYB105K6R3

C 423 (A,148,72) CKSSYB104K10

C 596 (A,91,41)

CKSRYB105K10

C 424 (A,149,81) 10 uF

DCH1201

C 597 (A,87,41)

CKSRYB105K10

C 425 (A,145,85) CKSQYB475K6R3

C 598 (A,84,41)

CKSRYB105K10

C 426 (A,153,81) CKSQYB475K6R3

C 599 (A,97,44)

CKSRYB105K10

C 427 (A,158,88) CKSSYB104K10

C 601 (A,33,59)

CCSSCH101J50

C 428 (A,158,78) 10 uF

DCH1201

C 602 (A,31,59)

CCSSCH101J50

C 472 (A,125,85) CKSSYB104K10

C 603 (A,32,59)

CCSSCH101J50

C 473 (B,130,91) CKSSYB224K6R3

C 604 (B,57,39)

CKSRYB105K10

C 474 (B,130,92) CKSSYB224K6R3

C 605 (A,55,40)

CCSSCH180J50

C 475 (B,131,91) CKSSYB224K6R3

C 606 (A,54,37)

CCSSCH180J50

C 476 (B,130,88) CKSRYB105K16

C 607 (B,51,50)

CKSSYB104K10

C 477 (B,129,93) CKSRYB105K16

C 608 (B,53,29)

CKSSYB104K10

C 478 (B,132,94) CKSSYB102K50

C 609 (B,55,37)

CKSSYB104K10

C 479 (B,131,96) CKSRYB105K16

C 610 (B,49,36)

CKSQYB475K6R3

C 480 (B,135,83) CKSSYB102K50

C 611 (A,52,27)

CKSSYB104K10

C 481 (B,132,85) CKSRYB105K16

C 613 (A,39,27)

CKSSYB104K10

5		6		7		8		
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>		
C 614	(B,39,55)	CKSSYB104K10		C 902	(B,20,73)	CKSQYB225K10		
				C 903	(B,26,69)	CKSSYB681K50		
C 615	(B,30,36)	CKSSYB104K10						
C 619	(B,83,22)	CKSSYB104K10		C 904	(B,19,76)	CKSQYB225K10		A
C 626	(A,43,25)	CKSSYB221K50		C 905	(B,21,80)	CKSQYB225K10		
C 702	(A,72,25)	CKSQYB475K6R3		C 906	(B,25,78)	CKSSYB681K50		
C 703	(A,70,25)	CKSQYB475K6R3		C 907	(B,28,74)	CKSRYB104K16		
				C 912	(A,18,81)	CKSSYB104K10		
C 704	(A,93,16)	CKSRYB105K10						
C 705	(B,53,27)	CKSSYB222K50		C 913	(A,22,80)	XCEVW101M16		
C 707	(A,68,24)	CCSSCH100D50		C 918	(B,18,84)	CCSSCK2R0C50		
C 711	(A,84,24)	CKSRYB105K10		C 919	(B,21,60)	CCSSCH220J50		
C 761	(A,141,118)	CKSRYB104K50		C 951	(B,169,102) 10 uF	DCH1201		
C 772	(B,148,111) (C,D,E,F,G)	CKSSYB104K10		C 952	(B,155,98)	CKSSYB104K10		
C 781	(A,29,112) 4.7 uF	CCG1201		C 953	(B,163,104)	CKSSYB104K10		
C 782	(A,43,112) 4.7 uF	CCG1201		C 954	(B,161,104)	CKSSYB104K10		B
C 783	(A,27,112) 4.7 uF	CCG1201		C 955	(B,167,98)	CKSSYB103K16		
C 784	(A,38,112) 4.7 uF	CCG1201		C 956	(B,155,96)	CKSSYB103K16		
C 785	(A,33,112) 4.7 uF	CCG1201		C 957	(B,153,96) 10 uF	DCH1201		
C 786	(A,45,112) 4.7 uF	CCG1201		C 958	(B,154,96)	CKSSYB103K16		
C 788	(A,22,113)	CKSSYB102K50		C 959	(B,160,92)	CKSSYB103K16		
C 831	(B,122,115)	CKSSYB104K16		C 960	(B,155,101) 10 uF	DCH1201		
C 832	(B,125,103) 10 uF	CCG1236		C 961	(B,167,94)	CKSSYB102K50		
C 833	(B,114,109)	CKSRYB105K10		C 1002	(A,157,73)	CCSSCH100D50		
C 834	(B,117,116)	CKSSYB102K50		C 1003	(B,168,68)	CCSSCH120J50		
C 835	(B,114,113)	CKSSYB472K50		C 1004	(B,130,68) 4.7 uF	CCG1201		
C 836	(B,120,117)	CKSSYB104K16		C 1005	(B,128,65) 4.7 uF	CCG1201		C
C 837	(B,114,105)	CCSSCH471J50		C 1006	(B,131,59) 4.7 uF	CCG1201		
C 838	(B,116,104)	CKSSYB222K50		C 1007	(B,131,60) 4.7 uF	CCG1201		
C 839	(B,116,105)	CCSSCH270J50		C 1008	(B,132,64) 4.7 uF	CCG1201		
C 840	(A,116,108)	XCEVW470M16		C 1009	(B,136,66)	CKSSYB104K10		
C 841	(B,118,105)	CKSSYB104K16		C 1010	(B,136,64)	CKSSYB104K10		
C 843	(B,129,104) 22 uF	DCH1256		C 1011	(B,135,60)	CKSSYB104K10		
C 844	(B,122,100)	CKSSYB104K16		C 1012	(B,140,62)	CKSSYB104K10		
C 845	(B,122,89) 10 uF	CCG1236		C 1013	(B,139,62)	CKSSYB104K10		
C 846	(A,135,100)	XCEVW101M16		C 1014	(B,152,58)	CCSSCH180J50		
C 847	(B,113,94)	CKSRYB105K10		C 1015	(A,155,69)	CCSSCH100D50		
C 848	(B,116,101)	CKSSYB102K50		C 1016	(B,163,67)	CCSSCH6R0D50		D
C 853	(A,153,119)	CKSRYB104K50		C 1017	(B,133,68)	CKSSYB104K10		
C 854	(A,153,114)	CKSRYB104K50		C 1018	(B,135,64)	CKSSYB104K10		
C 855	(B,117,90)	CKSSYB104K16		C 1019	(B,134,59)	CKSSYB104K10		
C 857	(A,144,108)	CKSSYB104K16		C 1020	(B,133,61)	CKSSYB104K10		
C 858	(B,130,99) 22 uF	DCH1256		C 1021	(B,134,63)	CKSSYB104K10		
C 859	(A,135,108)	XCEVW101M16		C 1026	(A,161,73)	CKSSYB104K10		
C 860	(A,139,113)	CKSSYB104K16		C 1027	(B,163,72)	CKSSYB104K10		
C 861	(B,114,98)	CKSSYB472K50		C 1028	(B,147,66)	CKSSYB104K10		
C 862	(B,119,102)	CKSSYB104K16		C 1029	(B,147,67) 4.7 uF	CCG1201		
C 863	(B,113,90)	CCSSCH471J50		C 1030	(B,143,67) 4.7 uF	CCG1201		
C 864	(B,116,89)	CKSSYB222K50		C 1031	(B,143,66)	CKSSYB104K10		E
C 865	(B,115,90)	CCSSCH270J50		C 1032	(B,141,62)	CKSSYB104K10		
C 866	(A,116,98)	XCEVW470M16		C 1033	(B,142,62)	CKSSYB104K10		
C 871	(B,118,36)	CCSSCH100D50		C 1034	(A,129,67)	CCSSCH120J50		
C 872	(B,116,36)	CCSSCH100D50		C 1035	(A,125,65)	CCSSCH8R0D50		
C 873	(B,107,36)	CCSSCH100D50		C 1036	(B,147,62)	CKSSYB104K10		
C 874	(B,103,36)	CCSSCH100D50		C 1037	(B,148,62)	CKSSYB104K10		
C 875	(B,102,36)	CCSSCH100D50		C 1038	(B,149,62)	CKSSYB104K10		
C 876	(B,126,18)	CKSSYB104K10		C 1039	(B,138,60)	CKSSYB104K10		
C 877	(B,123,36)	CKSSYB104K10		C 1040	(B,136,59)	CKSSYB104K10		
C 878	(B,126,13)	CKSSYB104K10		C 1041	(A,129,60)	CCSSCH100D50		F
C 879	(B,117,42)	CKSSYB104K10		C 1042	(B,150,59)	CKSSYB104K10		
C 880	(B,127,9)	CKSRYB104K16		C 1043	(B,150,58)	CKSSYB104K10		
C 901	(B,21,70)	CKSQYB225K10		C 1044	(B,150,57)	CKSSYB104K10		

1

Circuit Symbol and No.

2

Part No.

3

Circuit Symbol and No.

4

Part No.

C 1045 (A,125,57)
C 1046 (B,150,56)

CCSSCH9R0D50
CKSSYB104K10

C 1208 (B,131,28)
C 1209 (A,126,26)

CKSSYB104K10
CKSSYB104K10

A

C 1047 (B,136,56)
C 1048 (B,150,55)
C 1049 (B,136,55)
C 1050 (B,136,54)
C 1051 (B,136,53)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

C 1210 (A,128,19)
C 1211 (B,135,33)
C 1212 (B,135,31)
C 1213 (B,133,31)
C 1214 (B,135,30)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

C 1052 (B,136,52)
C 1053 (B,150,52)
C 1054 (B,136,51)
C 1055 (B,150,51)
C 1056 (B,136,50)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

C 1215 (B,137,29)
C 1216 (B,133,28)
C 1217 (A,137,26)
C 1218 (A,137,23)
C 1219 (B,154,26)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

B

C 1057 (B,150,50)
C 1058 (B,126,48) 4.7 uF
C 1059 (B,150,46)
C 1060 (B,148,48)
C 1061 (B,147,48)

CKSSYB104K10
CCG1201
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

C 1220 (B,154,24)
C 1221 (B,150,33)
C 1222 (B,150,31)
C 1223 (B,153,31)
C 1224 (B,150,30)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

C 1062 (B,144,48)
C 1063 (B,143,48)
C 1064 (B,142,48)
C 1065 (B,141,48)
C 1066 (B,140,48)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

C 1225 (B,151,28)
C 1226 (B,152,27)
C 1227 (A,148,25)
C 1228 (A,150,18)
C 1229 (B,157,33)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

C

C 1067 (B,139,48)
C 1068 (B,134,46)
C 1069 (B,147,50)
C 1070 (B,146,48)
C 1071 (B,147,57)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

C 1230 (B,157,31)
C 1231 (B,155,31)
C 1232 (B,157,30)
C 1233 (B,157,28)
C 1234 (B,156,28)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

C 1072 (B,140,59)
C 1073 (B,138,57)
C 1074 (B,140,51)
C 1075 (B,147,56)
C 1076 (B,141,51)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

C 1235 (A,159,26)
C 1236 (A,159,23)
C 1237 (B,130,24)
C 1238 (B,155,24)
C 1239 (B,131,23) 10 uF

CKSSYB104K10
CKSSYB104K10
CKSSYB105K6R3
CKSSYB105K6R3
DCH1201

D

C 1078 (B,147,55)
C 1079 (B,144,51)
C 1080 (B,147,54)
C 1081 (B,145,51)
C 1082 (B,147,53)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

C 1240 (B,157,25) 10 uF
C 1241 (B,161,38)
C 1301 (A,38,64)
C 1302 (A,54,76)
C 1303 (A,22,69)

DCH1201
CKSSYB104K10
CKSSYB103K16
CKSSYB104K16
XCEVW470M16

C 1083 (B,138,53)
C 1084 (B,145,59)
C 1085 (B,138,54)
C 1087 (B,144,59)
C 1088 (B,141,59)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

C 1304 (A,31,65) 0.1 uF
C 1306 (A,45,68)
C 1307 (A,119,66)
C 1311 (A,168,83) 0.1 uF
C 1312 (A,168,93)

CCG1321
XCEVW331M16
CKSRYB102K50
CCG1321
XCEVW101M16

E

C 1089 (B,138,56)
C 1090 (B,138,55)
C 1093 (B,145,61) 4.7 uF
C 1094 (B,161,72)
C 1095 (B,138,51)

CKSSYB104K10
CKSSYB104K10
CCG1201
CKSSYB104K10
CKSSYB104K10

C 1313 (A,169,78)
C 1314 (A,165,77)
C 1321 (B,106,73)
C 1322 (A,97,77)
C 1323 (A,98,77)

CKSYB105K35
CKSYB475K16
CKSSYB102K50
CKSSYB102K50
CKSSYB104K16

C 1096 (B,138,48)
C 1097 (B,136,48)
C 1098 (B,145,48)
C 1099 (B,141,46) 10 uF
C 1105 (B,120,49) 10 uF

CKSSYB104K10
CKSSYB105K6R3
CKSSYB105K6R3
DCH1201
DCH1201

C 1324 (A,99,77) 10 uF
C 1325 (A,102,77) 10 uF
C 1326 (A,104,76) 47 uF
C 1327 (A,82,76) 10 uF
C 1328 (A,79,76) 10 uF

DCH1201
DCH1201
CCG1233
CCG1236
CCG1236

F

C 1108 (A,129,41)
C 1201 (B,129,26)
C 1202 (B,129,24)
C 1203 (B,128,33)
C 1204 (B,128,31)

CCSSCH560J50
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

C 1329 (B,91,82)
C 1330 (B,93,79)
C 1331 (B,90,82)
C 1332 (B,90,79)
C 1333 (B,84,73)

CCSSCH561J50
CKSSYB104K10
CKSSYB822K16
CCSSCH8R0D50
CKSYB105K35

C 1205 (B,131,31)
C 1206 (B,128,30)
C 1207 (B,128,28)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

C 1334 (B,88,80)
C 1335 (B,88,67)
C 1336 (B,90,67)

CKSSYB104K16
CKSSYB104K16
CCSSCH8R0D50

1

2

3

4

5		6		7		8		
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>		
C 1337	(B,96,67)	CKSSYB103K16		C 1449	(B,70,69)	CCSSCH271J50		
C 1338	(B,89,65)	CKSSYB103K16		C 1450	(B,62,65)	CKSSYB104K16		
C 1339	(B,93,66)	CKSRYB105K10		C 1463	(A,25,91)	XCEVW221M10		A
C 1340	(B,91,65)	CCSSCH471J50		C 1464	(A,30,81)	CKSQYB225K10		
C 1341	(A,66,82)	CKSSYB102K50		C 1465	(A,31,84)	CKSRYB105K10		
C 1342	(A,68,82) 10 uF	CCG1236		C 1601	(B,150,75)	CKSSYB103K16		
C 1343	(A,79,70) 10 uF	CCG1236		C 1602	(B,149,74)	CKSRYB105K10		
C 1344	(A,59,83) 3 300 uF/16 V	CCH2027		C 1603	(B,156,85)	CKSSYB105K6R3		
C 1345	(A,82,70) 10 uF	CCG1236		C 1604	(B,153,85)	CKSRYB103K50		
C 1347	(A,104,69) 47 uF	CCG1233		C 1606	(A,45,95)	CKSRYB104K16		
C 1348	(A,99,69) 10 uF	DCH1165		C 1607	(A,41,98)	CKSRYB104K16		
C 1349	(A,102,69) 10 uF	DCH1165		C 1608	(A,49,101)	CKSRYB104K16		
C 1350	(A,98,69)	CKSSYB104K16		C 1611	(A,53,61)	CKSQYB225K10		
C 1351	(A,97,69)	CKSSYB102K50		C 1612	(A,51,61)	CKSQYB225K10		B
C 1352	(A,96,69)	CCSSCH101J50		C 1618	(A,50,62)	CKSQYB225K10		
C 1361	(A,81,58)	CKSRYB105K10		C 1619	(A,56,73)	CKSQYB225K10		
C 1362	(A,91,58)	CKSRYB105K10		C 1620	(B,23,60)	CKSRYB105K10		
C 1363	(A,93,59) 10 uF	DCH1201		C 2001	(B,22,22)	CKSRYB104K50		
C 1365	(A,95,21)	CKSRYB104K16		C 2011	(B,70,31)	CKSRYB104K50		
C 1366	(A,90,23)	CEAT471M16		C 2012	(B,69,31)	CCSSCH101J50		
C 1371	(A,117,18)	CKSQYB475K6R3		C 2031	(B,52,35) 4.7 uF	CCG1201		
C 1372	(A,121,18)	CKSQYB475K6R3		C 2032	(B,57,33) 4.7 uF	CCG1201		
C 1381	(B,103,92)	CKSQYB475K6R3		C 2033	(B,48,35)	CCSSCH101J50		
C 1382	(B,94,100)	CKSQYB475K6R3		C 2041	(A,162,25)	CKSRYB104K50		
C 1385	(B,97,101)	CKSRYB105K10		C 2042	(A,166,26)	CKSRYB104K50		C
C 1386	(B,97,103)	CKSRYB105K10		C 2073	(B,153,35) (C,D,E,F,G)	CKSSYB104K10		
C 1391	(A,117,90)	CKSQYB475K6R3		C 2074	(B,150,27) (C,D,E,F,G)	CKSRYB104K50		
C 1392	(A,115,79)	CKSQYB475K6R3		C 2075	(B,150,28) (C,D,E,F,G)	CCSSCH101J50		
C 1393	(A,115,81) 10 uF	DCH1201		C 2093	(A,53,46)	CKSRYB104K16		
C 1396	(A,127,71) 10 uF	DCH1201		C 2101	(B,121,49) 4.7 uF	CCG1201		
C 1397	(A,127,73) 10 uF	DCH1201		C 2102	(B,119,51)	CKSRYB105K10		
C 1401	(A,112,53) 10 uF	DCH1201		C 2103	(A,119,45)	XCEVW220M16		
C 1402	(A,102,52) 10 uF	DCH1201		C 2104	(A,110,41)	CKSRYB105K10		
C 1403	(A,108,43)	CKSSYB392K50		C 2113	(B,126,26)	CCSSCH101J50		
C 1404	(A,107,44)	CKSSYB104K10		C 2114	(B,129,25)	CCSSCH101J50		D
C 1405	(A,117,54) 10 uF	DCH1201		C 2126	(A,129,64) 10 uF	DCH1201		
C 1406	(A,117,56) 10 uF	DCH1201		C 2127	(A,134,64) 10 uF	DCH1201		
C 1407	(A,102,51) 10 uF	DCH1201		C 2129	(A,158,59)	CKSRYB105K10		
C 1408	(A,105,54)	CKSRYB681K50		C 2134	(A,166,48)	XCEVW221M4		
C 1409	(A,111,48)	CCSSCH221J50		C 2135	(A,166,41)	XCEVW221M4		
C 1410	(A,117,53) 10 uF	DCH1201		C 2139	(A,141,54) 10 uF	DCH1201		
C 1411	(A,112,54)	CKSRYB103K50		C 2141	(A,136,47)	CKSSYB104K10		
C 1412	(A,109,74) 10 uF	DCH1201		C 2144	(B,147,55)	CKSSYB104K10		
C 1414	(A,119,71) 10 uF	DCH1201		C 2145	(A,134,48) 10 uF	DCH1201		
C 1415	(A,121,71) 10 uF	DCH1201		C 2169	(A,105,27)	CKSQYB225K16		
C 1416	(A,112,51) 10 uF	DCH1201		C 2170	(A,105,29)	CKSQYB225K16		E
C 1417	(A,102,49) 10 uF	DCH1201		C 2171	(A,105,31)	CKSQYB225K16		
C 1431	(A,100,15)	CKSSYB102K50		C 2172	(A,105,33)	CKSQYB225K16		
C 1432	(A,98,9)	XCEVW101M16		C 2173	(A,108,34)	CKSQYB225K16		
C 1433	(A,105,8)	CKSRYB105K10		C 6001	(A,57,10)	CCSSCH330J50		
C 1434	(A,101,17)	CKSSYB104K10		C 6002	(A,49,14)	CCSSCH6R0D50		
C 1435	(A,111,27)	CKSSYB103K16		C 6003	(A,47,14)	CKSSYB103K16		
C 1436	(A,78,65)	XCEVW100M16		C 6004	(A,55,15)	CKSSYB104K10		
C 1437	(A,75,60)	CKSSYB103K16		C 6005	(A,57,18)	CKSSYB104K10		
C 1441	(B,69,84)	CKSSYB104K16		C 6006	(A,48,17)	CKSSYB103K16		
C 1444	(B,68,67)	CKSSYB103K16		C 6007	(A,56,18)	CKSSYB104K10		
C 1445	(B,68,76) 4.7 uF	CCG1222		C 6008	(A,64,13)	CCSSCJ3R0C50		F
C 1446	(B,68,69)	CKSRYB104K16		C 6009	(A,50,20)	CKSSYB103K16		
C 1447	(B,65,65)	CKSSYB104K16		C 6010	(A,56,19)	CKSSYB103K16		
C 1448	(B,64,64) 4.7 uF	CCG1222		C 6011	(A,59,18)	CKSSYB103K16		

1

2

3

4

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

C 6012 (A,60,15) 10 uF

DCH1201

Q 1103 (B,10,63) Transistor

2SB1132

C 6013 (A,51,18)

CKSSYB103K16

Q 1104 (B,22,54) Transistor

2SB1132

C 6014 (A,52,17)

CKSRYB105K10

L 1501 (A,54,31) Inductor

CTF1743

C 6015 (A,59,10)

CKSSYB103K16

L 1511 (A,48,17) Chip Beads

VTL1126

C 6016 (A,67,33)

CKSRYB104K16

L 1902 (A,17,17) Inductor

CTF1487

C 6017 (A,60,19)

CKSSYB223K16

L 1903 (B,63,16) Inductor

CTF1558

C 6018 (A,50,19)

CKSSYB223K16

L 1904 (A,68,18) Ferrite Bead

CTF1528

C 6020 (B,59,32)

CKSSYB102K50

X 1501 (B,48,18) Oscillator 27.000 MHz

CSS1823

C 6021 (A,64,20) 10 uF

DCH1201

F 1001 (A,14,19) Chip EMI Filter

DTF1106

C 6022 (A,63,23)

CKSSYB104K10

F 1002 (B,63,18) Chip EMI Filter

DTL1106

C 6023 (A,66,23)

CCSSCH101J50

S 1 (A,47,55) Spring Switch(HOME)

CSN1080

C 6024 (A,63,26)

CKSSYB104K10

S 3 (B,25,13) Spring Switch(12EJ)

CSN1081

C 6025 (A,65,24)

CKSSYB103K16

VR1101 (A,7,63) Semi-fixed 6.8 kohm(B)

CCP1447

C 6026 (A,66,29)

CCSSCH820J50

VR1102 (A,7,60) Semi-fixed 15 kohm(B)

CCP1449

C 6027 (A,64,30) 2.2 uF

CCG1205

CN1101 (A,21,63) Connector

CKS6331

C 6030 (A,64,34)

CKSSYB104K10

CN1952 (A,42,11) Connector

CKS6025

C 6031 (A,62,33)

CKSSYB104K10

RESISTORS

C 6032 (A,61,34)

CKSSYB104K10

R 1004 (B,12,20)

RS1/16SS4702D

C 6033 (A,57,34)

CKSSYB104K10

R 1007 (B,12,21)

RS1/16SS6801D

C 6034 (A,52,34)

CKSSYB104K10

R 1019 (B,34,7)

RS1/16SS101J

C 6035 (A,52,35) 2.2 uF

CCG1205

R 1025 (B,36,6)

RS1/16SS101J

C 6036 (A,49,33)

CKSSYB104K10

R 1027 (A,40,18)

RS1/16SS101J

C 6038 (A,46,34) 2.2 uF

CCG1205

C 6040 (A,42,32)

CCSSCH100D50

R 1101 (B,15,57)

RS1/16SS104J

C 6041 (A,40,27)

CCSSCH100D50

R 1102 (B,10,56)

RS1/16SS104J

C 6042 (A,46,27)

CKSSYB104K10

R 1103 (B,14,61)

RS1/16SS4300F

C 6043 (B,43,12)

CKSSYB102K50

R 1104 (B,11,59)

RS1/16SS5100F

C 6044 (B,40,11)

CKSSYB102K50

R 1105 (B,17,54)

RS1/16SS4300F

C 6045 (A,43,24)

CKSRYB105K10

R 1106 (B,10,57)

RS1/16SS5600F

C 6046 (A,47,24)

CKSSYB224K6R3

R 1109 (B,6,57)

RS1/16SS3R3J

C 6047 (A,47,22)

CKSRYB224K16

R 1110 (B,16,54)

RS1/16SS3R3J

C 6048 (A,48,22)

CKSSYB223K16

R 1111 (B,6,63)

RS1/10SR3R3J

C 6049 (A,56,15)

CKSSYB223K16

R 1112 (B,5,58)

RS1/10SR3R3J

C 6052 (A,64,28)

CKSSYB104K10

R 1113 (B,15,59)

RS1/10SR3R9J

C 6056 (B,41,10)

CCSSCH100D50

R 1114 (B,19,57)

RS1/10SR3R3J

C 6057 (B,44,11)

CCSSCH100D50

R 1115 (B,6,61)

RS1/10SR2R7J

C 6058 (A,45,11)

CKSSYB103K16

R 1116 (B,6,62)

RS1/10SR2R7J

C 6059 (A,38,17)

CKSSYB103K16

R 1117 (B,17,59)

RS1/10SR3R9J

C 6063 (A,44,22)

CKSSYB103K16

R 1118 (B,16,59)

RS1/10SR3R9J

R 1223 (A,42,50)

RS1/16SS561J

R 1225 (B,29,8)

RS1/16SS471J

R 1251 (A,5,48)

RS1/16SS333J

R 1252 (A,5,47)

RS1/16SS473J

R 1253 (A,5,46)

RS1/16SS333J

R 1254 (A,5,45)

RS1/16SS473J

R 1255 (A,21,48)

RS1/16SS183J

R 1256 (A,21,46)

RS1/16SS752J

R 1257 (B,8,37)

RS1/16SS221J

IC 1002 (B,15,13) Regulator IC

S-1133B50-U5

R 1258 (A,19,39)

RS1/16SS221J

IC 1003 (B,37,11) IC

S-1200B50-M5

R 1401 (B,34,28)

RS1/16SS221J

IC 1004 (B,64,28) IC

NJM2855DL1-33

R 1402 (B,34,47)

RS1/16SS104J

IC 1251 (A,12,42) IC

BA5839FP

R 1405 (B,55,35)

RS1/16SS104J

IC 1401 (B,27,41) Flash ROM Unit

CWW5043

R 1406 (B,39,45)

RS1/16SS472J

IC 1402 (B,45,28) Flash ROM Unit

CWW5044

R 1480 (A,72,24)

RAB4CQ560J

IC 1480 (A,64,30) RAM IC

M12L64164A-5TG2Y

R 1481 (A,72,28)

RAB4CQ560J

IC 1501 (A,39,33) IC

MN2DS0018MA

R 1482 (A,72,32)

RAB4CQ560J

IC 1801 (B,34,16) D/A Converter

PCM1753DBQ

R 1483 (A,72,35)

RAB4CQ560J

IC 1953 (B,57,17) IC

S-1135D12-A6

R 1484 (A,72,39)

RAB4CQ560J

Q 1101 (B,13,59) Transistor

LSCR523UB

R 1485 (A,55,22)

RAB4CQ560J

Q 1102 (B,13,56) Transistor

LSCR523UB

C**Unit Number : YWX5033****Unit Name : DVD Core Unit****MISCELLANEOUS**

IC 1002 (B,15,13) Regulator IC

S-1133B50-U5

IC 1003 (B,37,11) IC

S-1200B50-M5

IC 1004 (B,64,28) IC

NJM2855DL1-33

IC 1251 (A,12,42) IC

BA5839FP

IC 1401 (B,27,41) Flash ROM Unit

CWW5043

IC 1402 (B,45,28) Flash ROM Unit

CWW5044

IC 1480 (A,64,30) RAM IC

M12L64164A-5TG2Y

IC 1501 (A,39,33) IC

MN2DS0018MA

IC 1801 (B,34,16) D/A Converter

PCM1753DBQ

IC 1953 (B,57,17) IC

S-1135D12-A6

Q 1101 (B,13,59) Transistor

LSCR523UB

Q 1102 (B,13,56) Transistor

LSCR523UB

AVH-X8500BHS/XNUC

1

2

3

4

5	6	7	8	
<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>	
R 1486 (A,55,28)	RAB4CQ560J	CAPACITORS		
R 1487 (A,56,37)	RAB4CQ560J	C 1001 (B,34,10)	CKSRYB105K10	
R 1488 (A,55,40)	RAB4CQ560J	C 1002 (B,12,17)	CKSSYB104K16	A
R 1489 (A,54,30)	RS1/16SS560J	C 1003 (B,15,19)	CKSSYB104K16	
		C 1004 (B,15,17) 4.7 uF	CCG1201	
R 1490 (A,72,21)	RS1/16SS560J	C 1005 (B,40,11)	CKSRYB105K16	
R 1501 (B,48,21)	RS1/16SS122J			
R 1503 (B,46,21)	RS1/16SS105J	C 1010 (B,60,23)	CKSQYB225K10	
R 1504 (A,50,17)	RS1/16SS121J	C 1011 (B,64,22)	CKSRYB105K10	
R 1505 (B,45,15)	RS1/16SS101J	C 1015 (A,25,7)	CKSSYB102K50	
		C 1016 (B,64,15)	CKSSYB102K50	
R 1506 (B,45,14)	RS1/16SS101J	C 1018 (B,14,21)	CKSSYB104K10	
R 1507 (B,43,17)	RS1/16SS101J			
R 1508 (B,42,18)	RS1/16SS221J	C 1040 (B,51,7)	CCSRCH821J50	
R 1509 (A,20,34)	RS1/16SS102J	C 1041 (B,19,11)	CCSRCH271J50	
R 1510 (A,11,29)	RS1/16SS102J	C 1101 (B,14,53) 10 uF	CCG1192	B
		C 1104 (B,7,57)	CKSSYB104K10	
R 1512 (A,55,32)	RS1/16SS470J	C 1105 (B,18,54)	CKSSYB104K10	
R 1513 (A,23,38)	RS1/16SS103J			
R 1514 (A,24,40)	RS1/16SS183J	C 1106 (B,8,66)	CKSSYB103K16	
R 1516 (A,24,36)	RS1/16SS104J	C 1107 (B,25,53)	CKSSYB103K16	
R 1517 (B,57,22)	RS1/16SS103J	C 1108 (A,19,57)	CKSSYB103K16	
		C 1109 (A,7,57)	CKSRYB224K16	
R 1518 (B,33,31)	RS1/16SS103J	C 1110 (A,17,58)	CKSSYB103K16	
R 1519 (A,24,43)	RS1/16SS102J			
R 1522 (A,21,37)	RS1/16SS104J	C 1111 (A,9,66)	CKSRYB224K16	
R 1523 (A,22,37)	RS1/16SS221J	C 1112 (B,17,52) 22 uF	DCH1256	
R 1524 (B,29,33)	RS1/16SS472J	C 1113 (B,8,58) 22 uF	DCH1256	
		C 1210 (B,77,34)	CKSSYB104K16	C
R 1525 (A,24,44)	RS1/16SS103J	C 1251 (B,12,41)	CEVW101M16	
R 1526 (A,22,40)	RS1/16SS103J			
R 1527 (A,35,49)	RS1/16SS682J	C 1252 (B,7,41) 4.7 uF	CCG1222	
R 1528 (B,19,34)	RS1/16SS103J	C 1253 (B,7,39)	CKSSYB104K16	
R 1529 (B,35,21)	RS1/16SS103J	C 1254 (A,6,38)	CKSSYB104K16	
		C 1255 (A,18,37)	CKSSYB104K16	
R 1530 (B,17,34)	RS1/16SS103J	C 1401 (B,34,27)	CKSSYB104K16	
R 1531 (B,33,30)	RS1/16SS103J			
R 1532 (A,24,42)	RS1/16SS101J	C 1403 (B,39,40)	CKSSYB104K10	
R 1533 (A,29,47)	RS1/16SS104J	C 1404 (B,40,40) 4.7 uF	CCG1201	
R 1534 (B,29,48)	RS1/16SS221J	C 1408 (B,57,27)	CKSSYB104K10	
		C 1409 (B,58,29) 4.7 uF	CCG1201	
R 1535 (A,22,44)	RS1/16SS104J	C 1410 (B,33,29)	CKSSYB104K16	D
R 1536 (B,32,48)	RS1/16SS104J			
R 1537 (A,24,46)	RS1/16SS104J	C 1480 (A,71,19)	CKSSYB104K10	
R 1538 (A,55,35)	RS1/16SS104J	C 1481 (A,72,22)	CKSSYB104K10	
R 1539 (B,33,48)	RS1/16SS104J	C 1482 (A,72,26)	CKSSYB104K10	
		C 1484 (A,72,30)	CKSSYB104K10	
R 1540 (A,26,46)	RS1/16SS221J	C 1485 (A,72,41)	CKSSYB104K10	
R 1541 (A,26,45)	RS1/16SS221J			
R 1542 (B,26,34)	RS1/16SS103J	C 1487 (A,57,29)	CKSSYB104K10	
R 1546 (A,33,49)	RS1/16SS682J	C 1488 (A,57,25)	CKSSYB104K10	
R 1601 (A,32,17)	RS1/16SS123J	C 1489 (A,64,17) 10 uF	CCG1192	
		C 1490 (A,66,18)	CKSSYB102K50	
R 1602 (A,32,18)	RS1/16SS123J	C 1501 (B,61,20) 10 uF	CCG1192	E
R 1603 (B,31,21)	RS1/16SS1002D			
R 1604 (A,23,21)	RS1/16SS105J	C 1502 (B,54,20) 10 uF	CCG1192	
R 1605 (A,22,23)	RS1/16SS105J	C 1503 (A,54,33)	CKSSYB104K10	
R 1670 (B,40,21)	RS1/16SS1002D	C 1504 (A,53,24)	CKSSYB104K10	
		C 1505 (A,53,27)	CKSSYB104K10	
R 1671 (B,42,19)	RS1/16SS2402D	C 1506 (B,52,35)	CKSSYB104K10	
R 1672 (A,39,18)	RS1/16SS2000D			
R 1674 (A,36,17)	RS1/16SS3002D	C 1507 (A,53,36)	CKSSYB104K10	
R 1801 (B,41,8)	RS1/16SS104J	C 1508 (A,53,39)	CKSSYB104K10	
R 1802 (B,43,8)	RS1/16SS104J	C 1509 (A,53,42)	CKSSYB104K10	
		C 1510 (B,51,18)	CCSSCH100D50	
R 1803 (B,37,13)	RS1/16SS821J	C 1511 (A,48,18)	CKSSYB104K10	
R 1804 (B,39,14)	RS1/16SS821J			
R 1982 (A,10,62)	RS1/16SS822J	C 1512 (B,45,18)	CCSSCH100D50	F
R 1983 (B,40,20)	RS1/16SS1000D	C 1513 (A,48,48)	CKSSYB104K10	
R 1987 (B,43,21)	RS1/16SS0R0J	C 1514 (B,45,21)	CKSSYB104K10	

1

Circuit Symbol and No.

C 1515 (A,45,18)
C 1516 (A,43,48)

2

Part No.

CKSSYB104K10
CKSSYB104K10

3

Circuit Symbol and No.

IC 4200 (A,23,58) IC
IC 4300 (A,55,77) IC

4

Part No.

PDY087A8
R1290K103A

A

C 1517 (A,42,48)
C 1518 (A,38,48)
C 1519 (A,34,47)
C 1520 (A,27,47)
C 1521 (A,24,34)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

Q 4051 (A,136,16) Transistor
Q 4131 (A,140,13) Chip Transistor
Q 4132 (A,145,11) Transistor
Q 4300 (A,62,71) Transistor
Q 4301 (A,55,85) Transistor

LSAR523UB
HN1C01FU
LSCR523UB
LTC014EEB
2SA1577

■

C 1522 (A,25,38)
C 1523 (A,20,46)
C 1524 (A,20,48)
C 1526 (A,24,37)
C 1528 (B,30,48)

CKSSYB104K10
CKSSYB224K6R3
CKSSYB473K16
CKSSYB103K16
CCSSCH471J50

Q 4401 (A,9,63) Transistor
D 4001 (A,140,64) Diode
D 4300 (A,46,84) Diode
D 4301 (A,65,77) Diode
D 4302 (A,68,83) Diode

LSAR523UB
DB2X41400
RB162M-40
RB548W
RB548W

B

C 1601 (A,32,19)
C 1602 (A,34,17)
C 1603 (A,33,18)
C 1604 (A,30,17)
C 1605 (A,30,18)

CKSSYB103K16
CCSSCH101J50
CCSSCH101J50
CCSSCH680J50
CCSSCH680J50

D 4303 (A,63,84) Diode
L 4002 (A,135,64) Inductor
L 4004 (A,136,68) Chip Beads
L 4151 (A,133,25) Ferrite Bead
L 4201 (A,13,58) Chip Beads

RB548W
CTH1526
VTL1126
CTF1528
VTL1127

■

C 1606 (A,35,19)
C 1607 (A,20,24) 10 uF
C 1608 (A,28,18) 4.7 uF
C 1609 (A,26,22)
C 1612 (A,24,24)

CKSSYB104K10
CCG1192
CCG1201
CKSSYB104K10
CKSSYB104K10

L 4202 (A,13,57) Chip Beads
L 4203 (A,11,57) Chip Beads
L 4204 (A,12,56) Chip Beads
L 4205 (A,12,53) Chip Beads
L 4206 (A,16,47) Chip Beads

VTL1127
VTL1127
VTL1127
VTL1127
VTL1127

C

C 1613 (A,24,25)
C 1614 (A,22,24)
C 1615 (A,23,26)
C 1616 (A,24,27)
C 1617 (B,27,28)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

L 4207 (A,17,48) Chip Beads
L 4208 (A,18,47) Chip Beads
L 4209 (A,19,46) Chip Beads
L 4210 (A,19,47) Chip Beads
L 4211 (A,20,45) Chip Beads

VTL1127
VTL1127
VTL1127
VTL1127
VTL1127

■

C 1618 (A,22,29)
C 1619 (A,23,30)
C 1620 (B,27,30)
C 1621 (A,22,31)
C 1622 (A,24,31)

CCSSCH101J50
CKSSYB562K25
CKSSYB224K6R3
CKSSYB224K6R3
CKSSYB333K16

L 4212 (A,21,47) Chip Beads
L 4213 (A,21,45) Chip Beads
L 4214 (A,22,47) Chip Beads
L 4215 (A,23,46) Chip Beads
L 4216 (A,23,48) Chip Beads

VTL1127
VTL1127
VTL1127
VTL1127
VTL1127

D

C 1623 (A,27,20)
C 1624 (A,24,32)
C 1625 (A,24,29)
C 1671 (A,41,18)
C 1673 (A,37,19)

CKSRYB105K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

L 4217 (A,25,46) Chip Beads
L 4218 (A,25,48) Chip Beads
L 4219 (A,27,47) Chip Beads
L 4220 (A,30,47) Chip Beads
L 4221 (A,30,48) Chip Beads

VTL1127
VTL1127
VTL1127
VTL1127
VTL1127

■

C 1674 (B,42,20)
C 1676 (B,38,21)
C 1801 (B,42,10) 4.7 uF
C 1802 (B,46,10) 4.7 uF
C 1803 (B,42,12)

CKSSYB104K10
CKSRYB105K10
CCG1201
CCG1201
CCSRCH182J50

L 4222 (A,32,48) Chip Beads
L 4223 (A,32,49) Chip Beads
L 4224 (A,30,50) Chip Beads
L 4225 (A,33,52) Chip Beads
L 4226 (A,33,59) Chip Beads

VTL1127
VTL1127
VTL1127
VTL1127
VTL1126

E

C 1804 (B,45,12)
C 1805 (B,34,13)
C 1806 (B,32,13) 10 uF
C 1809 (B,39,16)
C 1953 (B,60,17)

CCSRCH182J50
CKSSYB104K10
CCG1192
CKSSYB104K10
CKSRYB105K10

L 4300 (A,52,82) Choke Coil 22 uH
L 4400 (A,17,41) Inductor
L 4401 (A,15,38) Inductor
L 4402 (A,11,36) Inductor
L 4403 (A,8,34) Chip Ferrite Bead

CTH1426
CTF1635
DTL1096
DTL1096
BTX1042

C 1954 (B,54,17)
C 1955 (B,77,40)

CKSRYB105K10
CKSSYB104K16

L 4404 (A,7,70) Inductor
TH4001 (A,141,6) Thermistor
CN4001 (A,126,57) Connector
CN4051 (A,91,44) Connector
CN4052 (A,64,44) Connector

CN4053 (A,119,79) Connector
CN4131 (A,129,9) Connector
CN4151 (A,120,19) Connector
CN4400 (A,32,29) Connector

LCTAW101J2520
CCX1058
CKS6523
CKS6365
CKS6365

DKN1220
CKS6524
CKS6327
CKS6536

E**Unit Number : YXX5128****Unit Name : Monitor Unit(Service)****MISCELLANEOUS**

IC 4001 (A,138,74) IC
IC 4051 (A,93,74) IC
IC 4151 (A,132,20) IC

BD81A04EFV-M
NJM2886DL3-33
AK4187VN

RESISTORS

AVH-X8500BHS/XNUC

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
R 4002	(A,140,80)	RS1/16SS273J		R 4254	(A,31,34)	RS1/16SS121J	
R 4003	(A,141,80)	RS1/16SS511J		R 4255	(A,25,41)	RS1/16SS121J	
R 4005	(A,132,72)	RS1/16SS1503D		R 4256	(A,26,41)	RS1/16SS121J	
R 4006	(A,131,73)	RS1/16SS1003D		R 4257	(A,27,41)	RS1/16SS121J	A
R 4007	(B,146,67)	RS1/16SS101J		R 4258	(A,28,42)	RS1/16SS121J	
R 4012	(A,129,71)	RS1/16SS3603D		R 4259	(A,29,41)	RS1/16SS121J	
R 4013	(A,128,73)	RS1/16SS2402D		R 4260	(A,29,43)	RS1/16SS121J	
R 4019	(A,131,77)	RS1/16SS104J		R 4261	(A,30,41)	RS1/16SS121J	
R 4020	(A,131,76)	RS1/16SS154J		R 4262	(A,31,43)	RS1/16SS121J	
R 4022	(A,137,68)	RS1/16SS2R2J		R 4263	(A,31,41)	RS1/16SS121J	
R 4051	(A,110,38)	RS1/16SS0R0J		R 4264	(A,32,43)	RS1/16SS121J	
R 4052	(A,110,36)	RS1/16SS0R0J		R 4265	(A,33,41)	RS1/16SS0R0J	
R 4053	(A,130,16)	RS1/16SS104J		R 4266	(A,34,43)	RS1/16SS121J	
R 4054	(A,133,15)	RS1/16SS104J		R 4267	(A,34,41)	RS1/16SS121J	
R 4130	(A,115,78)	RS1/16SS0R0J		R 4268	(A,35,43)	RS1/16SS121J	B
R 4131	(A,142,16)	RS1/16SS181J		R 4269	(A,36,41)	RS1/16SS121J	
R 4134	(A,141,16)	RS1/16SS222J		R 4270	(A,36,42)	RS1/16SS121J	
R 4135	(A,139,10)	RS1/16SS471J		R 4271	(A,37,41)	RS1/16SS121J	
R 4138	(A,140,10)	RS1/16SS222J		R 4272	(A,38,42)	RS1/16SS121J	
R 4139	(A,144,14)	RS1/16SS181J		R 4273	(A,36,48)	RS1/16SS121J	
R 4142	(A,145,14)	RS1/16SS222J		R 4275	(A,13,64)	RS1/16SS0R0J	
R 4143	(A,114,45)	RS1/16SS473J		R 4276	(A,17,68)	RS1/16SS0R0J	
R 4151	(A,135,18)	RS1/16SS472J		R 4277	(A,12,62)	RS1/16SS0R0J	
R 4152	(A,136,20)	RS1/16SS472J		R 4278	(A,15,49)	RS1/16SS474J	
R 4153	(A,135,21)	RS1/16SS103J		R 4280	(A,25,36)	RS1/16SS121J	
R 4154	(A,131,17)	RS1/16SS620J		R 4300	(A,47,72)	RS1/16SS103J	C
R 4155	(A,127,20)	RS1/16SS0R0J		R 4301	(A,46,74)	RS1/16SS0R0J	
R 4156	(A,127,19)	RS1/16SS0R0J		R 4303	(A,58,78)	RS1/16SS9101D	
R 4157	(A,131,24)	RS1/16SS201J		R 4304	(A,60,79)	RS1/16SS1003D	
R 4158	(A,128,20)	RS1/16SS181J		R 4305	(A,58,73)	RS1/16SS3302D	
R 4159	(A,128,21)	RS1/16SS621J		R 4306	(A,59,72)	RS1/16SS4701D	
R 4200	(A,13,69)	RS1/16SS0R0J		R 4307	(A,60,72)	RS1/16SS6800D	
R 4202	(A,17,45)	RS1/16SS470J		R 4308	(A,64,70)	RS1/16SS0R0J	
R 4226	(A,37,53)	RS1/16SS391J		R 4309	(A,55,82)	RS1/16SS103J	
R 4227	(A,35,53)	RS1/16SS391J		R 4311	(A,59,76)	RS1/16SS9102D	
R 4228	(A,37,55)	RS1/16SS391J		R 4312	(A,59,75)	RS1/16SS1802D	D
R 4229	(A,35,55)	RS1/16SS391J		R 4313	(A,55,70)	RS1/16SS203J	
R 4230	(A,36,56)	RS1/16SS391J		R 4314	(A,56,69)	RS1/16SS104J	
R 4231	(A,36,57)	RS1/16SS391J		R 4322	(A,57,73)	RS1/16SS472J	
R 4232	(A,34,58)	RS1/16SS0R0J		R 4323	(A,48,74)	RS1/16SS1203D	
R 4233	(A,33,60)	RS1/16SS391J		R 4324	(A,51,74)	RS1/16SS3001D	
R 4234	(A,35,61)	RS1/16SS391J		R 4325	(A,47,73)	RS1/16SS472J	
R 4235	(A,33,62)	RS1/16SS391J		R 4326	(A,51,72)	RS1/16SS1502D	
R 4236	(A,35,62)	RS1/16SS391J		R 4327	(A,66,66)	RS1/16SS0R0J	
R 4237	(A,34,63)	RS1/16SS391J		R 4328	(A,68,66)	RS1/16SS0R0J	
R 4238	(A,36,64)	RS1/16SS391J		R 4329	(A,65,66)	RS1/16SS0R0J	
R 4239	(A,34,64)	RS1/16SS391J		R 4330	(A,16,72)	RS1/16SS0R0J	E
R 4240	(A,36,65)	RS1/16SS391J		R 4331	(A,50,80)	RS1/16SS0R0J	
R 4241	(A,34,66)	RS1/16SS391J		R 4400	(A,17,37)	RS1/16SS473J	
R 4242	(A,35,67)	RS1/16SS391J		R 4401	(A,14,35)	RS1/16SS473J	
R 4243	(A,31,68)	RS1/16SS391J		R 4403	(A,25,35)	RS1/16SS473J	
R 4244	(A,31,69)	RS1/16SS391J		R 4404	(A,44,41)	RS1/16SS4R7J	
R 4245	(A,31,70)	RS1/16SS391J		R 4405	(A,44,42)	RS1/16SS56R0D	
R 4246	(A,26,68)	RS1/16SS391J		R 4406	(A,44,43)	RS1/16SS1800D	
R 4247	(A,51,57)	RS1/16SS101J		R 4407	(A,43,44)	RS1/16SS2R2J	
R 4248	(A,26,72)	RS1/16SS102J		R 4408	(A,44,45)	RS1/16SS47R0D	
R 4249	(A,24,68)	RS1/16SS473J		R 4409	(A,43,46)	RS1/16SS0R0J	F
R 4251	(A,22,34)	RS1/16SS121J		R 4410	(A,44,47)	RS1/16SS39R0D	
R 4252	(A,22,36)	RS1/16SS121J		R 4411	(A,43,48)	RS1/16SS4R7J	
R 4253	(A,11,55)	RS1/16SS121J		R 4412	(A,44,49)	RS1/16SS1000D	

1

Circuit Symbol and No.

R 4413 (A,43,50)
R 4414 (A,44,51)
R 4415 (A,43,52)
R 4416 (A,44,53)
R 4417 (A,43,54)

2

Part No.

RS1/16SS8R2J
RS1/16SS1300D
RS1/16SS0R0J
RS1/16SS1000D
RS1/16SS8R2J

3

Circuit Symbol and No.

C 4307 (A,58,70)
C 4308 (A,50,70)
C 4309 (A,52,70)
C 4310 (A,64,76)
C 4311 (A,63,78)

4

Part No.

CKSRYB105K10
CKSRYB123K50
CKSSYB104K10
CKSRYB104K50
CKSRYB105K10

R 4418 (A,44,55)
R 4419 (A,43,57)
R 4420 (A,42,56)
R 4421 (A,41,57)
R 4422 (A,40,56)

RS1/16SS39R0D
RS1/16SS4R7J
RS1/16SS47R0D
RS1/16SS0R0J
RS1/16SS1800D

C 4312 (A,70,82)
C 4313 (A,67,85)
C 4314 (A,66,82)
C 4315 (A,65,85)
C 4316 (A,49,75)

CKSQYB105K25
CKSRYB104K50
CKSQYB105K25
CKSRYB104K50
CKSSYB105K6R3

R 4423 (A,40,54)
R 4424 (A,39,51)
R 4425 (A,38,52)
R 4427 (A,9,68)
R 4428 (A,7,62)

RS1/16SS2R2J
RS1/16SS33R0D
RS1/16SS2R4J
RS1/16SS105J
RS1/16SS682J

C 4317 (A,49,77)
C 4318 (A,42,86)
C 4321 (A,54,72)
C 4322 (A,51,73)
C 4323 (A,59,83)

CKSSYB102K50
CKSQYB475K6R3
CKSSYB102K50
CKSSYB102K50
CKSYB475K16

R 4429 (A,9,60)
R 4431 (A,8,69)
R 4432 (A,7,60)
R 4433 (A,8,71)
R 4434 (A,24,35)

RS1/16SS0R0J
RS1/16SS472J
RS1/16SS101J
RS1/16SS0R0J
RS1/16SS473J

C 4408 (A,45,51)
C 4409 (A,45,52)
C 4410 (A,45,53)
C 4411 (A,45,54)
C 4420 (A,30,34)

CKSSYB102K50
CKSSYB104K16
CKSSYB102K50
CKSSYB104K16
CKSSYB102K50

R 4437 (A,8,58)

RS1/16SS0R0J

C 4422 (A,28,36)
C 4424 (A,23,39) 10 uF
C 4425 (A,14,40)
C 4428 (A,26,35)
C 4429 (A,26,36)

CKSSYB104K16
CCG1236
CKSSYB102K50
CKSSYB102K50
CKSSYB104K10

CAPACITORS

C 4003 (A,144,73) 2.2 uF
C 4004 (A,142,80)
C 4005 (A,126,66) 10 uF
C 4006 (A,141,81)
C 4008 (A,144,64) 10 uF

CCG1218
CKSSYB104K10
CCG1236
CKSSYB104K10
CCG1236

C 4430 (A,18,38) 10 uF
C 4433 (A,19,34)
C 4434 (A,11,32) 4.7 uF
C 4436 (A,10,38)
C 4438 (A,16,34)

CCG1234
CKSSYB104K16
CCG1201
CKSQYB225K16
CKSRYB104K50

C 4011 (A,140,6)
C 4012 (A,139,68)
C 4051 (A,95,65)
C 4052 (A,90,64)
C 4053 (A,88,66) 10 uF

CKSSYB104K10
CKSSYB332K50
CKSQYB475K6R3
CKSRYB105K10
DCH1201

C 4439 (A,7,32)
C 4441 (A,15,33)
C 4442 (A,8,66) 10 uF
C 4443 (A,7,63)
C 4444 (A,37,75)

CKSQYB334K50
CKSSYB104K16
CCG1236
CKSSYB104K16
CKSRYB102K50

C 4054 (A,94,67)
C 4056 (A,80,61)
C 4151 (A,138,20)
C 4152 (A,139,21) 10 uF
C 4153 (A,131,25)

CKSSYB102K50
CKSRYB474K10
CKSSYB104K10
DCH1201
CKSSYB104K10

C 4155 (A,130,27) 10 uF
C 4157 (A,130,24)
C 4158 (A,128,22)
C 4159 (A,129,18)
C 4160 (A,132,17)

DCH1201
CKSSYB103K16
CKSSYB103K16
CKSSYB103K16
CKSSYB103K16

C 4200 (A,20,49)
C 4201 (A,27,49)
C 4202 (A,32,57)
C 4203 (A,32,59)
C 4204 (A,27,68)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

C 4205 (A,20,68)
C 4206 (A,13,59)
C 4207 (A,13,61)
C 4208 (A,12,67) 10 uF
C 4209 (A,17,44)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
DCH1201
CCSSCJ3R0C50

C 4211 (A,14,47)
C 4302 (A,46,81)
C 4304 (A,60,80)
C 4305 (A,64,74)
C 4306 (A,64,73)

CKSSYB104K10
CKSYB475K16
CKSSYB561K50
CKSSYB683K10
CCSQCH101J50

F**Unit Number : YXX5126****Unit Name : Key Unit(Service)****MISCELLANEOUS**

D 5002	(A,125,5) LED	SMLVN6RGB2U(A)
D 5003	(A,45,5) LED	SMLVN6RGB2U(A)
S 5001	(A,8,5) Switch	VSG1020
S 5002	(A,148,5) Switch	VSG1020
S 5003	(A,65,5) Switch	VSG1020
S 5004	(A,57,5) Switch	VSG1020
S 5005	(A,33,5) Switch	VSG1020
S 5006	(A,22,5) Switch	VSG1020
S 5007	(A,136,5) Switch	VSG1020
S 5008	(A,113,5) Switch	VSG1020
S 5009	(A,104,5) Switch	VSG1020
S 5010	(A,85,6) Switch	VSG1020
U 5021	(A,161,6) Remote Receiver Unit	RS-470
CN5001	(B,33,6) Connector	CKS6291

RESISTORS

R 5001	(A,71,4)	RS1/16SS182J
R 5002	(A,61,4)	RS1/16SS222J
R 5003	(A,53,4)	RS1/16SS472J

5

Circuit Symbol and No.

R 5004 (A,25,5)
R 5005 (A,116,4)

R 5006 (A,108,4)
R 5007 (A,96,5)
R 5021 (A,155,4)

CAPACITORS

C 5022 (A,155,5)

G

Unit Number : YXX5127

Unit Name : Case Unit(Service)

MISCELLANEOUS

CN3001 (A,23,13) Connector
CN3002 (A,51,13) Connector
CN3003 (A,59,37) Connector

6

Part No.

RS1/16SS182J
RS1/16SS222J

RS1/16SS472J
RS1/16SS123J
RS1/16SS470J

CKSSYB104K16

H

Unit Number : YXX5129

Unit Name : SW Unit(Service)

MISCELLANEOUS

S 8201 (A,17,6) Lever Switch
S 8202 (A,20,24) Lever Switch
CN8201 (A,6,24) Connector

CSN1085
CSN1086
DKN1220

I

Unit Number : YWM5608

Unit Name : HDMI Unit

MISCELLANEOUS

IC 1 (A,56,14) IC
IC 2 (A,53,7) IC
IC 3 (B,20,11) IC
IC 4 (B,13,7) 1 Chip or Gate
IC 10 (A,27,11) IC
Q 1 (A,44,19) Transistor
Q 2 (A,42,21) Transistor

D 2 (A,30,19) Diode
D 3 (A,28,19) Diode
D 4 (A,28,21) Diode
D 5 (A,26,21) Diode
D 6 (A,26,19) Diode

D 7 (A,24,19) Diode
D 8 (A,24,21) Diode
D 9 (A,22,21) Diode
D 10 (A,37,20) Diode
D 11 (A,32,20) Diode

D 12 (A,36,19) Diode
D 13 (A,60,22) Diode
D 14 (A,38,14) Diode
L 1 (A,25,18) Filter
L 2 (A,23,18) Filter

S-1172B33-E6
S-1172B12-E6
WM8761BGED
TC7SH32FUS1
MN864779KT
LTC014EEB
LSAR523UB

EZAEG2A50AX
EZAEG2A50AX
EZAEG2A50AX
EZAEG2A50AX
EZAEG2A50AX

EZAEG2A50AX
EZAEG2A50AX
EZAEG2A50AX
EZAEG2A50AX
EZAEG2A50AX

EZAEG2A50AX
CRG03
DA2J101
CTF1834
CTF1834

7

Circuit Symbol and No.

L 3 (A,29,18) Filter
L 4 (A,27,18) Filter
L 5 (A,47,20) Ferrite Bead
L 6 (B,19,5) Chip Ferrite Bead
L 7 (A,34,22) Ferrite Bead

L 8 (A,20,10) Chip Beads
L 9 (A,23,5) Chip Beads
L 10 (A,24,5) Chip Beads
L 11 (A,25,5) Chip Beads
L 12 (A,26,5) Chip Beads

L 13 (A,27,5) Chip Beads
L 14 (A,28,5) Chip Beads
L 15 (A,29,5) Chip Beads
L 16 (A,30,5) Chip Beads
L 17 (A,33,5) Chip Beads

L 18 (A,35,5) Chip Beads
L 19 (A,33,6) Chip Beads
L 20 (A,35,6) Chip Beads
L 21 (A,33,8) Chip Beads
L 22 (A,35,7) Chip Beads

L 23 (A,33,9) Chip Beads
L 24 (A,35,9) Chip Beads
L 25 (B,41,8) Chip Beads
X 1 (A,35,16) Resonator 27.000 MHz
CN2 (B,52,13) Connector

JA1 (A,29,28) Connector

RESISTORS

R 5 (B,16,9)
R 14 (A,34,12)
R 15 (A,19,8)
R 16 (A,20,8)
R 17 (A,19,9)

R 19 (A,53,20)
R 21 (A,39,20)
R 22 (A,40,20)
R 23 (A,36,20)
R 24 (A,38,19)

R 26 (A,44,13)
R 27 (A,48,16)
R 28 (A,41,8)
R 29 (A,17,10)
R 30 (A,38,17)

R 31 (A,54,19)
R 34 (B,23,3)
R 36 (B,21,6)
R 37 (B,24,8)
R 38 (B,23,6)

R 39 (A,32,17)
R 40 (B,26,5)
R 41 (A,39,22)
R 43 (A,44,23)
R 44 (A,44,21)

R 45 (A,33,12)
R 46 (A,36,21)
R 47 (A,34,21)
R 48 (A,31,21)
R 49 (B,29,10)

R 50 (B,34,11)

8

Part No.

CTF1834
CTF1834
CTF1528
DTL1107
CTF1528

VTL1126
VTL1132
VTL1132
VTL1132
VTL1132

VTL1132
VTL1132
VTL1132
VTL1132
VTL1132

VTL1132
VTL1132
VTL1132
VTL1132
VTL1132

VTL1132
VTL1132
VTL1132

CSS1768
CKS6502

CKS6560

RS1/16SS0R0J
RS1/16SS101J
RS1/16SS220J
RS1/16SS220J
RS1/16SS220J

RS1/16SS102J
RS1/16SS223J
RS1/16SS433J
RS1/16SS473J
RS1/16SS473J

RS1/10SR0R0J
RS1/10SR0R0J
RS1/10SR0R0J
RS1/16SS101J
RS1/16SS273J

RS1/16SS104J
RS1/10SR0R0J
RS1/16SS821J
RS1/16SS821J
RS1/16SS0R0J

RS1/16SS681J
RS1/16SS0R0J
RS1/16SS102J
RS1/16SS103J
RS1/16SS102J

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS473J

RS1/16SS473J

1

Circuit Symbol and No.

R 54 (B,31,10)
 R 57 (A,20,15)
 R 58 (A,18,15)
 R 59 (A,18,11)

A

R 60 (B,31,13)
 R 61 (B,34,9)
 R 63 (B,35,7)
 R 65 (B,59,15)
 R 67 (B,59,14)

R 68 (B,33,6)
 R 69 (A,18,14)
 R 70 (A,20,17)
 R 71 (A,18,13)
 R 72 (A,20,16)

B

R 73 (A,20,14)
 R 74 (A,20,12)
 R 75 (A,20,11)
 R 76 (B,10,7)
 R 77 (B,12,5)

R 78 (B,29,11)
 R 88 (B,42,10)
 R 90 (B,44,11)
 R 91 (B,44,8)

C

R 92 (B,42,12)
 R 94 (B,44,12)
 R 96 (B,42,13)
 R 98 (B,44,14)
 R 100 (B,42,14)

R 102 (B,44,15)
 R 104 (B,42,15)
 R 106 (B,44,16)
 R 108 (B,42,16)
 R 110 (B,44,17)

D

R 112 (B,42,17)
 R 114 (B,44,18)
 R 116 (B,42,18)
 R 118 (B,44,19)

CAPACITORS

C 1 (B,18,4)
 C 2 (B,17,6) 10 uF
 C 3 (A,32,15)
 C 4 (A,34,18)
 C 5 (A,48,23) 10 uF

E

C 6 (A,48,22) 10 uF
 C 7 (A,49,20) 10 uF
 C 8 (A,59,17) 4.7 uF
 C 9 (A,52,15) 4.7 uF
 C 10 (A,45,6) 4.7 uF

C 11 (A,49,12) 4.7 uF
 C 13 (B,26,10) 10 uF
 C 15 (B,20,3)
 C 16 (B,24,5)

F

C 17 (B,26,6)
 C 29 (A,16,11)
 C 38 (B,16,16)
 C 39 (B,25,13)
 C 40 (B,25,16)
 C 41 (B,25,14)

2

Part No.

RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS0R0J

RS1/16SS0R0J
 RS1/16SS0R0J
 RS1/16SS103J
 RS1/16SS0R0J
 RS1/16SS0R0J

RS1/16SS472J
 RS1/16SS303J
 RS1/16SS303J
 RS1/16SS303J
 RS1/16SS303J

RS1/16SS681J
 RS1/16SS681J
 RS1/16SS681J
 RS1/16SS472J
 RS1/16SS0R0J

RS1/16SS473J
 RS1/16SS221J
 RS1/16SS221J
 RS1/16SS101J

RS1/16SS221J
 RS1/16SS221J
 RS1/16SS221J
 RS1/16SS221J
 RS1/16SS221J

RS1/16SS221J
 RS1/16SS221J
 RS1/16SS221J
 RS1/16SS221J
 RS1/16SS221J

RS1/16SS221J
 RS1/16SS221J
 RS1/16SS221J
 RS1/16SS221J

3

Circuit Symbol and No.

C 42 (B,29,8)
 C 43 (B,25,8)
 C 44 (B,27,8)

C 45 (B,30,13)
 C 46 (B,27,14)
 C 47 (B,28,8)
 C 48 (B,26,14)
 C 49 (B,29,14)

C 50 (B,28,14)
 C 51 (B,39,25)
 C 52 (B,18,25)
 C 53 (B,41,24)
 C 54 (B,16,24)

C 55 (B,42,8)

4

Part No.

CKSSYB104K10
 CKSSYB104K10
 CKSSYB104K10

CKSSYB104K10
 CKSSYB104K10
 CKSSYB104K10
 CKSSYB104K10
 CKSSYB104K10

CKSSYB104K10
 CKSSYB102K50
 CKSSYB102K50
 CKSSYB102K50
 CKSSYB102K50

CCSSCH4R0C50

J**Unit Number : EXX2001****Unit Name : PCB Unit(Service)****MISCELLANEOUS**

IC 101	Driver IC	BA6288FS
VR101	Volume 10 kohm	CCW1029
S 101	Switch(HOME)	CSN1067
S 102	Switch(HOME)	CSN1068
CN101	Connector	CKS4997

RESISTORS

R 101	RS1/16S221J
R 102	RS1/16S221J
R 103	RS1/16S0R0J

CAPACITORS

C 101	CEVW220M16
C 102	CKSRYB104K16