


EXPLODED VIEW (UNIT)

Block No.M1MM

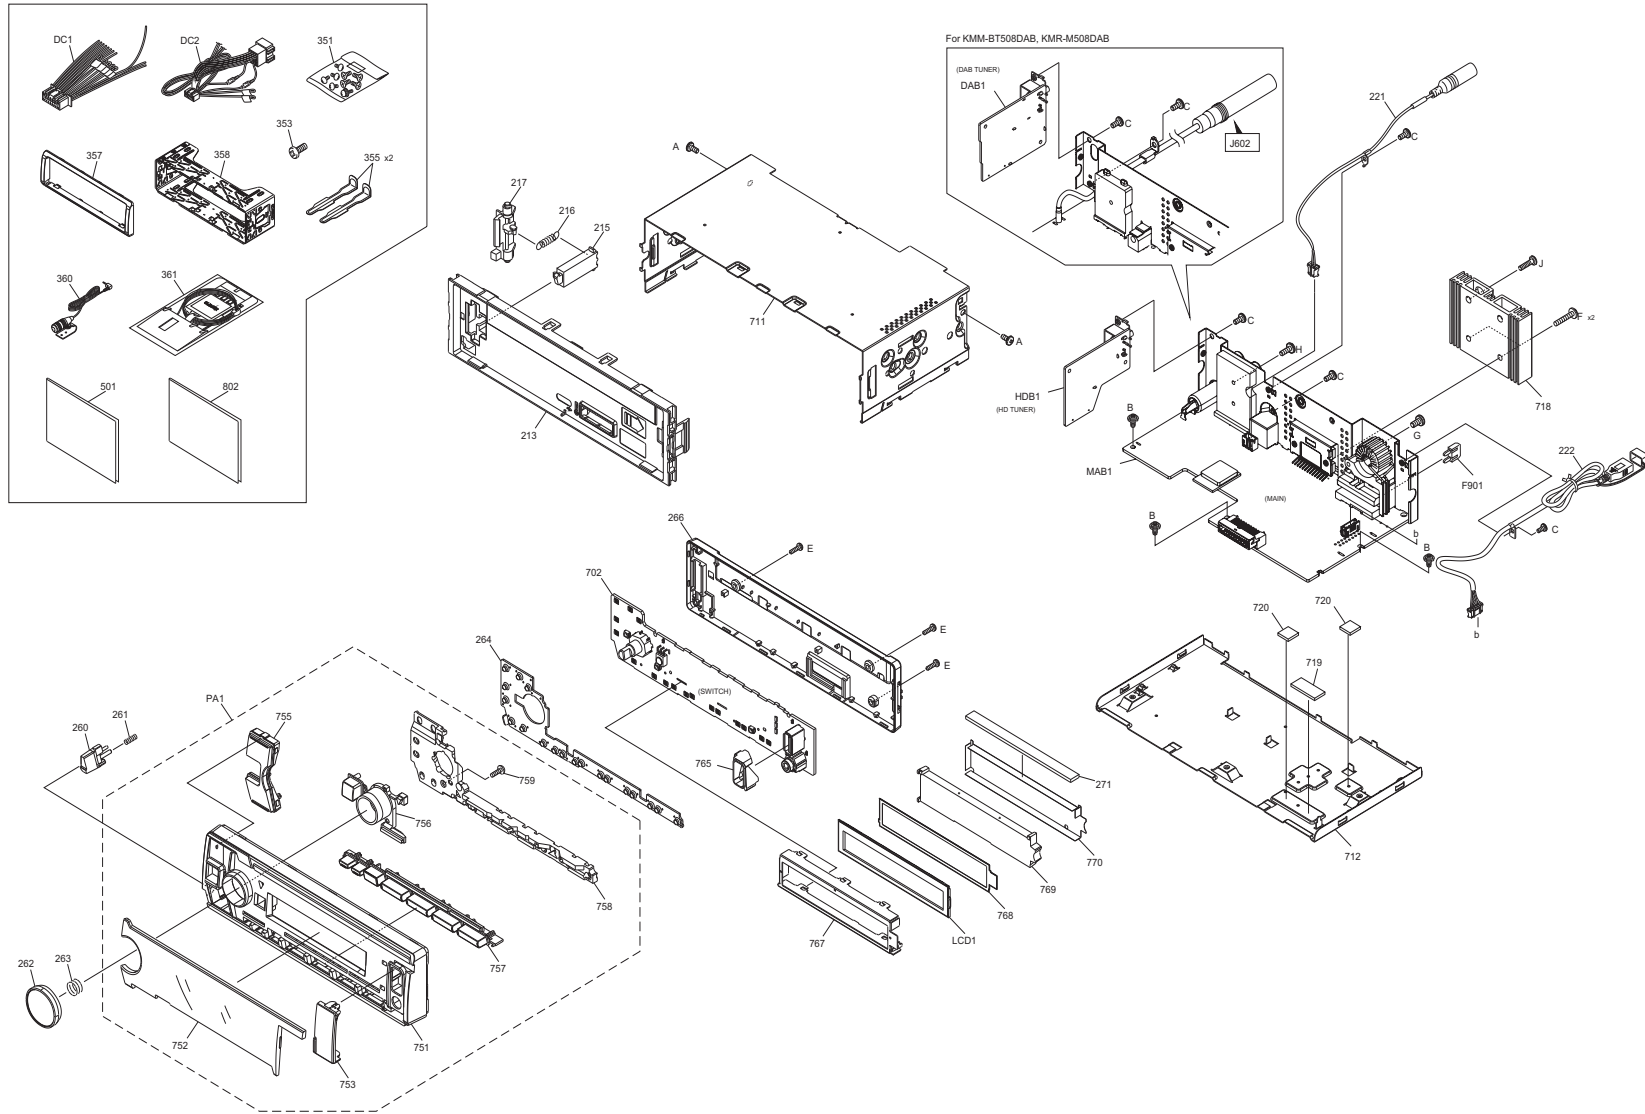

Parts with the exploded numbers larger than 700 are not supplied.

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KMM-BT508DAB	X1	KMM-BT508DAB	E1	KMM-BT732HD	K1	KMM-X705	K0
KMR-M508DAB	E2						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
EXPLODED VIEW <M1MM>						
	DAB1	XJH-224E-00	DAB TUNER PWB	XJM-033E-00	1	X1,E1
	DAB1	XJH-224E-01	DAB TUNER PWB	XJM-033E-02	1	E2
	HDB1	XJH-225K-00	HD TUNER PWB	XJM-035K-00	1	K1,K0
	MAB1	CB-XJ1388X01N	MAIN PWB	XJ1-388X-01	1	X1
	MAB1	CB-XJ1388E01N	MAIN PWB	XJ1-388E-01	1	E1
	MAB1	CB-XJ1388K01N	MAIN PWB	XJ1-388K-01	1	K1
	MAB1	CB-XJ1388K00N	MAIN PWB	XJ1-388K-00	1	K0
	MAB1	CB-XJ1388E02N	MAIN PWB	XJ1-388E-02	1	E2
	DC1	E3A-0324-00	DC CORD		1	X1,K1,K0
	DC2	E3A-0320-00	DC CORD		1	E1,E2
	F901	FZB10BT-100	BLADE FUSE		1	
	LCD1	B3H-0168-00	LCD		1	X1,E1,K1,K0
	LCD1	B3H-0176-00	LCD		1	E2
	PA1	A6D-0162-0V	PANEL ASSY		1	X1
	PA1	A6D-0162-0T	PANEL ASSY		1	E1
	PA1	A6D-0162-0Q	PANEL ASSY		1	K1
	PA1	A6D-0162-0P	PANEL ASSY		1	K0
	PA1	A6D-0162-0U	PANEL ASSY		1	E2
	A	QYSDST2604ZA	TAP SCREW	M2.6 x 4.0mm	2	X1,E1,E2
	A	QYSDST2606ZA	TAP SCREW	M2.6 x 6.0mm	2	K1,K0
	B	LV41200-004A	SPECIAL SCREW		3	
	C	QYSDST2606ZA	TAP SCREW	M2.6 x 6.0mm	2	X1,E1,E2
	C	QYSDST2606ZA	TAP SCREW	M2.6 x 6.0mm	4	K1,K0
	E	QYSDSF2008ZA	TAP SCREW	M2.0 x 8.0mm	3	
	F	QYSDST2612ZA	TAP SCREW	M2.6 x 12.0mm	2	
	G	QYSPSG3008ZA	TAP SCREW	M3.0 x 8.0mm	1	
	H	QYSDSF2608ZA	TAP SCREW	M2.6 x 8.0mm	1	
	J	QYSDST2608ZA	TAP SCREW	M2.6 x 8.0mm	1	
	213	A2C-0063-02	SUB PANEL		1	
	215	D1A-0023-00	LEVER		1	
	216	G0A-0027-00	EXTEN.SPRING		1	
	217	D1A-0022-00	LEVER		1	
	221	E3A-0423-10	CORD W.CON.		1	K1,K0
	222	E3A-0314-01	DC CORD ASSY		1	K1,K0
	260	K2K-0388-00	KNOB		1	
	261	GE30999-013A	COMP. SPRING		1	
	262	K2K-0215-01	KNOB BASE		1	X1,E1,K0,E2
	262	K2K-0165-00	KNOB BASE		1	K1
	263	GE40127-005A	KNOB SPRING		1	
	264	E2K-0069-00	CONDUCT RUBBER		1	
	266	A4G-0093-01	REAR COVER		1	
	271	E2K-0029-00	CONDUCT RUBBER		1	
	351	GE40531-001A	SCREW SET		1	K1,K0
	353	QYSPSF2008ZA	TAP SCREW	M2.0 x 8.0mm	1	K1,K0
	355	GE40646-001A	HOOK		2	
	357	B0H-0013-06	ESCUTCHEON		1	X1,E1,K0
	357	B0H-0014-04	ESCUTCHEON		1	K1
	357	B0H-0013-07	ESCUTCHEON		1	E2
	358	GE20342-001A	MOUNTING SLEEVE		1	
	360	T9B-0092-00	MICROPHONE		1	
	361	T9A-0056-00	ANTENNA ASSY		1	X1,E1
	501	B5A-3895-00	INST.MANUAL		1	X1
	702	XJ6-162K-01	SWITCH PWB		1	X1,E1,E2
	702	XJ6-162J-01	SWITCH PWB		1	K1,K0
	711	-----	TOP COVER	NO SERVICE PART	1	
	712	-----	BOTTOM PLATE	NO SERVICE PART	1	
	718	-----	HEAT SINK	NO SERVICE PART	1	
	719	-----	COOL SHEET	NO SERVICE PART	1	
	720	-----	COOLING RUBBER	NO SERVICE PART	1	X1,E1,E2
	720	-----	COOLING RUBBER	NO SERVICE PART	2	K1,K0
	751	-----	PANEL	NO SERVICE PART	1	X1,E1,K0
	751	-----	PANEL	NO SERVICE PART	1	K1
	751	-----	PANEL	NO SERVICE PART	1	E2
	752	-----	FRONT GLASS	NO SERVICE PART	1	X1,E1
	752	-----	FRONT GLASS	NO SERVICE PART	1	K1
	752	-----	FRONT GLASS	NO SERVICE PART	1	K0
	752	-----	FRONT GLASS	NO SERVICE PART	1	E2
	753	-----	COVER	NO SERVICE PART	1	
	755	-----	KNOB ASSY	NO SERVICE PART	1	X1,K1,K0
	755	-----	KNOB ASSY	NO SERVICE PART	1	E1,E2
	756	-----	PUSH KNOB	NO SERVICE PART	1	
	757	-----	PUSH KNOB	NO SERVICE PART	1	
	758	-----	LIGHTING BOARD	NO SERVICE PART	1	
	759	-----	TAP SCREW	NO SERVICE PART	1	
	765	-----	LIGHTING BOARD	NO SERVICE PART	1	
	767	-----	LCD CASE	NO SERVICE PART	1	
	768	-----	OPTI.DIFFUSER	NO SERVICE PART	1	X1,E1,K1,K0
	768	-----	OPTI.DIFFUSER	NO SERVICE PART	1	E2
	769	-----	LIGHTING BOARD	NO SERVICE PART	1	
	770	-----	REF.SHEET	NO SERVICE PART	1	
	802	-----	SUB-INST.MANUAL	NO SERVICE PART	1	E1,E2
	802	-----	SUB-INST.MANUAL	NO SERVICE PART	1	K1,K0
	802	-----	SUB-INST.MANUAL	NO SERVICE PART	1	E2

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KMM-BT508DAB	X1	KMM-BT508DAB	E1	KMM-BT732HD	K1	KMM-X705	K0
KMR-M508DAB	E2						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
MAIN PWB ASSY (XJ1-388x-0x) <XJ1>						
	IC161	BD37069FV-M	ANALOG IC		1	
	IC165	NJW4190R-A	ANALOG IC		1	K1,K0
	IC220	NJM4565V-ZB	ANALOG IC		1	
	IC301	TB2996HQ	ANALOG IC		1	
	IC411	MFI343S00177	MCU IC		1	
	IC470	TC7SH08FUJC	MOS IC		1	K1,K0
	IC500	MP9942AGJ	ANALOG IC		1	K1,K0
	IC540	MP9943AGQ	ANALOG IC		1	
	IC701	STA1090HOA3	MPU IC		1	
	IC702	TC7SH08FUJC	MOS IC		1	
	IC821	W3F-0649-00	ROM IC		1	X1,E1,E2
	IC821	W3F-0650-00	ROM IC		1	K1,K0
	IC822	W25Q16JVSSIM	ROM IC		1	
	IC831	IC-PST8428U	MOS IC		1	
	IC841	IC-PST8428U	MOS IC		1	
	IC890	TPS25221DBV	MOS IC		1	
	IC891	TPS25221DBV	MOS IC		1	K1,K0
	IC901	BD49105RFS-M	ANALOG IC		1	
	IC1901	M12L1218A6BIS	DRAM IC		1	
	IC1902	M12L1218A6BIS	DRAM IC		1	
	Q220	KTC4075P/Y/	TRANSISTOR		1	
	Q250	2SD2114K/VW/	TRANSISTOR		1	
	Q260	2SD2114K/VW/	TRANSISTOR		1	E1,E2
	Q270	LTA014EEBFS8	DIGI TRANSISTOR		1	
	Q271	KTA2014P/Y/	TRANSISTOR		1	
	Q272	KRC403E-P	DIGI TRANSISTOR		1	
	Q273	LTA014EEBFS8	DIGI TRANSISTOR		1	
	Q274	KRC403E-P	DIGI TRANSISTOR		1	
	Q320	2SD2114K/VW/	TRANSISTOR		1	
	Q330	2SD2114K/VW/	TRANSISTOR		1	
	Q340	2SD2114K/VW/	TRANSISTOR		1	X1,K1,K0
	Q350	2SD2114K/VW/	TRANSISTOR		1	X1,K1,K0
	Q360	LSCR523UBFS8	TRANSISTOR		1	
	Q470	KRC402E-P	DIGI TRANSISTOR		1	K1,K0
	Q471	KRC410E-P	DIGI TRANSISTOR		1	K1,K0
	Q890	KRC401P	DIGI TRANSISTOR		1	
	Q901	KRC407E-P	DIGI TRANSISTOR		1	X1,E1,E2
	Q902	RE1C002ZP	FET		1	X1,E1,E2
	Q903	KRC407E-P	DIGI TRANSISTOR		1	
	Q904	RE1C002ZP	FET		1	
	Q920	KRA304E-P	DIGI TRANSISTOR		1	
	Q960	RQ6E030AT	FET		1	
	Q961	LTC044EUBFS8	DIGI TRANSISTOR		1	
	D220	UDZV6.8B	ZENER DIODE		1	
	D221	UDZV6.8B	ZENER DIODE		1	
	D222	UDZV5.6B	ZENER DIODE		1	
	D271	BAW56-TP	DIODE ARRAY		1	
	D273	1SS355-HF	DIODE		1	
	D360	UDZV6.8B	ZENER DIODE		1	
	D370	BAW56-TP	DIODE ARRAY		1	
	D390	SM5818PL	SCHOTTKY DIODE		1	
	D391	MBR0530	DIODE		1	
	D400	RB521SM-40	DIODE		1	
	D401	UDZV5.1B	ZENER DIODE		1	
	D501	SMD24PL	SCHOTTKY DIODE		1	K1,K0
	D540	SMD24PL	SCHOTTKY DIODE		1	
	D902	SK34A-L	SCHOTTKY DIODE		1	
	D903	SK34A-L	SCHOTTKY DIODE		1	
	D906	SK34A-L	SCHOTTKY DIODE		1	
	D907	SK34A-L	SCHOTTKY DIODE		1	
	D991	GN3XB	DIODE		1	
	C101	CK73JXR1H332K	C CAPACITOR	3300pF 50V K	1	
	C102	CK73JXR1H332K	C CAPACITOR	3300pF 50V K	1	
	C103	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C104	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C105	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C106	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C161	CE32BJ1V4R7M	E CAPACITOR	4.7uF 35V M	1	
	C162	CE32BJ1V4R7M	E CAPACITOR	4.7uF 35V M	1	
	C163	CE32BJ1V4R7M	E CAPACITOR	4.7uF 35V M	1	
	C164	CE32BJ1V4R7M	E CAPACITOR	4.7uF 35V M	1	
	C165	CE32BJ1V4R7M	E CAPACITOR	4.7uF 35V M	1	
	C166	CE32BJ1V4R7M	E CAPACITOR	4.7uF 35V M	1	
	C167	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C168	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C169	CE32BY1C470M	E CAPACITOR	47uF 16V M	1	
	C170	CE32CL1C100M	E CAPACITOR	10uF 16V M	1	
	C171	CE32BM1E470M	E CAPACITOR	47uF 25V M	1	K1,K0
	C181	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K1,K0
	C183	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K1,K0
	C187	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	K1,K0
	C188	CK73GXR1E105K	C CAPACITOR	1uF 25V K	1	K1,K0
	C222	CK73HXR1C224K	C CAPACITOR	0.22uF 16V K	1	
	C223	CK73HXR1C224K	C CAPACITOR	0.22uF 16V K	1	
	C224	CK73HXR0J225K	C CAPACITOR	2.2uF 6.3V K	1	
	C225	CK73HXR0J225K	C CAPACITOR	2.2uF 6.3V K	1	
	C226	CC73JCH1H220J	C CAPACITOR	22pF 50V J	1	
	C227	CC73JCH1H271J	C CAPACITOR	270pF 50V J	1	
	C228	CK73HXR0J225K	C CAPACITOR	2.2uF 6.3V K	1	
	C229	CK73HXR0J225K	C CAPACITOR	2.2uF 6.3V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KMM-BT508DAB	X1	KMM-BT508DAB	E1	KMM-BT732HD	K1	KMM-X705	K0
KMR-M508DAB	E2						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C230	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C231	CC73HCH1H271J	C CAPACITOR	270pF 50V J	1	
	C234	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C235	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C236	CK73HXR0J225K	C CAPACITOR	2.2uF 6.3V K	1	
	C238	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C252	CK730DK1E106K	C CAPACITOR	10uF 25V K	1	
	C262	CK730DK1E106K	C CAPACITOR	10uF 25V K	1	E1,E2
	C273	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C304	CE32CL1E330M	E CAPACITOR	33uF 25V M	1	
	C311	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C312	CK73HXR1E474K	C CAPACITOR	0.47uF 25V K	1	
	C313	CK73HXR1E474K	C CAPACITOR	0.47uF 25V K	1	
	C316	CK73HXR1E474K	C CAPACITOR	0.47uF 25V K	1	
	C317	CK73HXR1E474K	C CAPACITOR	0.47uF 25V K	1	
	C318	CK73HXR1E474K	C CAPACITOR	0.47uF 25V K	1	
	C319	CK73HXR1E474K	C CAPACITOR	0.47uF 25V K	1	
	C322	CK730DK1E106K	C CAPACITOR	10uF 25V K	1	
	C332	CK730DK1E106K	C CAPACITOR	10uF 25V K	1	
	C333	CK73HXR1E474K	C CAPACITOR	0.47uF 25V K	1	
	C334	CK73HXR1E474K	C CAPACITOR	0.47uF 25V K	1	
	C335	CK73HXR1E474K	C CAPACITOR	0.47uF 25V K	1	
	C336	CK73HXR1E474K	C CAPACITOR	0.47uF 25V K	1	
	C342	CK730DK1E106K	C CAPACITOR	10uF 25V K	1	X1,K1,K0
	C352	CK730DK1E106K	C CAPACITOR	10uF 25V K	1	X1,K1,K0
	C360	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C361	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C370	CK73JXR1C224K	C CAPACITOR	0.22uF 16V K	1	
	C391	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	
	C410	CK73JXR0J224K	C CAPACITOR	0.22uF 6.3V K	1	
	C472	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	K1,K0
	C473	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	K1,K0
	C474	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	1	K1,K0
	C475	CK73GXR1A225K	C CAPACITOR	2.2uF 10V K	1	K1,K0
	C500	CE32CC1A151M	E CAPACITOR	150uF 10V M	1	K1,K0
	C501	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	K1,K0
	C503	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K1,K0
	C504	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K1,K0
	C505	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K1,K0
	C506	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K1,K0
	C507	CK73JXR0J474K	C CAPACITOR	0.47uF 6.3V K	1	K1,K0
	C508	CK73JXR0J474K	C CAPACITOR	0.47uF 6.3V K	1	K1,K0
	C509	CC73JCH1H150J	C CAPACITOR	15pF 50V J	1	K1,K0
	C510	CK73JXR0J474K	C CAPACITOR	0.47uF 6.3V K	1	K1,K0
	C540	CE32CC1A151M	E CAPACITOR	150uF 10V M	1	
	C541	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C543	CK73JXR1E223K	C CAPACITOR	0.022uF 25V K	1	
	C544	CC73JCH1E471J	C CAPACITOR	470pF 25V J	1	
	C545	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C547	CK73JXR0J474K	C CAPACITOR	0.47uF 6.3V K	1	
	C548	CK73JXR0J474K	C CAPACITOR	0.47uF 6.3V K	1	
	C549	CK73JXR0J474K	C CAPACITOR	0.47uF 6.3V K	1	
	C550	CC73JCH1H150J	C CAPACITOR	15pF 50V J	1	
	C625	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	
	C626	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C680	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C702	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	
	C703	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C704	CC73JCH1H180J	C CAPACITOR	18pF 50V J	1	
	C705	CC73JCH1H180J	C CAPACITOR	18pF 50V J	1	
	C706	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	
	C707	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C708	CK73JXR1C473K	C CAPACITOR	0.047uF 16V K	1	
	C709	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C710	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	
	C711	CC73JCH1E471J	C CAPACITOR	470pF 25V J	1	
	C713	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C714	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C715	CK73JXR1C472K	C CAPACITOR	4700pF 16V K	1	
	C716	CC73JCH1H101J	C CAPACITOR	100pF 50V J	1	
	C719	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C720	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C722	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C723	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C724	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C725	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	
	C726	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C727	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	
	C728	CC73JCH1H101J	C CAPACITOR	100pF 50V J	1	
	C729	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C730	CC73JCH1H101J	C CAPACITOR	100pF 50V J	1	
	C731	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C733	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C735	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C736	CC73JCH1H080D	C CAPACITOR	8pF 50V D	1	
	C737	CC73JCH1H080D	C CAPACITOR	8pF 50V D	1	
	C738	CK73JXR1A472K	C CAPACITOR	4700pF 10V K	1	
	C740	CC73JCH1H101J	C CAPACITOR	100pF 50V J	1	
	C741	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	
	C742	CC73JCH1H101J	C CAPACITOR	100pF 50V J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KMM-BT508DAB	X1	KMM-BT508DAB	E1	KMM-BT732HD	K1	KMM-X705	K0
KMR-M508DAB	E2						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C744	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C745	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C746	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C747	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C750	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C751	CE32BZ0J101M	E CAPACITOR	100uF 6.3V M	1	
	C756	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C820	CC73JCH1E471J	C CAPACITOR	470pF 25V J	1	
	C821	CK73JXR0J224K	C CAPACITOR	0.22uF 6.3V K	1	
	C822	CC73JCH1H101J	C CAPACITOR	100pF 50V J	1	
	C824	CC73JCH1H101J	C CAPACITOR	100pF 50V J	1	
	C825	CK73JXR0J224K	C CAPACITOR	0.22uF 6.3V K	1	
	C830	CC73JCH1E471J	C CAPACITOR	470pF 25V J	1	
	C831	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C832	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C841	CK73HXR1A334K	C CAPACITOR	0.33uF 10V K	1	
	C842	CK73JXR0J224K	C CAPACITOR	0.22uF 6.3V K	1	
	C843	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C890	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C893	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C894	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C895	CC73JCH1E471J	C CAPACITOR	470pF 25V J	1	
	C897	CC73JCH1E471J	C CAPACITOR	470pF 25V J	1	K1,K0
	C898	CC73JCH1H120J	C CAPACITOR	12pF 50V J	1	K1,K0
	C899	CC73JCH1H120J	C CAPACITOR	12pF 50V J	1	K1,K0
	C900	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	K1,K0
	C902	CC73JCH1E391J	C CAPACITOR	390pF 25V J	1	
	C903	CK73JXR1H471K	C CAPACITOR	470pF 50V K	1	
	C904	CC73JCH1E271J	C CAPACITOR	270pF 25V J	1	
	C905	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C906	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	
	C907	CE32CC1A151M	E CAPACITOR	150uF 10V M	1	
	C911	CK73GXR1E105K	C CAPACITOR	1uF 25V K	1	
	C912	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C913	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C914	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C915	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C916	CE32BY1C221M	E CAPACITOR	220uF 16V M	1	
	C917	CK73GXR1E105K	C CAPACITOR	1uF 25V K	1	
	C919	CD04ET1C222M1	E CAPACITOR	2200uF 16V M	1	
	C932	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C936	CK73HXR1H102K	C CAPACITOR	1000pF 50V K	1	X1,E1,E2
	C946	CK73GXR1E105K	C CAPACITOR	1uF 25V K	1	
	C947	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C950	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C952	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	
	C954	CK73JXR1H471K	C CAPACITOR	470pF 50V K	1	
	C990	CD04ET1C222M1	E CAPACITOR	2200uF 16V M	1	
	C1001	CC73JCH1H221J	C CAPACITOR	220pF 50V J	1	
	C1020	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1021	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C1034	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1301	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C1302	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1303	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1304	CC73JCH1E471J	C CAPACITOR	470pF 25V J	1	
	C1305	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	
	C1902	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1903	CC73JCH1E471J	C CAPACITOR	470pF 25V J	1	
	C1904	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1905	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1906	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C1907	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1908	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1909	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1910	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1942	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1943	CC73JCH1E471J	C CAPACITOR	470pF 25V J	1	
	C1944	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1945	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1946	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C1947	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1948	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1949	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1950	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C2010	CK73JXR1H471K	C CAPACITOR	470pF 50V K	1	
	C2040	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	
	C2041	CC73JCH1H101J	C CAPACITOR	100pF 50V J	1	
	C2042	CC73JCH1H101J	C CAPACITOR	100pF 50V J	1	
	C2044	CC73JCH1H101J	C CAPACITOR	100pF 50V J	1	
	C2060	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C3001	CK73JXR1A103K	C CAPACITOR	0.01uF 10V K	1	
	C3002	CK73JXR1A103K	C CAPACITOR	0.01uF 10V K	1	
	C3003	CK73JXR1A103K	C CAPACITOR	0.01uF 10V K	1	
	C3004	CK73JXR1A103K	C CAPACITOR	0.01uF 10V K	1	
	C4001	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4002	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4003	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4004	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C4005	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5001	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	
	C5002	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KMM-BT508DAB	X1	KMM-BT508DAB	E1	KMM-BT732HD	K1	KMM-X705	K0
KMR-M508DAB	E2						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C5003	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	
	C5005	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	
	C9000	CK73JXR1C224K	C CAPACITOR	0.22uF 16V K	1	
	C9001	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C9002	CK73JXR1A103K	C CAPACITOR	0.01uF 10V K	1	X1,E1,E2
	C9005	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C9010	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	K1,K0
	C9011	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	K1,K0
	C9013	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	X1,E1,E2
	C9013	CK73HXR1C103K	C CAPACITOR	0.01uF 16V K	1	K1,K0
	C9014	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C9017	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K1,K0
	C9018	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C9019	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C9022	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C9023	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C9025	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C9033	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C9037	CK73JXR1H471K	C CAPACITOR	470pF 50V K	1	
	C9038	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C9039	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C9040	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C9041	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C9045	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C9046	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C9047	CC73JCH1H010C	C CAPACITOR	1pF 50V C	1	K1,K0
	C9049	CK73JXR1H471K	C CAPACITOR	470pF 50V K	1	
	C9050	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	
	C9055	CK73JXR1H471K	C CAPACITOR	470pF 50V K	1	
	C9056	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	
	C9057	CK73JXR1H471K	C CAPACITOR	470pF 50V K	1	
	C9058	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	
	C9059	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C9060	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C9061	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C9063	CK73GXR0J225K	C CAPACITOR	2.2uF 6.3V K	1	
	C9064	CC73JCH1H150J	C CAPACITOR	15pF 50V J	1	
	C9066	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1	K1,K0
	C9076	CC73JCH1H150J	C CAPACITOR	15pF 50V J	1	
	C9077	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C9078	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C9080	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C9082	CC73JCH1E471J	C CAPACITOR	470pF 25V J	1	
	C9083	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C9086	CC73JCH1E471J	C CAPACITOR	470pF 25V J	1	
	C9087	CK73JXR1C473K	C CAPACITOR	0.047uF 16V K	1	
	C9090	CC73JCH1E471J	C CAPACITOR	470pF 25V J	1	
	C9091	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	K1,K0
	C9092	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1	K1,K0
	C9093	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	K1,K0
	C9094	CK73JXR0J474K	C CAPACITOR	0.47uF 6.3V K	1	
	C9097	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	
	C9098	CC73JCH1H010C	C CAPACITOR	1pF 50V C	1	
	C9099	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C9101	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C9117	CC73JCH1H101J	C CAPACITOR	100pF 50V J	1	
	C9118	CC73JCH1H101J	C CAPACITOR	100pF 50V J	1	
	C9119	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C9122	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C9206	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C9207	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C9208	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C9210	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	
	C9211	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	E1,E2
	C9212	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	
	C9213	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	
	C9214	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	X1,K1,K0
	C9215	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	X1,K1,K0
	C9217	CC73JCH1H050C	C CAPACITOR	5pF 50V C	1	
	C9218	CC73JCH1H050C	C CAPACITOR	5pF 50V C	1	
	C9219	CC73JCH1H050C	C CAPACITOR	5pF 50V C	1	
	C9222	CC73JCH1E471J	C CAPACITOR	470pF 25V J	1	
	C9223	CC73JCH1E471J	C CAPACITOR	470pF 25V J	1	
	C9224	CK73JXR1A472K	C CAPACITOR	4700pF 10V K	1	
	C9225	CK73JXR1H471K	C CAPACITOR	470pF 50V K	1	
	C9226	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	
	C9227	CK73JXR1H471K	C CAPACITOR	470pF 50V K	1	
	C9229	CK73JXR1H471K	C CAPACITOR	470pF 50V K	1	
	C9230	CK73JXR1H471K	C CAPACITOR	470pF 50V K	1	
	L700	RK73HB1J000J	MG RESISTOR		1	
	L706	RK73HB1J000J	MG RESISTOR		1	
	L707	RK73HB1J000J	MG RESISTOR		1	K1,K0
	L708	RK73HB1J000J	MG RESISTOR		1	
	L709	RK73HB1J000J	MG RESISTOR		1	
	L811	RK73HB1J000J	MG RESISTOR		1	
	L822	RK73HB1J000J	MG RESISTOR		1	
	L824	RK73HB1J220J	MG RESISTOR		1	
	L825	RK73HB1J220J	MG RESISTOR		1	
	L826	RK73HB1J220J	MG RESISTOR		1	
	L827	RK73HB1J220J	MG RESISTOR		1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KMM-BT508DAB	X1	KMM-BT508DAB	E1	KMM-BT732HD	K1	KMM-X705	K0
KMR-M508DAB	E2						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	L828	RK73HB1J220J	MG RESISTOR		1	
	L829	RK73HB1J000J	MG RESISTOR		1	
	L2000	RK73HB1J101J	MG RESISTOR		1	
	L2001	RK73HB1J101J	MG RESISTOR		1	
	L2002	RK73HB1J151J	MG RESISTOR		1	K1,K0
	L9002	RK73GB2A000J	MG RESISTOR		1	
	R100	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R101	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R103	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R104	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R106	RK73HB1J200J	MG RESISTOR	20Ω 1/16W J	1	K1,K0
	R112	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R113	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R114	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R115	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	K1,K0
	R116	RK73GB2A4R7J	MG RESISTOR	4.7Ω 1/10W J	1	K1,K0
	R117	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	K1,K0
	R145	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R146	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R147	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R148	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R149	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R150	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R161	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K1,K0
	R162	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R173	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R175	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R176	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K1,K0
	R177	RK73HB1J562J	MG RESISTOR	5.6kΩ 1/16W J	1	K1,K0
	R178	RK73HB1J752J	MG RESISTOR	7.5kΩ 1/16W J	1	K1,K0
	R179	RK73HH1J102D	MG RESISTOR	1kΩ 1/16W D	1	K1,K0
	R180	RK73HH1J153D	MG RESISTOR	15kΩ 1/16W D	1	K1,K0
	R181	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K1,K0
	R188	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	X1,E1,E2
	R220	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R221	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R222	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R223	RK73HB1J392J	MG RESISTOR	3.9kΩ 1/16W J	1	
	R224	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R225	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	
	R226	RK73HB1J122J	MG RESISTOR	1.2kΩ 1/16W J	1	
	R227	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R229	RK73HB1J122J	MG RESISTOR	1.2kΩ 1/16W J	1	
	R230	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R231	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R232	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R233	RK73HB1J681J	MG RESISTOR	680Ω 1/16W J	1	
	R234	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R236	RK73HB1J512J	MG RESISTOR	5.1kΩ 1/16W J	1	
	R237	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R238	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R250	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R251	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R252	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	
	R253	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	X1,K1,K0
	R254	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R260	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	E1,E2
	R261	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	E1,E2
	R262	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	E1,E2
	R264	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	E1,E2
	R270	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	
	R271	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	
	R272	RK73HB1J303J	MG RESISTOR	30kΩ 1/16W J	1	
	R273	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R301	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R302	RK73HB1J432J	MG RESISTOR	4.3kΩ 1/16W J	1	
	R303	RK73HB1J160J	MG RESISTOR	16Ω 1/16W J	1	
	R304	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R305	RK73HB1J1R0J	MG RESISTOR	1.0Ω 1/16W J	1	
	R308	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R309	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R316	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R317	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R318	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R319	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R320	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R321	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R322	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R323	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	
	R330	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R331	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R332	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R333	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	
	R340	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	X1,K1,K0
	R341	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	X1,K1,K0
	R342	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	X1,K1,K0
	R343	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	X1,K1,K0
	R350	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	X1,K1,K0
	R351	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	X1,K1,K0
	R352	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	X1,K1,K0
	R353	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	X1,K1,K0
	R360	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KMM-BT508DAB	X1	KMM-BT508DAB	E1	KMM-BT732HD	K1	KMM-X705	K0
KMR-M508DAB	E2						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R361	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	
	R362	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R363	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R364	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R370	RK73HB1J683J	MG RESISTOR	68kΩ 1/16W J	1	
	R371	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	
	R372	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R390	RK73EB2E472J	MG RESISTOR	4.7kΩ 1/4W J	1	
	R400	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R410	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R411	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R413	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R414	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R471	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K1,K0
	R472	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K1,K0
	R473	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K1,K0
	R474	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	K1,K0
	R475	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K1,K0
	R476	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K1,K0
	R477	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K1,K0
	R502	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K1,K0
	R503	RK73HB1J512J	MG RESISTOR	5.1kΩ 1/16W J	1	K1,K0
	R504	RK73HB1J393J	MG RESISTOR	39kΩ 1/16W J	1	K1,K0
	R505	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K1,K0
	R506	RK73HH1J683D	MG RESISTOR	68kΩ 1/16W D	1	K1,K0
	R507	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D	1	K1,K0
	R508	RK73HH1J183D	MG RESISTOR	18kΩ 1/16W D	1	K1,K0
	R541	RK73HB1J512J	MG RESISTOR	5.1kΩ 1/16W J	1	
	R542	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R543	RK73HB1J200J	MG RESISTOR	20Ω 1/16W J	1	
	R544	RK73HB1J393J	MG RESISTOR	39kΩ 1/16W J	1	
	R545	RK73HH1J183D	MG RESISTOR	18kΩ 1/16W D	1	
	R546	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D	1	
	R548	RK73HH1J683D	MG RESISTOR	68kΩ 1/16W D	1	
	R601	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R611	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R683	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R684	RK73HB1J392J	MG RESISTOR	3.9kΩ 1/16W J	1	
	R685	RK73HB1J392J	MG RESISTOR	3.9kΩ 1/16W J	1	
	R688	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	1	
	R690	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	X1,E1,E2
	R690	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K1,K0
	R691	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	X1,E1,E2
	R691	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K1,K0
	R702	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R703	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R704	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R705	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R706	RK73HB1J682J	MG RESISTOR	6.8kΩ 1/16W J	1	
	R709	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R710	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R711	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R712	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R713	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	1	
	R714	RK73HB1J274J	MG RESISTOR	270kΩ 1/16W J	1	
	R718	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R730	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R738	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R739	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R740	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R741	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R742	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R743	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R746	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R755	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R756	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R757	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	X1,E1,E2
	R759	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	X1,E1,E2
	R760	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R761	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R766	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R768	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	X1
	R768	RK73HB1J393J	MG RESISTOR	39kΩ 1/16W J	1	E1,E2
	R769	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	X1
	R769	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	1	E1,E2
	R769	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K1,K0
	R770	RK73HB1J393J	MG RESISTOR	39kΩ 1/16W J	1	K1,E2
	R771	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	X1,E1,K0
	R771	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	1	K1,E2
	R772	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R777	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R778	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R782	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R785	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R788	RK73HH1J823D	MG RESISTOR	82kΩ 1/16W D	1	
	R789	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D	1	
	R796	RK73HH1J302D	MG RESISTOR	3kΩ 1/16W D	1	
	R797	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R798	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R799	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KMM-BT508DAB	X1	KMM-BT508DAB	E1	KMM-BT732HD	K1	KMM-X705	K0
KMR-M508DAB	E2						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R800	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R801	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R802	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	X1,E1,E2
	R803	RK73HB1J225J	MG RESISTOR	2.2MΩ 1/16W J	1	K1,K0
	R805	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R806	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R808	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R809	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R817	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	K1,K0
	R820	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R823	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R824	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R827	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R828	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R829	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R830	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R831	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R844	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	1	
	R845	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R846	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R848	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R861	RK73HB1J682J	MG RESISTOR	6.8kΩ 1/16W J	1	
	R862	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R870	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R880	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	K1,K0
	R889	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	1	
	R890	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R891	RK73HH1J563D	MG RESISTOR	56kΩ 1/16W D	1	
	R892	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D	1	
	R893	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R894	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K1,K0
	R895	RK73HH1J563D	MG RESISTOR	56kΩ 1/16W D	1	K1,K0
	R896	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D	1	K1,K0
	R897	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	K1,K0
	R902	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	X1,E1,E2
	R903	RK73HH1J334D	MG RESISTOR	330kΩ 1/16W D	1	
	R904	RK73HH1J473D	MG RESISTOR	47kΩ 1/16W D	1	
	R905	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R908	RK73HH1J154D	MG RESISTOR	150kΩ 1/16W D	1	
	R909	RK73HH1J473D	MG RESISTOR	47kΩ 1/16W D	1	
	R910	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R911	RK73HB1J683J	MG RESISTOR	68kΩ 1/16W J	1	
	R912	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R913	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R916	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	X1,E1,E2
	R917	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D	1	
	R923	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R924	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R925	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R926	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R927	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R928	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R929	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R933	RK73HH1J684D	MG RESISTOR	680kΩ 1/16W D	1	
	R934	RK73HH1J563D	MG RESISTOR	56kΩ 1/16W D	1	
	R939	RK73HH1J433D	MG RESISTOR	43kΩ 1/16W D	1	
	R940	RK73HH1J123D	MG RESISTOR	12kΩ 1/16W D	1	
	R946	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R950	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R951	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R952	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R954	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R955	RK73EB2E184J	MG RESISTOR	180kΩ 1/4W J	1	
	R960	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R961	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	
	R980	RK73EB2E682J	MG RESISTOR	6.8kΩ 1/4W J	1	
	R981	RK73EB2E682J	MG RESISTOR	6.8kΩ 1/4W J	1	
	R982	RK73EB2E473J	MG RESISTOR	47kΩ 1/4W J	1	
	R984	RK73EB2E473J	MG RESISTOR	47kΩ 1/4W J	1	
	R1034	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R1070	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R1300	RK73HB1J562J	MG RESISTOR	5.6kΩ 1/16W J	1	
	R1301	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R1302	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R1303	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R1900	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	
	R1901	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	
	R1902	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	
	R1903	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	
	R1904	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	
	R1905	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	
	R1906	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	
	R1907	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	
	R1908	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	
	R1909	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	
	R1910	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	
	R1911	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	
	R1912	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	
	R1913	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	
	R1914	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	
	R1915	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	
	R1920	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KMM-BT508DAB	X1	KMM-BT508DAB	E1	KMM-BT732HD	K1	KMM-X705	K0
KMR-M508DAB	E2						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R1921	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1932	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R1940	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	
	R1941	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	
	R1942	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	
	R1943	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	
	R1944	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	
	R1945	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	
	R1946	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	
	R1947	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	
	R1948	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	
	R1949	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	
	R1950	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	
	R1951	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	
	R1952	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	
	R1953	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	
	R1954	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	
	R1955	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	
	R1964	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1965	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1966	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1967	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1968	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1969	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1970	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1971	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1977	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1978	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1979	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1980	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1981	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1982	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1983	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1984	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1985	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1986	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1987	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1988	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	
	R1989	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1990	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	
	R1991	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	
	R1992	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	
	R2003	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R2004	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R2010	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R2011	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2012	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R2013	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2016	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2017	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2018	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2019	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R2021	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R2023	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R2030	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	X1,E1,E2
	R2033	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R2034	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R9008	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R9011	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R9012	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R9015	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R9016	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	X1,E1,E2
	R9017	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R9018	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J	1	
	R9020	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	
	R9021	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	
	R9023	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R9201	RK73HH1J100D	MG RESISTOR	10Ω 1/16W D	1	
	L500	LR79Z0JM100M	CHIP INDUCTOR		1	K1,K0
	L501	LK73Z0CA4R7M	M.CHIP INDUCTOR		1	K1,K0
	L540	LK73Z0CA4R7M	M.CHIP INDUCTOR		1	
	L541	LR79Z0JM100M	CHIP INDUCTOR		1	
	L701	LB73H0AY-004	CHIP FERRITE		1	
	L780	LK73H0BX18NG	M.CHIP INDUCTOR		1	K1,K0
	L787	LK73H0BX18NG	M.CHIP INDUCTOR		1	K1,K0
	L790	LK73H0BX2N2B	M.CHIP INDUCTOR		1	
	L792	LK73H0BX2N2B	M.CHIP INDUCTOR		1	
	L821	LB73G0ED-002	CHIP FERRITE		1	
	L830	LB73G0ED-002	CHIP FERRITE		1	
	L831	LB73H0AY-004	CHIP FERRITE		1	
	L891	L3D-0040-00	CHOKE COIL		1	K1,K0
	L901	LR79Z0JM330M	CHIP INDUCTOR		1	
	L903	LK73Z0CA4R7M	M.CHIP INDUCTOR		1	
	L960	LR73Z0AD4R7M	CHIP INDUCTOR		1	
	L961	LR73Z0AD4R7M	CHIP INDUCTOR		1	
	L990	L3D-0043-00	CHOKE COIL		1	
	L2005	LR73Z0AD4R7M	CHIP INDUCTOR		1	
	L2006	RK73HH1J470D	MG RESISTOR		1	
	L9001	LB73G0ED-002	CHIP FERRITE		1	
	A1303	W0C-0414-00	CIRCUIT MODULE		1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KMM-BT508DAB	X1	KMM-BT508DAB	E1	KMM-BT732HD	K1	KMM-X705	K0
KMR-M508DAB	E2						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	CN220	EA710AP-2002A	W TO B CONNE		1	K1,K0
	CN701	E5J-0216-00	R.RECEPTACLE		1	
	CN702	EB770BH-0830A	B TO B CONNE		1	
	CN891	EA710AP-2005A	W TO B CONNE		1	K1,K0
	CN990	E5J-0139-00	R.RECEPTACLE		1	
△	F321	F53-0513-08	PATTERN FUSE		1	
△	F322	F53-0513-08	PATTERN FUSE		1	
△	F540	FZA10BH-2R5	FUSE (CC)		1	
△	F625	FZA10BF-1R0	FUSE (CC)		1	
	J220	E1B-0013-00	3.5D PHONE JACK		1	X1,E1,E2
	J321	E6D-0016-10	PIN JACK		1	X1,K1,K0
	J321	E6D-0015-10	PIN JACK		1	E1,E2
	J470	E5G-0029-00	CYL.RECEPTACLE		1	K1,K0
	J601	E6J-0017-00	JACK OTHERS		1	K1,K0
	J602	E3A-0527-00	ANTENNA CABLE		1	X1,E1,E2
	S830	S7A-0031-00	TACTILE PUSH SW		1	
	VA471	F0K-0420-00	SURGE ABSORBER		1	K1,K0
	VA472	F0K-0420-00	SURGE ABSORBER		1	K1,K0
	VA473	F0K-0420-00	SURGE ABSORBER		1	K1,K0
	VA474	F0K-0420-00	SURGE ABSORBER		1	K1,K0
	VA475	F0K-0420-00	SURGE ABSORBER		1	K1,K0
	VA476	F0K-0420-00	SURGE ABSORBER		1	K1,K0
	VA600	F0K-0265-00	SURGE ABSORBER		1	
	VA701	F0K-0420-00	SURGE ABSORBER		1	
	VA702	F0K-0420-00	SURGE ABSORBER		1	
	VA703	F0K-0420-00	SURGE ABSORBER		1	
	VA704	F0K-0420-00	SURGE ABSORBER		1	
	VA705	F0K-0420-00	SURGE ABSORBER		1	
	VA706	F0K-0420-00	SURGE ABSORBER		1	
	VA707	F0K-0420-00	SURGE ABSORBER		1	
	VA709	F0K-0420-00	SURGE ABSORBER		1	
	VA710	F0K-0420-00	SURGE ABSORBER		1	
	VA711	F0K-0420-00	SURGE ABSORBER		1	
	VA714	F0K-0420-00	SURGE ABSORBER		1	
	VA716	F0K-0420-00	SURGE ABSORBER		1	
	VA717	F0K-0420-00	SURGE ABSORBER		1	
	VA718	F0K-0420-00	SURGE ABSORBER		1	
	VA892	EZAEG3A50A	SURGE ABSORBER		1	K1,K0
	VA893	EZAEG3A50A	SURGE ABSORBER		1	K1,K0
	VA901	SDV1005E18//0	VARISTOR		1	
	X701	L7J-0138-00	QUARTZ CRYSTAL		1	
	X702	L7J-0123-00	QUARTZ CRYSTAL		1	
SWITCH PWB ASSY (XJ6-162x-01) <XJ6>						
	IC1	BU97550KV-M	MOS IC		1	
	IC3	AS431AN-G1	ANALOG IC		1	
	IC90	LRT15CTM4	IR DETECT UNIT		1	K1,K0
	Q50	LSCR523EBFS8	TRANSISTOR		1	
	Q51	LSCR523EBFS8	TRANSISTOR		1	
	Q52	LSCR523EBFS8	TRANSISTOR		1	
	Q53	LSCR523EBFS8	TRANSISTOR		1	
	Q54	LSCR523EBFS8	TRANSISTOR		1	
	Q55	LSCR523EBFS8	TRANSISTOR		1	
	Q90	LTA014EEBFS8	DIGI TRANSISTOR		1	K1,K0
	Q91	LTC014EEBFS8	DIGI TRANSISTOR		1	K1,K0
	D2	SM5818PL	SCHOTTKY DIODE		1	
	D3	SM5818PL	SCHOTTKY DIODE		1	
	D20	QSMH-C199	LED		1	
	D21	ASMTYTD9ZDA02	LED		1	
	D22	ASMTYTD9ZDA02	LED		1	
	D23	ASMTYTD9ZDA02	LED		1	
	D24	ASMTYTD9ZDA02	LED		1	
	D49	ASMTYTD9ZDA02	LED		1	
	C1	CK73GXR1A475K	C CAPACITOR	4.7uF 10V K	1	
	C5	CK73GXR1A475K	C CAPACITOR	4.7uF 10V K	1	
	C6	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C7	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C60	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	
	C61	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	
	C80	CC73JCH1H090D	C CAPACITOR	9pF 50V D	1	
	C81	CC73JCH1H090D	C CAPACITOR	9pF 50V D	1	
	C82	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	
	C83	CK73JXR1H471K	C CAPACITOR	470pF 50V K	1	
	C84	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C85	CK73JXR1H471K	C CAPACITOR	470pF 50V K	1	
	C86	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C91	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	K1,K0
	R1	RK73HH1J473D	MG RESISTOR	47kΩ 1/16W D	1	
	R2	RK73HH1J473D	MG RESISTOR	47kΩ 1/16W D	1	
	R3	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R4	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R6	RK73EB2E151J	MG RESISTOR	150Ω 1/4W J	1	
	R8	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R10	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	1	
	R14	RK73HB1J274J	MG RESISTOR	270kΩ 1/16W J	1	
	R21	RK73EB2E391J	MG RESISTOR	390Ω 1/4W J	1	
	R22	RK73EB2E471J	MG RESISTOR	470Ω 1/4W J	1	
	R23	RK73EB2E331J	MG RESISTOR	330Ω 1/4W J	1	
	R25	RK73FB2B561J	MG RESISTOR	560Ω 1/8W J	1	
	R26	RK73FB2B681J	MG RESISTOR	680Ω 1/8W J	1	
	R27	RK73FB2B471J	MG RESISTOR	470Ω 1/8W J	1	
	R33	RK73EB2E511J	MG RESISTOR	510Ω 1/4W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KMM-BT508DAB	X1	KMM-BT508DAB	E1	KMM-BT732HD	K1	KMM-X705	K0
KMR-M508DAB	E2						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R34	RK73EB2E821J	MG RESISTOR	820Ω 1/4W J	1	
	R35	RK73EB2E561J	MG RESISTOR	560Ω 1/4W J	1	
	R40	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R41	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R42	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R43	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R44	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R45	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R46	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R47	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R48	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R49	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R50	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R51	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R52	RK73HB1J682J	MG RESISTOR	6.8kΩ 1/16W J	1	
	R53	RK73HB1J682J	MG RESISTOR	6.8kΩ 1/16W J	1	
	R54	RK73HB1J682J	MG RESISTOR	6.8kΩ 1/16W J	1	
	R55	RK73HB1J682J	MG RESISTOR	6.8kΩ 1/16W J	1	
	R56	RK73HB1J682J	MG RESISTOR	6.8kΩ 1/16W J	1	
	R57	RK73HB1J682J	MG RESISTOR	6.8kΩ 1/16W J	1	
	R60	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R61	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R62	RK73HB1J4R7J	MG RESISTOR	4.7Ω 1/16W J	1	
	R80	RK73EB2E221J	MG RESISTOR	220Ω 1/4W J	1	
	CN2	E5K-0007-00	R.PLUG		1	
	FL80	L7K-0038-00	FILTER		1	
	J60	E1B-0037-00	3.5D PHONE JACK		1	
	J80	E5J-0069-00	USB TERMINAL		1	
	S20	T9K-0007-00	ROTARY ENCODER		1	
	VA82	FOK-0420-00	SURGE ABSORBER		1	
HD TUNER PWB ASSY (XJM-035K-00) <XJM>						
	IC1	SI4763-A42-GM	MOS IC		1	K1,K0
	IC2	SI4613-A10-GM	MOS IC		1	K1,K0
	IC3	W3F-0442-00	ROM IC		1	K1,K0
	IC4	MM3608A18NH	ANALOG IC		1	K1,K0
	C2	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	K1,K0
	C3	CK73JXR1C222K	C CAPACITOR	2200pF 16V K	1	K1,K0
	C4	CK73JXR1C222K	C CAPACITOR	2200pF 16V K	1	K1,K0
	C5	CK73JXR1C222K	C CAPACITOR	2200pF 16V K	1	K1,K0
	C6	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K1,K0
	C7	CK73JXR1C473K	C CAPACITOR	0.047uF 16V K	1	K1,K0
	C8	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K1,K0
	C9	CC73JCH1H390J	C CAPACITOR	39pF 50V J	1	K1,K0
	C10	CC73JCH1H270J	C CAPACITOR	27pF 50V J	1	K1,K0
	C11	CC73JCH1H0R5C	C CAPACITOR	0.5pF 50V C	1	K1,K0
	C15	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	K1,K0
	C16	CC73JCH1H050C	C CAPACITOR	5pF 50V C	1	K1,K0
	C18	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	K1,K0
	C19	CK73JXR1C103K	C CAPACITOR	0.01uF 16V K	1	K1,K0
	C20	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K1,K0
	C21	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	K1,K0
	C22	CC73JCH1E102J	C CAPACITOR	1000pF 25V J	1	K1,K0
	C25	CK73JXR1H682K	C CAPACITOR	6800pF 50V K	1	K1,K0
	C26	CK73JXR1H682K	C CAPACITOR	6800pF 50V K	1	K1,K0
	C27	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K1,K0
	C28	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K1,K0
	C29	CC73JCH1H060D	C CAPACITOR	6pF 50V D	1	K1,K0
	C30	CC73JCH1H060D	C CAPACITOR	6pF 50V D	1	K1,K0
	C33	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K1,K0
	C40	CC73JCH1H020C	C CAPACITOR	2pF 50V C	1	K1,K0
	C42	CC73JCH1H150J	C CAPACITOR	15pF 50V J	1	K1,K0
	C43	CC73JCH1H150J	C CAPACITOR	15pF 50V J	1	K1,K0
	C44	CC73GCH1H010C	C CAPACITOR	1pF 50V C	1	K1,K0
	C48	CC73GCH1H010C	C CAPACITOR	1pF 50V C	1	K1,K0
	C50	CC73JCH1H0R5C	C CAPACITOR	0.5pF 50V C	1	K1,K0
	C51	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	K1,K0
	C52	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	K1,K0
	C53	CC73JCH1H0R5C	C CAPACITOR	0.5pF 50V C	1	K1,K0
	C54	CC73JCH1H0R5C	C CAPACITOR	0.5pF 50V C	1	K1,K0
	C55	CC73JCH1H101J	C CAPACITOR	100pF 50V J	1	K1,K0
	C56	CC73GCH1H010C	C CAPACITOR	1pF 50V C	1	K1,K0
	C57	CK73GXR1A475K	C CAPACITOR	4.7uF 10V K	1	K1,K0
	C101	CC73JCH1H220J	C CAPACITOR	22pF 50V J	1	K1,K0
	C102	CC73JCH1H220J	C CAPACITOR	22pF 50V J	1	K1,K0
	C103	CC73JCH1H220J	C CAPACITOR	22pF 50V J	1	K1,K0
	C111	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	K1,K0
	C113	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	K1,K0
	C119	CC73JCH1H150J	C CAPACITOR	15pF 50V J	1	K1,K0
	C121	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K1,K0
	C122	CC73JCH1E102J	C CAPACITOR	1000pF 25V J	1	K1,K0
	C123	CC73JCH1H180J	C CAPACITOR	18pF 50V J	1	K1,K0
	C124	CC73JCH1H180J	C CAPACITOR	18pF 50V J	1	K1,K0
	C125	CC73JCH1H180J	C CAPACITOR	18pF 50V J	1	K1,K0
	C127	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	K1,K0
	C128	CC73JCH1H020C	C CAPACITOR	2pF 50V C	1	K1,K0
	C129	CK73JXR1C222K	C CAPACITOR	2200pF 16V K	1	K1,K0
	C131	CC73JCH1H180J	C CAPACITOR	18pF 50V J	1	K1,K0
	C143	CK73JXR1C222K	C CAPACITOR	2200pF 16V K	1	K1,K0
	C144	CK73JXR1C222K	C CAPACITOR	2200pF 16V K	1	K1,K0
	C146	CK73JXR1C222K	C CAPACITOR	2200pF 16V K	1	K1,K0
	C9002	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	K1,K0

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KMM-BT508DAB	X1	KMM-BT508DAB	E1	KMM-BT732HD	K1	KMM-X705	K0
KMR-M508DAB	E2						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C9003	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	K1,K0
	C9004	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	K1,K0
	C9005	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	K1,K0
	C9006	CC73JCH1H010C	C CAPACITOR	1pF 50V C	1	K1,K0
	C9007	CC73JCH1H010C	C CAPACITOR	1pF 50V C	1	K1,K0
	C9009	CK73JXR0J474K	C CAPACITOR	0.47uF 6.3V K	1	K1,K0
	C9010	CC73JCH1H150J	C CAPACITOR	15pF 50V J	1	K1,K0
	C9011	CC73JCH1H150J	C CAPACITOR	15pF 50V J	1	K1,K0
	C9013	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	K1,K0
	C9016	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	K1,K0
	C9019	CC73JCH1H010C	C CAPACITOR	1pF 50V C	1	K1,K0
	C9020	CC73JCH1H010C	C CAPACITOR	1pF 50V C	1	K1,K0
	C9023	CC73JCH1H010C	C CAPACITOR	1pF 50V C	1	K1,K0
	C58	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	K1,K0
	C59	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K1,K0
	R1	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K1,K0
	R3	RK73HB1J240J	MG RESISTOR	24Ω 1/16W J	1	K1,K0
	R4	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	1	K1,K0
	R5	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	1	K1,K0
	R10	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	K1,K0
	R11	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	K1,K0
	R12	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K1,K0
	R14	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	K1,K0
	R16	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K1,K0
	R17	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K1,K0
	R18	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K1,K0
	R26	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K1,K0
	R39	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K1,K0
	R40	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K1,K0
	R41	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K1,K0
	R42	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K1,K0
	R43	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K1,K0
	R44	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K1,K0
	R51	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	K1,K0
	R52	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	K1,K0
	R53	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	K1,K0
	R54	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	K1,K0
	R60	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K1,K0
	R61	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K1,K0
	R62	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	K1,K0
	R103	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K1,K0
	R104	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K1,K0
	R105	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K1,K0
	R107	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	K1,K0
	R108	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	K1,K0
	R109	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K1,K0
	R110	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K1,K0
	R111	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K1,K0
	R112	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K1,K0
	R114	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K1,K0
	R115	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K1,K0
	R116	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K1,K0
	R121	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K1,K0
	R122	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K1,K0
	R123	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K1,K0
	R124	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K1,K0
	R127	RK73HB1J122J	MG RESISTOR	1.2kΩ 1/16W J	1	K1,K0
	R129	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K1,K0
	R140	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K1,K0
	R141	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K1,K0
	R142	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K1,K0
	R143	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K1,K0
	R144	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K1,K0
	R145	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K1,K0
	R155	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K1,K0
	R166	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K1,K0
	R9005	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	K1,K0
	R9007	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	K1,K0
	R9008	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K1,K0
	L1	LK73H0BUR18K	M.CHIP INDUCTOR		1	K1,K0
	L2	LK73G0BE82NK	M.CHIP INDUCTOR		1	K1,K0
	L3	LK73G0BER12K	M.CHIP INDUCTOR		1	K1,K0
	L4	LK73H0BU1R2K	M.CHIP INDUCTOR		1	K1,K0
	L5	LK73G0BE1R8K	M.CHIP INDUCTOR		1	K1,K0
	L8	LK73G0BER39K	M.CHIP INDUCTOR		1	K1,K0
	L9	LK73G0AS10NJ	M.CHIP INDUCTOR		1	K1,K0
	L10	L1K-0001-00	BALUN TRANS		1	K1,K0
	L14	LK73G0BE100K	M.CHIP INDUCTOR		1	K1,K0
	L21	LB73G0EB-001	CHIP FERRITE		1	K1,K0
	L22	LB73G0EB-001	CHIP FERRITE		1	K1,K0
	L101	LB73G0FK-001	CHIP FERRITE		1	K1,K0
	L9001	LR73Z0AD4R7M	CHIP INDUCTOR		1	K1,K0
	CN1	EB740BH-0830B	B TO B CONNE		1	K1,K0
	E1	F1B-0107-00	SHIELDING CASE		1	K1,K0
	X1	L7J-0021-00	QUARTZ CRYSTAL		1	K1,K0
DAB TUNER PWB ASSY (XJM-033E-0x) <XJM>						
	IC1	SI4763-A42-GM	MOS IC		1	X1,E1,E2
	IC2	MTV301CQ	MOS IC		1	X1,E1,E2
	IC3	GL3511S-B169	MOS IC		1	X1,E1,E2
	IC4	W3F-0441-00	ROM IC		1	X1,E1,E2
	IC5	MM3608A12NH	ANALOG IC		1	X1,E1,E2

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KMM-BT508DAB	X1	KMM-BT508DAB	E1	KMM-BT732HD	K1	KMM-X705	K0
KMR-M508DAB	E2						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	IC6	MM3608A18NH	ANALOG IC		1	X1,E1,E2
	IC7	MM3608A18NH	ANALOG IC		1	X1,E1,E2
	D431	UDZV3.3B	ZENER DIODE		1	X1,E1,E2
	C1	CC73JCH1H270J	C CAPACITOR	27pF 50V J	1	X1,E1,E2
	C2	CC73JCH1H390J	C CAPACITOR	39pF 50V J	1	X1,E1,E2
	C3	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	X1,E1,E2
	C4	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	X1,E1,E2
	C5	CK73JXR1C103K	C CAPACITOR	0.01uF 16V K	1	X1,E1,E2
	C6	CC73JCH1H010C	C CAPACITOR	1pF 50V C	1	X1,E1,E2
	C7	CC73JCH1H050C	C CAPACITOR	5pF 50V C	1	X1,E1,E2
	C10	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	X1,E1,E2
	C13	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	X1,E1,E2
	C14	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	X1,E1,E2
	C15	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	X1,E1,E2
	C16	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	X1,E1,E2
	C17	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	X1,E1,E2
	C18	CC73JCH1H101J	C CAPACITOR	100pF 50V J	1	X1,E1,E2
	C19	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	X1,E1,E2
	C20	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	X1,E1,E2
	C21	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	X1,E1,E2
	C22	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	X1,E1,E2
	C23	CK73JXR1H682K	C CAPACITOR	6800pF 50V K	1	X1,E1,E2
	C24	CK73JXR1H682K	C CAPACITOR	6800pF 50V K	1	X1,E1,E2
	C25	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	X1,E1,E2
	C26	CC73JCH1H150J	C CAPACITOR	15pF 50V J	1	X1,E1,E2
	C27	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	X1,E1,E2
	C28	CC73JCH1H180J	C CAPACITOR	18pF 50V J	1	X1,E1,E2
	C29	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	X1,E1,E2
	C30	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	X1,E1,E2
	C31	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	X1,E1,E2
	C32	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	X1,E1,E2
	C33	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	X1,E1,E2
	C36	CC73JCH1H060C	C CAPACITOR	6pF 50V C	1	X1,E1,E2
	C37	CC73JCH1H060C	C CAPACITOR	6pF 50V C	1	X1,E1,E2
	C38	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	X1,E1,E2
	C39	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	X1,E1,E2
	C41	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	X1,E1,E2
	C42	CC73JCH1H080C	C CAPACITOR	8pF 50V C	1	X1,E1,E2
	C43	CC73JCH1H030C	C CAPACITOR	3pF 50V C	1	X1,E1,E2
	C44	CC73JCH1H330J	C CAPACITOR	33pF 50V J	1	X1,E1,E2
	C45	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	X1,E1,E2
	C46	CC73JCH1H680J	C CAPACITOR	68pF 50V J	1	X1,E1,E2
	C47	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	X1,E1,E2
	C48	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	X1,E1,E2
	C49	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	X1,E1,E2
	C50	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	X1,E1,E2
	C51	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	X1,E1,E2
	C52	CK73JXR1C224K	C CAPACITOR	0.22uF 16V K	1	X1,E1,E2
	C53	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	X1,E1,E2
	C54	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	X1,E1,E2
	C55	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	X1,E1,E2
	C56	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	X1,E1,E2
	C57	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	X1,E1,E2
	C58	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	X1,E1,E2
	C59	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	X1,E1,E2
	C60	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	X1,E1,E2
	C61	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	X1,E1,E2
	C62	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	X1,E1,E2
	C63	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	X1,E1,E2
	C64	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	X1,E1,E2
	C65	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	X1,E1,E2
	C66	CK73JXR1C224K	C CAPACITOR	0.22uF 16V K	1	X1,E1,E2
	C67	CK73JXR1C224K	C CAPACITOR	0.22uF 16V K	1	X1,E1,E2
	C68	CK73JXR1C224K	C CAPACITOR	0.22uF 16V K	1	X1,E1,E2
	C69	CK73JXR1C224K	C CAPACITOR	0.22uF 16V K	1	X1,E1,E2
	C70	CK73JXR1C224K	C CAPACITOR	0.22uF 16V K	1	X1,E1,E2
	C71	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	X1,E1,E2
	C72	CK73JXR1C224K	C CAPACITOR	0.22uF 16V K	1	X1,E1,E2
	C73	CK73JXR1C224K	C CAPACITOR	0.22uF 16V K	1	X1,E1,E2
	C74	CK73JXR1C224K	C CAPACITOR	0.22uF 16V K	1	X1,E1,E2
	C75	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	X1,E1,E2
	C76	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	X1,E1,E2
	C77	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	X1,E1,E2
	C78	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	X1,E1,E2
	C79	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	X1,E1,E2
	C80	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	X1,E1,E2
	C81	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	X1,E1,E2
	C82	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	X1,E1,E2
	C86	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	X1,E1,E2
	C87	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	X1,E1,E2
	C96	CC73JCH1H221J	C CAPACITOR	220pF 50V J	1	X1,E1,E2
	C97	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	X1,E1,E2
	C9008	CK73JXR1C472K	C CAPACITOR	4700pF 16V K	1	X1,E1,E2
	C9012	CK73JXR1C472K	C CAPACITOR	4700pF 16V K	1	X1,E1,E2
	C9014	CK73JXR1C103K	C CAPACITOR	0.01uF 16V K	1	X1,E1,E2
	C9017	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	X1,E1,E2
	C9020	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	X1,E1,E2
	C9021	CC73JCH1H010C	C CAPACITOR	1pF 50V C	1	X1,E1,E2
	C9023	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	X1,E1,E2
	C9024	CC73JCH1H010C	C CAPACITOR	1pF 50V C	1	X1,E1,E2
	C9026	CC73JCH1H120J	C CAPACITOR	12pF 50V J	1	X1,E1,E2
	C9027	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	X1,E1,E2

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KMM-BT508DAB	X1	KMM-BT508DAB	E1	KMM-BT732HD	K1	KMM-X705	K0
KMR-M508DAB	E2						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C9028	CC73JCH1E561J	C CAPACITOR	560pF 25V J	1	X1,E1,E2
	C9029	CC73JCH1E561J	C CAPACITOR	560pF 25V J	1	X1,E1,E2
	C9030	CK73JXR1C103K	C CAPACITOR	0.01uF 16V K	1	X1,E1,E2
	C9031	CK73JXR1E223K	C CAPACITOR	0.022uF 25V K	1	X1,E1,E2
	C9033	CK73JXR1C103K	C CAPACITOR	0.01uF 16V K	1	X1,E1,E2
	C9035	CC73JCH1H0R5C	C CAPACITOR	0.5pF 50V C	1	X1,E1,E2
	C9036	CK73JXR1C472K	C CAPACITOR	4700pF 16V K	1	X1,E1,E2
	C9037	CK73JXR1C103K	C CAPACITOR	0.01uF 16V K	1	X1,E1,E2
	C9038	CK73JXR1C103K	C CAPACITOR	0.01uF 16V K	1	X1,E1,E2
	C9039	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	X1,E1,E2
	C9040	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	X1,E1,E2
	C9041	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	X1,E1,E2
	C9042	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	X1,E1,E2
	C9043	CC73JCH1H010C	C CAPACITOR	1pF 50V C	1	X1,E1,E2
	C9045	CC73JCH1H010C	C CAPACITOR	1pF 50V C	1	X1,E1,E2
	C9046	CC73JCH1H010C	C CAPACITOR	1pF 50V C	1	X1,E1,E2
	R1	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	1	X1,E1,E2
	R2	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	1	X1,E1,E2
	R3	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	X1,E1,E2
	R5	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	X1,E1,E2
	R6	RK73HB1J240J	MG RESISTOR	24Ω 1/16W J	1	X1,E1,E2
	R7	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	X1,E1,E2
	R13	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	X1,E1,E2
	R14	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	X1,E1,E2
	R15	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	X1,E1,E2
	R16	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	X1,E1,E2
	R17	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	X1,E1,E2
	R18	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	X1,E1,E2
	R19	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	X1,E1,E2
	R20	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	X1,E1,E2
	R21	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	X1,E1,E2
	R22	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	X1,E1,E2
	R23	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	X1,E1,E2
	R24	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	X1,E1,E2
	R25	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	X1,E1,E2
	R26	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	X1,E1,E2
	R27	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	X1,E1,E2
	R28	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	X1,E1,E2
	R29	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	X1,E1,E2
	R30	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	X1,E1,E2
	R33	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	X1,E1,E2
	R34	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	X1,E1,E2
	R35	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	X1,E1,E2
	R36	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	X1,E1,E2
	R37	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	X1,E1,E2
	R38	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	X1,E1,E2
	R39	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	X1,E1,E2
	R40	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	X1,E1,E2
	R41	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	X1,E1,E2
	R44	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	X1,E1,E2
	R46	RK73HH1J433D	MG RESISTOR	43kΩ 1/16W D	1	X1,E1,E2
	R47	RK73HH1J433D	MG RESISTOR	43kΩ 1/16W D	1	X1,E1,E2
	R48	RK73HH1J623D	MG RESISTOR	62kΩ 1/16W D	1	X1,E1,E2
	R49	RK73HH1J623D	MG RESISTOR	62kΩ 1/16W D	1	X1,E1,E2
	R50	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	X1,E1,E2
	R51	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	X1,E1,E2
	R52	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	X1,E1,E2
	R53	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	X1,E1,E2
	R54	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	X1,E1,E2
	R55	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	X1,E1,E2
	R56	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	X1,E1,E2
	R57	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	X1,E1,E2
	R58	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	X1,E1,E2
	R59	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	X1,E1,E2
	R60	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	X1,E1,E2
	R61	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	X1,E1,E2
	R62	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	X1,E1,E2
	R63	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	X1,E1,E2
	R64	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	X1,E1,E2
	R65	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	X1,E1,E2
	R66	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	X1,E1,E2
	R67	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	X1,E1,E2
	R68	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	X1,E1,E2
	R69	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	X1,E1,E2
	R70	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	X1,E1,E2
	R71	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	X1,E1,E2
	R72	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	X1,E1,E2
	R73	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	X1,E1,E2
	R74	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	X1,E1,E2
	R75	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	X1,E1,E2
	R76	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	X1,E1,E2
	R77	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	X1,E1,E2
	R78	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	X1,E1,E2
	R79	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	X1,E1,E2
	R80	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	X1,E1,E2
	R81	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	X1,E1,E2
	R82	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	X1,E1,E2
	R83	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	X1,E1,E2
	R84	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	X1,E1,E2
	R88	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	X1,E1,E2

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KMM-BT508DAB	X1	KMM-BT508DAB	E1	KMM-BT732HD	K1	KMM-X705	K0
KMR-M508DAB	E2						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
R89		RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	X1,E1,E2
R90		RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	X1,E1,E2
R91		RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	X1,E1,E2
R92		RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	X1,E1,E2
R93		RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	X1,E1,E2
R95		RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	X1,E1,E2
R96		RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	X1,E1,E2
R97		RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	X1,E1,E2
R98		RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	X1,E1,E2
R100		RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	X1,E1,E2
R102		RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	X1,E1,E2
R105		RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	X1,E1,E2
R447		RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	X1,E1,E2
R448		RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	X1,E1,E2
R449		RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	X1,E1,E2
R450		RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	X1,E1,E2
R451		RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	X1,E1,E2
R457		RK73GB2A152J	MG RESISTOR	1.5kΩ 1/10W J	1	X1,E1,E2
R458		RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	X1,E1,E2
R459		RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	1	X1,E1,E2
R9004		RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	X1,E1,E2
R9005		RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	X1,E1,E2
L2		LK73G0BER12K	M.CHIP INDUCTOR		1	X1,E1,E2
L3		LK73G0BE82NK	M.CHIP INDUCTOR		1	X1,E1,E2
L4		LK73G0BER12K	M.CHIP INDUCTOR		1	X1,E1,E2
L5		L1K-0001-00	BALUN TRANS		1	X1,E1,E2
L6		LK73G0BE1R8K	M.CHIP INDUCTOR		1	X1,E1,E2
L7		LK73G0BER39K	M.CHIP INDUCTOR		1	X1,E1,E2
L8		LK73G0BE100K	M.CHIP INDUCTOR		1	X1,E1,E2
L10		LK73G0BF33NJ	M.CHIP INDUCTOR		1	X1,E1,E2
L11		LK73G0BF68NJ	M.CHIP INDUCTOR		1	X1,E1,E2
L12		LK73G0BFR15J	M.CHIP INDUCTOR		1	X1,E1,E2
L13		LK73G0BFR15J	M.CHIP INDUCTOR		1	X1,E1,E2
L14		LK73G0BF3N3S	M.CHIP INDUCTOR		1	X1,E1,E2
L15		LK73G0BF5N6S	M.CHIP INDUCTOR		1	X1,E1,E2
L16		LK73G0BF10NJ	M.CHIP INDUCTOR		1	X1,E1,E2
L17		LK73G0BF10NJ	M.CHIP INDUCTOR		1	X1,E1,E2
L18		LK73G0BF82NJ	M.CHIP INDUCTOR		1	X1,E1,E2
L20		LK73G0BFR22J	M.CHIP INDUCTOR		1	X1,E1,E2
L21		LK73G0BFR22J	M.CHIP INDUCTOR		1	X1,E1,E2
L22		LB73G0FK-001	CHIP FERRITE		1	X1,E1,E2
L23		LB73G0EB-001	CHIP FERRITE		1	X1,E1,E2
L24		LB73G0EB-001	CHIP FERRITE		1	X1,E1,E2
L26		LB73G0EB-001	CHIP FERRITE		1	X1,E1,E2
L29		LB73H0CG-001	CHIP FERRITE		1	X1,E1,E2
L30		LB73H0CG-001	CHIP FERRITE		1	X1,E1,E2
L31		LB73G0AM-004	CHIP FERRITE		1	X1,E1,E2
L32		LR73Z0AD4R7M	CHIP INDUCTOR		1	X1,E1,E2
L33		LB73H0AY-004	CHIP FERRITE		1	X1,E1,E2
L34		LB73H0AY-004	CHIP FERRITE		1	X1,E1,E2
L35		LB73H0AY-004	CHIP FERRITE		1	X1,E1,E2
CN1		EB740BH-0830B	B TO B CONNE		1	X1,E1,E2
E1		F1B-0106-00	SHIELDING CASE		1	X1,E1,E2
J1		E0E-0058-00	C.RECEPTACLE-SM		1	X1,E1,E2
TH1		FSMD035-R	P THERMISTOR		1	X1,E1,E2
VA1		F0K-0425-00	SURGE ABSORBER		1	X1,E1,E2
X1		L7J-0028-00	QUARTZ CRYSTAL		1	X1,E1,E2
X2		L7J-0027-00	QUARTZ CRYSTAL		1	X1,E1,E2