


Exploded view of general assembly and parts list

Block No.M1MM

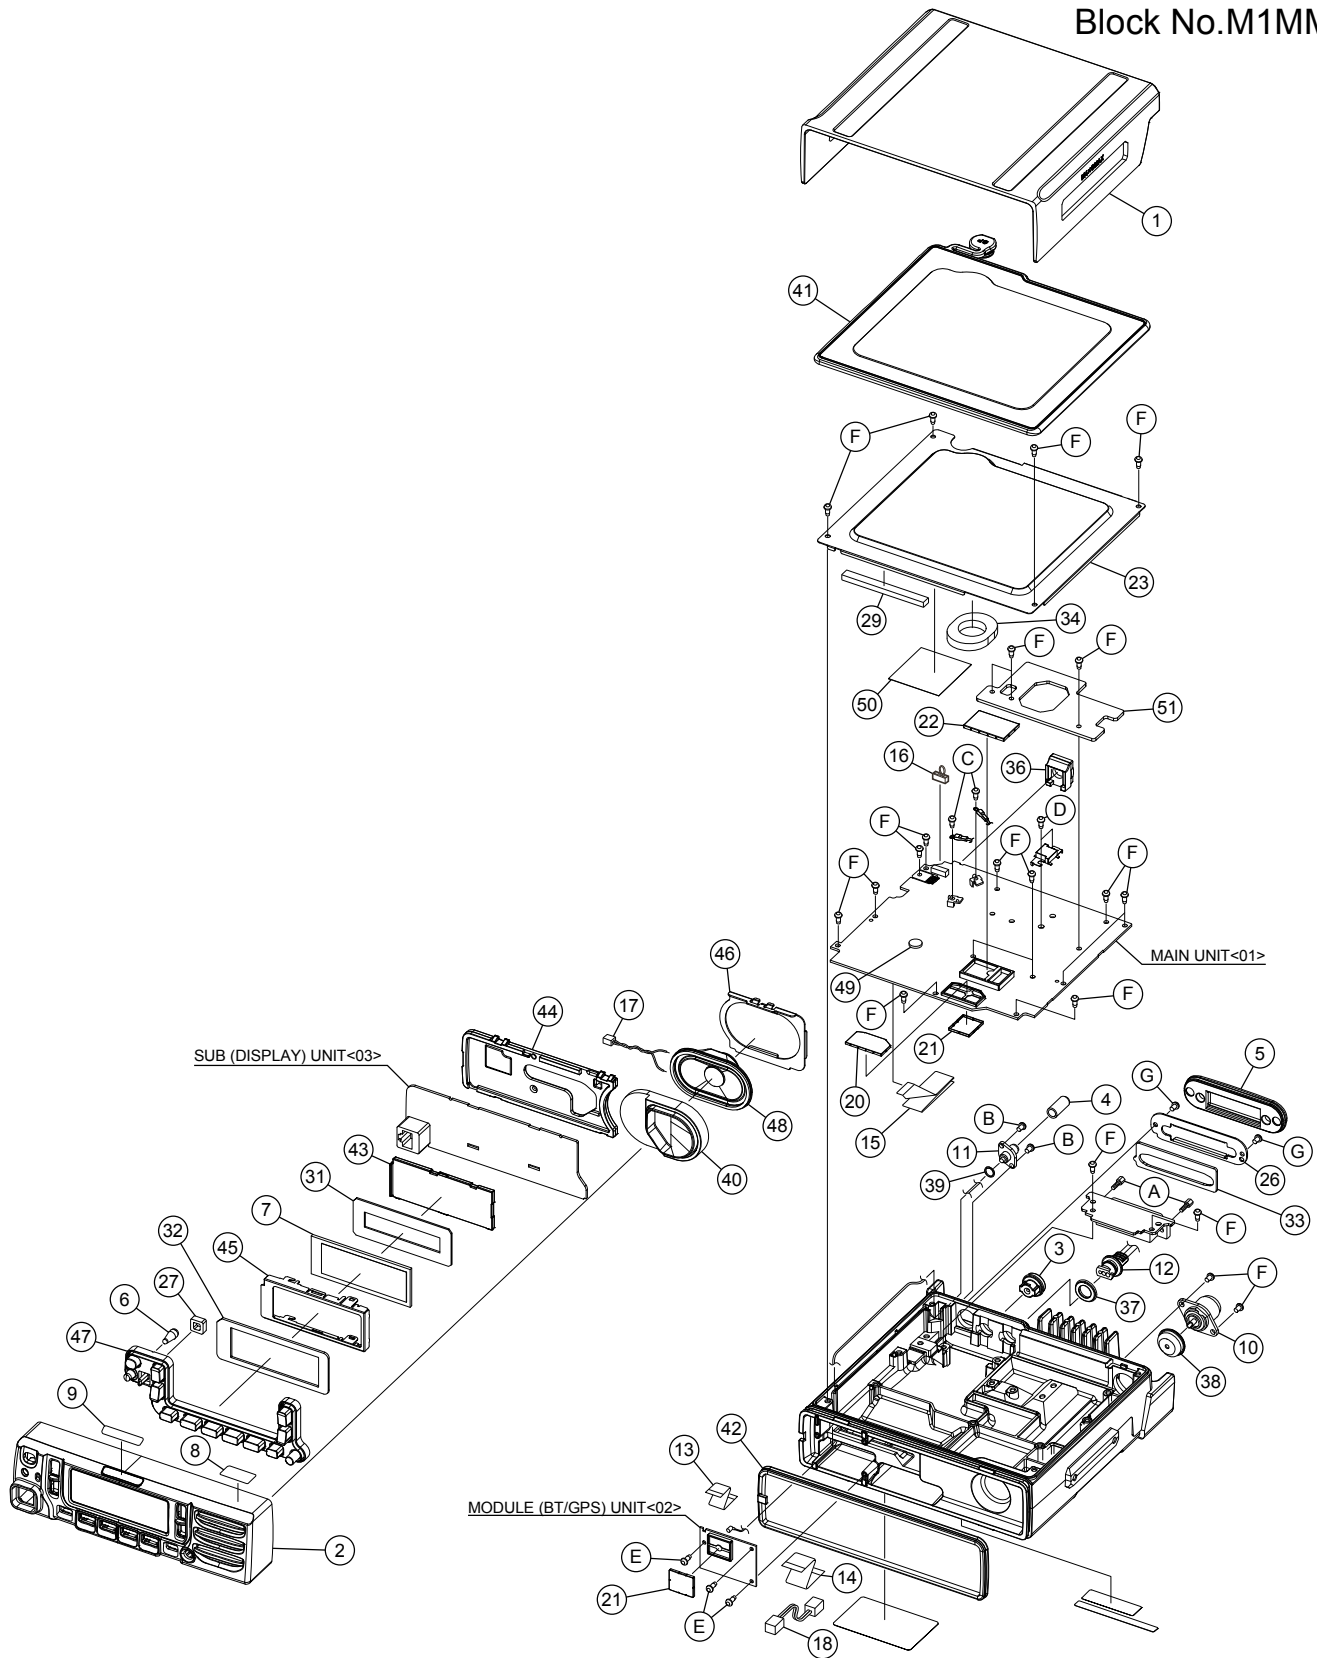


General assembly

Block No. [M][1][M][M]

△ Symbol No.	Part No.	Part Name	Description	Local
1	A0C-0107-00	PLASTIC CABINET		
2	A6C-0003-20	PANEL ASSY		5900_K
3	B09-0681-03	CAP(KAP-2)		
4	B09-0754-05	CAP(SMA)		
5	B0K-0004-00	CAP(D-SUB)		
6	B1B-0017-00	ILLUMINATION GUIDE		5900_K
7	B38-0966-05	LCD ASSY		5900_K
8	B4B-0008-00	CAUTION STICKER		5900_K
9	B4D-0021-00	BADGE		5900_K
10	E04-0170-35	RF COAXIAL RECEPTACLE-N (ANT)		
11	E0E-0021-00	RF COAXIAL RECEPTACLE-SMA (GPS)		
12	E30-7520-45	DC CORD		
13	E3F-0017-00	FLAT CABLE(20P)		
14	E3F-0019-00	FLAT CABLE(50P)		
15	E3F-0021-10	FLAT CABLE(30P)		
16	E37-1118-05	LEAD WIRE WITH CONNECTOR(SHORT CABLE)		
17	E37-1693-05	LEAD WIRE WITH CONNECTOR(SP 2P)		5900_K
18	E3H-0008-00	LEAD WIRE WITH CONNECTOR(4P)		
20	F10-3223-05	SHIELDING COVER(BLS(IF IC))		
21	F10-3225-05	SHIELDING COVER(BLS(BT/GPS,DCDC54M)) (x2)		
22	F10-3243-15	SHIELDING COVER(BLS(PLL IC))		
23	F1A-0017-00	SHIELDING PLATE(TOP)		
26	F1E-0001-00	SHIELDING PLATE(D-SUB)		
27	F1E-0002-00	SHADE(TX-BUSY)		5900_K
29	G13-1837-04	CUSHION		
31	G1D-0011-00	CUSHION(LCD-HOLDER)		5900_K
32	G1D-0012-10	CUSHION(LCD-F.GLASS)		5900_K
33	G1D-0018-00	CUSHION(D-SUB)		
34	G1D-0028-00	CUSHION(DC SCREW)		
36	G53-1616-13	PACKING(PHONE JACK)		
37	G53-1643-04	PACKING(DC CORD)		
38	G53-1789-04	PACKING(ANT(N))		
39	G53-1768-04	PACKING(SMA)		
40	G5D-0053-00	PACKING(SP)		5900_K
41	G5D-0061-00	PACKING(TOP)		
42	G5D-0017-00	PACKING(FRONT)		
43	J1K-0018-00	HOLDER(LCD)		5900_K
44	J1K-0019-00	HOLDER(PCB PANEL)		5900_K
45	J2B-0021-00	MOUNTING HARDWARE(LCD)		5900_K
46	J2B-0023-00	MOUNTING HARDWARE(SP)		5900_K
47	K2K-0100-10	KEY TOP		5900_K
48	T07-0810-05	SPEAKER		5900_K
49	W09-0971-05	LITHIUM CELL(MAIN UNIT)		
50	G13-1801-04	CUSHION		
51	F0B-0083-00	RADIATION PLATE		
A	N09-2292-05	HEXAGON HEAD SCREW(D-SUB)	(x2)	
B	N30-2606-48	P.HEAD M.SCREW(SMA)	(x2)	
C	N67-3008-48	PAN HEAD SEMS SCREW(DC)	(x2)	
D	N67-3010-43	P.H.SEMS SCREW(FINAL FET)	(x2)	
E	N83-2005-48	PAN HEAD TAPTITE SCREW(MODULE UNIT)	(x3)	
F	N87-2608-48	BRAZIER HEAD TAPTITE SCREW	(x23)	
G	N89-2606-43	BINDING HEAD TAPTITE SCREW(D-SUB)	(x2)	
-	XC1-1021-81	SERVICE MAIN UNIT		
-	XC2-0031-80	MODULE UNIT(BT/GPS)		
-	XC3-0020-20	SUB UNIT(DISPLAY)		5900_K

Packing materials and accessories parts list (NX-5900_K)

Block No.M2MM

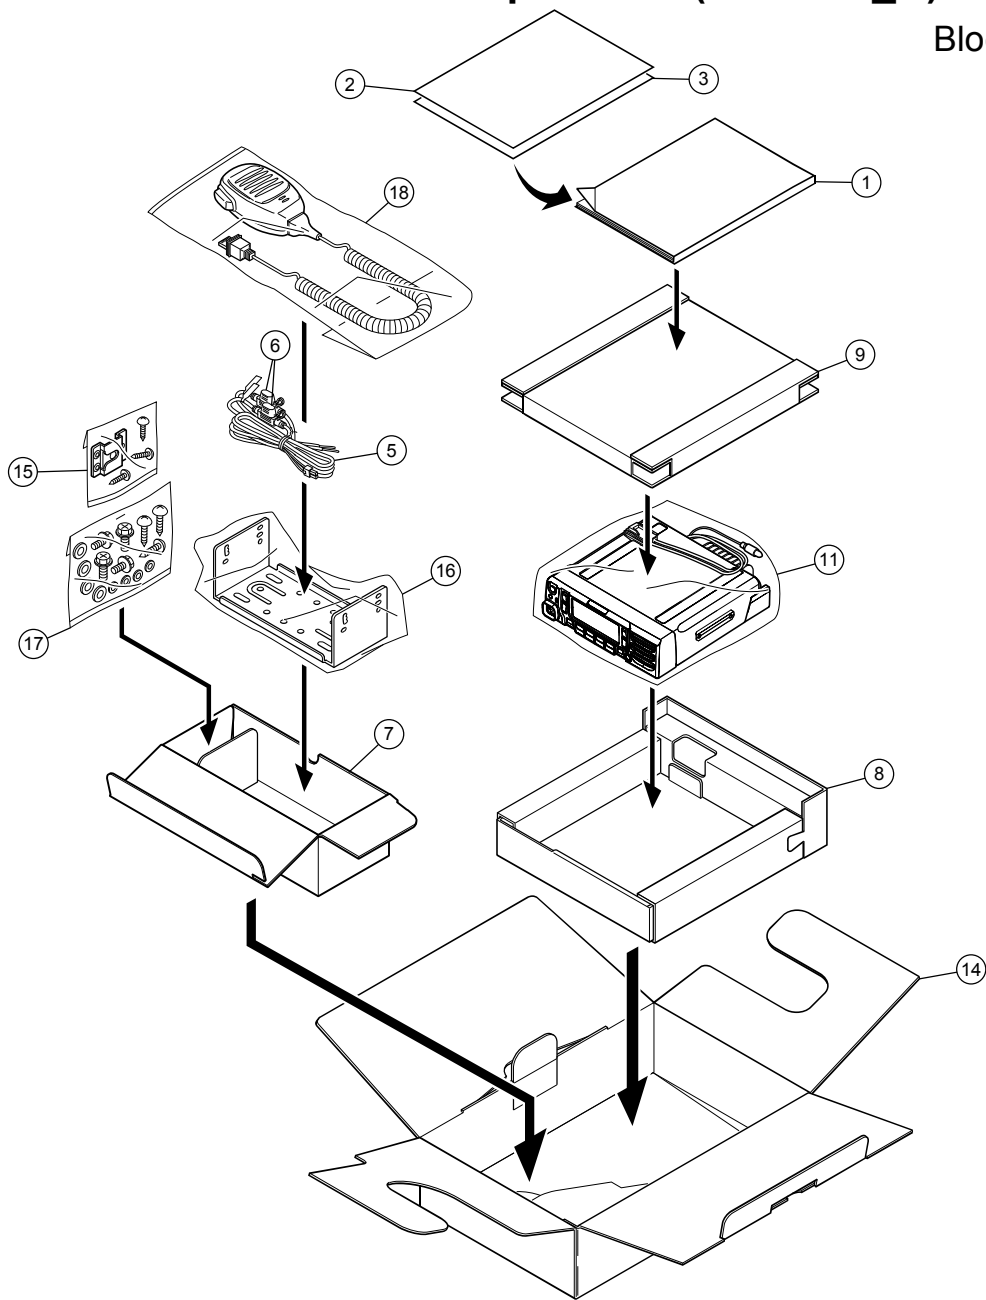


Packing and accessories

Block No. [M][2][M][M]
Local

△ Symbol No.	Part No.	Part Name	Description
1	B5A-0868-00	INSTRUCTION MANUAL	
2	-----	PAMPHLET	
3	-----	PAMPHLET	
5	E30-7523-65	DC CORD ASSY	
6	F52-0024-05	FUSE(BLADE TYPE)	15A(x2)
7	H0C-0007-00	INNER CARTON CASE	
8	H1C-0077-00	PACKING FIXTURE(LOWER)	
9	H1C-0078-00	PACKING FIXTURE(UPPER)	
11	-----	PROTECTION BAG	
14	H5A-0618-00	ITEM CARTON	
15	J19-1584-15	HOLDER(MIC)	
16	-----	BRACKET	
17	N99-2039-05	SCREW SET	
18	T91-0639-65	MICROPHONE	

Packing materials and accessories parts list (NX-5900B_F,NX-5900B_K)

Block No.M3MM

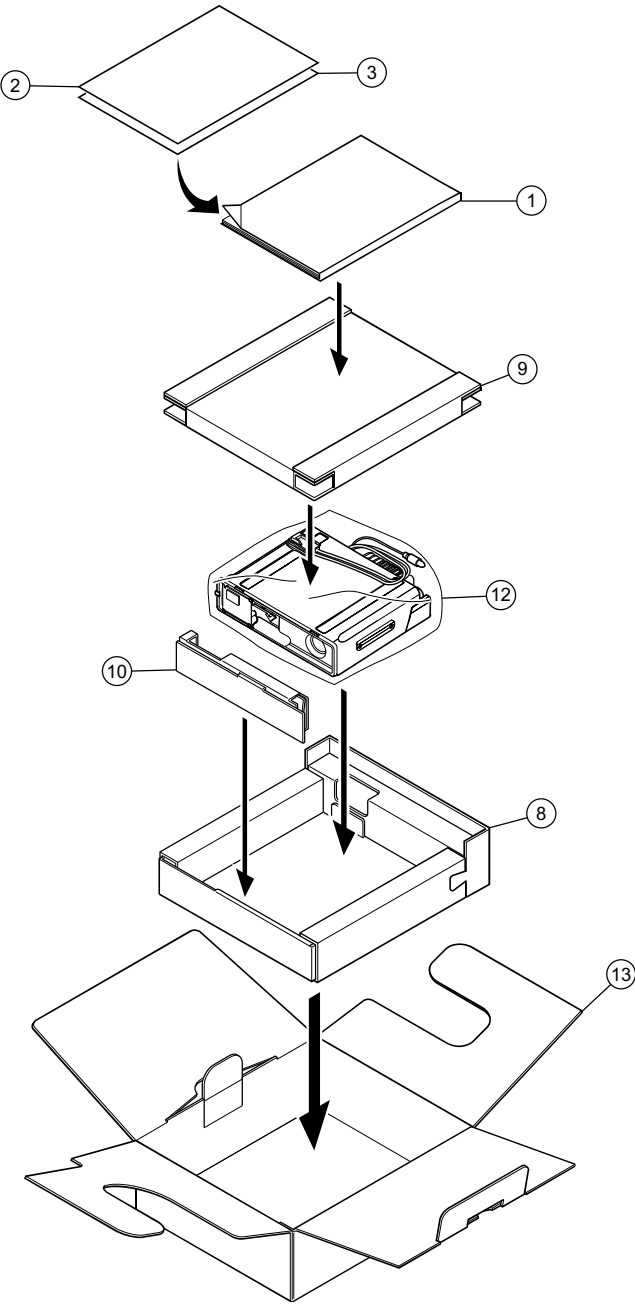

Packing and accessories

Block No. [M][3][M][M]
Local

Symbol No.	Part No.	Part Name	Description
1	B5A-0868-00	INSTRUCTION MANUAL	
2	-----	PAMPHLET	
3	-----	PAMPHLET	
8	H1C-0077-00	PACKING FIXTURE(LOWER)	
9	H1C-0078-00	PACKING FIXTURE(UPPER)	
10	H1C-0027-00	PACKING FIXTURE(SPACER)	
12	-----	ANTI-STATIC BAG	
13	H5A-0617-00	ITEM CARTON	

Electrical parts list

MAIN UNIT

XC1-1021-80

***Note : This part cannot be replaced. Therefore, this part is not supplied as a service part.**

Block No. [0][1]

△ Symbol No.	Part No.	Part Name	Description	Local
IC1	-----	IC	*Note	
IC2	MSP430G25KGA	IC		
IC3	XC6215B122N-G	IC		
IC4	NJM2878F4-33	IC		
IC5	XC6223D331P-G	IC		
IC6	-----	IC	*Note	
IC7	XC6223H331P-G	IC		
IC8	TPS54240DGQ	IC		
IC9	XC8102AA07-G	IC		
IC10	-----	IC	*Note	
IC11	LXDC2HN18F163	IC		
IC12	NJM2878F4-33	IC		
IC13	TPS61041DRVR	IC		
IC14	XC6223H331P-G	IC		
IC15	BA00DD0WHFP	IC		
IC16	XC6209B502P-G	IC		
IC17	-----	IC	*Note	
IC18	XC61CN5002N-G	IC		
IC100	SKY72310362LF	IC		
IC101	TC7SH17FUF	IC		
IC102	BA2904FVM	IC		
IC300	-----	IC	*Note	
IC302	ADL5513	IC		
IC303	NJM12904RB1	IC		
IC304	NJM12904RB1	IC		
IC305	NJM12904RB1	IC		
IC500	AK1224	IC		
IC501	UPG2214TK-A	IC		
IC502	UPG2214TK-A	IC		
IC600	AD9864BCPZRL	IC		
IC701	-----	IC	*Note	
IC702	-----	IC	*Note	
IC703	CDC3S04YFF	IC		
IC704	TC7SZ08FE	IC		
IC705	TC7WH126FU-F	IC		
IC706	-----	IC	*Note	
IC707	BD11600NUX	IC		
IC708	BD11600NUX	IC		
IC709	TC7SET125FUF	IC		
IC710	TC7SZ08FE	IC		
IC711	-----	IC	*Note	
IC712	ADS7961SRHB	IC		
IC714	BD11600NUX	IC		
IC715	DAC124S085CIS	IC		
IC719	R2A20178NP	IC		
IC720	XC61CN5002N-G	IC		
IC900	TC7SET08FUF	IC		
IC901	BU7242NUX	IC		
IC902	TLV32AIC3104I	IC		
IC903	BU7242NUX	IC		
IC904	TC7SET125FUF	IC		
IC905	TC7WT125FUF	IC		
IC906	TC7WBD125AFK	IC		
IC907	BD11600NUX	IC		
IC908	TC7WH14FK-F	IC		
IC909	ADM3202ARUZ	IC		
IC910	PCA9555AHF	IC		
IC912	TC7SET08FUF	IC		
Q1	KTA2012EP	TRANSISTOR		
Q3	SSM3K15AMFV	FET		
Q4	LTC014EEBFS8	DIGI TRANSISTOR		
Q5	MTM981400BF	FET		
Q6	LTC014EEBFS8	DIGI TRANSISTOR		
Q7	LTC014TEBFS8	DIGI TRANSISTOR		
Q8	LSCR523EBFS8	TRANSISTOR		
Q9	LSAR523UBFS8	TRANSISTOR		
Q10	MTM981400BF	FET		

△ Symbol No. Part No. Part Name Description Local

Q11	LTC014EEBFS8	DIGI TRANSISTOR		
Q12	EM6M2	FET		
Q14	EM6M2	FET		
Q15	LTC014EEBFS8	DIGI TRANSISTOR		
Q16	SSM3J334R	FET		
Q17	LTC014EEBFS8	DIGI TRANSISTOR		
Q18	SSM3J334R	FET		
Q81	SSM3J15FS	FET		
Q102	MCH3914-H/8/	FET		
Q103	EM6M2	FET		
Q104	MCH3914-H/8/	FET		
Q105	2SC5108F/Y/	TRANSISTOR		
Q106	2SC5108F/Y/	TRANSISTOR		
Q107	2SC5108F/Y/	TRANSISTOR		
Q108	DSC9A01/T/	TRANSISTOR		
Q110	EM6M2	FET		
Q113	SSM3J15FS	FET		
Q115	EM6M2	FET		
Q300	RD01MUS2-T113	FET		
Q301	NE5550234	FET		
Q302	RD10MMS2-T212	FET		
Q303	-----	FET	*Note	
Q304	SSM3K15AMFV	FET		
Q305	LSCR523EBFS8	TRANSISTOR		
Q306	LSCR523EBFS8	TRANSISTOR		
Q307	LSCR523EBFS8	TRANSISTOR		
Q308	EM6M2	FET		
Q309	SSM3K15AMFV	FET		
Q500	2SC5108F/Y/	TRANSISTOR		
Q501	MT3S111	TRANSISTOR		
Q502	MT3S111	TRANSISTOR		
Q503	SSM3J15FS	FET		
Q504	EM6M2	FET		
Q600	MCH3914-H/8/	FET		
Q601	LTC023JEBFS8	DIGI TRANSISTOR		
Q602	LSCR523EBFS8	TRANSISTOR		
Q603	2SC5066F/O/	TRANSISTOR		
Q604	BB506CFS-H	FET		
Q700	2SC4617/S/	TRANSISTOR		
Q701	SSM3K15AMFV	FET		
Q703	SSM3K15AMFV	FET		
Q704	SSM3K15AMFV	FET		
Q705	LTC014TEBFS8	DIGI TRANSISTOR		
Q900	SSM3K335R	FET		
Q901	SSM3J332R	FET		
Q902	DSC9A01/T/	TRANSISTOR		
Q905	SSM3K335R	FET		
Q906	SSM3J332R	FET		
Q907	SSM3K335R	FET		
Q908	SSM3K335R	FET		
D1	DZ2J180(M)	ZENER DIODE		
D2	RB520SM-30	DIODE		
D3	EDZV8.2B	ZENER DIODE		
D4	RB521CM-30	DIODE		
D5	22ZR-10D	SURGE ABSORBER		
D6	RB520SM-30	DIODE		
D7	RB521CM-30	DIODE		
D8	RB521CM-30	DIODE		
D9	RB521CM-30	DIODE		
D10	DSA3A1	DIODE		
D11	DZ2S056(M)	ZENER DIODE		
D12	RB521CM-30	DIODE		
D13	1SS400SM	DIODE		
D14	RB060M-40	DIODE		
D15	DB2J40700	DIODE		
D16	RB521CM-30	DIODE		
D17	RB521CM-30	DIODE		
D100	EDZV8.2B	ZENER DIODE		
D106	SMV1705-079LF	VARIABLE CAPACITANCE DIODE		
D107	SMV1130-079LF	VARIABLE CAPACITANCE DIODE		
D108	SMV1130-079LF	VARIABLE CAPACITANCE DIODE		
D109	SMV1130-079LF	VARIABLE CAPACITANCE DIODE		
D110	SMV1801-079LF	VARIABLE CAPACITANCE DIODE		
D111	SMV1705-079LF	VARIABLE CAPACITANCE DIODE		
D112	SMV1130-079LF	VARIABLE CAPACITANCE DIODE		

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
D113	SMV1130-079LF	VARIABLE CAPACITANCE DIODE			C35	CK73HBB1H471K	C CAPACITOR	470PF K	
D114	SMV1130-079LF	VARIABLE CAPACITANCE DIODE			C36	CK73GB1H105K	C CAPACITOR	1.0UF K	
D115	1SS400SM	DIODE			C37	CK73FB1C106K	C CAPACITOR	10.0UF K	
D117	SMV1130-079LF	VARIABLE CAPACITANCE DIODE			C38	CK73HBB1H471K	C CAPACITOR	470PF K	
D300	RN262CS	DIODE			C39	CK73GB0J106K	C CAPACITOR	10.0UF K	
D304	RB706F-40	DIODE			C40	CK73HB1H103K	C CAPACITOR	10000PF K	
D305	L8104	DIODE			C41	CK73GB1H105K	C CAPACITOR	1.0UF K	
D306	L8104	DIODE			C43	CK73GXR1C225K	C CAPACITOR	2.2UF K	
D307	CSA30-201N	DIODE			C44	CK73HBB1H471K	C CAPACITOR	470PF K	
D308	L8104	DIODE			C45	CK73HB1C105K	C CAPACITOR	1.0UF K	
D310	RN142S	DIODE			C46	CK73GXR1C225K	C CAPACITOR	2.2UF K	
D311	RN142S	DIODE			C47	CK73HB1E104K	C CAPACITOR	0.10UF K	
D312	DZ2S056(M)	ZENER DIODE			C48	CK73GXR1C225K	C CAPACITOR	2.2UF K	
D313	DZ2S056(M)	ZENER DIODE			C49	CK73HB1C105K	C CAPACITOR	1.0UF K	
D314	RB520SM-30	DIODE			C50	CK73HBB1H102K	C CAPACITOR	1000PF K	
D500	RN262CS	DIODE			C51	CK73HBB1H332K	C CAPACITOR	3300PF K	
D505	RN142S	DIODE			C52	CK73HB1E104K	C CAPACITOR	0.10UF K	
D506	RN142S	DIODE			C53	CK73GB1H105K	C CAPACITOR	1.0UF K	
D600	SMV1705-079LF	VARIABLE CAPACITANCE DIODE			C54	CK73GB1H105K	C CAPACITOR	1.0UF K	
D601	SMV1705-079LF	VARIABLE CAPACITANCE DIODE			C55	CK73HBB1H471K	C CAPACITOR	470PF K	
D602	DA3S101F	MULTIPLE DIODE			C56	CK73HB1H392K	C CAPACITOR	3900PF K	
D700	RB521CM-30	DIODE			C57	CK73FXR1E475K	C CAPACITOR	4.7UF K	
D701	RB521CM-30	DIODE			C58	CC73HCH1H220G	C CAPACITOR	22PF G	
D702	SPC10501A01	VARISTOR			C59	CK73FB1C106K	C CAPACITOR	10.0UF K	
D703	SPC10501A01	VARISTOR			C60	CK73FB1C106K	C CAPACITOR	10.0UF K	
D704	SPC10501A01	VARISTOR			C61	CK73HBB1H471K	C CAPACITOR	470PF K	
D705	SPC10501A01	VARISTOR			C62	CK73GXR1C225K	C CAPACITOR	2.2UF K	
D706	SPC10501A01	VARISTOR			C63	CK73HBB1H102K	C CAPACITOR	1000PF K	
D708	EDZV8.2B	ZENER DIODE			C64	CK73GB0J106K	C CAPACITOR	10.0UF K	
D710	RB521CM-30	DIODE			C65	CK73FB1C106K	C CAPACITOR	10.0UF K	
D711	RB521CM-30	DIODE			C66	CK73HB1C105K	C CAPACITOR	1.0UF K	
D801	RB521CM-30	DIODE			C67	CK73FB1C106K	C CAPACITOR	10.0UF K	
D900	DA3S101F	MULTIPLE DIODE			C68	CK73FXR1E475K	C CAPACITOR	4.7UF K	
D903	DZ2S056(M)	ZENER DIODE			C69	CK73GXR1C225K	C CAPACITOR	2.2UF K	
D904	DA204U	MULTIPLE DIODE			C70	CK73HB1H391K	C CAPACITOR	390PF K	
D905	1SS400SM	DIODE			C71	CK73HB1H391K	C CAPACITOR	390PF K	
D906	DZ2S056(M)	ZENER DIODE			C72	CK730FA1H475K	C CAPACITOR	4.7UF K	
D907	RB521CM-30	DIODE			C73	CK73GB1H105K	C CAPACITOR	1.0UF K	
D908	DA204U	MULTIPLE DIODE			C74	CK73GXR1C225K	C CAPACITOR	2.2UF K	
D909	DA3S101F	MULTIPLE DIODE			C75	CK73HB1C105K	C CAPACITOR	1.0UF K	
D910	DA204U	MULTIPLE DIODE			C76	CK73HBB1H471K	C CAPACITOR	470PF K	
D911	DA204U	MULTIPLE DIODE			C77	CK73FXR1E475K	C CAPACITOR	4.7UF K	
D912	DA204U	MULTIPLE DIODE			C78	CK730DT1C476K	C CAPACITOR	4.7UF K	
D913	DA204U	MULTIPLE DIODE			C80	CK73GXR1H104K	C CAPACITOR	0.1UF K	
D914	DA204U	MULTIPLE DIODE			C81	CC73HCH1H470G	C CAPACITOR	47PF G	
D915	DA204U	MULTIPLE DIODE			C82	CK73GXR1C225K	C CAPACITOR	2.2UF K	
D916	DA2J101	DIODE			C83	CK73HB1C105K	C CAPACITOR	1.0UF K	
D917	DZ2J180(M)	ZENER DIODE			C84	CK73GXR1C225K	C CAPACITOR	2.2UF K	
D918	DA204U	MULTIPLE DIODE			C85	C92-0968-05	E CAPACITOR	470UF 25WV	
D919	DA204U	MULTIPLE DIODE			C100	CK73HB1H103K	C CAPACITOR	10000PF K	
D920	DA204U	MULTIPLE DIODE			C101	CK73HBB1H471K	C CAPACITOR	470PF K	
D921	DA2J101	DIODE			C102	CC73HCH1H100B	C CAPACITOR	10PF B	
D922	DZ2J180(M)	ZENER DIODE			C103	CK73HB1H103K	C CAPACITOR	10000PF K	
D923	DA204U	MULTIPLE DIODE			C104	CK73HB1H103K	C CAPACITOR	10000PF K	
D924	RB520SM-30	DIODE			C106	CC73HCH1H101J	C CAPACITOR	100PF J	
C1	CK73HB1C105K	C CAPACITOR	1.0UF K		C107	CC73HCH1H101J	C CAPACITOR	100PF J	
C2	CD04CK1E102M	E CAPACITOR	1000UF M		C108	CC73HCH1H101J	C CAPACITOR	100PF J	
C3	CK73HBB1H222K	C CAPACITOR	2200PF K		C109	CC73HCH1H101J	C CAPACITOR	100PF J	
C4	CK73HBB1H471K	C CAPACITOR	470PF K		C110	CC73HCH1H101J	C CAPACITOR	100PF J	
C5	CK73HBB1H471K	C CAPACITOR	470PF K		C111	CC73HCH1H101J	C CAPACITOR	100PF J	
C7	CC73HCH1H470G	C CAPACITOR	47PF G		C112	CK73HB1E104K	C CAPACITOR	0.10UF K	
C8	CK73HBB1H102K	C CAPACITOR	1000PF K		C113	CK73HB1E104K	C CAPACITOR	0.10UF K	
C9	CK73HBB1H471K	C CAPACITOR	470PF K		C114	CC73HCH1H101J	C CAPACITOR	100PF J	
C10	CK73FB1C106K	C CAPACITOR	10.0UF K		C115	CK73HB1E104K	C CAPACITOR	0.10UF K	
C11	CK73HB1E104K	C CAPACITOR	0.10UF K		C116	CC73HCH1H101J	C CAPACITOR	100PF J	
C12	C93-1959-05	C CAPACITOR	0.10UF B		C118	CK73HB1H103K	C CAPACITOR	10000PF K	
C13	CK73HB1A474K	C CAPACITOR	0.47UF K		C120	CC73HCH1H101J	C CAPACITOR	100PF J	
C16	CK73HB1H103K	C CAPACITOR	10000PF K		C121	CC73HCH1H330G	C CAPACITOR	33PF G	
C18	CK73HBB1H471K	C CAPACITOR	470PF K		C124	CC73HCH1H101J	C CAPACITOR	100PF J	
C21	CK73HB1C105K	C CAPACITOR	1.0UF K		C125	CK73GB1H105K	C CAPACITOR	1.0UF K	
C24	CK73HBB1H471K	C CAPACITOR	470PF K		C126	CC73HCH1H101J	C CAPACITOR	100PF J	
C25	CK73HBB1H102K	C CAPACITOR	1000PF K		C127	CK73FBB1H154K	C CAPACITOR	0.15UF K	
C30	CK73HB1C105K	C CAPACITOR	1.0UF K		C128	CS77ABE1D100M	TA E CAPACITOR	10UF M	
C31	CK73EB1H475KM	C CAPACITOR	4.7UF K		C130	CK73FB1H473K	C CAPACITOR	0.047UF K	
C32	CK73GB1H105K	C CAPACITOR	1.0UF K		C131	CC730AD1H104J	C CAPACITOR	100PF J	
C33	CK73EB1H475KM	C CAPACITOR	4.7UF K		C140	CC73HCH1H050B	C CAPACITOR	5.0PF B	
C34	CK73HB1E104K	C CAPACITOR	0.10UF K		C141	CC73HCH1H151J	C CAPACITOR	150PF J	
					C143	CC73HCH1H240G	C CAPACITOR	24PF G	

△ Symbol No.	Part No.	Part Name	Description	Local
C144	CC73HCH1HR75B	C CAPACITOR	0.75PF B	
C145	CC73HCH1HOR5B	C CAPACITOR	0.5PF B	
C146	CC73HCH1H060B	C CAPACITOR	6.0PF B	
C147	CC73HCH1H080B	C CAPACITOR	8.0PF B	
C148	CC73HCH1H060B	C CAPACITOR	6.0PF B	
C149	CK73HBB1H471K	C CAPACITOR	470PF K	
C150	CC73HCH1H0R5B	C CAPACITOR	0.5PF B	
C151	CC73HCH1H101J	C CAPACITOR	100PF J	
C152	CK73HBB1H471K	C CAPACITOR	470PF K	
C154	CC73HCH1H101J	C CAPACITOR	100PF J	
C155	CC73HCH1H030B	C CAPACITOR	3.0PF B	
C156	CC73HCH1H151J	C CAPACITOR	150PF J	
C158	CC73HCH1H060B	C CAPACITOR	6.0PF B	
C159	CC73HCH1H2R5B	C CAPACITOR	2.5PF B	
C160	CC73HCH1H080B	C CAPACITOR	8.0PF B	
C161	CC73HCH1H080B	C CAPACITOR	8.0PF B	
C162	CC73HCH1H070B	C CAPACITOR	7.0PF B	
C163	CK73HBB1H471K	C CAPACITOR	470PF K	
C164	CC73HCH1HOR5B	C CAPACITOR	0.5PF B	
C165	CK73HBB1H471K	C CAPACITOR	470PF K	
C166	CC73HCH1H020B	C CAPACITOR	2.0PF B	
C167	CC73HCH1H470G	C CAPACITOR	47PF G	
C168	CK73HB1E104K	C CAPACITOR	0.10UF K	
C169	CC73HCH1H470G	C CAPACITOR	47PF G	
C170	CC73HCH1H1R5B	C CAPACITOR	1.5PF B	
C171	CC73HCH1H470G	C CAPACITOR	47PF G	
C172	CC73HCH1H100B	C CAPACITOR	10PF B	
C173	CC73HCH1H1R5B	C CAPACITOR	1.5PF B	
C174	CC73HCH1H100B	C CAPACITOR	10PF B	
C175	CC73HCH1H060B	C CAPACITOR	6.0PF B	
C176	CC73HCH1H060B	C CAPACITOR	6.0PF B	
C177	CC73HCH1H020B	C CAPACITOR	2.0PF B	
C178	CC73HCH1H050B	C CAPACITOR	5.0PF B	
C179	CC73HCH1H020B	C CAPACITOR	2.0PF B	
C180	CC73HCH1HOR5B	C CAPACITOR	0.5PF B	
C181	CC73HCH1H050B	C CAPACITOR	5.0PF B	
C182	CC73HCH1H060B	C CAPACITOR	6.0PF B	
C183	CC73HCH1H470G	C CAPACITOR	47PF G	
C184	CC73HCH1H030B	C CAPACITOR	3.0PF B	
C185	CC73HCH1H030B	C CAPACITOR	3.0PF B	
C186	CC73HCH1H470G	C CAPACITOR	47PF G	
C187	CC73HCH1H470G	C CAPACITOR	47PF G	
C188	CK73HB1E104K	C CAPACITOR	0.10UF K	
C189	CC73HCH1H470G	C CAPACITOR	47PF G	
C190	CK73HB1C105K	C CAPACITOR	1.0UF K	
C191	CC73HCH1H101J	C CAPACITOR	100PF J	
C192	CK73FB1C106K	C CAPACITOR	10.0UF K	
C194	CC73HCH1H470G	C CAPACITOR	47PF G	
C195	CK73GB1H105K	C CAPACITOR	1.0UF K	
C198	CK73HB1C105K	C CAPACITOR	1.0UF K	
C199	CC73HCH1H101J	C CAPACITOR	100PF J	
C202	CC73HCH1H101J	C CAPACITOR	100PF J	
C203	CC73HCH1H101J	C CAPACITOR	100PF J	
C204	CC73HCH1H101J	C CAPACITOR	100PF J	
C211	CC73HCH1H010B	C CAPACITOR	1.0PF B	
C212	CC73HCH1H020B	C CAPACITOR	2.0PF B	
C213	CC73HCH1H470G	C CAPACITOR	47PF G	
C300	CC73HCH1H101J	C CAPACITOR	100PF J	
C301	CC73HCH1H040B	C CAPACITOR	4.0PF B	
C302	CC73HCH1H470G	C CAPACITOR	47PF G	
C303	CC73HCH1H090B	C CAPACITOR	9.0PF B	
C304	CC73HCH1HR75B	C CAPACITOR	0.75PF B	
C305	CC73HCH1H090B	C CAPACITOR	9.0PF B	
C306	CK73HBB1H471K	C CAPACITOR	470PF K	
C307	CC73HCH1H470G	C CAPACITOR	47PF G	
C308	CC73HCH1H060B	C CAPACITOR	6.0PF B	
C309	CK73HBB1H152K	C CAPACITOR	1500PF K	
C310	CC73HCH1H470G	C CAPACITOR	47PF G	
C311	CK73HB1E473K	C CAPACITOR	47000PF K	
C313	CK73HBB1H152K	C CAPACITOR	1500PF K	
C314	CC73HCH1H470G	C CAPACITOR	47PF G	
C315	CK73HBB1H152K	C CAPACITOR	1500PF K	
C316	CC73HCH1H070B	C CAPACITOR	7.0PF B	
C317	CC73HCH1H470G	C CAPACITOR	47PF G	
C318	CC73HCH1H040B	C CAPACITOR	4.0PF B	
C319	CC73HCH1H470G	C CAPACITOR	47PF G	
C320	CC73HCH1H060B	C CAPACITOR	6.0PF B	
C321	CK73GXR1H104K	C CAPACITOR	0.1UF K	

△ Symbol No.	Part No.	Part Name	Description	Local
C322	CC73HCH1H470G	C CAPACITOR	47PF G	
C323	CC73HCH1H470G	C CAPACITOR	47PF G	
C324	CC73HCH1H070B	C CAPACITOR	7.0PF B	
C325	CC73HCH1H060B	C CAPACITOR	6.0PF B	
C326	CC73HCH1H150G	C CAPACITOR	15PF G	
C327	CC73GCH1H040B	C CAPACITOR	4.0PF B	
C328	CC73HCH1H470G	C CAPACITOR	47PF G	
C329	CC73GCH1H050B	C CAPACITOR	5.0PF B	
C330	CC73HCH1H470G	C CAPACITOR	47PF G	
C331	CC73GCH1H470J	C CAPACITOR	47PF J	
C332	CC73GCH1H470J	C CAPACITOR	47PF J	
C333	CC73GCH1H2R5B	C CAPACITOR	2.5PF B	
C334	CK73GXR1H104K	C CAPACITOR	0.1UF K	
C335	CC73GCH1H150J	C CAPACITOR	15.0F J	
C336	CC73GCH1H060B	C CAPACITOR	6.0F B	
C337	CC73GCH1H110G	C CAPACITOR	11PF G	
C339	CC73GCH1H060B	C CAPACITOR	6.0PF B	
C340	CC73GCH1H220J	C CAPACITOR	22PF J	
C342	CC73GCH1H470J	C CAPACITOR	47PF J	
C343	CC73GCH1H470J	C CAPACITOR	47PF J	
C345	CC73GCH1H470J	C CAPACITOR	47PF J	
C346	CC73GCH1H101J	C CAPACITOR	100PF J	
C347	CK73GXR1H104K	C CAPACITOR	0.1UF K	
C348	C93-0938-05	C CAPACITOR	13PF G	
C349	CC73GCH1H470J	C CAPACITOR	47PF J	
C351	C93-0980-05	C CAPACITOR	5.0PF B	
C350	CC73GCH1H470J	C CAPACITOR	47PF J	
C353	C93-0938-05	C CAPACITOR	13PF G	
C355	CC73GCH1H470J	C CAPACITOR	47PF J	
C356	C93-0875-05	C CAPACITOR	1.5PF B	
C357	CC73GCH1H470J	C CAPACITOR	47PF J	
C358	C93-0897-05	C CAPACITOR	8.0PF C	
C359	C93-0897-05	C CAPACITOR	8.0PF C	
C360	C93-1863-05	C CAPACITOR	15PF G	
C367	C93-0939-05	C CAPACITOR	15PF G	
C399	CC73HCH1H470G	C CAPACITOR	47PF G	
C370	C93-0939-05	C CAPACITOR	15PF G	
C373	C93-1864-05	C CAPACITOR	18PF B	
C374	C93-1864-05	C CAPACITOR	18PF B	
C375	C93-1864-05	C CAPACITOR	18PF B	
C376	C93-1864-05	C CAPACITOR	18PF B	
C377	C93-1857-05	C CAPACITOR	8.0PF B	
C378	C93-1857-05	C CAPACITOR	8.0PF B	
C387	C93-1859-05	C CAPACITOR	9.0PF B	
C392	C93-1864-05	C CAPACITOR	18PF B	
C393	CK73HBB1H472K	C CAPACITOR	4700PF K	
C394	CC73GCH1H470J	C CAPACITOR	47PF J	
C395	CK73GBB1H102K	C CAPACITOR	1000PF K	
C396	CK73GBB1H103K	C CAPACITOR	0.10UF K	
C399	CC73HCH1H470G	C CAPACITOR	47PF G	
C404	CC73GCH1H470J	C CAPACITOR	47PF J	
C405	CC73GCH1H470J	C CAPACITOR	47PF J	
C406	C93-1835-05	C CAPACITOR	1.5PF B	
C407	C93-1864-05	C CAPACITOR	18PF B	
C408	CK73HBB1H222K	C CAPACITOR	2200PF K	
C410	CC73HCH1H470G	C CAPACITOR	47PF G	
C411	CC73GCH1H470J	C CAPACITOR	47PF J	
C412	C93-1838-05	C CAPACITOR	2.0PF B	
C413	C93-1869-05	C CAPACITOR	47PF B	
C415	C93-1844-05	C CAPACITOR	3.6PF B	
C416	C93-2004-05	C CAPACITOR	3.3PF B	
C417	C93-2004-05	C CAPACITOR	3.3PF B	
C418	C93-2004-05	C CAPACITOR	3.3PF B	
C419	C93-2004-05	C CAPACITOR	3.3PF B	
C420	C93-1844-05	C CAPACITOR	3.6PF B	
C421	CC73GCH1H040B	C CAPACITOR	4.0PF B	
C423	CC73HCH1H470G	C CAPACITOR	47PF G	
C427	CC73HCH1H101J	C CAPACITOR	100PF J	
C428	CK73HB1E473K	C CAPACITOR	47000PF K	
C429	CK73HB1E473K	C CAPACITOR	47000PF K	
C430	CC73HCH1H101J	C CAPACITOR	100PF J	
C431	CC73HCH1H101J	C CAPACITOR	100PF J	
C432	CK73HBB1H471K	C CAPACITOR	470PF K	
C433	CK73HBB1H222K	C CAPACITOR	2200PF K	
C434	CK73GBB1H333K	C CAPACITOR	0.033UF K	
C435	CK73HB1H103K	C CAPACITOR	10000PF K	
C436	CK73HBB1H472K	C CAPACITOR	0.047UF K	
C437	CK73HB1E473K	C CAPACITOR	47000PF K	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
C438	CK73HB1H103K	C CAPACITOR	10000PF K		C616	CC73HCH1H330G	C CAPACITOR	33PF G	
C439	CK73HBB1H332K	C CAPACITOR	3300PF K		C617	CC73HCH1H330G	C CAPACITOR	33PF G	
C440	CK73HB1E333K	C CAPACITOR	33000PF K		C618	CK73HB1H103K	C CAPACITOR	10000PF K	
C441	CK73HBB1H332K	C CAPACITOR	3300PF K		C619	C93-1959-05	C CAPACITOR	0.10UF B	
C443	CK73HB1H103K	C CAPACITOR	10000PF K		C620	CK73HB1C105K	C CAPACITOR	1.0UF K	
C444	CK73HB1H103K	C CAPACITOR	10000PF K		C621	CK73HB1H103K	C CAPACITOR	10000PF K	
C445	CK73HB1H103K	C CAPACITOR	10000PF K		C622	CK73HBB1H102K	C CAPACITOR	1000PF K	
C446	CK73HBB1H332K	C CAPACITOR	3300PF K		C623	CC73HCH1H030B	C CAPACITOR	3.0PF B	
C447	CK73HBB1H682K	C CAPACITOR	6800PF K		C624	CC73HCH1H390G	C CAPACITOR	39PF G	
C448	CC73GCH1H470J	C CAPACITOR	47PF J		C625	C93-1959-05	C CAPACITOR	0.10UF B	
C457	C93-0938-05	C CAPACITOR	13PF G		C626	CK73HB1E104K	C CAPACITOR	0.10UF K	
C458	C93-0938-05	C CAPACITOR	13PF G		C627	C93-1953-05	C CAPACITOR	0.10UF B	
C500	CK73HB1H103K	C CAPACITOR	10000PF K		C628	C93-1959-05	C CAPACITOR	0.10UF B	
C501	CC73HCH1H470G	C CAPACITOR	47PF G		C629	C93-1953-05	C CAPACITOR	0.10UF B	
C502	CK73HB1H103K	C CAPACITOR	10000PF K		C630	C93-1959-05	C CAPACITOR	0.10UF B	
C503	CC73HCH1H101J	C CAPACITOR	100PF J		C631	C93-1959-05	C CAPACITOR	0.10UF B	
C504	CK73HB1H103K	C CAPACITOR	10000PF K		C632	C93-1953-05	C CAPACITOR	0.10UF B	
C505	CC73HCH1H101J	C CAPACITOR	100PF J		C633	C93-1959-05	C CAPACITOR	0.10UF B	
C506	CK73HB1E104K	C CAPACITOR	0.10UF K		C634	CK73FB1C106K	C CAPACITOR	10.0UF K	
C507	CC73HCH1H101J	C CAPACITOR	100PF J		C635	C93-1959-05	C CAPACITOR	0.10UF B	
C508	CC73HCH1H2R5B	C CAPACITOR	2.5PF B		C636	CK73HB1C105K	C CAPACITOR	1.0UF K	
C509	CC73HCH1H101J	C CAPACITOR	100PF J		C637	CK73HB1H103K	C CAPACITOR	10000PF K	
C510	CC73HCH1H2R5B	C CAPACITOR	2.5PF B		C638	CK73HBB1H682K	C CAPACITOR	6800PF K	
C511	CK73HB1H103K	C CAPACITOR	10000PF K		C639	CC73HCH1H101J	C CAPACITOR	100PF J	
C512	CC73HCH1H030B	C CAPACITOR	3.0PF B		C640	C93-1969-05	C CAPACITOR	1000PF G	
C513	CC73HCH1H050B	C CAPACITOR	5.0PF B		C641	CC73HCH1H101J	C CAPACITOR	100PF J	
C514	CC73HCH1H030B	C CAPACITOR	3.0PF B		C642	CC73HCH1H100B	C CAPACITOR	10PF B	
C516	CC73HCH1H470G	C CAPACITOR	47PF G		C643	CC73JCH1H101J	C CAPACITOR	100PF J	
C517	CC73HCH1H101J	C CAPACITOR	100PF J		C644	C93-1953-05	C CAPACITOR	0.10UF B	
C518	CC73HCH1H101J	C CAPACITOR	100PF J		C645	CC73HCH1H220G	C CAPACITOR	22PF G	
C519	CK73HB1H103K	C CAPACITOR	10000PF K		C646	CC73HCH1H151J	C CAPACITOR	150PF J	
C520	CK73HB1H103K	C CAPACITOR	10000PF K		C647	C93-1959-05	C CAPACITOR	0.10UF B	
C521	CC73HCH1H470G	C CAPACITOR	47PF G		C648	CC73JCH1H101J	C CAPACITOR	100PF J	
C522	CC73HCH1H470G	C CAPACITOR	47PF G		C649	CC73HCH1H100B	C CAPACITOR	10PF B	
C525	CC73HCH1H470G	C CAPACITOR	47PF G		C650	CC73HCH1H101J	C CAPACITOR	100PF J	
C526	CC73HCH1H470G	C CAPACITOR	47PF G		C651	C93-1959-05	C CAPACITOR	0.10UF B	
C527	CC73HCH1H100B	C CAPACITOR	10PF B		C652	C93-1959-05	C CAPACITOR	0.10UF B	
C528	CC73HCH1H100B	C CAPACITOR	10PF B		C653	CC73HCH1H560J	C CAPACITOR	56PF J	
C530	CK73HB1H103K	C CAPACITOR	10000PF K		C654	CK73HBB1H102K	C CAPACITOR	1000PF K	
C531	CC73HCH1H470G	C CAPACITOR	47PF G		C655	CK73HB1H103K	C CAPACITOR	10000PF K	
C532	CK73HB1H103K	C CAPACITOR	10000PF K		C656	CC73HCH1H100B	C CAPACITOR	10PF B	
C533	CC73HCH1H100B	C CAPACITOR	10PF B		C657	CC73HCH1H060B	C CAPACITOR	6.0PF B	
C534	CC73HCH1H470G	C CAPACITOR	47PF G		C658	CK73HB1H103K	C CAPACITOR	10000PF K	
C535	CC73HCH1H470G	C CAPACITOR	47PF G		C659	CK73HB1H103K	C CAPACITOR	10000PF K	
C536	CC73HCH1H470G	C CAPACITOR	47PF G		C660	CC73HCH1H120G	C CAPACITOR	12PF G	
C537	CC73HCH1H470G	C CAPACITOR	47PF G		C661	CK73HBB1H102K	C CAPACITOR	1000PF K	
C538	CC73HCH1H470G	C CAPACITOR	47PF G		C662	CK73HBB1H102K	C CAPACITOR	1000PF K	
C539	CC73HCH1H470G	C CAPACITOR	47PF G		C663	CK73HB1H103K	C CAPACITOR	10000PF K	
C540	CC73HCH1H470G	C CAPACITOR	47PF G		C665	CC73HCH1H050B	C CAPACITOR	5.0PF B	
C541	CC73HCH1H470G	C CAPACITOR	47PF G		C666	CC73HCH1H150G	C CAPACITOR	15PF G	
C542	CC73HCH1H060B	C CAPACITOR	6.0PF B		C668	CC73HCH1H180G	C CAPACITOR	18PF G	
C543	CC73HCH1H070B	C CAPACITOR	7.0PF B		C671	CC73HCH1H180G	C CAPACITOR	18PF G	
C544	CC73HCH1H101J	C CAPACITOR	100PF J		C681	CK73HBB1H471K	C CAPACITOR	470PF K	
C545	CC73HCH1H101J	C CAPACITOR	100PF J		C700	CK73HB1C105K	C CAPACITOR	1.0UF K	
C552	CC73HCH1H090B	C CAPACITOR	9.0PF B		C701	C93-1959-05	C CAPACITOR	0.10UF B	
C553	CC73HCH1H090B	C CAPACITOR	9.0PF B		C702	C93-1959-05	C CAPACITOR	0.10UF B	
C556	CC73HCH1H101J	C CAPACITOR	100PF J		C703	CK73FXR0J226M	C CAPACITOR	22UF M	
C557	CC73HCH1H101J	C CAPACITOR	100PF J		C704	CK73HB1H103K	C CAPACITOR	10000PF K	
C558	CC73HCH1H470G	C CAPACITOR	47PF G		C705	C93-1959-05	C CAPACITOR	0.10UF B	
C559	CK73HB1E104K	C CAPACITOR	0.10UF K		C706	C93-1959-05	C CAPACITOR	0.10UF B	
C561	CC73HCH1H101J	C CAPACITOR	100PF J		C707	CK73FXR0J226M	C CAPACITOR	22UF M	
C562	CC73HCH1H010B	C CAPACITOR	1.0PF B		C708	CK73GB0J106K	C CAPACITOR	10.0UF K	
C600	CC73JCH1H101J	C CAPACITOR	100PF J		C709	C93-1959-05	C CAPACITOR	0.10UF B	
C601	CC73JCH1H101J	C CAPACITOR	100PF J		C711	C93-1959-05	C CAPACITOR	0.10UF B	
C602	CC73JCH1H101J	C CAPACITOR	100PF J		C712	C93-1959-05	C CAPACITOR	0.10UF B	
C603	CC73JCH1H101J	C CAPACITOR	100PF J		C713	C93-1959-05	C CAPACITOR	0.10UF B	
C604	CC73JCH1H101J	C CAPACITOR	100PF J		C714	C93-1959-05	C CAPACITOR	0.10UF B	
C605	CC73JCH1H101J	C CAPACITOR	100PF J		C715	C93-1959-05	C CAPACITOR	0.10UF B	
C606	CC73JCH1H101J	C CAPACITOR	100PF J		C716	C93-1959-05	C CAPACITOR	0.10UF B	
C607	CC73HCH1H120G	C CAPACITOR	12PF G		C717	C93-1959-05	C CAPACITOR	0.10UF B	
C608	CK73HB1E104K	C CAPACITOR	0.10UF K		C718	C93-1959-05	C CAPACITOR	0.10UF B	
C609	CK73HB1E562K	C CAPACITOR	5600PF K		C719	CC73JCH1H101J	C CAPACITOR	100PF J	
C610	C93-1959-05	C CAPACITOR	0.10UF B		C720	CK73HB1E104K	C CAPACITOR	0.10UF K	
C611	CC73HCH1H030B	C CAPACITOR	3.0PF B		C721	C93-1959-05	C CAPACITOR	0.10UF B	
C612	CK73HB1A224K	C CAPACITOR	0.22UF K		C722	CC73JCH1H101J	C CAPACITOR	100PF J	
C613	C93-1959-05	C CAPACITOR	0.10UF B		C723	C93-1959-05	C CAPACITOR	0.10UF B	
C614	CK73HB1H123K	C CAPACITOR	12000PF K		C724	C93-1959-05	C CAPACITOR	0.10UF B	
C615	CK73HB1E104K	C CAPACITOR	0.10UF K		C725	CC73JCH1H101J	C CAPACITOR	100PF J	

△ Symbol No.	Part No.	Part Name	Description	Local
C726	C93-1953-05	C CAPACITOR	0.10UF B	
C728	CK73GB0J106K	C CAPACITOR	10.0UF K	
C729	CK73HB1H103K	C CAPACITOR	10000PF K	
C730	CK73GB0J106K	C CAPACITOR	10.0UF K	
C731	C93-1959-05	C CAPACITOR	0.10UF B	
C732	C93-1959-05	C CAPACITOR	0.10UF B	
C733	C93-1959-05	C CAPACITOR	0.10UF B	
C734	C93-1959-05	C CAPACITOR	0.10UF B	
C735	CC73JCH1H101J	C CAPACITOR	100PF J	
C736	C93-1959-05	C CAPACITOR	0.10UF B	
C737	CC73JCH1H101J	C CAPACITOR	100PF J	
C738	CC73JCH1H101J	C CAPACITOR	100PF J	
C739	CK73GB0J106K	C CAPACITOR	10.0UF K	
C740	CK73HB1H103K	C CAPACITOR	10000PF K	
C741	C93-1959-05	C CAPACITOR	0.10UF B	
C742	CK73GB0J106K	C CAPACITOR	10.0UF K	
C743	C93-1953-05	C CAPACITOR	0.10UF B	
C745	C93-1959-05	C CAPACITOR	0.10UF B	
C746	CK73GB0J106K	C CAPACITOR	10.0UF K	
C747	CK73GB0J106K	C CAPACITOR	10.0UF K	
C748	CC73HCH1H100B	C CAPACITOR	10PF B	
C749	C93-1959-05	C CAPACITOR	0.10UF B	
C750	CK73GB0J106K	C CAPACITOR	10.0UF K	
C751	C93-1959-05	C CAPACITOR	0.10UF B	
C752	C93-1959-05	C CAPACITOR	0.10UF B	
C754	C93-1959-05	C CAPACITOR	0.10UF B	
C755	C93-1959-05	C CAPACITOR	0.10UF B	
C756	C93-1959-05	C CAPACITOR	0.10UF B	
C757	CK73HB1C105K	C CAPACITOR	1.0UF K	
C758	C93-1959-05	C CAPACITOR	0.10UF B	
C759	CC73JCH1H101J	C CAPACITOR	100PF J	
C760	C93-1959-05	C CAPACITOR	0.10UF B	
C762	C93-1959-05	C CAPACITOR	0.10UF B	
C764	C93-1959-05	C CAPACITOR	0.10UF B	
C766	C93-1959-05	C CAPACITOR	0.10UF B	
C768	C93-1953-05	C CAPACITOR	0.10UF B	
C769	CK73HB1C105K	C CAPACITOR	1.0UF K	
C770	CK73HB1C105K	C CAPACITOR	1.0UF K	
C771	C93-1959-05	C CAPACITOR	0.10UF B	
C772	C93-1959-05	C CAPACITOR	0.10UF B	
C773	C93-1959-05	C CAPACITOR	0.10UF B	
C774	C93-1959-05	C CAPACITOR	0.10UF B	
C775	C93-1959-05	C CAPACITOR	0.10UF B	
C776	C93-1959-05	C CAPACITOR	0.10UF B	
C777	C93-1959-05	C CAPACITOR	0.10UF B	
C778	C93-1959-05	C CAPACITOR	0.10UF B	
C779	CK73HB1C105K	C CAPACITOR	1.0UF K	
C780	C93-1959-05	C CAPACITOR	0.10UF B	
C781	CC73HCH1H150G	C CAPACITOR	15PF G	
C782	CC73HCH1H150G	C CAPACITOR	15PF G	
C783	CK73HB1E104K	C CAPACITOR	0.10UF K	
C784	CK73HB1A224K	C CAPACITOR	0.22UF K	
C785	CK73GB0J106K	C CAPACITOR	10.0UF K	
C786	CK73GB0J106K	C CAPACITOR	10.0UF K	
C787	CK73HB1E104K	C CAPACITOR	0.10UF K	
C791	C93-1959-05	C CAPACITOR	0.10UF B	
C792	C93-1959-05	C CAPACITOR	0.10UF B	
C793	CK73HBB1H102K	C CAPACITOR	1000PF K	
C794	CK73HBB1H102K	C CAPACITOR	1000PF K	
C795	CK73HB1H103K	C CAPACITOR	10000PF K	
C796	CK73HB1H103K	C CAPACITOR	10000PF K	
C797	CK73HB1H103K	C CAPACITOR	10000PF K	
C798	CK73GB1H105K	C CAPACITOR	1.0UF K	
C799	CK73HB1E104K	C CAPACITOR	0.10UF K	
C800	CK73HB1H103K	C CAPACITOR	10000PF K	
C801	CC73HCH1H101J	C CAPACITOR	100PF J	
C802	CK73HB1C105K	C CAPACITOR	1.0UF K	
C803	C93-1959-05	C CAPACITOR	0.10UF B	
C804	C93-1959-05	C CAPACITOR	0.10UF B	
C805	CC73HCH1H101J	C CAPACITOR	100PF J	
C806	C93-1959-05	C CAPACITOR	0.10UF B	
C807	CK73HB1H103K	C CAPACITOR	10000PF K	
C808	CC73HCH1H101J	C CAPACITOR	100PF J	
C809	CC73HCH1H101J	C CAPACITOR	100PF J	
C810	CC73HCH1H101J	C CAPACITOR	100PF J	
C811	C93-1959-05	C CAPACITOR	0.10UF B	
C812	CC73HCH1H101J	C CAPACITOR	100PF J	
C813	CC73HCH1H101J	C CAPACITOR	100PF J	

△ Symbol No.	Part No.	Part Name	Description	Local
C814	CC73HCH1H101J	C CAPACITOR	100PF J	
C815	CC73HCH1H101J	C CAPACITOR	100PF J	
C816	CC73HCH1H101J	C CAPACITOR	100PF J	
C817	CK73HBB1H102K	C CAPACITOR	1000PF K	
C818	CC73HCH1H101J	C CAPACITOR	100PF J	
C819	CK73HB1H103K	C CAPACITOR	10000PF K	
C820	CK73HB1E104K	C CAPACITOR	0.10UF K	
C821	CC73HCH1H101J	C CAPACITOR	100PF J	
C822	CC73HCH1H101J	C CAPACITOR	100PF J	
C824	CK73HBB1H102K	C CAPACITOR	1000PF K	
C829	CK73HB1C105K	C CAPACITOR	1.0UF K	
C830	C93-1959-05	C CAPACITOR	0.10UF B	
C831	C93-1959-05	C CAPACITOR	0.10UF B	
C834	CK73HB1C105K	C CAPACITOR	1.0UF K	
C835	CC73HCH1H101J	C CAPACITOR	100PF J	
C839	CK73HB1E104K	C CAPACITOR	0.10UF K	
C841	CK73HB1E104K	C CAPACITOR	0.10UF K	
C852	CK73HB1E104K	C CAPACITOR	0.10UF K	
C853	CK73HB1H103K	C CAPACITOR	10000PF K	
C854	CK73HBB1H102K	C CAPACITOR	1000PF K	
C856	CC73HCH1H470G	C CAPACITOR	47PF G	
C857	CC73HCH1H470G	C CAPACITOR	47PF G	
C862	CK73HBB1H472K	C CAPACITOR	0.047UF K	
C898	CK73GB1H105K	C CAPACITOR	1.0UF K	
C899	CK73GB0J106K	C CAPACITOR	10.0UF K	
C900	CK73HB1H103K	C CAPACITOR	10000PF K	
C901	CK73HB1E104K	C CAPACITOR	0.10UF K	
C902	CK73HB1E104K	C CAPACITOR	0.10UF K	
C903	CK73HBB1H102K	C CAPACITOR	1000PF K	
C904	CK73HB1C105K	C CAPACITOR	1.0UF K	
C905	CK73HB1E104K	C CAPACITOR	0.10UF K	
C906	CK73HB1C105K	C CAPACITOR	1.0UF K	
C908	C93-1959-05	C CAPACITOR	0.10UF B	
C909	CK73HB1C105K	C CAPACITOR	1.0UF K	
C910	C93-1959-05	C CAPACITOR	0.10UF B	
C911	C93-1959-05	C CAPACITOR	0.10UF B	
C912	C93-1959-05	C CAPACITOR	0.10UF B	
C913	C93-1959-05	C CAPACITOR	0.10UF B	
C914	C93-1959-05	C CAPACITOR	0.10UF B	
C915	CK73HB1E104K	C CAPACITOR	0.10UF K	
C916	CK73GB0J106K	C CAPACITOR	10.0UF K	
C917	CK73HB1C105K	C CAPACITOR	1.0UF K	
C918	C93-1959-05	C CAPACITOR	0.10UF B	
C919	CK73HB1C105K	C CAPACITOR	1.0UF K	
C920	C93-1959-05	C CAPACITOR	0.10UF B	
C921	CC73HCH1H101J	C CAPACITOR	100PF J	
C922	CK73HBB1H472K	C CAPACITOR	0.047UF K	
C924	CK73HB1C105K	C CAPACITOR	1.0UF K	
C925	CK73HB1C105K	C CAPACITOR	1.0UF K	
C926	CK73HB1C105K	C CAPACITOR	1.0UF K	
C927	CK73HB1C105K	C CAPACITOR	1.0UF K	
C928	CK73GB0J106K	C CAPACITOR	10.0UF K	
C929	CK73HB1E104K	C CAPACITOR	0.10UF K	
C930	CC73HCH1H680J	C CAPACITOR	68PF J	
C931	CK73HB1A474K	C CAPACITOR	0.47UF K	
C932	CK73GB0J106K	C CAPACITOR	10.0UF K	
C933	CK73HB1H103K	C CAPACITOR	10000PF K	
C934	CK73HB1H103K	C CAPACITOR	10000PF K	
C935	CC73HCH1H101J	C CAPACITOR	100PF J	
C936	CK73GB0J106K	C CAPACITOR	10.0UF K	
C937	CK73GB1H105K	C CAPACITOR	1.0UF K	
C938	CK73HB1H103K	C CAPACITOR	10000PF K	
C940	CK73HBB1H102K	C CAPACITOR	1000PF K	
C941	CC73HCH1H101J	C CAPACITOR	100PF J	
C942	CK73HB1H103K	C CAPACITOR	10000PF K	
C943	CK73HB1E104K	C CAPACITOR	0.10UF K	
C944	CK73GB1H105K	C CAPACITOR	1.0UF K	
C945	CK73HB1H103K	C CAPACITOR	10000PF K	
C946	CK73HB1H103K	C CAPACITOR	10000PF K	
C947	CK73HBB1H102K	C CAPACITOR	1000PF K	
C948	CK73GB1H105K	C CAPACITOR	1.0UF K	
C949	CK73GB1H105K	C CAPACITOR	1.0UF K	
C950	CK73GB1H105K	C CAPACITOR	1.0UF K	
C951	CK73GB1H105K	C CAPACITOR	1.0UF K	
C952	CK73HBB1H102K	C CAPACITOR	1000PF K	
C953	CC73HCH1H101J	C CAPACITOR	100PF J	
C954	CC73HCH1H101J	C CAPACITOR	100PF J	
C955	CC73HCH1H101J	C CAPACITOR	100PF J	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
C956	CC73HCH1H101J	C CAPACITOR	100PF J		R44	RK73JB1H102J	MG RESISTOR	1.0K J 1/20W	
C957	CC73HCH1H101J	C CAPACITOR	100PF J		R45	RK73HH1J103D	MG RESISTOR	10K D 1/16W	
C958	CC73HCH1H101J	C CAPACITOR	100PF J		R46	RK73JB1H104J	MG RESISTOR	100K J 1/20W	
C959	CC73HCH1H101J	C CAPACITOR	100PF J		R47	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
C960	CC73HCH1H101J	C CAPACITOR	100PF J		R48	RK73HH1J103D	MG RESISTOR	10K D 1/16W	
C961	CC73HCH1H101J	C CAPACITOR	100PF J		R49	RK73HH1J473D	MG RESISTOR	47K D 1/16W	
C962	CC73HCH1H101J	C CAPACITOR	100PF J		R50	RK73HH1J103D	MG RESISTOR	10K D 1/16W	
C963	CC73HCH1H101J	C CAPACITOR	100PF J		R51	RK73HB1J222J	MG RESISTOR	2.2K J 1/16W	
C964	CK73HB1E473K	C CAPACITOR	47000PF K		R52	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
C965	CC73HCH1H101J	C CAPACITOR	100PF J		R53	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
C966	CC73HCH1H101J	C CAPACITOR	100PF J		R54	R92-3769-05	METAL GLAZE RESISTOR		
C967	CK73HBB1H102K	C CAPACITOR	1000PF K		R55	R92-3769-05	METAL GLAZE RESISTOR		
C968	CC73HCH1H101J	C CAPACITOR	100PF J		R56	RK73HB1J334J	MG RESISTOR	330K J 1/16W	
C969	C92-0906-05	E CAPACITOR	330UF 16WV		R57	RK73HH1J223D	MG RESISTOR	22K D 1/16W	
C970	CK73HB1H103K	C CAPACITOR	10000PF K		R58	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
C971	CE32BY1E470M	E CAPACITOR	47UF 25WV		R59	RK73HB1J100J	MG RESISTOR	10 J 1/16W	
C972	CK73HB1E104K	C CAPACITOR	0.10UF K		R60	RK73HB1J474J	MG RESISTOR	470K J 1/16W	
C973	CK73HB1E104K	C CAPACITOR	0.10UF K		R61	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
C975	CC73HCH1H101J	C CAPACITOR	100PF J		R62	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
C976	CC73HCH1H101J	C CAPACITOR	100PF J		R63	RK73HH1J273D	MG RESISTOR	27K D 1/16W	
C977	CK73HBB1H102K	C CAPACITOR	1000PF K		R64	RK73HH1J152D	MG RESISTOR	1.5K D 1/16W	
C978	CK73HBB1H471K	C CAPACITOR	470PF K		R65	RK73HH1J472D	MG RESISTOR	4.7K D 1/16W	
C979	CC73HCH1H101J	C CAPACITOR	100PF J		R66	RK73HH1J103D	MG RESISTOR	10K D 1/16W	
C980	CC73HCH1H101J	C CAPACITOR	100PF J		R67	RK73HH1J472D	MG RESISTOR	4.7K D 1/16W	
C981	CK73HBB1H102K	C CAPACITOR	1000PF K		R68	RK73HH1J103D	MG RESISTOR	10K D 1/16W	
C982	CC73HCH1H101J	C CAPACITOR	100PF J		R69	RK73HH1J472D	MG RESISTOR	4.7K D 1/16W	
C983	CC73HCH1H101J	C CAPACITOR	100PF J		R70	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
C984	CC73HCH1H101J	C CAPACITOR	100PF J		R71	RK73HB1J331J	MG RESISTOR	330 J 1/16W	
C985	CC73HCH1H101J	C CAPACITOR	100PF J		R72	RK73JB1H473J	MG RESISTOR	47K J 1/20W	
C986	CC73HCH1H101J	C CAPACITOR	100PF J		R73	RK73HB1J471J	MG RESISTOR	470 J 1/16W	
C987	CC73HCH1H101J	C CAPACITOR	100PF J		R75	RK73HB1J474J	MG RESISTOR	470K J 1/16W	
C988	CC73HCH1H101J	C CAPACITOR	100PF J		R76	RK73FB2B332J	MG RESISTOR	3.3K J 1/8W	
C989	CC73HCH1H101J	C CAPACITOR	100PF J		R77	RK73FB2B332J	MG RESISTOR	3.3K J 1/8W	
C990	CC73HCH1H101J	C CAPACITOR	100PF J		R78	RK73FB2B332J	MG RESISTOR	3.3K J 1/8W	
C991	CC73HCH1H101J	C CAPACITOR	100PF J		R84	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
C992	CC73HCH1H101J	C CAPACITOR	100PF J		R96	RK73FB2B2R7J	MG RESISTOR	2.7 J 1/16W	
C993	CC73HCH1H101J	C CAPACITOR	100PF J		R97	RK73FB2B3R3J	MG RESISTOR	3.3 J 1/16W	
C994	CC73HCH1H101J	C CAPACITOR	100PF J		R100	RK73HB1J122J	MG RESISTOR	1.2 J 1/20W	
C995	CC73HCH1H101J	C CAPACITOR	100PF J		R101	RK73HB1J100J	MG RESISTOR	10 J 1/16W	
C996	CC73HCH1H101J	C CAPACITOR	100PF J		R102	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
C997	CK73HBB1H102K	C CAPACITOR	1000PF K		R103	RK73HB1J100J	MG RESISTOR	10 J 1/16W	
C998	CK73HBB1H102K	C CAPACITOR	1000PF K		R104	RK73HB1J100J	MG RESISTOR	10 J 1/16W	
C999	CK73HB1C105K	C CAPACITOR	1.0UF K		R106	RK73HH1J473D	MG RESISTOR	47K D 1/16W	
					R107	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R8	RK73HH1J104D	MG RESISTOR	100K D 1/16W		R108	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R10	RK73HH1J104D	MG RESISTOR	100K D 1/16W		R109	RK73HB1J470J	MG RESISTOR	47 J 1/16W	
R11	RK73HH1J104D	MG RESISTOR	100K D 1/16W		R110	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R12	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W		R111	RK73HH1J223D	MG RESISTOR	22K D 1/16W	
R13	RK73HH1J104D	MG RESISTOR	100K D 1/16W		R112	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R14	RK73HH1J223D	MG RESISTOR	22K D 1/16W		R113	RK73HB1J124J	MG RESISTOR	120K J 1/16W	
R15	RK73HH1J103D	MG RESISTOR	10K D 1/16W		R115	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R16	RK73JB1H102J	MG RESISTOR	1.0K J 1/20W		R116	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R17	RK73HH1J103D	MG RESISTOR	10K D 1/16W		R117	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R18	RK73JB1H104J	MG RESISTOR	100K J 1/20W		R118	RK73HB1J222J	MG RESISTOR	2.2K J 1/16W	
R19	RK73HH1J473D	MG RESISTOR	47K D 1/16W		R121	RK73HB1J151J	MG RESISTOR	150 J 1/16W	
R20	RK73GB2A000J	MG RESISTOR	0.0 J 1/10W		R122	RK73HH1J472D	MG RESISTOR	4.7K D 1/16W	
R21	RK73HH1J104D	MG RESISTOR	100K D 1/16W		R123	RK73HH1J104D	MG RESISTOR	100K D 1/16W	
R22	RK73JB1H103J	MG RESISTOR	10K J 1/20W		R124	RK73HH1J391D	MG RESISTOR	390 D 1/16W	
R23	RK73JB1H102J	MG RESISTOR	1.0K J 1/20W		R125	RK73HH1J103D	MG RESISTOR	10K D 1/16W	
R24	RK73JB1H104J	MG RESISTOR	100K J 1/20W		R126	RK73HB1J106J	MG RESISTOR	10M J 1/16W	
R25	RK73JB1H472J	MG RESISTOR	4.7K J 1/20W		R127	RK73HH1J104D	MG RESISTOR	100K D 1/16W	
R26	RK73JB1H102J	MG RESISTOR	1.0K J 1/20W		R128	RK73HB1J470J	MG RESISTOR	47 J 1/16W	
R27	RK73JB1H103J	MG RESISTOR	10K J 1/20W		R129	RK73HH1J104D	MG RESISTOR	100K D 1/16W	
R29	RK73JB1H473J	MG RESISTOR	47K J 1/20W		R130	RN73HH1J151D	MG RESISTOR	150 D 1/16W	
R30	RK73HH1J223D	MG RESISTOR	22K D 1/16W		R131	RN73HH1J100D	MG RESISTOR	10 D 1/16W	
R31	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W		R132	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R32	RK73HB1J101J	MG RESISTOR	100 J 1/16W		R133	RN73H0AJ181D	MF RESISTOR	180 J 1/16W	
R33	RK73HH1J103D	MG RESISTOR	10K D 1/16W		R134	RN73HH1J100D	MG RESISTOR	10 D 1/16W	
R34	RK73HH1J333D	MG RESISTOR	33K D 1/16W		R135	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R35	RK73HH1J103D	MG RESISTOR	10K D 1/16W		R136	RK73HB1J392J	MG RESISTOR	3.9K J 1/16W	
R36	RK73HH1J103D	MG RESISTOR	10K D 1/16W		R137	RK73HB1J272J	MG RESISTOR	2.7K J 1/16W	
R37	RK73HB1J101J	MG RESISTOR	100 J 1/16W		R138	RK73HB1J820J	MG RESISTOR	82 J 1/16W	
R38	RK73HB1J224J	MG RESISTOR	220K J 1/16W		R139	RK73HB1J330J	MG RESISTOR	33 J 1/16W	
R39	RK73HH1J104D	MG RESISTOR	100K D 1/16W		R140	RK73HB1J222J	MG RESISTOR	2.2K J 1/16W	
R40	RK73JB1H104J	MG RESISTOR	100K J 1/20W		R141	RK73HH1J562D	MG RESISTOR	5.6K D 1/16W	
R41	RK73JB1H104J	MG RESISTOR	100K J 1/20W		R142	RK73HB1J150J	MG RESISTOR	15 J 1/16W	
R42	RK73JB1H473J	MG RESISTOR	47K J 1/20W		R143	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R43	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W		R144	RK73HH1J562D	MG RESISTOR	5.6K D 1/16W	

△ Symbol No. Part No. Part Name Description Local

R145	RK73HH1J332D	MG RESISTOR	3.3K D 1/16W	
R146	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R147	RK73HB1J221J	MG RESISTOR	220 J 1/16W	
R148	RK73HB1J330J	MG RESISTOR	33 J 1/16W	
R149	RK73HB1J474J	MG RESISTOR	470K J 1/16W	
R151	RK73HB1J183J	MG RESISTOR	18K J 1/16W	
R152	RK73HH1J473D	MG RESISTOR	47K D 1/16W	
R153	RK73HH1J473D	MG RESISTOR	47K D 1/16W	
R154	RK73HH1J103D	MG RESISTOR	10K D 1/16W	
R155	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R156	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R158	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R159	RK73HB1J474J	MG RESISTOR	470K J 1/16W	
R160	RK73HB1J392J	MG RESISTOR	3.9K J 1/16W	
R161	RK73HB1J474J	MG RESISTOR	470K J 1/16W	
R162	RK73HB1J121J	MG RESISTOR	120 J 1/16W	
R166	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R170	RK73HH1J473D	MG RESISTOR	47K D 1/16W	
R171	RK73HB1J474J	MG RESISTOR	470K J 1/16W	
R172	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R173	RK73HH1J472D	MG RESISTOR	4.7K D 1/16W	
R174	RK73HB1J181J	MG RESISTOR	180 J 1/16W	
R175	RK73HB1J330J	MG RESISTOR	33 J 1/16W	
R176	RK73HB1J181J	MG RESISTOR	180 J 1/16W	
R177	RK73HB1J331J	MG RESISTOR	330 J 1/16W	
R178	RK73HB1J150J	MG RESISTOR	15 J 1/16W	
R179	RK73HB1J331J	MG RESISTOR	330 J 1/16W	
R300	RK73HH1J332D	MG RESISTOR	3.3K D 1/16W	
R301	RK73HB1J331J	MG RESISTOR	330 J 1/16W	
R302	RK73HB1J150J	MG RESISTOR	15 J 1/16W	
R303	RK73HB1J331J	MG RESISTOR	330 J 1/16W	
R304	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R305	RK73HB1J821J	MG RESISTOR	820 J 1/16W	
R306	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R307	RK73HB1J682J	MG RESISTOR	6.8K J 1/16W	
R308	RK73HB1J271J	MG RESISTOR	270 J 1/16W	
R309	RK73HB1J180J	MG RESISTOR	18 J 1/16W	
R310	RK73HB1J271J	MG RESISTOR	270 J 1/16W	
R311	RK73HH1J562D	MG RESISTOR	5.6K J 1/16W	
R312	RK73HB1J470J	MG RESISTOR	47 J 1/16W	
R313	RK73HB1J822J	MG RESISTOR	8.2K J 1/16W	
R314	RK73HB1J471J	MG RESISTOR	470 J 1/16W	
R315	RK73EB2E271J	MG RESISTOR	270 J 1/16W	
R316	RK73EB2E180J	MG RESISTOR	18 J 1/16W	
R317	RK73EB2E271J	MG RESISTOR	270 J 1/16W	
R318	RK73GB2A470J	MG RESISTOR	47 J 1/16W	
R319	RK73HB1J822J	MG RESISTOR	8.2K J 1/16W	
R320	RK73HH1J562D	MG RESISTOR	5.6K D 1/16W	
R321	RK73FB2B471J	MG RESISTOR	470 J 1/8W	
R323	RK73GB2A332J	MG RESISTOR	3.3K J 1/10W	
R324	RK73GB2A470J	MG RESISTOR	47 J 1/10W	
R325	RK73GB2A562J	MG RESISTOR	5.6K J 1/10W	
R327	RK73GB2A103J	MG RESISTOR	10K J 1/10W	
R328	RK73GB2A103J	MG RESISTOR	10K J 1/10W	
R329	RK73GB2A103J	MG RESISTOR	10K J 1/10W	
R330	RK73GB2A103J	MG RESISTOR	10K J 1/10W	
R331	RK73PB2H471J	MG RESISTOR	470 J 1/2W	
R332	RK73PB2H471J	MG RESISTOR	470 J 1/2W	
R333	RK73F0GZ1R0F	MG RESISTOR	1.0 F 1/3W	
R334	RK73HH1J103D	MG RESISTOR	10K D 1/16W	
R335	RK73F0GZ1R0F	MG RESISTOR	1.0 F 1/3W	
R336	RK73FB2B3R3J	MG RESISTOR	3.3 J 1/16W	
R337	RK73F0GZ3R3F	MG RESISTOR	3.3 F 1/3W	
R338	RK73F0GZ3R3F	MG RESISTOR	3.3 F 1/3W	
R339	RK73RB2H5R6J	MG RESISTOR	56 J 1/16W	
R340	RK73GB2A680J	MG RESISTOR	68 J 1/10W	
R341	RK73GB2A181J	MG RESISTOR	180 J 1/10W	
R342	RK73GB2A680J	MG RESISTOR	68 J 1/10W	
R343	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R344	RK73FB2B121J	MG RESISTOR	120 J 1/16W	
R346	RK73HH1J333D	MG RESISTOR	33K D 1/16W	
R347	RK73HH1J103D	MG RESISTOR	10K D 1/16W	
R348	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R349	RK73GB2A000J	MG RESISTOR	0.0 J 1/10W	
R350	RK73FB2B101J	MG RESISTOR	100 J 1/16W	
R351	RK73GB2A470J	MG RESISTOR	47 J 1/10W	
R353	RK73PB2H470J	MG RESISTOR	47 J 1/2W	
R354	RK73PB2H470J	MG RESISTOR	47 J 1/2W	

△ Symbol No. Part No. Part Name Description Local

R355	RK73HB1J271J	MG RESISTOR	270 J 1/16W	
R359	RK73GB2A000J	MG RESISTOR	0.0 J 1/10W	
R360	RK73GB2A000J	MG RESISTOR	0.0 J 1/10W	
R361	RK73F0GZ3R3F	MG RESISTOR	3.3 F 1/3W	
R362	RK73F0GZ3R3F	MG RESISTOR	3.3 F 1/3W	
R369	RK73GB2A470J	MG RESISTOR	47 J 1/10W	
R371	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R373	RK73HB1J682J	MG RESISTOR	6.8K J 1/16W	
R374	RK73HH1J223D	MG RESISTOR	22K D 1/16W	
R375	RK73HB1J821J	MG RESISTOR	820 J 1/16W	
R376	RK73HB1J181J	MG RESISTOR	180 J 1/16W	
R380	RK73HB1J222J	MG RESISTOR	2.2K J 1/16W	
R381	RK73HB1J222J	MG RESISTOR	2.2K J 1/16W	
R382	RK73HH1J223D	MG RESISTOR	22K D 1/16W	
R383	RK73HH1J223D	MG RESISTOR	22K D 1/16W	
R384	RK73HH1J103D	MG RESISTOR	10K D 1/16W	
R385	RK73HB1J470J	MG RESISTOR	47 J 1/16W	
R386	RK73HB1J470J	MG RESISTOR	47 J 1/16W	
R387	RK73HB1J822J	MG RESISTOR	8.2K J 1/16W	
R388	RK73HB1J393J	MG RESISTOR	39K J 1/16W	
R389	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R391	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R392	RK73HH1J103D	MG RESISTOR	10K D 1/16W	
R395	RK73HB1J470J	MG RESISTOR	47 J 1/16W	
R397	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R398	RK73HH1J223D	MG RESISTOR	22K D 1/16W	
R399	RK73HB1J222J	MG RESISTOR	2.2K J 1/16W	
R401	RK73HH1J122D	MG RESISTOR	1.2K D 1/16W	
R402	R92-1061-05	JUMPER REST	0 OHM	
R403	RK73HH1J223D	MG RESISTOR	22K D 1/16W	
R404	RK73HB1J182J	MG RESISTOR	1.8K J 1/16W	
R405	RK73HH1J223D	MG RESISTOR	22K D 1/16W	
R406	RK73HH1J223D	MG RESISTOR	22K D 1/16W	
R407	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R408	RK73HH1J223D	MG RESISTOR	22K D 1/16W	
R409	RK73HH1J223D	MG RESISTOR	22K D 1/16W	
R411	RK73HH1J223D	MG RESISTOR	22K D 1/16W	
R412	RK73HH1J104D	MG RESISTOR	100K D 1/16W	
R413	RK73HB1J471J	MG RESISTOR	470 J 1/16W	
R414	RK73HH1J223D	MG RESISTOR	22K D 1/16W	
R415	RK73HH1J104D	MG RESISTOR	100K D 1/16W	
R416	RK73HH1J103D	MG RESISTOR	10K D 1/16W	
R417	RK73HH1J223D	MG RESISTOR	22K D 1/16W	
R418	RK73HH1J223D	MG RESISTOR	22K D 1/16W	
R420	RK73HH1J104D	MG RESISTOR	100K D 1/16W	
R421	RK73HH1J104D	MG RESISTOR	100K D 1/16W	
R422	RK73HH1J103D	MG RESISTOR	10K D 1/16W	
R423	RK73HB1J222J	MG RESISTOR	2.2K J 1/16W	
R424	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R426	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R427	RK73HH1J223D	MG RESISTOR	22K D 1/16W	
R428	RK73HB1J183J	MG RESISTOR	18K J 1/16W	
R429	RK73HB1J822J	MG RESISTOR	8.2K J 1/16W	
R431	RK73HH1J223D	MG RESISTOR	22K D 1/16W	
R432	RK73HH1J103D	MG RESISTOR	10K D 1/16W	
R433	RK73HB1J682J	MG RESISTOR	6.8K J 1/16W	
R434	RK73HH1J472D	MG RESISTOR	4.7K D 1/16W	
R436	RK73HH1J473D	MG RESISTOR	47K D 1/16W	
R437	RK73HB1J822J	MG RESISTOR	8.2K J 1/16W	
R438	RK73HB1J822J	MG RESISTOR	8.2K J 1/16W	
R500	RK73HB1J331J	MG RESISTOR	330 J 1/16W	
R501	RK73HB1J180J	MG RESISTOR	18 J 1/16W	
R502	RK73HB1J331J	MG RESISTOR	330 J 1/16W	
R503	RK73HH1J103D	MG RESISTOR	10K D 1/16W	
R504	RK73HH1J103D	MG RESISTOR	10K D 1/16W	
R505	RK73HB1J271J	MG RESISTOR	270 J 1/16W	
R506	RK73HB1J470J	MG RESISTOR	47 J 1/16W	
R507	RK73HB1J222J	MG RESISTOR	2.2K J 1/16W	
R508	RK73HH1J472D	MG RESISTOR	4.7K D 1/16W	
R509	RK73HB1J222J	MG RESISTOR	2.2K J 1/16W	
R510	RK73HH1J273D	MG RESISTOR	27K D 1/16W	
R511	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R512	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R514	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R515	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R516	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R518	RK73HH1J223D	MG RESISTOR	22K D 1/16W	
R519	RK73HH1J223D	MG RESISTOR	22K D 1/16W	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
R520	RK73HH1J223D	MG RESISTOR	22K D 1/16W		R742	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R521	RK73HH1J223D	MG RESISTOR	22K D 1/16W		R744	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R527	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W		R746	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R528	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W		R747	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R531	RK73HB1J474J	MG RESISTOR	470K J 1/16W		R748	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R532	RK73HB1J474J	MG RESISTOR	470K J 1/16W		R749	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R533	RK73HB1J474J	MG RESISTOR	470K J 1/16W		R750	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R534	RK73HB1J474J	MG RESISTOR	470K J 1/16W		R751	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R537	RK73HB1J470J	MG RESISTOR	47 J 1/16W		R752	RK73HH1J332D	MG RESISTOR	3.3K D 1/16W	
R538	RK73HB1J101J	MG RESISTOR	100 J 1/16W		R753	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R539	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W		R754	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R540	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W		R755	RK73JB1H104J	MG RESISTOR	100K J 1/20W	
R541	RK73HB1J183J	MG RESISTOR	18K J 1/16W		R756	RK73JB1H104J	MG RESISTOR	100K J 1/20W	
R542	RK73HB1J183J	MG RESISTOR	18K J 1/16W		R757	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R543	RK73HB1J183J	MG RESISTOR	18K J 1/16W		R758	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R544	RK73HB1J183J	MG RESISTOR	18K J 1/16W		R759	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R545	RK73HB1J331J	MG RESISTOR	330 J 1/16W		R760	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R546	RK73HB1J180J	MG RESISTOR	18 J 1/16W		R761	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R547	RK73HB1J474J	MG RESISTOR	470K J 1/16W		R762	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R548	RK73HB1J474J	MG RESISTOR	470K J 1/16W		R763	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R549	RK73HB1J474J	MG RESISTOR	470K J 1/16W		R764	RK73JB1H104J	MG RESISTOR	100K J 1/20W	
R550	RK73HB1J474J	MG RESISTOR	470K J 1/16W		R765	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R554	RK73HB1J474J	MG RESISTOR	470K J 1/16W		R766	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R555	RK73HB1J474J	MG RESISTOR	470K J 1/16W		R767	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R556	RK73HB1J474J	MG RESISTOR	470K J 1/16W		R768	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R557	RK73HB1J331J	MG RESISTOR	330 J 1/16W		R770	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R600	RK73HB1J100J	MG RESISTOR	10 J 1/16W		R772	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R601	RK73HB1J100J	MG RESISTOR	10 J 1/16W		R773	RK73JB1H104J	MG RESISTOR	100K J 1/20W	
R602	RK73HB1J100J	MG RESISTOR	10 J 1/16W		R774	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R603	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W		R775	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R604	RK73HB1J681J	MG RESISTOR	680 J 1/16W		R777	RK73JB1H102J	MG RESISTOR	1.0K J 1/20W	
R605	RK73JB1H103J	MG RESISTOR	10K J 1/20W		R778	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R606	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W		R779	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R607	RK73HB1J220J	MG RESISTOR	22 J 1/16W		R781	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R608	RK73HH1J391D	MG RESISTOR	390 D 1/16W		R782	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R609	RK73HB1J182J	MG RESISTOR	1.8K J 1/16W		R783	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R610	RK73HH1J562D	MG RESISTOR	5.6K D 1/16W		R785	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R611	RK73HB1J471J	MG RESISTOR	470 J 1/16W		R787	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R612	RK73JB1H472J	MG RESISTOR	4.7K J 1/20W		R788	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R613	RK73HH1J104D	MG RESISTOR	100K D 1/16W		R789	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R614	RK73HB1J470J	MG RESISTOR	47 J 1/16W		R790	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R615	RK73HH1J103D	MG RESISTOR	10K D 1/16W		R791	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R616	RK73HB1J101J	MG RESISTOR	100 J 1/16W		R792	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R617	RK73HB1J274J	MG RESISTOR	270K J 1/16W		R794	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R618	RK73HB1J271J	MG RESISTOR	270 J 1/16W		R795	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R619	RK73HB1J180J	MG RESISTOR	18 J 1/16W		R797	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R620	RK73HB1J271J	MG RESISTOR	270 J 1/16W		R798	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R621	RK73HB1J470J	MG RESISTOR	47 J 1/16W		R799	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R622	RK73HB1J681J	MG RESISTOR	680 J 1/16W		R800	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R623	RK73HH1J104D	MG RESISTOR	100K D 1/16W		R801	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R624	RK73HB1J563J	MG RESISTOR	56K J 1/16W		R802	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R625	RK73HB1J823J	MG RESISTOR	82K J 1/16W		R803	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R626	RK73HH1J333D	MG RESISTOR	33K D 1/16W		R804	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R628	RK73HB1J101J	MG RESISTOR	100 J 1/16W		R805	RK73GH2A49R9D	MG RESISTOR	49.9 D 1/10W	
R630	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W		R806	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R631	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W		R807	RK73JB1H102J	MG RESISTOR	1.0K J 1/20W	
R632	RK73GB2A000J	MG RESISTOR	0.0 J 1/10W		R808	RK73JB1H102J	MG RESISTOR	1.0K J 1/20W	
R700	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W		R809	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R701	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W		R810	RK73JB1H102J	MG RESISTOR	1.0K J 1/20W	
R702	RK73HB1J100J	MG RESISTOR	10 J 1/16W		R812	RK73JB1H222J	MG RESISTOR	2.2K J 1/20W	
R707	RK73HB1J100J	MG RESISTOR	10 J 1/16W		R813	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R708	RK73HB1J220J	MG RESISTOR	22 J 1/16W		R814	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R709	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W		R815	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R719	RK73HB1J153J	MG RESISTOR	15K J 1/16W		R816	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R720	RK73HH1J333D	MG RESISTOR	33K D 1/16W		R817	RK73JB1H220J	MG RESISTOR	22 J 1/20W	
R721	RK73HB1J100J	MG RESISTOR	10 J 1/16W		R828	RK73HH1J103D	MG RESISTOR	10K D 1/16W	
R722	RK73HB1J681J	MG RESISTOR	680 J 1/16W		R830	RK73JB1H103J	MG RESISTOR	10K J 1/20W	
R727	RK73HB1J821J	MG RESISTOR	820 J 1/16W		R831	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R728	RK73JB1H104J	MG RESISTOR	100K J 1/20W		R833	RK73JB1H104J	MG RESISTOR	100K J 1/20W	
R729	RK73JB1H104J	MG RESISTOR	100K J 1/20W		R835	RK73JB1H104J	MG RESISTOR	100K J 1/20W	
R731	RK73JB1H473J	MG RESISTOR	47K J 1/20W		R837	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R732	RK73JB1H472J	MG RESISTOR	4.7K J 1/20W		R838	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R733	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W		R839	RK73HH1J473D	MG RESISTOR	47K D 1/16W	
R734	RK73JB1H103J	MG RESISTOR	10K J 1/20W		R843	RK73HH1J104D	MG RESISTOR	100K D 1/16W	
R735	RK73JB1H103J	MG RESISTOR	10K J 1/20W		R844	RK73HH1J103D	MG RESISTOR	10K D 1/16W	
R736	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W		R845	RK73HH1J103D	MG RESISTOR	10K D 1/16W	
R738	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W		R854	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R740	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W		R857	RK73HH1J333D	MG RESISTOR	33K D 1/16W	

△ Symbol No.	Part No.	Part Name	Description	Local
R858	RK73HH1J223D	MG RESISTOR	22K D 1/16W	
R859	RK73HH1J223D	MG RESISTOR	22K D 1/16W	
R862	RK73HB1J222J	MG RESISTOR	2.2K J 1/16W	
R863	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R864	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R865	RK73HB1J222J	MG RESISTOR	2.2K J 1/16W	
R867	RK73HH1J823D	MG RESISTOR	82K D 1/16W	
R868	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R869	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R874	RK73JB1H104J	MG RESISTOR	100K J 1/20W	
R876	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R877	RK73FB2B332J	MG RESISTOR	3.3K J 1/8W	
R878	RK73FB2B332J	MG RESISTOR	3.3K J 1/8W	
R879	RK73FB2B332J	MG RESISTOR	3.3K J 1/8W	
R880	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R881	RK73HB1J331J	MG RESISTOR	330 J 1/16W	
R882	RK73JB1H473J	MG RESISTOR	47K J 1/20W	
R883	RK73JB1H473J	MG RESISTOR	47K J 1/20W	
R884	RK73HH1J104D	MG RESISTOR	100K D 1/16W	
R885	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R900	RK73HB1J100J	MG RESISTOR	10 J 1/16W	
R901	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R902	RK73HB1J100J	MG RESISTOR	10 J 1/16W	
R903	RK73HH1J103D	MG RESISTOR	10K D 1/16W	
R904	RK73HH1J223D	MG RESISTOR	22K D 1/16W	
R905	RK73HH1J223D	MG RESISTOR	22K D 1/16W	
R906	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R907	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R908	RK73HH1J223D	MG RESISTOR	22K D 1/16W	
R909	RK73HH1J223D	MG RESISTOR	22K D 1/16W	
R911	RK73HH1J104D	MG RESISTOR	100K D 1/16W	
R912	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R913	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R914	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R915	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R916	RK73HB1J222J	MG RESISTOR	2.2K J 1/16W	
R917	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R918	RK73HB1J683J	MG RESISTOR	68K J 1/16W	
R919	RK73HH1J473D	MG RESISTOR	47K D 1/16W	
R920	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R921	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R922	RK73HB1J681J	MG RESISTOR	680 J 1/16W	
R923	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R924	RK73HH1J473D	MG RESISTOR	47K D 1/16W	
R925	RK73HH1J273D	MG RESISTOR	27K D 1/16W	
R926	RK73HH1J103D	MG RESISTOR	10K D 1/16W	
R927	RK73HB1J474J	MG RESISTOR	470K J 1/16W	
R928	RK73HH1J103D	MG RESISTOR	10K D 1/16W	
R930	RK73HH1J103D	MG RESISTOR	10K D 1/16W	
R932	RK73HH1J473D	MG RESISTOR	47K D 1/16W	
R933	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R935	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R936	RK73GB2A101J	MG RESISTOR	100 J 1/10W	
R937	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R938	RK73HH1J332D	MG RESISTOR	3.3K D 1/16W	
R939	RK73HB1J392J	MG RESISTOR	3.9K J 1/16W	
R940	RK73HB1J392J	MG RESISTOR	3.9K J 1/16W	
R941	RK73GB2A101J	MG RESISTOR	100 J 1/10W	
R943	RK73GB2A000J	MG RESISTOR	0.0 J 1/10W	
R944	RK73HH1J473D	MG RESISTOR	47K D 1/16W	
R945	RK73HH1J472D	MG RESISTOR	4.7K D 1/16W	
R947	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R948	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R949	RK73HH1J472D	MG RESISTOR	4.7K D 1/16W	
R950	RK73GB2A000J	MG RESISTOR	0.0 J 1/10W	
R951	RK73HB1J100J	MG RESISTOR	10 J 1/16W	
R953	RK73HH1J472D	MG RESISTOR	4.7K D 1/16W	
R954	RK73HH1J472D	MG RESISTOR	4.7K D 1/16W	
R955	RK73HB1J100J	MG RESISTOR	10 J 1/16W	
R956	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R957	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R958	RK73GB2A102J	MG RESISTOR	1.0K J 1/10W	
R960	RK73HH1J103D	MG RESISTOR	10K D 1/16W	
R961	RK73GB2A102J	MG RESISTOR	1.0K J 1/10W	
R962	RK73HH1J473D	MG RESISTOR	47K D 1/16W	
R963	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R964	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R965	RK73HB1J471J	MG RESISTOR	470 J 1/16W	

△ Symbol No.	Part No.	Part Name	Description	Local
R966	RK73HB1J471J	MG RESISTOR	470 J 1/16W	
R967	RK73GB2A221J	MG RESISTOR	220 J 1/10W	
R968	RK73GB2A221J	MG RESISTOR	220 J 1/10W	
R969	RK73HB1J471J	MG RESISTOR	470 J 1/16W	
R970	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R971	RK73HB1J471J	MG RESISTOR	470 J 1/16W	
R972	RK73HB1J471J	MG RESISTOR	470 J 1/16W	
R973	RK73HB1J471J	MG RESISTOR	470 J 1/16W	
R974	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R975	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R976	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R977	RK73GB2A102J	MG RESISTOR	1.0K J 1/10W	
R978	RK73HH1J473D	MG RESISTOR	47K D 1/16W	
R979	RK73HB1J681J	MG RESISTOR	680 J 1/16W	
R980	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R981	RK73GB2A221J	MG RESISTOR	220 J 1/10W	
R982	RK73GB2A221J	MG RESISTOR	220 J 1/10W	
R983	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R984	RK73HB1J682J	MG RESISTOR	6.8K J 1/16W	
R985	RK73HH1J104D	MG RESISTOR	100K D 1/16W	
R991	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R992	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R993	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R994	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R996	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R997	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R998	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
L1	LB73Z0AF-001	CHIP FERRITE BEADS		
L2	LB73Z0AF-001	CHIP FERRITE BEADS		
L3	LB73Z0AF-001	CHIP FERRITE BEADS		
L4	LB73H0AV-002	CHIP FERRITE BEADS		
L5	LB73G0AK-001	CHIP FERRITE BEADS		
L6	LB73G0AM-004	CHIP FERRITE BEADS		
L7	LB73G0AK-001	CHIP FERRITE BEADS		
L9	LB73G0AK-001	CHIP FERRITE BEADS		
L10	LB73G0AK-001	CHIP FERRITE BEADS		
L11	L41-4792-69	SMALL FIXED INDUCTOR	4.7UH	
L12	LB73G0AM-004	CHIP FERRITE BEADS		
L13	LR79Z0AA150M	CHIP INDUCTOR		
L14	LB73G0AK-001	CHIP FERRITE BEADS		
L15	LB73G0AK-001	CHIP FERRITE BEADS		
L16	LB73H0AY-004	CHIP FERRITE BEADS		
L80	LB73H0AV-003	CHIP FERRITE BEADS		
L100	LB73H0AV-003	CHIP FERRITE BEADS		
L101	LB73H0AV-003	CHIP FERRITE BEADS		
L102	LB73H0AV-003	CHIP FERRITE BEADS		
L103	LB73H0AV-003	CHIP FERRITE BEADS		
L112	LB73H0AY-004	CHIP FERRITE BEADS		
L113	LK73G0AFR27J	M.CHIP INDUCTOR	270NH	
L114	LK73G0AFR27J	M.CHIP INDUCTOR	270NH	
L115	LK73G0AFR27J	M.CHIP INDUCTOR	270NH	
L116	LK73G0AFR27J	M.CHIP INDUCTOR	270NH	
L117	LR79Z0CM28NG	CHIP INDUCTOR		
L118	LK73G0AFR27J	M.CHIP INDUCTOR	270NH	
L119	LK73G0AFR27J	M.CHIP INDUCTOR	270NH	
L120	LB73H0AV-003	CHIP FERRITE BEADS		
L121	LB73H0AV-003	CHIP FERRITE BEADS		
L122	LB73H0AY-004	CHIP FERRITE BEADS		
L123	LK73G0AFR27J	M.CHIP INDUCTOR	270NH	
L124	LK73G0AFR27J	M.CHIP INDUCTOR	270NH	
L125	LK73G0AFR27J	M.CHIP INDUCTOR	270NH	
L126	LK73G0AFR27J	M.CHIP INDUCTOR	270NH	
L127	LR79Z0CM28NG	CHIP INDUCTOR		
L128	LK73G0AFR27J	M.CHIP INDUCTOR	270NH	
L129	LK73G0AFR27J	M.CHIP INDUCTOR	270NH	
L130	LK73H0AM12NJ	M.CHIP INDUCTOR	12NH	
L131	LK73H0AM12NJ	M.CHIP INDUCTOR	12NH	
L132	LK73H0AM12NJ	M.CHIP INDUCTOR	12NH	
L133	LK73H0AM12NJ	M.CHIP INDUCTOR	12NH	
L134	L41-6865-53	MULTILAYER CHIP INDUCTOR		
L135	L41-8265-53	MULTILAYER CHIP INDUCTOR		
L136	L41-1275-53	MULTILAYER CHIP INDUCTOR		
L137	L41-1275-53	MULTILAYER CHIP INDUCTOR		
L138	LB73H0AV-003	CHIP FERRITE BEADS		
L139	LK73H0AM12NJ	M.CHIP INDUCTOR	12NH	
L140	LB73H0AY-004	CHIP FERRITE BEADS		
L141	LB73H0AY-004	CHIP FERRITE BEADS		

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
L142	LK73G0AFR27J	M.CHIP INDUCTOR	270NH		L701	LB73H0AV-003	CHIP FERRITE BEADS		
L300	L40-3363-71	SMALL FIXED INDUCTOR	3.3NH		L702	LB73G0AK-001	CHIP FERRITE BEADS		
L301	LK73H0AM33NJ	M.CHIP INDUCTOR	33NH		L711	LR77Z0AE4R7J	CHIP INDUCTOR		
L302	L40-3363-71	SMALL FIXED INDUCTOR	3.3NH		L713	LB73H0AV-002	CHIP FERRITE BEADS		
L303	LK73H0AM4N7S	M.CHIP INDUCTOR	4.7NH		L714	LB73G0AM-004	CHIP FERRITE BEADS		
L304	LK73H0AM27NJ	M.CHIP INDUCTOR	27NH		L715	L92-1101-05	CHIP FERRITE		
L305	LK73H0AM68NJ	M.CHIP INDUCTOR	38NH		L716	L92-1101-05	CHIP FERRITE		
L306	L40-5663-92	SMALL FIXED INDUCTOR	5.6NH		L717	L92-1101-05	CHIP FERRITE		
L307	L41-2763-14	SMALL FIXED INDUCTOR	2.7NH		L718	L92-1101-05	CHIP FERRITE		
L308	LB73F0AW-002	CHIP FERRITE BEADS			L719	LB73H0AV-002	CHIP FERRITE BEADS		
L309	L40-5663-92	SMALL FIXED INDUCTOR	5.6NH		L720	LB73G0AK-001	CHIP FERRITE BEADS		
L310	L40-5663-92	SMALL FIXED INDUCTOR	5.6NH		L721	LB73G0AK-001	CHIP FERRITE BEADS		
L311	L40-3963-92	SMALL FIXED INDUCTOR	3.9NH		L722	LB73G0AK-001	CHIP FERRITE BEADS		
L312	L41-5668-14	SMALL FIXED INDUCTOR	5.6NH		L723	LB73H0AV-002	CHIP FERRITE BEADS		
L313	LB73F0AW-002	CHIP FERRITE BEADS			L724	LB73G0AK-001	CHIP FERRITE BEADS		
L314	L41-5668-14	SMALL FIXED INDUCTOR	5.6NH		L725	LB73H0AV-002	CHIP FERRITE BEADS		
L315	L41-2763-14	SMALL FIXED INDUCTOR	2.7NH		L726	L79-1984-05	FILTER		
L316	LB73G0BA-004	CHIP FERRITE BEADS			L728	L79-1984-05	FILTER		
L317	L34-4994-05	SMALL FIXED INDUCTOR	47.0NH		L729	L79-1984-05	FILTER		
L318	LB73G0BA-004	CHIP FERRITE BEADS			L730	L79-1984-05	FILTER		
L319	L34-4560-05	SMALL FIXED INDUCTOR	47.0NH		L731	L79-1984-05	FILTER		
L320	LB73H0AV-003	CHIP FERRITE BEADS			L732	L92-1101-05	CHIP FERRITE		
L323	LR77Z0AA22NJ	CHIP INDUCTOR	22NH		L901	LB73H0AV-003	CHIP FERRITE BEADS		
L324	LR77Z0AA27NJ	CHIP INDUCTOR	27NH		L902	LB73H0AV-003	CHIP FERRITE BEADS		
L325	L34-4613-05	SMALL FIXED INDUCTOR	67NH		L906	LB73G0BA-004	CHIP FERRITE BEADS		
L326	L41-3378-55	SMALL FIXED INDUCTOR	33NH		L907	LB73G0BA-004	CHIP FERRITE BEADS		
L327	L34-4650-05	SMALL FIXED INDUCTOR	5.3NH						
L328	LR79Z0DA8N0G	CHIP INDUCTOR	8NH		A1	W02-3785-05	DC-DC CONVERTER		
L329	LR79Z0DA8N0G	CHIP INDUCTOR	8NH		CN2	E23-1260-14	TERMINAL		
L330	LR79Z0DA8N0G	CHIP INDUCTOR	8NH		CN3	E23-1260-14	TERMINAL		
L331	L41-1561-55	SMALL FIXED INDUCTOR	1.5NH		CN4	E41-1682-05	PIN ASSY		
L333	LB73H0AV-003	CHIP FERRITE BEADS			CN12	J19-5386-05	HOLDER		
L500	L39-1498-05	TOROIDAL COIL			CN731	E40-6720-05	SOCKET FOR PIN ASSY		
L501	LB73G0BD-005	CHIP FERRITE BEADS			CN735	E40-6862-05	FLAT CABLE CONNECTOR		
L502	L41-8285-14	SMALL FIXED INDUCTOR	820NH		CN749	EC720AA-0550A	FLAT CABLE CONNECTOR SMD		
L503	L41-8285-14	SMALL FIXED INDUCTOR	820NH		CN900	E41-2723-05	PIN ASSY		
L504	LK73H0AM15NJ	M.CHIP INDUCTOR	15NH		CN906	E40-6560-05	FLAT CABLE CONNECTOR		
L505	LK73G0AF8N2J	M.CHIP INDUCTOR	8.2NH		CN907	E40-6560-05	FLAT CABLE CONNECTOR		
L506	LK73H0AM10NJ	M.CHIP INDUCTOR	10NH		CN910	E40-6582-05	PIN ASSY		
L507	LK73H0AM10NJ	M.CHIP INDUCTOR	10NH		CP100	RK74HB1J100J	NET RESISTOR	10 J 1/16W	
L508	LK73H0AM12NJ	M.CHIP INDUCTOR	12NH		CP600	RK74HB1J100J	NET RESISTOR	10 J 1/16W	
L510	L79-1927-05	FILTER			CP701	RK74HB1J103J	NET RESISTOR	10K J 1/16W	
L511	L79-1928-05	FILTER			CP702	RK74HB1J102J	NET RESISTOR	1.0K J 1/16W	
L513	L40-3363-71	SMALL FIXED INDUCTOR	3.3NH		CP703	RK74HB1J100J	NET RESISTOR	10 J 1/16W	
L514	LK73H0AM8N2J	M.CHIP INDUCTOR	8.2NH		CP704	RK74HB1J100J	NET RESISTOR	10 J 1/16W	
L515	L41-1578-08	SMALL FIXED INDUCTOR	15NH		CP705	RK74HB1J100J	NET RESISTOR	10 J 1/16W	
L516	L41-1878-08	SMALL FIXED INDUCTOR	18NH		CP706	RK74HB1J101J	NET RESISTOR	100 J 1/16W	
L517	LK73H0AM5N6S	M.CHIP INDUCTOR	5.6NH		CP707	RK74HB1J101J	NET RESISTOR	100 J 1/16W	
L518	LK73H0AM6N8J	M.CHIP INDUCTOR	6.8NH		CP708	RK74HB1J101J	NET RESISTOR	100 J 1/16W	
L519	LB73G0BA-004	CHIP FERRITE BEADS			CP709	RK74HB1J101J	NET RESISTOR	100 J 1/16W	
L520	LB73G0BA-004	CHIP FERRITE BEADS			CP710	RK74HB1J101J	NET RESISTOR	100 J 1/16W	
L521	L79-1927-05	FILTER			CP711	RK74HB1J101J	NET RESISTOR	100 J 1/16W	
L522	L79-1928-05	FILTER			CP716	RK74HB1J101J	NET RESISTOR	100 J 1/16W	
L600	LK73G0AQ100K	M.CHIP INDUCTOR	10UH		CP717	RK74HB1J470J	NET RESISTOR	47 J 1/16W	
L601	LB73H0AV-003	CHIP FERRITE BEADS			CP718	RK74HB1J470J	NET RESISTOR	47 J 1/16W	
L602	LB73H0AV-003	CHIP FERRITE BEADS			CP719	RK74HB1J470J	NET RESISTOR	47 J 1/16W	
L603	L41-2788-55	SMALL FIXED INDUCTOR	270NH		CP720	RK74HB1J470J	NET RESISTOR	47 J 1/16W	
L604	LB73H0AV-003	CHIP FERRITE BEADS			CP721	RK74HB1J470J	NET RESISTOR	47 J 1/16W	
L605	L41-2785-53	SMALL FIXED INDUCTOR	270NH		CP900	RK74HB1J100J	NET RESISTOR	10 J 1/16W	
L606	L41-4798-14	SMALL FIXED INDUCTOR	4.7UF		CP901	RK74HA1J100J	NET RESISTOR	10 J 1/16W	
L607	L41-1885-53	SMALL FIXED INDUCTOR	0.18UH		E2	F10-3226-05	SHIELDING CASE		
L608	LB73H0AV-003	CHIP FERRITE BEADS			E100	F10-3244-15	SHIELDING CASE		
L609	LB73H0AV-003	CHIP FERRITE BEADS			E600	F10-3224-15	SHIELDING CASE		
L610	L41-1885-53	SMALL FIXED INDUCTOR	0.18UH		F1	F53-0286-05	FUSE	2.5A	
L611	LK73G0AQ100K	M.CHIP INDUCTOR	10UH		F2	FZA10BS-5R0	FUSE	5.0A	
L612	LK73G0AQ100K	M.CHIP INDUCTOR	10UH		F3	FZA10BS-5R0	FUSE	5.0A	
L613	LB73H0AV-003	CHIP FERRITE BEADS			F300	FZA10BQ-3R15	FUSE	3.15A	
L614	LB73H0AV-003	CHIP FERRITE BEADS			F900	F53-0286-05	FUSE	2.5A	
L615	LK73G0AQR33K	M.CHIP INDUCTOR	330NH		J700	E68-0426-05	JACK(OTHERS)		
L616	LB73H0AV-002	CHIP FERRITE BEADS			J900	E1B-0001-00	3.5D PHONE JACK		
L617	LK73G0AQR82K	M.CHIP INDUCTOR	820NH		J901	E58-0521-05	SUB SOCKET(D)		
L618	LK73G0AQ2R2K	M.CHIP INDUCTOR	2.2UH		TH301	ERTJ0V104H	NEGATIVE TEMP THERMISTOR		
L619	L40-6881-86	SMALL FIXED INDUCTOR	0.68U		TH302	ERTJ0V104H	NEGATIVE TEMP THERMISTOR		
L620	LB73H0AV-002	CHIP FERRITE BEADS			TH305	ERTJ0V104H	NEGATIVE TEMP THERMISTOR		
L621	L41-1098-14	SMALL FIXED INDUCTOR	10UH		TH306	ERTJ0V104H	NEGATIVE TEMP THERMISTOR		
L625	LK73G0ASR39J	SMALL FIXED INDUCTOR	390NH		TH700	ERTJ0V104H	NEGATIVE TEMP THERMISTOR		
L626	LK73G0AQ100K	M.CHIP INDUCTOR	10UH		X700	L77-3123-05	TCXO	19.2M	
L700	LB73G0AK-001	CHIP FERRITE BEADS			X701	L77-1802-05	CRYSTAL RESONATOR	32768HZ	

△ Symbol No.	Part No.	Part Name	Description	Local
XF600	L7B-0001-00	MCF		

MODULE (BT/GPS) UNIT

XC2-0031-80

***Note : This part cannot be replaced. Therefore, this part is not supplied as a service part.**

Block No. [0][2]

△ Symbol No.	Part No.	Part Name	Description	Local
IC1	74AVC4TD245GU	IC		
IC2	BU18TD2WNVX	IC		
IC3	-----	IC	*Note	
IC4	NJM2878F4-33	IC		
IC5	-----	IC	*Note	
IC6	74AVC4TD245GU	IC		
IC7	74AVC4TD245GU	IC		
Q1	EM6M2	FET		
D17	RN262CS	DIODE		
D18	RN262CS	DIODE		
C1	CK73HB1A474K	C CAPACITOR	0.47UF K	
C2	CK73HB1A474K	C CAPACITOR	0.47UF K	
C3	CK73HB1E104K	C CAPACITOR	0.10UF K	
C4	CK73HB1E104K	C CAPACITOR	0.10UF K	
C5	CK73HB1A105K	C CAPACITOR	1.0UF K	
C6	CK73HB1A474K	C CAPACITOR	0.47UF K	
C7	CK73HB1A474K	C CAPACITOR	0.47UF K	
C8	CC73HCH1H220J	C CAPACITOR	22PF J	
C9	CC73HCH1H100B	C CAPACITOR	10PF B	
C10	CK73HB1A105K	C CAPACITOR	1.0UF K	
C11	CK73HB1E104K	C CAPACITOR	0.10UF K	
C12	CK73HB1E104K	C CAPACITOR	0.10UF K	
C13	CK73HB1E104K	C CAPACITOR	0.10UF K	
C14	CK73HB1E104K	C CAPACITOR	0.10UF K	
C15	CK73HB1A105K	C CAPACITOR	1.0UF K	
C16	CK73HB1E104K	C CAPACITOR	0.10UF K	
C17	CK73HB1E104K	C CAPACITOR	0.10UF K	
C18	CC73HCH1H180J	C CAPACITOR	18PF J	
C19	CC73HCH1H180J	C CAPACITOR	18PF J	
C20	CK73HB1A105K	C CAPACITOR	1.0UF K	
C21	CK73HB1A105K	C CAPACITOR	1.0UF K	
C22	CK73HB1E104K	C CAPACITOR	0.10UF K	
C23	CK73HBB1H102K	C CAPACITOR	1000PF K	
C24	CK73HB1E104K	C CAPACITOR	0.10UF K	
C25	CK73HBB1H102K	C CAPACITOR	1000PF K	
C26	CK73HBB1H102K	C CAPACITOR	1000PF K	
C27	CK73HBB1H102K	C CAPACITOR	1000PF K	
C28	CK73HB1E104K	C CAPACITOR	0.10UF K	
C29	CK73HB1E104K	C CAPACITOR	0.10UF K	
C30	CK73HB1E104K	C CAPACITOR	0.10UF K	
C31	CK73HB1A105K	C CAPACITOR	1.0UF K	
C32	CK73HB1E104K	C CAPACITOR	0.10UF K	
C33	CK73HB1E104K	C CAPACITOR	0.10UF K	
C34	CK73HB1E104K	C CAPACITOR	0.10UF K	
C35	CK73HB1E104K	C CAPACITOR	0.10UF K	
C36	CC73HCH1H220J	C CAPACITOR	22PF J	
C37	CC73HCH1H220J	C CAPACITOR	22PF J	
C38	CC73HCH1H2R5B	C CAPACITOR	2.5PF B	
C39	CK73HB1E104K	C CAPACITOR	0.10UF K	
C40	CC73HCH1H180J	C CAPACITOR	18PF J	
C44	CK73HB1E104K	C CAPACITOR	0.10UF K	
C45	CK73HB1E104K	C CAPACITOR	0.10UF K	
C46	CK73HB1E104K	C CAPACITOR	0.10UF K	
C47	CK73HB1E104K	C CAPACITOR	0.10UF K	
C48	CK73HB1E104K	C CAPACITOR	0.10UF K	
C49	CK73HB1E104K	C CAPACITOR	0.10UF K	
C50	CC73HCH1H470J	C CAPACITOR	47PF J	
C68	CC73HCH1H010B	C CAPACITOR	1.0PF B	

△ Symbol No.	Part No.	Part Name	Description	Local
R1	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R2	RK73HB1J103J	MG RESISTOR	10K J 1/16W	
R3	RK73HB1J103J	MG RESISTOR	10K J 1/16W	
R4	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R7	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
R8	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R9	RK73HB1J104J	MG RESISTOR	100K J 1/16W	
R10	RK73HB1J104J	MG RESISTOR	100K J 1/16W	
R11	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R12	RK73HB1J473J	MG RESISTOR	47K J 1/16W	
R13	RK73HB1J473J	MG RESISTOR	47K J 1/16W	
R14	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R15	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R16	RK73EB2E100J	MG RESISTOR	10 J 1/4W	
R18	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R19	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
R21	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R22	RK73HB1J103J	MG RESISTOR	10K J 1/16W	
R23	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R24	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R25	RK73HB1J103J	MG RESISTOR	10K J 1/16W	
R26	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R27	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
R29	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
L1	LB73H0AV-002	CHIP FERRITE BEADS		
L2	LB73G0AK-001	CHIP FERRITE BEADS		
L3	LB73G0BJ-002	CHIP FERRITE BEADS		
L4	L92-0487-05	CHIP FERRITE		
L5	L92-0487-05	CHIP FERRITE		
L6	LK73H0AG27NJ	M.CHIP INDUCTOR	27NH	
L7	LK73H0AM10NJ	M.CHIP INDUCTOR	10NH	
L8	L92-0487-05	CHIP FERRITE		
L9	L79-1985-05	FILTER		
L11	L79-1987-05	FILTER		
L13	L92-0487-05	CHIP FERRITE		
L14	L92-0487-05	CHIP FERRITE		
L15	L40-2263-71	SMALL FIXED INDUCTOR	2.2NH	
CN1	E40-6879-05	FLAT CABLE CONNECTOR		
CN5	E0E-0012-00	RF COAXIAL CABLE RECEPTACLE		
CP1	RK74HB1J100J	NET RESISTOR	10 J 1/16W	
CP2	RK74HB1J100J	NET RESISTOR	10 J 1/16W	
E1	F10-3226-05	SHIELDING CASE		
X1	L77-3123-05	TCXO	19.2M	
X2	L77-3121-05	CRYSTAL RESONATOR	32.768K	

SUB (DISPLAY) UNIT

XC3-0020-20(NX-5900_K)

Block No. [0][3]

△ Symbol No.	Part No.	Part Name	Description	Local
IC1	MM3404A50URE	IC		
IC2	BU30TD2WNVX	IC		
IC3	TC7WT125FUF	IC		
IC4	BD11600NUX	IC		
IC6	BH1721FVC	IC		
IC8	BD1754HFN	IC		
IC9	TC7WH126FK	IC		
IC10	TC35894FG	IC		
IC12	TC7SZ08FE	IC		
Q2	SSM6N37FE	FET		
Q3	LTC014EEBFS8	DIGI TRANSISTOR		
Q4	LTC014EEBFS8	DIGI TRANSISTOR		
Q6	LTC014EEBFS8	DIGI TRANSISTOR		
D1	SPC10501A01	VARISTOR		
D2	SPC10501A01	VARISTOR		
D4	B30-2365-05	LED	WHITE	
D5	B30-2365-05	LED	WHITE	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
D6	B30-2365-05	LED	WHITE		R12	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
D7	B30-2365-05	LED	WHITE		R17	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
D9	B30-2365-05	LED	WHITE		R18	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
D10	B30-2365-05	LED	WHITE		R19	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
D11	B30-2365-05	LED	WHITE		R20	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
D12	B30-2365-05	LED	WHITE		R21	RK73HB1J331J	MG RESISTOR	330 J 1/16W	
D14	B30-2365-05	LED	WHITE		R22	RK73HB1J331J	MG RESISTOR	330 J 1/16W	
D15	B30-2365-05	LED	WHITE		R23	RK73HB1J331J	MG RESISTOR	330 J 1/16W	
D16	B30-2365-05	LED	WHITE		R24	RK73HB1J331J	MG RESISTOR	330 J 1/16W	
D20	DZ2J062(M)	ZENER DIODE			R25	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
D21	B30-2364-05	LED	RGB		R26	RK73HB1J222J	MG RESISTOR	2.2K J 1/16W	
D22	RB521CM-30	DIODE			R27	RK73HB1J331J	MG RESISTOR	330 J 1/16W	
D23	SPC10501A01	VARISTOR			R28	RK73HB1J331J	MG RESISTOR	330 J 1/16W	
D24	SPC10501A01	VARISTOR			R29	RK73HB1J331J	MG RESISTOR	330 J 1/16W	
D25	MINISMDC020F	VARISTOR			R30	RK73HB1J331J	MG RESISTOR	330 J 1/16W	
D26	SPC10501A01	VARISTOR			R31	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
D27	SPC10501A01	VARISTOR			R32	RK73HB1J331J	MG RESISTOR	330 J 1/16W	
D28	DZ2S068M	ZENER DIODE			R33	RK73HB1J331J	MG RESISTOR	330 J 1/16W	
D29	DZ2S068M	ZENER DIODE			R34	RK73HB1J331J	MG RESISTOR	330 J 1/16W	
D30	DZ2S068M	ZENER DIODE			R38	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
D31	EMZ6.8N	ZENER DIODE			R39	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
D32	DZ2S068M	ZENER DIODE			R40	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
					R41	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
C2	CC73GCH1H101J	C CAPACITOR	100PF J		R42	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
C5	CK73GXR1H104K	C CAPACITOR	0.1UF K		R43	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
C8	C93-1810-05	C CAPACITOR	4.7UF K		R46	RK73HB1J681J	MG RESISTOR	680 J 1/16W	
C9	CC73GCH1H101J	C CAPACITOR	100PF J		R47	RK73HB1J103J	MG RESISTOR	10K J 1/16W	
C11	CK73GXR1H104K	C CAPACITOR	0.1UF K		R48	RK73GB2A151J	MG RESISTOR	150 J 1/10W	
C16	CC73GCH1H101J	C CAPACITOR	100PF J		R49	RK73HB1J222J	MG RESISTOR	2.2K J 1/16W	
C18	CK73GXR1H104K	C CAPACITOR	0.1UF K		R50	RK73HB1J222J	MG RESISTOR	2.2K J 1/16W	
C22	CC73GCH1H101J	C CAPACITOR	100PF J		R51	RK73HB1J222J	MG RESISTOR	2.2K J 1/16W	
C24	CK73GXR1H104K	C CAPACITOR	0.1UF K		R52	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
C29	CC73GCH1H101J	C CAPACITOR	100PF J		R53	RK73HB1J103J	MG RESISTOR	10K J 1/16W	
C32	CC73GCH1H101J	C CAPACITOR	100PF J		R54	RK73HB1J473J	MG RESISTOR	47K J 1/16W	
C42	CC73GCH1H470J	C CAPACITOR	47PF J		R55	RK73HB1J473J	MG RESISTOR	47K J 1/16W	
C43	CC73GCH1H470J	C CAPACITOR	47PF J		R60	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
C44	CC73HCH1H101J	C CAPACITOR	100PF J		R61	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
C45	CK73GBB1H102K	C CAPACITOR	1000PF K		R62	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
C46	CK73GBB1H102K	C CAPACITOR	1000PF K		R63	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
C48	CK73GBB1H102K	C CAPACITOR	1000PF K		R64	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
C50	CK73GBB1H102K	C CAPACITOR	1000PF K		R65	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
C52	CC73HCH1H101J	C CAPACITOR	100PF J		R66	RK73HB1J101J	MG RESISTOR	100 J 1/16W	
C53	CC73HCH1H101J	C CAPACITOR	100PF J		R69	RK73HH1J274D	MG RESISTOR	270K D 1/16W	
C54	CK73GB1E105K	C CAPACITOR	1.0UF K		R71	RK73GB2A000J	MG RESISTOR	0.0 J 1/10W	
C55	CC73HCH1H101J	C CAPACITOR	100PF J		R77	RK73HB1J222J	MG RESISTOR	2.2K J 1/16W	
C56	CC73HCH1H101J	C CAPACITOR	100PF J		R78	RK73HB1J222J	MG RESISTOR	2.2K J 1/16W	
C57	CK73GB1E105K	C CAPACITOR	1.0UF K		R79	RK73HB1J222J	MG RESISTOR	2.2K J 1/16W	
C58	CK73GB1E105K	C CAPACITOR	1.0UF K		R81	RK73HB1J103J	MG RESISTOR	10K J 1/16W	
C59	CK73GB1E105K	C CAPACITOR	1.0UF K		R82	RK73HB1J222J	MG RESISTOR	2.2K J 1/16W	
C62	CK73HB1E104K	C CAPACITOR	0.10UF K		R83	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W	
C63	CK73GB1E105K	C CAPACITOR	1.0UF K		R86	RK73GB2A000J	MG RESISTOR	0.0 J 1/10W	
C64	CK73HB1E104K	C CAPACITOR	0.10UF K		R87	RK73HB1J222J	MG RESISTOR	2.2K J 1/16W	
C65	CK73HBB1E103K	C CAPACITOR	0.10UF K		R88	RK73HB1J102J	MG RESISTOR	1.0K J 1/16W	
C66	CK73HB1E104K	C CAPACITOR	0.10UF K		R98	RK73HB1J222J	MG RESISTOR	2.2K J 1/16W	
C67	CK73HB1E104K	C CAPACITOR	0.10UF K		R99	RK73HB1J222J	MG RESISTOR	2.2K J 1/16W	
C68	CK73HB1E104K	C CAPACITOR	0.10UF K						
C69	CK73HB1E104K	C CAPACITOR	0.10UF K		L1	LB73G0AM-004	CHIP FERRITE BEADS		
C70	CK73GBB1H102K	C CAPACITOR	1000PF K		L2	LB73G0AM-004	CHIP FERRITE BEADS		
C71	CK73GXR1H104K	C CAPACITOR	0.1UF K		L3	LB73H0AV-003	CHIP FERRITE BEADS		
C73	CK73HB1E104K	C CAPACITOR	0.10UF K		L4	LB73H0AV-003	CHIP FERRITE BEADS		
C74	CK73GB1E105K	C CAPACITOR	1.0UF K		L5	LB73G0AM-004	CHIP FERRITE BEADS		
C75	CK73HB1E104K	C CAPACITOR	0.10UF K		L11	LB73H0AV-003	CHIP FERRITE BEADS		
C76	CK73GBB1H102K	C CAPACITOR	1000PF K		L14	LB73H0AV-003	CHIP FERRITE BEADS		
C79	CK73GBB1H102K	C CAPACITOR	1000PF K		L15	LB73G0AM-004	CHIP FERRITE BEADS		
C83	CK73HB1E104K	C CAPACITOR	0.10UF K		L16	LB73H0AV-003	CHIP FERRITE BEADS		
C84	CK73HB1E104K	C CAPACITOR	0.10UF K		L17	LB73H0AV-003	CHIP FERRITE BEADS		
C87	CC73HCH1H101J	C CAPACITOR	100PF J		L18	LB73H0AV-003	CHIP FERRITE BEADS		
C90	CK73GBB1H102K	C CAPACITOR	1000PF K						
C101	CK73GBB1H102K	C CAPACITOR	1000PF K		CN2	E41-2673-05	PIN ASSY		
					CN4	E40-6965-05	FLAT CABLE CONNECTOR		
R3	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W		CN5	E41-2671-05	PIN ASSY		
R4	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W		CN6	E40-6913-05	FLAT CABLE CONNECTOR		
R5	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W		J1	E58-0535-05	MODULAR JACK		
R6	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W		S1	S70-0901-05	TACT SWITCH		
R7	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W		S2	S70-0901-05	TACT SWITCH		
R9	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W		S3	S70-0901-05	TACT SWITCH		
R10	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W		S4	S70-0901-05	TACT SWITCH		
R11	RK73HB1J000J	MG RESISTOR	0.0 J 1/16W		S5	S70-0901-05	TACT SWITCH		

△ Symbol No.	Part No.	Part Name	Description	Local
S6	S70-0901-05	TACT SWITCH		
S7	S70-0901-05	TACT SWITCH		
S8	S70-0901-05	TACT SWITCH		
S9	S70-0901-05	TACT SWITCH		
S10	S70-0901-05	TACT SWITCH		
S11	S70-0901-05	TACT SWITCH		
S12	S70-0901-05	TACT SWITCH		