


EXPLODED VIEW : PARTS LIST


Escutcheon section

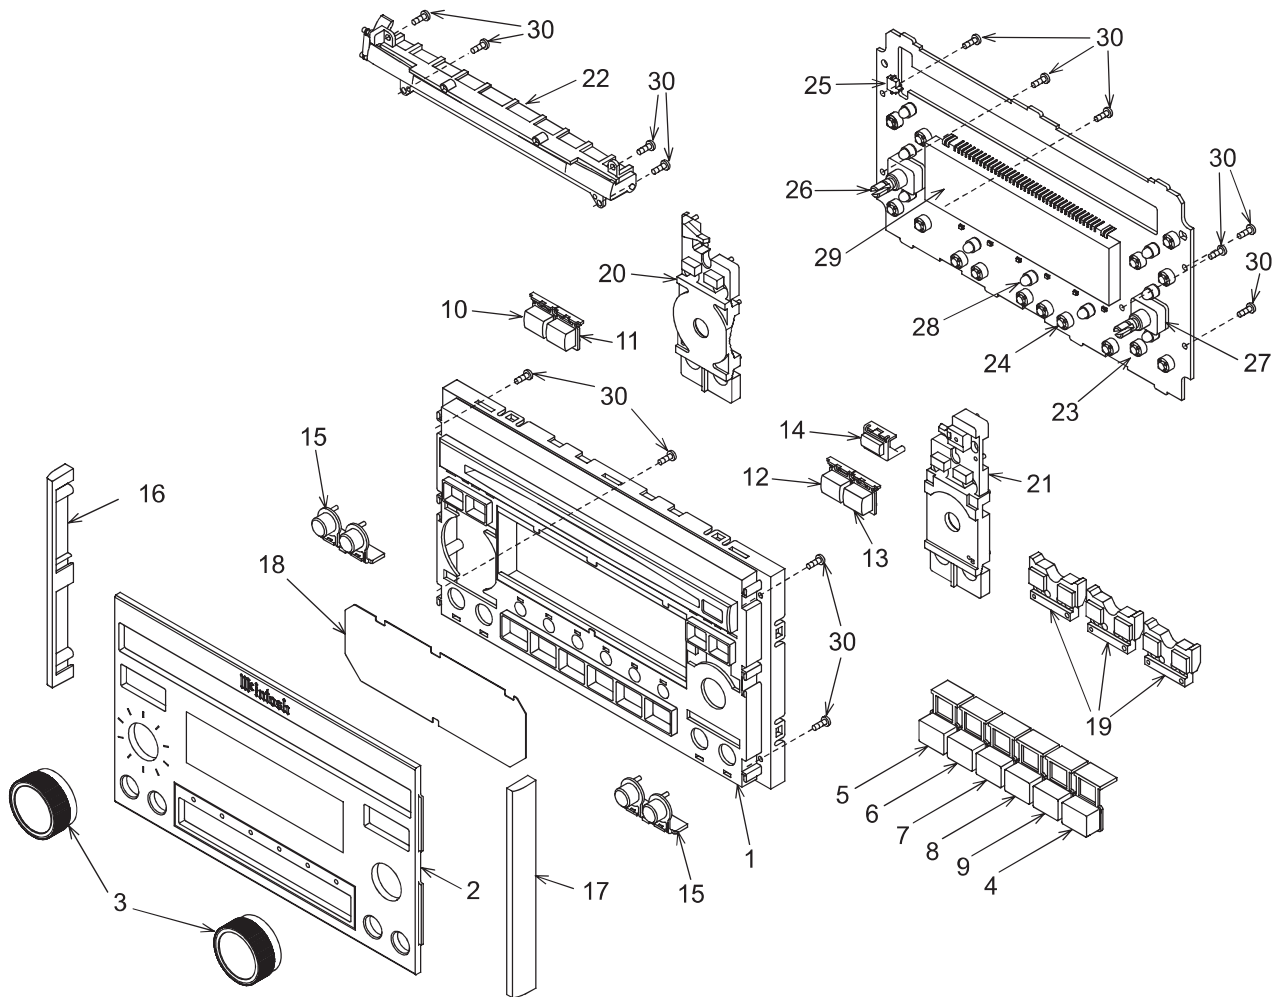

NO.	PART NO.	DESCRIPTION	Q'TY
1	370-9618-00	ESCUTCHEON	1
2	372-3220-00	DIAL PLATE	1
3	380-5547-00	KNOB	2
4	382-4925-10	BUTTON(6)	1
5	382-4930-10	BUTTON(1)	1
6	382-4931-10	BUTTON(2)	1
7	382-4932-10	BUTTON(3)	1
8	382-4933-10	BUTTON(4)	1
9	382-4934-10	BUTTON(5)	1
10	382-6551-00	BUTTON(FM/AM)	1
11	382-6552-00	BUTTON(WB)	1
12	382-6553-00	BUTTON(DISC)	1
13	382-6554-00	BUTTON(LOAD)	1
14	382-6555-00	BUTTON(EJECT)	1
15	382-6556-00	BUTTON	2
16	383-0686-00	SIDE TRIM	1

NO.	PART NO.	DESCRIPTION	Q'TY
17	383-0686-10	SIDE TRIM	1
18	335-6873-00	VFD COVER	1
19	335-5612-00	ILLUMI C	3
20	335-6809-00	ILLUMI PLATE	1
21	335-6810-00	ILLUMI PLATE	1
22	947-0527-10	DOOR ASSY	1
23	039-2194-00	SW PWB (WITHOUT COMPONENT)	1
24	013-6005-50	SWITCH	15
25	013-7415-20	DETECTOR SW	1
26	016-0025-00	VR W/SHAFT	1
27	016-9900-86	VR W/SHAFT	1
28	017-0420-09	PILOT LAMP	9
29	379-4044-24	INDICATOR	1
30	716-0778-00	WAVE SCREW (M2 x 6)	14


Main section

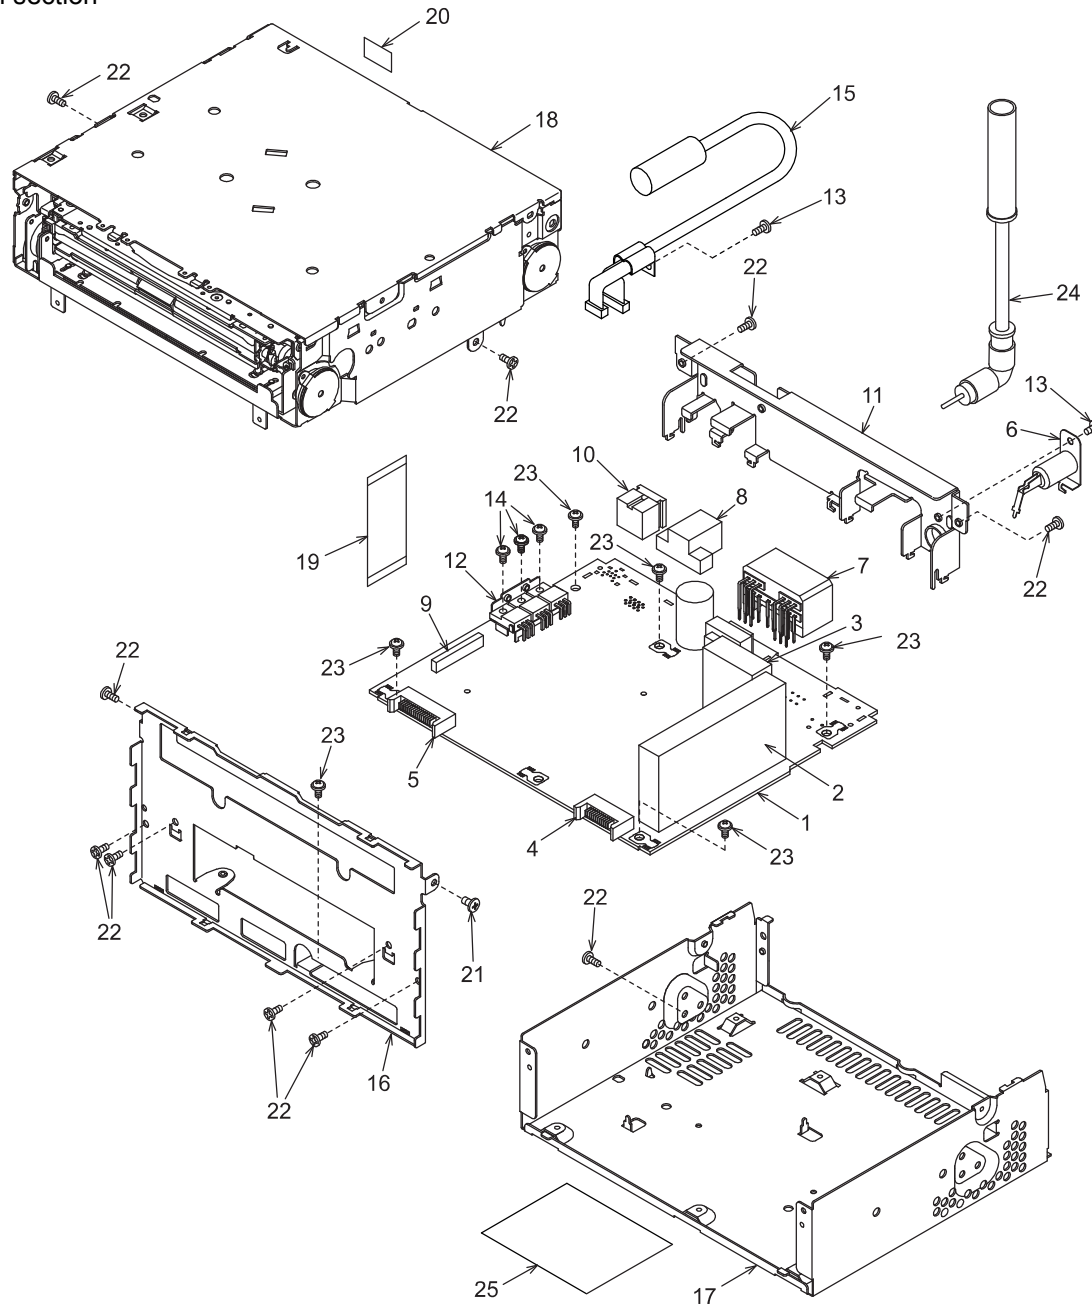

NO.	PART NO.	DESCRIPTION	Q'TY
1	039-2193-00	MAIN PWB (WITHOUT COMPONENT)	1
2	941-0210-10	AM/FM TUNER	1
3	941-0212-00	WB TUNER	1
4	076-0540-12	PLUG (12P)	1
5	076-0540-16	PLUG (16P)	1
6	092-0702-00	ANT-RECEPT	1
7	074-1010-10	OUTLET SOCKET (14P)	1
8	074-1129-08	OUTLET SOCKET (8P)	1
9	074-1192-22	OUTLET SOCKET (22P)	1
10	074-1194-00	OUTLET SOCKET (Ce-NET)	1
11	307-0689-00	REAR PLATE	1
12	331-3491-00	TR-HOLDER	1
13	714-2605-81	MACHINE SCREW (M2.6 x 5)	2

NO.	PART NO.	DESCRIPTION	Q'TY
14	716-0878-00	IT-SCREW (M2.6 x 5)	3
15	855-3473-00	MULTI-POLE CORD	1
16	309-0787-00	ES PLATE	1
17	311-1861-10	LOWER CASE	1
18	-----	CD CHANGER MECHANISM (281910)	1
19	816-2603-00	FLAT WIRE	1
20	290-5010-79	LABEL	1
21	714-2003-89	MACHINE SCREW (M2 x 3)	1
22	714-2605-81	MACHINE SCREW (M2.6 x 5)	10
23	716-0878-00	IT-SCREW (M2.6 x 5)	6
24	093-0785-08	ANT-JUMPER	1
25	286-7201-40	SETPLATE	1


CD changer mechanism section : Main chassis

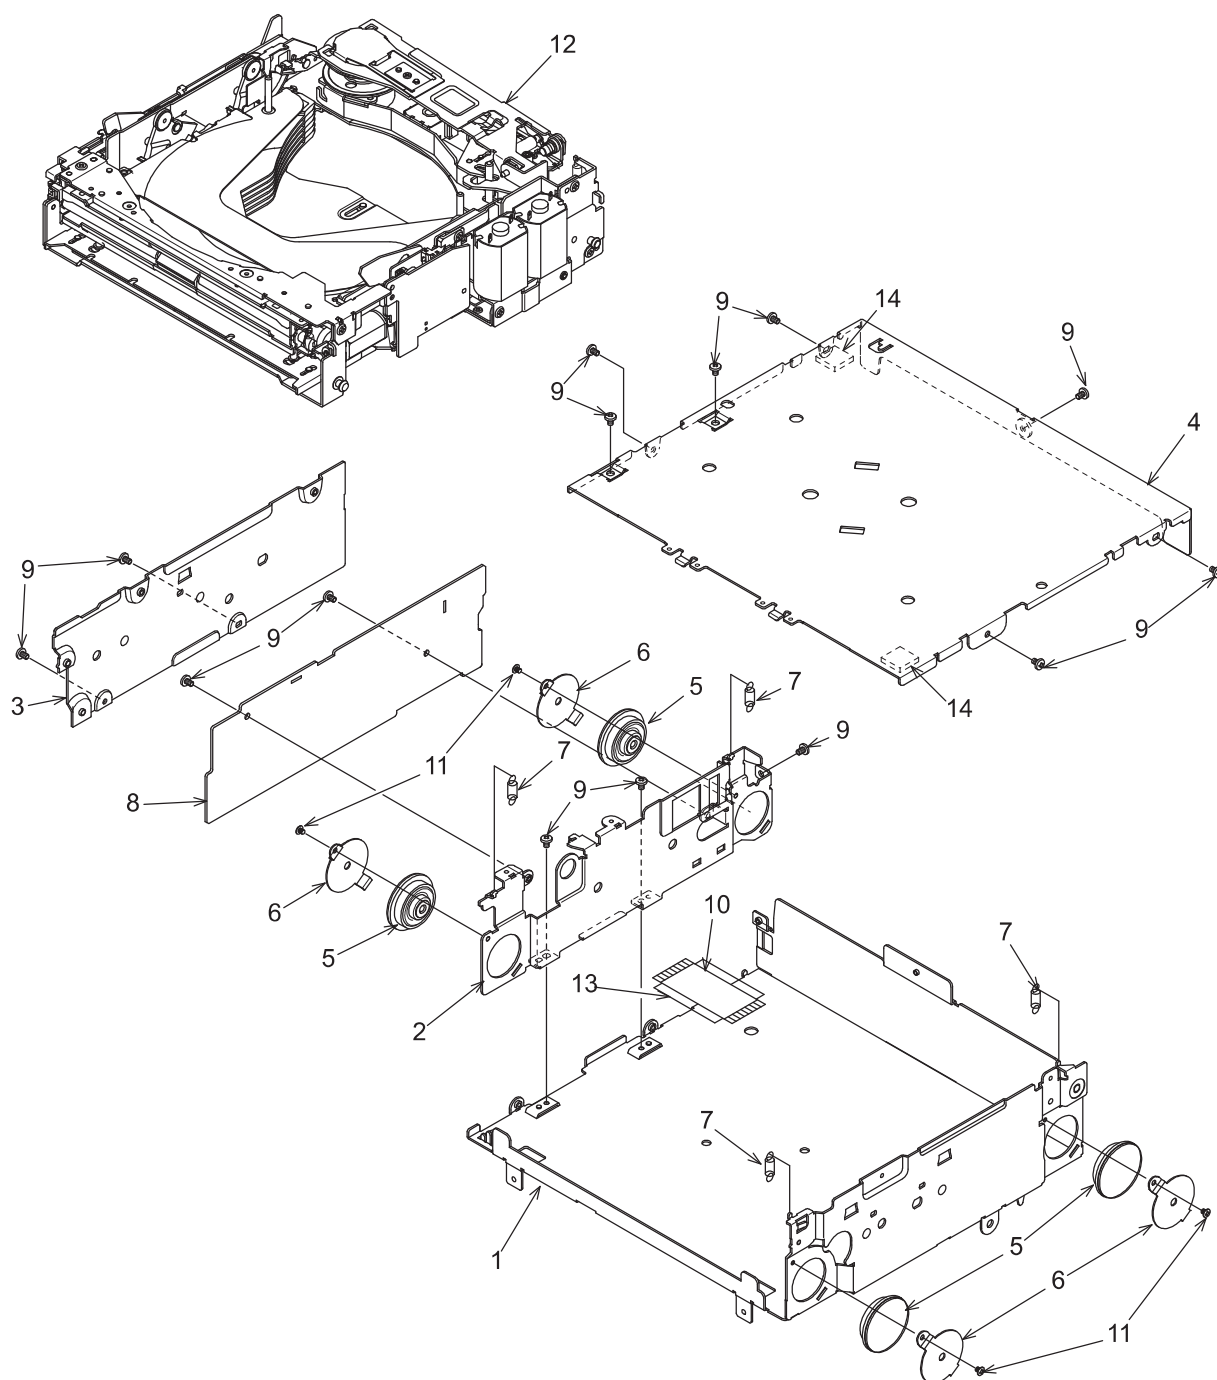


NO.	PART NO.	DESCRIPTION	Q'TY
1	311-1864-81	LOWER CASE	1
2	331-3266-21	PWB-HOLDER	1
3	305-0315-86	SIDE CASE	1
4	310-1741-83	UPPER CASE	1
5	629-0083-00	DAMPER	4
6	620-1086-20	DAMPER-H-PLT	4
7	750-3491-00	FL-SPRING	1
8	039-2219-00	MAIN PWB (WITHOUT COMPONENT)	1

NO.	PART NO.	DESCRIPTION	Q'TY
9	716-1716-00	SCREW (M2 x 3)	14
10	039-1957-01	FPC (WITHOUT COMPONENT)	1
11	716-3450-00	SCREW (M1.7 x 2)	4
12	-----	CD CHANGER MODULE	1
13	347-6619-00	INSULATOR	1
14	345-8329-00	CUSHION RUBBER	2

CD changer mechanism section : Main module 1/2

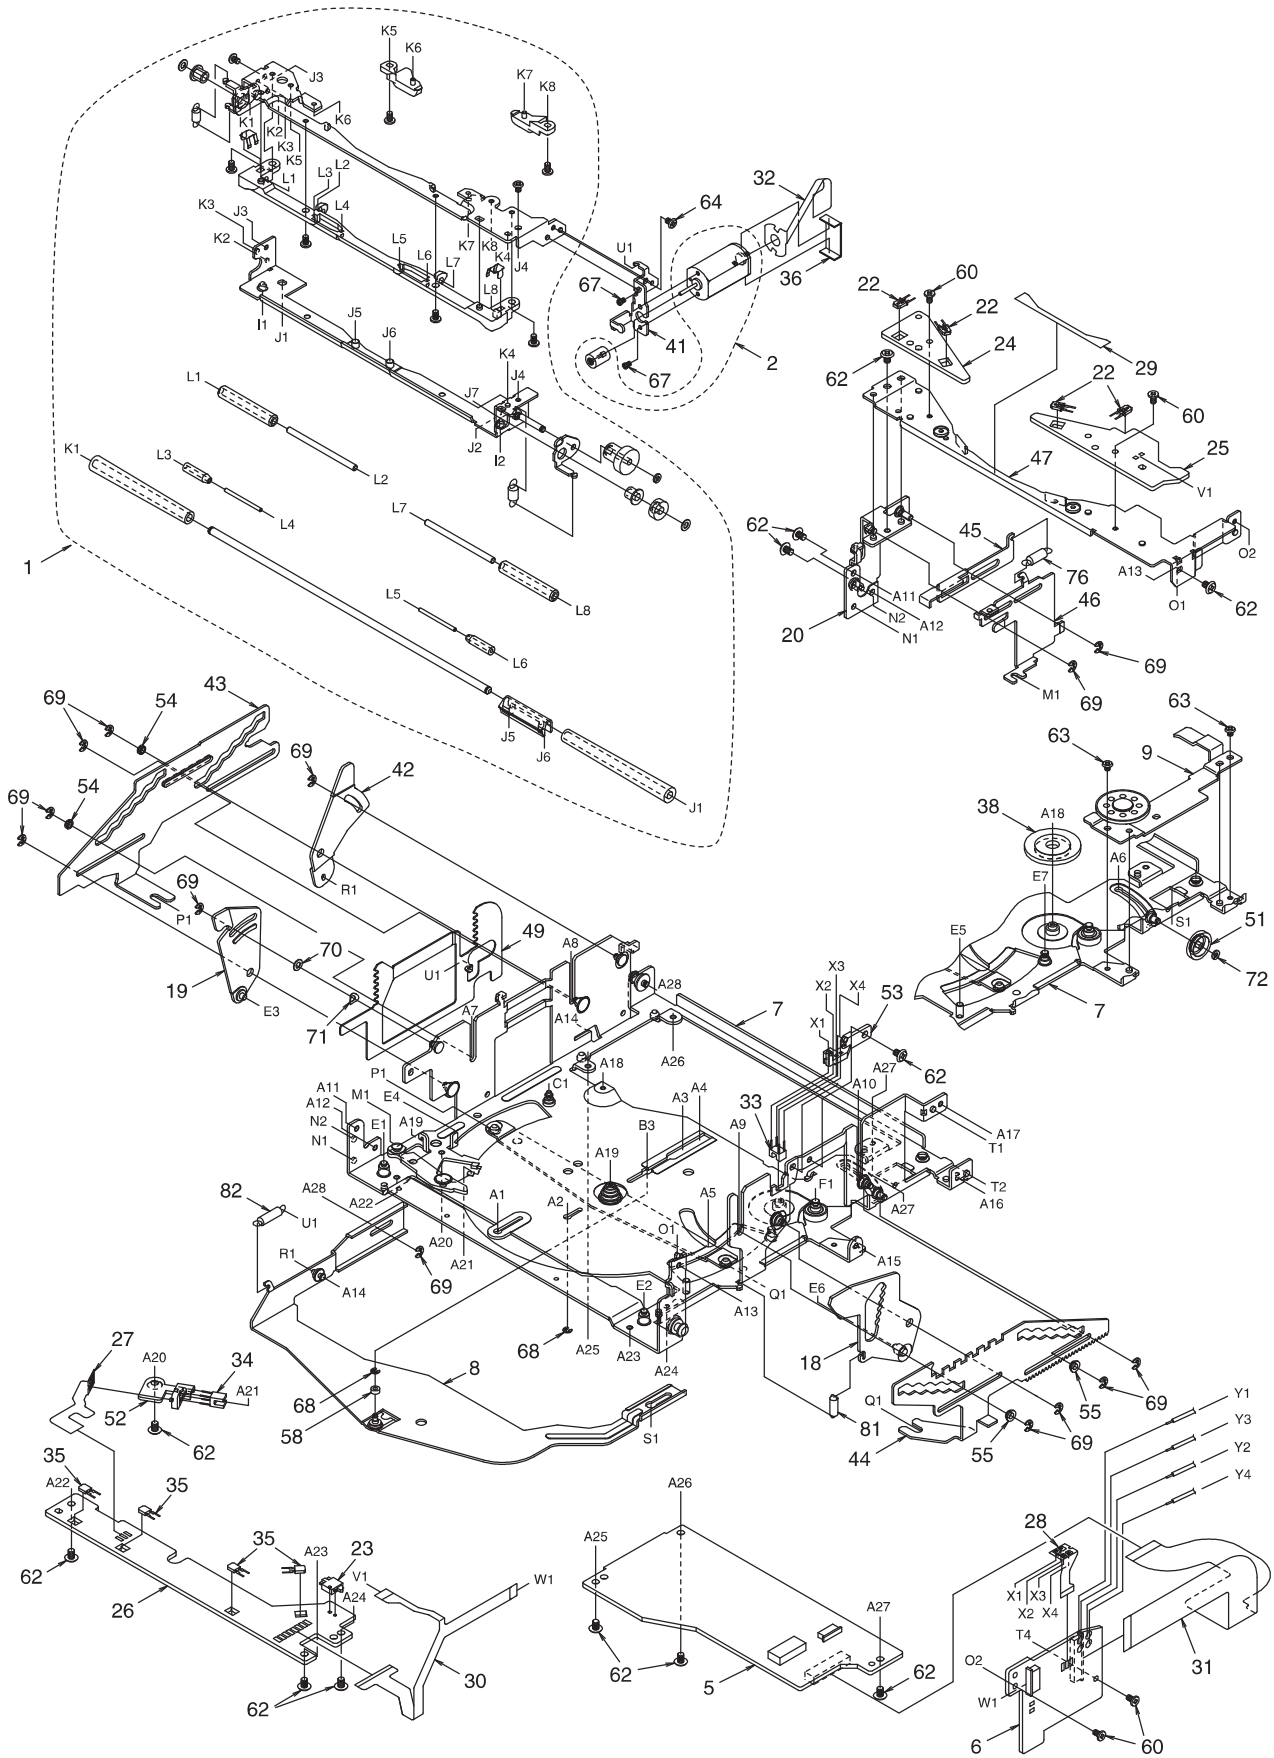


CD changer mechanism section : Main module 2/2

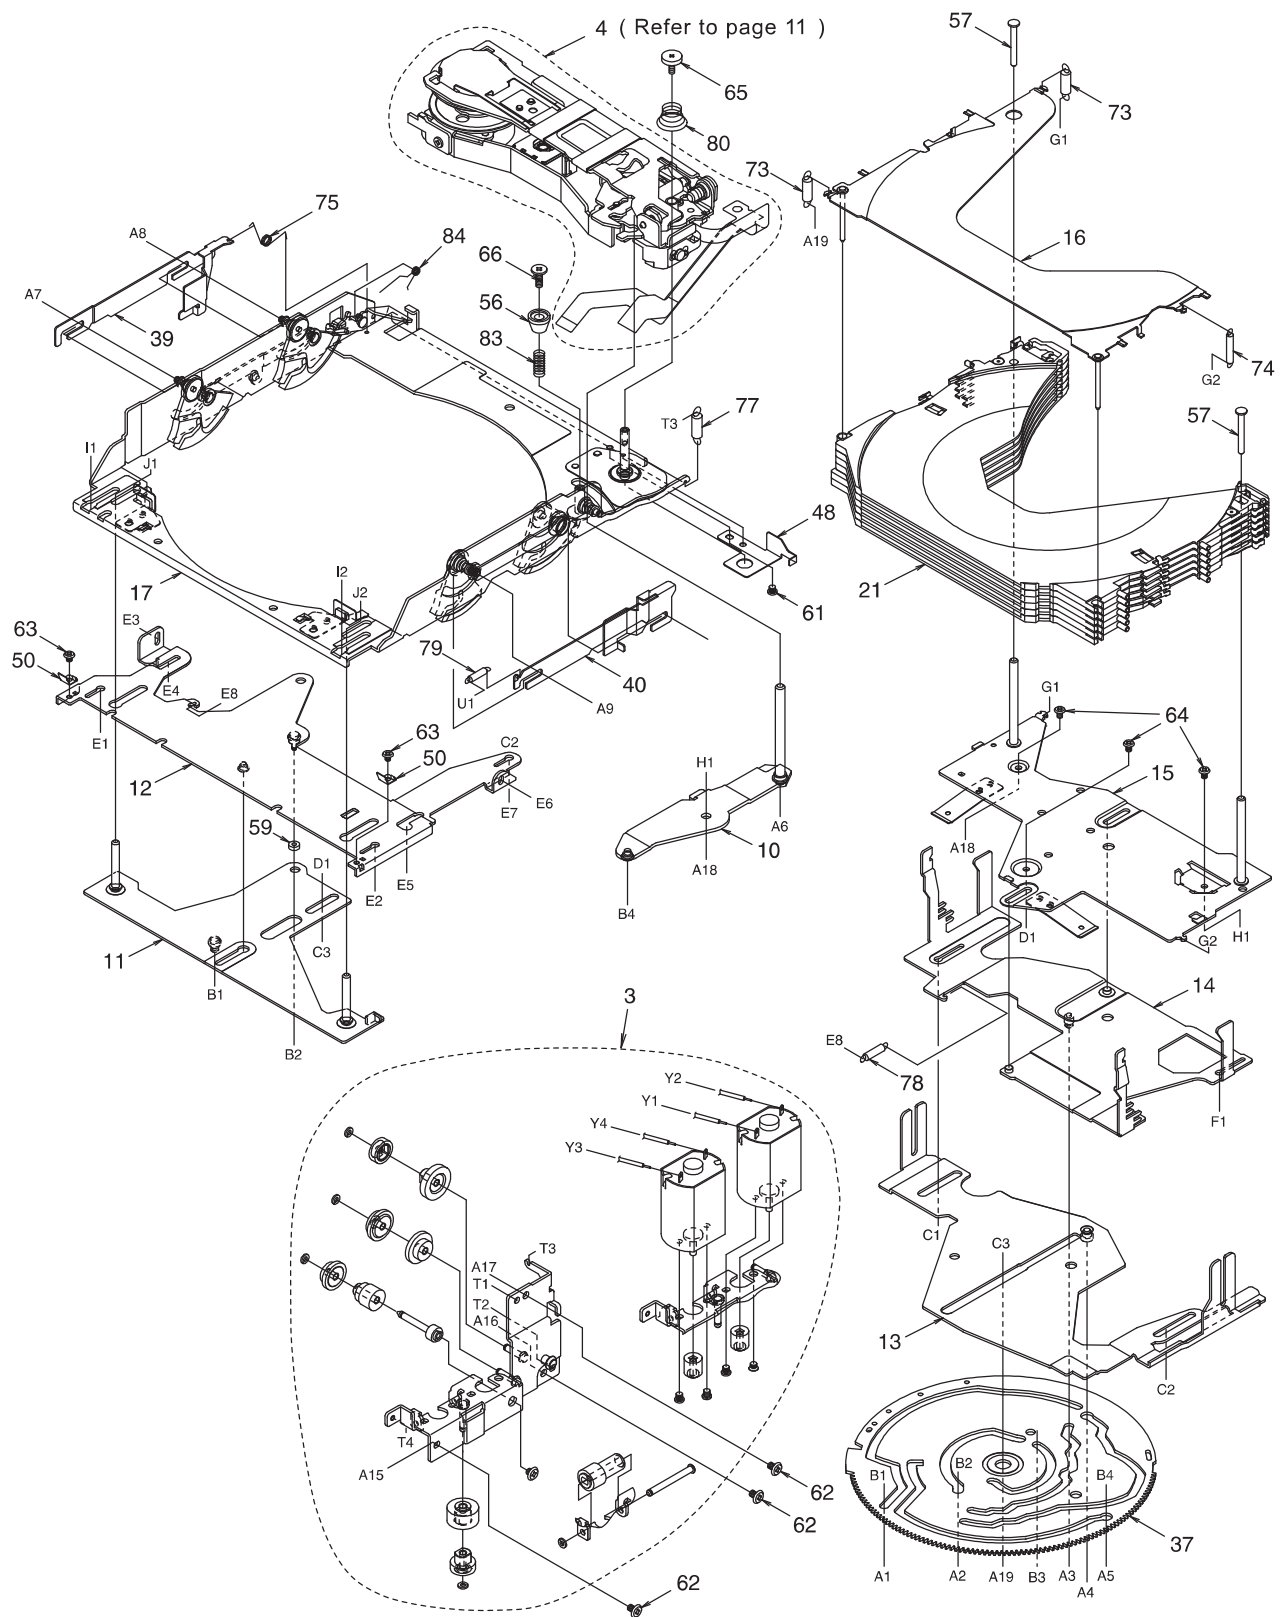

NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-511-100	LOADING UNIT (WITHOUT MOTOR)	1
2	SMA-186-100	LOADING MOTOR ASSY	1
3	HBS-512-100	MOTOR PLATE SUB ASSY	1
4	HBS-513-100	DRIVE UNIT	1
5	039-1951-00	CD PWB (WITHOUT COMPONENT)	1
6	039-1953-00	DRIVER PWB (WITHOUT COMPONENT)	1
7	966-0597-02	CHASSIS ASSY	1
8	966-0600-01	LOCK-P-RE-ASSY	1
9	966-0601-00	M-GEAR-P-ASSY	1
10	966-0602-02	DR-LINK-ASSY	1
11	966-0603-00	MODE-P-ASSY	1
12	966-0604-02	LOCK-PF-ASSY	1
13	966-0605-00	SHIFT-P-ASSY	1
14	966-0606-02	HLC-PLATE-ASSY	1
15	966-0607-03	COV-OLATE-ASSY	1
16	966-0610-03	TOP-PLATE-ASSY	1
17	966-0611-84	DR-BASE-P-ASSY	1
18	966-0615-81	LOCK-L-RF-ASSY	1
19	966-0616-20	LOCK-L-LF-ASSY	1
20	966-0618-21	EJECT-B-ASSY	1
21	966-0624-03	DISC-HOL-ASSY	1
22	001-7042-00	DIODE (GL4800)	4
23	013-7414-50	DETECTOR SWITCH	1
24	039-1954-00	LED-L-PWB (WITHOUT COMPONENT)	1
25	039-1955-00	LED-R-PWB (WITHOUT COMPONENT)	1
26	039-1956-00	SENSOR PWB (WITHOUT COMPONENT)	1
27	039-2009-00	PIM FPC	1
28	039-2010-00	RIV-FOC	1
29	039-2011-00	LED-FPC	1
30	039-2012-00	SENSOR-FPC	1
31	039-2013-00	MOS-FPC	1
32	039-2014-00	L-MOTOR-FPC (WITHOUT COMPONENT)	1
33	051-5806-01	IC (GPIS93)	1
34	051-5806-02	IC (GPIS95)	1
35	060-0252-01	PHOTO-TR	4
36	347-6657-01	LO-COVER SHEET	1
37	620-1041-02	GEAR PLATE	1
38	620-1042-00	M-GEAR-H	1
39	620-1056-21	HLR-PLATE-L	1
40	620-1057-21	HLR-PLATE-R	1
41	620-1063-00	LO-MOTOR-PLT	1

NO.	PART NO.	DESCRIPTION	Q'TY
42	620-1066-20	LOCK LINK-LR	1
43	620-1067-81	SLIDE PLATE-L	1
44	620-1068-22	SLIDE PLATE-R	1
45	620-1071-20	EJECT ARM	1
46	620-1072-20	EJECT PLATE	1
47	620-1073-00	FRONT PLATE	1
48	620-1083-20	FPC-PLATE	1
49	620-1090-00	GAP PLATE	1
50	620-1568-00	RATTLE PLATE-F	2
51	621-0640-00	V-GEAR-G	1
52	621-0641-01	PI-HOLDER-M	1
53	621-0656-21	PI-HOLDER-V	1
54	622-1622-00	SL-G-ROLLER	2
55	622-1623-00	SL-G-ROLLER-R	2
56	622-1648-02	DU-STP-SLEEVE	1
57	622-1650-02	COV-PLATE PIN-B	2
58	622-1651-00	LOCK-RE-ROLLER	1
59	622-1652-00	LOCK-PF-ROLLER	1
60	716-1866-00	SCREW (M1.7 x 3)	4
61	716-1873-00	SCREW (M2 x 1.6)	1
62	716-3449-00	SCREW (M2 x 3)	15
63	716-3450-00	SCREW (M1.7 x 2)	4
64	716-3451-00	SCREW (M1.7 x 2.5)	4
65	716-3459-00	SCREW (M1.7 x 5)	1
66	716-3466-02	SCREW	1
67	738-1420-17	PRECISION SCREW	2
68	743-1200-20	E-RING	2
69	743-1500-10	E-RING	13
70	746-0624-00	WASHER	1
71	746-0712-03	WASHER	1
72	746-0761-00	WASHER	1
73	750-3478-01	TOP-P-SP-L	2
74	750-3479-01	TOP-P-SP-R	1
75	750-3480-01	DR-LOCK-SP	1
76	750-3483-00	EJECT-A-SPRING	1
77	750-3484-01	DR-BASE-SPRING	1
78	750-3485-01	TENSION-SP-L	1
79	750-3486-01	LO-TENSION-SP	1
80	750-3489-00	DRIVE-P-SPRING	1
81	750-3496-00	GAP-P-SPRING R	1
82	750-3497-00	GAP-P-SPRING L	1
83	750-6711-01	DU-STP-SPRING	1
84	750-6712-01	DR-LOCK-SP-B	1

CD changer mechanism section : Drive unit

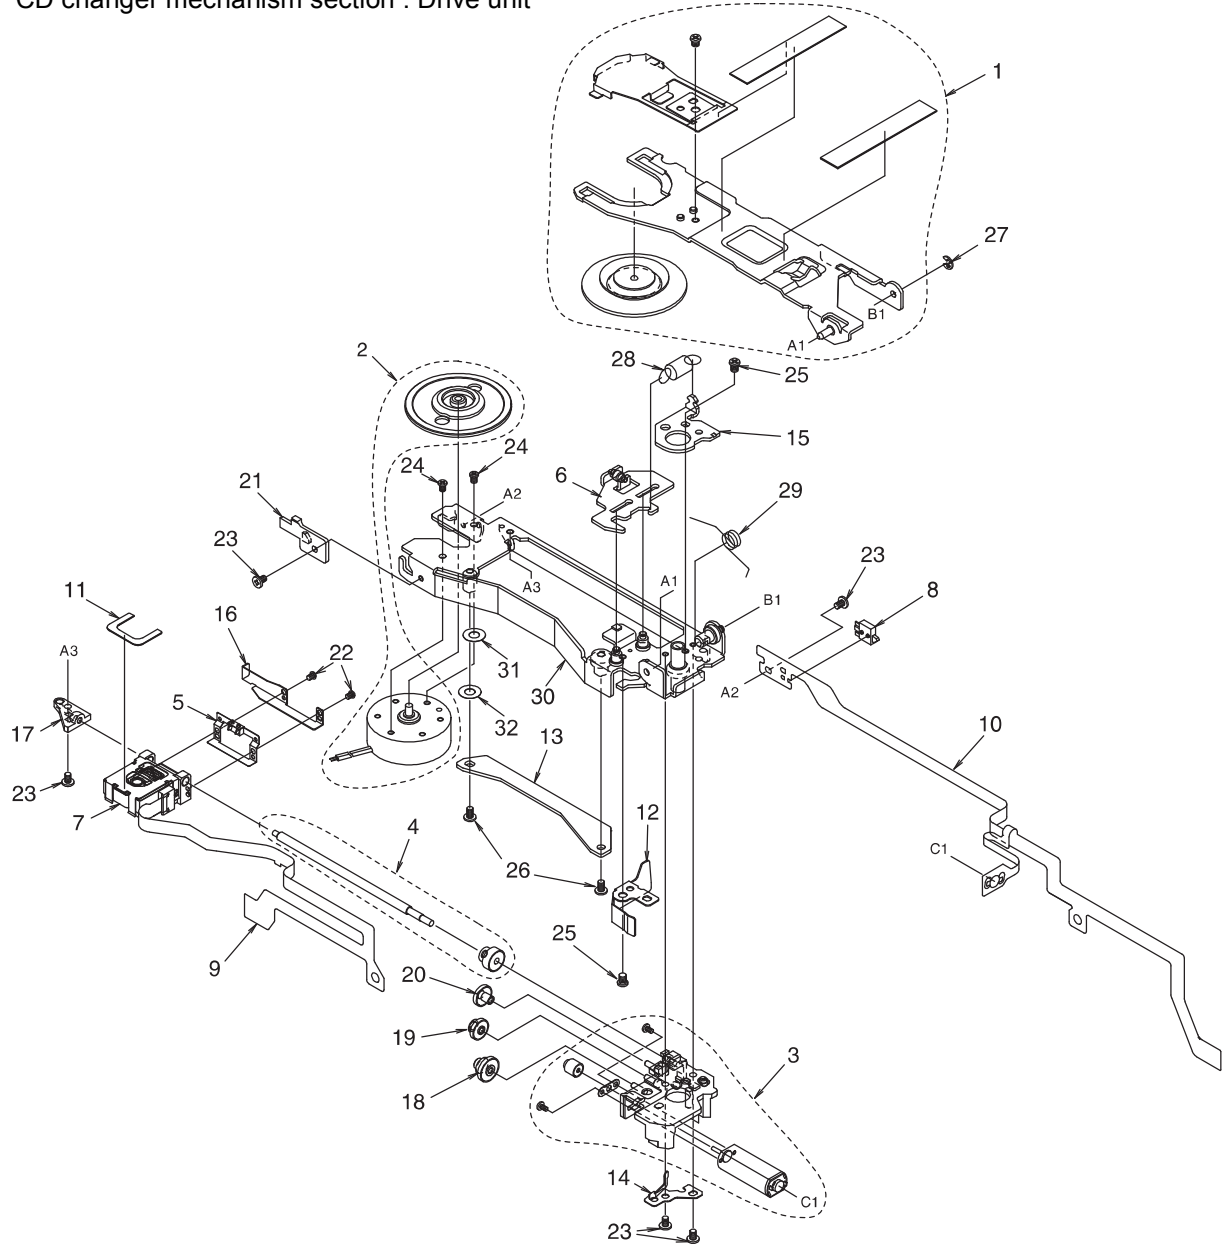

NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-514-100	CLAMPER SUB ASSY	1
2	SMA-185-100	SPINDLE MOTOR ASSY	1
3	SMA-184-100	SLED MOTOR ASSY	1
4	HBS-515-100	LS-ASSY	1
5	966-0621-24	SH-SP-PLT-ASSY	1
6	966-0622-02	D-SHIFT-P-ASSY	1
7	969-0009-00	PICK UP-ASSY	1
8	013-7414-50	DETECT SWITCH	1
9	039-2015-00	P/U-FPC	1
10	039-2016-01	M/S-FPC	1
11	347-6632-00	PU-SHEET	1
12	620-1078-00	PUSH PLATE	1
13	620-1080-01	PU-GUIDE PLATE	1
14	620-1081-00	SCREW PUSH-PLT	1
15	620-1082-01	SPRING PLATE	1
16	620-1084-00	SCREW-HOL-PLT	1

NO.	PART NO.	DESCRIPTION	Q'TY
17	621-0670-20	LS-HOLDER-L	1
18	621-0673-00	D-GEAR A	1
19	621-0674-00	D-GEAR B	1
20	621-0675-00	D-GEAR C	1
21	621-0683-21	DU-STOPPER	1
22	716-3460-00	SCREW (M1.4 x 1.8)	2
23	716-3470-00	SCREW (M1.7 x 3)	5
24	738-1722-17	PRECISION SCREW	2
25	738-2025-17	PRECISION SCREW	2
26	716-3474-00	SCREW (M1.7 x 3)	2
27	743-1500-20	E-RING	1
28	750-3487-00	SHIFT-P-SPRING	1
29	750-3488-00	CLAMP-A-SPRING	1
30	966-0619-05	DRIVE PLT-ASSY	1
31	745-0807-00	WASHER	1
32	745-0808-00	WASHER	1

ELECTRICAL PARTS LIST

Main PWB(B1) section

Note) Several different parts of the same reference number are alternative parts.

One of those parts is used in the set.

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
ANT101	092-0702-00	ANT RECEPT	C403	168-2232-55	0.022uF	C822	183-1063-39	16V10uF
BL101	941-0210-10	AM/FM TUNER	C404	184-4773-39	16V470uF	C824	183-4763-39	16V47uF
BL102	941-0212-00	WB TUNER	C405	043-0328-90	0.1uF	C825	183-4763-19	6.3V47uF
C101	183-3353-69	50V3.3uF	C406	184-4773-39	16V470uF	C827	183-2253-69	50V2.2uF
C102	168-2732-55	16V 0.027uF	C407	043-0328-90	0.1uF	C828	183-2253-69	50V2.2uF
C103	168-2732-55	16V 0.027uF	C408	184-1073-59	35V100uF	C831	183-1053-69	50V1uF
C104	168-2232-55	0.022uF	C409	184-4773-62	50V470uF	C832	183-1053-69	50V1uF
C105	166-5601-50	56pF CH	C410	168-2232-55	0.022uF	C837	168-1042-78	16V 0.1uF
C106	168-1022-55	1000pF	C411	043-0328-90	0.1uF	C838	168-1042-78	16V 0.1uF
C107	168-2232-55	0.022uF	C412	183-4763-39	16V47uF	C839	168-1042-78	16V 0.1uF
C108	168-1032-55	0.01uF	C413	183-1063-69	50V10uF	C840	168-1042-78	16V 0.1uF
C109	168-2232-55	0.022uF	C414	183-1063-39	16V10uF	C841	168-1022-55	1000pF
C110	168-2232-55	0.022uF	C415	183-1063-39	16V10uF	C842	168-1022-55	1000pF
C111	183-4763-39	16V47uF	C416	183-4763-39	16V47uF	C843	168-1022-55	1000pF
C112	168-1042-78	16V 0.1uF	C417	043-0328-90	0.1uF	C844	168-1022-55	1000pF
C113	183-1073-29	10V100uF	C418	043-0328-90	0.1uF	C845	183-1066-38	16V10uF NP
C114	168-1042-78	16V 0.1uF	C419	043-0328-90	0.1uF	C846	183-1066-38	16V10uF NP
C116	183-1073-29	10V100uF	C450	183-1073-29	10V100uF	C847	168-3332-78	0.033uF
C117	183-4763-39	16V47uF	C451	168-1042-78	16V 0.1uF	C851	183-2253-69	50V2.2uF
C118	168-1022-55	1000pF	C452	042-0576-00	5.5V0.1F	C852	183-2253-69	50V2.2uF
C119	168-4712-55	470pF	C453	183-4763-39	16V47uF	C853	168-1032-55	0.01uF
C120	168-4722-55	4700pF	C500	168-1032-55	0.01uF	C854	168-1032-55	0.01uF
C121	042-0458-90	50V1uF	C615	178-2255-79	2.2uF	C855	168-1032-55	0.01uF
C123	168-1022-55	1000pF	C617	178-2255-79	2.2uF	C856	168-1032-55	0.01uF
C125	178-1242-78	0.12uF	C621	178-2255-79	2.2uF	C857	168-1032-55	0.01uF
C126	168-5632-78	16V 0.056uF	C626	178-2255-79	2.2uF	C858	168-1032-55	0.01uF
C127	168-8232-78	0.082uF	C678	183-1073-29	10V100uF	C859	168-1022-55	1000pF
C128	168-4712-55	470pF	C679	168-1042-78	16V 0.1uF	C860	168-1022-55	1000pF
C129	183-4753-59	35V4.7uF	C680	183-4763-19	6.3V47uF	C901	168-1042-78	16V 0.1uF
C130	166-1011-50	100pF CH	C682	183-4763-39	16V47uF	C902	183-1063-39	16V10uF
C131	166-1011-50	100pF CH	C683	168-1042-78	16V 0.1uF	C903	168-4732-78	0.047uF
C132	166-4701-50	47pF CH	C684	183-1063-39	16V10uF	C904	168-4732-78	0.047uF
C133	166-5601-50	56pF CH	C690	168-1042-78	16V 0.1uF	C905	168-1042-78	16V 0.1uF
C134	183-1063-39	16V10uF	C691	183-4763-19	6.3V47uF	C906	183-1063-39	16V10uF
C135	166-1011-50	100pF CH	C692	183-4763-19	6.3V47uF	C907	168-4732-78	0.047uF
C136	166-1011-50	100pF CH	C694	166-2201-50	22pF CH	C908	168-1042-78	16V 0.1uF
C137	178-1542-78	0.15uF	C695	183-1063-39	16V10uF	C909	183-1063-39	16V10uF
C138	168-2232-55	0.022uF	C696	166-2201-50	22pF CH	C910	183-1063-39	16V10uF
C140	183-4763-39	16V47uF	C709	183-4763-39	16V47uF	C911	183-1063-39	16V10uF
C141	166-1801-50	18pF CH	C710	183-1073-29	10V100uF	C912	183-1063-39	16V10uF
C142	166-5601-50	56pF CH	C711	172-1041-15	0.1uF	C913	168-1042-78	16V 0.1uF
C143	168-4732-78	0.047uF	C712	183-1053-69	50V1uF	C914	183-1063-39	16V10uF
C144	183-4753-59	35V4.7uF	C713	042-0586-00	16V4700uF	C915	168-1042-78	16V 0.1uF
C145	168-2232-55	0.022uF	C714	172-1041-15	0.1uF	C916	183-1063-39	16V10uF
C151	166-1801-50	18pF CH	C722	183-1053-69	50V1uF	C917	178-2255-79	2.2uF
C152	168-1032-55	0.01uF	C734	183-1063-39	16V10uF	C918	178-2255-79	2.2uF
C153	183-3363-29	10V33uF	C750	168-2222-55	2200pF	C919	168-1022-55	1000pF
C154	042-0398-53	16V3.3uF TAN	C751	168-2222-55	2200pF	C920	168-6812-55	680pF
C155	168-2732-55	16V 0.027uF	C752	166-1811-50	180pF CH	C921	166-1511-50	150pF CH
C156	166-4701-50	47pF CH	C753	166-1811-50	180pF CH	C922	168-1022-55	1000pF
C157	168-1032-55	0.01uF	C754	184-1073-39	16V100uF	C923	168-6812-55	680pF
C159	168-2232-55	0.022uF	C755	184-1073-39	16V100uF	C924	166-1511-50	150pF CH
C160	166-1011-50	100pF CH	C756	184-1073-39	16V100uF	CCT200	050-0122-53	1/16W1k ohm x4 J
C161	166-1011-50	100pF CH	C757	184-1073-39	16V100uF	D101	001-0516-90	MA111
C200	168-1042-78	16V 0.1uF	C760	184-1073-39	16V100uF	D102	001-0466-90	S5688B
C201	183-4763-19	6.3V47uF	C761	184-1073-39	16V100uF	D250	001-0454-91	MA700A
C202	168-1032-55	0.01uF	C762	184-1073-39	16V100uF	D251	001-0454-91	MA700A
C203	168-1032-55	0.01uF	C763	184-1073-39	16V100uF	D252	001-0529-25	MA8047-L
C204	168-1032-55	0.01uF	C766	166-1811-50	180pF CH	D302	001-0529-33	MA8056-H
C250	168-1022-55	1000pF	C767	166-1811-50	180pF CH	D303	001-0347-48	MA4091H
C251	168-1042-78	16V 0.1uF	C768	168-2222-55	2200pF	D400	001-0466-90	S5688B
C252	183-1053-69	50V1uF	C769	168-2222-55	2200pF	D401	001-0466-90	S5688B
C253	168-1022-55	1000pF	C770	166-1811-50	180pF CH	D402	001-0516-90	MA111
C302	183-4763-19	6.3V47uF	C771	166-1811-50	180pF CH	D403	001-0466-90	S5688B
C303	168-1042-78	16V 0.1uF	C772	166-1811-50	180pF CH	D404	001-0504-87	HZS33-3L-TJ
C308	168-1042-78	16V 0.1uF	C773	166-1811-50	180pF CH	D405	001-0529-39	MA8068-H
C309	183-1063-39	16V10uF	C801	168-8232-78	0.082uF	D406	001-0529-48	MA8091-H
C310	183-1073-29	10V100uF	C802	168-8232-78	0.082uF	D407	001-0347-69	MA4180M
C400	043-0328-90	0.1uF	C817	183-1063-39	16V10uF	D450	001-0466-90	S5688B
C401	043-0328-90	0.1uF	C818	183-1063-39	16V10uF	D451	001-0516-90	MA111
C402	184-2273-39	16V220uF	C821	183-1063-39	16V10uF	D452	001-0516-90	MA111

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D453	001-0504-36	HZS7 A1L	Q400	103-1684-00	2SD1684Q,S,T	R209	119-0000-05	1/16W 0 ohm JW
D500	001-0347-69	MA4180M	Q401	190-1048-00	2SA1048	R210	119-1021-15	1/16W 1k ohm
D501	001-0347-69	MA4180M	Q402	190-1428-00	2SA1428	R211	119-0000-05	1/16W 0 ohm JW
D502	001-0347-69	MA4180M	Q403	190-1428-00	2SA1428	R214	119-0000-05	1/16W 0 ohm JW
D601	001-0516-90	MA111	Q404	193-2118-00	2SD2118	R216	119-0000-05	1/16W 0 ohm JW
D602	001-0466-90	S5688B	Q405	103-2012-00	2SD2012	R217	119-1021-15	1/16W 1k ohm
D603	001-0347-48	MA4091H	Q406	193-1858-00	2SD1858	R218	119-1021-15	1/16W 1k ohm
D604	001-2015-00	RL253	Q407	190-1428-00	2SA1428	R219	119-1021-15	1/16W 1k ohm
D606	001-0466-90	S5688B	Q408	192-3668-00	2SC3668	R220	119-0000-05	1/16W 0 ohm JW
D608	001-0466-90	S5688B	Q409	192-3668-00	2SC3668	R222	119-4731-15	1/16W 47k ohm
D752	001-0424-31	MA4180	Q410	192-3668-00	2SC3668	R223	119-4721-15	1/16W 4.7k ohm
D753	001-0424-31	MA4180	Q411	125-2004-92	RN1402	R224	119-4721-15	1/16W 4.7k ohm
D754	001-0424-31	MA4180	Q450	193-2118-50	2SD2118F5	R225	119-4731-15	1/16W 47k ohm
D755	001-0424-31	MA4180	Q451	191-1240-00	2SB1240	R226	119-4731-15	1/16W 47k ohm
D758	001-0424-31	MA4180	Q452	192-2712-00	2SC2712	R227	119-4731-15	1/16W 47k ohm
D759	001-0424-31	MA4180	Q500	192-2712-00	2SC2712	R228	119-4731-15	1/16W 47k ohm
D760	001-0424-31	MA4180	Q604	192-2712-00	2SC2712	R229	119-0000-05	1/16W 0 ohm JW
D761	001-0424-31	MA4180	Q606	193-2118-00	2SD2118	R230	119-0000-05	1/16W 0 ohm JW
D762	001-0466-90	S5688B	Q608	125-0002-92	RN2402	R231	119-1031-15	1/16W 10k ohm
D763	001-0466-90	S5688B	Q609	125-2004-92	RN1402	R233	119-4721-15	1/16W 4.7k ohm
IC102	051-4200-90	TA2051FN	Q611	191-1240-00	2SB1240	R234	119-1031-15	1/16W 10k ohm
IC103	051-6212-08	LC72191JM-TLM	Q613	190-1428-00	2SA1428	R250	119-6831-15	1/16W 68k ohm
IC200	052-3176-10	M30162	Q614	193-1858-00	2SD1858	R251	119-4731-15	1/16W 47k ohm
IC250	051-0869-58	NJM2103M	Q615	192-2712-00	2SC2712	R252	119-4731-15	1/16W 47k ohm
IC300	051-9400-28	BR93LC46F-WE2	Q616	192-2712-00	2SC2712	R253	119-4731-15	1/16W 47k ohm
IC400	051-0172-08	TC4011BF	Q617	192-2712-00	2SC2712	R254	119-4731-15	1/16W 47k ohm
IC501	051-6600-38	CA0008AM	Q750	191-1240-00	2SB1240	R255	119-4731-15	1/16W 47k ohm
IC607	051-3010-90	NJM4580E	Q751	192-2712-00	2SC2712	R256	119-5621-15	1/16W 5.6k ohm
IC608	051-3010-90	NJM4580E	Q901	192-2712-00	2SC2712	R257	119-2231-15	1/16W 22k ohm
IC750	051-3010-90	NJM4580E	R101	119-0000-05	1/16W 0 ohm JW	R258	119-2231-15	1/16W 22k ohm
IC751	051-3010-90	NJM4580E	R102	111-1001-98	1/4W 10 ohm	R259	119-1021-15	1/16W 1k ohm
IC752	051-3010-90	NJM4580E	R103	119-1001-15	1/16W 10 ohm	R260	119-6831-15	1/16W 68k ohm
IC753	051-3010-90	NJM4580E	R104	119-2221-15	1/16W 2.2k ohm	R261	119-3341-15	1/16W 330k ohm
IC801	051-5027-00	LC75412WH	R105	119-0000-05	1/16W 0 ohm JW	R300	119-2231-15	1/16W 22k ohm
IC901	051-6317-08	CS8412CS	R106	119-4721-15	1/16W 4.7k ohm	R301	119-2231-15	1/16W 22k ohm
IC902	051-6322-08	PCM1710U-T2	R107	119-1041-15	1/16W 100k ohm	R302	119-1031-15	1/16W 10k ohm
IC903	051-3010-90	NJM4580E	R108	119-6831-15	1/16W 68k ohm	R303	119-4721-15	1/16W 4.7k ohm
J301	074-1192-22	22P	R109	119-1021-15	1/16W 1k ohm	R304	119-5631-15	1/16W 56k ohm
J500	074-1194-00	13P CE-NET	R110	119-1031-15	1/16W 10k ohm	R305	119-4721-15	1/16W 4.7k ohm
J600	074-1129-08	8P	R111	119-1031-15	1/16W 10k ohm	R306	111-4711-98	1/4W 470 ohm
J601	074-1010-10	14P	R112	119-5631-15	1/16W 56k ohm	R307	111-4711-98	1/4W 470 ohm
L101	010-2003-04	COIL	R113	119-1031-15	1/16W 10k ohm	R308	119-3321-15	1/16W 3.3k ohm
L102	010-2199-54	0.22uH J	R114	119-1031-15	1/16W 10k ohm	R309	119-2231-15	1/16W 22k ohm
L104	010-6009-76	22uH	R115	119-1041-15	1/16W 100k ohm	R310	119-1021-15	1/16W 1k ohm
L106	010-2199-55	0.27uH J	R116	119-2241-15	1/16W 220k ohm	R311	111-2291-98	1/4W 2.2 ohm
L107	010-6004-40	2.2mH J	R117	111-1001-98	1/4W 10 ohm	R313	111-2291-98	1/4W 2.2 ohm
L109	010-6009-76	22uH	R119	119-4721-15	1/16W 4.7k ohm	R318	119-3611-15	1/16W 360 ohm
L250	010-6009-76	22uH	R120	119-1031-15	1/16W 10k ohm	R324	111-1511-81	1/2W 150 ohm
L300	010-6009-76	22uH	R121	119-1211-15	1/16W 120 ohm	R400	119-1031-15	1/16W 10k ohm
L500	010-6009-76	22uH	R122	119-1231-15	1/16W 12k ohm	R401	119-4731-15	1/16W 47k ohm
L901	010-2199-78	22uH J	R123	119-5631-15	1/16W 56k ohm	R402	111-1521-98	1/4W 1.5k ohm
P500	076-0540-12	12P	R124	119-6821-15	1/16W 6.8k ohm	R403	119-1231-15	1/16W 12k ohm
P501	076-0540-16	16P	R125	119-1221-15	1/16W 1.2k ohm	R404	119-2221-15	1/16W 2.2k ohm
Q101	125-2004-92	RN1402	R126	119-3321-15	1/16W 3.3k ohm	R405	119-4711-15	1/16W 470 ohm
Q102	125-2004-92	RN1402	R127	119-1031-15	1/16W 10k ohm	R406	111-2221-98	1/4W 2.2k ohm
Q103	192-2712-51	2SC2712G,L	R128	119-1031-15	1/16W 10k ohm	R407	111-2721-81	1/2W 2.7k ohm
Q104	192-2712-51	2SC2712G,L	R129	119-1011-15	1/16W 100 ohm	R408	111-5621-98	1/4W 5.6k ohm
Q105	191-1240-00	2SB1240	R132	119-2221-15	1/16W 2.2k ohm	R409	119-4731-15	1/16W 47k ohm
Q106	191-1240-00	2SB1240	R133	119-2221-15	1/16W 2.2k ohm	R410	111-1521-98	1/4W 1.5k ohm
Q107	191-1240-00	2SB1240	R134	119-2221-15	1/16W 2.2k ohm	R411	111-1521-98	1/4W 1.5k ohm
Q250	192-2712-00	2SC2712	R135	119-1031-15	1/16W 10k ohm	R412	119-1231-15	1/16W 12k ohm
Q251	192-2712-00	2SC2712	R138	119-1031-15	1/16W 10k ohm	R413	119-5631-15	1/16W 56k ohm
Q300	192-2712-00	2SC2712	R140	119-2221-15	1/16W 2.2k ohm	R414	111-1021-98	1/4W 1k ohm
Q301	125-0002-92	RN2402	R141	119-1011-15	1/16W 100 ohm	R415	111-1211-98	1/4W 120 ohm
Q302	192-2712-00	2SC2712	R146	119-3331-15	1/16W 33k ohm	R417	119-4721-15	1/16W 4.7k ohm
Q303	190-1428-00	2SA1428	R149	119-4731-15	1/16W 47k ohm	R419	111-6801-98	1/4W 68 ohm
Q304	192-2712-00	2SC2712	R150	119-1021-15	1/16W 1k ohm	R420	119-2231-15	1/16W 22k ohm
Q305	193-1858-00	2SD1858	R151	119-1021-15	1/16W 1k ohm	R450	111-1001-98	1/4W 10 ohm
Q306	103-2012-00	2SD2012	R152	119-1021-15	1/16W 1k ohm	R451	119-6821-15	1/16W 6.8k ohm
Q311	103-2012-00	2SD2012	R154	119-1001-15	1/16W 10 ohm	R452	119-1031-15	1/16W 10k ohm
Q313	125-0002-92	RN2402	R200	119-4731-15	1/16W 47k ohm	R453	119-1021-15	1/16W 1k ohm
Q317	125-2004-92	RN1402	R201	119-1021-15	1/16W 1k ohm	R454	119-1021-15	1/16W 1k ohm
Q351	125-0002-92	RN2402	R202	119-1031-15	1/16W 10k ohm	R455	119-1031-15	1/16W 10k ohm
Q352	125-2004-92	RN1402	R206	119-0000-05	1/16W 0 ohm JW	R456	119-2221-15	1/16W 2.2k ohm

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R500	119-4721-15	1/16W 4.7k ohm	R751	119-6821-15	1/16W 6.8k ohm	R810	119-5631-15	1/16W 56k ohm
R501	119-4721-15	1/16W 4.7k ohm	R752	119-3321-15	1/16W 3.3k ohm	R817	119-5631-15	1/16W 56k ohm
R503	119-4721-15	1/16W 4.7k ohm	R753	119-3321-15	1/16W 3.3k ohm	R818	119-5631-15	1/16W 56k ohm
R506	119-2231-15	1/16W 22k ohm	R754	111-1001-98	1/4W 10 ohm	R819	119-1521-15	1/16W 1.5k ohm
R507	119-4721-15	1/16W 4.7k ohm	R755	111-1001-98	1/4W 10 ohm	R820	119-1521-15	1/16W 1.5k ohm
R508	119-4721-15	1/16W 4.7k ohm	R756	111-1001-98	1/4W 10 ohm	R823	119-1051-15	1/16W 1M ohm
R600	119-4731-15	1/16W 47k ohm	R757	111-1001-98	1/4W 10 ohm	R851	119-1021-15	1/16W 1k ohm
R687	119-4731-15	1/16W 47k ohm	R760	111-1001-98	1/4W 10 ohm	R852	119-1021-15	1/16W 1k ohm
R688	119-8211-15	1/16W 820 ohm	R761	119-1021-15	1/16W 1k ohm	R853	119-1021-15	1/16W 1k ohm
R691	119-2231-15	1/16W 22k ohm	R762	119-1021-15	1/16W 1k ohm	R854	119-1021-15	1/16W 1k ohm
R692	119-2231-15	1/16W 22k ohm	R763	111-1001-98	1/4W 10 ohm	R855	119-2221-15	1/16W 2.2k ohm
R693	117-4731-15	1/10W 47k ohm	R764	111-1001-98	1/4W 10 ohm	R856	119-2221-15	1/16W 2.2k ohm
R694	119-1031-15	1/16W 10k ohm	R765	111-1001-98	1/4W 10 ohm	R857	119-4721-15	1/16W 4.7k ohm
R695	119-1021-15	1/16W 1k ohm	R768	119-1021-15	1/16W 1k ohm	R858	119-4721-15	1/16W 4.7k ohm
R696	119-2731-15	1/16W 27k ohm	R769	119-1021-15	1/16W 1k ohm	R901	119-1021-15	1/16W 1k ohm
R697	119-2731-15	1/16W 27k ohm	R770	119-6821-15	1/16W 6.8k ohm	R902	119-1031-15	1/16W 10k ohm
R699	119-4731-15	1/16W 47k ohm	R771	119-6821-15	1/16W 6.8k ohm	R903	119-0000-05	1/16W 0 ohm JW
R703	119-1031-15	1/16W 10k ohm	R772	119-3321-15	1/16W 3.3k ohm	R904	119-1031-15	1/16W 10k ohm
R705	119-4731-15	1/16W 47k ohm	R773	119-3321-15	1/16W 3.3k ohm	R910	119-2221-15	1/16W 2.2k ohm
R708	119-4731-15	1/16W 47k ohm	R774	119-1021-15	1/16W 1k ohm	R911	119-2231-15	1/16W 22k ohm
R710	111-4711-98	1/4W 470 ohm	R775	119-1021-15	1/16W 1k ohm	R912	119-2231-15	1/16W 22k ohm
R711	111-5621-98	1/4W 5.6k ohm	R776	119-1021-15	1/16W 1k ohm	R913	119-1041-15	1/16W 100k ohm
R721	119-1031-15	1/16W 10k ohm	R777	119-1021-15	1/16W 1k ohm	R914	119-1041-15	1/16W 100k ohm
R723	119-1031-15	1/16W 10k ohm	R778	111-4711-81	1/2W 470 ohm	R915	119-2221-15	1/16W 2.2k ohm
R724	111-2221-98	1/4W 2.2k ohm	R779	119-1031-15	1/16W 10k ohm	R916	119-2231-15	1/16W 22k ohm
R725	119-4721-15	1/16W 4.7k ohm	R780	111-2221-98	1/4W 2.2k ohm	R917	119-2231-15	1/16W 22k ohm
R727	111-2221-98	1/4W 2.2k ohm	R783	119-3321-15	1/16W 3.3k ohm	RY101	014-0497-00	FBR22D09-P
R728	111-2221-98	1/4W 2.2k ohm	R784	119-1031-15	1/16W 10k ohm	SUP101	060-0122-91	DSP-141N-S00B
R731	111-2221-98	1/4W 2.2k ohm	R785	119-4731-15	1/16W 47k ohm	T600	009-0673-01	CHOKE
R732	111-2221-98	1/4W 2.2k ohm	R786	119-4731-15	1/16W 47k ohm	TH600	002-0222-90	PTH61G30BD
R733	119-3321-15	1/16W 3.3k ohm	R787	119-4731-15	1/16W 47k ohm	TM101	073-0762-90	TERMINAL
R734	119-1031-15	1/16W 10k ohm	R788	119-4731-15	1/16W 47k ohm	TM102	073-0762-90	TERMINAL
R735	119-3321-15	1/16W 3.3k ohm	R791	119-1021-15	1/16W 1k ohm	TM103	073-0762-90	TERMINAL
R736	111-2231-98	1/4W 22k ohm	R792	119-1021-15	1/16W 1k ohm	TM104	073-0762-90	TERMINAL
R737	119-2221-15	1/16W 2.2k ohm	R793	119-1021-15	1/16W 1k ohm	TM105	073-0768-90	TERMINAL
R741	119-2221-15	1/16W 2.2k ohm	R794	119-1021-15	1/16W 1k ohm	X101	061-1066-80	7.2MHz
R742	119-1031-15	1/16W 10k ohm	R801	119-1021-15	1/16W 1k ohm	X200	060-1505-50	10MHz
R743	119-1031-15	1/16W 10k ohm	R802	119-1021-15	1/16W 1k ohm			
R750	119-6821-15	1/16W 6.8k ohm	R809	119-5631-15	1/16W 56k ohm			

Switch PWB(B2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	166-3301-50	33pF CH	PL5	017-0420-09	14V40mA	R31	117-1121-15	1/10W 1.1k ohm
C2	168-1042-78	16V 0.1uF	PL6	017-0420-09	14V40mA	R32	117-1121-15	1/10W 1.1k ohm
C3	043-0328-90	0.1uF	PL7	017-0420-09	14V40mA	R33	117-1121-15	1/10W 1.1k ohm
C4	043-0328-90	0.1uF	PL8	017-0420-09	14V40mA	R34	117-1121-15	1/10W 1.1k ohm
C5	178-1052-78	1uF	PL9	017-0420-09	14V40mA	R35	117-1121-15	1/10W 1.1k ohm
C6	178-2242-78	0.22uF	Q1	125-2004-92	RN1402	R36	117-1121-15	1/10W 1.1k ohm
D1	001-7043-91	CL-170UR-CD	Q2	192-2712-00	2SC2712	R37	117-1121-15	1/10W 1.1k ohm
D2	001-7043-91	CL-170UR-CD	Q3	125-2004-92	RN1402	S1	013-6005-50	SKQNAAC
D3	001-7043-91	CL-170UR-CD	Q4	125-2004-92	RN1402	S2	013-6005-50	SKQNAAC
D4	001-7043-91	CL-170UR-CD	Q5	125-2004-92	RN1402	S3	013-7415-50	DETECTOR-SW
D5	001-7043-91	CL-170UR-CD	Q6	125-2004-92	RN1402	S4	013-6005-50	SKQNAAC
D6	001-7043-91	CL-170UR-CD	Q7	125-2004-92	RN1402	S5	013-6005-50	SKQNAAC
D7	001-2403-90	M1F60	R5	119-1001-15	1/16W 10 ohm	S6	013-6005-50	SKQNAAC
D8	001-2403-90	M1F60	R6	119-1231-15	1/16W 12k ohm	S7	013-6005-50	SKQNAAC
D9	001-2403-90	M1F60	R7	119-1021-15	1/16W 1k ohm	S8	013-6005-50	SKQNAAC
D10	001-2403-90	M1F60	R8	119-4731-15	1/16W 47k ohm	S9	013-6005-50	SKQNAAC
FL1	379-4044-24	NDICATOR	R20	117-1121-15	1/10W 1.1k ohm	S10	013-6005-50	SKQNAAC
IC1	051-6050-08	LC75742E	R21	117-1121-15	1/10W 1.1k ohm	S11	013-6005-50	SKQNAAC
IC2	051-6059-00	MN9203-01GA	R22	117-1121-15	1/10W 1.1k ohm	S12	013-6005-50	SKQNAAC
J1	074-1151-12	12P	R23	117-1121-15	1/10W 1.1k ohm	S13	013-6005-50	SKQNAAC
J2	074-1151-16	16P	R24	117-1121-15	1/10W 1.1k ohm	S14	013-6005-50	SKQNAAC
L1	010-2199-78	22uH J	R25	117-1121-15	1/10W 1.1k ohm	S15	013-6005-50	SKQNAAC
L2	010-2199-78	22uH J	R26	117-1121-15	1/10W 1.1k ohm	S16	013-6005-50	SKQNAAC
PL1	017-0420-09	14V40mA	R27	117-1121-15	1/10W 1.1k ohm	VR1	016-0025-00	VR W/SHAFT
PL2	017-0420-09	14V40mA	R28	117-1121-15	1/10W 1.1k ohm	VR2	016-9900-86	VR W/SHAFT
PL3	017-0420-09	14V40mA	R29	117-1121-15	1/10W 1.1k ohm	X1	060-1506-50	CSTCC4.00MG0H6
PL4	017-0420-09	14V40mA	R30	117-1121-15	1/10W 1.1k ohm			

CD changer mechanism section

CD Main PWB section(B3)

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C101	168-1045-56	0.1uF	IC504	051-1407-90	NJM4556AM	R122	033-2241-15	1/16W 220k ohm
C102	046-1032-78	0.01uF	J101	074-1189-95	45P	R126	033-2221-15	1/16W 2.2k ohm
C104	163-1073-15	6.3V100uF	J102	074-1191-22	22P	R127	033-2221-15	1/16W 2.2k ohm
C106	163-1063-35	16V10uF	L101	010-3071-65	18uH	R128	033-1021-15	1/16W 1k ohm
C107	163-1073-15	6.3V100uF	L102	010-2199-80	33uH J	R129	033-1021-15	1/16W 1k ohm
C108	168-1042-78	16V 0.1uF	P101	076-0478-55	PLUG	R130	033-2221-15	1/16W 2.2k ohm
C109	168-1042-78	16V 0.1uF	Q101	125-2004-92	RN1402	R502	033-4731-15	1/16W 47k ohm
C110	168-1042-78	16V 0.1uF	Q102	131-1188-50	2SB1188PQR	R503	033-4731-15	1/16W 47k ohm
C111	163-1073-35	16V100uF	Q103	193-1758-00	2SD1758TK-P,Q,R	R505	119-4731-15	1/16W 47k ohm
C112	168-2722-55	2700pF	Q104	193-1758-00	2SD1758TK-P,Q,R	R506	033-1041-15	1/16W 100k ohm
C113	163-2263-35	16V22uF	Q105	125-0014-92	DTA114EK	R507	033-0000-05	1/16W 0 ohm
C114	163-2263-35	16V22uF	Q106	125-2004-92	RN1402	R512	050-0145-54	1/16W 47k ohm x 4
C115	046-3312-58	330pF	Q505	125-2004-92	RN1402	R513	033-1041-15	1/16W 100k ohm
C116	046-3312-58	330pF	Q506	125-0014-92	DTA114EK	R514	033-2241-15	1/16W 220k ohm
C117	045-1011-50	100pF	Q507	125-0002-92	RN2402	R515	033-2241-15	1/16W 220k ohm
C118	045-1011-50	100pF	Q508	192-2712-00	2SC2712	R516	033-2241-15	1/16W 220k ohm
C119	168-2722-55	2700pF	Q509	125-2004-92	RN1402	R517	033-1041-15	1/16W 100k ohm
C120	046-1022-58	1000pF	R101	119-4711-15	1/16W 470 ohm	R518	033-2241-15	1/16W 220k ohm
C121	163-2263-35	16V22uF	R102	033-2231-15	1/16W 22k ohm	R519	033-0000-05	1/16W 0 ohm
C122	046-1022-58	1000pF	R103	119-1821-15	1/16W 1.8k ohm	R522	033-1041-15	1/16W 100k ohm
C123	163-2263-35	16V22uF	R104	033-1831-15	1/16W 18k ohm	R524	033-1041-15	1/16W 100k ohm
C124	042-0403-55	16V33uF	R105	116-1211-15	1/8W 120 ohm	R526	033-4731-15	1/16W 47k ohm
C125	042-0403-55	16V33uF	R107	033-4731-15	1/16W 47k ohm	R529	033-1021-15	1/16W 1k ohm
C502	168-1045-56	0.1uF	R108	119-1031-15	1/16W 10k ohm	R531	033-1021-15	1/16W 1k ohm
C503	046-1032-78	0.01uF	R109	119-1031-15	1/16W 10k ohm	R532	033-1021-15	1/16W 1k ohm
C504	168-1045-56	0.1uF	R110	033-4741-15	1/16W 470k ohm	R533	033-1021-15	1/16W 1k ohm
C506	046-1032-78	0.01uF	R111	033-4741-15	1/16W 470k ohm	R535	033-2231-15	1/16W 22k ohm
C507	046-1032-78	0.01uF	R112	033-2731-15	1/16W 27k ohm	R536	033-2231-15	1/16W 22k ohm
D103	001-0504-07	HZS4BLL	R113	033-2731-15	1/16W 27k ohm	R538	033-1031-15	1/16W 10k ohm
D104	001-0516-90	MA111	R114	033-2731-15	1/16W 27k ohm	R539	033-5631-15	1/16W 56k ohm
D105	001-0529-31	MA8056-L	R115	033-2731-15	1/16W 27k ohm	R540	033-1041-15	1/16W 100k ohm
D106	001-2601-90	MA728-TX	R116	033-5611-15	1/16W 560 ohm	R541	033-1021-15	1/16W 1k ohm
D107	001-2601-90	MA728-TX	R117	033-5611-15	1/16W 560 ohm	R542	033-4721-15	1/16W 4.7k ohm
IC501	051-9400-28	BR93LC46F-WE2	R118	033-4731-15	1/16W 47k ohm	R546	033-1031-15	1/16W 10k ohm
IC502	052-5047-10	M30621MCM-F40	R119	033-4731-15	1/16W 47k ohm	X501	060-1505-50	10MHz

CD PWB section(B4)

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	045-1201-50	12pF	C35	178-2742-78	0.27uF	R9	033-5611-15	1/16W 560 ohm
C2	046-1022-58	1000pF	C36	178-1052-78	1uF	R10	033-1011-15	1/16W 100 ohm
C3	168-1042-78	16V0.1uF	C37	168-1042-78	16V0.1uF	R11	033-3911-15	1/16W 390 ohm
C4	042-0636-54	4V220uF	C38	042-0472-91	16V47uF	R12	033-2221-15	1/16W 2.2k ohm
C5	168-1042-78	16V0.1uF	C39	042-0636-50	6.3V100uF	R13	033-6831-15	1/16W 68k ohm
C6	046-1032-78	0.01uF	C40	045-1211-50	120pF	R14	033-5621-15	1/16W 5.6k ohm
C7	168-1042-78	16V0.1uF	C41	045-5601-50	56pF	R15	033-1021-15	1/16W 1k ohm
C8	178-4742-78	0.47uF	C42	168-1042-78	16V0.1uF	R16	033-5631-15	1/16W 56k ohm
C9	178-2242-78	0.22uF	C43	042-0636-52	4V47uF	R17	033-1031-15	1/16W 10k ohm
C10	168-1042-78	16V0.1uF	C50	168-1042-78	16V0.1uF	R18	033-1031-15	1/16W 10k ohm
C11	168-1042-78	16V0.1uF	C51	168-1042-78	16V0.1uF	R19	033-5621-15	1/16W 5.6k ohm
C12	168-1042-78	16V0.1uF	C60	168-5612-55	560pF	R20	033-6831-15	1/16W 68k ohm
C13	046-2232-78	0.022uF	C61	045-1201-50	12pF	R21	033-5621-15	1/16W 5.6k ohm
C14	168-5612-55	560pF	D1	001-0516-90	MA111	R22	033-1031-15	1/16W 10k ohm
C15	168-1042-78	16V0.1uF	IC1	051-6365-00	MN662785TBUC	R23	033-1031-15	1/16W 10k ohm
C16	046-2212-58	220pF	IC2	051-9318-00	MSM51V17400D	R24	033-4731-15	1/16W 47k ohm
C17	046-2212-58	220pF	IC3	051-6060-08	BD7961FM-E2	R25	033-3931-15	1/16W 39k ohm
C18	168-1222-55	1200pF	IC4	051-5711-90	AN8882SB-E1	R26	033-6831-15	1/16W 68k ohm
C19	046-3322-58	3300pF	J1	074-1189-95	45P	R27	033-6831-15	1/16W 68k ohm
C20	168-3932-78	0.039uF	J4	074-1138-56	6P	R28	033-1031-15	1/16W 10k ohm
C21	168-3932-78	0.039uF	J5	074-1201-65	15P	R29	033-2201-15	1/16W 22 ohm
C22	042-0416-52	10V10uF TAN	J6	074-1059-76	26P	R31	033-8211-15	1/16W 820 ohm
C23	045-1201-50	12pF	L2	010-2155-93	10uH	R32	033-5631-15	1/16W 56k ohm
C25	178-1052-78	1uF	Q2	131-1188-00	2SB1188	R33	033-6831-15	1/16W 68k ohm
C26	042-0472-91	16V47uF	Q3	131-1188-00	2SB1188	R34	033-3331-15	1/16W 33k ohm
C27	178-3342-78	0.33uF	R2	033-1041-15	1/16W 100k ohm	R35	033-6831-15	1/16W 68k ohm
C29	168-2732-55	16V0.027uF	R3	033-3311-15	1/16W 330 ohm	R38	033-3931-15	1/16W 39k ohm
C30	042-0416-58	4V100uF	R4	033-6811-15	1/16W 680 ohm	R39	033-1831-15	1/16W 18k ohm
C31	042-0636-52	4V47uF	R5	033-1041-15	1/16W 100k ohm	R40	117-1001-15	1/10W 10 ohm
C32	046-1022-58	1000pF	R6	033-3931-15	1/16W 39k ohm	R41	033-6821-15	1/16W 6.8k ohm
C33	046-6822-58	6800pF	R7	033-1041-15	1/16W 100k ohm	R42	033-6821-15	1/16W 6.8k ohm
C34	168-2732-55	16V0.027uF	R8	033-5611-15	1/16W 560 ohm	R43	033-1241-15	1/16W 120k ohm

REF No.	PART No.	DESCRIPTION
R44	033-6831-15	1/16W 68k ohm
R45	116-4711-15	1/8W 470 ohm
R46	117-1811-15	1/10W 180 ohm

REF No.	PART No.	DESCRIPTION
R47	116-4711-15	1/8W 470 ohm
R48	033-1031-15	1/16W 10k ohm
R49	033-1011-15	1/16W 100 ohm

REF No.	PART No.	DESCRIPTION
R60	033-1031-15	1/16W 10k ohm
TM1	073-0768-90	TERMINAL
X2	061-3525-90	33.8688MHz

Sensor PWB section(B5)

REF No.	PART No.	DESCRIPTION
PT3	060-0252-01	PT4850F
PT4	060-0252-01	PT4850F
PT5	060-0252-01	PT4850F

PIM-FPC section(B6)

REF No.	PART No.	DESCRIPTION
IC5	051-5806-02	GPIS95

Driver PWB section(B7)

REF No.	PART No.	DESCRIPTION
C1	168-1045-56	0.1uF
C2	163-1073-35	16V100uF
D1	001-0529-32	MA8056-M
IC1	051-6044-18	BA6920FP-Y

REF No.	PART No.	DESCRIPTION
J1	074-1239-76	26P
J2	074-1100-59	9P
R1	033-1021-15	1/16W 1k ohm
R2	032-0104-59	1/4W 2.2 ohm

REF No.	PART No.	DESCRIPTION
R3	032-0104-59	1/4W 2.2 ohm
S1	013-7412-50	SPVG21

PIV-FPC section(B8)

REF No.	PART No.	DESCRIPTION
IC6	051-5806-01	GPIS93

LED-L-PWB section(B9)

REF No.	PART No.	DESCRIPTION
LED3	001-7042-00	GL4800
LED4	001-7042-00	GL4800

LED-R-PWB section(B10)

REF No.	PART No.	DESCRIPTION
LED5	001-7042-00	GL4800
LED6	001-7042-00	GL4800

L-Motor-FPC section(B11)

REF No.	PART No.	DESCRIPTION
M1	SMA-186-100	LOADING

M/S-FPC section(B12) :

REF No.	PART No.	DESCRIPTION
M2	SMA-185-100	SPINDLE
M3	SMA-184-100	SLED
S2	013-7414-50	SPVG22