
EXPLODED VIEW • PARTS LIST


Main section : PN-2530H

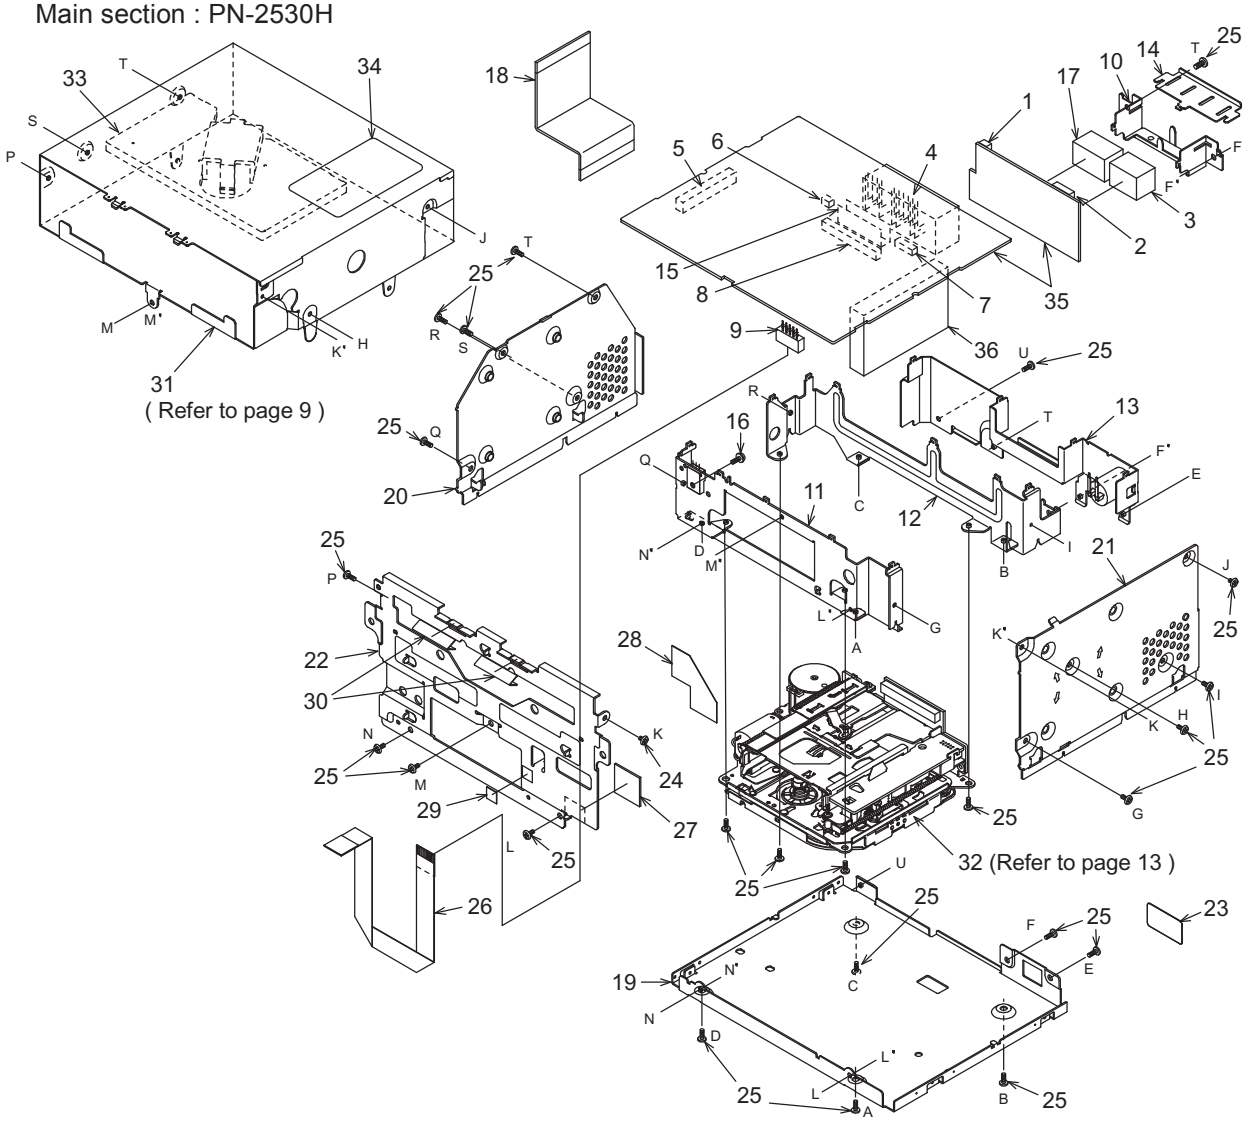

NO.	PART NO.	DESCRIPTION	Q'TY
1	074-0898-06	OUTLET SOCKET	1
2	074-0898-18	OUTLET SOCKET	1
3	074-1087-12	OUTLET SOCKET	1
4	074-1141-00	OUTLET SOCKET	1
5	074-1192-22	OUTLET SOCKET	1
6	076-0368-06	PLUG	1
7	076-0368-18	PLUG	1
8	076-0509-20	PLUG	1
9	074-0834-10	PLUG	1
10	331-2025-11	CONNECTOR HOLDER	1
11	331-3236-01	MECH BRACKET(FRONT)	1
12	331-3237-01	MECH BRACKET(REAR)	1
13	331-3239-10	REAR PLATE	1
14	331-3257-02	CONNECTOR HOLDER	1
15	347-6595-00	INSULATOR	1
16	716-1494-00	IT SCREW (M2.6 x 6)	1
17	074-1013-30	OUTLET SOCKET	1
18	816-2563-00	FLAT WIRE	1
19	311-1834-00	LOWER CASE	1

NO.	PART NO.	DESCRIPTION	Q'TY
20	331-3258-00	SIDE CASE(L)	1
21	331-3259-01	SIDE CASE(R)	1
22	331-3519-00	ES-PLATE	1
23	347-6623-00	SPACER	1
24	714-2004-81	MACHINE SCREW(M2 x 4)	1
25	714-2605-81	MACHINE SCREW(M2.6 x 5)	24
26	816-2611-00	FLAT WIRE	1
27	347-6816-00	FILM	1
28	347-6817-00	FILM	1
29	347-6909-00	FILM	1
30	347-6910-00	PROTECTOR	2
31	----------	CD CHANGER MODULE 019283-929	1
32	930-0794-80	TAPE MECHANISM	1
33	335-6703-00	LOCK PIN	1
34	286-9526-04	SET PLATE	1
35	039-2235-01	MAIN PWB (WITHOUT COMPONENT)	1
36	880-1917E	TUNER(AM/FM)	1


Main section : PN-2532D

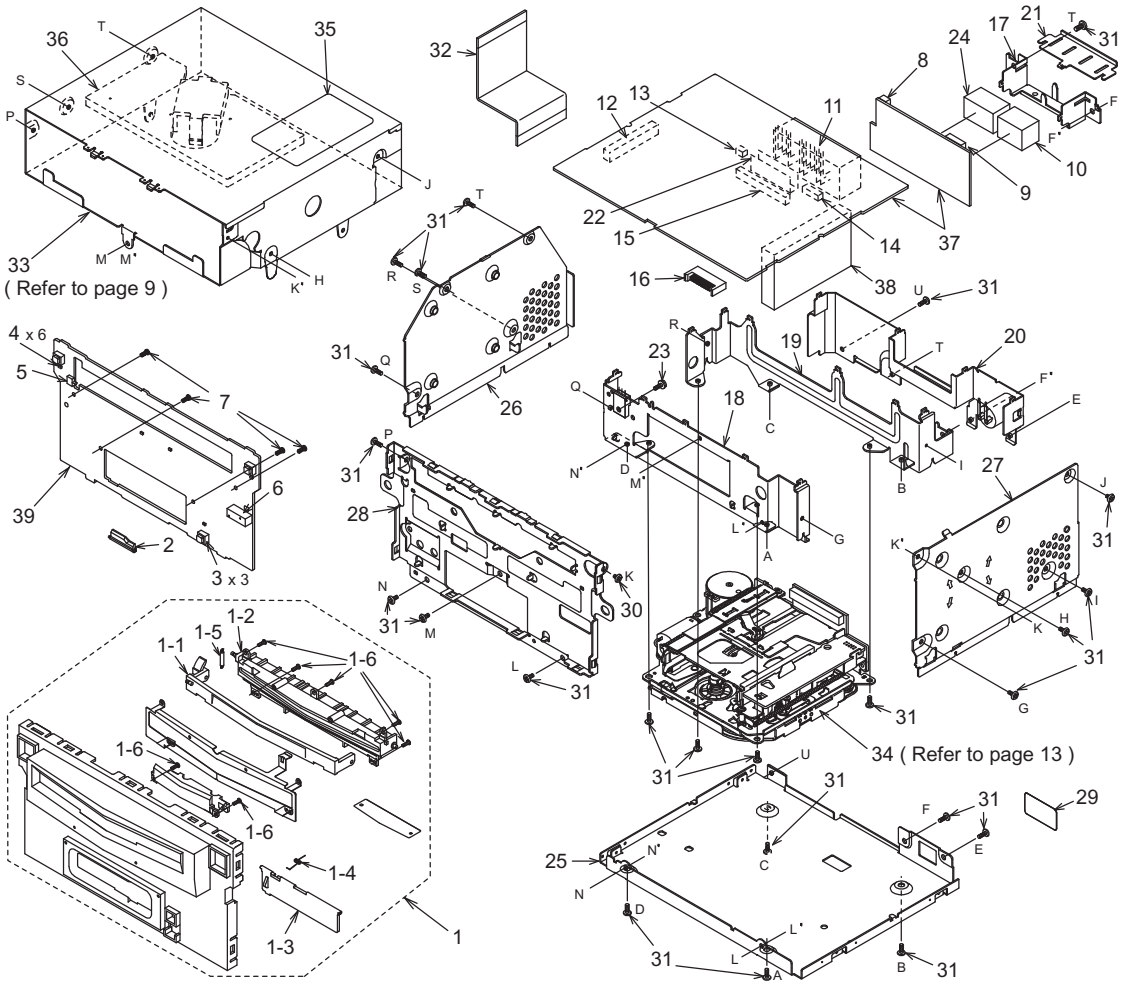

NO.	PART NO.	DESCRIPTION	Q'TY
1	940-8018-01	ESCUTCHEON ASSY	1
1-1	335-6828-00	DOOR	1
1-2	335-6829-01	DOOR BASE	1
1-3	320-0588-76	DUSTPROOF COVER	1
1-4	750-2626-00	SPRING	1
1-5	750-6708-00	SPRING	1
1-6	716-0872-00	PAD SCREW(M1.7 x 5 SILVER)	7
2	335-6826-00	GUIDE ILLUMI	1
3	013-6201-50	TACT SWITCH	3
4	001-7069-90	LED	6
5	013-7415-50	DETECTOR SWITCH	1
6	074-1151-10	OUTLET SOCKET	1
7	702-2006-81	TAP SCREW	4
8	074-0898-06	OUTLET SOCKET	1
9	074-0898-18	OUTLET SOCKET	1
10	074-1087-12	OUTLET SOCKET	1
11	074-1141-00	OUTLET SOCKET	1
12	074-1192-22	OUTLET SOCKET	1
13	076-0368-06	PLUG	1
14	076-0368-18	PLUG	1
15	076-0509-20	PLUG	1
16	076-0540-10	PLUG	1
17	331-2025-11	CONNECTOR HOLDER	1

NO.	PART NO.	DESCRIPTION	Q'TY
18	331-3236-01	MECH BRACKET(FRONT)	1
19	331-3237-01	MECH BRACKET(REAR)	1
20	331-3239-20	REAR PLATE	1
21	331-3257-02	CONNECTOR HOLDER	1
22	347-6595-00	INSULATOR	1
23	716-1494-00	IT SCREW (M2.6 x 6)	1
24	074-1013-30	OUTLET SOCKET	1
25	311-1834-00	LOWER CASE	1
26	331-3258-00	SIDE CASE(L)	1
27	331-3259-01	SIDE CASE(R)	1
28	331-3483-00	ES-PLATE	1
29	347-6623-00	SPACER	1
30	714-2004-81	MACHINE SCREW(M2 x 4)	1
31	714-2605-81	MACHINE SCREW(M2.6 x 5)	24
32	816-2563-00	FLAT WIRE	1
33	----------	CD CHANGER MODULE 019283-929	1
34	930-0794-80	TAPE MECHANISM	1
35	286-6126-01	SET PLATE	1
36	335-6703-00	LOCK PIN	1
37	039-2235-01	MAIN PWB (WITHOUT COMPONENT)	1
38	880-1917F	TUNER(AM/FM)	1
39	039-2270-01	ESCUTCHEON PWB (WITHOUT COMPONENT)	1


Main section : PN-2548N

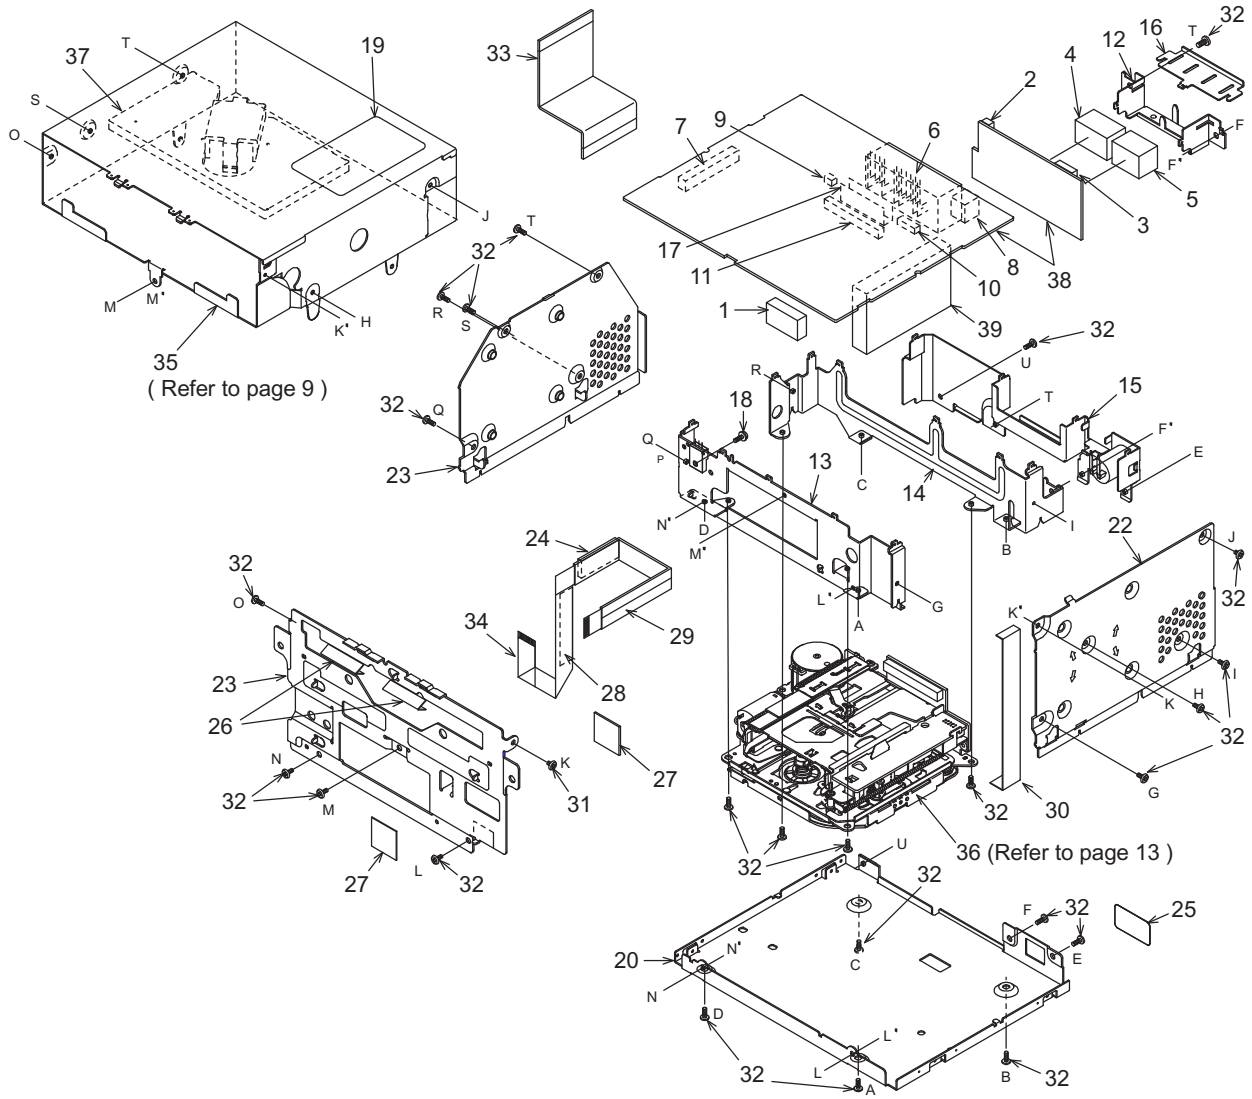

NO.	PART NO.	DESCRIPTION	Q'TY
1	074-0834-10	PLUG	1
2	074-0898-06	OUTLET SOCKET	1
3	074-0898-18	OUTLET SOCKET	1
4	074-1013-30	OUTLET SOCKET	1
5	074-1087-12	OUTLET SOCKET	1
6	074-1141-00	OUTLET SOCKET	1
7	074-1192-22	OUTLET SOCKET	1
8	074-1236-10	PLUG	1
9	076-0368-06	PLUG	1
10	076-0368-18	PLUG	1
11	076-0509-20	PLUG	1
12	331-2025-11	CONNECTOR HOLDER	1
13	331-3236-01	MECH BRACKET(FRONT)	1
14	331-3237-01	MECH BRACKET(REAR)	1
15	331-3239-40	REAR PLATE	1
16	331-3257-02	CONNECTOR HOLDER	1
17	347-6595-00	INSULATOR	1
18	716-1494-00	IT SCREW (M2.6 x 6)	1
19	286-9526-10	SET PLATE	1
20	311-1834-00	LOWER CASE	1

NO.	PART NO.	DESCRIPTION	Q'TY
21	331-3258-00	SIDE CASE(L)	1
22	331-3259-01	SIDE CASE(R)	1
23	331-3519-00	ES-PLATE	1
24	345-5300-00	CUSHION SPONGE	1
25	347-6623-00	SPACER	1
26	347-6910-00	PROTECTOR	2
27	347-6964-00	PROTECT SHEET	2
28	347-6965-00	DOUBLE FACE	1
29	347-6966-00	PROTECT SHEET	1
30	347-6967-00	PROTECT SHEET	1
31	714-2004-81	MACHINE SCREW(M2 x 4)	1
32	714-2605-81	MACHINE SCREW(M2.6 x 5)	24
33	816-2563-00	FLAT WIRE	1
34	816-2611-01	FLAT WIRE	1
35	----------	CD CHANGER MODULE 019283-929	1
36	930-0794-80	TAPE MECHANISM	1
37	335-6703-00	LOCK PIN	1
38	039-2235-01	MAIN PWB (WITHOUT COMPONENT)	1
39	880-1917F	TUNER(AM/FM)	1

CD changer module section

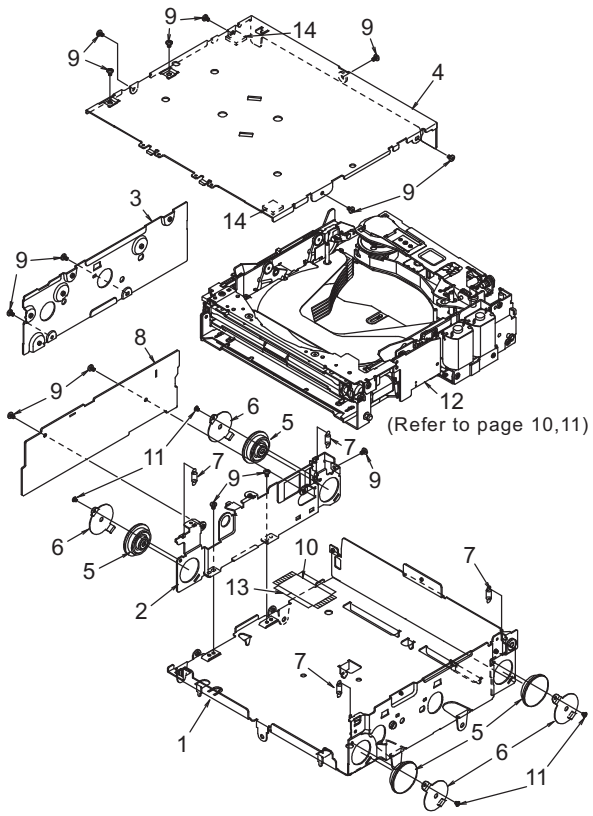

NO.	PART NO.	DESCRIPTION	Q'TY
1	311-1837-25	LOWER CASE	1
2	331-3266-24	PWB HOLDER	1
3	305-0315-21	SIDE CASE	1
4	310-1741-23	UPPER CASE	1
5	629-0083-01	DAMPER	4
6	620-1086-20	DAMPER-H-PLT	4
7	750-3491-00	FL-APRING	1
8	039-2020-01	SIDE PWB (WITHOUT COMPONENT)	1
9	716-1716-00	SCREW(M2x3)	14
10	039-1957-01	FPC	1
11	716-3450-00	SCREW(M1.7x2)	4
12	----------	CD CHANGER MECHANISM	1
13	347-6619-00	INSULATOR	1
14	345-8329-00	CUSHION RUBBER	2

CD changer mechanism section : Main chassis


* The exploded view is on page 10,11.


NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-521-100	LOADING UNIT (WITHOUT MOTOR)	1
2	SMA-186-100	LOADING MOTOR ASSY	1
3	HBS-512-100	MOTOR PLATE SUB ASSY	1
4	HBS-513-103	DRIVE UNIT	1
5	039-1951-20	CD PWB (WITHOUT COMPONENT)	1
6	039-1953-00	DRIVER PWB (WITHOUT COMPONENT)	1
7	966-0597-03	CHASSIS ASSY	1
8	966-0600-01	LOCK-P-RE-ASSY	1
9	966-0601-01	M-GEAR-P-ASSY	1
10	966-0602-23	DR-LINK-ASSY	1
11	966-0603-00	MODE-P-ASSY	1
12	966-0604-02	LOCK-PF-ASSY	1
13	966-0605-00	SHIFT-P-ASSY	1
14	966-0606-03	HLC-PLATE-ASSY	1
15	966-0607-04	COV-OLATE-ASSY	1
16	966-0610-24	TOP-PLATE-ASSY	1
17	966-0611-25	DR-BASE-P-ASSY	1
18	966-0615-21	LOCK-L-RF-ASSY	1
19	966-0616-20	LOCK-L-LF-ASSY	1
20	966-0618-21	EJECT-B-ASSY	1
21	966-0624-24	DISC-HOL-ASSY	1
22	001-7042-00	DIODE (GL4800)	4
23	013-7414-50	DETECTOR SWITCH	1

NO.	PART NO.	DESCRIPTION	Q'TY
24	039-1954-20	LED-L-PWB (WITHOUT COMPONENT)	1
25	039-1955-20	LED-R-PWB (WITHOUT COMPONENT)	1
26	039-1956-00	SENSOR PWB (WITHOUT COMPONENT)	1
27	039-2009-00	PIM-FPC	1
28	039-2010-00	PIV-FPC	1
29	039-2011-00	LED-FPC	1
30	039-2012-00	SENSOR-FPC	1
31	039-2013-00	MOS-FPC	1
32	039-2014-00	L-MOTOR-FPC (WITHOUT COMPONENT)	1
33	051-5806-01	IC (GPIS93)	1
34	051-5806-02	IC (GPIS95)	1
35	060-0252-01	PHOTO-TR	4
36	347-6657-01	LO-COVER SHEET	1
37	620-1041-03	GEAR PLATE	1
38	620-1042-00	M-GEAR-H	1
39	620-1056-21	HLR-PLATE-L	1
40	620-1580-00	HLR-PLATE-R	1
41	620-1576-20	LO-MOTOR-PLT	1
42	620-1066-20	LOCK LINK-LR	1
43	620-1067-21	SLIDE PLATE-L	1
44	620-1068-22	SLIDE PLATE-R	1
45	620-1071-20	EJECT ARM	1
46	620-1072-20	EJECT PLATE	1


NO.	PART NO.	DESCRIPTION	Q'TY
47	620-1577-20	FRONT PLATE	1
48	620-1083-20	FPC-PLATE	1
49	620-1090-00	GAP PLATE	1
50	620-1568-00	RATTLE PLATE-F	2
51	621-0640-00	V-GEAR-G	1
52	621-0641-21	PI-HOLDER-M	1
53	621-0656-21	PI-HOLDER-V	1
54	622-1622-00	SL-G-ROLLER	2
55	622-1623-00	SL-G-ROLLER-R	2
56	622-1648-02	DU-STP-SLEEVE	1
57	622-1650-02	COV-PLATE PIN-B	2
58	622-1651-00	LOCK-RE-ROLLER	1
59	622-1652-00	LOCK-PF-ROLLER	1
60	716-1866-00	SCREW(M1.7x3)	4
61	716-1873-00	SCREW(M2x1.6)	1
62	716-3449-00	SCREW(M2x3)	15
63	716-3450-00	SCREW(M1.7x2)	4
64	716-3451-00	SCREW(M1.7x2.5)	4
65	716-3459-00	SCREW(M1.7x5)	1
66	716-3466-02	SCREW	1

NO.	PART NO.	DESCRIPTION	Q'TY
67	738-1422-11	PRECISION SCREW	2
68	743-1200-20	E-RING	2
69	743-1500-20	E-RING	13
70	746-0624-00	WASHER	1
71	746-0712-03	WASHER	1
72	746-0761-00	WASHER	1
73	750-3478-01	TOP-P-SP-L	2
74	750-3479-01	TOP-P-SP-R	1
75	750-3480-01	DR-LOCK-SP	1
76	750-3483-00	EJECT-A-SPRING	1
77	750-3484-01	DR-BASE-SPRING	1
78	750-3485-01	TENSION-SP-L	1
79	750-3486-01	LO-TENSION-SP	1
80	750-3489-01	DRIVE-P-SPRING	1
81	750-3496-00	GAP-P-SPRING R	1
82	750-3497-00	GAP-P-SPRING L	1
83	750-6711-01	DU-STP-SPRING	1
84	750-6712-01	DR-LOCK-SP-B	1
85	621-0651-22	LOAD GEAR-A	1
86	347-6974-20	FPC COVER	1

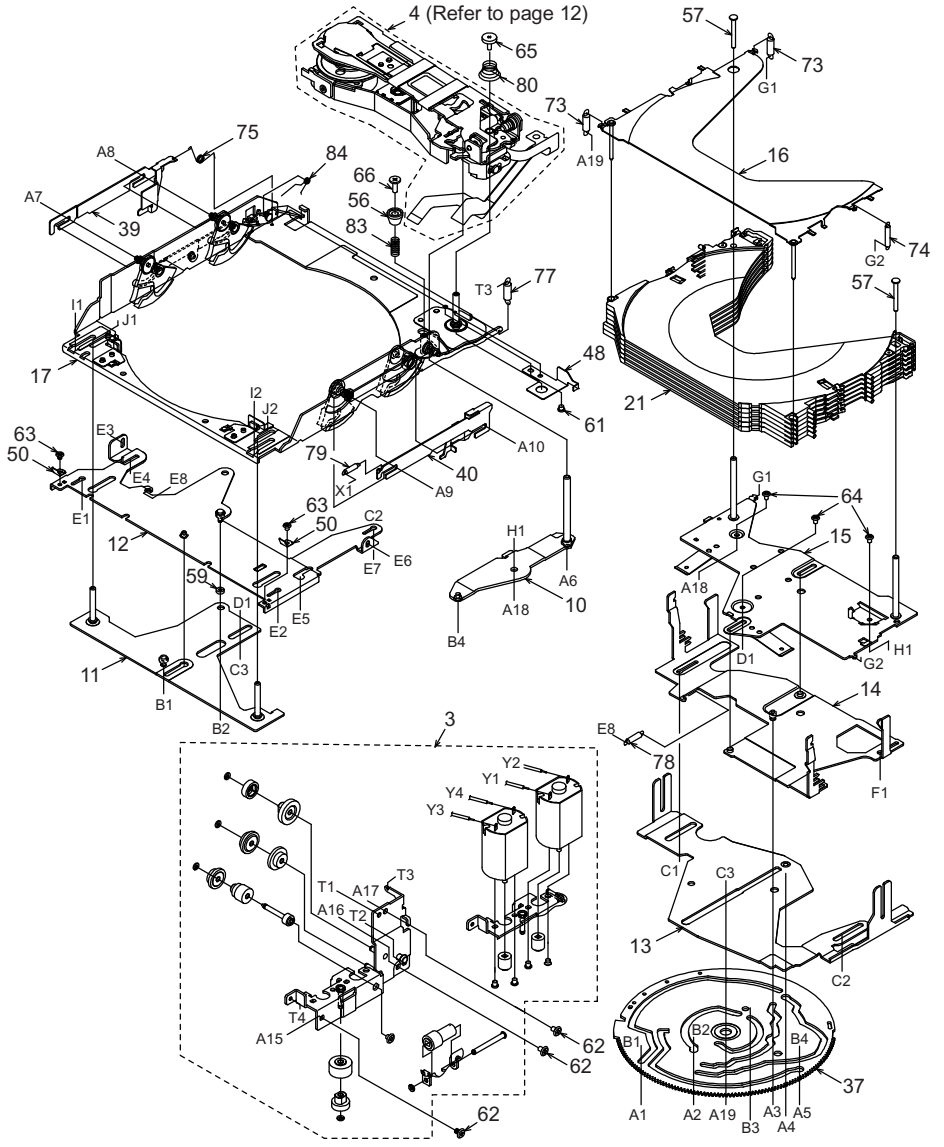

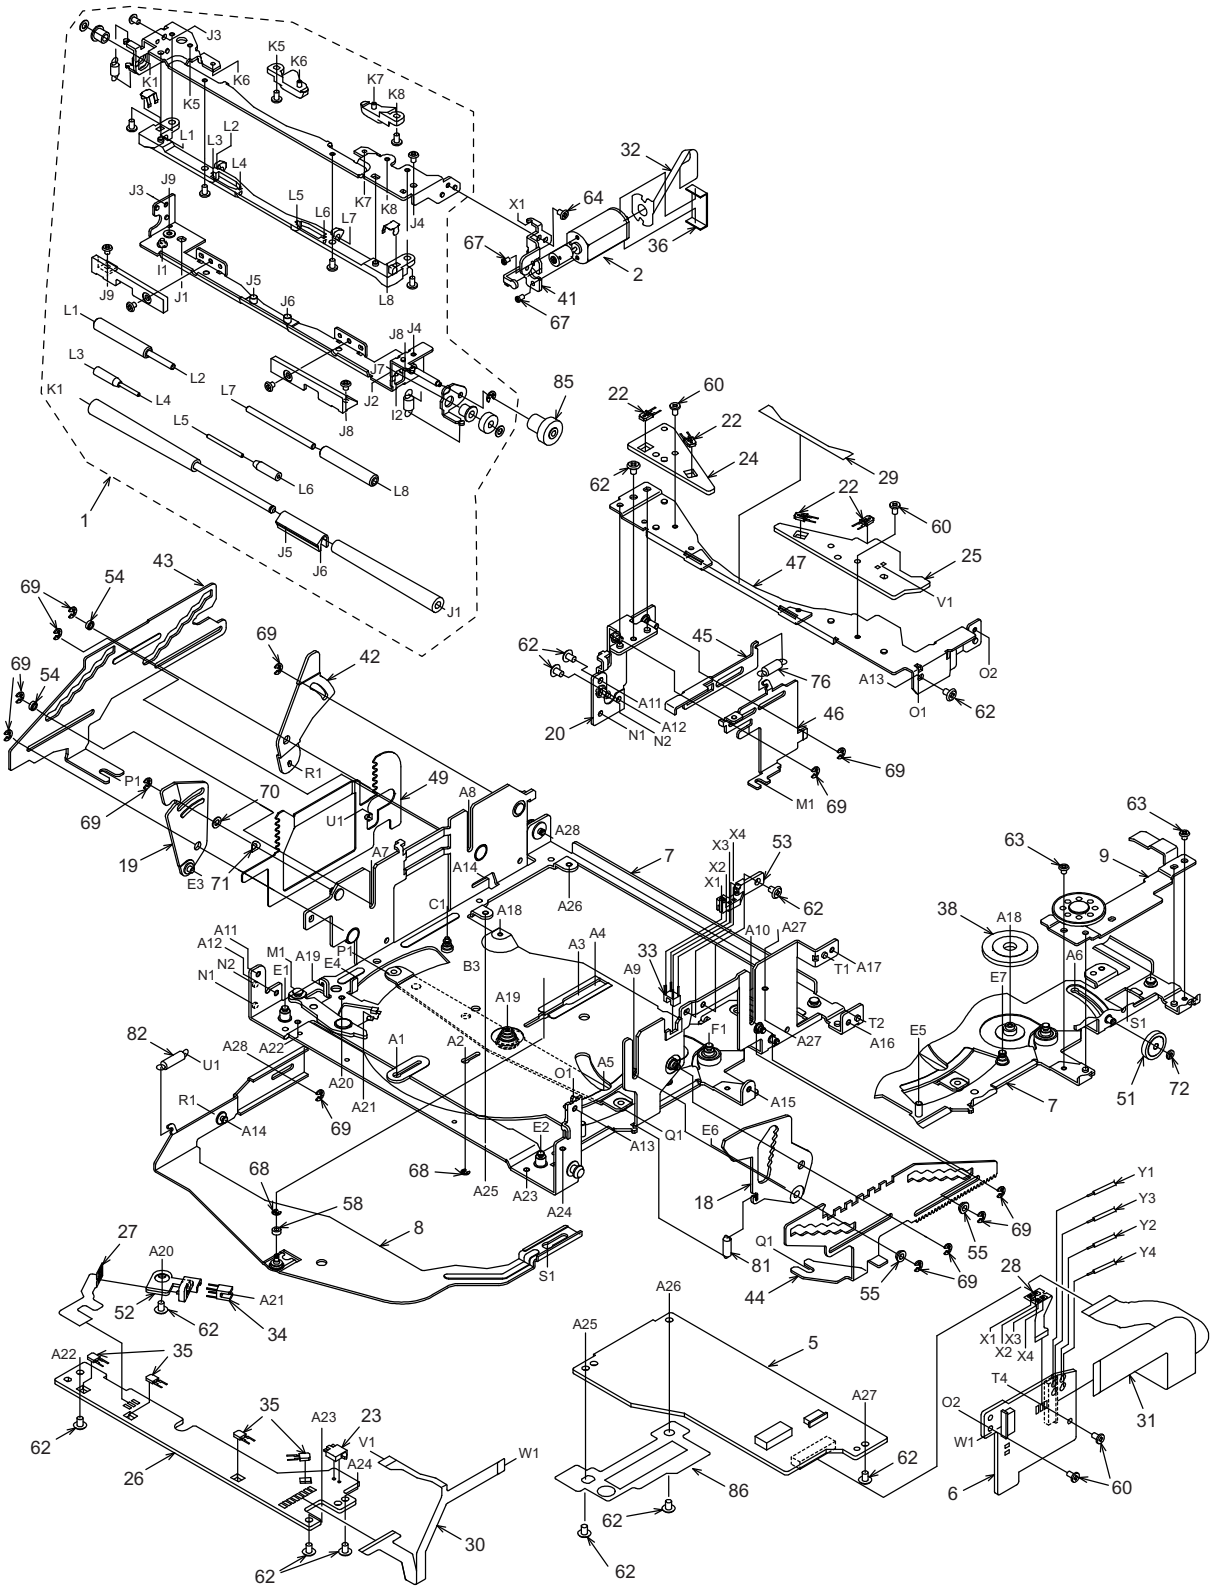

CD changer mechanism section : Drive unit

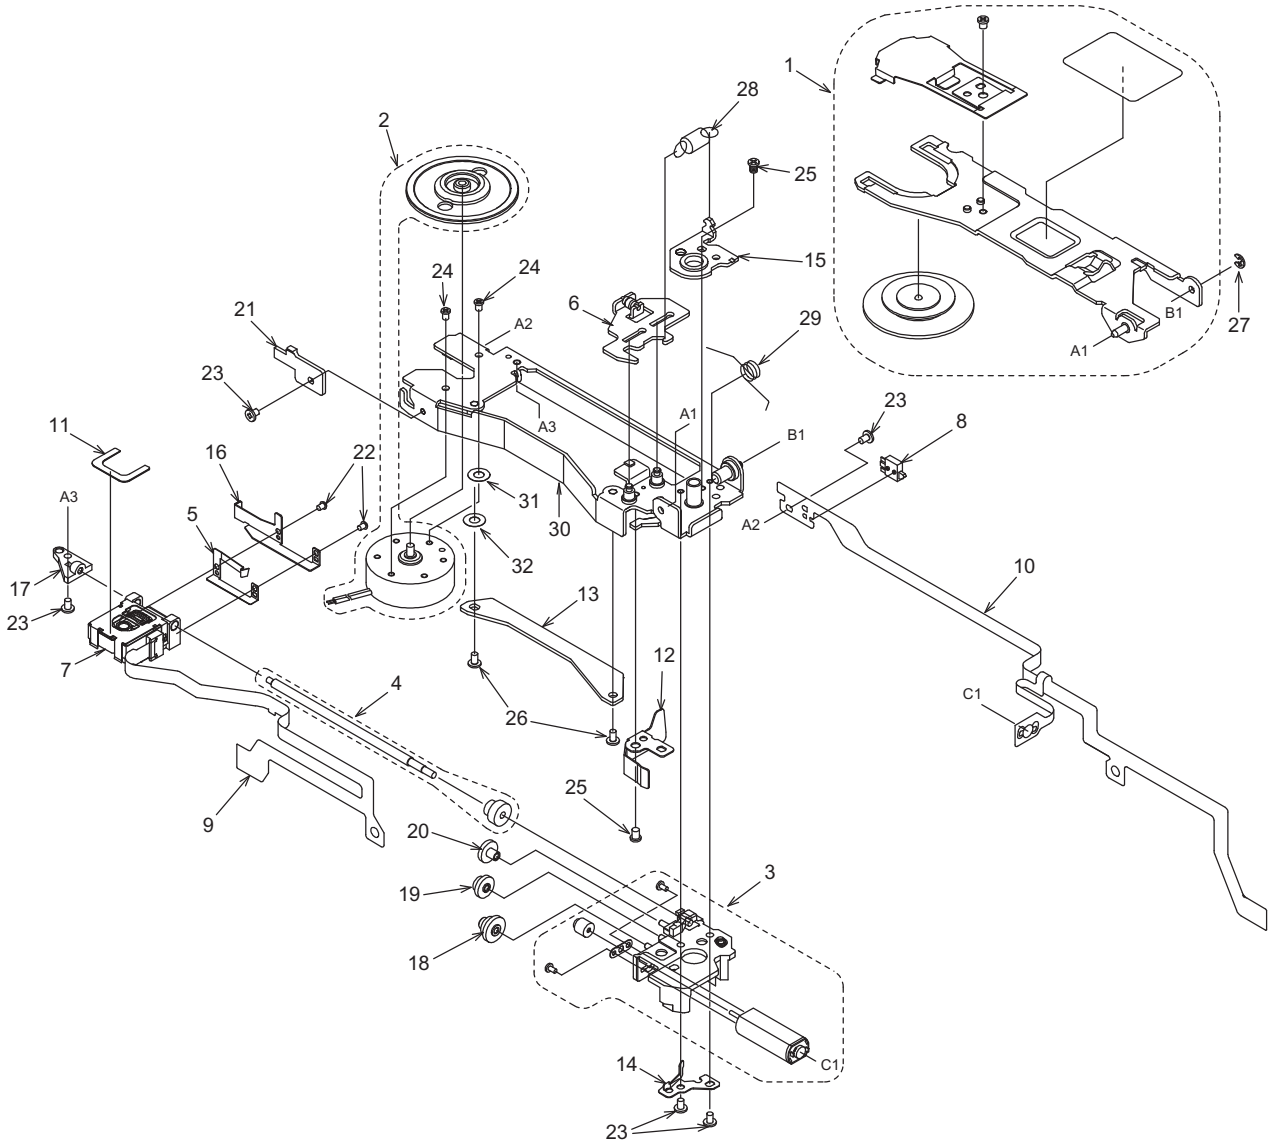


NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-514-100	CLAMPER SUB ASSY	1
2	SMA-185-100	SPINDLE MOTOR ASSY	1
3	SMA-184-100	SLED MOTOR ASSY	1
4	HBS-515-101	LS-ASSY	1
5	620-1587-00	SH-SP-PLT	1
6	966-0622-02	D-SHIFT-P-ASSY	1
7	969-0009-00	PICK UP-ASSY	1
8	013-7414-50	DETECT SWITCH	1
9	039-2015-01	P/U-FPC	1
10	039-2016-01	M/S-FPC	1
11	347-6632-00	PU-SHEET	1
12	620-1078-00	PUSH PLATE	1
13	620-1080-01	PU-GUIDE PLATE	1
14	620-1081-00	SCREW PUSH-PLT	1
15	620-1082-02	SPRING PLATE	1
16	620-1588-00	SCREW-HOL-PLT	1

NO.	PART NO.	DESCRIPTION	Q'TY
17	621-0670-20	LS-HOLDER-L	1
18	621-0673-00	D-GEAR A	1
19	621-0674-00	D-GEAR B	1
20	621-0675-00	D-GEAR C	1
21	621-0683-21	DU-STOPPER	1
22	716-3460-00	SCREW(M1.4x1.8)	2
23	716-3470-00	SCREW(M1.7x3)	5
24	738-1722-17	PRECISION SCREW	2
25	738-2025-17	PRECISION SCREW	2
26	716-3474-00	SCREW(M1.7x3)	2
27	743-1500-20	E-RING	1
28	750-3487-00	SHIFT-P-SPRING	1
29	750-3504-00	CLAMP-A-SPRING	1
30	966-0619-04	DRIVE PLT-ASSY	1
31	745-0807-00	WASHER	1
32	745-0808-00	WASHER	1

Tape mechanism section

* The parts list of the exploded view is on page 14.

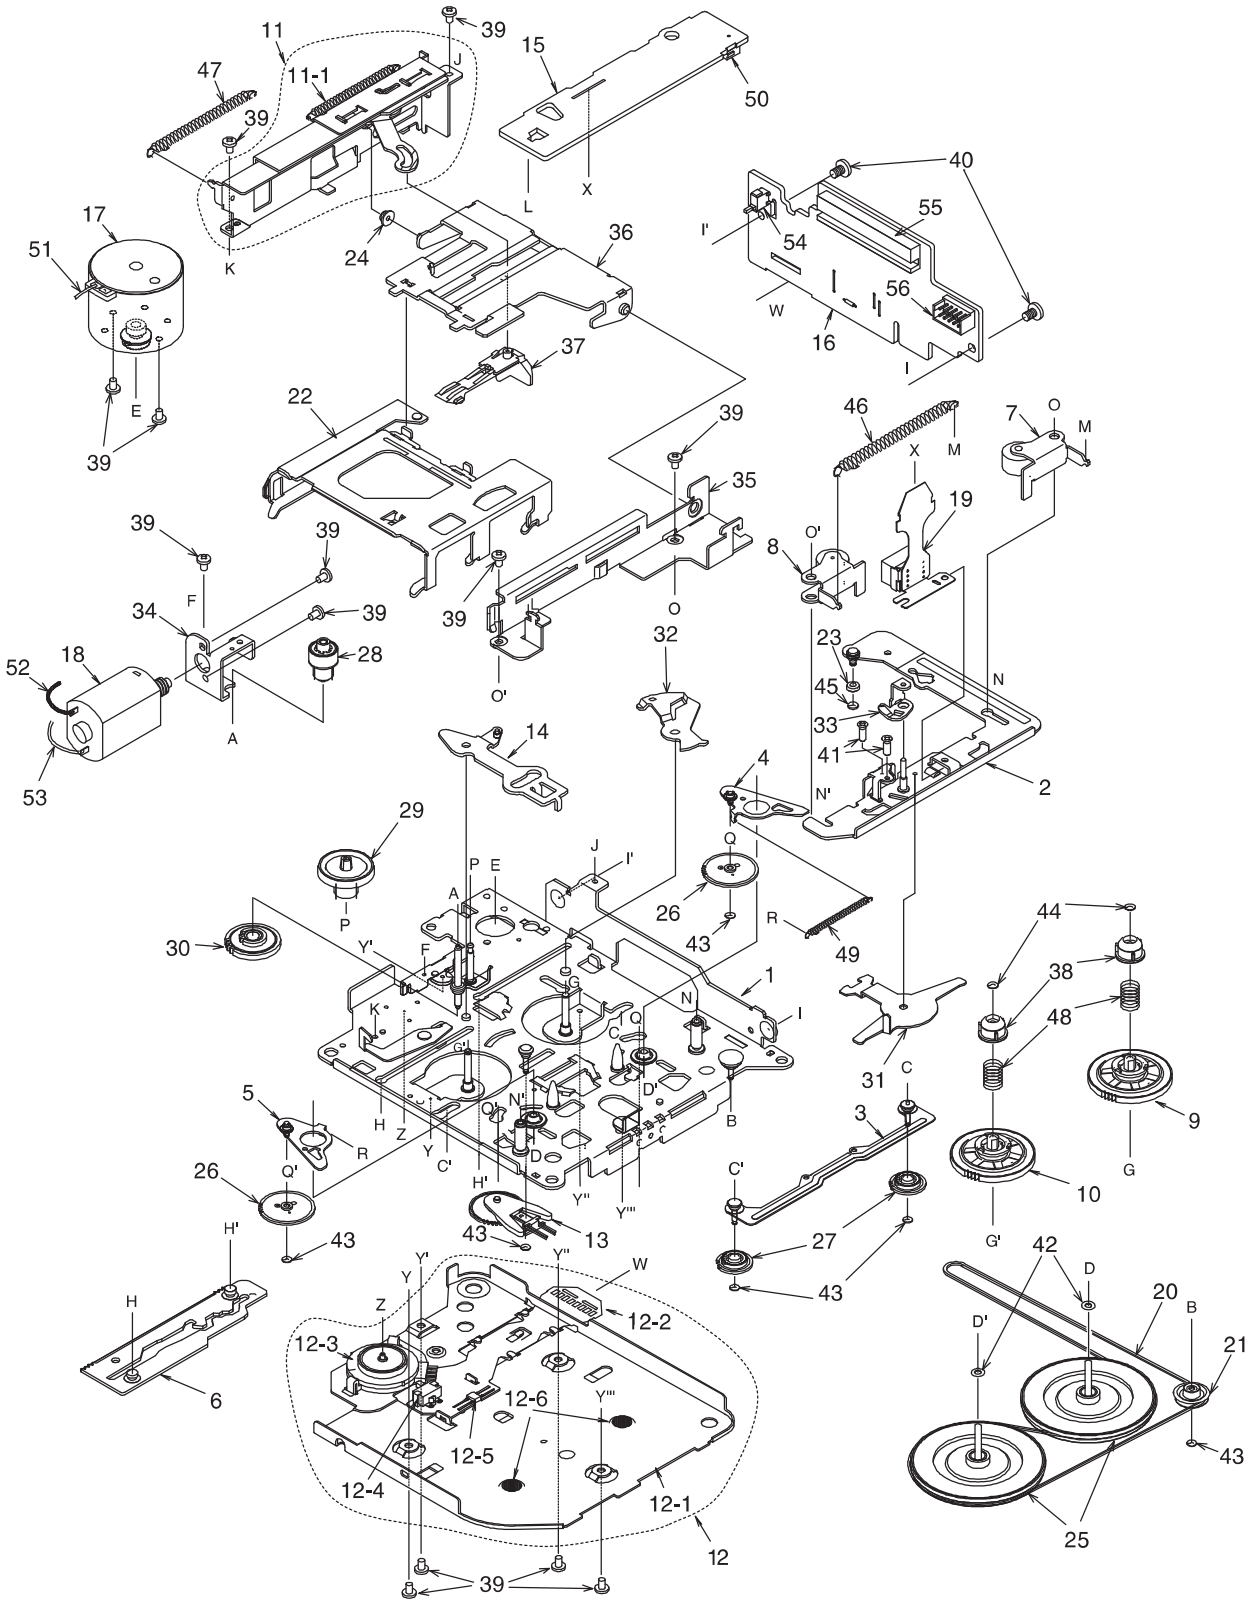

NO.	PART NO.	DESCRIPTION	Q'TY
1	960-4294-22	DECK PLATE ASSY	1
2	960-4261-20	HEAD PLATE ASSY	1
3	960-4262-04	FF/REW-P ASSY	1
4	960-4263-03	IDLER-P-ASSY L	1
5	960-4264-03	IDLER-P-ASSY R	1
6	960-4266-20	MODE PLATE ASSY	1
7	960-4269-05	ROLLER ASSY F	1
8	960-4270-05	ROLLER ASSY R	1
9	960-4348-03	REEL ASSY F	1
10	960-4349-03	REEL ASSY R	1
11	960-4389-20	EJECT SUB ASSY	1
11-1	750-3020-01	SWITCH PLATE SPRING	1
12	960-4338-09	BOTTOM SUB ASSY	1
12-1	960-4295-02	BOTTOM P-ASSY	1
12-2	099-9926-01	BOTTOM PWB (WITHOUT COMPONENT)	1
12-3	013-3951-32	SWITCH(MODE)	1
12-4	013-3953-01	SWITCH(METAL)	1
12-5	051-1776-00	IC	1
12-6	746-0767-00	WASHER	2
13	960-4282-06	DETECT SUB ASSY	1
14	960-4301-02	PLAY LINK ASSY	1
15	039-1912-01	SIDE PWB (WITHOUT COMPONENT)	1
16	039-1913-00	REAR PWB (WITHOUT COMPONENT)	1
17	SMA-168-100	MAIN MOTOR ASSY	1
18	SMA-169-100	POWER MOTOR ASSY	1
19	011-0328-01	HEAD	1
20	602-0118-00	BELT	1
21	604-0046-00	TENSION PULLEY	1
22	606-0093-06	PACK GUIDE	1
23	610-0342-01	HEAD P-ROLLER	1
24	610-0343-00	GUIDE A-ROLLER	1

NO.	PART NO.	DESCRIPTION	Q'TY
25	611-0091-03	FLYWHEEL	2
26	613-0662-00	IDLER GEAR	2
27	613-0286-03	FF/REW GEAR	2
28	613-0288-01	HELICAL GEAR	1
29	613-0289-01	GEAR A	1
30	613-0337-00	POWER GEAR	1
31	630-2597-01	CHANGE LINK	1
32	630-2598-05	EJECT LINK	1
33	630-2600-01	ADJUST LINK	1
34	630-2601-02	MOTOR PLATE	1
35	630-2626-06	PWB FRAME	1
36	630-2642-01	GUIDE ARM	1
37	631-1992-02	PACK STOPPER	1
38	631-1993-01	SLIDE BUSH	2
39	716-0484-00	SCREW(M2x2.5)	13
40	716-1676-00	PWB SCREW(M2.6x6)	2
41	716-0833-10	SCREW(M2x5.6)	2
42	746-0624-00	WASHER	2
43	746-0724-00	WASHER	6
44	746-0761-00	WASHER	2
45	746-0762-00	WASHER	1
46	750-2946-02	PINCH SPRING	1
47	750-2947-04	EJECT P-SPRING	1
48	750-2949-00	SLIDE SPRING	2
49	750-3017-02	IDLER P-SPRING	1
50	074-0898-10	OUTLET SOCKET(10P)	1
51	802-4906-60	WIRE(RED)	1
52	806-4914-60	WIRE(BLUE)	1
53	816-2349-00	WIRE(WHITE)	1
54	013-3906-00	SWITCH(TAPE IN)	1
55	074-1012-20	OUTLET SOCKET(20P)	1
56	076-0368-10	PLUG(10P)	1

ELECTRICAL PARTS LIST

Main PWB(B1) section

Note) Several different parts of the same reference number are alternative parts. One of those parts is used in the set.
Some parts depend on each model. The model name is specified in the description.

REF No.	PART No.	DESCRIPTION
BL101	880-1917E	AM/FM TUNER (2530H)
BL101	880-1917F	AM/FM TUNER (2532D,2548N)
C101	166-1511-50	150pF CH
C102	166-4701-50	47pF CH (2532D,2548N)
C103	166-4701-50	47pF CH (2532D,2548N)
C104	168-1032-55	0.01uF (2532D,2548N)
C105	168-6812-55	680pF (2532D,2548N)
C106	168-4732-78	0.047uF (2532D,2548N)
C107	168-3332-78	0.033uF (2532D,2548N)
C108	183-1053-68	50V1uF (2532D,2548N)
C109	168-3922-55	3900pF (2532D,2548N)
C110	168-1032-55	0.01uF (2532D,2548N)
C111	168-1022-55	1000pF (2532D,2548N)
C112	168-1032-55	0.01uF (2532D,2548N)
C113	166-2201-50	22pF CH (2532D,2548N)
C114	178-2242-78	0.22uF
C115	166-1007-50	10pF CH
C116	183-4763-18	6.3V47uF
C117	168-5612-55	560pF
C119	166-4701-50	47pF CH
C120	183-2253-68	50V2.2uF
C121	183-1073-28	10V100uF
C122	043-0277-51	0.022uF
C123	166-5601-50	56pF CH
C124	168-1042-78	16V 0.1uF
C125	183-1073-28	10V100uF
C126	168-3312-55	330pF
C129	168-1042-78	16V 0.1uF
C130	183-1073-28	10V100uF
C132	178-1052-78	1uF
C133	168-1232-55	0.012uF
C134	181-1053-69	50V1uF
C135	183-4763-38	16V47uF
C136	043-0277-51	0.022uF
C138	168-1022-55	1000pF
C140	183-4763-38	16V47uF
C141	168-2232-55	0.022uF
C142	166-1011-50	100pF CH
C143	166-1011-50	100pF CH
C144	166-1011-50	100pF CH
C145	166-1011-50	100pF CH
C146	166-1801-50	18pF CH
C147	168-3932-78	0.039uF
C148	168-3932-78	0.039uF
C149	168-3932-78	0.039uF
C150	168-3932-78	0.039uF
C151	166-1801-50	18pF CH
C152	168-4722-55	4700pF
C153	166-1201-50	12pF CH
C154	168-1032-55	0.01uF
C156	166-2201-50	22pF CH
C158	166-2201-50	22pF CH
C201	168-2222-55	2200pF(2548N)
C204	042-0592-58	16V10uF(2548N)
C205	042-0592-58	16V10uF(2548N)
C206	042-0592-58	16V10uF(2548N)
C207	042-0592-58	16V10uF(2548N)
C208	166-5096-50	5pF CH(2548N)
C209	166-5096-50	5pF CH(2548N)
C210	166-2201-50	22pF CH(2548N)
C211	166-2201-50	22pF CH(2548N)
C212	166-5096-50	5pF CH(2548N)
C213	166-5096-50	5pF CH(2548N)
C305	163-2263-35	16V22uF
C307	042-0592-73	50V1uF
C308	183-1053-68	50V1uF
C309	183-1053-68	50V1uF(2548N)
C310	183-1053-68	50V1uF(2548N)
C311	183-1053-68	50V1uF
C312	042-0592-73	50V1uF
C316	183-1053-68	50V1uF
C317	183-1053-68	50V1uF
C323	178-1842-78	0.18uF
C324	178-1842-78	0.18uF
C325	178-1842-78	0.18uF
C326	178-1842-78	0.18uF
C327	168-8212-55	820pF
C328	168-8212-55	820pF
C329	168-8212-55	820pF
C330	168-8212-55	820pF
C331	042-0592-58	16V10uF
C332	042-0592-58	16V10uF
C333	168-1832-55	0.018uF
C334	168-1022-55	1000pF
C401	168-1042-78	16V 0.1uF
C402	168-1042-78	16V 0.1uF
C403	168-1042-78	16V 0.1uF
C404	168-1042-78	16V 0.1uF
C405	042-0505-82	16V10uF
C406	168-1042-78	16V 0.1uF
C408	178-1052-78	1uF
C409	168-2232-55	0.022uF
C410	168-1042-78	16V 0.1uF
C412	166-1011-50	100pF CH
C414	166-1011-50	100pF CH
C416	166-1011-50	100pF CH
C417	166-1011-50	100pF CH
C418	168-1022-55	1000pF
C420	183-4763-18	6.3V47uF
C421	168-1042-78	16V 0.1uF
C422	168-1022-55	1000pF
C423	168-1042-78	16V 0.1uF
C424	168-1032-55	0.01uF
C434	168-2222-55	2200pF (2530H,2548N)
C461	178-1052-78	1uF
C462	166-1011-50	100pF CH
C463	166-1011-50	100pF CH
C464	166-1011-50	100pF CH
C465	166-1011-50	100pF CH
C466	166-1011-50	100pF CH
C501	168-1042-78	16V 0.1uF
C502	183-1073-28	10V100uF
C503	183-1063-38	16V10uF
C504	182-1073-37	16V100uF
C505	168-1042-78	16V 0.1uF
C506	163-1073-35	16V100uF
C507	182-1073-37	16V100uF
C508	182-1073-37	16V100uF
C509	042-0423-94	10V 4.7uF
C510	168-1042-78	16V 0.1uF
C511	183-1063-38	16V10uF
C515	183-4763-38	16V47uF
C601	168-2222-55	2200pF
C602	168-2222-55	2200pF
C603	168-2222-55	2200pF
C604	168-2222-55	2200pF
C605	168-2222-55	2200pF
C606	168-2222-55	2200pF
C607	168-2222-55	2200pF
C608	168-2222-55	2200pF
C609	168-2222-55	2200pF
C610	168-2222-55	2200pF
C611	172-1041-15	0.1uF
C612	042-0551-02	16V1000uF
C613	183-1053-68	50V1uF
C614	172-1041-15	0.1uF(2532D)
C615	183-1063-38	16V10uF(2532D)
C620	168-2232-55	0.022uF
C701	183-1053-68	50V1uF
C702	183-1053-68	50V1uF
C705	042-0592-58	16V10uF
C706	042-0592-58	16V10uF
C707	042-0592-58	16V10uF
C708	042-0592-58	16V10uF
C711	166-5601-50	56pF CH
C712	166-5601-50	56pF CH
C713	166-2201-50	22pF CH
C714	166-2201-50	22pF CH
C715	166-2201-50	22pF CH
C716	166-2201-50	22pF CH
C717	166-5601-50	56pF CH
C718	166-5601-50	56pF CH
C719	166-5601-50	56pF CH
C720	166-5601-50	56pF CH
C721	166-2201-50	22pF CH
C722	166-2201-50	22pF CH
C723	166-2201-50	22pF CH
C724	166-2201-50	22pF CH
C725	166-5601-50	56pF CH
C726	166-5601-50	56pF CH
C727	042-0548-52	10V220uF
C728	042-0548-52	10V220uF
C729	042-0548-52	10V220uF
C730	042-0548-52	10V220uF
C731	042-0548-52	10V220uF
C732	042-0548-52	10V220uF
C733	042-0548-52	10V220uF
C734	042-0548-52	10V220uF
C737	042-0548-52	10V220uF
C740	182-4763-35	16V47uF
C743	183-1063-38	16V10uF
C744	042-0562-65	10V220uF
C745	166-2201-50	22pF CH
C1001	042-0562-67	16V10uF
C1002	042-0562-67	16V10uF
C1003	042-0562-67	16V10uF
C1004	042-0562-67	16V10uF
C1006	168-1022-55	1000pF
C1007	168-2232-55	0.022uF
C1010	168-1022-55	1000pF
C1011	168-1022-55	1000pF
C1012	183-1066-38	16V10uF NP
C1013	183-1066-38	16V10uF NP
C1017	168-1022-55	1000pF
C1018	168-1022-55	1000pF
CCT401	050-0122-50	1/16W10k ohm x4 J
CCT402	050-0140-54	1/32W 1k ohm x4J
CCT403	050-0140-54	1/32W 1k ohm x4J
CCT404	050-0140-54	1/32W 1k ohm x4J
CCT405	050-0140-54	1/32W 1k ohm x4J
CCT406	050-0140-54	1/32W 1k ohm x4J
CCT407	050-0140-54	1/32W 1k ohm x4J
CCT408	050-0140-54	1/32W 1k ohm x4J
CCT409	050-0140-54	1/32W 1k ohm x4J
CCT411	050-0140-54	1/32W 1k ohm x4J

REF No.	PART No.	DESCRIPTION
CCT412	050-0140-54	1/32W 1k ohm x4J
CCT414	050-0140-54	1/32W 1k ohm x4J
CCT415	050-0140-54	1/32W 1k ohm x4J
CCT417	050-0140-54	1/32W 1k ohm x4J
D101	001-3205-90	1SV251 (2532D,2548N)
D102	001-3205-90	1SV251 (2532D,2548N)
D400	001-0516-90	MA111
D400	001-0517-90	1SS355
D401	001-0516-90	MA111
D401	001-0517-90	1SS355
D402	001-0529-44	MA8082-M
D402	001-4301-44	HZU8.2B2
D409	001-0529-48	MA8091-H (2530H,2548N)
D409	001-4301-48	HZU9.1B3 (2530H,2548N)
D501	001-0504-49	HZS9 C3L
D502	001-0504-48	HZS9C2L
D503	001-0466-90	S5688B
D504	001-0466-90	S5688B
D602	001-0529-34	MA8062-L
D602	001-4301-34	HZU6.2B1
D603	001-0466-90	S5688B
D604	001-0516-90	MA111
D604	001-0517-90	1SS355
D605	001-0466-90	S5688B
D606	001-0516-90	MA111
D606	001-0517-90	1SS355
D607	001-2015-00	RL253
D608	001-0466-90	S5688B
D703	001-0356-91	1SS184
D703	001-0354-91	MA151WK
D1002	001-0422-38	MTZJ36
D1003	001-0529-44	MA8082-M
D1003	001-4301-44	HZU8.2B2
D1006	001-0589-91	1SS145
D1007	001-0589-91	1SS145
D1009	001-0584-35	MA8240
D1009	001-4302-35	UDZTE-17
D1010	001-0516-90	MA111
D1010	001-0517-90	1SS355
IC101	051-4603-90	TA2083FN (2532D,2548N)
IC102	051-4607-90	SAA6581T
IC104	051-6212-08	LC72191JM-TLM
IC201	051-3020-90	NJM4565V(2548N)
IC302	051-5027-00	LC75412WH
IC401	051-1014-08	TA7291F
IC403	051-3034-90	NJM4558V
IC404	052-3177-00	M30624MGA-E86GP (2530H,2532D)
IC404	052-3177-10	M30624MGA-147GP (2548N)
IC405	051-5436-08	S-80933ANMP-DDX
IC501	051-1834-00	LM2936
IC601	051-5418-08	S-80827ANMP-EDQ
IC701	051-1407-00	NJM4556AL
IC702	051-1407-00	NJM4556AL
IC703	051-1407-00	NJM4556AL
IC704	051-1407-00	NJM4556AL
IC705	051-3020-90	NJM4565V
IC707	051-3020-90	NJM4565V
J1001	074-1087-12	OUTLET SOCKET
J1002	074-1013-30	OUTLET SOCKET
J201	074-1236-10	OUTLET SOCKET (2548N)
J402	074-1192-22	22P
J601	074-1141-00	NS10+6
L101	010-2046-41	560uF (2532D,2548N)
L102	010-2198-65	0.1uH (2532D,2548N)
L103	010-2198-53	5.6uH (2532D,2548N)
L104	010-2003-04	COIL
L106	010-6009-76	22uH
L107	010-2312-52	0.27uH (2532D,2548N)
L151	010-6009-76	22uH
L401	010-3407-66	22uH
L601	010-8028-00	520uH
P1001	074-0898-18	18P
P1002	074-0898-06	OUTLET SOCKET (6P)
P201	076-0368-18	18P
P202	076-0368-06	PLUG(6P)
P402	074-0834-10	10P(2530H,2548N)
P402	076-0540-10	10P(2532D)
P403	076-0509-20	20P
Q101	193-0601-00	2SD601A (2532D,2548N)
Q101	192-2712-00	2SC2712 (2532D,2548N)
Q102	193-0601-00	2SD601A (2532D,2548N)
Q102	192-2712-00	2SC2712 (2532D,2548N)
Q103	125-2005-91	UN2211 (2532D,2548N)
Q103	125-2004-92	RN1402 (2532D,2548N)
Q104	125-2005-91	UN2211 (2532D,2548N)
Q104	125-2004-92	RN1402 (2532D,2548N)
Q105	192-2712-51	2SC2712G,L
Q105	192-2412-50	2SC2412K-R.S
Q106	125-2005-91	UN2211
Q106	125-2004-92	RN1402
Q107	192-2712-51	2SC2712G,L
Q107	192-2412-50	2SC2412K-R.S
Q109	190-1298-00	2SA1298
Q111	190-1298-00	2SA1298
Q113	193-0601-00	2SD601A
Q113	192-2712-00	2SC2712
Q201	125-2005-91	UN2211(2548N)
Q201	125-2004-92	RN1402(2548N)
Q202	125-9003-92	IMD3(2548N)
Q202	125-9002-92	RN4602(2548N)
Q401	125-2004-96	RN1406
Q401	125-2020-96	DTC143ZK
Q402	190-1428-00	2SA1428
Q404	125-2005-91	UN2211
Q404	125-2004-92	RN1402
Q405	191-0709-00	2SB709A-Q.R.S
Q405	190-1037-00	2SA1037
Q411	193-0601-00	2SD601A (2530H,2548N)
Q411	192-2712-00	2SC2712 (2530H,2548N)
Q415	125-2005-91	UN2211
Q415	125-2004-92	RN1402
Q416	193-0601-00	2SD601A
Q416	192-2712-00	2SC2712
Q417	193-0601-00	2SD601A
Q417	192-2712-00	2SC2712
Q418	125-0001-91	UN2111
Q418	125-0002-92	RN2402
Q418	125-0014-92	DTA114EK
Q501	103-2353-00	2SD2353
Q502	193-2118-00	2SD2118
Q503	193-1858-00	2SD1858
Q504	125-9003-92	IMD3
Q504	125-9002-92	RN4602
Q505	125-2005-91	UN2211
Q505	125-2004-92	RN1402
Q506	190-1048-00	2SA1048
Q506	190-1015-00	2SA1015
Q507	191-1205-60	2SB1205RST
Q508	125-9003-92	IMD3
Q508	125-9002-92	RN4602
Q603	193-0601-00	2SD601A
Q603	192-2712-00	2SC2712
Q604	125-2005-91	UN2211
Q604	125-2004-92	RN1402
Q605	191-0709-00	2SB709A-Q.R.S
Q605	190-1037-00	2SA1037
Q606	100-1359-00	2SA1359
Q607	125-2005-91	UN2211
Q607	125-2004-92	RN1402
Q608	191-0709-00	2SB709A-Q.R.S
Q608	190-1037-00	2SA1037
Q609	100-1359-00	2SA1359
Q701	193-0601-00	2SD601A
Q701	192-2712-00	2SC2712
Q703	193-0601-00	2SD601A
Q703	192-2712-00	2SC2712
Q704	191-0709-00	2SB709A-Q.R.S
Q704	190-1037-00	2SA1037
Q705	191-0709-00	2SB709A-Q.R.S
Q705	190-1037-00	2SA1037
Q706	191-0709-00	2SB709A-Q.R.S
Q706	190-1037-00	2SA1037
Q707	191-0709-00	2SB709A-Q.R.S
Q707	190-1037-00	2SA1037
Q1001	125-0001-91	UN2111
Q1001	125-0002-92	RN2402
Q1001	125-0014-92	DTA114EK
Q1003	193-0601-00	2SD601A
Q1003	192-2712-00	2SC2712
Q1006	125-2005-91	UN2211
Q1006	125-2004-92	RN1402
Q1007	125-9006-90	IMX1
Q1007	125-9007-90	HN1C01F
Q1008	125-0001-91	UN2111
Q1008	125-0002-92	RN2402
Q1008	125-0014-92	DTA114EK
Q1009	193-0601-00	2SD601A
Q1009	192-2712-00	2SC2712
Q1010	125-2005-91	UN2211
Q1010	125-2004-92	RN1402
Q1011	193-0601-00	2SD601A
Q1011	192-2712-00	2SC2712
R101	119-4741-15	1/16W 470k ohm (2532D,2548N)
R102	119-1031-15	1/16W 10k ohm (2532D,2548N)
R103	119-4741-15	1/16W 470k ohm (2532D,2548N)
R104	119-1021-15	1/16W 1k ohm (2532D,2548N)
R105	119-1021-15	1/16W 1k ohm (2532D,2548N)
R106	119-8201-15	1/16W 82 ohm (2532D,2548N)
R107	119-4741-15	1/16W 470k ohm (2532D,2548N)
R108	119-1031-15	1/16W 10k ohm (2532D,2548N)
R109	119-1031-15	1/16W 10k ohm (2532D,2548N)
R100	119-0000-05	1/16W 0 ohm JW(2530H)
R110	119-2231-15	1/16W 22k ohm (2532D,2548N)
R111	119-1031-15	1/16W 10k ohm (2532D,2548N)
R112	119-4741-15	1/16W 470k ohm (2530H)
R113	119-2221-15	1/16W 2.2k ohm

REF No.	PART No.	DESCRIPTION
R115	119-1021-15	1/16W 1k ohm
R116	119-1021-15	1/16W 1k ohm
R117	119-4721-15	1/16W 4.7k ohm
R119	119-1021-15	1/16W 1k ohm
R120	119-2221-15	1/16W 2.2k ohm
R121	119-4721-15	1/16W 4.7k ohm
R122	119-8201-15	1/16W 82 ohm
R124	119-3321-15	1/16W 3.3k ohm
R126	116-1501-15	1/8W 150 ohm
R127	116-1001-15	1/8W 10 ohm
R128	119-2221-15	1/16W 2.2k ohm
R129	119-2221-15	1/16W 2.2k ohm
R130	119-1031-15	1/16W 10k ohm
R131	119-1031-15	1/16W 10k ohm
R132	119-4721-15	1/16W 4.7k ohm
R133	119-1021-15	1/16W 1k ohm
R134	119-2221-15	1/16W 2.2k ohm
R135	119-1021-15	1/16W 1k ohm
R136	119-1021-15	1/16W 1k ohm
R137	116-2701-15	1/4W 27 ohm
R140	119-4721-15	1/16W 4.7k ohm (2532D,2548N)
R141	119-4731-15	1/16W 47k ohm
R142	119-1031-15	1/16W 10k ohm
R143	119-1031-15	1/16W 10k ohm
R161	119-0000-05	1/16W 0 ohm JW (2532D,2548N)
R162	119-0000-05	1/16W 0 ohm JW (2532D,2548N)
R201	116-1211-15	1/8W 120 ohm (2548N)
R203	119-1831-15	1/16W 18k ohm (2548N)
R206	119-1031-15	1/16W 10k ohm (2548N)
R207	119-1031-15	1/16W 10k ohm (2548N)
R208	032-0106-65	1/10W 100k ohm D (2548N)
R209	032-0106-65	1/10W 100k ohm D (2548N)
R210	032-0106-65	1/10W 100k ohm D (2548N)
R211	032-0106-65	1/10W 100k ohm D (2548N)
R212	032-0106-69	1/10W 39k ohm D (2548N)
R213	032-0106-69	1/10W 39k ohm D (2548N)
R214	032-0106-69	1/10W 39k ohm D (2548N)
R215	032-0106-69	1/10W 39k ohm D (2548N)
R217	119-0000-05	1/16W 0 ohm JW (2548N)
R218	119-0000-05	1/16W 0 ohm JW
R310	119-2731-15	1/16W 27k ohm
R311	119-2731-15	1/16W 27k ohm
R312	119-2731-15	1/16W 27k ohm
R313	119-2731-15	1/16W 27k ohm
R320	119-2731-15	1/16W 27k ohm
R321	119-2731-15	1/16W 27k ohm
R351	119-4721-15	1/16W 4.7k ohm
R352	119-4721-15	1/16W 4.7k ohm
R355	119-4721-15	1/16W 4.7k ohm
R356	119-4721-15	1/16W 4.7k ohm
R401	119-1031-15	1/16W 10k ohm
R402	119-1031-15	1/16W 10k ohm
R403	116-1221-15	1/8W 1.2k ohm
R404	116-1221-15	1/8W 1.2k ohm
R405	119-1031-15	1/16W 10k ohm
R406	116-1001-15	1/8W 10 ohm
R407	116-1001-15	1/8W 10 ohm
R408	116-1001-15	1/8W 10 ohm
R409	116-1001-15	1/8W 10 ohm
R410	119-2221-15	1/16W 2.2k ohm
R411	119-1041-15	1/16W 100k ohm (2530H,2548N)
R412	119-1021-15	1/16W 1k ohm
R414	119-4731-15	1/16W 47k ohm
R415	119-4731-15	1/16W 47k ohm (2532D)
R416	119-4731-15	1/16W 47k ohm
R417	119-1021-15	1/16W 1k ohm
R418	119-1041-15	1/16W 100k ohm
R419	119-4731-15	1/16W 47k ohm
R421	119-4731-15	1/16W 47k ohm
R423	119-4731-15	1/16W 47k ohm
R425	119-4731-15	1/16W 47k ohm
R428	119-4731-15	1/16W 47k ohm
R429	119-1021-15	1/16W 1k ohm
R431	119-4731-15	1/16W 47k ohm
R433	119-4731-15	1/16W 47k ohm
R434	119-2231-15	1/16W 22k ohm
R436	119-2231-15	1/16W 22k ohm
R437	032-0140-52	1/16W 33k ohm F
R438	119-2231-15	1/16W 22k ohm
R440	119-4731-15	1/16W 47k ohm
R442	119-1021-15	1/16W 1k ohm
R444	119-4731-15	1/16W 47k ohm
R445	032-0140-52	1/16W 33k ohm F
R447	119-4731-15	1/16W 47k ohm
R448	032-0140-00	1/10W 56k ohm F
R449	032-0140-00	1/10W 56k ohm F
R452	119-1031-15	1/16W 10k ohm
R453	119-4731-15	1/16W 47k ohm
R458	119-4731-15	1/16W 47k ohm
R459	119-4731-15	1/16W 47k ohm
R460	119-1041-15	1/16W 100k ohm
R463	119-4731-15	1/16W 47k ohm
R469	119-4731-15	1/16W 47k ohm
R472	119-4741-15	1/16W 470k ohm (2530H,2548N)
R479	119-4741-15	1/16W 470k ohm (2530H,2548N)
R480	119-4731-15	1/16W 47k ohm
R481	119-4731-15	1/16W 47k ohm
R487	119-4731-15	1/16W 47k ohm
R488	119-4731-15	1/16W 47k ohm
R489	119-4731-15	1/16W 47k ohm
R492	119-4731-15	1/16W 47k ohm
R493	119-4731-15	1/16W 47k ohm
R494	119-4731-15	1/16W 47k ohm
R495	119-1031-15	1/16W 10k ohm
R496	119-5631-15	1/16W 56k ohm
R497	119-1021-15	1/16W 1k ohm
R501	111-2211-98	1/4W 220 ohm
R502	116-3911-15	1/8W 390 ohm
R503	119-1031-15	1/16W 10k ohm
R504	116-1011-15	1/8W 100 ohm
R505	119-4721-15	1/16W 4.7k ohm
R506	119-1021-15	1/16W 1k ohm
R507	119-1031-15	1/16W 10k ohm
R508	116-7501-15	1/8W 75 ohm
R509	116-2201-15	1/8W 22 ohm
R510	116-2201-15	1/8W 22 ohm
R511	119-1041-15	1/16W 100k ohm
R601	119-4741-15	1/16W 470k ohm
R602	119-2741-15	1/16W 270k ohm
R605	119-1031-15	1/16W 10k ohm
R606	119-5611-15	1/16W 560 ohm
R607	116-1221-15	1/8W 1.2k ohm
R608	119-4721-15	1/16W 4.7k ohm
R609	111-6891-98	1/4W 6.8 ohm
R610	111-6891-98	1/4W 6.8 ohm
R611	116-1221-15	1/8W 1.2k ohm
R612	119-4721-15	1/16W 4.7k ohm
R613	116-1221-15	1/8W 1.2k ohm
R614	111-5691-98	1/4W 5.6 ohm
R615	111-5691-98	1/4W 5.6 ohm
R616	116-1531-15	1/8W 15k ohm
R617	114-2291-18	1W 2.2 ohm(2532D)
R618	119-0000-05	1/16W 0 ohm JW (2532D)
R701	119-4731-15	1/16W 47k ohm
R702	119-1041-15	1/16W 100k ohm
R703	119-1031-15	1/16W 10k ohm
R704	119-4731-15	1/16W 47k ohm
R705	119-1041-15	1/16W 100k ohm
R706	119-1031-15	1/16W 10k ohm
R708	119-5621-15	1/16W 5.6k ohm
R709	119-5621-15	1/16W 5.6k ohm
R710	119-5621-15	1/16W 5.6k ohm
R711	119-5621-15	1/16W 5.6k ohm
R714	119-3321-15	1/16W 3.3k ohm
R715	119-1031-15	1/16W 10k ohm
R716	119-1031-15	1/16W 10k ohm
R717	119-3321-15	1/16W 3.3k ohm
R718	119-1031-15	1/16W 10k ohm
R719	119-1031-15	1/16W 10k ohm
R720	119-3321-15	1/16W 3.3k ohm
R721	119-3321-15	1/16W 3.3k ohm
R722	119-2231-15	1/16W 22k ohm
R723	119-2231-15	1/16W 22k ohm
R724	119-1001-15	1/16W 10 ohm
R725	119-2231-15	1/16W 22k ohm
R726	119-2031-15	1/16W 20k ohm
R727	119-1001-15	1/16W 10 ohm
R728	119-3931-15	1/16W 39k ohm
R729	119-3931-15	1/16W 39k ohm
R730	119-1031-15	1/16W 10k ohm
R731	119-1031-15	1/16W 10k ohm
R732	119-2231-15	1/16W 22k ohm
R733	119-1001-15	1/16W 10 ohm
R734	119-2231-15	1/16W 22k ohm
R735	119-1001-15	1/16W 10 ohm
R736	119-1541-15	1/16W 150k ohm
R737	119-1541-15	1/16W 150k ohm
R738	119-2231-15	1/16W 22k ohm
R739	119-2231-15	1/16W 22k ohm
R740	119-1001-15	1/16W 10 ohm
R741	119-2231-15	1/16W 22k ohm
R742	119-2031-15	1/16W 20k ohm
R743	119-1001-15	1/16W 10 ohm
R744	119-3931-15	1/16W 39k ohm
R745	119-3931-15	1/16W 39k ohm
R746	119-1031-15	1/16W 10k ohm
R747	119-1031-15	1/16W 10k ohm
R748	119-2231-15	1/16W 22k ohm
R749	119-1001-15	1/16W 10 ohm
R750	119-2231-15	1/16W 22k ohm
R751	119-1001-15	1/16W 10 ohm
R756	119-1031-15	1/16W 10k ohm
R757	119-1031-15	1/16W 10k ohm
R758	119-4731-15	1/16W 47k ohm
R759	119-4731-15	1/16W 47k ohm
R1002	119-3011-15	1/16W 300 ohm
R1003	119-3011-15	1/16W 300 ohm
R1004	119-1031-15	1/16W 10k ohm
R1005	119-5631-15	1/16W 56k ohm
R1006	119-1021-15	1/16W 1k ohm
R1010	119-2231-15	1/16W 22k ohm
R1015	119-4731-15	1/16W 47k ohm
R1016	119-1031-15	1/16W 10k ohm
R1017	119-1031-15	1/16W 10k ohm
R1018	119-5631-15	1/16W 56k ohm
R1019	119-5631-15	1/16W 56k ohm
R1020	119-5621-15	1/16W 5.6k ohm
R1021	119-5621-15	1/16W 5.6k ohm
R1022	119-3011-15	1/16W 300 ohm
R1026	119-4731-15	1/16W 47k ohm
R1040	119-1031-15	1/16W 10k ohm

REF No.	PART No.	DESCRIPTION
R1041	119-5631-15	1/16W 56k ohm
R1042	119-1031-15	1/16W 10k ohm
R1043	119-4721-15	1/16W 4.7k ohm
R1044	119-1531-15	1/16W 15k ohm
R1045	119-3321-15	1/16W 3.3k ohm

REF No.	PART No.	DESCRIPTION
SUP101	060-0122-91	DSP-141N-S00B (2532D,2548N)
SUP102	060-0122-91	DSP-141N-S00B
VR101	012-5203-63	470k ohm (2532D,2548N)

REF No.	PART No.	DESCRIPTION
VR102	012-5203-56	10k ohm
X101	061-3013-90	4.332MHz
X102	061-1066-80	7.2MHz
X401	060-1505-50	10MHz

Escutcheon PWB(B2) section : PN-2532D

REF No.	PART No.	DESCRIPTION
D901	001-7069-90	LED YELLOW
D902	001-7069-90	LED YELLOW
D903	001-7069-90	LED YELLOW
D904	001-7069-90	LED YELLOW
D905	001-7069-90	LED YELLOW
D906	001-7069-90	LED YELLOW

REF No.	PART No.	DESCRIPTION
J901	074-1151-10	10P
R901	116-2221-15	1/8W 2.2k ohm
R902	116-2221-15	1/8W 2.2k ohm
R903	116-3321-15	1/8W 3.3k ohm
R904	116-6821-15	1/8W 6.8k ohm
R905	116-8211-15	1/8W 820 ohm

REF No.	PART No.	DESCRIPTION
R906	116-8211-15	1/8W 820 ohm
S901	013-7415-50	SPVG110400
S902	013-6201-50	SKPMAA
S903	013-6201-50	SKPMAA
S904	013-6201-50	SKPMAA

CD PWB section(B3) : CD changer mechanism

REF No.	PART No.	DESCRIPTION
C2	046-1022-58	1000pF
C3	168-1042-78	16V 0.1uF
C4	042-0636-54	4V220uF
C5	168-1042-78	16V 0.1uF
C6	046-1032-78	0.01uF
C7	168-1042-78	16V 0.1uF
C8	178-4742-78	0.47uF
C9	178-2242-78	0.22uF
C10	168-1042-78	16V 0.1uF
C11	168-1042-78	16V 0.1uF
C12	168-1042-78	16V 0.1uF
C13	046-2232-78	0.022uF
C14	168-5612-55	560pF
C15	168-1042-78	16V 0.1uF
C16	046-2212-58	220pF
C17	046-2212-58	220pF
C18	168-1222-55	1200pF
C19	046-3322-58	3300pF
C20	168-3932-78	0.039uF
C21	168-3932-78	0.039uF
C22	042-0416-52	10V10uF TAN
C25	178-1052-78	1uF
C26	042-0472-91	16V47uF
C27	178-3342-78	0.33uF
C29	168-2732-55	16V 0.027uF
C30	042-0416-58	4V100uF
C31	042-0636-52	4V47uF
C32	046-1022-58	1000pF
C33	046-3322-58	3300pF
C34	168-2732-55	16V 0.027uF
C35	178-2742-78	0.27uF
C36	178-1052-78	1uF
C37	168-1042-78	16V 0.1uF
C38	042-0472-91	16V47uF

REF No.	PART No.	DESCRIPTION
C39	042-0636-50	6.3V100uF
C40	045-1211-50	120pF
C41	045-5601-50	56pF
C42	168-1042-78	16V 0.1uF
C43	042-0636-52	4V47uF
C50	168-1042-78	16V 0.1uF
C51	168-1042-78	16V 0.1uF
C60	168-5612-55	560pF
D1	001-0516-90	MA111
IC1	051-6365-00	MN662785TBUC
IC2	051-9318-00	MSM51V17400D-60TS-K
IC3	051-6060-08	BD7961FM-E2
IC4	051-5711-90	AN8882SB-E1
J1	074-1189-95	45P
J4	074-1138-56	6P
J5	074-1201-65	15P
J6	074-1059-76	26P
L2	010-3050-93	10uH
Q2	131-1188-00	2SB1188
Q3	131-1188-00	2SB1188
R2	033-1041-15	1/16W 100k ohm
R4	033-3311-15	1/16W 330 ohm
R5	033-1041-15	1/16W 100k ohm
R6	033-3931-15	1/16W 39k ohm
R7	033-1041-15	1/16W 100k ohm
R8	033-5611-15	1/16W 560 ohm
R9	033-5611-15	1/16W 560 ohm
R10	033-1011-15	1/16W 100 ohm
R11	033-3911-15	1/16W 390 ohm
R12	033-2221-15	1/16W 2.2k ohm
R13	033-6831-15	1/16W 68k ohm
R14	033-5621-15	1/16W 5.6k ohm
R15	033-1021-15	1/16W 1k ohm

REF No.	PART No.	DESCRIPTION
R16	033-5631-15	1/16W 56k ohm
R17	033-1031-15	1/16W 10k ohm
R18	033-1031-15	1/16W 10k ohm
R19	033-5621-15	1/16W 5.6k ohm
R20	033-6831-15	1/16W 68k ohm
R21	033-5621-15	1/16W 5.6k ohm
R22	033-1031-15	1/16W 10k ohm
R23	033-1031-15	1/16W 10k ohm
R24	033-4731-15	1/16W 47k ohm
R25	033-3931-15	1/16W 39k ohm
R26	033-6831-15	1/16W 68k ohm
R27	033-6831-15	1/16W 68k ohm
R28	033-1031-15	1/16W 10k ohm
R29	033-2201-15	1/16W 22 ohm
R31	033-8211-15	1/16W 820 ohm
R32	033-5631-15	1/16W 56k ohm
R33	033-6831-15	1/16W 68k ohm
R34	033-3331-15	1/16W 33k ohm
R35	033-6831-15	1/16W 68k ohm
R38	033-3931-15	1/16W 39k ohm
R39	033-1831-15	1/16W 18k ohm
R40	117-1001-15	1/10W 10 ohm
R41	033-6821-15	1/16W 6.8k ohm
R42	033-6821-15	1/16W 6.8k ohm
R43	033-1241-15	1/16W 120k ohm
R44	033-6831-15	1/16W 68k ohm
R45	116-4711-15	1/8W 470 ohm
R46	117-1811-15	1/10W 180 ohm
R47	116-4711-15	1/8W 470 ohm
R48	033-1031-15	1/16W 10k ohm
R49	033-1011-15	1/16W 100 ohm
R60	033-1031-15	1/16W 10k ohm
TM1	073-0768-90	TERMIMAL
X1	060-1527-90	33.8688MHz

Side PWB section(B4) : CD changer mechanism

REF No.	PART No.	DESCRIPTION
C101	168-1045-56	0.1uF
C102	168-1032-55	0.01uF
C104	163-1073-15	6.3V100uF
C106	163-1063-35	16V10uF
C107	163-1073-15	6.3V100uF
C108	168-1042-78	16V 0.1uF
C109	168-1042-78	16V 0.1uF
C110	168-1042-78	16V 0.1uF
C111	163-1073-35	16V100uF
C112	168-2722-55	2700pF
C113	163-2263-35	16V22uF
C114	163-2263-35	16V22uF
C115	166-3311-50	330pF CH
C116	166-3311-50	330pF CH
C117	166-1011-50	100pF CH
C118	166-1011-50	100pF CH

REF No.	PART No.	DESCRIPTION
C119	168-2722-55	2700pF
C120	168-1022-55	1000pF
C121	163-2263-35	16V22uF
C122	168-1022-55	1000pF
C123	163-2263-35	16V22uF
C124	042-0403-55	16V33uF
C125	042-0403-55	16V33uF
C501	163-1063-35	16V10uF
C502	168-1045-56	0.1uF
C503	168-4735-56	0.047uF
C504	168-1045-56	0.1uF
D100	001-0516-90	MA111
D103	001-0504-07	HZS4BLL
D104	001-0516-90	MA111
D105	001-0529-31	MA8056-L
IC501	051-9400-28	BR93LC46F-WE2

REF No.	PART No.	DESCRIPTION
IC502	052-5047-21	M30621MCM-5N4GP
IC503	051-5418-08	S-80827ANMP-EDQ
IC504	051-1407-90	NJM4556AM
J101	074-1189-95	45P
J102	074-1191-22	22P
L101	010-3071-65	18uH
L102	010-3407-68	33uH J
P101	076-0478-55	PLUG
Q101	125-2004-92	RN1402
Q102	131-1188-50	2SB1188PQR
Q103	193-1758-00	2SD1758TK-P,Q,R
Q104	193-1758-00	2SD1758TK-P,Q,R
Q105	125-0014-92	DTA114EK
Q106	125-2004-92	RN1402
Q502	190-1162-00	2SA1162

REF No.	PART No.	DESCRIPTION
Q503	190-1162-00	2SA1162
Q504	192-2712-00	2SC2712
Q505	125-2004-92	RN1402
Q506	125-0014-92	DTA114EK
Q507	125-0002-92	RN2402
Q508	192-2712-00	2SC2712
R101	119-4711-15	1/16W 470 ohm
R102	119-2231-15	1/16W 22k ohm
R103	119-1821-15	1/16W 1.8k ohm
R104	119-1831-15	1/16W 18k ohm
R105	116-1211-15	1/8W 120 ohm
R106	119-1041-15	1/16W 100k ohm
R107	119-4731-15	1/16W 47k ohm
R108	119-1031-15	1/16W 10k ohm
R109	119-1031-15	1/16W 10k ohm
R110	119-4741-15	1/16W 470k ohm
R111	119-4741-15	1/16W 470k ohm
R112	119-2731-15	1/16W 27k ohm
R113	119-2731-15	1/16W 27k ohm
R114	119-2731-15	1/16W 27k ohm
R115	119-2731-15	1/16W 27k ohm

REF No.	PART No.	DESCRIPTION
R116	119-5611-15	1/16W 560 ohm
R117	119-5611-15	1/16W 560 ohm
R118	119-4731-15	1/16W 47k ohm
R119	119-4731-15	1/16W 47k ohm
R120	119-3941-15	1/16W 390k ohm
R121	119-1041-15	1/16W 100k ohm
R123	119-1041-15	1/16W 100k ohm
R124	119-1041-15	1/16W 100k ohm
R125	119-1041-15	1/16W 100k ohm
R504	119-5621-15	1/16W 5.6k ohm
R505	119-1031-15	1/16W 10k ohm
R506	119-1041-15	1/16W 100k ohm
R507	119-0000-05	1/16W 0 ohm
R509	119-4731-15	1/16W 47k ohm
R510	119-1031-15	1/16W 10k ohm
R511	119-1031-15	1/16W 10k ohm
R512	050-0145-54	1/16W 47k ohmx4
R513	119-1041-15	1/16W 100k ohm
R514	119-2241-15	1/16W 220k ohm
R515	119-2241-15	1/16W 220k ohm
R516	119-2241-15	1/16W 220k ohm

REF No.	PART No.	DESCRIPTION
R517	119-1041-15	1/16W 100k ohm
R518	119-2241-15	1/16W 220k ohm
R522	119-1041-15	1/16W 100k ohm
R524	119-1041-15	1/16W 100k ohm
R526	119-4731-15	1/16W 47k ohm
R529	119-1021-15	1/16W 1k ohm
R531	119-1021-15	1/16W 1k ohm
R532	119-1021-15	1/16W 1k ohm
R533	119-1021-15	1/16W 1k ohm
R535	119-2231-15	1/16W 22k ohm
R536	119-2231-15	1/16W 22k ohm
R538	119-1031-15	1/16W 10k ohm
R539	119-5631-15	1/16W 56k ohm
R541	119-1021-15	1/16W 1k ohm
R542	119-4721-15	1/16W 4.7k ohm
R543	119-1041-15	1/16W 100k ohm
R544	119-1041-15	1/16W 100k ohm
R545	119-1041-15	1/16W 100k ohm
X501	060-1505-50	10MHz

Sensor PWB section(B5) : CD changer mechanism

REF No.	PART No.	DESCRIPTION
PT3	060-0252-01	PT4850F
PT4	060-0252-01	PT4850F

REF No.	PART No.	DESCRIPTION
PT5	060-0252-01	PT4850F
PT6	060-0252-01	PT4850F

REF No.	PART No.	DESCRIPTION
S1	013-7414-50	SPVG22

PIM-FPC section(B6) : CD changer mechanism

REF No.	PART No.	DESCRIPTION
IC5	051-5806-02	GPIS95

Driver PWB section(B7) : CD changer mechanism

REF No.	PART No.	DESCRIPTION
C1	168-1045-56	0.1uF
C2	163-1073-35	16V100uF
D1	001-0529-32	MA8056-M
IC1	051-6044-18	BA6920FP-Y

REF No.	PART No.	DESCRIPTION
J1	074-1239-76	26P
J2	074-1100-59	9P
R1	033-1021-15	1/16W 1k ohm
R2	032-0104-59	1/4W 2.2 ohm

REF No.	PART No.	DESCRIPTION
R3	032-0104-59	1/4W 2.2 ohm
S1	013-7412-50	SPVG21

PIV-FPC section(B8) : CD changer mechanism

REF No.	PART No.	DESCRIPTION
IC6	051-5806-01	GPIS93

LED-L-PWB section(B9) : CD changer mechanism

REF No.	PART No.	DESCRIPTION
LED3	001-7042-00	GL4800

REF No.	PART No.	DESCRIPTION
LED4	001-7042-00	GL4800

LED-R-PWB section(B10) : CD changer mechanism

REF No.	PART No.	DESCRIPTION
LED5	001-7042-00	GL4800

REF No.	PART No.	DESCRIPTION
LED6	001-7042-00	GL4800

L-Motor-FPC section(B11) : CD changer mechanism

REF No.	PART No.	DESCRIPTION
M1	SMA-186-100	LOADING

M/S-FPC section(B12) : CD changer mechanism

REF No.	PART No.	DESCRIPTION
M2	SMA-185-100	SPINDLE

REF No.	PART No.	DESCRIPTION
M3	SMA-184-100	SLED

REF No.	PART No.	DESCRIPTION
S2	013-7414-50	SPVG22

Side PWB(B13) section:Tape mechanism

REF No.	PART No.	DESCRIPTION
C1	168-5612-05	560pF
C2	168-5612-05	560pF
C3	168-5612-05	560pF
C4	168-5612-05	560pF
C5	178-1055-79	1uF
C6	168-1232-05	0.012uF
C7	168-1232-05	0.012uF
C8	168-4732-78	0.047uF
C9	168-4732-78	0.047uF
C10	168-5612-05	560pF
C11	168-5612-05	560pF
C12	168-1042-78	0.1uF
C13	168-1042-78	0.1uF
C14	168-1032-05	0.01uF
C15	163-4753-50	35V4.7uF

REF No.	PART No.	DESCRIPTION
C16	168-1032-05	0.01uF
C17	178-4745-79	0.47uF
C18	168-1042-78	0.1uF
C19	163-2263-30	16V22uF
IC1	051-5204-00	HA12216F
J1	074-0898-10	10P
L1	010-2198-26	0.047uH
L2	010-2198-26	0.047uH
R1	119-2731-10	1/16W 27k ohm
R2	119-2731-10	1/16W 27k ohm
R3	119-2731-10	1/16W 27k ohm
R4	119-2731-10	1/16W 27k ohm
R5	119-1811-10	1/16W 180 ohm
R6	119-1811-10	1/16W 180 ohm
R7	119-3341-10	1/16W 330k ohm

REF No.	PART No.	DESCRIPTION
R8	119-3341-10	1/16W 330k ohm
R9	119-1131-15	1/16W 11k ohm
R10	119-1131-15	1/16W 11k ohm
R11	119-1531-10	1/16W 15k ohm
R12	119-1531-10	1/16W 15k ohm
R13	032-0140-80	1/16W 18k ohm F
R14	119-1531-10	1/16W 15k ohm
R15	119-1031-10	1/16W 10k ohm
R16	119-3921-10	1/16W 3.9k ohm
R17	119-1241-10	1/16W 120k ohm
R18	119-2231-10	1/16W 22k ohm
VR1	012-6014-56	10kohm
VR2	012-6014-56	10kohm

Bottom PWB(B14) section:Tape mechanism

REF No.	PART No.	DESCRIPTION
IC2	051-1776-00	NJL5801K

REF No.	PART No.	DESCRIPTION
SW1	013-3953-01	SPPB32

REF No.	PART No.	DESCRIPTION
SW2	013-3951-32	MODE SWITCH

Rear PWB(B15) section:Tape mechanism

REF No.	PART No.	DESCRIPTION
P1	076-0368-10	10P
J2	074-1012-20	20P

REF No.	PART No.	DESCRIPTION
R19	111-5611-91	1/4WS 560 ohm
S1	013-3906-00	SPPB51

BLOCK DIAGRAM

Main section

