


EXPLODED VIEW/PARTS LIST

Main section

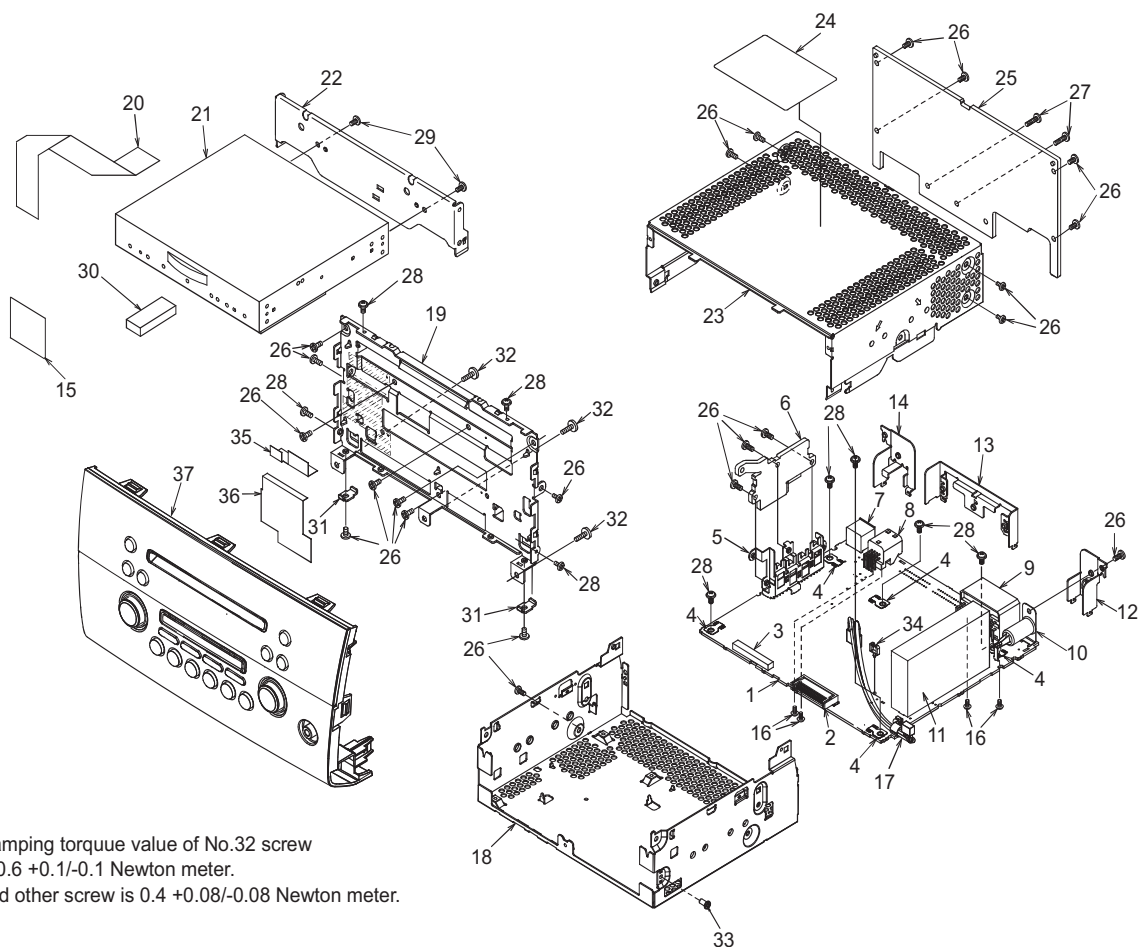


* Clamping torque value of No.32 screw
is 0.6 +0.1/-0.1 Newton meter.
And other screw is 0.4 +0.08/-0.08 Newton meter.

Note)Some parts depend on each model.The modelname is specified in the description.

3234NA :PS-3234N-A, 3234NB : PS3234N-B ,3235NA : PS-3235N-A, 3235NB :PS-3235N-B.

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	-----	Main PWB	1	21	929-5026-82	CD MECH	1
2	076-3011-74	PLUG (24P)	1	22	331-4123-20	MECH BRKT	1
3	074-1189-88	SOCKET (38P)	1	23	310-1826-50	UPPER CASE	1
4	073-0762-90	TERMINAL	5	24	276-0610-16 276-0610-17 276-0610-18 276-0610-19	SETPLATE (3234NA) SETPLATE (3234NB) SETPLATE (3235NA) SETPLATE (3235NB)	1 1 1 1
5	331-4126-00	TR HOLDER	1	25	313-1962-00	HEAT SINK	1
6	313-1966-00	SUB HEAT SINK	1	26	714-2606-8B	MACHINE SCREW (M2.6x6)	22
7	074-1194-00	SOCKET(13P Ce-NET)	1	27	714-2610-89	MACHINE SCREW (M2.6x10)	2
8	074-1302-08	SOCKET (8P)	1	28	716-0878-50	IT SCREW (M2.6x5)	9
9	074-4007-20	SOCKET (20P)	1	29	714-2603-8B	MACHINE SCREW (M2.6x3)	2
10	092-0702-50	ANT-RECEPT	1	30	345-5994-00	CUSHION RUBBER	1
11	941-0236-00	TUNER PACK	1	31	331-4193-20	SU-PLATE	2
12	331-4549-00	ANT HOLDER	1	32	716-1553-50	P-TIGHT SCREW (3x8)	3
13	331-4548-00	IC HOLDER	1	33	780-2604-51	SP-SCREW (M2.6x4)	1
14	331-4547-00	SOCKET HOLDER	1	34	335-3701-00	MINI SADDLE	1
15	347-8738-00	PROTECTOR	1	35	347-8737-00	PROTECTOR	1
16	778-3006-00	TAP-SCREW (3x6)	4	36	347-8746-00	PROTECTOR	1
17	854-8264-50	HARNESS	1	37	-----	Escutcheon section Refer to page 4	1
18	311-1986-00	LOWER CASE	1				
19	309-0839-02	FRONT PLATE	1				
20	816-3034-50	FLAT WIRE	1				

Escutcheon section

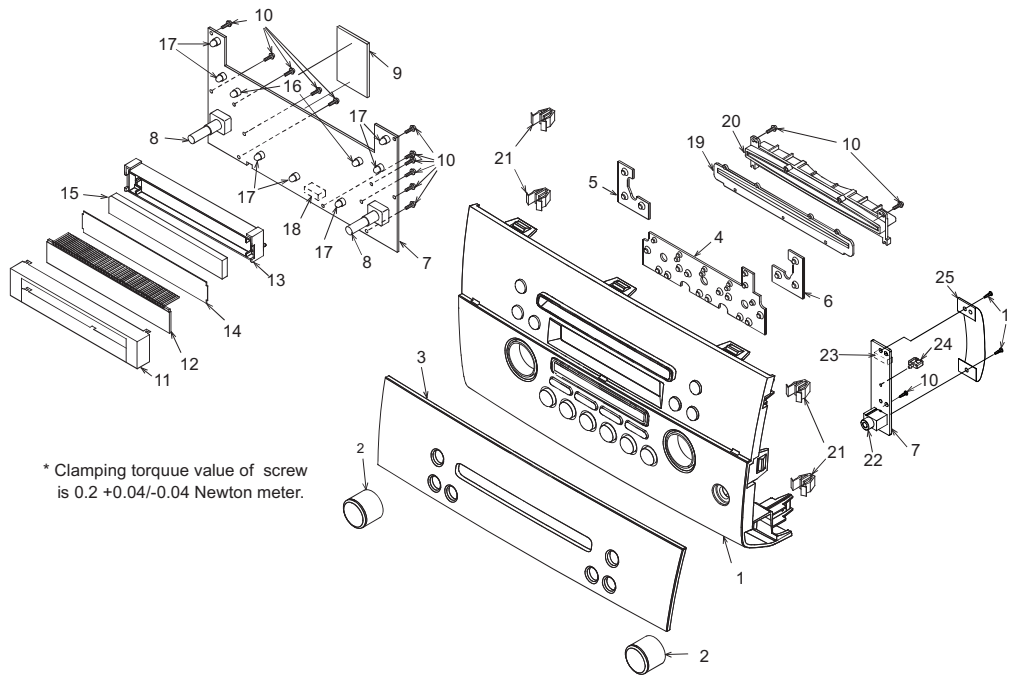

Note)Some parts depend on each model.The modelname is specified in the description.

3234NA :PS-3234N-A, 3234NB : PS3234N-B ,3235NA : PS-3235N-A, 3235NB :PS-3235N-B.

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	940-8467-00	ESCUTCHEON ASSY	1	13	335-7917-00	LCD HOLDER	1
2	380-5610-10	KNOB	2	14	335-7322-20	COLOR FILTER	1
3	373-1186-50	DIAL COVER (3234NA,3235NA) (COLOR:DARK METALLIC)	1	15	335-7323-20	LCD ILLUMI	1
	373-1186-60	DIAL COVER (3234NB,3235NB) (COLOR:SILVER HAIRLINE)	1	16	017-0506-00	PL LAMP (8V 105mA AMBER)	2
4	345-5782-01	RUBBER SW (CENTER)	1	17	017-0507-00	PL LAMP (14V 40mA ORANGE)	7
5	345-5783-00	RUBBER SW (LEFT)	1	18	074-3013-74	OUTLETSOCKET	1
6	345-5784-00	RUBBER SW (RIGHT)	1	19	346-0206-00	LATHER SHEET	1
7	-----	Switch PWB	1	20	335-7292-01	DISC GUIDE	1
8	016-0018-17	VR W/SHAFT	2	21	335-7321-00	CLIP	4
9	345-6006-00	PROTECTOR	1	22	075-9024-00	AUX JACK	1
10	716-0778-51	P-TITE SCREW (2x6)	16	23	076-6020-05	SOCKET (5P)	1
11	331-3883-00	LCD COVER	1	24	335-3700-00	MINI SADOLE	1
12	379-1362-50	INDICATOR (LCD)	1	25	347-8739-00	PROTECTOR	1

ELECTRICAL PARTS LIST

Main PWB section (B1)

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
ANT101	092-0702-50	ANT-RECEPT	C151	168-2232-55	0.022uF K	C302	178-1052-78	1uF
BL101	941-0236-00	AM/FM TUNER	C153	168-2232-55	0.022uF K	C305	178-1052-78	1uF
C108	166-8201-50	82pF CH	C160	168-1042-78	16V 0.1uF K	C306	178-1052-78	1uF
C122	166-2211-50	220pF CH	C169	168-1522-55	1500pF K	C307	178-1052-78	1uF
C123	043-0554-90	25V 10uF	C212	188-4763-38	16V 47uF	C308	178-1052-78	1uF
C126	163-1063-35	16V 10uF	C222	168-1042-78	16V 0.1uF K	C309	168-8232-78	0.082uF K
C127	166-1007-50	10pF CH	C243	188-4763-38	16V 47uF	C310	168-8232-78	0.082uF K
C129	168-2232-55	0.022uF K	C244	168-1042-78	16V 0.1uF K	C311	188-2253-68	50V 2.2uF
C132	163-1063-35	16V 10uF	C245	168-1042-78	16V 0.1uF K	C312	188-2253-68	50V 2.2uF
C133	168-2232-55	0.022uF K	C271	188-4763-38	16V 47uF	C313	188-2253-68	50V 2.2uF
C138	168-1052-78	16V 1uF K	C273	043-0328-90	0.1uF	C314	188-2253-68	50V 2.2uF
C142	168-4732-78	0.047uF K	C274	189-2273-29	10V 220uF	C318	168-1522-55	1500pF K
C143	168-4732-78	0.047uF K	C276	043-0328-90	0.1uF	C319	168-1522-55	1500pF K
C144	043-0548-50	10V 2.2uF	C301	178-1052-78	1uF	C334	166-4711-50	470pF CH

Note) Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C335	166-4711-50	470pF CH	C741	043-0328-90	0.1uF	Q712	193-1819-50	2SD1819
C336	166-4711-50	470pF CH	C744	188-1073-28	10V 100uF	Q761	192-5810-00	2SC5810 TE12L
C337	166-4711-50	470pF CH	C761	188-1063-38	16V 10uF	Q762	125-0021-91	DTA114EUA
C346	188-1073-28	10V 100uF	C762	188-1063-38	16V 10uF	Q762	125-0025-92	RN2302
C352	168-1042-78	16V 0.1uF K	C771	188-1073-28	10V 100uF	Q762	125-0034-92	RT1P141M
C353	042-1562-15	10V 220uF	C772	188-1063-38	16V 10uF	Q763	125-2027-91	DTC114EUA
C354	166-2201-50	22pF CH	C811	172-1041-15	0.1uF	Q763	125-2032-92	RN1302
C355	166-2201-50	22pF CH	C821	188-1063-38	16V 10uF	Q763	125-2041-92	RT1N141M
C356	166-1007-50	10pF CH	CCT501	050-0140-54	1/32W 1k ohm x4J	Q771	192-5886-00	2SC5886
C357	166-1007-50	10pF CH	CCT504	050-0140-54	1/32W 1k ohm x4J	Q773	192-4116-51	2SC4116 G,L
C358	188-1063-38	16V 10uF	CCT505	050-0140-54	1/32W 1k ohm x4J	Q773	192-4155-51	2SC4155A
C359	188-1063-38	16V 10uF	D106	001-0580-90	1SS352	Q773	193-1819-50	2SD1819
C360	188-1063-38	16V 10uF	D391	001-0580-90	1SS352	Q776	125-0021-91	DTA114EUA
C361	188-1063-38	16V 10uF	D505	001-0580-90	1SS352	Q776	125-0025-92	RN2302
C362	166-2201-50	22pF CH	D506	001-2403-90	M1F60	Q776	125-0034-92	RT1P141M
C363	163-1063-35	16V 10uF	D507	001-4301-25	HZU4.7B1	Q777	125-2027-91	DTC114EUA
C364	163-1063-35	16V 10uF	D508	001-0466-90	S5688B	Q777	125-2032-92	RN1302
C365	168-1042-78	16V 0.1uF K	D509	001-0504-36	HZS7 A1L	Q777	125-2041-92	RT1N141M
C367	166-1007-50	10pF CH	D701	001-0424-31	MA4180	Q821	190-2071-00	2SA2071
C368	163-1063-35	16V 10uF	D702	001-0424-31	MA4180	Q822	192-4116-51	2SC4116 G,L
C369	166-2201-50	22pF CH	D703	001-0424-31	MA4180	Q822	192-4155-51	2SC4155A
C370	163-1063-35	16V 10uF	D711	001-0466-90	S5688B	Q822	193-1819-50	2SD1819
C371	166-1007-50	10pF CH	D712	001-0466-90	S5688B	R107	119-5131-15	1/10W 51k ohm
C391	168-1042-78	16V 0.1uF K	D731	001-0466-90	S5688B	R121	119-4731-15	1/10W 47k ohm
C392	168-1042-78	16V 0.1uF K	D761	001-0504-39	HZS7 B2L	R123	119-0000-05	1/10W 0 ohm JW
C393	168-1042-78	16V 0.1uF K	D771	001-0347-39	MA4068H	R125	119-0000-05	1/10W 0 ohm JW
C394	168-1042-78	16V 0.1uF K	D772	001-0347-36	MA4062H	R126	119-4731-15	1/10W 47k ohm
C395	168-1032-55	0.01uF K	D801	001-0592-00	RM4Z	R127	119-4731-15	1/10W 47k ohm
C396	163-1053-65	50V 1uF	D851	001-4301-68	HZU18B1	R128	119-1011-15	1/10W 100 ohm
C397	042-1624-00	16V 4700uF	IC104	051-3519-90	NJU7771F05-TE2	R130	119-0000-05	1/10W 0 ohm JW
C398	163-1063-35	16V 10uF	IC241	051-3395-90	NJU7780U1-15-TES	R131	119-0000-05	1/10W 0 ohm JW
C399	163-1053-65	50V 1uF	IC271	051-3333-00	NJM2396F05	R132	119-1011-15	1/10W 100 ohm
C400	166-2201-50	22pF CH	IC272	051-3366-00	NJM2396F08	R134	119-0000-05	1/10W 0 ohm JW
C401	166-3911-50	390pF CH	IC351	051-3034-90	NJM4558V	R139	119-5621-15	1/10W 5.6k ohm
C402	043-0570-90	16V 2.2uF K	IC352	051-3034-90	NJM4558V	R140	119-5621-15	1/10W 5.6k ohm
C403	168-5632-78	16V 0.056uF K	IC391	051-2040-00	TA8276H	R221	119-4731-15	1/10W 47k ohm
C404	043-0570-90	16V 2.2uF K	IC401	051-5046-90	CL7639V20	R271	119-4731-15	1/10W 47k ohm
C405	188-1063-38	16V 10uF	IC501	052-3227-21	M30624MGP-E68GP	R275	119-0000-05	1/10W 0 ohm JW
C406	188-1073-28	10V 100uF	IC502	051-0869-58	NJM2103M	R301	119-1021-15	1/10W 1k ohm
C407	168-1042-78	16V 0.1uF K	IC503	051-9402-68	BR93L56F-W	R302	119-1021-15	1/10W 1k ohm
C408	166-3911-50	390pF CH	IC504	051-6600-58	HA12187FP	R305	119-1021-15	1/10W 1k ohm
C409	043-0570-90	16V 2.2uF K	IC741	051-3369-00	NJM2388F84	R306	119-1021-15	1/10W 1k ohm
C410	168-5632-78	16V 0.056uF K	J221	074-1189-88	38P	R307	119-1021-15	1/10W 1k ohm
C411	043-0570-90	16V 2.2uF K	J701	074-1194-00	13P CE-NET	R308	119-1021-15	1/10W 1k ohm
C412	168-1042-78	16V 0.1uF K	J721	074-1302-08	8P	R309	119-1021-15	1/10W 1k ohm
C417	178-4742-78	0.47uF	J801	074-4007-20	20P	R310	119-1021-15	1/10W 1k ohm
C418	168-4722-55	4700pF K	L104	010-2003-04	30uH	R311	119-5631-15	1/10W 56k ohm
C419	178-4742-78	0.47uF	L135	010-6009-76	22uH J	R312	119-5631-15	1/10W 56k ohm
C420	168-4722-55	4700pF K	L501	010-6009-76	22uH J	R313	119-5631-15	1/10W 56k ohm
C421	178-4742-78	0.47uF	L502	010-6009-76	22uH J	R314	119-5631-15	1/10W 56k ohm
C422	168-4722-55	4700pF K	L801	010-8026-00	210uH	R323	119-0000-05	1/10W 0 ohm JW
C423	178-4742-78	0.47uF	P501	076-3011-74	24P	R324	119-0000-05	1/10W 0 ohm JW
C424	168-4722-55	4700pF K	Q106	125-2026-91	UNR5211G	R325	119-0000-05	1/10W 0 ohm JW
C501	168-1042-78	16V 0.1uF K	Q107	125-2026-91	UNR5211G	R326	119-0000-05	1/10W 0 ohm JW
C502	188-4763-18	6.3V 47uF	Q391	125-2027-93	DTC144EUA	R351	119-8211-15	1/10W 820 ohm
C503	168-1032-55	0.01uF K	Q502	190-2071-00	2SA2071	R352	119-1021-15	1/10W 1k ohm
C504	168-1032-55	0.01uF K	Q503	192-4116-51	2SC4116 G,L	R353	032-0140-50	1/10W 10k ohm F
C505	168-1032-55	0.01uF K	Q503	192-4155-51	2SC4155A	R354	032-0140-50	1/10W 10k ohm F
C506	168-1042-78	16V 0.1uF K	Q503	193-1819-50	2SD1819	R355	032-0140-50	1/10W 10k ohm F
C507	188-1053-68	50V 1uF	Q504	192-4116-51	2SC4116 G,L	R356	032-0140-50	1/10W 10k ohm F
C509	168-1022-55	1000pF K	Q504	192-4155-51	2SC4155A	R357	032-0140-50	1/10W 10k ohm F
C510	168-1022-55	1000pF K	Q504	193-1819-50	2SD1819	R358	032-0140-50	1/10W 10k ohm F
C511	168-1042-78	16V 0.1uF K	Q505	192-4116-51	2SC4116 G,L	R359	032-0140-50	1/10W 10k ohm F
C512	168-1042-78	0.01uF K	Q505	192-4155-51	2SC4155A	R360	032-0140-50	1/10W 10k ohm F
C513	189-1073-29	10V 100uF	Q505	193-1819-50	2SD1819	R362	032-0140-50	1/10W 10k ohm F
C514	168-1042-78	16V 0.1uF K	Q506	193-2118-50	2SD2118F5 R,S	R363	032-0140-50	1/10W 10k ohm F
C515	166-1011-50	100pF CH	Q701	192-4116-51	2SC4116 G,L	R364	032-0140-50	1/10W 10k ohm F
C516	188-1063-38	16V 10uF	Q701	192-4155-51	2SC4155A	R365	032-0140-50	1/10W 10k ohm F
C517	042-0559-00	5.5V 0.1F	Q701	193-1819-50	2SD1819	R368	032-0140-50	1/10W 10k ohm F
C722	168-1042-78	16V 0.1uF K	Q711	190-2071-00	2SA2071	R370	032-0140-50	1/10W 10k ohm F
C731	172-1041-15	0.1uF	Q712	192-4116-51	2SC4116 G,L	R371	032-0140-50	1/10W 10k ohm F
C732	188-1053-68	50V 1uF	Q712	192-4155-51	2SC4155A	R372	032-0140-50	1/10W 10k ohm F


Note)Some parts depend on each model.The modelname is specified in the description.
PS3234N:PS-3234N-A,PS-3235N-B 3235NA :PS-3235N-A,PS-3235N-B

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R391	119-5631-15	1/10W 56k ohm	R538	119-1031-15	1/10W 10k ohm	R726	119-1021-15	1/10W 1k ohm
R392	119-1221-15	1/10W 1.2k ohm	R539	119-1031-15	1/10W 10k ohm	R731	116-5621-15	1/4W 5.6k ohm
R393	119-2221-15	1/10W 2.2k ohm	R540	119-4731-15	1/10W 47k ohm	R732	116-4721-15	1/4W 4.7k ohm
R394	119-2221-15	1/10W 2.2k ohm	R541	119-5621-15	1/10W 5.6k ohm	R761	032-0092-56	1/8W 22k ohm F
R395	119-2221-15	1/10W 2.2k ohm	R542	119-2231-15	1/10W 22k ohm	R762	032-0092-31	1/8W 150k ohm F
R396	119-2221-15	1/10W 2.2k ohm	R543	119-1031-15	1/10W 10k ohm	R763	032-0092-51	1/8W 1k ohm F
R397	119-1031-15	1/10W 10k ohm	R544	119-4731-15	1/10W 47k ohm	R764	119-1221-15	1/10W 1.2k ohm
R400	119-1031-15	1/10W 10k ohm	R545	119-6831-15	1/10W 68k ohm	R771	119-0000-05	1/10W 0 ohm JW
R401	119-2731-15	1/10W 27k ohm	R546	119-1021-15	1/10W 1k ohm	R772	119-2231-15	1/10W 22k ohm
R402	119-2021-15	1/10W 2k ohm	R547	119-1021-15	1/10W 1k ohm	R773	116-1021-15	1/4W 1k ohm
R403	119-2731-15	1/10W 27k ohm	R548	119-1031-15	1/10W 10k ohm	R774	119-2231-15	1/10W 22k ohm
R404	119-2021-15	1/10W 2k ohm	R549	119-3341-15	1/10W 330k ohm	R781	119-0000-05	1/10W 0 ohm JW
R405	119-0000-05	1/10W 0 ohm JW	R550	032-0140-22	1/10W 68k ohm F	R782	119-0000-05	1/10W 0 ohm JW
R502	119-4721-15	1/10W 4.7k ohm	R551	032-0140-00	1/10W 56k ohm F	R793	119-0000-05	1/10W 0 ohm JW
R504	119-4721-15	1/10W 4.7k ohm	R552	117-6821-15	1/8W 6.8k ohm	R801	119-0000-05	1/10W 0 ohm JW
R505	119-1041-15	1/10W 100k ohm	R553	119-4731-15	1/10W 47k ohm	R802	119-0000-05	1/10W 0 ohm JW
R506	119-1041-15	1/10W 100k ohm	R554	119-4731-15	1/10W 47k ohm	R821	116-1031-15	1/4W 10k ohm
R507	119-4731-15	1/10W 47k ohm	R555	119-5621-15	1/10W 5.6k ohm	R822	119-3321-15	1/10W 3.3k ohm
R508	119-4731-15	1/10W 47k ohm	R556	119-1021-15	1/10W 1k ohm	R823	119-1031-15	1/10W 10k ohm
R510	119-4721-15	1/10W 4.7k ohm	R557	119-4731-15	1/10W 47k ohm	R824	116-2221-15	1/4W 2.2k ohm
R511	119-4721-15	1/10W 4.7k ohm	R558	119-1031-15	1/10W 10k ohm	R825	116-2221-15	1/4W 2.2k ohm
R512	119-4721-15	1/10W 4.7k ohm	R568	119-4731-15	1/10W 47k ohm	R826	119-8221-15	1/10W 8.2k ohm
R513	119-4721-15	1/10W 4.7k ohm	R570	119-4731-15	1/10W 47k ohm	R902	119-0000-05	1/10W 0 ohm JW
R514	119-1021-15	1/10W 1k ohm	R571	119-4731-15	1/10W 47k ohm	R903	119-0000-05	1/10W 0 ohm JW
R515	119-1041-15	1/10W 100k ohm	R573	119-4731-15	1/10W 47k ohm (PS-3235N ONLY)	R904	119-0000-05	1/10W 0 ohm JW (PS-3234N ONLY)
R516	119-1041-15	1/10W 100k ohm	R574	119-4731-15	1/10W 47k ohm (PS-3234N ONLY)	R905	119-0000-05	1/10W 0 ohm JW (PS-32354N ONLY)
R517	116-1001-15	1/4W 10 ohm	R575	119-4731-15	1/10W 47k ohm	SUP101	060-0122-20	DSP-141N-S00B
R520	119-4731-15	1/10W 47k ohm	R578	119-4721-15	1/10W 4.7k ohm	TH711	002-0318-21	THERMISTOR
R522	119-4731-15	1/10W 47k ohm	R579	119-4721-15	1/10W 4.7k ohm	TM101	073-0762-90	TERMINAL
R525	119-0000-05	1/10W 0 ohm JW	R701	116-1211-15	1/4W 120 ohm	TM501	073-0762-90	TERMINAL
R527	119-4721-15	1/10W 4.7k ohm	R702	116-6801-15	1/4W 68 ohm	TM502	073-0762-90	TERMINAL
R528	032-0140-66	1/10W 220 ohm F	R703	119-2231-15	1/10W 22k ohm	TM801	073-0762-90	TERMINAL
R529	119-1031-15	1/10W 10k ohm	R704	119-2231-15	1/10W 22k ohm	TM802	073-0762-90	TERMINAL
R531	119-1031-15	1/10W 10k ohm	R711	116-2221-15	1/4W 2.2k ohm	X501	060-1533-90	CSTCE10M0G52-RO
R532	119-4721-15	1/10W 4.7k ohm	R712	117-1031-15	1/8W 10k ohm	PWB	039-3429-00	PWB(WITHOUT COMPONENT)
R533	119-4721-15	1/10W 4.7k ohm	R713	116-2221-15	1/4W 2.2k ohm			
R534	119-1021-15	1/10W 1k ohm	R714	119-1031-15	1/10W 10k ohm			
R535	119-1031-15	1/10W 10k ohm	R715	119-3321-15	1/10W 3.3k ohm			
R536	119-2221-15	1/10W 2.2k ohm						
R537	119-1031-15	1/10W 10k ohm						

Switch PWB section (B2)

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	168-1042-78	16V 0.1uF K	P1	076-6020-05	5P	R910	119-0000-05	1/10W 0 ohm JW
C901	168-1042-78	16V 0.1uF K	PL901	017-0507-00	14V 40mA (ORG)	R915	119-0000-05	1/10W 0 ohm JW
C902	168-1042-78	16V 0.1uF K	PL902	017-0507-00	14V 40mA (ORG)	R916	119-0000-05	1/10W 0 ohm JW
C903	168-1042-78	16V 0.1uF K	PL903	017-0507-00	14V 40mA (ORG)	R918	119-4341-15	1/10W 430k ohm
C904	168-1042-78	16V 0.1uF K	PL904	017-0507-00	14V 40mA (ORG)	R919	119-1021-15	1/10W 1k ohm
C905	168-1042-78	16V 0.1uF K	PL905	017-0507-00	14V 40mA (ORG)	R920	119-1021-15	1/10W 1k ohm
C906	178-1052-78	1uF	PL907	017-0507-00	14V 40mA (ORG)	R921	119-1841-15	1/10W 180k ohm
D901	001-0580-90	1SS352	PL908	017-0507-00	14V 40mA (ORG)	R922	119-1841-15	1/10W 180k ohm
D902	001-0580-90	1SS352	PL909	017-0506-00	8V 105mA (ORG)	R923	119-1841-15	1/10W 180k ohm
D903	001-0580-90	1SS352	PL910	017-0506-00	8V 105mA (ORG)	R924	119-1841-15	1/10W 180k ohm
D904	001-0580-90	1SS352	R1	119-0000-05	1/10W 0 ohm JW	R940	119-0000-05	1/10W 0 ohm JW
IC901	051-6084-00	NJU6625FG1-03	R901	119-0000-05	1/10W 0 ohm JW	TH901	002-0306-90	SC20-3J153
J1	075-9024-00	MINI JACK	R902	119-0000-05	1/10W 0 ohm JW	VR901	016-0018-17	ROTALY ENCODER
J901	074-3013-74	24P	R907	119-0000-05	1/10W 0 ohm JW	VR902	016-0018-17	ROTALY ENCODER
L901	010-3406-66	22uH J	R908	119-0000-05	1/10W 0 ohm JW	PWB	039-3435-01	PWB(WITHOUT COMPONENTS)
LCD901	379-1362-50	INDICATOR (LCD)	R909	119-0000-05	1/10W 0 ohm JW			

EXPLODED VIEW/PARTS LIST

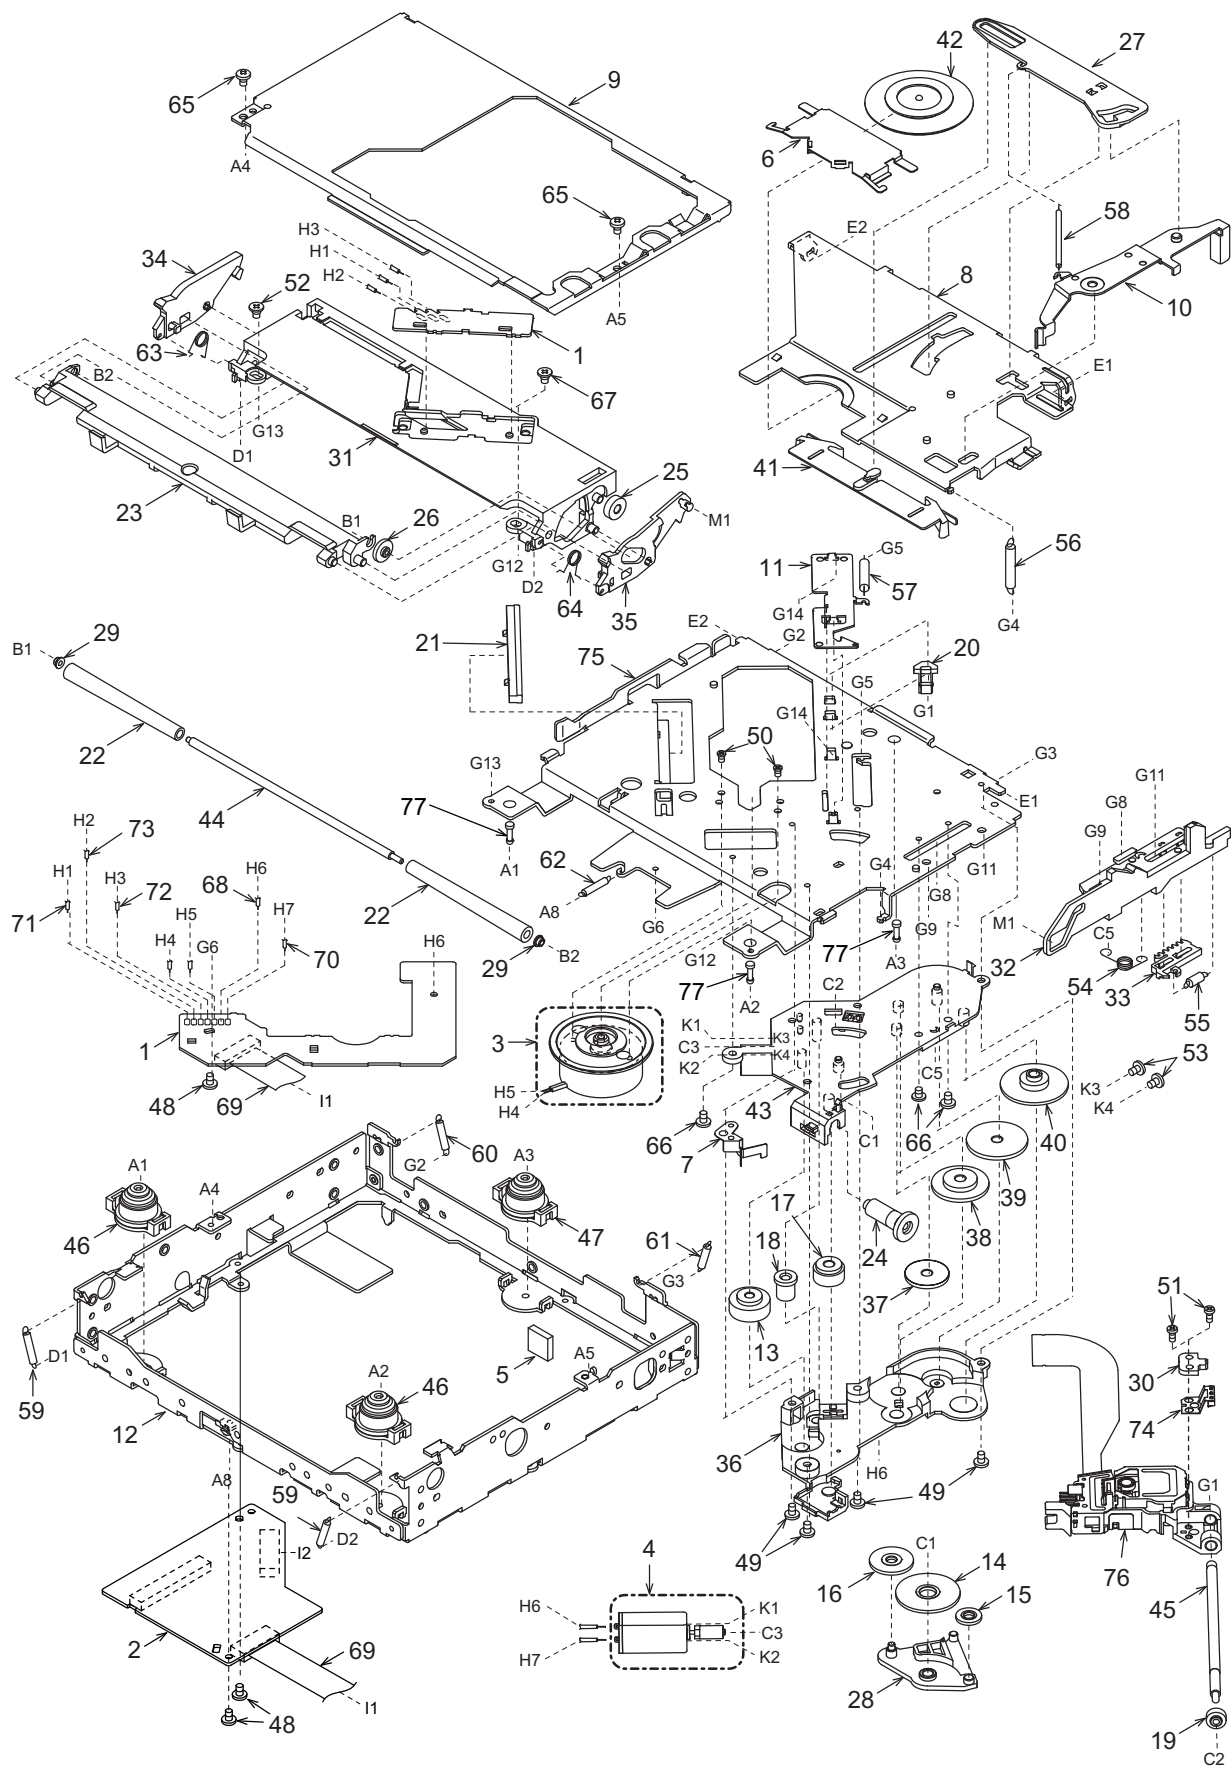

NO.	PART NO.	DESCRIPTION	Q'TY
1	-----	SENSOR PWB	1
2	-----	CD PWB	1
3	SMA-182-100	SPINDLE MOTOR-ASSY	1
4	SMA-183-100	SLED MOTOR-ASSY	1
5	345-5476-20	CUSHION RUBBER	1
6	620-1023-23	CLAMPER PLATE	1
7	620-1026-21	SPRING PLATE	1
8	620-1596-23	CLAMPER LINK	1
9	620-1862-20	UPPER CHASSIS	1
10	620-1752-20	SENSOR ARM	1
11	620-1753-20	ID-LOCK PLATE	1
12	620-1868-20	LOWER CHASSIS	1
13	621-0608-21	SECOND GEAR	1
14	621-0609-20	BASE GEAR	1
15	621-0610-20	IDLE GEAR A	1
16	621-0611-20	IDLE GEAR B	1
17	621-0612-21	ROLLER GEAR A	1
18	621-0620-20	THREAD GEAR A	1
19	621-0621-20	THREAD GEAR B	1
20	621-0623-23	LS-HOLDER	1
21	621-0624-22	GUIDE RAIL	1
22	621-0711-21	LOADING ROLLER	2
23	621-0718-21	ROLLER GUIDE	1
24	621-0719-20	ROLLER GEAR B	1
25	621-0720-20	ROLLER GEAR C	1
26	621-0721-20	ROLLER GEAR D	1
27	621-0728-20	STOPPER LINK	1
28	621-1719-20	IDLE CASE	1
29	621-1726-20	ROLLER SLEEVE	2
30	621-1729-20	SH-BASE	1
31	621-1742-20	UPPER GUIDE	1
32	621-1743-20	SHIFT LEVER	1
33	621-1744-20	RACK	1
34	621-1745-20	LOCK ARM L	1
35	621-1746-20	LOCK ARM R	1
36	621-1747-20	GEAR COVER	1
37	621-1748-20	POWER GEAR A	1
38	621-1749-20	POWER GEAR B	1
39	621-1750-20	POWER GEAR C	1

NO.	PART NO.	DESCRIPTION	Q'TY
40	621-1751-20	POWER GEAR D	1
41	621-1752-20	DISC STOPPER	1
42	621-1753-20	CLAMPER RING	1
43	621-1754-20	GEAR BASE	1
44	622-1571-21	ROLLER SHAFT	1
45	624-0020-00	LEAD SCREW	1
46	629-0086-20	DAMPER F	2
47	629-0087-20	DAMPER R	1
48	716-1507-01	SCREW(M2x3)	3
49	716-1670-01	SCREW(M2x4)	4
50	716-1733-01	SCREW(M1.7x2.3)	2
51	716-3469-01	SCREW(1.7x4)	2
52	716-3473-01	SCREW(M2x3)	1
53	716-3551-00	SCREW(M1.4x2.5)	2
54	750-7865-20	SHIFT SPRING	1
55	750-7866-20	RACK SPRING	1
56	750-7867-20	CLAMPER SPRING	1
57	750-7868-20	ID-LOCK SPRING	1
58	750-7869-20	SENSOR SPRING	1
59	750-7870-20	DR-SPRING F	2
60	750-7871-20	DR-SPRING RA	1
61	750-7872-20	DR-SPRING RB	1
62	750-7873-20	DR-SPRING C	1
63	750-6797-20	ROLLER SPRING L	1
64	750-6798-20	ROLLER SPRING R	1
65	714-2003-8B	SCREW(M2x3)	2
66	780-2025-00	SCREW(M2x2.5)	3
67	781-1730-00	SCREW(M1.7x3)	1
68	803-4906-60	VINYL-COAT-WIRE(ORG)	1
69	816-2542-01	FLAT WIRE	1
70	816-2590-00	VINYL-COAT-WIRE(GRN)	1
71	816-2591-00	VINYL-COAT-WIRE(YEL)	1
72	816-2592-00	VINYL-COAT-WIRE(BLUE)	1
73	816-2593-00	VINYL-COAT-WIRE(PUR)	1
74	966-1722-20	SH-RACK-ASSY	1
75	620-1866-20	DRIVE-PLATE	1
76	969-0071-30	PICKUP-ASSY	1
77	622-1570-21	DAMPER PIN	3

ELECTRICAL PARTS LIST

CD PWB(BM1) section

Note) Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C2	178-1052-78	1uF	C68	168-1042-78	16V 0.1uF	R20	119-5121-15	1/10W 5.1k ohm
C3	042-0627-90	16V 100uF	C69	042-1710-90	6.3V 100uF	R21	119-1031-15	1/10W 10k ohm
C4	168-1042-78	16V 0.1uF	C74	042-1709-90	6.3V 47uF	R22	119-2231-15	1/10W 22k ohm
C6	178-1052-78	1uF	C75	168-1042-78	16V 0.1uF	R23	119-5121-15	1/10W 5.1k ohm
C7	042-0560-85	6.3V 100uF	C77	168-1042-78	16V 0.1uF	R24	119-1031-15	1/10W 10k ohm
C8	178-1052-78	1uF	C78	168-1022-55	1000pF K	R25	119-1041-15	1/10W 100k ohm
C9	166-4711-50	470pF CH	C79	168-1022-55	1000pF K	R26	119-0000-05	1/10W 0 ohm JW
C10	168-4732-78	0.047uF K	C80	042-0423-20	10V-10uF	R27	119-4731-15	1/10W 47k ohm
C11	166-4711-50	470pF CH	C81	168-1042-78	16V 0.1uF	R29	119-5621-15	1/10W 5.6k ohm
C12	168-4732-78	0.047uF K	D1	001-1305-90	DAN217UT106	R30	119-2231-15	1/10W 22k ohm
C14	168-1042-78	16V 0.1uF	IC1	051-6733-10	TC94A70FG-005	R31	119-4731-15	1/10W 47k ohm
C15	166-1007-50	10pF CH	IC2	051-6079-80	BA5830FM-E2	R32	119-3341-15	1/10W 330k ohm
C16	166-1007-50	10pF CH	IC3	051-3395-90	NJU7780U1-15-TES	R33	119-1041-15	1/10W 100k ohm
C17	168-1042-78	16V 0.1uF	IC4	051-3396-90	NJM2386ADL3-33-TE1	R34	119-1041-15	1/10W 100k ohm
C18	168-2222-55	2200pF K	J1	074-1138-65	SOCKET (15P)	R35	119-1041-15	1/10W 100k ohm
C19	168-1042-78	16V 0.1uF	J2	074-1138-60	SOCKET (10P)	R36	119-1011-15	1/10W 100 ohm
C20	168-1042-78	16V 0.1uF	J3	074-1205-88	SOCKET (38P)	R38	119-1041-15	1/10W 100k ohm
C22	168-6822-55	6800pF K	L1	119-0000-05	1/10 0ohm JW	R39	119-0000-05	1/10W 0 ohm JW
C24	168-3332-78	0.033uF K	L2	119-0000-05	1/10 0ohm JW	R41	119-4721-15	1/10W 4.7k ohm
C25	168-3332-78	0.033uF K	L3	119-0000-05	1/10 0ohm JW	R42	119-4721-15	1/10W 4.7k ohm
C26	168-1042-78	16V 0.1uF	L4	010-3104-50	30ohm/100MHz	R44	119-4731-15	1/10W 47k ohm
C28	168-1042-78	16V 0.1uF	L5	010-3406-66	22uH J	R45	119-1031-15	1/10W 1k ohm
C29	168-1042-78	16V 0.1uF	Q1	131-1188-50	2SB1188 Q,R	R46	119-4731-15	1/10W 47k ohm
C30	168-1042-78	16V 0.1uF	Q1	190-2060-00	2SA2060-TE12L	R47	119-4731-15	1/10W 47k ohm
C31	168-1042-78	16V 0.1uF	Q2	198-3018-00	2SK3018	R48	119-1031-15	1/10W 10k ohm
C33	168-1042-78	16V 0.1uF	Q3	198-3018-00	2SK3018	R49	119-1031-15	1/10W 10k ohm
C34	168-1042-78	16V 0.1uF	Q4	192-4155-51	2SC4155A S,T	R50	119-2211-15	1/10W 220 ohm
C35	168-5622-55	5600pF K	Q5	198-3018-00	2SK3018	R51	119-1031-15	1/10W 10k ohm
C36	168-1042-78	16V 0.1uF	Q6	192-4155-51	2SC4155A S,T	R52	119-1031-15	1/10W 10k ohm
C37	168-5622-55	5600pF K	Q7	198-3018-00	2SK3018	R53	119-2211-15	1/10W 220 ohm
C38	166-6801-50	68pF	Q8	198-3018-00	2SK3018	R54	119-3331-15	1/10W 33k ohm
C39	168-1042-78	16V 0.1uF	R1	119-2211-15	1/10W 220 ohm	R55	119-4721-15	1/10W 4.7k ohm
C40	168-1532-55	0.015uF K	R2	117-6811-15	1/8W 680 ohm	R56	119-3331-15	1/10W 33k ohm
C41	168-1042-78	16V 0.1uF	R3	117-0000-05	1/8W 0 ohm JW	R57	119-4721-15	1/10W 4.7k ohm
C42	168-1032-55	0.01uF K	R4	119-1001-15	1/10W 10 ohm	R58	119-3331-15	1/10W 33k ohm
C43	168-1042-78	16V 0.1uF	R5	119-2731-15	1/10W 27k ohm	R59	119-4721-15	1/10W 4.7k ohm
C44	168-1042-78	16V 0.1uF	R6	119-2731-15	1/10W 27k ohm	R60	119-3331-15	1/10W 33k ohm
C46	168-1522-55	1500pF K	R7	119-2221-15	1/10W 2.2k ohm	R61	119-4721-15	1/10W 4.7k ohm
C47	168-3322-55	3300pF K	R8	119-2731-15	1/10W 27k ohm	R62	119-3331-15	1/10W 33k ohm
C48	168-1032-55	0.01uF K	R9	119-2731-15	1/10W 27k ohm	R63	119-4721-15	1/10W 4.7k ohm
C49	168-1042-78	16V 0.1uF	R10	119-1051-15	1/10W 1M ohm	R64	119-1051-15	1/10W 1M ohm
C54	168-1532-55	0.015uF K	R11	119-2211-15	1/10W 220 ohm	R65	119-4701-15	1/10W 47 ohm
C55	168-1042-78	16V 0.1uF	R13	119-8231-15	1/10W 82k ohm	R66	119-1051-15	1/10W 1M ohm
C56	168-1042-78	16V 0.1uF	R14	119-1531-15	1/10W 15k ohm	R68	119-1031-15	1/10W 10k ohm
C58	166-6097-50	6pF CH	R15	119-8231-15	1/10W 82k ohm	TM1	073-0768-90	TERMINAL
C59	166-4701-50	47pF CH	R16	119-4731-15	1/10W 47k ohm	X1	061-3534-90	16.92MHz
C60	168-1042-78	16V 0.1uF	R17	119-5121-15	1/10W 5.1k ohm	PWB	039-3205-01	PWB(WITHOUT COMPONENTS)
C63	168-1042-78	16V 0.1uF	R18	119-1031-15	1/10W 10k ohm			
C64	042-1709-90	6.3V 47uF	R19	119-0000-05	1/10W 0 ohm JW			
C66	168-1042-78	16V 0.1uF						

SENSOR PWB(BM2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D1	001-7058-90	AN1105W-RR	Q1	060-4015-91	PS1192HB-32-TR	S2	013-7413-50	LIMIT
D2	001-7058-90	AN1105W-RR	Q2	060-4015-91	PS1192HB-32-TR	PWB	039-1944-21	PWB(WITHOUT COMPONENTS)
J1	074-1138-60	10P	S1	013-7414-50	CHUCKING			