
EXPLODED VIEW (UNIT)

Block No.M1MM

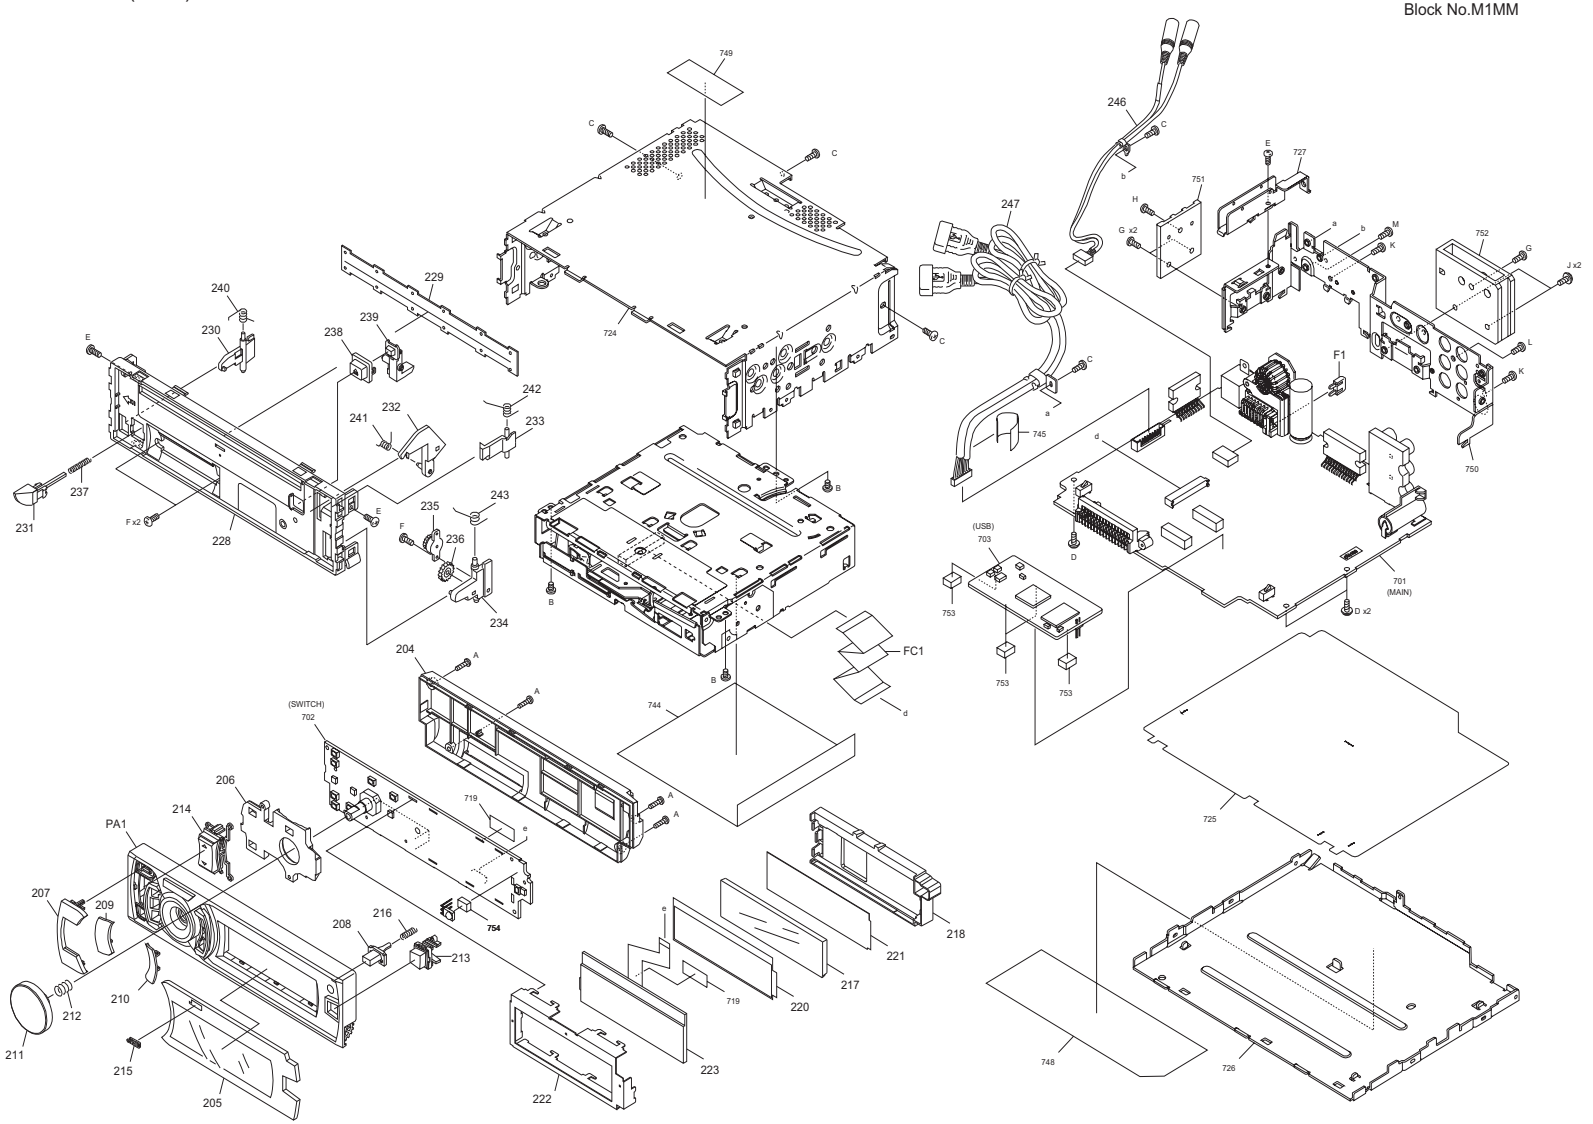

Parts with the exploded numbers lager than 700 are not supplied.


No.MA526

created date:2012-03-14

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A95BTJ	A	KD-R90BTE	B	KD-R90BTEN	C	KD-R90BTEY	D
KD-R90BTU	E	KD-R90BTUN	F				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
EXPLODED VIEW (UNIT) <M1MM>						
⚠	F1	QMFZ064-100-J1	FUSE	10A	1	
	FC1	WJT0294-001A-E	E-CARD WIRE		1	
	PA1	GE34912-002A	FRONT PANEL ASSY		1	A
	PA1	GE34912-004A	FRONT PANEL ASSY		1	B,C,D
	PA1	GE34912-001A	FRONT PANEL ASSY		1	E,F
	A	QYSDSF2008ZA	TAP SCREW	M2 x 8mm	4	
	B	QYSDST2604ZA	TAP SCREW	M2.6 x 4mm	3	
	C	QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	5	
	D	GE40377-002A	SCREW		3	
	E	QYSDST2004ZA	TAP SCREW	M2 x 4mm	3	
	F	QYSDSF2006ZA	TAP SCREW	M2 x 6mm	3	
	G	QYSDST2610ZA	TAP SCREW	M2.6 x 10mm	3	
	H	QYSDST2608ZA	TAP SCREW	M2.6 x 8mm	1	
	J	GE40377-005A	SPECIAL SCREW		2	
	K	QYSDSG3006ZA	TAP SCREW	M3 x 6mm	2	
	L	QYSDSF2608ZA	TAP SCREW	M2.6 x 8mm	1	
	M	QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	1	A,B,C,D,F
	204	GE10337-001A	REAR COVER		1	
	205	GE20308-006A	FINDER		1	A
	205	GE20308-008A	FINDER		1	B,C,D,E,F
	206	GE20310-001A	LIGHT GUIDE		1	
	207	GE34901-001A	MENU BTN		1	A,E,F
	207	GE34901-002A	MENU BTN		1	B,C,D
	208	GE34793-001A	OPEN BUTTON		1	
	209	GE34904-002A	SEARCH BTN TOP		1	A
	209	GE34904-001A	SEARCH BTN TOP		1	B,C,D,E,F
	210	GE34907-002A	DISP BTN TOP		1	A
	210	GE34907-001A	DISP BTN TOP		1	B,C,D,E,F
	211	GE34911-002A	VOL KNOB		1	A
	211	GE34911-003A	VOL KNOB		1	B,C,D,E,F
	212	GE40127-005A	KNOB SPRING		1	
	213	GE40600-002A	PHONE BTN ASSY		1	
	214	GE40599-001A	UP/DWN BTN ASSY		1	
	215	GE40463-001A	JVC BADGE		1	
	216	GE40202-016A	COMP.SPRING		1	
	217	GE34914-001A	LCD LENS		1	
	218	GE34915-001A	LENS CASE		1	
	220	GE40594-002A	LIGHTING SHEET		1	
	221	GE40595-001A	REFLECTION SHT		1	
	222	GE34916-001A	LCD CASE		1	
	223	QLD0706-001	LCD MODULE		1	
	228	GE34918-001A	F.CHASSIS ASSY		1	
	229	GE40454-001A	BLIND		1	
	230	GE33084-001A	LOCK LEVER(L)		1	
	231	GE33493-001A	DETACH LEVER		1	
	232	GE33491-001A	OPEN LEVER		1	
	233	GE33492-001A	LOCK LEVER TOP		1	
	234	GE33083-001A	LOCK LEVER(R)		1	
	235	QZW0108-002	DAMPER		1	
	236	GE40154-001A	GEAR		1	
	237	GE40202-023A	T. SPRING		1	
	238	GE34646-001A	EJECT BUTTON		1	
	239	GE34920-002A	EJECT LENS		1	
	240	GE40456-002A	SPRING LOCK		1	
	241	GE40461-001A	SPRING		1	
	242	GE40455-003A	SPRING LOCK		1	
	243	GE40472-001A	TORSION SPRING		1	
	246	QAM1433-001	CAR CABLE (MIC/AUX)		1	
	247	QAM1432-001	CAR CABLE (USB)		1	

EXPLODED VIEW (CD MECHANISM : FLM-HC3-1D)

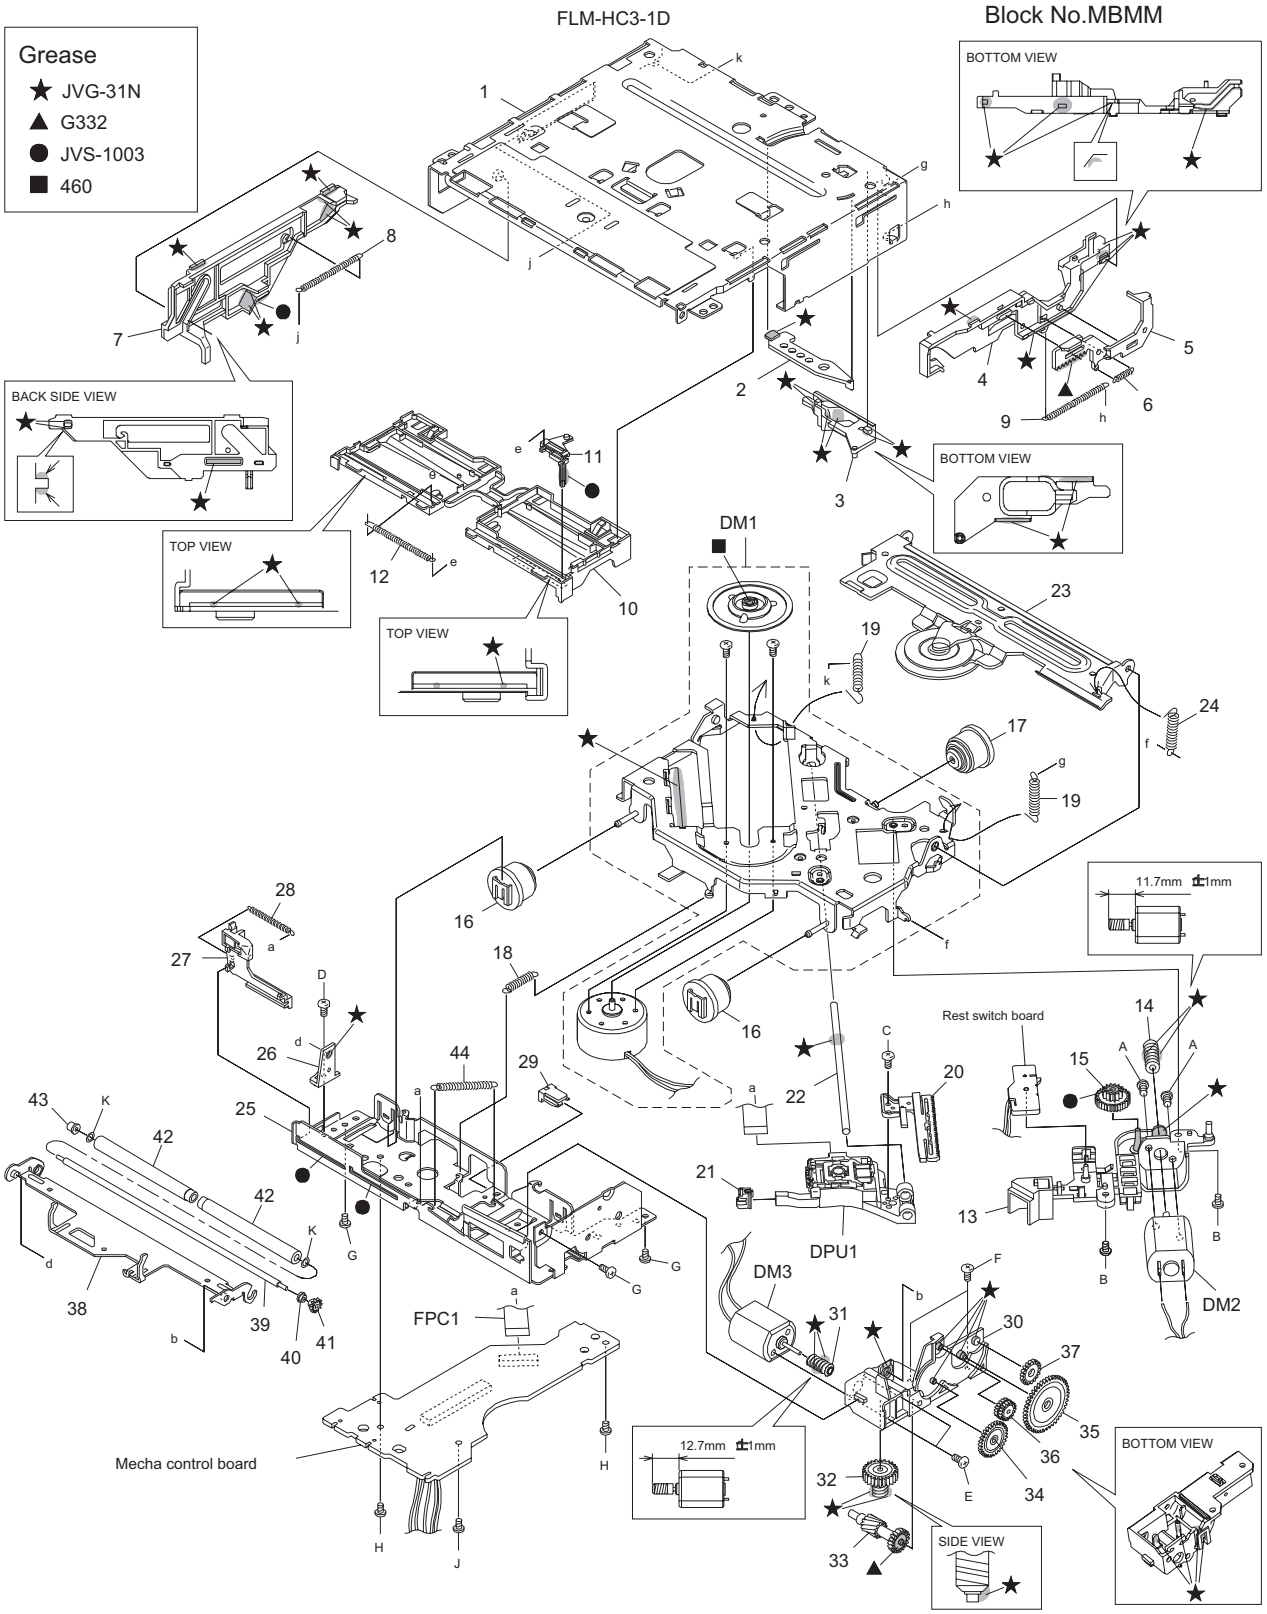

The parts without symbol number are not service.

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A95BTJ	A	KD-R90BTE	B	KD-R90BTEN	C	KD-R90BTEY	D
KD-R90BTU	E	KD-R90BTUN	F				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
EXPLODED VIEW (CD MECHANISM: FLM-HC3-1D) <MBMM>						
	DM1	CM-FLMHC1D	SPINDLE MOTOR ASSY		1	
	DM2	QAR0144-003	MOTOR	2.0V DC	1	
	DM3	QAR0144-003	MOTOR	2.0V DC	1	
⚠	DPU1	QAL1226-001	PICK UP		1	
	FPC1	QAL0817-003	FPC		1	
	A	QYSPSPT2025MA	SCREW	M2 x 2.5mm	2	
	B	VKZ4539-054	MINI SCREW		2	
	C	QYSPSGT1745ZA	TAP SCREW	M1.7 x 4.5mm	1	
	D	VKZ4539-054	MINI SCREW		1	
	E	QYSPSPT2025MA	SCREW	M2 x 2.5mm	2	
	F	VKZ4539-054	MINI SCREW		2	
	G	VKZ4539-054	MINI SCREW		3	
	H	VKZ4539-054	MINI SCREW		2	
	J	VKZ4539-054	MINI SCREW		1	
	K	LV45449-001A	WASHER		2	
	1	LV11685-004A	TOP FRAME		1	
	2	LV38953-002A	TRIGGER PLATE		1	
	3	LV38952-001A	FL SLIDER(B)		1	
	4	LV22826-003A	LOAD CAM		1	
	5	LV38951-001A	TRIGGER RACK		1	
	6	LV45415-001A	TRIGGER SPRING		1	
	7	LV22827-001A	FL SLIDER(L)		1	
	8	LV45416-001A	LOAD CAM SPRING		1	
	9	LV45417-001A	FL SLIDERSPRING		1	
	10	LV11689-001A	DISC GUIDE		1	
	11	LV38957-001A	SW SLIDER(R)		1	
	12	LV45505-001A	SW ACT SPRING		1	
	13	LV22828-001A	FEED BRACKET		1	
	13 or	LV22828-002A	FEED BRACKET		1	
	14	LV36814-201A	F WORM GEAR		1	
	15	LV36815-002A	F WHEEL GEAR		1	
	16	LV36904-001A	DAMPER		2	
	17	LV37061-001A	DAMPER		1	
	18	LV45422-001A	SUS SPRING(F)		1	
	19	LV45423-001A	SUS SPRING(B)		2	
	20	LV38960-001A	FEED RACK		1	
	21	LV36813-201A	SUB GUIDE CAP		1	
	22	LV44555-001A	MAIN SHAFT		1	
	23	LV38950-002A	HC CL.BASE ASSY		1	
	24	LV45421-001A	HC CL.SPRING		1	
	25	LV11686-003A	BOTTOM FRAME		1	
	26	LV38954-003A	R.ARM GUIDE		1	
	27	LV39496-001A	SW ACTUATOR (2)		1	
	28	LV45505-001A	SW ACT SPRING		1	
	29	LV38962-001A	WIRE GUIDE		1	
	30	LV11688-001A	LOADING BASE		1	
	31	LV38963-001A	D.WORM GEAR		1	
	32	LV38964-001A	D.WHEEL GEAR		1	
	33	LV38965-002A	ACT GEAR(1)		1	
	34	LV38966-001A	ACT GEAR(2)		1	
	35	LV38967-001A	ACT GEAR(3)		1	
	36	LV38968-001A	ROLLER ACT GEAR		1	
	37	LV38969-001A	DRIVE GEAR		1	
	38	LV11690-001A	ROLLER ARM		1	
	39	LV45654-002A	ROLLER SHAFT 2		1	
	40	LV45412-001A	RA COLLAR(R)		1	
	41	LV38970-001A	HC ROLLER GEAR		1	
	42	LV45424-001A	HC ROLLER		2	
	43	LV45648-001A	RA COLLAR(L) 2		1	
	44	LV45418-001A	R.ARM SPRING		1	
ELECTRIC UNIT <01>						
⚠	IC1	TEF6614TV1S4-X	IC		1	
	IC90	NJM4565E-X	IC		1	
	IC161	TDA7716N	IC		1	
	IC201	AK7600VF-X	IC		1	
	IC271	NJM2160BV-X	IC		1	
⚠	IC301	TDA7851A	IC		1	
	IC361	NJM2792V-X	IC		1	
⚠	IC501	LA6565-X	IC		1	
	IC541	MN6627553PA	IC		1	
	IC581	NJM8801E-X	IC		1	
⚠	IC701	JES235C	IC(MCU)		1	A,E,F
⚠	IC701	JES236B	IC(MCU)		1	B,C,D
	IC771	BR24T02FJ-W-X	IC		1	
	IC771 or	R1EX24002ASAA-X	IC		1	
	IC801	74AHCT126PW-X	IC		1	A
⚠	IC901	LV5680P	IC		1	
	IC902	XC6213B332NG-X	IC		1	
⚠	IC921	BD00GA3WEFJ-X	IC		1	
⚠	IC931	BD9673EFJ-X	IC		1	
	IC932	RT9715EGB-X	IC		1	
⚠	IC941	BD9673EFJ-X	IC		1	
	Q261	IMX9-W	PAIR TRANSISTOR		1	
	Q301	DRC2114E-X	DIGI TRANSISTOR		1	
	Q301 or	RT1N141C-X	DIGI TRANSISTOR		1	
	Q322	IMX9-W	PAIR TRANSISTOR		1	
	Q332	IMX9-W	PAIR TRANSISTOR		1	
	Q501	2SB1424/R/-W	TRANSISTOR		1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A95BTJ	A	KD-R90BTE	B	KD-R90BTEN	C	KD-R90BTEY	D
KD-R90BTU	E	KD-R90BTUN	F				

Safe	Symbol No.		Parts No.	Parts Name	Description	QTY	Local
	Q540		2SA2188/F/-X	TRANSISTOR		1	
	Q701		2SA812A/5-6/-X	TRANSISTOR		1	
	Q701	or	ISA1530AC1/QR/X	TRANSISTOR		1	
	Q702		2SC1623A/5-6/-X	TRANSISTOR		1	
	Q702	or	2SC3928A/QR/-X	TRANSISTOR		1	
	Q782		DRA2114E-X	DIGI TRANSISTOR		1	
	Q782	or	RT1P141C-X	DIGI TRANSISTOR		1	
	Q783		DRC2124E-X	DIGI TRANSISTOR		1	
	Q783	or	RT1N241C-X	DIGI TRANSISTOR		1	
	Q784		DRA2124E-X	DIGI TRANSISTOR		1	
	Q784	or	RT1P241C-X	TRANSISTOR		1	
	Q881		DRC2114E-X	DIGI TRANSISTOR		1	
	Q881	or	RT1N141C-X	DIGI TRANSISTOR		1	
	Q970		2SC1623A/5-6/-X	TRANSISTOR		1	
	Q970	or	2SC3928A/QR/-X	TRANSISTOR		1	
	Q971		2SC1623A/5-6/-X	TRANSISTOR		1	
	Q971	or	2SC3928A/QR/-X	TRANSISTOR		1	
	D20		NAF0029-001X	DIODE		1	
	D261		BAW56-TP-X	SI DIODE		1	
	D261	or	MC2836-X	DIODE		1	
	D321		BAW56-TP-X	SI DIODE		1	
	D321	or	MC2836-X	DIODE		1	
	D331		BAW56-TP-X	SI DIODE		1	
	D331	or	MC2836-X	DIODE		1	
	D477		NAF0029-001X	DIODE		1	
	D478		NAF0029-001X	DIODE		1	
	D487		NAF0029-001X	DIODE		1	
	D488		NAF0029-001X	DIODE		1	
	D501		GS1J-LTP-X	DIODE		1	
	D501	or	1SR154-400-X	SI DIODE		1	
	D502		GS1J-LTP-X	DIODE		1	
	D502	or	1SR154-400-X	SI DIODE		1	
	D711		RKZ6.2B2KG-X	Z DIODE		1	
	D711	or	DZ2J062/M/-X	Z DIODE		1	
	D712		RKZ6.2B2KG-X	Z DIODE		1	
	D712	or	DZ2J062/M/-X	Z DIODE		1	
	D713		RKZ6.2B2KG-X	Z DIODE		1	
	D713	or	DZ2J062/M/-X	Z DIODE		1	
	D714		RKZ6.2B2KG-X	Z DIODE		1	
	D714	or	DZ2J062/M/-X	Z DIODE		1	
	D716		RKZ5.6B2KG-X	Z DIODE		1	
	D716	or	DZ2J056/M/-X	Z DIODE		1	
	D720		SML-D12V8W-X	LED		1	
	D721		MC2838-X	DIODE		1	
	D722		BAW56-TP-X	SI DIODE		1	
	D722	or	MC2836-X	DIODE		1	
	D724		NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	D726		SML-D12V8W-X	LED		1	
	D727		SML-D12V8W-X	LED		1	
	D782		BAW56-TP-X	SI DIODE		1	
	D782	or	MC2836-X	DIODE		1	
	D783		BAW56-TP-X	SI DIODE		1	
	D783	or	MC2836-X	DIODE		1	
	D784		RKS801KF-X	SI DIODE		1	
	D784	or	DA2J101-X	SI DIODE		1	
	D785		RKS801KF-X	SI DIODE		1	
	D785	or	DA2J101-X	SI DIODE		1	
	D851		MBRX130-TP-X	SB DIODE		1	E,F
	D852		MBRX130-TP-X	SB DIODE		1	E,F
⚠	D901		1N5401-BPC04	SI DIODE		1	
	D931		RB051L-40-X	SB DIODE		1	
	D941		RB051L-40-X	SB DIODE		1	
	D970		RKZ6.8B2KG-X	Z DIODE		1	
	D970	or	DZ2J068/M/-X	Z DIODE		1	
	D971		RKZ6.8B2KG-X	Z DIODE		1	
	D971	or	DZ2J068/M/-X	Z DIODE		1	
	D981		MBRX130-TP-X	SB DIODE		1	
	D982		MBRX130-TP-X	SB DIODE		1	
	C1		NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	
	C2		NDC31HJ-7R0X	C CAPACITOR	7pF 50V J	1	
	C3		NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	
	C4		NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1	
	C5		NDC31HJ-150X	C CAPACITOR	15pF 50V J	1	
	C6		NDC31HJ-270X	C CAPACITOR	27pF 50V J	1	
	C7		NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	
	C8		NDC31HJ-2R0X	C CAPACITOR	2pF 50V J	1	
	C9		NDC31HJ-5R6X	C CAPACITOR	5.6pF 50V J	1	
	C10		NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C11		NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C12		NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C13		NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C14		NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1	
	C15		NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C16		NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C17		NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C18		NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C19		NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C22		NDC31HJ-120X	C CAPACITOR	12pF 50V J	1	
	C23		NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C24		NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C25		NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C26		QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A95BTJ	A	KD-R90BTE	B	KD-R90BTEN	C	KD-R90BTEY	D
KD-R90BTU	E	KD-R90BTUN	F				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C30	NDC31HJ-560X	C CAPACITOR	56pF 50V J	1	
	C32	NDC31HJ-270X	C CAPACITOR	27pF 50V J	1	
	C92	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C93	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C94	NDC31HJ-331X	C CAPACITOR	330pF 50V J	1	
	C95	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C96	QEKJ1CM-226Z	E CAPACITOR	22uF 16V M	1	
	C97	NDC31HJ-331X	C CAPACITOR	330pF 50V J	1	
	C98	NCB31HK-333X	C CAPACITOR	0.033uF 50V K	1	
	C99	NCB31HK-273X	C CAPACITOR	0.027uF 50V K	1	
	C100	NCB31HK-273X	C CAPACITOR	0.027uF 50V K	1	
	C101	NDC31HJ-220X	C CAPACITOR	22pF 50V J	1	
	C102	NCB31HK-333X	C CAPACITOR	0.033uF 50V K	1	
	C103	QEKJ1CM-226Z	E CAPACITOR	22uF 16V M	1	
	C104	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C105	NDC31HJ-8R0X	C CAPACITOR	8pF 50V J	1	
	C161	QEKJ1HM-105Z-S	E CAPACITOR	1uF 50V M	1	
	C162	QTE1V67-475Z	E CAPACITOR	4.7uF 35V	1	
	C163	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	A
	C168	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	
	C169	QEKJ1CM-107Z-S	E CAPACITOR	100uF 16V M	1	
	C170	QEKJ1HM-225Z-S	E CAPACITOR	2.2uF 50V M	1	
	C171	QEKJ1HM-105Z-S	E CAPACITOR	1uF 50V M	1	
	C172	QTE1V67-475Z	E CAPACITOR	4.7uF 35V	1	
	C173	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	A
	C178	QEKJ1CM-476Z-S	E CAPACITOR	47uF 16V M	1	
	C179	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	
	C181	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	
	C182	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	
	C185	NCB31HK-332X	C CAPACITOR	3300pF 50V K	1	
	C189	QEKJ1HM-225Z	E CAPACITOR	2.2uF 50V M	1	
	C191	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	
	C192	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	
	C195	NCB31HK-332X	C CAPACITOR	3300pF 50V K	1	
	C199	QEKJ1HM-225Z	E CAPACITOR	2.2uF 50V M	1	
	C201	NCB31HK-182X	C CAPACITOR	1800pF 50V K	1	
	C202	NCB31HK-182X	C CAPACITOR	1800pF 50V K	1	
	C203	NCB31HK-182X	C CAPACITOR	1800pF 50V K	1	
	C204	QERF1EM-475Z-E	E CAPACITOR	4.7uF 25V M	1	
	C205	QERF1EM-475Z-E	E CAPACITOR	4.7uF 25V M	1	
	C206	QERF1EM-475Z-E	E CAPACITOR	4.7uF 25V M	1	
	C207	QERF1EM-475Z-E	E CAPACITOR	4.7uF 25V M	1	
	C208	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	
	C209	QEKJ0JM-107Z-S	E CAPACITOR	100uF 6.3V M	1	
	C210	QEKJ1HM-225Z-S	E CAPACITOR	2.2uF 50V M	1	
	C211	NCB31HK-182X	C CAPACITOR	1800pF 50V K	1	
	C212	NCB31HK-182X	C CAPACITOR	1800pF 50V K	1	
	C213	NCB31HK-182X	C CAPACITOR	1800pF 50V K	1	
	C214	QERF1EM-475Z-E	E CAPACITOR	4.7uF 25V M	1	
	C215	QERF1EM-475Z-E	E CAPACITOR	4.7uF 25V M	1	
	C216	QERF1EM-475Z-E	E CAPACITOR	4.7uF 25V M	1	
	C217	QERF1EM-475Z-E	E CAPACITOR	4.7uF 25V M	1	
	C218	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	
	C219	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C220	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	
	C221	QEKJ1CM-106Z-S	E CAPACITOR	10uF 16V M	1	
	C222	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	
	C223	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	1	
	C224	QERF1CM-106Z-E	E CAPACITOR	10uF 16V M	1	
	C225	NDC31HJ-821X	C CAPACITOR	820pF 50V J	1	
	C226	NDC31HJ-120X	C CAPACITOR	12pF 50V J	1	
	C227	NDC31HJ-120X	C CAPACITOR	12pF 50V J	1	
	C261	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1	
	C262	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C263	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	
	C264	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C265	NCB31HK-152X	C CAPACITOR	1500pF 50V K	1	
	C266	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C271	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1	
	C273	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	
	C274	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C275	NCB31HK-152X	C CAPACITOR	1500pF 50V K	1	
	C276	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C301	QTE1C66-474Z	E CAPACITOR	0.47uF 16V	1	
	C302	QTE1C66-474Z	E CAPACITOR	0.47uF 16V	1	
	C303	NDC31HJ-560X	C CAPACITOR	56pF 50V J	1	
	C304	NDC31HJ-560X	C CAPACITOR	56pF 50V J	1	
	C305	NDC31HJ-820X	C CAPACITOR	82pF 50V J	1	
	C307	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C308	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C309	NEHM1CM-106X	E CAPACITOR	10uF 16V M	1	
	C310	NDC31HJ-820X	C CAPACITOR	82pF 50V J	1	
	C311	QTE1C66-474Z	E CAPACITOR	0.47uF 16V	1	
	C312	QTE1C66-474Z	E CAPACITOR	0.47uF 16V	1	
	C313	NDC31HJ-560X	C CAPACITOR	56pF 50V J	1	
	C314	NDC31HJ-560X	C CAPACITOR	56pF 50V J	1	
	C315	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C316	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1	
	C318	NCB21AK-105X-A	C CAPACITOR	1uF 10V K	1	
	C319	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A95BTJ	A	KD-R90BTE	B	KD-R90BTEN	C	KD-R90BTEY	D
KD-R90BTU	E	KD-R90BTUN	F				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C320	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	1	
	C326	NEZ0050-476X	E CAPACITOR	47uF	1	
	C335	NCB21CK-474X-A	C CAPACITOR	0.47uF 16V K	1	
	C336	NCB21CK-474X-A	C CAPACITOR	0.47uF 16V K	1	
	C337	NCB21CK-474X-A	C CAPACITOR	0.47uF 16V K	1	
	C338	NCB21CK-474X-A	C CAPACITOR	0.47uF 16V K	1	
	C361	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1	
	C362	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1	
	C365	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C366	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C367	QEKJ1AM-227Z	E CAPACITOR	220uF 10V M	1	
	C368	QEKJ1AM-227Z	E CAPACITOR	220uF 10V M	1	
	C369	QEKJ1CM-226Z	E CAPACITOR	22uF 16V M	1	
	C370	NCB31HK-152X	C CAPACITOR	1500pF 50V K	1	
	C371	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C372	NCB31HK-152X	C CAPACITOR	1500pF 50V K	1	
	C381	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1	
	C382	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1	
	C385	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C386	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C387	QERF1AM-227Z	E CAPACITOR	220uF 10V M	1	
	C388	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C477	NDC31HJ-220X	C CAPACITOR	22pF 50V J	1	
	C478	NDC31HJ-220X	C CAPACITOR	22pF 50V J	1	
	C487	NDC31HJ-220X	C CAPACITOR	22pF 50V J	1	
	C488	NDC31HJ-220X	C CAPACITOR	22pF 50V J	1	
	C491	NCB10JK-106X-A	C CAPACITOR	10uF 6.3V K	1	
	C492	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C493	NCB10JK-106X-A	C CAPACITOR	10uF 6.3V K	1	
	C501	NCB31HK-222X	C CAPACITOR	2200pF 50V K	1	
	C503	NCB31HK-562X	C CAPACITOR	5600pF 50V K	1	
	C505	NCB31HK-222X	C CAPACITOR	2200pF 50V K	1	
	C507	NCB31HK-682X	C CAPACITOR	6800pF 50V K	1	
	C509	NDC31HJ-680X	C CAPACITOR	68pF 50V J	1	
	C511	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	
	C512	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C513	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	1	
	C515	QEKJ0JM-107Z	E CAPACITOR	100uF 6.3V M	1	
	C516	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C517	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	
	C519	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	
	C520	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	
	C541	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C542	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C543	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C544	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C545	QEKJ0JM-476Z	E CAPACITOR	47uF 6.3V M	1	
	C546	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C547	NCB31CK-154X	C CAPACITOR	0.15uF 16V K	1	
	C549	NCB31HK-272X	C CAPACITOR	2700pF 50V K	1	
	C550	QEKJ0JM-476Z	E CAPACITOR	47uF 6.3V M	1	
	C551	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C552	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	1	
	C553	NCB31HK-332X	C CAPACITOR	3300pF 50V K	1	
	C554	NCB31AK-334X	C CAPACITOR	0.33uF 10V K	1	
	C555	NCB21CK-475X	C CAPACITOR	4.7uF 16V K	1	
	C556	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C557	NDC31HJ-681X	C CAPACITOR	680pF 50V J	1	
	C558	QEKJ0JM-476Z	E CAPACITOR	47uF 6.3V M	1	
	C559	QEKJ0JM-476Z	E CAPACITOR	47uF 6.3V M	1	
	C560	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C561	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C562	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C563	NCB31HK-153X	C CAPACITOR	0.015uF 50V K	1	
	C564	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C565	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	
	C566	NCB31CK-823X	C CAPACITOR	0.082uF 16V K	1	
	C568	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	
	C569	NCB31AK-334X	C CAPACITOR	0.33uF 10V K	1	
	C570	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C571	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C573	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C574	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C575	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C576	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C577	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C578	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C579	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C583	NDC31HJ-821X	C CAPACITOR	820pF 50V J	1	
	C584	NDC31HJ-821X	C CAPACITOR	820pF 50V J	1	
	C585	QERF1EM-475Z-E	E CAPACITOR	4.7uF 25V M	1	
	C586	QERF1EM-475Z-E	E CAPACITOR	4.7uF 25V M	1	
	C587	NDC31HJ-151X	C CAPACITOR	150pF 50V J	1	
	C588	NDC31HJ-151X	C CAPACITOR	150pF 50V J	1	
	C590	QEKJ0JM-476Z-S	E CAPACITOR	47uF 6.3V M	1	
	C592	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C701	NDC31HJ-220X	C CAPACITOR	22pF 50V J	1	
	C702	NDC31HJ-270X	C CAPACITOR	27pF 50V J	1	
	C709	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C711	NDC31HJ-681X	C CAPACITOR	680pF 50V J	1	
	C712	NDC31HJ-681X	C CAPACITOR	680pF 50V J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A95BTJ	A	KD-R90BTE	B	KD-R90BTEN	C	KD-R90BTEY	D
KD-R90BTU	E	KD-R90BTUN	F				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C713	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	1	
	C714	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C715	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C716	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C717	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	1	
	C718	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C721	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	1	
	C722	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C723	QEKJ0JM-337Z	E CAPACITOR	330uF 6.3V M	1	
	C727	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	1	
	C731	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	1	
	C732	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	1	
	C733	QERF1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C735	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C736	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C737	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C738	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C739	NDC31HJ-470X	C CAPACITOR	47pF 50V J	1	
	C741	NDC31HJ-470X	C CAPACITOR	47pF 50V J	1	
	C771	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	1	
	C784	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C785	NCB30JK-225X	C CAPACITOR	2.2uF 6.3V K	1	
	C801	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	1	A
	C881	QEKJ1CM-226Z	E CAPACITOR	22uF 16V M	1	
	C901	QEZ0962-398	E CAPACITOR	3900uF	1	
	C902	QEKJ1HM-225Z	E CAPACITOR	2.2uF 50V M	1	
	C903	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	1	
	C904	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	
	C905	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	1	
	C906	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C907	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	
	C908	QERF1AM-227Z	E CAPACITOR	220uF 10V M	1	
	C909	QERF0JM-337Z	E CAPACITOR	330uF 6.3V M	1	
	C910	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C911	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C915	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C917	QEKJ0JM-227Z	E CAPACITOR	220uF 6.3V M	1	
	C918	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C921	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C922	QEKJ0JM-107Z	E CAPACITOR	100uF 6.3V M	1	
	C925	NCJ30JM-106X-A	C CAPACITOR	10uF 6.3V M	1	
	C931	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C932	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C933	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C934	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C935	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C937	NCB31HK-682X	C CAPACITOR	6800pF 50V K	1	
	C938	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C939	QEZ0850-157Z	E CAPACITOR	150uF	1	
	C941	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C942	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C943	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C944	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C945	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C947	NCB31HK-682X	C CAPACITOR	6800pF 50V K	1	
	C948	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C949	QEZ0850-157Z	E CAPACITOR	150uF	1	
	C950	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C951	NCB31CK-474X	C CAPACITOR	0.47uF 16V K	1	
	C953	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C961	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	
	C962	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	
	C963	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	
	C964	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	
	C965	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	
	C966	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	
	C967	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	
	C968	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	
	C982	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C990	NDC31HJ-820X	C CAPACITOR	82pF 50V J	1	
	C992	NCB31HK-222X	C CAPACITOR	2200pF 50V K	1	
	C993	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	1	
	R1	NRSA63J-684X	MG RESISTOR	680kΩ 1/16W J	1	
	R2	NRSA63J-684X	MG RESISTOR	680kΩ 1/16W J	1	
	R4	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R5	NRSA02J-470X	MG RESISTOR	47Ω 1/10W J	1	
	R6	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	1	
	R7	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	1	
	R8	NRSA02J-470X	MG RESISTOR	47Ω 1/10W J	1	
	R9	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	B,C,D,E,F
	R14	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	1	
	R15	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	1	
	R90	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R92	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	
	R93	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	1	
	R94	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	1	
	R95	NRSA63J-124X	MG RESISTOR	120kΩ 1/16W J	1	
	R96	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	
	R97	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	
	R98	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A95BTJ	A	KD-R90BTE	B	KD-R90BTEN	C	KD-R90BTEY	D
KD-R90BTU	E	KD-R90BTUN	F				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R99	NRSA63J-124X	MG RESISTOR	120kΩ 1/16W J	1	
	R100	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R101	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	
	R102	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R103	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R104	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R161	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R165	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R171	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R175	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R180	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R181	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R182	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R185	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	1	
	R187	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R188	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R191	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R192	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R195	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	1	
	R197	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R198	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R201	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R202	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R203	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R204	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R206	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J	1	
	R211	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R212	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R213	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R214	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R215	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R216	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R261	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R262	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	
	R264	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R265	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	
	R266	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R267	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	
	R271	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R272	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	
	R274	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R275	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	
	R276	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R277	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	
	R301	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R302	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R304	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R306	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R307	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R309	NRSA02J-100X	MG RESISTOR	10Ω 1/10W J	1	
	R310	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R311	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R312	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R313	NRSA63J-271X	MG RESISTOR	270Ω 1/16W J	1	
	R314	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R316	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R317	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R321	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R322	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	
	R323	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	
	R324	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R331	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R332	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	
	R333	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	
	R334	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R341	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R342	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	
	R343	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	
	R344	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R351	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R352	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	
	R353	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	
	R354	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R361	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	
	R362	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R365	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	
	R366	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R381	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	
	R382	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R385	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	
	R386	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R502	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	1	
	R503	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	
	R504	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	
	R505	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	
	R507	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R508	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R509	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	
	R510	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	
	R511	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A95BTJ	A	KD-R90BTE	B	KD-R90BTEN	C	KD-R90BTEY	D
KD-R90BTU	E	KD-R90BTUN	F				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R512	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	
	R513	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	
	R514	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	
	R515	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	1	
	R516	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R517	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	1	
	R518	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	
	R519	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R520	NRS124J-100X	MG RESISTOR	10Ω 1/2W J	1	
	R521	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	
	R522	NRSA63J-512X	MG RESISTOR	5.1kΩ 1/16W J	1	
	R523	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	
	R524	NRSA63J-683X	MG RESISTOR	68kΩ 1/16W J	1	
	R540	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R541	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	1	
	R542	NRSA63J-823X	MG RESISTOR	82kΩ 1/16W J	1	
	R544	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R546	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	1	
	R547	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	1	
	R549	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R550	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R551	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R552	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	1	
	R553	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	1	
	R554	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R556	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R557	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R558	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	
	R559	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	
	R560	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R561	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R562	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R563	NRSA02J-100X	MG RESISTOR	10Ω 1/10W J	1	
	R564	NRSA02J-100X	MG RESISTOR	10Ω 1/10W J	1	
	R565	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R566	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R571	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	1	
	R572	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	1	
	R573	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	1	
	R574	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	1	
	R575	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	1	
	R576	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	1	
	R577	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	1	
	R583	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J	1	
	R584	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J	1	
	R585	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	
	R586	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	
	R587	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	1	
	R588	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	1	
	R591	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R592	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R593	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R594	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R601	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	1	
	R701	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R702	NRSA63J-106X	MG RESISTOR	10MΩ 1/16W J	1	
	R703	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R706	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R707	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R708	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R709	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R710	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	1	
	R711	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R712	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R713	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R714	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R715	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R716	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	1	
	R717	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R719	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R720	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R721	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R722	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R723	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R724	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R725	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J	1	
	R726	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R727	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R728	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R729	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R731	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R732	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R733	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R734	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R735	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R737	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	1	
	R738	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R739	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	1	
	R740	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	1	
	R741	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R742	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R743	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A95BTJ	A	KD-R90BTE	B	KD-R90BTEN	C	KD-R90BTEY	D
KD-R90BTU	E	KD-R90BTUN	F				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R744	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R745	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R746	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R747	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R748	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	A
	R748	NRSA63J-913X	MG RESISTOR	91kΩ 1/16W J	1	E,F
	R749	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R750	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R751	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R752	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R753	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R754	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R755	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R756	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R757	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R758	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R759	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	A
	R760	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R761	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	1	
	R762	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A
	R763	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	A
	R764	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	A
	R765	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	A
	R767	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R768	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	1	
	R769	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	
	R770	NRSA63J-474X	MG RESISTOR	470kΩ 1/16W J	1	
	R771	NRSA63J-271X	MG RESISTOR	270Ω 1/16W J	1	
	R772	NRSA63J-271X	MG RESISTOR	270Ω 1/16W J	1	
	R779	NRSA02J-561X	MG RESISTOR	560Ω 1/10W J	1	
	R781	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R782	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	
	R783	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R785	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R786	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R790	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	
	R791	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R792	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R793	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R794	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R795	NRSA02J-122X	MG RESISTOR	1.2kΩ 1/10W J	1	
	R797	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R799	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R801	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	1	A
	R803	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	1	A
	R804	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	A
	R805	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	A
	R806	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	A
	R807	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	A
	R808	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	A
	R809	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	1	A
	R810	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	A
	R811	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	A
	R812	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	1	A
	R814	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A
	R851	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	E,F
	R881	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	1	
	R882	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R901	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R903	NRSA02J-562X	MG RESISTOR	5.6kΩ 1/10W J	1	
	R904	NRSA63J-274X	MG RESISTOR	270kΩ 1/16W J	1	
	R905	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R906	NRSA63D-273X	MG RESISTOR	27kΩ 1/16W D	1	
	R911	NRS181J-682X	MG RESISTOR	6.8kΩ 1/8W J	1	
	R912	NRS181J-682X	MG RESISTOR	6.8kΩ 1/8W J	1	
	R921	NRSA63D-472X	MG RESISTOR	4.7kΩ 1/16W D	1	
	R922	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R923	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R924	NRSA63D-152X	MG RESISTOR	1.5kΩ 1/16W D	1	
	R925	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R931	NRSA63D-913X	MG RESISTOR	91kΩ 1/16W D	1	
	R932	NRSA63D-243X	MG RESISTOR	24kΩ 1/16W D	1	
	R933	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R934	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R935	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R938	NRSA63D-224X	MG RESISTOR	220kΩ 1/16W D	1	
	R941	NRSA63D-913X	MG RESISTOR	91kΩ 1/16W D	1	
	R942	NRSA63D-243X	MG RESISTOR	24kΩ 1/16W D	1	
	R943	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R944	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R945	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R946	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R947	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R948	NRSA63D-224X	MG RESISTOR	220kΩ 1/16W D	1	
	R949	NRS181J-271X	MG RESISTOR	270Ω 1/8W J	1	
	R971	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R972	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R973	NRSA63J-203X	MG RESISTOR	20kΩ 1/16W J	1	
	R974	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R975	NRSA02J-473X	MG RESISTOR	47kΩ 1/10W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A95BTJ	A	KD-R90BTE	B	KD-R90BTEN	C	KD-R90BTEY	D
KD-R90BTU	E	KD-R90BTUN	F				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R976	NRSA02J-683X	MG RESISTOR	68kΩ 1/10W J	1	
	R977	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R981	NRS181J-332X	MG RESISTOR	3.3kΩ 1/8W J	1	
	R984	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R999	NRSA63J-184X	MG RESISTOR	180kΩ 1/16W J	1	
	L1	NQL093K-R47X	P COIL	0.47uH K	1	
	L2	NQL093K-1R8X	P COIL	1.8uH K	1	
	L3	NQL093K-R27X	P COIL	0.27uH K	1	
	L4	QQR1872-001	RF COIL		1	
	L5	QQL244J-561Z	COIL	560uH J	1	
	L6	QQL244J-561Z	COIL	560uH J	1	
	L8	NQL093K-4R7X	P COIL	4.7uH K	1	
	L9	NQL093K-R47X	P COIL	0.47uH K	1	
	L10	NQR0269-026X	FERRITE BEADS	10.500mA	1	A
	L161	NQL553J-27NX	COIL	27nH J	1	
	L162	NQL79GM-100X	COIL	10uH M	1	
	L201	NQL79GM-470X	COIL	47uH M	1	
	L205	NQLH25M-4R7X	COIL	4.7uH M	1	
	L521	NQL093K-1R8X	P COIL	1.8uH K	1	
	L701	NQL79GM-4R7X	COIL	4.7uH M	1	
	L702	NQL79GM-4R7X	COIL	4.7uH M	1	
	L703	NQL79GM-470X	COIL	47uH M	1	
	L901	QQR1884-001	CHOKE COIL		1	
	L902	NQL79GM-101X	COIL	100uH M	1	
	L931	QQLA1AM-220	COIL	22uH M	1	
	L941	QQLA1AM-220	COIL	22uH M	1	
	B50	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	B100	NRZ0084-0R0X	MG RESISTOR	0Ω	1	
	B124	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	B301	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	B303	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	B311	NRZ0084-0R0X	MG RESISTOR	0Ω	1	
	B312	NRZ0084-0R0X	MG RESISTOR	0Ω	1	
	B313	NRZ0084-0R0X	MG RESISTOR	0Ω	1	
	B315	NRZ0084-0R0X	MG RESISTOR	0Ω	1	
	B361	NRZ0084-0R0X	MG RESISTOR	0Ω	1	
	B501	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	B904	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	B932	NRZ0084-0R0X	MG RESISTOR	0Ω	1	
	CN91	QGA2001F1-05	CONNECTOR	W-B (1-5)	1	
	CN472	QGA2001C1-10	CONNECTOR	W-B (1-10)	1	
	CN502	QGF1049F1-26X	CONNECTOR	FFC/FPC (1-26)	1	
	CN701	QNZ0605-002	CAR CONNECTOR		1	
	CN901	QNZ0607-001	CAR CONNECTOR		1	
⚠	F902	NMFZ018-3R0X-E	FUSE	3A	1	
	J1	QNB0190-001	ANT TERMINAL		1	
	J1 or	QNB0348-001	ANT TERMINAL		1	
	J321	QNN0867-001	PIN JACK		1	
	J801	QNZ0095-001	CONNECTOR		1	A
	K162	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	K171	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	K172	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	K581	NQR0022-005X	FERRITE BEADS		1	
	K931	NQLH25M-4R7X	COIL	4.7uH M	1	
	K941	NQLH25M-4R7X	COIL	4.7uH M	1	
	LF472	NQR0682-001X	CHOKE COIL		1	
	LF482	NQR0682-001X	CHOKE COIL		1	
	PP3	QZW0010-001	STYLE PIN		1	
	S701	QSW0451-001	PUSH SWITCH		1	
	S702	QSW0451-001	PUSH SWITCH		1	
	S703	QSW0648-001Z	TACT SWITCH		1	
	S704	NSW0246-001X	TACT SWITCH		1	
	X11	QAX0952-001Z	CRYSTAL		1	
	X201	NAX1133-001X	CRYSTAL		1	
	X521	QAX0714-001Z	C RESONATOR	16.000MHz	1	
	X701	NAX0647-001X	C RESONATOR	20.000MHz	1	
	X702	QAX0401-001	CRYSTAL	32.768KHz	1	

SWITCH UNIT <02>

	IC601	PCA9624PW-X	IC		1	
	IC602	XC6120N242NG-X	IC		1	
⚠	IC661	JES237G	IC(MCU)		1	
	IC681	KSM-2003TN5B	IR DETECT UNIT		1	
	Q601	2SC1623A/5-6/-X	TRANSISTOR		1	
	Q601 or	2SC3928A/QR/-X	TRANSISTOR		1	
	Q602	2SA812A/5-6/-X	TRANSISTOR		1	
	Q602 or	ISA1530AC1/QR/X	TRANSISTOR		1	
	Q603	2SA812A/5-6/-X	TRANSISTOR		1	
	Q603 or	ISA1530AC1/QR/X	TRANSISTOR		1	
	D601	NSSM065T-X	LED		1	
	D602	NSSM065T-X	LED		1	
	D604	NSSM065T-X	LED		1	
	D605	NSSM065T-X	LED		1	
	D609	NSSM065T-X	LED		1	
	D610	NSSM065T-X	LED		1	
	D618	RKZ5.6B2KG-X	Z DIODE		1	
	D618 or	DZ2J056/M/-X	Z DIODE		1	
	D620	SML-D12V8W-X	LED		1	
	D630	MC2838-X	DIODE		1	
	D651	RKS801KF-X	SI DIODE		1	
	D651 or	DA2J101-X	SI DIODE		1	
	D682	RKZ3.3B2KG-X	Z DIODE		1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A95BTJ	A	KD-R90BTE	B	KD-R90BTEN	C	KD-R90BTEY	D
KD-R90BTU	E	KD-R90BTUN	F				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	D682 or	DZ2J033/M/-X	Z DIODE		1	
	C601	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C602	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C604	NBE21CM-106X	TA E CAPACITOR	10uF 16V M	1	
	C605	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C606	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	1	
	C607	NCB11EK-475X	C CAPACITOR	4.7uF 25V K	1	
	C608	NCB11EK-475X	C CAPACITOR	4.7uF 25V K	1	
	C614	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C641	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C642	NCB20JK-475X	C CAPACITOR	4.7uF 6.3V K	1	
	C650	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C661	NCB31EK-473X	C CAPACITOR	0.047uF 25V K	1	
	C662	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C663	NCB31EK-473X	C CAPACITOR	0.047uF 25V K	1	
	C667	NBE20JM-106X	TA E CAPACITOR	10uF 6.3V M	1	
	C669	NCB31EK-473X	C CAPACITOR	0.047uF 25V K	1	
	C671	NCB31EK-473X	C CAPACITOR	0.047uF 25V K	1	
	C682	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	R601	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R602	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R603	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R604	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R605	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R607	NRS181J-331X	MG RESISTOR	330Ω 1/8W J	1	
	R608	NRS181J-331X	MG RESISTOR	330Ω 1/8W J	1	
	R609	NRS181J-681X	MG RESISTOR	680Ω 1/8W J	1	
	R610	NRS181J-102X	MG RESISTOR	1kΩ 1/8W J	1	
	R611	NRS181J-102X	MG RESISTOR	1kΩ 1/8W J	1	
	R612	NRS181J-152X	MG RESISTOR	1.5kΩ 1/8W J	1	
	R613	NRS181J-821X	MG RESISTOR	820Ω 1/8W J	1	
	R614	NRS181J-821X	MG RESISTOR	820Ω 1/8W J	1	
	R615	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R618	NRS181J-331X	MG RESISTOR	330Ω 1/8W J	1	
	R619	NRS181J-331X	MG RESISTOR	330Ω 1/8W J	1	
	R620	NRS181J-681X	MG RESISTOR	680Ω 1/8W J	1	
	R621	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R622	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R623	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	1	
	R624	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	1	
	R625	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	1	
	R626	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R627	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R628	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	1	
	R629	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	1	
	R630	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	1	
	R631	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	
	R634	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R637	NRSA63J-106X	MG RESISTOR	10MΩ 1/16W J	1	
	R641	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R642	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R644	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R645	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R646	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R647	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R648	NRS181J-103X	MG RESISTOR	10kΩ 1/8W J	1	
	R649	NRS181J-152X	MG RESISTOR	1.5kΩ 1/8W J	1	
	R650	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R651	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R652	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J	1	
	R653	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J	1	
	R654	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R655	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R656	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R657	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R658	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R660	NRSA63J-154X	MG RESISTOR	150kΩ 1/16W J	1	
	R661	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R662	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R663	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	1	
	R664	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R665	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	
	R666	NRS181J-103X	MG RESISTOR	10kΩ 1/8W J	1	
	R667	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R668	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	
	R669	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R670	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R671	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R674	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R675	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	
	R679	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R680	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R681	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R683	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	
	R685	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R687	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R689	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R690	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R691	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R692	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R693	NRS181J-103X	MG RESISTOR	10kΩ 1/8W J	1	
	R695	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A95BTJ	A	KD-R90BTE	B	KD-R90BTEN	C	KD-R90BTEY	D
KD-R90BTU	E	KD-R90BTUN	F				

Safe	Symbol No.		Parts No.	Parts Name	Description	QTY	Local
	R696		NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R697		NRSA63J-474X	MG RESISTOR	470kΩ 1/16W J	1	
	R698		NRS181J-331X	MG RESISTOR	330Ω 1/8W J	1	
	L603		NQL79GM-470X	COIL	47uH M	1	
	L604		NQR0022-005X	FERRITE BEADS		1	
	L661		NQL79GM-470X	COIL	47uH M	1	
	B606		NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	B610		NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	CN601		NNZ0085-001	CAR CONNECTOR		1	
	CN602		QGF0534F5-15X	CONNECTOR	FFC/FPC (1-15)	1	
	EN601		QSW1231-002	ROTARY ENCODER		1	
	S661		NSW0246-001X	TACT SWITCH		1	
	S662		NSW0246-001X	TACT SWITCH		1	
	S663		NSW0246-001X	TACT SWITCH		1	
	S664		NSW0246-001X	TACT SWITCH		1	
	S665		NSW0246-001X	TACT SWITCH		1	
	S667		NSW0246-001X	TACT SWITCH		1	
	S668		NSW0246-001X	TACT SWITCH		1	
	S669		NSW0246-001X	TACT SWITCH		1	
	S670		NSW0246-001X	TACT SWITCH		1	
	S671		NSW0246-001X	TACT SWITCH		1	
	TH601		NAD0028-103X	N THERMISTOR	10kΩ	1	
	X661		NAX0613-001X	C RESONATOR	16.000MHz	1	

USB UNIT <03>

⚠	IC401		TCC8600	IC		1	
	IC402		R1EX24512ASAS-X	IC		1	
	IC402	or	M24512-WMN6-X	IC		1	
⚠	IC441		JVM546K	PROGRAMMED IC		1	
⚠	IC442		A3V28S40FTP-G6	IC		1	
	IC471		74LVC1G3157GW-X	IC		1	
	IC481		MFI341S2162-X	IC		1	
	IC491		NJM2878F4-18-X	IC		1	
	IC601		PCM1780-X	IC		1	
	Q401		LTC044EUB-X	DIGI TRANSISTOR		1	
	Q401	or	DRC5144E-X	DIGI TRANSISTOR		1	
	D601		RKZ5.1B2KG-X	SB DIODE		1	
	D601	or	DZ2J051/M/-X	Z DIODE		1	
	C401		NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	
	C402		NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	
	C403		NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	
	C404		NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	
	C405		NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	
	C406		NDCA1HJ-471W	C CAPACITOR	470pF 50V J	1	
	C407		NDC31HJ-270X	C CAPACITOR	27pF 50V J	1	
	C408		NDC31HJ-270X	C CAPACITOR	27pF 50V J	1	
	C409		NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C410		NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	
	C414		NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C415		NCBA1HK-122W	C CAPACITOR	1200pF 50V K	1	
	C416		NCJ30JM-106X-A	C CAPACITOR	10uF 6.3V M	1	
	C417		NDCA1HJ-331W	C CAPACITOR	330pF 50V J	1	
	C418		NCB31CK-154X	C CAPACITOR	0.15uF 16V K	1	
	C419		NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	
	C420		NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	
	C421		NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C422		NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C423		NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C424		NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C425		NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C426		NDCA1HJ-200W	C CAPACITOR	20pF 50V J	1	
	C430		NQR0450-001X	EMI FILTER	0.022uF 50V M	1	
	C441		NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C442		NBE20JM-226X	TA E CAPACITOR	22uF 6.3V M	1	
	C443		NBE20JM-226X	TA E CAPACITOR	22uF 6.3V M	1	
	C444		NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	
	C445		NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	
	C446		NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	
	C447		NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	
	C448		NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	
	C449		NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	
	C450		NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	
	C451		NDCA1HJ-471W	C CAPACITOR	470pF 50V J	1	
	C452		NDCA1HJ-471W	C CAPACITOR	470pF 50V J	1	
	C453		NDCA1HJ-471W	C CAPACITOR	470pF 50V J	1	
	C454		NRSA6AJ-153W	MG RESISTOR	15kΩ 1/16W J	1	
	C455		NRSA6AJ-153W	MG RESISTOR	15kΩ 1/16W J	1	
	C456		NRSA6AJ-153W	MG RESISTOR	15kΩ 1/16W J	1	
	C457		NRSA6AJ-153W	MG RESISTOR	15kΩ 1/16W J	1	
	C471		NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C481		NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C482		NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C491		NBE41AM-476X	TA E CAPACITOR	47uF 10V M	1	
	C492		NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C493		NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	
	C494		NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C495		NBE20JM-226X	TA E CAPACITOR	22uF 6.3V M	1	
	C497		NDC31HJ-331X	C CAPACITOR	330pF 50V J	1	
	C601		NBE41AM-476X	TA E CAPACITOR	47uF 10V M	1	
	C602		NCBA1CK-123W	C CAPACITOR	0.012uF 16V K	1	
	C603		NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C604		NBE41AM-476X	TA E CAPACITOR	47uF 10V M	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A95BTJ	A	KD-R90BTE	B	KD-R90BTEN	C	KD-R90BTEY	D
KD-R90BTU	E	KD-R90BTUN	F				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C605	NDCA1HJ-101W	C CAPACITOR	100pF 50V J	1	
	C606	NDCA1HJ-101W	C CAPACITOR	100pF 50V J	1	
	R401	NRSA6AJ-470W	MG RESISTOR	47Ω 1/16W J	1	
	R402	NRSA6AJ-470W	MG RESISTOR	47Ω 1/16W J	1	
	R403	NRSA6AJ-470W	MG RESISTOR	47Ω 1/16W J	1	
	R404	NRSA6AJ-151W	MG RESISTOR	150Ω 1/16W J	1	
	R405	NRSA6AJ-105W	MG RESISTOR	1MΩ 1/16W J	1	
	R406	NQR0022-005X	FERRITE BEADS		1	
	R407	NQR0286-007X	FERRITE BEADS		1	
	R408	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	1	
	R409	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	1	
	R410	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R411	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	1	
	R412	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	1	
	R413	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	1	
	R414	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	1	
	R415	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R416	NRSA6AJ-271W	MG RESISTOR	270Ω 1/16W J	1	
	R417	NRSA6AJ-271W	MG RESISTOR	270Ω 1/16W J	1	
	R418	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R419	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R420	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R421	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	1	
	R422	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	1	
	R423	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R425	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R426	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R427	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R428	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R429	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R430	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R431	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R432	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R435	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R436	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R441	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R443	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R444	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R445	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R446	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R451	NQR0286-007X	FERRITE BEADS		1	
	R452	NQR0286-007X	FERRITE BEADS		1	
	R453	NQR0286-007X	FERRITE BEADS		1	
	R454	NQR0286-007X	FERRITE BEADS		1	
	R455	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	1	
	R456	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	1	
	R457	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	1	
	R458	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R462	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R463	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R469	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R481	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R521	NQR0286-007X	FERRITE BEADS		1	
	R601	NQR0286-007X	FERRITE BEADS		1	
	R602	NQR0286-007X	FERRITE BEADS		1	
	R603	NQR0286-007X	FERRITE BEADS		1	
	R604	NRSA6AJ-220W	MG RESISTOR	22Ω 1/16W J	1	
	R605	NRSA6AJ-220W	MG RESISTOR	22Ω 1/16W J	1	
	R606	NRSA6AJ-220W	MG RESISTOR	22Ω 1/16W J	1	
	R607	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	1	
	R608	NRS181J-181X	MG RESISTOR	180Ω 1/8W J	1	
	R609	NRS181J-181X	MG RESISTOR	180Ω 1/8W J	1	
	L401	NQL093K-R12X	P COIL	0.12uH K	1	
	L402	NQL093K-R12X	P COIL	0.12uH K	1	
	L403	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	L404	NQR0022-005X	FERRITE BEADS		1	
	L405	NQR0022-005X	FERRITE BEADS		1	
	L406	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	1	
	L407	NQR0022-005X	FERRITE BEADS		1	
	L491	NQL79GM-4R7X	COIL	4.7uH M	1	
	L601	NQL79GM-470X	COIL	47uH M	1	
	CN441	QGG2011M1-18X	CONNECTOR	(1-18)	1	
	CN442	QGG2011M1-18X	CONNECTOR	(1-18)	1	
	CN444	QGG2504M5-02	CONNECTOR	(1-2)	1	
	K441	NQR0502-001X	FERRITE BEADS		1	
	K442	NQR0286-007X	FERRITE BEADS		1	
	K443	NQR0286-007X	FERRITE BEADS		1	
	K444	NQR0286-007X	FERRITE BEADS		1	
	K445	NQR0286-007X	FERRITE BEADS		1	
	K446	NQR0286-007X	FERRITE BEADS		1	
	K447	NQR0286-007X	FERRITE BEADS		1	
	K448	NQR0286-007X	FERRITE BEADS		1	
	K451	NQR0022-005X	FERRITE BEADS		1	
	K452	NQR0286-007X	FERRITE BEADS		1	
	K453	NQR0286-007X	FERRITE BEADS		1	
	LF409	NQR0682-001X	CHOKE COIL		1	
	LF410	NQR0682-001X	CHOKE COIL		1	
	X401	NAX1168-001X	CRYSTAL		1	

CD PLAYER UNIT (FLM-HC3-1D) IN CD MECHA <04>

	R1	NRSA63J-131X	MG RESISTOR	130Ω 1/16W J	1	
	CN101	QGF1044F2-26X	CONNECTOR	FFC/FPC (1-26)	1	


MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A95BTJ	A	KD-R90BTE	B	KD-R90BTEN	C	KD-R90BTEY	D
KD-R90BTU	E	KD-R90BTUN	F				

Safe	Symbol No.		Parts No.	Parts Name	Description	QTY	Local
	CN102		QGF0522F3-15W	CONNECTOR	FFC/FPC (1-15)	1	
	SW1		NSW0291-001X	DETECT SWITCH		1	
	SW1	or	NSW0233-001X	DETECT SWITCH		1	
	SW2		NSW0291-001X	DETECT SWITCH		1	
	SW2	or	NSW0233-001X	DETECT SWITCH		1	
	SW3		NSW0291-001X	DETECT SWITCH		1	
	SW3	or	NSW0233-001X	DETECT SWITCH		1	
	SW4		NSW0291-001X	DETECT SWITCH		1	
	SW4	or	NSW0233-001X	DETECT SWITCH		1	

PACKING AND ACCESSORIES

Block No.M3MM

No additional / supplemental order of WARRANTY CARDs are available.

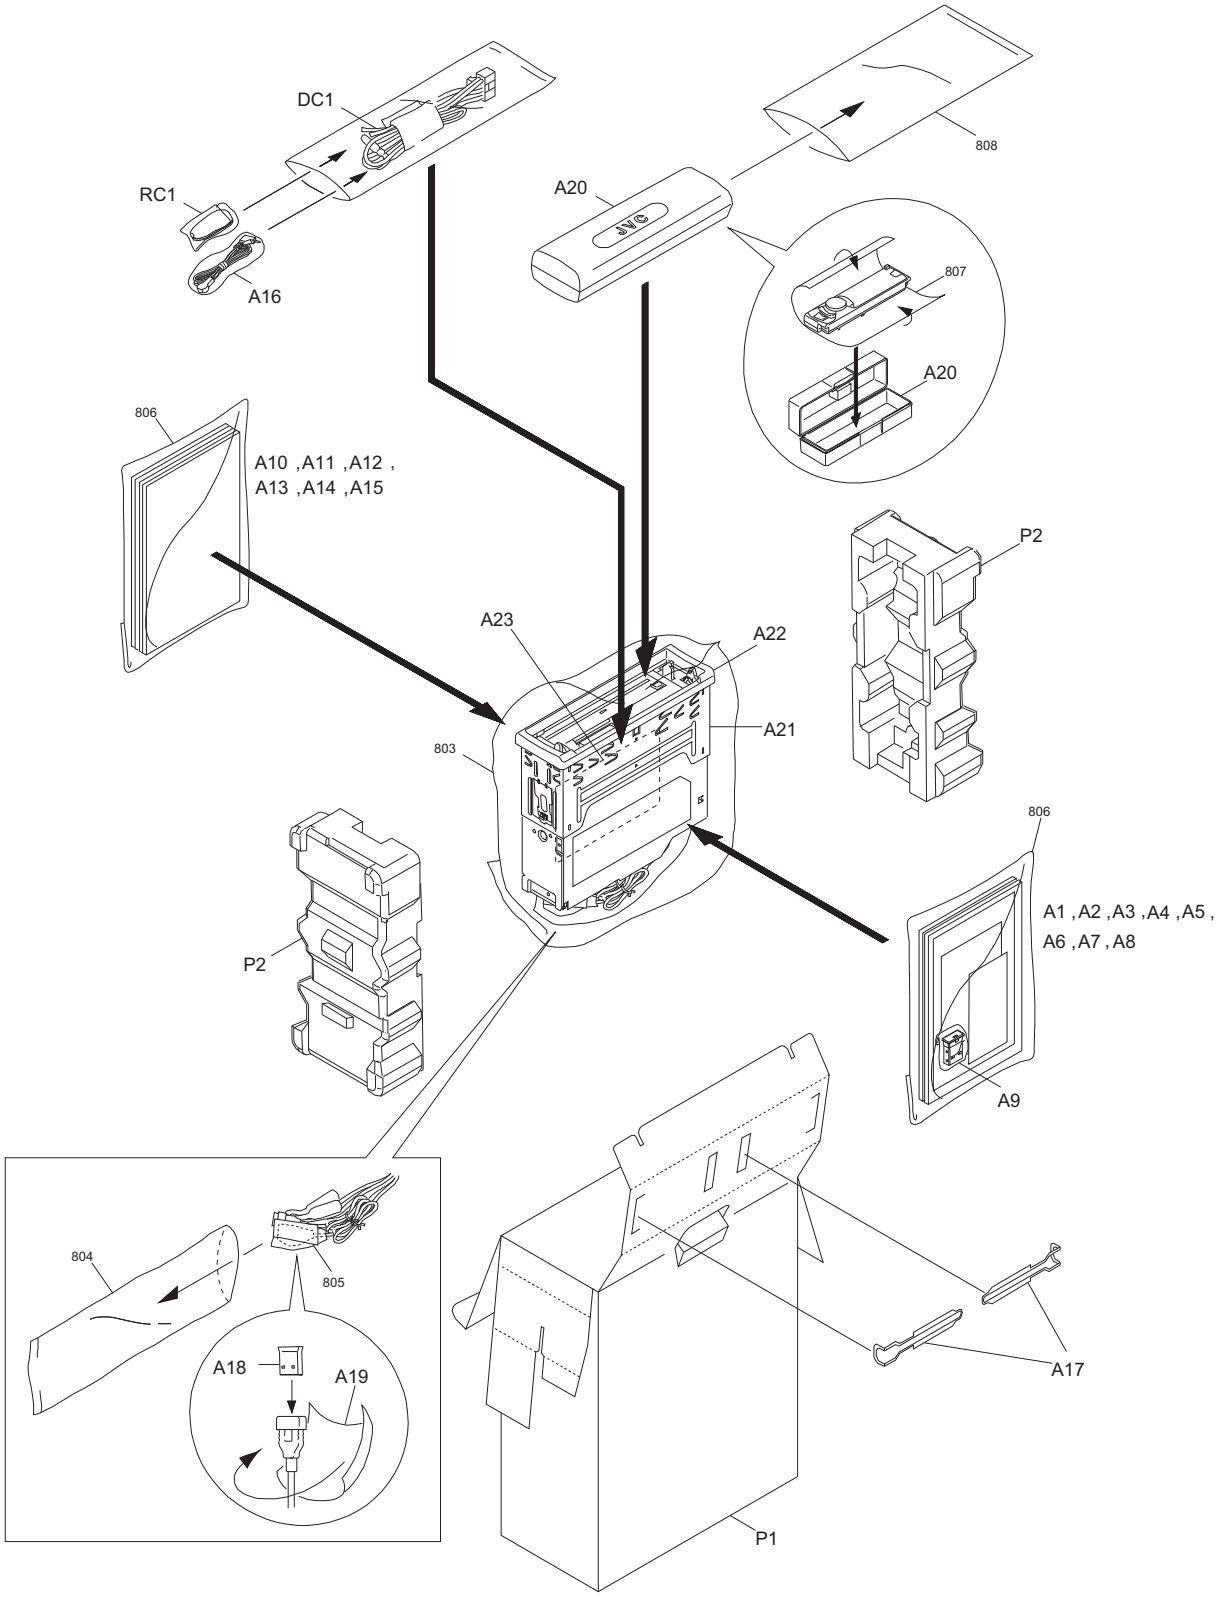

Parts with the exploded numbers lager than 700 are not supplied.

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A95BTJ	A	KD-R90BTE	B	KD-R90BTEN	C	KD-R90BTEY	D
KD-R90BTU	E	KD-R90BTUN	F				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
PACKING AND ACCESSORIES <M3MM>						
	DC1	QAM1331-001	DC CORD		1	A
	DC1	QAM1343-001	DC CORD		1	B,C,D
	DC1	QAM1332-001	DC CORD		1	E,F
	RC1	RM-RK52M	REMOCONL UNIT		1	
	A1	GET0801-001A	INST BOOK	ENG SPA FRE	1	A
	A1	GET0802-001A	INST BOOK	ENG RUS THA ARA PER*	1	E
	A1	GET0802-004A	INST BOOK	ENG INA*	1	F
	A2	GET0801-002A	INSTALL MANUAL	ENG SPA FRE	1	A
	A2	GET0802-005A	INSTALL MANUAL	ENG RUS THA ARA PER*	1	E
	A2	GET0802-008A	INSTALL MANUAL	ENG INA*	1	F
	A3	----------	WARRANTY CARD	BT-52008-1	1	A
	A3	----------	WARRANTY CARD	BT-54047-1	1	B,C,D
	A4	----------	WARRANTY CARD	BT-51029-3	1	A
	A5	----------	REGISTRATION CARD	BT-51044-1	1	A
	A6	GET0617-001H	USB/BT ADP SHT		1	
	A7	GET0820-001A	BT COUNTRY LIST		1	
	A8	LVT2328-001B	RUSSIAN SHEET		1	D
	A9	QAU0526-002	RF MODULE		1	B,C,D,E,F
	A10	GET0803-001A	INST BOOK	GER	1	B,C,D
	A10	GET0802-002A	INST BOOK	CHI(TAIWAN)*	1	E
	A11	GET0803-002A	INST BOOK	DUT SPA ITA POR	1	B
	A11	GET0803-003A	INST BOOK	ENG FRE	1	C
	A11	GET0803-005A	INST BOOK	POR RUS GRE UKR	1	D
	A12	GET0803-003A	INST BOOK	ENG FRE	1	B
	A12	GET0803-004A	INST BOOK	SWE DAN FIN	1	C
	A12	GET0803-006A	INST BOOK	ROM BUL CZE HUN	1	D
	A13	GET0803-007A	INSTALL MANUAL	GER	1	B,C,D
	A13	GET0802-006A	INSTALL MANUAL	CHI(TAIWAN)*	1	E
	A14	GET0803-008A	INSTALL MANUAL	DUT SPA ITA POR	1	B
	A14	GET0803-009A	INSTALL MANUAL	ENG FRE	1	C
	A14	GET0803-011A	INSTALL MANUAL	POL RUS GRE UKR	1	D
	A15	GET0803-009A	INSTALL MANUAL	ENG FRE	1	B
	A15	GET0803-010A	INSTALL MANUAL	ROM BUL CZE HUN	1	C
	A15	GET0803-012A	INSTALL MANUAL	ROM BUL CZE HUN	1	D
	A16	QAN0109-001	MICROPHONE		1	
	A17	GE40508-001A	HOOK		2	
	A18	QAU0526-002	RF MODULE		1	A
	A19	GET0725-001A	BT DONGLE SHEET		1	A
	A20	GE32320-001A	HARD CASE ASSY		1	
	A21	GE20279-001A	MOUNTING SLEEVE		1	
	A22	GE20311-002A	TRIM PLATE		1	A,B,C,D
	A22	GE20311-001A	TRIM PLATE		1	E,F
	A23	GET0713-001A	CAUTION SHEET		1	B,C,D,E,F
	P1	GE34993-001A	INNER CARTON		1	A
	P1	GE34999-001A	INNER CARTON		1	B,C,D
	P1	GE34996-001A	INNER CARTON		1	E,F
	P2	GE10338-001A	CUSHION		1	