

■ EXPLODED VIEW • PARTS LIST:

DCP Section

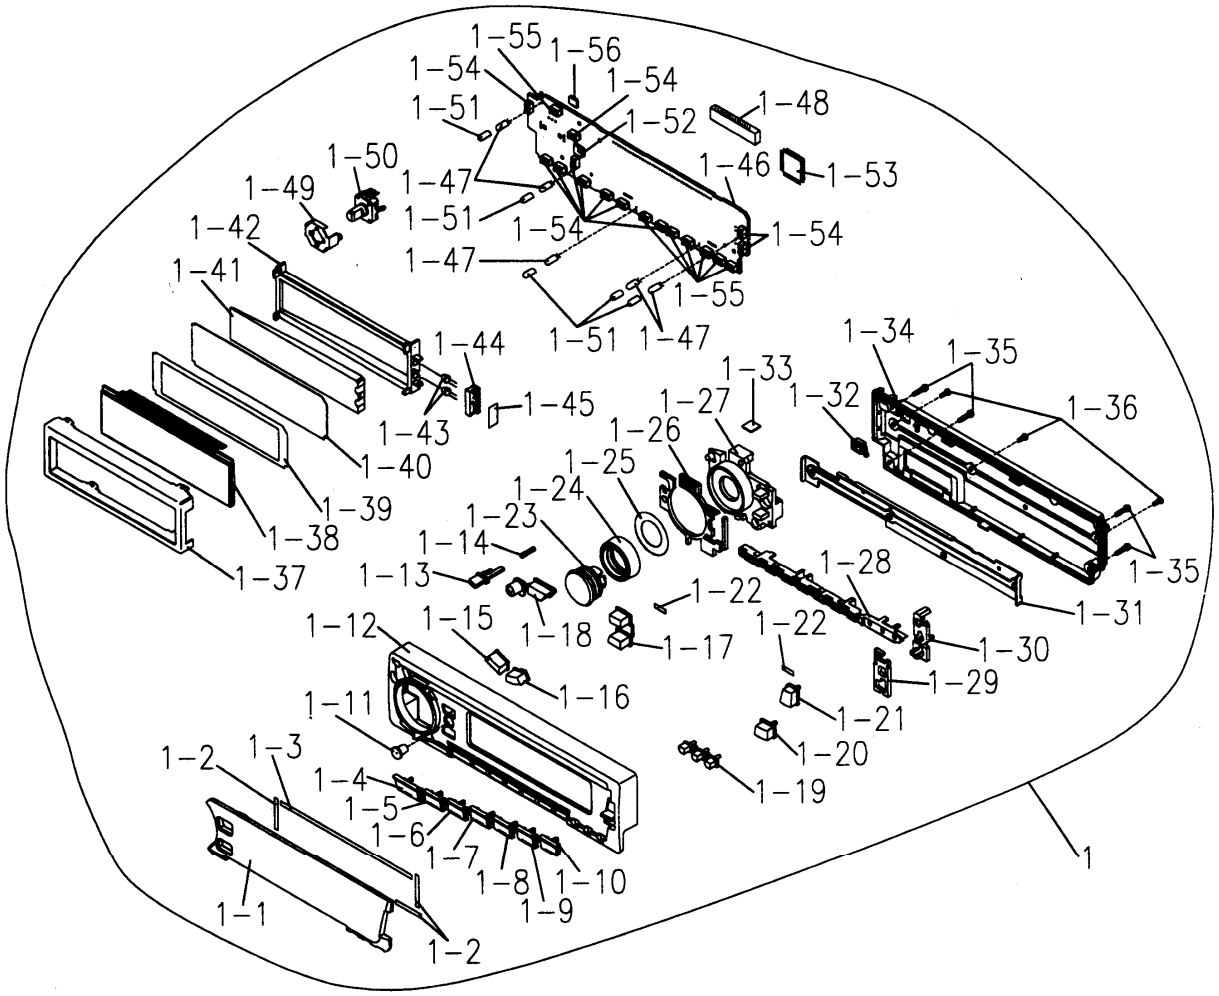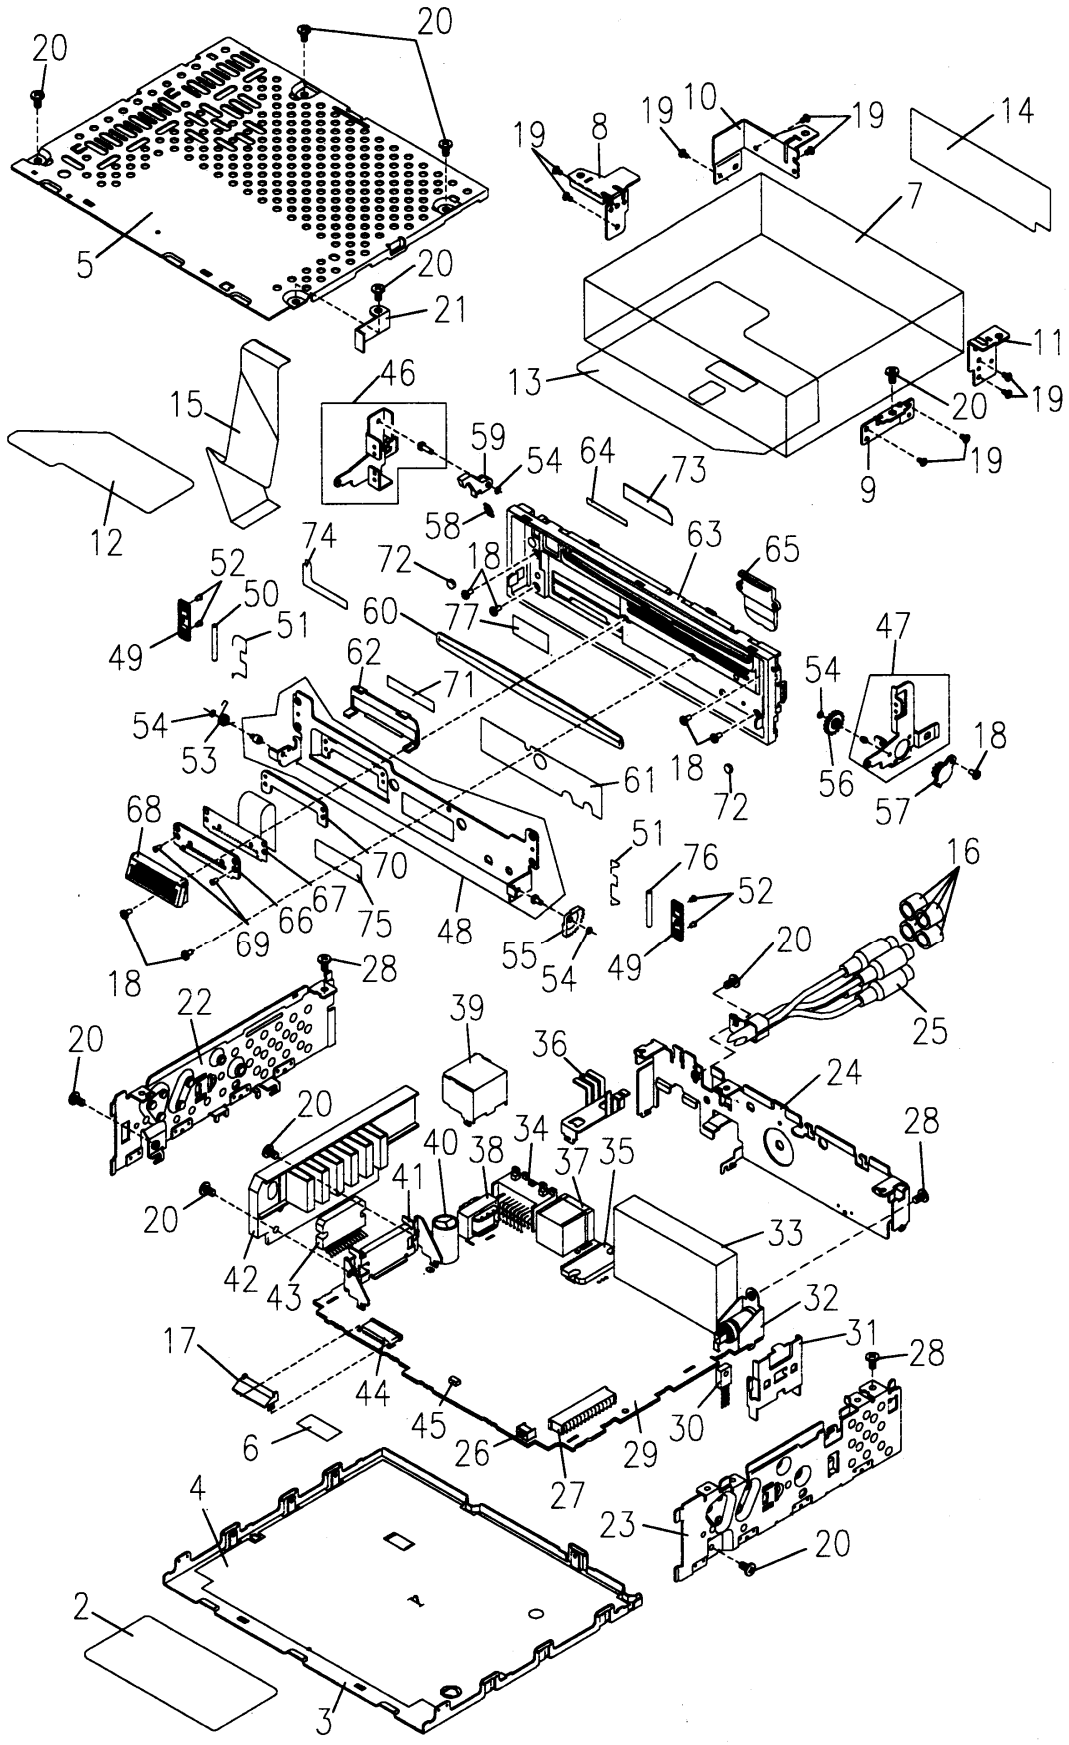

NO.	PARTS NO.	DESCRIPTION	QTY
1	DCP-340-600	DCP ASSY (PE-2385B)	1
	DCP-341-600	DCP ASSY (PE-2386B)	1
1-1	373-0952-00	DIAL-COVER (PE-2385B)	1
	373-0952-01	DIAL-COVER (PE-2386B)	1
1-2	347-6509-00	DOUBLE FACE	3
1-3	347-6505-00	DOUBLE FACE	1
1-4	382-6129-00	BUTTON (PE-2385B)	1
	382-6129-01	BUTTON (PE-2386B)	1
1-5	382-6130-00	BUTTON (PE-2385B)	1
	382-6130-01	BUTTON (PE-2386B)	1
1-6	382-6131-00	BUTTON (PE-2385B)	1
	382-6131-01	BUTTON (PE-2386B)	1
1-7	382-6132-00	BUTTON (PE-2385B)	1
	382-6132-01	BUTTON (PE-2386B)	1
1-8	382-6133-00	BUTTON (PE-2385B)	1
	382-6133-01	BUTTON (PE-2386B)	1
1-9	382-6134-00	BUTTON (PE-2385B)	1
	382-6134-01	BUTTON (PE-2386B)	1
1-10	382-6135-00	BUTTON (PE-2385B)	1
	382-6135-01	BUTTON (PE-2386B)	1
1-11	335-5828-00	IR-FILTER	1
1-12	370-5937-00	ESCUTCHEON (PE-2385B)	1
	370-5937-01	ESCUTCHEON (PE-2386B)	1
1-13	382-6138-00	BUTTON	1
1-14	750-3404-00	SPRING	1
1-15	382-6127-00	BUTTON (PE-2385B)	1
	382-6127-01	BUTTON (PE-2386B)	1
1-16	382-6126-00	BUTTON (PE-2385B)	1
	382-6126-01	BUTTON (PE-2386B)	1
1-17	382-6122-00	BUTTON (PE-2385B)	1
	382-6122-01	BUTTON (PE-2386B)	1
1-18	382-6128-00	BUTTON (PE-2385B)	1
	382-6128-01	BUTTON (PE-2386B)	1
1-19	382-6137-00	BUTTON	1
1-20	382-6125-01	BUTTON (PE-2385B)	1
	382-6125-03	BUTTON (PE-2386B)	1
1-21	382-6124-00	BUTTON (PE-2385B)	1
	382-6124-02	BUTTON (PE-2386B)	1

NO.	PARTS NO.	DESCRIPTION	QTY
1-22	347-6511-00	SHADE	2
1-23	380-5512-00	KNOB (PE-2385B)	1
	380-5512-01	KNOB (PE-2386B)	1
1-24	345-8553-00	RUBBER PART	1
1-25	347-6506-00	SHADE	1
1-26	345-8617-00	SPONGE	1
1-27	335-6518-00	ILLUMI PART	1
1-28	335-6517-00	ILLUMI PART	1
1-29	345-8616-00	SPONGE	1
1-30	335-6516-00	ILLUMI PART	1
1-31	331-2524-00	REAR-COVER-PLATE	1
1-32	382-5141-00	BUTTON	1
1-33	347-6525-00	SHADE	1
1-34	335-5837-01	REAR-COVER	1
1-35	716-0872-12	PAD SCREW	4
1-36	738-2035-17	PRECISION SCREW	3
1-37	331-2807-00	LCD COVER	1
1-38	379-1195-41	INDICATOR	1
1-39	347-6172-00	FILM	1
1-40	347-6173-00	SHADE	1
1-41	335-6211-00	LCD ILLUMI	1
1-42	335-6207-00	LCD HOLDER	1
1-43	001-7046-00	DIODE	2
1-44	335-6215-00	LED HOLDER	1
1-45	347-6510-00	SHADE	1
1-46	039-1890-01	SWITCH PWB (WITHOUT COMPONENT)	1
1-47	017-0444-00	PILOTLAMP (14V 50mA)	5
1-48	076-0535-01	PLUG	1
1-49	331-3133-00	JOG-SW-HOLDER	1
1-50	016-9900-81	VR W/SHAFT	1
1-51	345-4441-37	LAMP CAP	5
1-52	060-4008-00	IR-RECEIVE	1
1-53	051-6013-00	IC	1
1-54	013-6305-50	TACT SWITCH	11
1-55	013-6001-50	SWITCH	7
1-56	013-6510-50	ILLUMI SWITCH	1


20
20
5
20
21
19
8
19
10
19
19
14
7
13
11
19
20
19
9
15
46
59
54
64
73
58
63
65
12
74
72
18
77
60
52
50
51
49
62
71
47
54
54
53
61
18
72
56
57
18
68
51
76
52
16
70
67
66
69
75
48
55
54
49
18
28
20
22
39
36
24
25
20
20
34
40
38
37
35
28
41
20
42
43
33
32
31
28
17
44
45
26
29
30
6
27
4
23
20
2
3

NO.	PARTS NO.	DESCRIPTION	QTY
2	286-9512-00	SETPLATE (PE2385B)	1
	286-9513-00	SETPLATE (PE2386B)	1
3	304-0460-01	LOWER-COVER	1
4	347-5918-00	INSULATOR	1
5	303-0472-00	UPPER-COVER	1
6	347-6215-00	SPACER FILM	1
7	929-0092-82	CD-MECH-MODULE	1
8	331-2491-00	CD-SUB-BRKT	1
9	331-2492-00	CD-SUB-BRKT	1
10	331-2493-00	CD-SUB-BRKT	1
11	331-2494-00	CD-SUB-BRKT	1
12	347-5416-00	INSULATOR	1
13	347-5916-02	INSULATOR	1
14	347-5215-00	INSULATOR	1
15	816-2391-00	FLATCABLE	1
16	345-3799-20	RUBBER CAP	4
17	335-6019-00	CN-COVER	1
18	780-2004-01	SCREW	7
19	716-0717-10	STEEL SCREW	9
20	731-3006-80	TAPTIGHT	10
21	331-2744-00	STOPPER	1
22	305-0274-01	SIDE-COVER(L)	1
23	305-0275-00	SIDE-COVER(R)	1
24	307-0626-01	REAR-COVER	1
25	855-5428-50	RCA PIN CORD	1
26	013-6100-00	SWITCH	1
27	074-1186-26	OUTLET SOCKET	1
28	714-3006-81	MACHINE SCREW	3
29	039-1889-00	MAIN PWB (WITHOUT COMPONENT)	1
30	103-2012-00	TRANSISTOR	1
31	313-1651-21	HEAT SINK	1
32	092-4000-50	ANT RECEPT	1
33	880-2087G	TUNER	1
34	074-1214-00	OUTLET SOCKET	1
35	051-3261-00	IC	1
36	313-1772-00	HEAT SINK	1
37	074-1126-10	OUTLET SOCKET	1
38	009-9006-60	CHOKE	1
39	331-2820-00	SHIELD CASE	1

NO.	PARTS NO.	DESCRIPTION	QTY
40	042-0447-00	ALUMI ELECTRO-C	1
41	331-2255-20	IC-HOLDER	1
42	313-1744-20	HEAT SINK	1
43	051-2031-11	IC	1
44	074-1198-68	OUTLET SOCKET	1
45	001-7011-95	DIODE	1
46	946-0071-01	ARM-L-ASSY	1
47	946-0072-01	ARM-R-ASSY	1
48	946-0070-02	HOLDER-ASSY	1
49	335-5821-01	SPING HOLDER	2
50	341-1704-20	ROLLER(LEFT)	1
51	750-3327-01	SPRING	2
52	738-1722-17	PRECISION SCREW	4
53	750-3342-00	SPRING	1
54	746-0761-00	WASHER	4
55	613-0684-00	FAN GEAR	1
56	613-0683-00	GEAR	1
57	613-0687-00	GEAR DAMPER	1
58	750-3341-00	SPRING	1
59	335-5820-00	HOOK	1
60	346-0114-01	LEATHER SHEET	1
61	290-7676-00	LABEL	1
62	335-5822-00	CN-COVER	1
63	370-5766-02	INNER-ES	1
64	347-5923-00	DOUBLE FACE	1
65	335-5817-00	ILLUMI PLATE	1
66	039-1306-00	DCP-PWB (WITHOUT COMPONENT)	1
67	039-1328-01	FPC (WITHOUT COMPONENT)	1
68	074-1145-02	OUTLET SOCKET	1
69	781-1735-00	SCREW	2
70	347-5935-00	SPACER	1
71	347-5919-00	SURGE PROTECT	1
72	345-8265-00	CUSHION	2
73	347-5920-00	COVER FILM	1
74	347-5941-00	HEAT-PROTECT	1
75	291-0078-00	STICKER	1
76	341-1710-00	ROLLER(RIGHT)	1
77	347-6356-00	DOUBLE FACE	1

■ ELECTRICAL PARTS LIST:

Main PWB (B1) section

REF No.	PART No.	DESCRIPTION
IC 301	051-3261-00	BA4906
IC 501	051-5016-90	TDA7404
IC 601	051-2031-11	LA4743B
IC 701	051-7400-08	HD74LS07FP
IC 801	052-1914-20	μPD178016AGC
Q 102	102-2712-51	2SC2712GL
Q 103	102-2712-51	2SC2712GL
Q 108	125-2004-03	RN1403
Q 301	102-2712-51	2SC2712GL
Q 303	102-2712-51	2SC2712GL
Q 304	102-2712-51	2SC2712GL
Q 305	101-1237-00	2SB1237
Q 306	125-0002-02	RN2402
Q 307	125-0002-02	RN2402
Q 401	103-1858-00	2SD1858
Q 402	125-0002-02	RN2402
Q 403	125-2004-06	RN1406
Q 404	125-2004-06	RN1406
Q 405	101-1243-00	2SB1243
Q 406	103-2012-00	2SD2012
Q 407	103-1858-00	2SD1858
Q 408	125-2004-02	RN1402
Q 501	103-1306-00	2SD1306
Q 502	103-1306-00	2SD1306
Q 503	103-1306-00	2SD1306
Q 504	103-1306-00	2SD1306
Q 601	125-0002-02	RN2402
Q 701	125-2004-02	RN1402
Q 802	101-1243-00	2SB1243
Q 803	125-2004-02	RN1402
Q 804	100-1162-00	2SA1162
Q 805	103-1858-00	2SD1858
Q 806	100-1162-00	2SA1162
Q 807	125-2004-02	RN1402
Q 901	100-1162-00	2SA1162
D 301	001-0376-41	MTZ7.5JB
D 302	001-0376-26	MTZ4.7JB
D 303	001-0466-01	S5688G
D 306	001-0466-01	S5688G
D 307	001-0330-00	1SS119
D 308	001-0330-00	1SS119
D 309	001-0330-00	1SS119
D 401	001-0376-32	MTZ5.6JB
D 402	001-0376-47	MTZ9.1JB
D 403	001-0330-00	1SS119
D 601	001-0592-00	RM4Z
D 602	001-0466-01	S5688G
D 603	001-0466-01	S5688G
D 604	001-0466-01	S5688G
D 605	001-0466-01	S5688G
D 606	001-0466-01	S5688G
D 607	001-0466-01	S5688G

REF No.	PART No.	DESCRIPTION
D 608	001-0466-01	S5688G
D 609	001-0466-01	S5688G
D 610	001-0330-00	1SS119
D 701	001-0330-00	1SS119
D 702	001-0330-00	1SS119
D 802	001-7011-05	CL-150FG
D 803	001-0377-10	MA4030L
D 804	001-0376-47	MTZ9.1JB
D 901	001-0330-00	1SS119
L 101	010-4007-00	5.6 μH
L 102	010-2230-14	2.2 μH
L 103	010-2230-31	56 μH
L 505	010-2285-57	
L 601	009-9006-60	CHOKE
L 701	010-2230-26	22 μH
L 801	010-2230-38	220 μH
L 803	010-2230-26	22 μH
L 804	010-2230-14	2.2 μH
X 801	061-1064-00	4.5MHz
C 101	176-2201-00	50V 22PF
C 102	178-1032-78	25V 0.01 μF
C 103	178-1032-78	25V 0.01 μF
C 104	178-2232-78	25V 0.022 μF
C 105	183-1073-22	10V 100 μF
C 106	183-1073-22	10V 100 μF
C 107	183-1073-22	10V 100 μF
C 108	176-1011-00	50V 100PF
C 109	176-3311-00	50V 330PF
C 110	178-1022-78	50V 1000PF
C 112	183-1053-62	50V 1 μF
C 113	176-1011-00	50V 100PF
C 114	176-1011-00	50V 100PF
C 115	178-2732-78	25V 0.027 μF
C 116	178-2732-78	25V 0.027 μF
C 118	178-2232-78	25V 0.022 μF
C 122	178-1032-78	25V 0.01 μF
C 124	042-9002-01	50V 3.3 μF (LN)
C 125	178-4722-78	50V 4700PF
C 126	178-6822-78	50V 6800PF
C 127	176-2201-00	50V 22PF
C 132	178-1032-78	25V 0.01 μF
C 135	178-1032-78	25V 0.01 μF
C 136	178-1032-78	25V 0.01 μF
C 140	176-1011-00	50V 100PF
C 141	176-1011-00	50V 100PF
C 143	176-2096-00	50V 2PF
C 301	178-1032-78	25V 0.01 μF
C 302	172-1041-10	50V 0.1 μF
C 303	172-1031-10	50V 0.01 μF
C 304	176-1011-00	50V 100PF
C 305	183-1063-52	35V 10 μF
C 307	176-1007-00	50V 10PF

REF No.	PART No.	DESCRIPTION
C 308	178-1032-78	25V 0.01 μF
C 309	176-1011-00	50V 100PF
C 310	176-1011-00	50V 100PF
C 401	183-1073-22	10V 100 μF
C 402	183-1063-52	35V 10 μF
C 404	183-1073-22	10V 100 μF
C 405	183-1063-52	35V 10 μF
C 406	178-1532-78	25V 0.015 μF
C 407	178-1532-78	25V 0.015 μF
C 408	178-1022-78	50V 1000PF
C 409	178-1032-78	25V 0.01 μF
C 410	178-1032-78	25V 0.01 μF
C 411	178-1032-78	25V 0.01 μF
C 412	178-1022-78	50V 1000PF
C 413	178-1022-78	50V 1000PF
C 501	178-1042-78	25V 0.1 μF
C 502	178-1042-78	25V 0.1 μF
C 503	183-1053-62	50V 1 μF
C 504	183-1053-62	50V 1 μF
C 505	183-1053-62	50V 1 μF
C 506	183-1053-62	50V 1 μF
C 509	183-4763-32	16V 47 μF
C 510	182-1063-33	16V 10 μF
C 511	182-1063-33	16V 10 μF
C 512	182-1063-33	16V 10 μF
C 513	182-1063-33	16V 10 μF
C 514	183-1063-52	35V 10 μF
C 515	178-1022-78	50V 1000PF
C 516	178-1022-78	50V 1000PF
C 520	178-1022-78	50V 1000PF
C 521	178-1022-78	50V 1000PF
C 523	176-4711-00	50V 470PF
C 524	178-1022-78	50V 1000PF
C 525	178-1022-78	50V 1000PF
C 601	172-2231-10	50V 0.022 μF
C 602	042-0447-00	16V 2200 μF
C 603	183-3343-62	50V 0.33 μF
C 604	183-2263-32	16V 22 μF
C 605	183-4763-32	16V 47 μF
C 606	182-4746-63	50V 0.47 μF
C 607	182-4746-63	50V 0.47 μF
C 608	182-4746-63	50V 0.47 μF
C 609	182-4746-63	50V 0.47 μF
C 611	172-1041-10	50V 0.1 μF
C 612	172-1041-10	50V 0.1 μF
C 613	172-1041-10	50V 0.1 μF
C 614	172-1041-10	50V 0.1 μF
C 619	176-1011-00	50V 100PF
C 701	178-4732-78	25V 0.047 μF
C 801	176-2201-00	50V 22PF
C 802	176-2201-00	50V 22PF
C 803	178-4732-78	25V 0.047 μF

REF No.	PART No.	DESCRIPTION
C 804	178-4732-78	25V 0.047 μF
C 805	178-1032-78	25V 0.01 μF
C 806	183-4763-32	16V 47 μF
C 807	183-1073-22	10V 100 μF
C 808	178-1032-78	25V 0.01 μF
C 815	178-1042-78	25V 0.1 μF
C 816	178-1022-78	50V 1000PF
C 817	176-1011-00	50V 100PF
C 818	178-1032-78	25V 0.01 μF
C 820	178-4732-78	25V 0.047 μF
C 822	178-1022-78	50V 1000PF
C 823	178-1022-78	50V 1000PF
R 102	117-1021-10	1/10W 1KΩ
R 105	117-4721-10	1/10W 4.7KΩ
R 106	117-1231-10	1/10W 12KΩ
R 111	117-1021-10	1/10W 1KΩ
R 112	117-1021-10	1/10W 1KΩ
R 113	117-5631-10	1/10W 56KΩ
R 116	117-2221-10	1/10W 2.2KΩ
R 117	117-2221-10	1/10W 2.2KΩ
R 121	117-4741-10	1/10W 470KΩ
R 122	117-1011-10	1/10W 100Ω
R 301	117-4731-10	1/10W 47KΩ
R 302	117-2231-10	1/10W 22KΩ
R 303	117-2231-10	1/10W 22KΩ
R 305	117-2231-10	1/10W 22KΩ
R 308	117-4721-10	1/10W 4.7KΩ
R 309	117-4721-10	1/10W 4.7KΩ
R 311	111-3321-91	1/4WSS 3.3KΩ
R 312	117-1031-10	1/10W 10KΩ
R 313	117-4721-10	1/10W 4.7KΩ
R 314	117-1031-10	1/10W 10KΩ
R 318	117-1031-10	1/10W 10KΩ
R 402	117-1041-10	1/10W 100KΩ
R 403	117-1041-10	1/10W 100KΩ
R 404	117-1041-10	1/10W 100KΩ
R 406	117-4731-10	1/10W 47KΩ
R 407	111-2291-91	1/4WSS 2.2Ω
R 408	111-2291-91	1/4WSS 2.2Ω
R 412	111-5611-91	1/4WSS 560Ω

REF No.	PART No.	DESCRIPTION
R 413	111-1221-91	1/4WSS 1.2KΩ
R 414	117-4731-10	1/10W 47KΩ
R 415	111-4711-91	1/4WSS 470Ω
R 419	111-5611-91	1/4WSS 560Ω
R 501	117-4721-10	1/10W 4.7KΩ
R 502	117-4721-10	1/10W 4.7KΩ
R 503	117-1021-10	1/10W 1KΩ
R 504	117-1021-10	1/10W 1KΩ
R 505	117-1031-10	1/10W 10KΩ
R 506	117-1031-10	1/10W 10KΩ
R 507	117-3311-10	1/10W 330Ω
R 508	117-3311-10	1/10W 330Ω
R 509	117-1021-10	1/10W 1KΩ
R 510	117-1021-10	1/10W 1KΩ
R 511	117-1031-10	1/10W 10KΩ
R 512	117-1031-10	1/10W 10KΩ
R 513	117-3311-10	1/10W 330Ω
R 514	117-3311-10	1/10W 330Ω
R 515	117-4721-10	1/10W 4.7KΩ
R 516	117-4721-10	1/10W 4.7KΩ
R 517	117-4721-10	1/10W 4.7KΩ
R 518	117-4721-10	1/10W 4.7KΩ
R 519	117-4721-10	1/10W 4.7KΩ
R 520	117-4721-10	1/10W 4.7KΩ
R 524	117-1031-10	1/10W 10KΩ
R 602	117-1031-10	1/10W 10KΩ
R 604	117-1231-10	1/10W 12KΩ
R 605	117-4721-10	1/10W 4.7KΩ
R 606	117-4721-10	1/10W 4.7KΩ
R 607	117-4721-10	1/10W 4.7KΩ
R 608	117-4721-10	1/10W 4.7KΩ
R 610	117-4721-10	1/10W 4.7KΩ
R 701	117-4721-10	1/10W 4.7KΩ
R 702	117-4721-10	1/10W 4.7KΩ
R 703	117-1021-10	1/10W 1KΩ
R 704	117-4721-10	1/10W 4.7KΩ
R 705	117-1021-10	1/10W 1KΩ
R 706	117-4721-10	1/10W 4.7KΩ
R 707	117-1021-10	1/10W 1KΩ
R 708	111-1001-91	1/4WSS 10Ω

REF No.	PART No.	DESCRIPTION
R 709	117-1031-10	1/10W 10KΩ
R 711	117-4731-10	1/10W 47KΩ
R 801	117-1041-10	1/10W 100KΩ
R 802	117-2221-10	1/10W 2.2KΩ
R 803	117-1031-10	1/10W 10KΩ
R 804	117-2221-10	1/10W 2.2KΩ
R 805	117-1031-10	1/10W 10KΩ
R 806	117-1031-10	1/10W 10KΩ
R 807	117-1031-10	1/10W 10KΩ
R 808	117-1031-10	1/10W 10KΩ
R 810	117-2231-10	1/10W 22KΩ
R 811	117-1021-10	1/10W 1KΩ
R 812	117-1021-10	1/10W 1KΩ
R 814	117-1031-10	1/10W 10KΩ
R 818	117-4731-10	1/10W 47KΩ
R 819	117-1041-10	1/10W 100KΩ
R 820	117-1041-10	1/10W 100KΩ
R 821	117-2221-10	1/10W 2.2KΩ
R 822	117-1031-10	1/10W 10KΩ
R 823	117-2221-10	1/10W 2.2KΩ
R 824	111-1011-91	1/4WSS 100Ω
R 825	111-1011-91	1/4WSS 100Ω
R 826	117-1821-10	1/10W 1.8KΩ
R 827	117-1041-10	1/10W 100KΩ
R 828	117-2221-10	1/10W 2.2KΩ
R 829	117-4711-10	1/10W 470Ω
R 830	117-1031-10	1/10W 10KΩ
R 831	117-1021-10	1/10W 1KΩ
R 832	117-1031-10	1/10W 10KΩ
R 833	117-2231-10	1/10W 22KΩ
R 834	117-4731-10	1/10W 47KΩ
R 901	117-1031-10	1/10W 10KΩ
R 902	117-4721-10	1/10W 4.7KΩ
R 903	117-4731-10	1/10W 47KΩ
SUP101	060-0122-91	DSP-141N
CN 101	074-1198-68	OUTLET SOCKET
CN 102	074-1214-00	OUTLET SOCKET
CN 105	074-1126-10	OUTLET SOCKET
CN 106	074-1186-26	OUTLET SOCKET
SW 301	013-6100-00	RESET SWITCH

Switch PWB (B2) section

REF No.	PART No.	DESCRIPTION
IC 101	051-6013-00	LC75854W
D 101	001-0529-41	MA8075M
D 102	001-0529-41	MA8075M
D 103	001-7046-00	NSPW310BS
D 104	001-7046-00	NSPW310BS
C 101	168-4732-78	25V 0.047 μF
C 102	168-4732-78	25V 0.047 μF
C 103	168-1022-55	50V 1000PF
C 104	168-4732-78	25V 0.047 μF
C 105	042-0416-51	6.3V 10 μF
R 101	119-2221-10	1/16W 2.2KΩ
R 102	119-2221-10	1/16W 2.2KΩ
R 103	119-2221-10	1/16W 2.2KΩ
R 104	119-4731-10	1/16W 47KΩ
R 105	119-1031-10	1/16W 10KΩ
R 106	119-3921-10	1/16W 3.9KΩ
R 107	119-1241-10	1/16W 120KΩ


REF No.	PART No.	DESCRIPTION
R 108	032-0092-80	1/10W 330Ω 1%
R 109	032-0092-80	1/10W 330Ω 1%
R 110	032-0092-80	1/10W 330Ω 1%
R 111	032-0092-80	1/10W 330Ω 1%
R 112	119-1021-10	1/16W 1KΩ
R 113	119-1011-10	1/16W 100Ω
R 114	119-1021-10	1/16W 1KΩ
CN 107	076-0535-01	PLUG
PL 101	017-0444-00	14V 50mA
PL 102	017-0444-00	14V 50mA
PL 103	017-0444-00	14V 50mA
PL 104	017-0444-00	14V 50mA
PL 105	017-0444-00	14V 50mA
S 101	013-6001-50	SKQCAB
S 102	013-6305-00	SKQMAH
S 103	013-6305-00	SKQMAH
S 104	013-6305-00	SKQMAH

REF No.	PART No.	DESCRIPTION
S 105	013-6001-50	SKQCAB
S 106	013-6305-00	SKQMAH
S 107	013-6305-00	SKQMAH
S 108	013-6305-00	SKQMAH
S 109	013-6001-50	SKQCAB
S 110	013-6001-50	SKQCAB
S 111	013-6305-00	SKQMAH
S 112	013-6001-50	SKQCAB
S 113	013-6305-00	SKQMAH
S 114	013-6001-50	SKQCAB
S 115	013-6305-00	SKQMAH
S 116	013-6001-50	SKQCAB
S 117	013-6305-00	SKQMAH
S 118	016-9900-81	SIM-026MT
S 119	013-6510-50	LUMI SWITCH
S 120	013-6305-00	SKQMAH
IR 101	060-4008-00	RS-171

■ EXPLODED VIEW:

CD mechanism section 929-0092-82(BB-CD)

Drive unit section

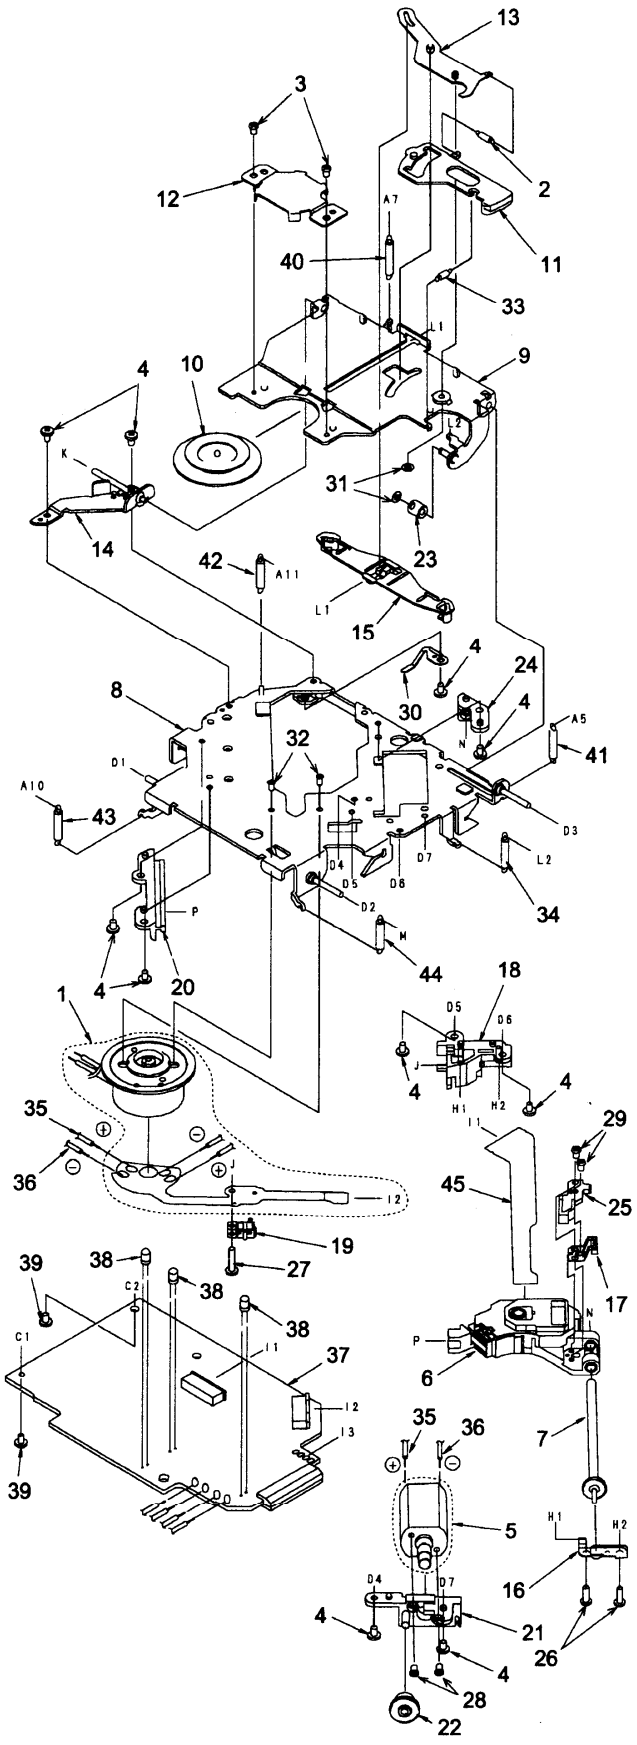

■ PARTS LIST:

CD mechanism section 929-0092-82(BB-CD)


Note) Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.

Drive unit section

NO.	PARTS NO.	DESCRIPTION	Q'TY
1	SMA-151-100	MOTOR ASSY (SPINDLE)	1
2	750-3098-00	L-LINK SPRING	1
3	716-1468-00	SCREW (M2x 2.5)	2
4	716-2003-81	SCREW (M2x 3)	10
5	SMA-146-100	MOTOR ASSY (SLED)	1
6	969-0008-00	PICK UP UNIT	1
7	HBS-432-100	LS-GEAR ASSY	1
8	966-0447-07	DR-PLATE-ASSY	1
9	966-0449-04	CLAMP-LINK-ASSY	1
10	621-0205-02	CLAMPER RING	1
11	621-0251-03	LOCK LINK	1
12	620-0198-03	CLAMPER PLATE	1
13	966-0314-01	STOP LINK-ASSY	1
14	966-0448-01	SIDE PLATE-ASSY	1
15	621-0252-03	DISC STOPPER	1
16	620-0491-03	SPRING PLATE	1
17	966-0454-00	SCREW H-RACK-ASSY	1
18	621-0358-02	LS-HOLDER-F	1
19	013-7100-00	SWITCH (LIMIT)	1
20	621-0357-03	PICK UP GUIDE	1
21	621-0253-02	MOTOR HOLDER	1
22	621-0255-02	SECOND GEAR	1
23	622-1073-02	CLAMPER ROLLER	1
24	621-0359-02	LS-HOLDER-R	1

NO.	PARTS NO.	DESCRIPTION	Q'TY
25	621-0375-00	SH-BASE	1
26	716-0675-00	SCREW (M2x 5.5)	2
27	716-1555-00	WAVE SCREW (φ 2x 8)	1
28	732-2004-11	SEMS SCREW (M2x 4)	2
29	739-1735-17	PRECISION SCREW (M1.7x 3.5)	2
30	620-0690-01	RATTLE PLATE	1
31	746-0761-00	WASHER	2
32	716-1733-00	SCREW (M1.7x 2.3)	2
33	750-3099-00	ES-SPRING	1
34	750-3097-03	CLAMPER SPRING	1
35	816-2373-00	LEAD WIRE (WHT)	1
36	816-2372-00	LEAD WIRE (BLU)	1
37	039-1732-01	CD PWB (WITHOUT COMPONENT)	1
38	001-0563-00	LED	3
39	716-1670-00	SCREW (M2x 4)	2
40	750-3202-00	CENTER SPRING-B	1
41	750-3096-01	DR-SPRING R	1
42	750-3164-00	DR-SPRING LR	1
43	750-3188-00	DR-SPRING F-B	1
44	750-3201-00	DR-SPRING F-R	1
45	039-1587-00	FPC (WITHOUT COMPONENT)	1

MECH chassis section

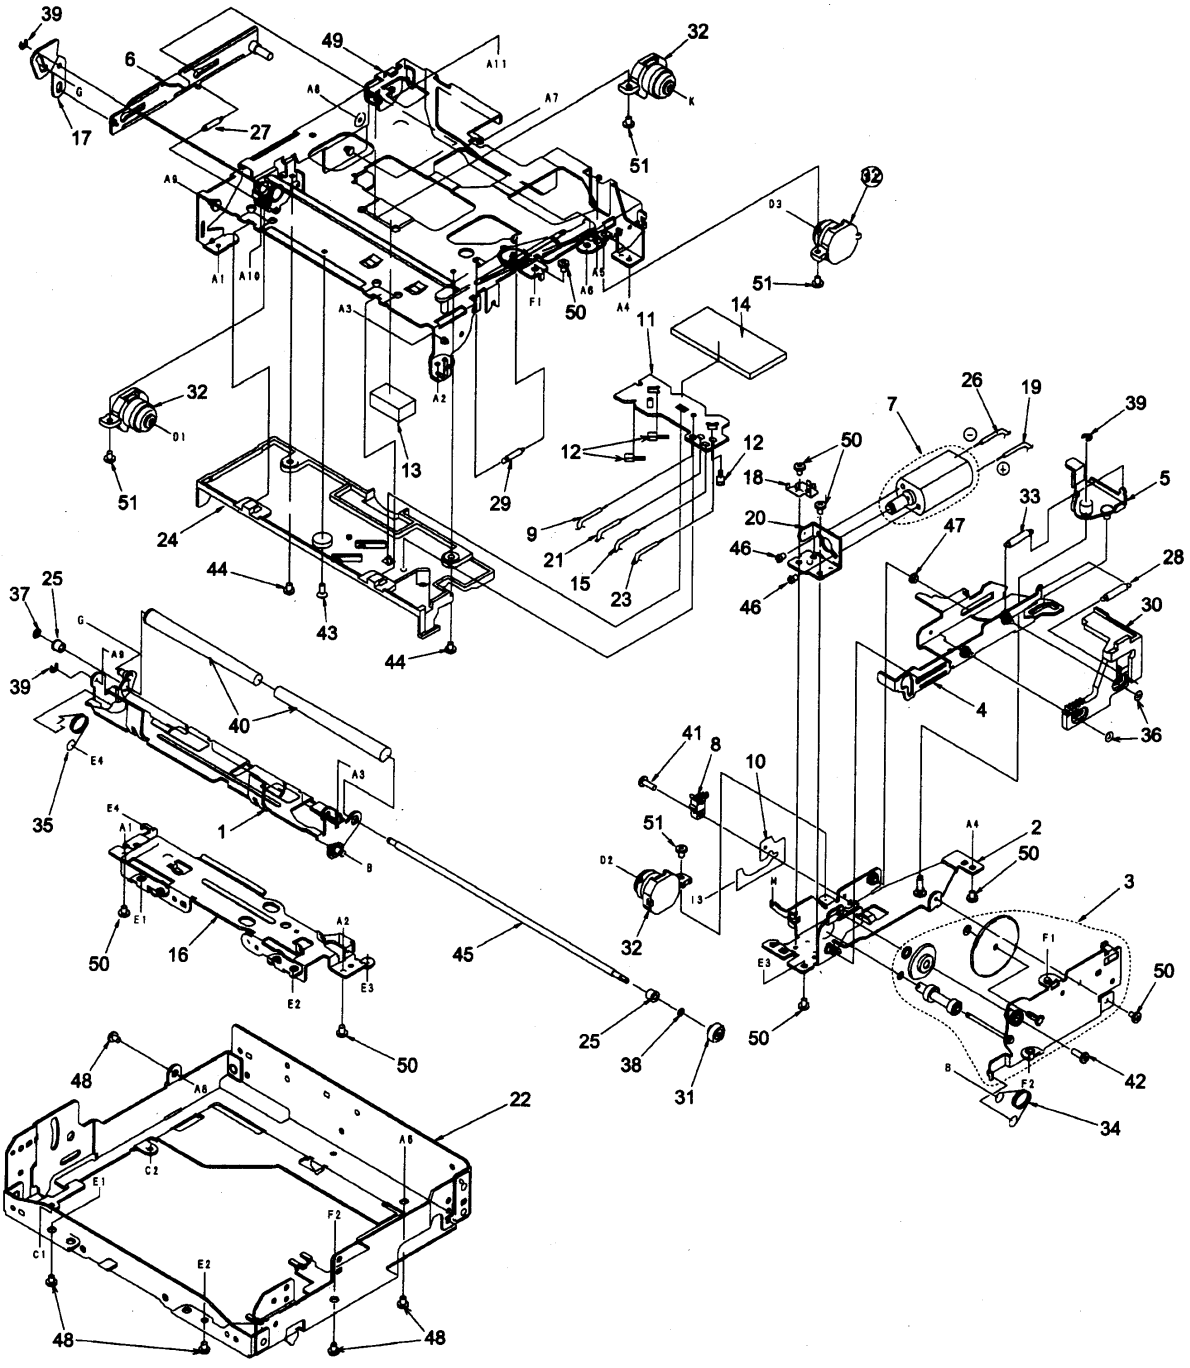

MECH chassis section

NO.	PARTS NO.	DESCRIPTION	Q'TY
1	966-0309-05	L-DISC-G-ASSY	1
2	966-0310-06	SHIFT-P-CH-ASSY	1
3	HBS-430-100	GEAR PLATE ASSY	1
4	966-0312-06	SHIFT-PLATE-ASSY	1
5	966-0358-01	DRIVE-L-PLATE-ASSY	1
6	966-0359-03	SIDE-L-PLATE-ASSY	1
7	SMA-147-100	MOTOR ASSY (LOADING)	1
8	013-3879-01	CHUCKING SWITCH	1
9	804-4910-60	VINYL-COAT-WIRE (YEL)	1
10	039-0586-01	CHUCKING SWITCH PWB (WITHOUT COMPONENT)	1
11	039-0588-01	SENSOR PWB (WITHOUT COMPONENT)	1
12	060-0252-01	PHOTO-TR	3
13	345-7513-01	CLAMPER SHEET	1
14	345-7514-00	SENSOR PWB SHEET	1
15	802-4910-60	VINYL-COAT-WIRE (RED)	1
16	620-0485-04	FRONT PLATE	1
17	620-0488-01	S-L-LINK PLATE	1
18	620-0489-02	MOTOR PLATE	1
19	802-4904-60	VINYL-COAT-WIRE (RED)	1
20	620-0492-01	MOTOR BRACKET	1
21	801-4910-60	VINYL-COAT-WIRE (BRN)	1
22	620-0773-01	CD-MECH-BRKT	1
23	800-4910-60	VINYL-COAT-WIRE (BLK)	1
24	621-0402-01	U-DISC GUIDE-F	1
25	621-0243-02	ROLLER SLEEVE	2

NO.	PARTS NO.	DESCRIPTION	Q'TY
26	800-4904-60	VINYL-COAT-WIRE (BLK)	1
27	750-3189-00	SIDE-L-SPRING	1
28	750-3098-00	L-LINK SPRING	1
29	750-3094-00	S-ARM SPRING	1
30	621-0248-07	RACK GEAR	1
31	621-0249-02	ROLLER GEAR	1
32	629-0074-00	DAMPER	4
33	750-3092-03	SHIFT SPRING	1
34	750-3091-03	ROADING-SPRING-R	1
35	750-3090-02	ROADING-SPRING-L	1
36	746-0877-02	WASHER	2
37	746-0762-00	WASHER	1
38	746-0712-03	WASHER	1
39	743-1500-10	E-RING	3
40	621-0258-03	LOADING ROLLER	2
41	716-1742-00	SCREW (M2x 5)	1
42	716-1704-00	SCREW (M2x 7)	1
43	716-1677-00	SCREW (M2x 5)	1
44	716-1507-00	SCREW (M2x 3)	2
45	622-1072-05	ROLLER SHAFT	1
46	716-1468-00	SCREW (M2x 2.5)	2
47	622-1219-01	SHIFT ROLLER	1
48	714-2603-81	SCREW (M2.6x 3)	5
49	966-0308-11	CHASSIS ASSY	1
50	714-2003-81	SCREW (M2x 3)	8
51	716-1670-00	SCREW (M2x 4)	4

■ ELECTRICAL PARTS LIST:

CD mechanism section (B3)

Note)Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.

REF No.	PART No.	DESCRIPTION
C1	163-1073-10	6.3V 100 μ F
C3	178-1042-78	0.1 μ F
C4	178-2222-78	2200pF
C5	178-1042-78	0.1 μ F
C6	178-1042-78	0.1 μ F
C7	178-1042-78	0.1 μ F
C8	176-1501-00	15pF CH
C9	176-1501-00	15pF CH
C10	176-1201-00	12pF CH
C11	178-1042-78	0.1 μ F
C13	178-1042-78	0.1 μ F
C14	178-1042-78	0.1 μ F
C15	178-1042-78	0.1 μ F
C16	178-1042-78	0.1 μ F
C17	163-1073-31	16V 100 μ F
C18	176-4701-00	47pF CH
C19	178-1532-78	0.015 μ F
C20	178-1032-78	0.01 μ F
C21	178-2722-78	2700pF
C22	178-4722-78	4700pF
C23	178-1042-78	0.1 μ F
C24	178-1042-78	0.1 μ F
C25	178-1042-78	0.1 μ F
C26	178-4712-78	470pF
C27	178-4712-78	470pF
C28	178-4732-78	0.047 μ F
C29	178-4732-78	0.047 μ F
C30	178-4732-78	0.047 μ F
C31	178-4732-78	0.047 μ F
C32	163-4763-05	4V 47 μ F
C33	163-4763-05	4V 47 μ F
C34	176-1801-00	18pF CH
C35	176-6097-00	6pF CH

REF No.	PART No.	DESCRIPTION
C36	176-6801-00	68pF CH
C37	176-2201-00	22pF CH
C38	178-1042-78	0.1 μ F
C39	163-4763-05	4V 47 μ F
C44	178-2242-78	0.22 μ F
C45	178-2242-78	0.22 μ F
C46	163-4763-10	6.3V 47 μ F
C47	178-8222-78	8200pF
C48	178-1042-78	0.1 μ F
C50	163-1073-10	6.3V 100 μ F
C51	178-1042-78	0.1 μ F
C52	178-2232-78	0.022 μ F
C54	176-2201-00	22pF CH
C61	178-1042-78	0.1 μ F
C63	178-1042-78	0.1 μ F
C64	178-1042-78	0.1 μ F
C65	178-1042-78	0.1 μ F
D4	001-0516-00	MA111
IC1	051-5704-00	TA2096FN
IC2	051-6342-00	TC9462F
IC3	051-6045-08	BA5984FP
J1	074-1138-66	16P
J2	074-1138-06	6P
L1	010-2155-93	10 μ H
L3	010-2199-74	10 μ H J
Q1	101-1188-50	2SB1188PQR
R1	117-2211-10	1/10W 220 Ω
R2	117-2211-10	1/10W 220 Ω
R3	117-5611-10	1/10W 560 Ω
R4	117-5611-10	1/10W 560 Ω
R5	117-4711-10	1/10W 470 Ω
R6	117-3311-10	1/10W 330 Ω
R7	117-4721-10	1/10W 4.7K Ω

REF No.	PART No.	DESCRIPTION
R8	117-1041-10	1/10W 100K Ω
R9	117-1031-10	1/10W 10K Ω
R10	117-4731-10	1/10W 47K Ω
R12	117-4741-10	1/10W 470K Ω
R13	117-3331-10	1/10W 33K Ω
R14	117-3321-10	1/10W 3.3K Ω
R15	117-1031-10	1/10W 10K Ω
R16	117-3321-10	1/10W 3.3K Ω
R17	117-3321-10	1/10W 3.3K Ω
R18	117-3321-10	1/10W 3.3K Ω
R19	117-3321-10	1/10W 3.3K Ω
R20	117-3321-10	1/10W 3.3K Ω
R21	117-2221-10	1/10W 2.2K Ω
R22	117-8211-10	1/10W 820K Ω
R23	117-9131-10	1/10W 91K Ω
R24	117-1041-10	1/10W 100K Ω
R25	117-1041-10	1/10W 100K Ω
R26	117-1841-10	1/10W 180K Ω
R27	117-1841-10	1/10W 180K Ω
R28	117-2211-10	1/10W 220 Ω
R29	117-2201-10	1/10W 22 Ω
R30	117-1041-10	1/10W 100K Ω
R31	117-1041-10	1/10W 100K Ω
R32	117-1041-10	1/10W 100K Ω
R33	117-1041-10	1/10W 100K Ω
R34	117-1041-10	1/10W 100K Ω
R35	117-2241-10	1/10W 220K Ω
R36	117-1041-10	1/10W 100K Ω
R37	117-1041-10	1/10W 100K Ω
R38	117-8231-10	1/10W 82K Ω
R39	117-1841-10	1/10W 180K Ω
X1	061-3500-90	16.920MHz

Sensor PWB section (B4)

REF No.	PART No.	DESCRIPTION
Q101	060-0252-01	PT4850F

REF No.	PART No.	DESCRIPTION
Q102	060-0252-01	PT4850F

REF No.	PART No.	DESCRIPTION
Q103	060-0252-01	PT4850F

Chucking SW PWB section (B5)

REF No.	PART No.	DESCRIPTION
S2	013-3879-01	SPPB12

Limit SW PWB (Motor assy/SMA-151-100) section (B6)

REF No.	PART No.	DESCRIPTION
S1	013-7100-00	SPPB11