EXPLODED VIEW (UNIT)

Block No.M1MM

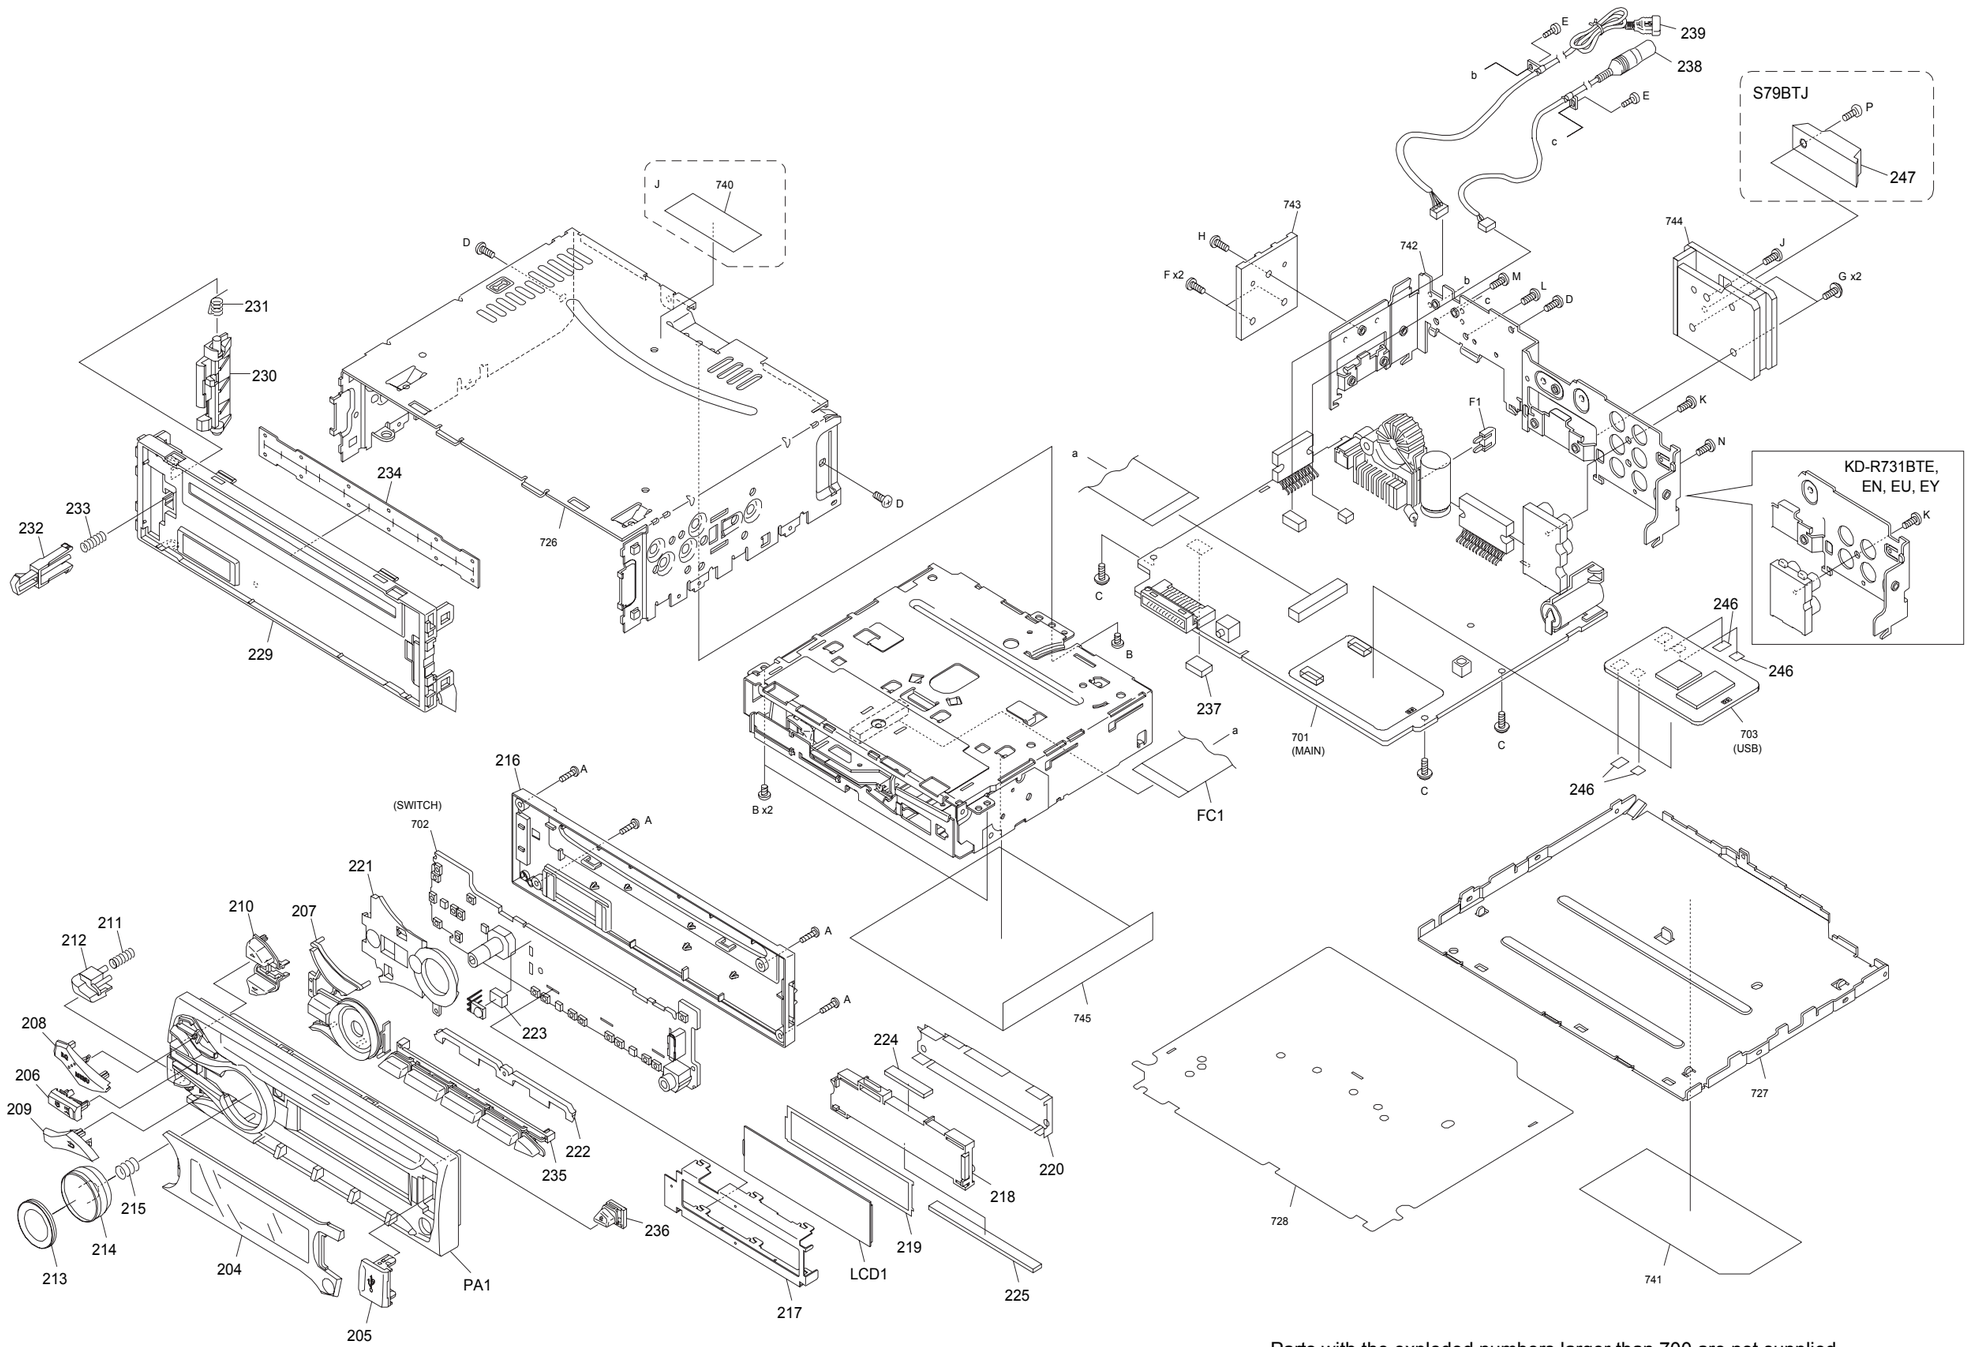

Parts with the exploded numbers larger than 700 are not supplied.

No.MA510

created date:2012-07-09

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A735BTJ	A	KD-R730BTJ	B	KD-R731BTE	C	KD-R731BTEN	D
KD-R731BTEU	E	KD-R731BTEY	F	KD-R736BTU	G	KD-R736BTUN	H
KD-R736BTUP	I	KD-R739BTUR	J	KD-S79BTJ	K		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
EXPLODED VIEW (UNIT) <M1MM>						
⚠	F1	QMFZ064-100-J1	FUSE	10A	1	
	FC1	WJT0294-001A-E	E-CARD WIRE		1	
	LCD1	QLD0695-001	LCD MODULE		1	
	PA1	GE10321-010A	FRONT PANEL		1	A
	PA1	GE10321-007A	FRONT PANEL		1	B,C,E,F,G,H,I
	PA1	GE10321-012A	FRONT PANEL		1	D,K
	PA1	GE10321-015A	FRONT PANEL		1	J
	A	QYSDSF2008ZA	TAP SCREW	M2 x 8mm	4	
	B	QYSDST2604ZA	TAP SCREW	M2.6 x 4mm	3	
	C	GE40377-002A	SCREW		3	
	D	QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	3	
	E	QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	2	
	F	QYSDST2610ZA	TAP SCREW	M2.6 x 10mm	2	
	G	GE40377-005A	SPECIAL SCREW		2	
	H	QYSDST2608ZA	TAP SCREW	M2.6 x 8mm	1	
	J	QYSDST2610ZA	TAP SCREW	M2.6 x 10mm	1	
	K	QYSDSF2608ZA	TAP SCREW	M2.6 x 8mm	1	
	L	QYSDSG3006ZA	TAP SCREW	M3 x 6mm	1	
	M	QYSDSG3006ZA	TAP SCREW	M3 x 6mm	1	
	N	QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	1	A,B,K
	P	QYSDSP4014ZA	SCREW	M4 x 14mm	1	K
	204	GE20294-005A	FINDER		1	A
	204	GE20294-025A	FINDER		1	B
	204	GE20294-006A	FINDER		1	C,D,E,F
	204	GE20294-026A	FINDER		1	G,H,I
	204	GE20294-030A	FINDER		1	J
	204	GE20294-034A	FINDER		1	K
	205	GE34515-001A	USB DOOR COVER		1	
	206	GE34530-001A	SEARCH BUTTON		1	
	207	GE34531-002A	SRC BUTTON		1	
	208	GE34527-002A	MENU BUTTON		1	
	209	GE34528-001A	BACK BUTTON		1	A,B,G,H,I
	209	GE34528-002A	BACK BUTTON		1	C,E,F
	209	GE34528-004A	BACK BUTTON		1	D
	209	GE34528-003A	BACK BUTTON		1	J,K
	210	GE34529-001A	UP DOWN BUTTON		1	
	211	GE30999-009A	COMP.SPRING		1	
	212	GE34537-002A	DETACH BUTTON		1	
	213	GE34647-001A	VOL.KNOB TOP		1	
	214	GE34648-002A	VOL.KNOB BASE		1	A,J
	214	GE34648-001A	VOL.KNOB BASE		1	B,C,D,E,F,G,H,I,K
	215	GE40127-006A	KNOB SPRING		1	
	216	GE10322-001A	REAR COVER		1	
	217	GE34535-001A	LCD CASE		1	
	218	GE34536-001A	LCD LENS		1	
	219	GE40566-001A	LIGHTING SHEET		1	
	220	GE40565-002A	REFLECTION SHT		1	
	221	GE34532-001A	LIGHT GUIDE		1	
	222	GE34533-001A	PRESET LENS		1	
	223	GE40466-013A	SPACER		1	A,B,C,D,E,F,G,H,I
	223	GE40466-015A	SPACER		1	J,K
	224	QNZ1002-001	RUBBER CONNE		1	
	225	QNZ1003-001	RUBBER CONNE		1	
	229	GE10323-001A	FRONT CHASSIS		1	
	230	GE34072-001A	LOCK LEVER		1	A,B,C,D,E,F,G,H,I
	230	GE34072-002A	LOCK LEVER		1	J,K
	231	GE40514-002A	TORSION SPRING		1	
	232	GE34073-001A	RELEASE LEVER		1	
	233	GE30999-008A	COMP.SPRING		1	
	234	GE40500-001A	BLIND		1	
	235	GE20297-001A	PRESET BUTTON		1	
	236	GE34526-001A	EJECT BUTTON		1	
	237	GE40320-005A	COOLING RUBBER		1	
	238	QAM1370-001	CAR CABLE		1	
	239	QAM1077-003	USB CABLE		1	
	246	GE40622-002A	SHEET		4	J,K
	247	GE40225-001A	CAR STEREO TAG		1	K

EXPLODED VIEW (CD MECHANISM : FLM-HC3-1D)

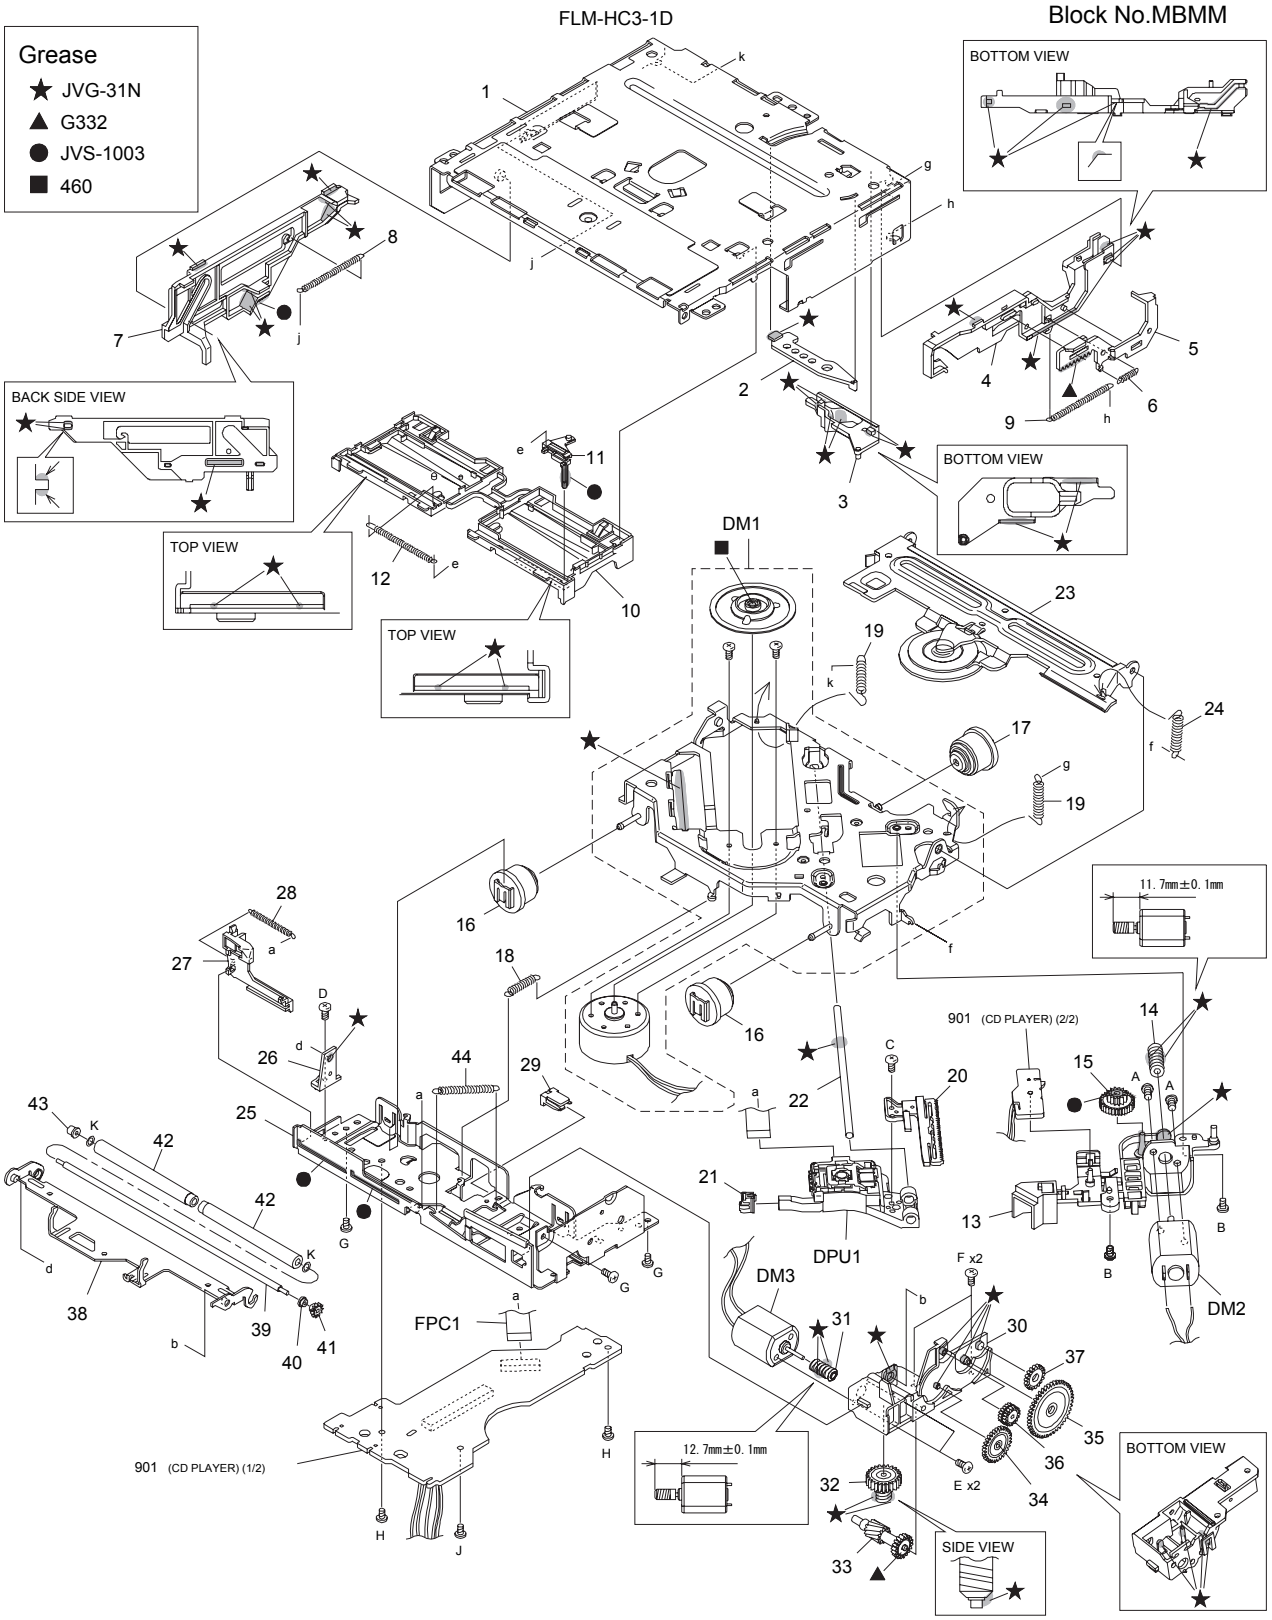

Parts with the exploded numbers larger than 900 are not supplied.

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A735BTJ	A	KD-R730BTJ	B	KD-R731BTE	C	KD-R731BTEN	D
KD-R731BTEU	E	KD-R731BTEY	F	KD-R736BTU	G	KD-R736BTUN	H
KD-R736BTUP	I	KD-R739BTUR	J	KD-S79BTJ	K		

Safe	Symbol No.		Parts No.	Parts Name	Description	QTY	Local
EXPLODED VIEW (CD MECHANISM: FLM-HC3-1D) <MBMM>							
	DM1		CM-FLMHC1D	SPINDLE MOTOR ASSY		1	
	DM2		QAR0144-003	MOTOR	2.0V DC	1	
	DM3		QAR0144-003	MOTOR	2.0V DC	1	
⚠	DPU1		QAL1226-001	PICK UP		1	
	FPC1		QAL0817-003	FPC		1	
	A		QYSPSPT2025MA	SCREW	M2 x 2.5mm	2	
	B		VKZ4539-054	MINI SCREW		2	
	C		QYSPSGT1745ZA	TAP SCREW	M1.7 x 4.5mm	1	
	D		VKZ4539-054	MINI SCREW		1	
	E		QYSPSPT2025MA	SCREW	M2 x 2.5mm	2	
	F		VKZ4539-054	MINI SCREW		2	
	G		VKZ4539-054	MINI SCREW		3	
	H		VKZ4539-054	MINI SCREW		2	
	J		VKZ4539-054	MINI SCREW		1	
	K		LV45449-001A	WASHER		2	
	1		LV11685-004A	TOP FRAME		1	
	2		LV38953-002A	TRIGGER PLATE		1	
	3		LV38952-001A	FL SLIDER(B)		1	
	4		LV22826-003A	LOAD CAM		1	
	5		LV38951-001A	TRIGGER RACK		1	
	6		LV45415-001A	TRIGGER SPRING		1	
	7		LV22827-001A	FL SLIDER(L)		1	
	8		LV45416-001A	LOAD CAM SPRING		1	
	9		LV45417-001A	FL SLIDERSPRING		1	
	10		LV11689-001A	DISC GUIDE		1	
	11		LV38957-001A	SW SLIDER(R)		1	
	12		LV45505-001A	SW ACT SPRING		1	
	13		LV22828-001A	FEED BRACKET		1	
	13	or	LV22828-002A	FEED BRACKET		1	
	14		LV36814-201A	F WORM GEAR		1	
	15		LV36815-002A	F WHEEL GEAR		1	
	16		LV36904-001A	DAMPER		2	
	17		LV37061-001A	DAMPER		1	
	18		LV45422-001A	SUS SPRING(F)		1	
	19		LV45423-001A	SUS SPRING(B)		2	
	20		LV38960-001A	FEED RACK		1	
	21		LV36813-201A	SUB GUIDE CAP		1	
	22		LV44555-001A	MAIN SHAFT		1	
	23		LV38950-002A	HC CL.BASE ASSY		1	
	24		LV45421-001A	HC CL.SPRING		1	
	25		LV11686-003A	BOTTOM FRAME		1	
	26		LV38954-003A	R.ARM GUIDE		1	
	27		LV39496-001A	SW ACTUATOR (2)		1	
	28		LV45505-001A	SW ACT SPRING		1	
	29		LV38962-001A	WIRE GUIDE		1	
	30		LV11688-001A	LOADING BASE		1	
	31		LV38963-001A	D.WORM GEAR		1	
	32		LV38964-001A	D.WHEEL GEAR		1	
	33		LV38965-002A	ACT GEAR(1)		1	
	34		LV38966-001A	ACT GEAR(2)		1	
	35		LV38967-001A	ACT GEAR(3)		1	
	36		LV38968-001A	ROLLER ACT GEAR		1	
	37		LV38969-001A	DRIVE GEAR		1	
	38		LV11690-001A	ROLLER ARM		1	
	39		LV45654-002A	ROLLER SHAFT 2		1	
	40		LV45412-001A	RA COLLAR(R)		1	
	41		LV38970-001A	HC ROLLER GEAR		1	
	42		LV45424-001A	HC ROLLER		2	
	43		LV45648-001A	RA COLLAR(L) 2		1	
	44		LV45418-001A	R.ARM SPRING		1	
ELECTORIC UNIT Except R739BTUR, S79BTJ <01>							
⚠	IC1		TEF6614TV1S4-X	IC		1	A,B,C,D,E,F,G,H,I
	IC90		NJM4565E-X	IC		1	A,B,C,D,E,F,G,H,I
	IC161		TDA7720-X	IC		1	A,G,H,I
	IC161		TDA7718B-X	IC		1	B,C,D,E,F
⚠	IC301		TDA7851A	IC		1	A,B,C,D,E,F,G,H,I
⚠	IC501		LA6565-X	IC		1	A,B,C,D,E,F,G,H,I
⚠	IC541		MN6627553PA	IC		1	A,B,C,D,E,F,G,H,I
	IC581		NJM4565E-X	IC		1	A,B,C,D,E,F,G,H,I
⚠	IC701		JES225E	IC(MCU)		1	A,B,G,H,I
⚠	IC701		JES226C	IC(MCU)		1	C,D,E,F
	IC771		BR24T02FJ-W-X	IC		1	A,B,C,D,E,F,G,H,I
	IC771	or	R1EX24002ASAA-X	IC		1	A,B,C,D,E,F,G,H,I
	IC801		74AHCT126PW-X	IC		1	A,B
⚠	IC901		LV5680P	IC		1	A,B,C,D,E,F,G,H,I
	IC902		XC6213B332NG-X	IC		1	A,B,C,D,E,F,G,H,I
	IC921		BD00GA3WEFJ-X	IC		1	A,B,C,D,E,F,G,H,I
⚠	IC931		BD9876EFJ-X	IC		1	A,B,C,D,E,F,G,H,I
⚠	IC941		NJM2387ADL3-X	IC		1	A,B,C,D,E,F,G,H,I
⚠	IC942		NJM2387ADL3-X	IC		1	A,B,C,D,E,F,G,H,I
	Q271		IMX9-W	PAIR TRANSISTOR		1	A,B,G,H,I
	Q301		DRC2114E-X	DIGI TRANSISTOR		1	A,B,C,D,E,F,G,H,I
	Q301	or	RT1N141C-X	DIGI TRANSISTOR		1	A,B,C,D,E,F,G,H,I
	Q322		IMX9-W	PAIR TRANSISTOR		1	A,B,C,D,E,F,G,H,I
	Q332		IMX9-W	PAIR TRANSISTOR		1	A,B,C,D,E,F,G,H,I
	Q501		2SB1424/R/-W	TRANSISTOR		1	A,B,C,D,E,F,G,H,I
	Q540		2SA2188/F/-X	TRANSISTOR		1	A,B,C,D,E,F,G,H,I
	Q782		DRA2114E-X	DIGI TRANSISTOR		1	A,B,C,D,E,F,G,H,I
	Q782	or	RT1P141C-X	DIGI TRANSISTOR		1	A,B,C,D,E,F,G,H,I

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A735BTJ	A	KD-R730BTJ	B	KD-R731BTE	C	KD-R731BTEN	D
KD-R731BTEU	E	KD-R731BTEY	F	KD-R736BTU	G	KD-R736BTUN	H
KD-R736BTUP	I	KD-R739BTUR	J	KD-S79BTJ	K		

Safe	Symbol No.		Parts No.	Parts Name	Description	QTY	Local
	Q785		DRC2124E-X	DIGI TRANSISTOR		1	A,B,C,D,E,F,G,H,I
	Q785	or	RT1N241C-X	DIGI TRANSISTOR		1	A,B,C,D,E,F,G,H,I
	Q786		DRA2124E-X	DIGI TRANSISTOR		1	A,B,C,D,E,F,G,H,I
	Q786	or	RT1P241C-X	TRANSISTOR		1	A,B,C,D,E,F,G,H,I
	Q881		DRC2114E-X	DIGI TRANSISTOR		1	A,B,C,D,E,F,G,H,I
	Q881	or	RT1N141C-X	DIGI TRANSISTOR		1	A,B,C,D,E,F,G,H,I
	Q970		2SC1623A/5-6/-X	TRANSISTOR		1	A,B,C,D,E,F,G,H,I
	Q970	or	2SC3928A/QR/-X	TRANSISTOR		1	A,B,C,D,E,F,G,H,I
	Q971		2SC1623A/5-6/-X	TRANSISTOR		1	A,B,C,D,E,F,G,H,I
	Q971	or	2SC3928A/QR/-X	TRANSISTOR		1	A,B,C,D,E,F,G,H,I
	D3		NAF0029-001X	DIODE		1	A,B,C,D,E,F,G,H,I
	D271		BAW56-TP-X	SI DIODE		1	A,B,G,H,I
	D271	or	MC2836-X	DIODE		1	A,B,G,H,I
	D321		BAW56-TP-X	SI DIODE		1	A,B,C,D,E,F,G,H,I
	D321	or	MC2836-X	DIODE		1	A,B,C,D,E,F,G,H,I
	D331		BAW56-TP-X	SI DIODE		1	A,B,C,D,E,F,G,H,I
	D331	or	MC2836-X	DIODE		1	A,B,C,D,E,F,G,H,I
	D477		NAF0029-001X	DIODE		1	A,B,C,D,E,F,G,H,I
	D478		NAF0029-001X	DIODE		1	A,B,C,D,E,F,G,H,I
	D501		GS1J-LTP-X	SI DIODE		1	A,B,C,D,E,F,G,H,I
	D501	or	1SR154-400-X	SI DIODE		1	A,B,C,D,E,F,G,H,I
	D502		GS1J-LTP-X	SI DIODE		1	A,B,C,D,E,F,G,H,I
	D502	or	1SR154-400-X	SI DIODE		1	A,B,C,D,E,F,G,H,I
	D710		RKZ6.2B2KG-X	Z DIODE		1	A,B,C,D,E,F,G,H,I
	D710	or	DZ2J062/M/-X	Z DIODE		1	A,B,C,D,E,F,G,H,I
	D711		RKZ6.2B2KG-X	Z DIODE		1	A,B,C,D,E,F,G,H,I
	D711	or	DZ2J062/M/-X	Z DIODE		1	A,B,C,D,E,F,G,H,I
	D712		RKZ6.2B2KG-X	Z DIODE		1	A,B,C,D,E,F,G,H,I
	D712	or	DZ2J062/M/-X	Z DIODE		1	A,B,C,D,E,F,G,H,I
	D713		RKZ6.2B2KG-X	Z DIODE		1	A,B,C,D,E,F,G,H,I
	D713	or	DZ2J062/M/-X	Z DIODE		1	A,B,C,D,E,F,G,H,I
	D714		RKZ6.2B2KG-X	Z DIODE		1	A,B,C,D,E,F,G,H,I
	D714	or	DZ2J062/M/-X	Z DIODE		1	A,B,C,D,E,F,G,H,I
	D716		RKZ5.6B2KG-X	Z DIODE		1	A,B,C,D,E,F,G,H,I
	D716	or	DZ2J056/M/-X	Z DIODE		1	A,B,C,D,E,F,G,H,I
	D782		BAW56-TP-X	SI DIODE		1	A,B,C,D,E,F,G,H,I
	D782	or	MC2836-X	DIODE		1	A,B,C,D,E,F,G,H,I
	D783		RKS801KF-X	SI DIODE		1	A,B,C,D,E,F,G,H,I
	D783	or	DA2J101-X	SI DIODE		1	A,B,C,D,E,F,G,H,I
	D785		BAW56-TP-X	SI DIODE		1	A,B,C,D,E,F,G,H,I
	D785	or	MC2836-X	DIODE		1	A,B,C,D,E,F,G,H,I
	D786		RKS801KF-X	SI DIODE		1	A,B,C,D,E,F,G,H,I
	D786	or	DA2J101-X	SI DIODE		1	A,B,C,D,E,F,G,H,I
	D851		MBRX130-TP-X	SB DIODE		1	G,H,I
	D852		MBRX130-TP-X	SB DIODE		1	G,H,I
⚠	D901		1N5401-BPC04	SI DIODE		1	A,B,C,D,E,F,G,H,I
	D931		DB22306-X	SB DIODE		1	A,B,C,D,E,F,G,H,I
	D932		DB22306-X	SB DIODE		1	A,B,C,D,E,F,G,H,I
	D970		RKZ6.8B2KG-X	Z DIODE		1	A,B,C,D,E,F,G,H,I
	D970	or	DZ2J068/M/-X	Z DIODE		1	A,B,C,D,E,F,G,H,I
	D971		RKZ6.8B2KG-X	Z DIODE		1	A,B,C,D,E,F,G,H,I
	D971	or	DZ2J068/M/-X	Z DIODE		1	A,B,C,D,E,F,G,H,I
	D981		MBRX130-TP-X	SB DIODE		1	A,B,C,D,E,F,G,H,I
	D982		MBRX130-TP-X	SB DIODE		1	A,B,C,D,E,F,G,H,I
	C1		NDC31HJ-102X	C CAPACITOR	1000pF 50V J	1	A,B,C,D,E,F,G,H,I
	C2		NDC31HJ-7R0X	C CAPACITOR	7pF 50V J	1	A,B,C,D,E,F,G,H,I
	C3		NDC31HJ-102X	C CAPACITOR	1000pF 50V J	1	A,B,C,D,E,F,G,H,I
	C4		NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1	A,B,C,D,E,F,G,H,I
	C5		NDC31HJ-150X	C CAPACITOR	15pF 50V J	1	A,B,C,D,E,F,G,H,I
	C6		NDC31HJ-270X	C CAPACITOR	27pF 50V J	1	A,B,C,D,E,F,G,H,I
	C7		NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	A,B,C,D,E,F,G,H,I
	C8		NDC31HJ-2R0X	C CAPACITOR	2pF 50V J	1	A,B,C,D,E,F,G,H,I
	C9		NDC31HJ-5R6X	C CAPACITOR	5.6pF 50V J	1	A,B,C,D,E,F,G,H,I
	C10		NCB31AK-105X	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,I
	C11		NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	A,B,C,D,E,F,G,H,I
	C12		NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	A,B,C,D,E,F,G,H,I
	C13		NCB31AK-105X	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,I
	C14		NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1	A,B,C,D,E,F,G,H,I
	C15		NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I
	C16		NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	A,B,C,D,E,F,G,H,I
	C17		NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I
	C18		NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	A,B,C,D,E,F,G,H,I
	C19		NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I
	C22		NDC31HJ-120X	C CAPACITOR	12pF 50V J	1	A,B,C,D,E,F,G,H,I
	C23		NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I
	C24		NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	A,B,C,D,E,F,G,H,I
	C25		NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	A,B,C,D,E,F,G,H,I
	C26		QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	A,B,C,D,E,F,G,H,I
	C92		QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1	A,B,C,D,E,F,G,H,I
	C93		QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1	A,B,C,D,E,F,G,H,I
	C94		NDC31HJ-331X	C CAPACITOR	330pF 50V J	1	A,B,C,D,E,F,G,H,I
	C95		QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1	A,B,C,D,E,F,G,H,I
	C96		QEKJ1CM-226Z	E CAPACITOR	22uF 16V M	1	A,B,C,D,E,F,G,H,I
	C97		NDC31HJ-331X	C CAPACITOR	330pF 50V J	1	A,B,C,D,E,F,G,H,I
	C98		NCB31HK-333X	C CAPACITOR	0.033uF 50V K	1	A,B,C,D,E,F,G,H,I
	C99		NCB31HK-273X	C CAPACITOR	0.027uF 50V K	1	A,B,C,D,E,F,G,H,I
	C100		NCB31HK-273X	C CAPACITOR	0.027uF 50V K	1	A,B,C,D,E,F,G,H,I
	C101		NDC31HJ-220X	C CAPACITOR	22pF 50V J	1	A,B,C,D,E,F,G,H,I
	C102		NCB31HK-333X	C CAPACITOR	0.033uF 50V K	1	A,B,C,D,E,F,G,H,I
	C103		QEKJ1CM-226Z	E CAPACITOR	22uF 16V M	1	A,B,C,D,E,F,G,H,I

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A735BTJ	A	KD-R730BTJ	B	KD-R731BTE	C	KD-R731BTEN	D
KD-R731BTEU	E	KD-R731BTEY	F	KD-R736BTU	G	KD-R736BTUN	H
KD-R736BTUP	I	KD-R739BTUR	J	KD-S79BTJ	K		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C104	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I
	C105	NCB31HK-562X	C CAPACITOR	5600pF 50V K	1	A,B,C,D,E,F,G,H,I
	C161	QEKJ1HM-105Z-S	E CAPACITOR	1uF 50V M	1	A,B,C,D,E,F,G,H,I
	C162	QTE1V67-475Z	E CAPACITOR	4.7uF 35V	1	A,B,C,D,E,F,G,H,I
	C163	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	A,B
	C165	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,I
	C166	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,I
	C167	NDC31HJ-681X	C CAPACITOR	680pF 50V J	1	A,B,C,D,E,F,G,H,I
	C168	NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1	A,B,C,D,E,F,G,H,I
	C169	QEKJ1CM-106Z-S	E CAPACITOR	10uF 16V M	1	A,B,C,D,E,F,G,H,I
	C171	QEKJ1HM-105Z-S	E CAPACITOR	1uF 50V M	1	A,B,C,D,E,F,G,H,I
	C172	QTE1V67-475Z	E CAPACITOR	4.7uF 35V	1	A,B,C,D,E,F,G,H,I
	C173	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	A,B
	C175	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,I
	C176	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	1	A,B,C,D,E,F,G,H,I
	C177	NDC31HJ-681X	C CAPACITOR	680pF 50V J	1	A,B,C,D,E,F,G,H,I
	C179	QEKJ1CM-107Z-S	E CAPACITOR	100uF 16V M	1	A,B,C,D,E,F,G,H,I
	C180	NCB31HK-472X	C CAPACITOR	4700pF 50V K	1	A,B,C,D,E,F,G,H,I
	C181	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,I
	C182	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,B,C,D,E,F,G,H,I
	C183	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,I
	C191	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,B,C,D,E,F,G,H,I
	C192	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,B,C,D,E,F,G,H,I
	C276	QEKJ1CM-106Z	E CAPACITOR	10uF 16V M	1	A,B,G,H,I
	C278	QEKJ1CM-106Z	E CAPACITOR	10uF 16V M	1	A,B,G,H,I
	C301	QTE1C66-474Z	E CAPACITOR	0.47uF 16V	1	A,B,C,D,E,F,G,H,I
	C302	QTE1C66-474Z	E CAPACITOR	0.47uF 16V	1	A,B,C,D,E,F,G,H,I
	C305	NDC31HJ-820X	C CAPACITOR	82pF 50V J	1	A,B,C,D,E,F,G,H,I
	C306	QERF1CM-106Z-E	E CAPACITOR	10uF 16V M	1	A,B,C,D,E,F,G,H,I
	C307	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	A,B,C,D,E,F,G,H,I
	C308	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	A,B,C,D,E,F,G,H,I
	C310	NDC31HJ-820X	C CAPACITOR	82pF 50V J	1	A,B,C,D,E,F,G,H,I
	C311	QTE1C66-474Z	E CAPACITOR	0.47uF 16V	1	A,B,C,D,E,F,G,H,I
	C312	QTE1C66-474Z	E CAPACITOR	0.47uF 16V	1	A,B,C,D,E,F,G,H,I
	C315	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,I
	C316	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1	A,B,C,D,E,F,G,H,I
	C317	QEKJ1CM-476Z-S	E CAPACITOR	47uF 16V M	1	A,B,C,D,E,F,G,H,I
	C318	NCB21AK-105X-A	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,I
	C319	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	1	A,B,C,D,E,F,G,H,I
	C320	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	1	A,B,C,D,E,F,G,H,I
	C328	NDC31HJ-680X	C CAPACITOR	68pF 50V J	1	A,B,C,D,E,F,G,H,I
	C329	NDC31HJ-150X	C CAPACITOR	15pF 50V J	1	A,B,C,D,E,F,G,H,I
	C330	NDC31HJ-680X	C CAPACITOR	68pF 50V J	1	A,B,C,D,E,F,G,H,I
	C335	NCB21CK-474X-A	C CAPACITOR	0.47uF 16V K	1	A,B,C,D,E,F,G,H,I
	C336	NCB21CK-474X-A	C CAPACITOR	0.47uF 16V K	1	A,B,C,D,E,F,G,H,I
	C337	NCB21CK-474X-A	C CAPACITOR	0.47uF 16V K	1	A,B,C,D,E,F,G,H,I
	C338	NCB21CK-474X-A	C CAPACITOR	0.47uF 16V K	1	A,B,C,D,E,F,G,H,I
	C339	NDC31HJ-150X	C CAPACITOR	15pF 50V J	1	A,B,C,D,E,F,G,H,I
	C365	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	A,B,C,D,E,F,G,H,I
	C366	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	A,B,C,D,E,F,G,H,I
	C385	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	A,B,C,D,E,F,G,H,I
	C386	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	A,B,C,D,E,F,G,H,I
	C477	NDC31HJ-220X	C CAPACITOR	22pF 50V J	1	A,B,C,D,E,F,G,H,I
	C478	NDC31HJ-220X	C CAPACITOR	22pF 50V J	1	A,B,C,D,E,F,G,H,I
	C501	NCB31HK-222X	C CAPACITOR	2200pF 50V K	1	A,B,C,D,E,F,G,H,I
	C503	NCB31HK-562X	C CAPACITOR	5600pF 50V K	1	A,B,C,D,E,F,G,H,I
	C505	NCB31HK-222X	C CAPACITOR	2200pF 50V K	1	A,B,C,D,E,F,G,H,I
	C507	NCB31HK-682X	C CAPACITOR	6800pF 50V K	1	A,B,C,D,E,F,G,H,I
	C509	NDC31HJ-680X	C CAPACITOR	68pF 50V J	1	A,B,C,D,E,F,G,H,I
	C511	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	A,B,C,D,E,F,G,H,I
	C512	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I
	C513	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	1	A,B,C,D,E,F,G,H,I
	C515	QEKJ0JM-107Z	E CAPACITOR	100uF 6.3V M	1	A,B,C,D,E,F,G,H,I
	C516	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I
	C517	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	A,B,C,D,E,F,G,H,I
	C519	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	A,B,C,D,E,F,G,H,I
	C520	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	A,B,C,D,E,F,G,H,I
	C538	NDC31HJ-820X	C CAPACITOR	82pF 50V J	1	A,B,C,D,E,F,G,H,I
	C541	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	A,B,C,D,E,F,G,H,I
	C542	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I
	C543	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	A,B,C,D,E,F,G,H,I
	C544	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I
	C545	QEKJ0JM-476Z	E CAPACITOR	47uF 6.3V M	1	A,B,C,D,E,F,G,H,I
	C546	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I
	C547	NCB31CK-154X	C CAPACITOR	0.15uF 16V K	1	A,B,C,D,E,F,G,H,I
	C548	NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	A,B,C,D,E,F,G,H,I
	C549	NCB31HK-272X	C CAPACITOR	2700pF 50V K	1	A,B,C,D,E,F,G,H,I
	C550	QEKJ0JM-476Z	E CAPACITOR	47uF 6.3V M	1	A,B,C,D,E,F,G,H,I
	C551	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I
	C552	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	1	A,B,C,D,E,F,G,H,I
	C553	NCB31HK-332X	C CAPACITOR	3300pF 50V K	1	A,B,C,D,E,F,G,H,I
	C554	NCB31AK-334X	C CAPACITOR	0.33uF 10V K	1	A,B,C,D,E,F,G,H,I
	C555	NCB21CK-475X	C CAPACITOR	4.7uF 16V K	1	A,B,C,D,E,F,G,H,I
	C556	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I
	C557	NDC31HJ-681X	C CAPACITOR	680pF 50V J	1	A,B,C,D,E,F,G,H,I
	C558	QEKJ0JM-476Z	E CAPACITOR	47uF 6.3V M	1	A,B,C,D,E,F,G,H,I
	C559	QEKJ0JM-476Z	E CAPACITOR	47uF 6.3V M	1	A,B,C,D,E,F,G,H,I
	C560	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A735BTJ	A	KD-R730BTJ	B	KD-R731BTE	C	KD-R731BTEN	D
KD-R731BTEU	E	KD-R731BTEY	F	KD-R736BTU	G	KD-R736BTUN	H
KD-R736BTUP	I	KD-R739BTUR	J	KD-S79BTJ	K		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C561	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I
	C562	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I
	C563	NCB31HK-153X	C CAPACITOR	0.015uF 50V K	1	A,B,C,D,E,F,G,H,I
	C564	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I
	C565	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	A,B,C,D,E,F,G,H,I
	C566	NCB31CK-823X	C CAPACITOR	0.082uF 16V K	1	A,B,C,D,E,F,G,H,I
	C568	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	A,B,C,D,E,F,G,H,I
	C569	NCB31AK-334X	C CAPACITOR	0.33uF 10V K	1	A,B,C,D,E,F,G,H,I
	C570	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I
	C571	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	A,B,C,D,E,F,G,H,I
	C573	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I
	C574	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I
	C575	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I
	C576	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	A,B,C,D,E,F,G,H,I
	C577	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I
	C578	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I
	C579	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	A,B,C,D,E,F,G,H,I
	C583	NDC31HJ-821X	C CAPACITOR	820pF 50V J	1	A,B,C,D,E,F,G,H,I
	C584	NDC31HJ-821X	C CAPACITOR	820pF 50V J	1	A,B,C,D,E,F,G,H,I
	C585	QEKJ1HM-475Z-E	E CAPACITOR	4.7uF 50V M	1	A,B,C,D,E,F,G,H,I
	C586	QEKJ1HM-475Z-E	E CAPACITOR	4.7uF 50V M	1	A,B,C,D,E,F,G,H,I
	C587	NDC31HJ-151X	C CAPACITOR	150pF 50V J	1	A,B,C,D,E,F,G,H,I
	C588	NDC31HJ-151X	C CAPACITOR	150pF 50V J	1	A,B,C,D,E,F,G,H,I
	C590	QEKJ0JM-476Z-S	E CAPACITOR	47uF 6.3V M	1	A,B,C,D,E,F,G,H,I
	C591	QEKJ1AM-107Z-S	E CAPACITOR	100uF 10V M	1	A,B,C,D,E,F,G,H,I
	C592	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I
	C701	NDC31HJ-220X	C CAPACITOR	22pF 50V J	1	A,B,C,D,E,F,G,H,I
	C702	NDC31HJ-270X	C CAPACITOR	27pF 50V J	1	A,B,C,D,E,F,G,H,I
	C705	NDC31HJ-220X	C CAPACITOR	22pF 50V J	1	A,B,C,D,E,F,G,H,I
	C706	NDC31HJ-220X	C CAPACITOR	22pF 50V J	1	A,B,C,D,E,F,G,H,I
	C708	NDC31HJ-220X	C CAPACITOR	22pF 50V J	1	A,B,C,D,E,F,G,H,I
	C709	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I
	C711	NDC31HJ-470X	C CAPACITOR	47pF 50V J	1	A,B,C,D,E,F,G,H,I
	C713	NDC31HJ-470X	C CAPACITOR	47pF 50V J	1	A,B,C,D,E,F,G,H,I
	C714	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	A,B,C,D,E,F,G,H,I
	C715	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I
	C716	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,I
	C717	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	1	A,B,C,D,E,F,G,H,I
	C718	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I
	C721	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	1	A,B,C,D,E,F,G,H,I
	C722	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	A,B,C,D,E,F,G,H,I
	C723	QEKJ0JM-337Z	E CAPACITOR	330uF 6.3V M	1	A,B,C,D,E,F,G,H,I
	C724	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	A,B,C,D,E,F,G,H,I
	C725	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	A,B,C,D,E,F,G,H,I
	C727	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	1	A,B,C,D,E,F,G,H,I
	C771	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	1	A,B,C,D,E,F,G,H,I
	C784	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,I
	C785	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,I
	C787	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	A,B,C,D,E,F,G,H,I
	C788	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	A,B,C,D,E,F,G,H,I
	C789	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	A,B,C,D,E,F,G,H,I
	C790	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	A,B,C,D,E,F,G,H,I
	C791	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	A,B,C,D,E,F,G,H,I
	C801	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	1	A,B
	C881	QEKJ1CM-226Z	E CAPACITOR	22uF 16V M	1	A,B,C,D,E,F,G,H,I
	C901	QEZ0937-278	E CAPACITOR	2700uF	1	A,B,C,D,E,F,G,H,I
	C902	QEKJ1HM-225Z	E CAPACITOR	2.2uF 50V M	1	A,B,C,D,E,F,G,H,I
	C903	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	1	A,B,C,D,E,F,G,H,I
	C904	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	A,B,C,D,E,F,G,H,I
	C905	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	1	A,B,C,D,E,F,G,H,I
	C906	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I
	C907	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	A,B,C,D,E,F,G,H,I
	C908	QERF1AM-227Z	E CAPACITOR	220uF 10V M	1	A,B,C,E,F,G,H,I
	C909	QERF0JM-337Z	E CAPACITOR	330uF 6.3V M	1	A,B,C,D,E,F,G,H,I
	C910	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	A,B,C,D,E,F,G,H,I
	C911	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I
	C915	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I
	C916	NCB31HK-332X	C CAPACITOR	3300pF 50V K	1	A,B,C,D,E,F,G,H,I
	C917	QEKJ0JM-227Z	E CAPACITOR	220uF 6.3V M	1	A,B,C,D,E,F,G,H,I
	C918	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	A,B,C,D,E,F,G,H,I
	C920	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,I
	C921	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,I
	C922	QEKJ0JM-107Z	E CAPACITOR	100uF 6.3V M	1	A,B,C,D,E,F,G,H,I
	C925	NCJ30JM-106X-A	C CAPACITOR	10uF 6.3V M	1	A,B,C,D,E,F,G,H,I
	C928	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	A,B,C,D,E,F,G,H,I
	C931	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	A,B,C,D,E,F,G,H,I
	C932	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	A,B,C,D,E,F,G,H,I
	C933	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	A,B,C,D,E,F,G,H,I
	C934	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	A,B,C,D,E,F,G,H,I
	C937	NCB31HK-682X	C CAPACITOR	6800pF 50V K	1	A,B,C,D,E,F,G,H,I
	C938	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	A,B,C,D,E,F,G,H,I
	C940	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	A,B,C,D,E,F,G,H,I
	C941	QEZ0850-157Z	E CAPACITOR	150uF	1	A,B,C,D,E,F,G,H,I
	C942	QEZ0850-157Z	E CAPACITOR	150uF	1	A,B,C,D,E,F,G,H,I
	C943	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	1	A,B,C,D,E,F,G,H,I
	C944	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	1	A,B,C,D,E,F,G,H,I
	C945	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	1	A,B,C,D,E,F,G,H,I
	C946	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	1	A,B,C,D,E,F,G,H,I
	C947	QEKJ1AM-227Z	E CAPACITOR	220uF 10V M	1	A,B,C,D,E,F,G,H,I
	C948	QEKJ1AM-227Z	E CAPACITOR	220uF 10V M	1	A,B,C,D,E,F,G,H,I

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A735BTJ	A	KD-R730BTJ	B	KD-R731BTE	C	KD-R731BTEN	D
KD-R731BTEU	E	KD-R731BTEY	F	KD-R736BTU	G	KD-R736BTUN	H
KD-R736BTUP	I	KD-R739BTUR	J	KD-S79BTJ	K		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C961	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	A,B,C,D,E,F,G,H,I
	C962	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	A,B,C,D,E,F,G,H,I
	C963	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	A,B,C,D,E,F,G,H,I
	C964	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	A,B,C,D,E,F,G,H,I
	C965	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	A,B,C,D,E,F,G,H,I
	C966	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	A,B,C,D,E,F,G,H,I
	C967	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	A,B,C,D,E,F,G,H,I
	C968	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	A,B,C,D,E,F,G,H,I
	C982	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I
	R1	NRSA63J-684X	MG RESISTOR	680kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R2	NRSA63J-684X	MG RESISTOR	680kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R4	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R5	NRSA02J-470X	MG RESISTOR	47Ω 1/10W J	1	A,B,C,D,E,F,G,H,I
	R6	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	1	A,B,C,D,E,F,G,H,I
	R7	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	1	A,B,C,D,E,F,G,H,I
	R8	NRSA02J-470X	MG RESISTOR	47Ω 1/10W J	1	A,B,C,D,E,F,G,H,I
	R11	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	A,B,C,D,E,F,G,H,I
	R14	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R15	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R90	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R92	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R93	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R94	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R95	NRSA63J-124X	MG RESISTOR	120kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R96	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R97	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R98	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R99	NRSA63J-124X	MG RESISTOR	120kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R100	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R101	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R102	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I
	R103	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I
	R104	NRSA02J-100X	MG RESISTOR	10Ω 1/10W J	1	A,B,C,D,E,F,G,H,I
	R110	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R111	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R160	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I
	R161	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R162	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R163	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	B,C,D,E,F
	R164	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,G,H,I
	R165	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	C,D,E,F
	R166	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R167	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	1	A,B,C,D,E,F,G,H,I
	R168	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I
	R171	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	A,B,C,D,E,F,G,H,I
	R172	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	A,B,C,D,E,F,G,H,I
	R173	NRSA63J-1R0X	MG RESISTOR	1Ω 1/16W J	1	A,G,H,I
	R174	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,G,H,I
	R175	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	C,D,E,F
	R176	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R178	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I
	R189	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R195	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R272	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	A,B,G,H,I
	R273	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	A,B,G,H,I
	R274	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	A,B,G,H,I
	R275	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	A,B,G,H,I
	R276	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	A,B,G,H,I
	R277	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	A,G,H,I
	R277	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	B
	R278	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	A,B,G,H,I
	R279	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	A,G,H,I
	R279	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	B
	R301	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R302	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R303	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I
	R304	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R307	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I
	R309	NRSA02J-751X	MG RESISTOR	750Ω 1/10W J	1	A,G,H,I
	R309	NRSA02J-100X	MG RESISTOR	10Ω 1/10W J	1	B,C,D,E,F
	R310	NRSA63J-364X	MG RESISTOR	360kΩ 1/16W J	1	A,G,H,I
	R310	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	B,C,D,E,F
	R311	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R312	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R313	NRSA63J-271X	MG RESISTOR	270Ω 1/16W J	1	A,B,C,D,E,F,G,H,I
	R314	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R321	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	A,G,H,I
	R321	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	B,C,D,E,F
	R322	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	A,B,C,D,E,F,G,H,I
	R323	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	A,B,C,D,E,F,G,H,I
	R324	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R325	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	1	A,G,H,I
	R326	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	1	A,G,H,I
	R327	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	1	A,G,H,I
	R328	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	1	A,G,H,I
	R331	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	A,G,H,I
	R331	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	B,C,D,E,F
	R332	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	A,B,C,D,E,F,G,H,I

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A735BTJ	A	KD-R730BTJ	B	KD-R731BTE	C	KD-R731BTEN	D
KD-R731BTEU	E	KD-R731BTEY	F	KD-R736BTU	G	KD-R736BTUN	H
KD-R736BTUP	I	KD-R739BTUR	J	KD-S79BTJ	K		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R333	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	A,B,C,D,E,F,G,H,I
	R334	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R335	NRSA63J-512X	MG RESISTOR	5.1kΩ 1/16W J	1	A,G,H,I
	R335	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	B,C,D,E,F
	R336	NRSA63J-512X	MG RESISTOR	5.1kΩ 1/16W J	1	A,G,H,I
	R336	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	B,C,D,E,F
	R337	NRSA63J-512X	MG RESISTOR	5.1kΩ 1/16W J	1	A,G,H,I
	R337	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	B,C,D,E,F
	R338	NRSA63J-512X	MG RESISTOR	5.1kΩ 1/16W J	1	A,G,H,I
	R338	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	B,C,D,E,F
	R341	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	A,G,H,I
	R341	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	B,C,D,E,F
	R342	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	A,B,C,D,E,F,G,H,I
	R343	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	A,B,C,D,E,F,G,H,I
	R344	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R351	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	A,G,H,I
	R351	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	B,C,D,E,F
	R352	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	A,B,C,D,E,F,G,H,I
	R353	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	A,B,C,D,E,F,G,H,I
	R354	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R391	NRS125J-0R0X	MG RESISTOR	0Ω 1/2W J	1	A,B,C,D,E,F,G,H,I
	R392	NRS125J-0R0X	MG RESISTOR	0Ω 1/2W J	1	A,B,C,D,E,F,G,H,I
	R393	NRS125J-0R0X	MG RESISTOR	0Ω 1/2W J	1	A,B,C,D,E,F,G,H,I
	R394	NRS125J-0R0X	MG RESISTOR	0Ω 1/2W J	1	A,B,C,D,E,F,G,H,I
	R395	NRS125J-0R0X	MG RESISTOR	0Ω 1/2W J	1	A,B,C,D,E,F,G,H,I
	R396	NRS125J-0R0X	MG RESISTOR	0Ω 1/2W J	1	A,B,C,D,E,F,G,H,I
	R397	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	A,B,C,D,E,F,G,H,I
	R398	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	A,B,C,D,E,F,G,H,I
	R502	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R503	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R504	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R505	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R507	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R508	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R509	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R510	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R511	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R512	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R513	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R514	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R515	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R516	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R517	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R518	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R519	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R520	NRS124J-100X	MG RESISTOR	10Ω 1/2W J	1	A,B,C,D,E,F,G,H,I
	R521	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R522	NRSA63J-512X	MG RESISTOR	5.1kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R523	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R524	NRSA63J-683X	MG RESISTOR	68kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R540	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	A,B,C,D,E,F,G,H,I
	R541	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R542	NRSA63J-823X	MG RESISTOR	82kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R544	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I
	R546	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	1	A,B,C,D,E,F,G,H,I
	R547	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	1	A,B,C,D,E,F,G,H,I
	R548	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I
	R549	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R550	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R551	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R552	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	1	A,B,C,D,E,F,G,H,I
	R553	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R554	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R556	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I
	R557	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I
	R558	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R559	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R560	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I
	R561	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I
	R562	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I
	R563	NRSA02J-100X	MG RESISTOR	10Ω 1/10W J	1	A,B,C,D,E,F,G,H,I
	R564	NRSA02J-100X	MG RESISTOR	10Ω 1/10W J	1	A,B,C,D,E,F,G,H,I
	R565	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R566	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I
	R571	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	1	A,B,C,D,E,F,G,H,I
	R572	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	1	A,B,C,D,E,F,G,H,I
	R573	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	1	A,B,C,D,E,F,G,H,I
	R574	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	1	A,B,C,D,E,F,G,H,I
	R575	NQR0022-005X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I
	R576	NQR0022-005X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I
	R577	NQR0022-005X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I
	R581	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I
	R583	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R584	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R585	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R586	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R587	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R588	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R591	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R592	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A735BTJ	A	KD-R730BTJ	B	KD-R731BTE	C	KD-R731BTEN	D
KD-R731BTEU	E	KD-R731BTEY	F	KD-R736BTU	G	KD-R736BTUN	H
KD-R736BTUP	I	KD-R739BTUR	J	KD-S79BTJ	K		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R593	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R594	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R603	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I
	R701	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R702	NRSA63J-106X	MG RESISTOR	10MΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R703	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I
	R705	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R706	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R707	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R709	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	1	A,B,C,D,E,F,G,H,I
	R710	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	1	A,B,C,D,E,F,G,H,I
	R711	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R713	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R714	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R715	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R719	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R721	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	A,B,C,D,E,F,G,H,I
	R722	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R723	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R724	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R725	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R726	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R727	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R728	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R729	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R730	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R731	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R735	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	A,B,C,D,E,F,G,H,I
	R736	NRSA63J-911X	MG RESISTOR	910Ω 1/16W J	1	A,B,C,D,E,F,G,H,I
	R737	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R738	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R739	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R740	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R741	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R743	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R744	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R745	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	A,B,C,D,E,F,G,H,I
	R746	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R749	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R750	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	A,C,D,E,F,G,H,I
	R751	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	A,B
	R754	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	A,B,C,D,E,F,G,H,I
	R755	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	A,B,C,D,E,F,G,H,I
	R756	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R757	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R758	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R759	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	A,B
	R760	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R761	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R762	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B
	R763	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	A,B
	R764	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	A,B
	R765	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	A,B
	R766	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R767	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R771	NRSA63J-271X	MG RESISTOR	270Ω 1/16W J	1	A,B,C,D,E,F,G,H,I
	R772	NRSA63J-271X	MG RESISTOR	270Ω 1/16W J	1	A,B,C,D,E,F,G,H,I
	R774	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R781	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R782	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	A,B,C,D,E,F,G,H,I
	R783	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R785	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I
	R786	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,G,H,I
	R790	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R791	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R801	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	1	A,B
	R803	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	1	A,B
	R804	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	A,B
	R805	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	A,B
	R806	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	A,B
	R807	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	A,B
	R808	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	A,B
	R809	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	1	A,B
	R810	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	A,B
	R811	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	A,B
	R812	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	1	A,B
	R814	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B
	R851	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	G,H,I
	R881	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R882	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R901	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R902	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R904	NRSA63J-155X	MG RESISTOR	1.5MΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R905	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R906	NRSA63D-273X	MG RESISTOR	27kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I
	R908	NRS181J-682X	MG RESISTOR	6.8kΩ 1/8W J	1	A,B,C,D,E,F,G,H,I
	R909	NRS181J-682X	MG RESISTOR	6.8kΩ 1/8W J	1	A,B,C,D,E,F,G,H,I
	R921	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A735BTJ	A	KD-R730BTJ	B	KD-R731BTE	C	KD-R731BTEN	D
KD-R731BTEU	E	KD-R731BTEY	F	KD-R736BTU	G	KD-R736BTUN	H
KD-R736BTUP	I	KD-R739BTUR	J	KD-S79BTJ	K		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R922	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I
	R923	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I
	R924	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I
	R925	NRSA63D-472X	MG RESISTOR	4.7kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I
	R926	NRSA63D-152X	MG RESISTOR	1.5kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I
	R927	NRSA63J-1R0X	MG RESISTOR	1Ω 1/16W J	1	A,B,C,D,E,F,G,H,I
	R931	NRSA63D-164X	MG RESISTOR	160kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I
	R932	NRSA63D-333X	MG RESISTOR	33kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I
	R933	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R934	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I
	R935	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R941	NRSA63D-472X	MG RESISTOR	4.7kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I
	R942	NRSA63D-472X	MG RESISTOR	4.7kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I
	R943	NRSA63D-152X	MG RESISTOR	1.5kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I
	R944	NRSA63D-152X	MG RESISTOR	1.5kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I
	R965	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	A,B,C,D,E,F,G,H,I
	R971	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R972	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R973	NRSA63J-203X	MG RESISTOR	20kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R974	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R975	NRSA02J-473X	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I
	R976	NRSA02J-683X	MG RESISTOR	68kΩ 1/10W J	1	A,B,C,D,E,F,G,H,I
	R977	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I
	R981	NRS181J-332X	MG RESISTOR	3.3kΩ 1/8W J	1	A,B,C,D,E,F,G,H,I
	R987	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I
	R989	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	A,B,C,D,E,F,G,H,I
	R990	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I
	R991	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I
	R994	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I
	R995	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I
	R996	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I
	R997	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	A,B,C,D,E,F,G,H,I
	R998	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	A,B,C,D,E,F,G,H,I
	R999	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	A,B,C,D,E,F,G,H,I
	L3	QQL232K-R27Z	COIL	0.27uH K	1	A,B,C,D,E,F,G,H,I
	L4	QQR1872-001	RF COIL		1	A,B,C,D,E,F,G,H,I
	L5	QQL244J-561Z	COIL	560uH J	1	A,B,C,D,E,F,G,H,I
	L6	QQL244J-561Z	COIL	560uH J	1	A,B,C,D,E,F,G,H,I
	L7	NQL79GM-4R7X	COIL	4.7uH M	1	A,B,C,D,E,F,G,H,I
	L8	NQL093K-4R7X	P COIL	4.7uH K	1	A,B,C,D,E,F,G,H,I
	L9	NQL093K-R47X	P COIL	0.47uH K	1	A,B,C,D,E,F,G,H,I
	L10	NQR0269-026X	FERRITE BEADS	10.500mA	1	A,B
	L10	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	C,D,E,F,G,H,I
	L11	NQL093K-R47X	P COIL	0.47uH K	1	A,B,C,D,E,F,G,H,I
	L12	NQL093K-1R8X	P COIL	1.8uH K	1	A,B,C,D,E,F,G,H,I
	L181	NQL79GM-4R7X	COIL	4.7uH M	1	A,G,H,I
	L182	NQL553J-27NX	COIL	27nH J	1	A,B,C,D,E,F,G,H,I
	L191	NQL79GM-4R7X	COIL	4.7uH M	1	A,B,C,D,E,F,G,H,I
	L521	NQL093K-1R8X	P COIL	1.8uH K	1	A,B,C,D,E,F,G,H,I
	L701	NQL79GM-4R7X	COIL	4.7uH M	1	A,B,C,D,E,F,G,H,I
	L702	NQL79GM-4R7X	COIL	4.7uH M	1	A,B,C,D,E,F,G,H,I
	L901	QQR1884-001	CHOKE COIL		1	A,B,C,D,E,F,G,H,I
	L902	NQL79GM-101X	COIL	100uH M	1	A,B,C,D,E,F,G,H,I
	L903	NQL79GM-4R7X	COIL	4.7uH M	1	A,B,C,D,E,F,G,H,I
	L931	QQL92AK-150Z	COIL	15uH K	1	A,B,C,D,E,F,G,H,I
	L932	QQL92AK-100Z	COIL	10uH K	1	A,B,C,D,E,F,G,H,I
	CN90	QGA2001F1-02	CONNECTOR	W-B (1-2)	1	A,B,C,D,E,F,G,H,I
	CN472	QGA2001C1-05	CONNECTOR	W-B (1-5)	1	A,B,C,D,E,F,G,H,I
	CN502	QGF1049F1-26X	CONNECTOR	FFC/FPC (1-26)	1	A,B,C,D,E,F,G,H,I
	CN701	QGZ1102J1-20	CONNECTOR	(1-20)	1	A,B,C,D,E,F,G,H,I
	CN901	QNZ0607-001	CAR CONNECTOR		1	A,B,C,D,E,F,G,H,I
	J1	QNB0190-001	ANT TERMINAL		1	A,B,C,D,E,F,G,H,I
	J1 or	QNB0348-001	ANT TERMINAL		1	A,B,C,D,E,F,G,H,I
	J321	QNN0866-001	PIN JACK		1	A,B,G,H,I
	J321	QNN0868-001	PIN JACK		1	C,D,E,F
	J801	QNZ0095-001	CONNECTOR		1	A,B
	K581	NQR0022-005X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I
	K706	NQR0022-005X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I
	K707	NQR0022-005X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I
	K708	NQR0022-005X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I
	LF472	NQR0682-001X	CHOKE COIL		1	A,B,C,D,E,F,G,H,I
	S703	QSW0648-001Z	TACT SWITCH		1	A,B,C,D,E,F,G,H,I
	X11	QAX0952-001Z	CRYSTAL		1	A,B,C,D,E,F,G,H,I
	X521	QAX0714-001Z	C RESONATOR	16.000MHz	1	A,B,C,D,E,F,G,H,I
	X701	NAX0917-001X	C RESONATOR		1	A,B,C,D,E,F,G,H,I
	X702	QAX0401-001	CRYSTAL	32.768KHz	1	A,B,C,D,E,F,G,H,I

ELECTORIC UNIT R739BTUR <05>

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
⚠	IC1	TEF6614TV1S4-X	IC		1	J
	IC90	NJM4565E-X	IC		1	J
	IC161	TDA7718B-X	IC		1	J
⚠	IC301	TDA7851A	IC		1	J
⚠	IC501	LA6565-X	IC		1	J
⚠	IC541	MN6627553PA	IC		1	J
	IC581	NJM4565E-X	IC		1	J
⚠	IC701	JES225E	IC(MCU)		1	J
	IC771	BR24T02FJ-W-X	IC		1	J
	IC771 or	R1EX24002ASAA-X	IC		1	J
⚠	IC901	LV5680P	IC		1	J
	IC902	XC6213B332NG-X	IC		1	J
	IC921	BD00GA3WEFJ-X	IC		1	J
⚠	IC931	BD9876EFJ-X	IC		1	J

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A735BTJ	A	KD-R730BTJ	B	KD-R731BTE	C	KD-R731BTEN	D
KD-R731BTEU	E	KD-R731BTEY	F	KD-R736BTU	G	KD-R736BTUN	H
KD-R736BTUP	I	KD-R739BTUR	J	KD-S79BTJ	K		

Safe	Symbol No.		Parts No.	Parts Name	Description	QTY	Local
⚠	IC941		NJM2387ADL3-X	IC		1	J
⚠	IC942		NJM2387ADL3-X	IC		1	J
	Q271		IMX9-W	PAIR TRANSISTOR		1	J
	Q271	or	KTC812T-X	PAIR TRANSISTOR		1	J
	Q301		DRC2114E-X	DIGI TRANSISTOR		1	J
	Q301	or	RT1N141C-X	DIGI TRANSISTOR		1	J
	Q322		IMX9-W	PAIR TRANSISTOR		1	J
	Q322	or	KTC812T-X	PAIR TRANSISTOR		1	J
	Q332		IMX9-W	PAIR TRANSISTOR		1	J
	Q332	or	KTC812T-X	PAIR TRANSISTOR		1	J
	Q501		2SB1424/R/-W	TRANSISTOR		1	J
	Q540		2SA2188/F/-X	TRANSISTOR		1	J
	Q782		DRA2114E-X	DIGI TRANSISTOR		1	J
	Q782	or	RT1P141C-X	DIGI TRANSISTOR		1	J
	Q785		DRC2124E-X	DIGI TRANSISTOR		1	J
	Q785	or	RT1N241C-X	DIGI TRANSISTOR		1	J
	Q786		DRA2124E-X	DIGI TRANSISTOR		1	J
	Q786	or	RT1P241C-X	TRANSISTOR		1	J
	Q881		DRC2114E-X	DIGI TRANSISTOR		1	J
	Q881	or	RT1N141C-X	DIGI TRANSISTOR		1	J
	Q970		2SC1623A/5-6/-X	TRANSISTOR		1	J
	Q970	or	2SC3928A/QR/-X	TRANSISTOR		1	J
	Q971		2SC1623A/5-6/-X	TRANSISTOR		1	J
	Q971	or	2SC3928A/QR/-X	TRANSISTOR		1	J
	D3		NAF0029-002X	ESD SUPPRESSOR		1	J
	D271		BAW56-TP-X	SI DIODE		1	J
	D271	or	MC2836-X	DIODE		1	J
	D321		BAW56-TP-X	SI DIODE		1	J
	D321	or	MC2836-X	DIODE		1	J
	D331		BAW56-TP-X	SI DIODE		1	J
	D331	or	MC2836-X	DIODE		1	J
	D477		NAF0029-002X	ESD SUPPRESSOR		1	J
	D478		NAF0029-002X	ESD SUPPRESSOR		1	J
	D501		GS1J-LTP-X	SI DIODE		1	J
	D501	or	1SR154-400-X	SI DIODE		1	J
	D502		GS1J-LTP-X	SI DIODE		1	J
	D502	or	1SR154-400-X	SI DIODE		1	J
	D710		RKZ6.2B2KG-X	Z DIODE		1	J
	D710	or	DZ2J062/M/-X	Z DIODE		1	J
	D711		RKZ6.2B2KG-X	Z DIODE		1	J
	D711	or	DZ2J062/M/-X	Z DIODE		1	J
	D712		RKZ6.2B2KG-X	Z DIODE		1	J
	D712	or	DZ2J062/M/-X	Z DIODE		1	J
	D713		RKZ6.2B2KG-X	Z DIODE		1	J
	D713	or	DZ2J062/M/-X	Z DIODE		1	J
	D716		RKZ5.6B2KG-X	Z DIODE		1	J
	D716	or	DZ2J056/M/-X	Z DIODE		1	J
	D782		BAW56-TP-X	SI DIODE		1	J
	D782	or	MC2836-X	DIODE		1	J
	D783		RKS801KF-X	SI DIODE		1	J
	D783	or	DA2J101-X	SI DIODE		1	J
	D785		BAW56-TP-X	SI DIODE		1	J
	D785	or	MC2836-X	DIODE		1	J
	D786		RKS801KF-X	SI DIODE		1	J
	D786	or	DA2J101-X	SI DIODE		1	J
⚠	D901		1N5401-BPC04	SI DIODE		1	J
	D931		DB22306-X	SB DIODE		1	J
	D932		DB22306-X	SB DIODE		1	J
	D970		RKZ6.8B2KG-X	Z DIODE		1	J
	D970	or	DZ2J068/M/-X	Z DIODE		1	J
	D971		RKZ6.8B2KG-X	Z DIODE		1	J
	D971	or	DZ2J068/M/-X	Z DIODE		1	J
	D981		MBRX130-TP-X	SB DIODE		1	J
	D982		MBRX130-TP-X	SB DIODE		1	J
	C1		NDC31HJ-102X	C CAPACITOR	1000pF 50V J	1	J
	C2		NDC31HJ-7R0X	C CAPACITOR	7pF 50V J	1	J
	C3		NDC31HJ-102X	C CAPACITOR	1000pF 50V J	1	J
	C4		NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1	J
	C5		NDC31HJ-150X	C CAPACITOR	15pF 50V J	1	J
	C6		NDC31HJ-270X	C CAPACITOR	27pF 50V J	1	J
	C7		NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	J
	C8		NDC31HJ-2R0X	C CAPACITOR	2pF 50V J	1	J
	C9		NDC31HJ-5R6X	C CAPACITOR	5.6pF 50V J	1	J
	C10		NCB31AK-105X	C CAPACITOR	1uF 10V K	1	J
	C11		NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	J
	C12		NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	J
	C13		NCB31AK-105X	C CAPACITOR	1uF 10V K	1	J
	C14		NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1	J
	C15		NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	J
	C16		NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	J
	C17		NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	J
	C18		NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	J
	C19		NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	J
	C22		NDC31HJ-120X	C CAPACITOR	12pF 50V J	1	J
	C23		NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	J
	C24		NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	J
	C25		NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	J
	C26		QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	J

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A735BTJ	A	KD-R730BTJ	B	KD-R731BTE	C	KD-R731BTEN	D
KD-R731BTEU	E	KD-R731BTEY	F	KD-R736BTU	G	KD-R736BTUN	H
KD-R736BTUP	I	KD-R739BTUR	J	KD-S79BTJ	K		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C92	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1	J
	C93	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1	J
	C94	NDC31HJ-331X	C CAPACITOR	330pF 50V J	1	J
	C95	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1	J
	C96	QEKJ1CM-226Z	E CAPACITOR	22uF 16V M	1	J
	C97	NDC31HJ-331X	C CAPACITOR	330pF 50V J	1	J
	C98	NCB31HK-333X	C CAPACITOR	0.033uF 50V K	1	J
	C99	NCB31HK-273X	C CAPACITOR	0.027uF 50V K	1	J
	C100	NCB31HK-273X	C CAPACITOR	0.027uF 50V K	1	J
	C101	NDC31HJ-220X	C CAPACITOR	22pF 50V J	1	J
	C102	NCB31HK-333X	C CAPACITOR	0.033uF 50V K	1	J
	C103	QEKJ1CM-226Z	E CAPACITOR	22uF 16V M	1	J
	C104	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	J
	C105	NCB31HK-562X	C CAPACITOR	5600pF 50V K	1	J
	C161	QEKJ1HM-105Z-S	E CAPACITOR	1uF 50V M	1	J
	C162	QTE1V67-475Z	E CAPACITOR	4.7uF 35V	1	J
	C165	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	J
	C166	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	J
	C167	NDC31HJ-681X	C CAPACITOR	680pF 50V J	1	J
	C168	NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1	J
	C169	QEKJ1CM-106Z-S	E CAPACITOR	10uF 16V M	1	J
	C171	QEKJ1HM-105Z-S	E CAPACITOR	1uF 50V M	1	J
	C172	QTE1V67-475Z	E CAPACITOR	4.7uF 35V	1	J
	C175	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	J
	C176	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	1	J
	C177	NDC31HJ-681X	C CAPACITOR	680pF 50V J	1	J
	C179	QEKJ1CM-107Z-S	E CAPACITOR	100uF 16V M	1	J
	C180	NCB31HK-472X	C CAPACITOR	4700pF 50V K	1	J
	C181	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	J
	C182	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	J
	C183	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	J
	C191	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	J
	C192	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	J
	C276	QEKJ1CM-106Z	E CAPACITOR	10uF 16V M	1	J
	C278	QEKJ1CM-106Z	E CAPACITOR	10uF 16V M	1	J
	C301	QTE1C66-474Z	E CAPACITOR	0.47uF 16V	1	J
	C302	QTE1C66-474Z	E CAPACITOR	0.47uF 16V	1	J
	C305	NDC31HJ-820X	C CAPACITOR	82pF 50V J	1	J
	C306	QERF1CM-106Z-E	E CAPACITOR	10uF 16V M	1	J
	C307	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	J
	C308	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	J
	C310	NDC31HJ-820X	C CAPACITOR	82pF 50V J	1	J
	C311	QTE1C66-474Z	E CAPACITOR	0.47uF 16V	1	J
	C312	QTE1C66-474Z	E CAPACITOR	0.47uF 16V	1	J
	C315	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	J
	C316	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1	J
	C317	QEKJ1CM-476Z-S	E CAPACITOR	47uF 16V M	1	J
	C318	NCB21AK-105X-A	C CAPACITOR	1uF 10V K	1	J
	C319	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	1	J
	C320	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	1	J
	C328	NDC31HJ-680X	C CAPACITOR	68pF 50V J	1	J
	C329	NDC31HJ-150X	C CAPACITOR	15pF 50V J	1	J
	C330	NDC31HJ-680X	C CAPACITOR	68pF 50V J	1	J
	C335	NCB21CK-474X-A	C CAPACITOR	0.47uF 16V K	1	J
	C336	NCB21CK-474X-A	C CAPACITOR	0.47uF 16V K	1	J
	C337	NCB21CK-474X-A	C CAPACITOR	0.47uF 16V K	1	J
	C338	NCB21CK-474X-A	C CAPACITOR	0.47uF 16V K	1	J
	C339	NDC31HJ-150X	C CAPACITOR	15pF 50V J	1	J
	C365	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	J
	C366	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	J
	C385	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	J
	C386	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	J
	C477	NDC31HJ-220X	C CAPACITOR	22pF 50V J	1	J
	C478	NDC31HJ-220X	C CAPACITOR	22pF 50V J	1	J
	C501	NCB31HK-222X	C CAPACITOR	2200pF 50V K	1	J
	C503	NCB31HK-562X	C CAPACITOR	5600pF 50V K	1	J
	C505	NCB31HK-222X	C CAPACITOR	2200pF 50V K	1	J
	C507	NCB31HK-682X	C CAPACITOR	6800pF 50V K	1	J
	C509	NDC31HJ-680X	C CAPACITOR	68pF 50V J	1	J
	C511	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	J
	C512	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	J
	C513	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	1	J
	C515	QEKJ0JM-107Z	E CAPACITOR	100uF 6.3V M	1	J
	C516	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	J
	C517	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	J
	C519	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	J
	C520	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	J
	C538	NDC31HJ-820X	C CAPACITOR	82pF 50V J	1	J
	C541	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	J
	C542	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	J
	C543	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	J
	C544	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	J
	C545	QEKJ0JM-476Z	E CAPACITOR	47uF 6.3V M	1	J
	C546	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	J
	C547	NCB31CK-154X	C CAPACITOR	0.15uF 16V K	1	J
	C548	NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	J
	C549	NCB31HK-272X	C CAPACITOR	2700pF 50V K	1	J
	C550	QEKJ0JM-476Z	E CAPACITOR	47uF 6.3V M	1	J
	C551	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	J
	C552	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	1	J

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A735BTJ	A	KD-R730BTJ	B	KD-R731BTE	C	KD-R731BTEN	D
KD-R731BTEU	E	KD-R731BTEY	F	KD-R736BTU	G	KD-R736BTUN	H
KD-R736BTUP	I	KD-R739BTUR	J	KD-S79BTJ	K		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C553	NCB31HK-332X	C CAPACITOR	3300pF 50V K	1	J
	C554	NCB31AK-334X	C CAPACITOR	0.33uF 10V K	1	J
	C555	NCB21CK-475X	C CAPACITOR	4.7uF 16V K	1	J
	C556	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	J
	C557	NDC31HJ-681X	C CAPACITOR	680pF 50V J	1	J
	C558	QEKJ0JM-476Z	E CAPACITOR	47uF 6.3V M	1	J
	C559	QEKJ0JM-476Z	E CAPACITOR	47uF 6.3V M	1	J
	C560	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	J
	C561	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	J
	C562	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	J
	C563	NCB31HK-153X	C CAPACITOR	0.015uF 50V K	1	J
	C564	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	J
	C565	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	J
	C566	NCB31CK-823X	C CAPACITOR	0.082uF 16V K	1	J
	C568	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	J
	C569	NCB31AK-334X	C CAPACITOR	0.33uF 10V K	1	J
	C570	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	J
	C571	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	J
	C573	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	J
	C574	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	J
	C575	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	J
	C576	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	J
	C577	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	J
	C578	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	J
	C579	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	J
	C583	NDC31HJ-821X	C CAPACITOR	820pF 50V J	1	J
	C584	NDC31HJ-821X	C CAPACITOR	820pF 50V J	1	J
	C585	QEKJ1HM-475Z-E	E CAPACITOR	4.7uF 50V M	1	J
	C586	QEKJ1HM-475Z-E	E CAPACITOR	4.7uF 50V M	1	J
	C587	NDC31HJ-151X	C CAPACITOR	150pF 50V J	1	J
	C588	NDC31HJ-151X	C CAPACITOR	150pF 50V J	1	J
	C590	QEKJ0JM-476Z-S	E CAPACITOR	47uF 6.3V M	1	J
	C591	QEKJ1AM-107Z-S	E CAPACITOR	100uF 10V M	1	J
	C592	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	J
	C701	NDC31HJ-220X	C CAPACITOR	22pF 50V J	1	J
	C702	NDC31HJ-270X	C CAPACITOR	27pF 50V J	1	J
	C705	NDC31HJ-220X	C CAPACITOR	22pF 50V J	1	J
	C706	NDC31HJ-220X	C CAPACITOR	22pF 50V J	1	J
	C708	NDC31HJ-220X	C CAPACITOR	22pF 50V J	1	J
	C709	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	J
	C711	NDC31HJ-470X	C CAPACITOR	47pF 50V J	1	J
	C713	NDC31HJ-470X	C CAPACITOR	47pF 50V J	1	J
	C715	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	J
	C716	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	J
	C717	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	1	J
	C718	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	J
	C721	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	1	J
	C722	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	J
	C723	QEKJ0JM-337Z	E CAPACITOR	330uF 6.3V M	1	J
	C724	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	J
	C725	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	J
	C727	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	1	J
	C771	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	1	J
	C784	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	J
	C785	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	J
	C787	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	J
	C788	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	J
	C789	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	J
	C790	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	J
	C791	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	J
	C881	QEKJ1CM-226Z	E CAPACITOR	22uF 16V M	1	J
	C901	QEZ0937-278	E CAPACITOR	2700uF	1	J
	C902	QEKJ1HM-225Z	E CAPACITOR	2.2uF 50V M	1	J
	C903	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	1	J
	C904	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	J
	C905	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	1	J
	C906	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	J
	C907	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	J
	C909	QERF0JM-337Z	E CAPACITOR	330uF 6.3V M	1	J
	C910	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	J
	C911	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	J
	C915	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	J
	C916	NCB31HK-332X	C CAPACITOR	3300pF 50V K	1	J
	C917	QEKJ0JM-227Z	E CAPACITOR	220uF 6.3V M	1	J
	C918	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	J
	C920	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	J
	C921	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	J
	C922	QEKJ0JM-107Z	E CAPACITOR	100uF 6.3V M	1	J
	C925	NCJ30JM-106X-A	C CAPACITOR	10uF 6.3V M	1	J
	C928	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	J
	C931	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	J
	C932	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	J
	C933	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	J
	C934	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	J
	C937	NCB31HK-682X	C CAPACITOR	6800pF 50V K	1	J
	C938	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	J
	C940	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	J
	C941	QEZ0850-157Z	E CAPACITOR	150uF	1	J

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A735BTJ	A	KD-R730BTJ	B	KD-R731BTE	C	KD-R731BTEN	D
KD-R731BTEU	E	KD-R731BTEY	F	KD-R736BTU	G	KD-R736BTUN	H
KD-R736BTUP	I	KD-R739BTUR	J	KD-S79BTJ	K		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C942	QEZ0850-157Z	E CAPACITOR	150uF	1	J
	C943	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	1	J
	C944	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	1	J
	C945	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	1	J
	C946	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	1	J
	C947	QEKJ1AM-227Z	E CAPACITOR	220uF 10V M	1	J
	C948	QEKJ1AM-227Z	E CAPACITOR	220uF 10V M	1	J
	C961	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	J
	C962	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	J
	C963	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	J
	C964	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	J
	C965	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	J
	C966	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	J
	C967	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	J
	C968	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	J
	C982	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	J
	R1	NRSA63J-684X	MG RESISTOR	680kΩ 1/16W J	1	J
	R2	NRSA63J-684X	MG RESISTOR	680kΩ 1/16W J	1	J
	R4	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	J
	R5	NRSA02J-470X	MG RESISTOR	47Ω 1/10W J	1	J
	R6	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	1	J
	R7	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	1	J
	R8	NRSA02J-470X	MG RESISTOR	47Ω 1/10W J	1	J
	R11	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	J
	R14	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	1	J
	R15	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	1	J
	R90	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	J
	R92	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	J
	R93	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	1	J
	R94	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	1	J
	R95	NRSA63J-124X	MG RESISTOR	120kΩ 1/16W J	1	J
	R96	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	J
	R97	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	J
	R98	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	J
	R99	NRSA63J-124X	MG RESISTOR	120kΩ 1/16W J	1	J
	R100	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	J
	R101	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	J
	R102	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	J
	R103	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	J
	R104	NRSA02J-100X	MG RESISTOR	10Ω 1/10W J	1	J
	R110	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	J
	R111	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	J
	R160	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	J
	R161	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	J
	R162	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	J
	R163	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	J
	R164	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	J
	R166	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	J
	R167	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	1	J
	R168	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	J
	R171	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	J
	R172	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	J
	R174	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	J
	R176	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	J
	R178	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	J
	R189	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	J
	R195	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	J
	R272	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	J
	R273	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	J
	R274	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	J
	R275	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	J
	R276	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	J
	R277	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	J
	R278	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	J
	R279	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	J
	R301	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	J
	R302	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	J
	R303	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	J
	R304	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	J
	R307	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	J
	R309	NRSA02J-100X	MG RESISTOR	10Ω 1/10W J	1	J
	R310	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	J
	R311	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	J
	R312	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	J
	R313	NRSA63J-271X	MG RESISTOR	270Ω 1/16W J	1	J
	R314	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	J
	R321	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	J
	R322	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	J
	R323	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	J
	R324	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	J
	R331	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	J
	R332	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	J
	R333	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	J
	R334	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	J
	R335	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	J
	R336	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	J
	R337	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	J
	R338	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	J
	R341	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	J
	R342	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	J

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A735BTJ	A	KD-R730BTJ	B	KD-R731BTE	C	KD-R731BTEN	D
KD-R731BTEU	E	KD-R731BTEY	F	KD-R736BTU	G	KD-R736BTUN	H
KD-R736BTUP	I	KD-R739BTUR	J	KD-S79BTJ	K		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R343	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	J
	R344	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	J
	R351	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	J
	R352	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	J
	R353	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	J
	R354	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	J
	R391	NRS125J-0R0X	MG RESISTOR	0Ω 1/2W J	1	J
	R392	NRS125J-0R0X	MG RESISTOR	0Ω 1/2W J	1	J
	R393	NRS125J-0R0X	MG RESISTOR	0Ω 1/2W J	1	J
	R394	NRS125J-0R0X	MG RESISTOR	0Ω 1/2W J	1	J
	R395	NRS125J-0R0X	MG RESISTOR	0Ω 1/2W J	1	J
	R396	NRS125J-0R0X	MG RESISTOR	0Ω 1/2W J	1	J
	R397	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	J
	R398	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	J
	R502	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	1	J
	R503	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	J
	R504	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	J
	R505	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	J
	R507	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	J
	R508	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	J
	R509	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	J
	R510	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	J
	R511	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	1	J
	R512	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	J
	R513	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	J
	R514	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	J
	R515	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	1	J
	R516	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	J
	R517	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	1	J
	R518	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	J
	R519	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	J
	R520	NRS124J-100X	MG RESISTOR	10Ω 1/2W J	1	J
	R521	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	J
	R522	NRSA63J-512X	MG RESISTOR	5.1kΩ 1/16W J	1	J
	R523	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	J
	R524	NRSA63J-683X	MG RESISTOR	68kΩ 1/16W J	1	J
	R540	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	J
	R541	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	1	J
	R542	NRSA63J-823X	MG RESISTOR	82kΩ 1/16W J	1	J
	R544	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	J
	R546	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	1	J
	R547	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	1	J
	R548	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	J
	R549	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	J
	R550	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	J
	R551	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	J
	R552	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	1	J
	R553	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	1	J
	R554	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	J
	R556	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	J
	R557	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	J
	R558	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	J
	R559	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	J
	R560	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	J
	R561	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	J
	R562	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	J
	R563	NRSA02J-100X	MG RESISTOR	10Ω 1/10W J	1	J
	R564	NRSA02J-100X	MG RESISTOR	10Ω 1/10W J	1	J
	R565	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	J
	R566	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	J
	R571	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	1	J
	R572	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	1	J
	R573	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	1	J
	R574	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	1	J
	R575	NQR0022-005X	FERRITE BEADS		1	J
	R576	NQR0022-005X	FERRITE BEADS		1	J
	R577	NQR0022-005X	FERRITE BEADS		1	J
	R581	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	J
	R583	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J	1	J
	R584	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J	1	J
	R585	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	J
	R586	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	J
	R587	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	1	J
	R588	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	1	J
	R591	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	J
	R592	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	J
	R593	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	J
	R594	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	J
	R603	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	J
	R701	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	J
	R702	NRSA63J-106X	MG RESISTOR	10MΩ 1/16W J	1	J
	R703	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	J
	R705	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	J
	R706	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	J
	R707	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	J
	R709	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	1	J
	R710	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	1	J
	R711	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	J
	R713	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	J
	R714	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	J

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A735BTJ	A	KD-R730BTJ	B	KD-R731BTE	C	KD-R731BTEN	D
KD-R731BTEU	E	KD-R731BTEY	F	KD-R736BTU	G	KD-R736BTUN	H
KD-R736BTUP	I	KD-R739BTUR	J	KD-S79BTJ	K		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R715	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	J
	R719	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	J
	R721	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	J
	R722	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	J
	R723	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	J
	R724	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	J
	R725	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J	1	J
	R726	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	J
	R727	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	J
	R728	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	J
	R729	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	J
	R730	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	J
	R731	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	J
	R735	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	J
	R736	NRSA63J-911X	MG RESISTOR	910Ω 1/16W J	1	J
	R737	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	J
	R738	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	J
	R739	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	J
	R740	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	J
	R741	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	J
	R743	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	J
	R744	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	J
	R745	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	J
	R746	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	J
	R749	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	J
	R750	NRSA63J-203X	MG RESISTOR	20kΩ 1/16W J	1	J
	R751	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	J
	R754	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	J
	R755	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	J
	R756	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	J
	R758	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	J
	R760	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	J
	R761	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	1	J
	R766	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	J
	R767	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	J
	R771	NRSA63J-271X	MG RESISTOR	270Ω 1/16W J	1	J
	R772	NRSA63J-271X	MG RESISTOR	270Ω 1/16W J	1	J
	R774	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	J
	R781	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	J
	R782	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	J
	R783	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	J
	R785	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	J
	R786	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	J
	R790	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	J
	R791	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	J
	R881	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	1	J
	R882	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	J
	R901	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	J
	R902	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	1	J
	R904	NRSA63J-155X	MG RESISTOR	1.5MΩ 1/16W J	1	J
	R905	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	J
	R906	NRSA63D-273X	MG RESISTOR	27kΩ 1/16W D	1	J
	R908	NRS181J-682X	MG RESISTOR	6.8kΩ 1/8W J	1	J
	R909	NRS181J-682X	MG RESISTOR	6.8kΩ 1/8W J	1	J
	R921	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	J
	R922	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	J
	R923	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	J
	R924	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	J
	R925	NRSA63D-472X	MG RESISTOR	4.7kΩ 1/16W D	1	J
	R926	NRSA63D-152X	MG RESISTOR	1.5kΩ 1/16W D	1	J
	R927	NRSA63J-1R0X	MG RESISTOR	1Ω 1/16W J	1	J
	R931	NRSA63D-164X	MG RESISTOR	160kΩ 1/16W D	1	J
	R932	NRSA63D-333X	MG RESISTOR	33kΩ 1/16W D	1	J
	R933	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	J
	R934	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	J
	R935	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	J
	R941	NRSA63D-472X	MG RESISTOR	4.7kΩ 1/16W D	1	J
	R942	NRSA63D-472X	MG RESISTOR	4.7kΩ 1/16W D	1	J
	R943	NRSA63D-152X	MG RESISTOR	1.5kΩ 1/16W D	1	J
	R944	NRSA63D-152X	MG RESISTOR	1.5kΩ 1/16W D	1	J
	R965	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	J
	R971	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	J
	R972	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	J
	R973	NRSA63J-203X	MG RESISTOR	20kΩ 1/16W J	1	J
	R974	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	J
	R975	NRSA02J-473X	MG RESISTOR	47kΩ 1/10W J	1	J
	R976	NRSA02J-683X	MG RESISTOR	68kΩ 1/10W J	1	J
	R977	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	J
	R981	NRS181J-332X	MG RESISTOR	3.3kΩ 1/8W J	1	J
	R987	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	J
	R989	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	J
	R990	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	J
	R991	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	J
	R994	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	J
	R995	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	J
	R996	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	J
	R997	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	J
	R998	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	J

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A735BTJ	A	KD-R730BTJ	B	KD-R731BTE	C	KD-R731BTEN	D
KD-R731BTEU	E	KD-R731BTEY	F	KD-R736BTU	G	KD-R736BTUN	H
KD-R736BTUP	I	KD-R739BTUR	J	KD-S79BTJ	K		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R999	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	J
	L3	QQL232K-R27Z	COIL	0.27uH K	1	J
	L4	QQR1872-001	RF COIL		1	J
	L5	QQL244J-561Z	COIL	560uH J	1	J
	L6	QQL244J-561Z	COIL	560uH J	1	J
	L7	NQL79GM-4R7X	COIL	4.7uH M	1	J
	L8	NQL093K-4R7X	P COIL	4.7uH K	1	J
	L9	NQL093K-R47X	P COIL	0.47uH K	1	J
	L10	NQR0269-026X	FERRITE BEADS	10.500mA	1	J
	L11	NQL093K-R47X	P COIL	0.47uH K	1	J
	L12	NQL093K-1R8X	P COIL	1.8uH K	1	J
	L182	NQL553J-27NX	COIL	27nH J	1	J
	L191	NQL79GM-4R7X	COIL	4.7uH M	1	J
	L521	NQL093K-1R8X	P COIL	1.8uH K	1	J
	L701	NQL79GM-4R7X	COIL	4.7uH M	1	J
	L702	NQL79GM-4R7X	COIL	4.7uH M	1	J
	L901	QQR1884-001	CHOKE COIL		1	J
	L902	NQL79GM-101X	COIL	100uH M	1	J
	L903	NQL79GM-4R7X	COIL	4.7uH M	1	J
	L931	QQL92AK-150Z	COIL	15uH K	1	J
	L932	QQL92AK-100Z	COIL	10uH K	1	J
	CN90	QGA2001F1-02	CONNECTOR	W-B (1-2)	1	J
	CN472	QGA2001C1-05	CONNECTOR	W-B (1-5)	1	J
	CN502	QGF1049F1-26X	CONNECTOR	FFC/FPC (1-26)	1	J
	CN701	QGZ1102J1-20	CONNECTOR	(1-20)	1	J
	CN901	QNZ0607-001	CAR CONNECTOR		1	J
	J1	QNB0190-001	ANT TERMINAL		1	J
	J1 or	QNB0348-001	ANT TERMINAL		1	J
	J321	QNN0866-001	PIN JACK		1	J
	K581	NQR0022-005X	FERRITE BEADS		1	J
	K706	NQR0022-005X	FERRITE BEADS		1	J
	K707	NQR0022-005X	FERRITE BEADS		1	J
	K708	NQR0022-005X	FERRITE BEADS		1	J
	LF472	NQR0682-001X	CHOKE COIL		1	J
	S703	QSW0648-001Z	TACT SWITCH		1	J
	X11	QAX0952-001Z	CRYSTAL		1	J
	X521	QAX0714-001Z	C RESONATOR	16.000MHz	1	J
	X701	NAX0917-001X	C RESONATOR		1	J
	X702	QAX0401-001	CRYSTAL	32.768KHz	1	J

ELECTORIC UNIT S79BTJ <08>

⚠	IC1	TEF6614TV1S4-X	IC		1	K
	IC90	NJM4565E-X	IC		1	K
	IC161	TDA7718B-X	IC		1	K
⚠	IC301	TDA7851A	IC		1	K
⚠	IC501	LA6565-X	IC		1	K
⚠	IC541	MN6627553PA	IC		1	K
	IC581	NJM4565E-X	IC		1	K
⚠	IC701	JES225E	IC(MCU)		1	K
	IC771	BR24T02FJ-W-X	IC		1	K
	IC771 or	R1EX24002ASAA-X	IC		1	K
	IC801	74AHCT126PW-X	IC		1	K
⚠	IC901	LV5680P	IC		1	K
	IC902	XC6213B332NG-X	IC		1	K
	IC921	BD00GA3WEFJ-X	IC		1	K
⚠	IC931	BD9876EFJ-X	IC		1	K
⚠	IC941	NJM2387ADL3-X	IC		1	K
⚠	IC942	NJM2387ADL3-X	IC		1	K
	Q271	IMX9-W	PAIR TRANSISTOR		1	K
	Q271 or	KTC812T-X	PAIR TRANSISTOR		1	K
	Q301	DRC2114E-X	DIGI TRANSISTOR		1	K
	Q301 or	RT1N141C-X	DIGI TRANSISTOR		1	K
	Q322	IMX9-W	PAIR TRANSISTOR		1	K
	Q322 or	KTC812T-X	PAIR TRANSISTOR		1	K
	Q332	IMX9-W	PAIR TRANSISTOR		1	K
	Q332 or	KTC812T-X	PAIR TRANSISTOR		1	K
	Q501	2SB1424/R/-W	TRANSISTOR		1	K
	Q540	2SA2188/F/-X	TRANSISTOR		1	K
	Q782	DRA2114E-X	DIGI TRANSISTOR		1	K
	Q782 or	RT1P141C-X	DIGI TRANSISTOR		1	K
	Q785	DRC2124E-X	DIGI TRANSISTOR		1	K
	Q785 or	RT1N241C-X	DIGI TRANSISTOR		1	K
	Q786	DRA2124E-X	DIGI TRANSISTOR		1	K
	Q786 or	RT1P241C-X	TRANSISTOR		1	K
	Q881	DRC2114E-X	DIGI TRANSISTOR		1	K
	Q881 or	RT1N141C-X	DIGI TRANSISTOR		1	K
	Q970	2SC1623/5-6/-X	TRANSISTOR		1	K
	Q970 or	2SC3928A/QR/-X	TRANSISTOR		1	K
	Q971	2SC1623/5-6/-X	TRANSISTOR		1	K
	Q971 or	2SC3928A/QR/-X	TRANSISTOR		1	K
	D3	NAF0029-002X	ESD SUPPRESSOR		1	K
	D271	BAW56-TP-X	SI DIODE		1	K
	D271 or	MC2836-X	DIODE		1	K
	D321	BAW56-TP-X	SI DIODE		1	K
	D321 or	MC2836-X	DIODE		1	K
	D331	BAW56-TP-X	SI DIODE		1	K
	D331 or	MC2836-X	DIODE		1	K
	D477	NAF0029-002X	ESD SUPPRESSOR		1	K
	D478	NAF0029-002X	ESD SUPPRESSOR		1	K
	D501	GS1J-LTP-X	SI DIODE		1	K

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A735BTJ	A	KD-R730BTJ	B	KD-R731BTE	C	KD-R731BTEN	D
KD-R731BTEU	E	KD-R731BTEY	F	KD-R736BTU	G	KD-R736BTUN	H
KD-R736BTUP	I	KD-R739BTUR	J	KD-S79BTJ	K		

Safe	Symbol No.		Parts No.	Parts Name	Description	QTY	Local
	D501	or	1SR154-400-X	SI DIODE		1	K
	D502		GS1J-LTP-X	SI DIODE		1	K
	D502	or	1SR154-400-X	SI DIODE		1	K
	D710		RKZ6.2B2KG-X	Z DIODE		1	K
	D710	or	DZ2J062/M/-X	Z DIODE		1	K
	D711		RKZ6.2B2KG-X	Z DIODE		1	K
	D711	or	DZ2J062/M/-X	Z DIODE		1	K
	D712		RKZ6.2B2KG-X	Z DIODE		1	K
	D712	or	DZ2J062/M/-X	Z DIODE		1	K
	D713		RKZ6.2B2KG-X	Z DIODE		1	K
	D713	or	DZ2J062/M/-X	Z DIODE		1	K
	D714		RKZ6.2B2KG-X	Z DIODE		1	K
	D714	or	DZ2J062/M/-X	Z DIODE		1	K
	D716		RKZ5.6B2KG-X	Z DIODE		1	K
	D716	or	DZ2J056/M/-X	Z DIODE		1	K
	D782		BAW56-TP-X	SI DIODE		1	K
	D782	or	MC2836-X	DIODE		1	K
	D783		RKS801KF-X	SI DIODE		1	K
	D783	or	DA2J101-X	SI DIODE		1	K
	D785		BAW56-TP-X	SI DIODE		1	K
	D785	or	MC2836-X	DIODE		1	K
	D786		RKS801KF-X	SI DIODE		1	K
	D786	or	DA2J101-X	SI DIODE		1	K
⚠	D901		1N5401-BPC04	SI DIODE		1	K
	D931		DB22306-X	SB DIODE		1	K
	D932		DB22306-X	SB DIODE		1	K
	D970		RKZ6.8B2KG-X	Z DIODE		1	K
	D970	or	DZ2J068/M/-X	Z DIODE		1	K
	D971		RKZ6.8B2KG-X	Z DIODE		1	K
	D971	or	DZ2J068/M/-X	Z DIODE		1	K
	D981		MBRX130-TP-X	SB DIODE		1	K
	D982		MBRX130-TP-X	SB DIODE		1	K
	C1		NDC31HJ-102X	C CAPACITOR	1000pF 50V J	1	K
	C2		NDC31HJ-7R0X	C CAPACITOR	7pF 50V J	1	K
	C3		NDC31HJ-102X	C CAPACITOR	1000pF 50V J	1	K
	C4		NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1	K
	C5		NDC31HJ-150X	C CAPACITOR	15pF 50V J	1	K
	C6		NDC31HJ-270X	C CAPACITOR	27pF 50V J	1	K
	C7		NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	K
	C8		NDC31HJ-2R0X	C CAPACITOR	2pF 50V J	1	K
	C9		NDC31HJ-5R6X	C CAPACITOR	5.6pF 50V J	1	K
	C10		NCB31AK-105X	C CAPACITOR	1uF 10V K	1	K
	C11		NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	K
	C12		NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	K
	C13		NCB31AK-105X	C CAPACITOR	1uF 10V K	1	K
	C14		NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1	K
	C15		NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	K
	C16		NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	K
	C17		NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	K
	C18		NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	K
	C19		NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	K
	C22		NDC31HJ-120X	C CAPACITOR	12pF 50V J	1	K
	C23		NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	K
	C24		NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	K
	C25		NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	K
	C26		QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	K
	C92		QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1	K
	C93		QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1	K
	C94		NDC31HJ-331X	C CAPACITOR	330pF 50V J	1	K
	C95		QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1	K
	C96		QEKJ1CM-226Z	E CAPACITOR	22uF 16V M	1	K
	C97		NDC31HJ-331X	C CAPACITOR	330pF 50V J	1	K
	C98		NCB31HK-333X	C CAPACITOR	0.033uF 50V K	1	K
	C99		NCB31HK-273X	C CAPACITOR	0.027uF 50V K	1	K
	C100		NCB31HK-273X	C CAPACITOR	0.027uF 50V K	1	K
	C101		NDC31HJ-220X	C CAPACITOR	22pF 50V J	1	K
	C102		NCB31HK-333X	C CAPACITOR	0.033uF 50V K	1	K
	C103		QEKJ1CM-226Z	E CAPACITOR	22uF 16V M	1	K
	C104		NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	K
	C105		NCB31HK-562X	C CAPACITOR	5600pF 50V K	1	K
	C161		QEKJ1HM-105Z-S	E CAPACITOR	1uF 50V M	1	K
	C162		QTE1V67-475Z	E CAPACITOR	4.7uF 35V	1	K
	C163		NCB31AK-105X	C CAPACITOR	1uF 10V K	1	K
	C165		NCB31AK-105X	C CAPACITOR	1uF 10V K	1	K
	C166		NCB31AK-105X	C CAPACITOR	1uF 10V K	1	K
	C167		NDC31HJ-681X	C CAPACITOR	680pF 50V J	1	K
	C168		NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1	K
	C169		QEKJ1CM-106Z-S	E CAPACITOR	10uF 16V M	1	K
	C171		QEKJ1HM-105Z-S	E CAPACITOR	1uF 50V M	1	K
	C172		QTE1V67-475Z	E CAPACITOR	4.7uF 35V	1	K
	C173		NCB31AK-105X	C CAPACITOR	1uF 10V K	1	K
	C175		NCB31AK-105X	C CAPACITOR	1uF 10V K	1	K
	C176		NCB31AK-474X	C CAPACITOR	0.47uF 10V K	1	K
	C177		NDC31HJ-681X	C CAPACITOR	680pF 50V J	1	K
	C179		QEKJ1CM-107Z-S	E CAPACITOR	100uF 16V M	1	K
	C180		NCB31HK-472X	C CAPACITOR	4700pF 50V K	1	K
	C181		NCB31AK-105X	C CAPACITOR	1uF 10V K	1	K
	C182		NCB31CK-105X	C CAPACITOR	1uF 16V K	1	K
	C183		NCB31AK-105X	C CAPACITOR	1uF 10V K	1	K
	C191		NCB31CK-105X	C CAPACITOR	1uF 16V K	1	K

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A735BTJ	A	KD-R730BTJ	B	KD-R731BTE	C	KD-R731BTEN	D
KD-R731BTEU	E	KD-R731BTEY	F	KD-R736BTU	G	KD-R736BTUN	H
KD-R736BTUP	I	KD-R739BTUR	J	KD-S79BTJ	K		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C192	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	K
	C276	QEKJ1CM-106Z	E CAPACITOR	10uF 16V M	1	K
	C278	QEKJ1CM-106Z	E CAPACITOR	10uF 16V M	1	K
	C301	QTE1C66-474Z	E CAPACITOR	0.47uF 16V	1	K
	C302	QTE1C66-474Z	E CAPACITOR	0.47uF 16V	1	K
	C305	NDC31HJ-820X	C CAPACITOR	82pF 50V J	1	K
	C306	QERF1CM-106Z-E	E CAPACITOR	10uF 16V M	1	K
	C307	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	K
	C308	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	K
	C310	NDC31HJ-820X	C CAPACITOR	82pF 50V J	1	K
	C311	QTE1C66-474Z	E CAPACITOR	0.47uF 16V	1	K
	C312	QTE1C66-474Z	E CAPACITOR	0.47uF 16V	1	K
	C315	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	K
	C316	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1	K
	C317	QEKJ1CM-476Z-S	E CAPACITOR	47uF 16V M	1	K
	C318	NCB21AK-105X-A	C CAPACITOR	1uF 10V K	1	K
	C319	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	1	K
	C320	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	1	K
	C328	NDC31HJ-680X	C CAPACITOR	68pF 50V J	1	K
	C329	NDC31HJ-150X	C CAPACITOR	15pF 50V J	1	K
	C330	NDC31HJ-680X	C CAPACITOR	68pF 50V J	1	K
	C335	NCB21CK-474X-A	C CAPACITOR	0.47uF 16V K	1	K
	C336	NCB21CK-474X-A	C CAPACITOR	0.47uF 16V K	1	K
	C337	NCB21CK-474X-A	C CAPACITOR	0.47uF 16V K	1	K
	C338	NCB21CK-474X-A	C CAPACITOR	0.47uF 16V K	1	K
	C339	NDC31HJ-150X	C CAPACITOR	15pF 50V J	1	K
	C365	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	K
	C366	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	K
	C385	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	K
	C386	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	K
	C477	NDC31HJ-220X	C CAPACITOR	22pF 50V J	1	K
	C478	NDC31HJ-220X	C CAPACITOR	22pF 50V J	1	K
	C501	NCB31HK-222X	C CAPACITOR	2200pF 50V K	1	K
	C503	NCB31HK-562X	C CAPACITOR	5600pF 50V K	1	K
	C505	NCB31HK-222X	C CAPACITOR	2200pF 50V K	1	K
	C507	NCB31HK-682X	C CAPACITOR	6800pF 50V K	1	K
	C509	NDC31HJ-680X	C CAPACITOR	68pF 50V J	1	K
	C511	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	K
	C512	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	K
	C513	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	1	K
	C515	QEKJ0JM-107Z	E CAPACITOR	100uF 6.3V M	1	K
	C516	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	K
	C517	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	K
	C519	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	K
	C520	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	K
	C538	NDC31HJ-820X	C CAPACITOR	82pF 50V J	1	K
	C541	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	K
	C542	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	K
	C543	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	K
	C544	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	K
	C545	QEKJ0JM-476Z	E CAPACITOR	47uF 6.3V M	1	K
	C546	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	K
	C547	NCB31CK-154X	C CAPACITOR	0.15uF 16V K	1	K
	C548	NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	K
	C549	NCB31HK-272X	C CAPACITOR	2700pF 50V K	1	K
	C550	QEKJ0JM-476Z	E CAPACITOR	47uF 6.3V M	1	K
	C551	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	K
	C552	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	1	K
	C553	NCB31HK-332X	C CAPACITOR	3300pF 50V K	1	K
	C554	NCB31AK-334X	C CAPACITOR	0.33uF 10V K	1	K
	C555	NCB21CK-475X	C CAPACITOR	4.7uF 16V K	1	K
	C556	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	K
	C557	NDC31HJ-681X	C CAPACITOR	680pF 50V J	1	K
	C558	QEKJ0JM-476Z	E CAPACITOR	47uF 6.3V M	1	K
	C559	QEKJ0JM-476Z	E CAPACITOR	47uF 6.3V M	1	K
	C560	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	K
	C561	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	K
	C562	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	K
	C563	NCB31HK-153X	C CAPACITOR	0.015uF 50V K	1	K
	C564	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	K
	C565	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	K
	C566	NCB31CK-823X	C CAPACITOR	0.082uF 16V K	1	K
	C568	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	K
	C569	NCB31AK-334X	C CAPACITOR	0.33uF 10V K	1	K
	C570	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	K
	C571	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	K
	C573	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	K
	C574	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	K
	C575	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	K
	C576	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	K
	C577	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	K
	C578	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	K
	C579	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	K
	C583	NDC31HJ-821X	C CAPACITOR	820pF 50V J	1	K
	C584	NDC31HJ-821X	C CAPACITOR	820pF 50V J	1	K
	C585	QEKJ1HM-475Z-E	E CAPACITOR	4.7uF 50V M	1	K
	C586	QEKJ1HM-475Z-E	E CAPACITOR	4.7uF 50V M	1	K
	C587	NDC31HJ-151X	C CAPACITOR	150pF 50V J	1	K

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A735BTJ	A	KD-R730BTJ	B	KD-R731BTE	C	KD-R731BTEN	D
KD-R731BTEU	E	KD-R731BTEY	F	KD-R736BTU	G	KD-R736BTUN	H
KD-R736BTUP	I	KD-R739BTUR	J	KD-S79BTJ	K		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C588	NDC31HJ-151X	C CAPACITOR	150pF 50V J	1	K
	C590	QEKJ0JM-476Z-S	E CAPACITOR	47uF 6.3V M	1	K
	C591	QEKJ1AM-107Z-S	E CAPACITOR	100uF 10V M	1	K
	C592	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	K
	C701	NDC31HJ-220X	C CAPACITOR	22pF 50V J	1	K
	C702	NDC31HJ-270X	C CAPACITOR	27pF 50V J	1	K
	C705	NDC31HJ-220X	C CAPACITOR	22pF 50V J	1	K
	C706	NDC31HJ-220X	C CAPACITOR	22pF 50V J	1	K
	C708	NDC31HJ-220X	C CAPACITOR	22pF 50V J	1	K
	C709	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	K
	C711	NDC31HJ-470X	C CAPACITOR	47pF 50V J	1	K
	C713	NDC31HJ-470X	C CAPACITOR	47pF 50V J	1	K
	C714	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	K
	C715	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	K
	C716	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	K
	C717	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	1	K
	C718	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	K
	C721	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	1	K
	C722	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	K
	C723	QEKJ0JM-337Z	E CAPACITOR	330uF 6.3V M	1	K
	C724	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	K
	C725	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	K
	C727	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	1	K
	C771	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	1	K
	C784	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	K
	C785	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	K
	C787	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	K
	C788	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	K
	C789	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	K
	C790	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	K
	C791	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	K
	C801	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	1	K
	C881	QEKJ1CM-226Z	E CAPACITOR	22uF 16V M	1	K
	C901	QEZ0937-278	E CAPACITOR	2700uF	1	K
	C902	QEKJ1HM-225Z	E CAPACITOR	2.2uF 50V M	1	K
	C903	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	1	K
	C904	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	K
	C905	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	1	K
	C906	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	K
	C907	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	K
	C909	QERF0JM-337Z	E CAPACITOR	330uF 6.3V M	1	K
	C910	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	K
	C911	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	K
	C915	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	K
	C916	NCB31HK-332X	C CAPACITOR	3300pF 50V K	1	K
	C917	QEKJ0JM-227Z	E CAPACITOR	220uF 6.3V M	1	K
	C918	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	K
	C920	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	K
	C921	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	K
	C922	QEKJ0JM-107Z	E CAPACITOR	100uF 6.3V M	1	K
	C925	NCJ30JM-106X-A	C CAPACITOR	10uF 6.3V M	1	K
	C928	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	K
	C931	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	K
	C932	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	K
	C933	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	K
	C934	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	K
	C937	NCB31HK-682X	C CAPACITOR	6800pF 50V K	1	K
	C938	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	K
	C940	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	K
	C941	QEZ0850-157Z	E CAPACITOR	150uF	1	K
	C942	QEZ0850-157Z	E CAPACITOR	150uF	1	K
	C943	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	1	K
	C944	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	1	K
	C945	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	1	K
	C946	NCB31EK-104X	C CAPACITOR	0.1uF 25V K	1	K
	C947	QEKJ1AM-227Z	E CAPACITOR	220uF 10V M	1	K
	C948	QEKJ1AM-227Z	E CAPACITOR	220uF 10V M	1	K
	C961	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	K
	C962	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	K
	C963	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	K
	C964	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	K
	C965	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	K
	C966	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	K
	C967	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	K
	C968	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	K
	C982	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	K
	R1	NRSA63J-684X	MG RESISTOR	680kΩ 1/16W J	1	K
	R2	NRSA63J-684X	MG RESISTOR	680kΩ 1/16W J	1	K
	R4	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	K
	R5	NRSA02J-470X	MG RESISTOR	47Ω 1/10W J	1	K
	R6	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	1	K
	R7	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	1	K
	R8	NRSA02J-470X	MG RESISTOR	47Ω 1/10W J	1	K
	R11	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	K
	R14	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	1	K
	R15	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	1	K
	R90	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	K
	R92	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	K
	R93	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	1	K
	R94	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	1	K

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A735BTJ	A	KD-R730BTJ	B	KD-R731BTE	C	KD-R731BTEN	D
KD-R731BTEU	E	KD-R731BTEY	F	KD-R736BTU	G	KD-R736BTUN	H
KD-R736BTUP	I	KD-R739BTUR	J	KD-S79BTJ	K		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R95	NRSA63J-124X	MG RESISTOR	120kΩ 1/16W J	1	K
	R96	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	K
	R97	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	K
	R98	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	K
	R99	NRSA63J-124X	MG RESISTOR	120kΩ 1/16W J	1	K
	R100	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	K
	R101	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	K
	R102	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K
	R103	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K
	R104	NRSA02J-100X	MG RESISTOR	10Ω 1/10W J	1	K
	R110	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	K
	R111	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	K
	R160	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K
	R161	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	K
	R162	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	K
	R163	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K
	R164	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K
	R166	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	K
	R167	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	1	K
	R168	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K
	R171	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	K
	R172	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	K
	R174	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K
	R176	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	K
	R178	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K
	R189	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	K
	R195	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	K
	R272	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	K
	R273	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	K
	R274	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	K
	R275	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	K
	R276	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	K
	R277	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	K
	R278	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	K
	R279	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	K
	R301	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	K
	R302	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	K
	R303	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K
	R304	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	K
	R307	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K
	R309	NRSA02J-100X	MG RESISTOR	10Ω 1/10W J	1	K
	R310	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	K
	R311	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	K
	R312	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	K
	R313	NRSA63J-271X	MG RESISTOR	270Ω 1/16W J	1	K
	R314	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	K
	R321	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	K
	R322	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	K
	R323	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	K
	R324	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	K
	R331	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	K
	R332	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	K
	R333	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	K
	R334	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	K
	R335	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K
	R336	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K
	R337	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K
	R338	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K
	R341	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	K
	R342	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	K
	R343	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	K
	R344	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	K
	R351	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	K
	R352	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	K
	R353	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	K
	R354	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	K
	R391	NRS125J-0R0X	MG RESISTOR	0Ω 1/2W J	1	K
	R392	NRS125J-0R0X	MG RESISTOR	0Ω 1/2W J	1	K
	R393	NRS125J-0R0X	MG RESISTOR	0Ω 1/2W J	1	K
	R394	NRS125J-0R0X	MG RESISTOR	0Ω 1/2W J	1	K
	R395	NRS125J-0R0X	MG RESISTOR	0Ω 1/2W J	1	K
	R396	NRS125J-0R0X	MG RESISTOR	0Ω 1/2W J	1	K
	R397	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	K
	R398	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	K
	R502	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	1	K
	R503	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	K
	R504	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	K
	R505	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	K
	R507	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	K
	R508	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	K
	R509	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	K
	R510	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	K
	R511	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	1	K
	R512	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	K
	R513	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	K
	R514	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	K
	R515	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	1	K
	R516	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	K

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A735BTJ	A	KD-R730BTJ	B	KD-R731BTE	C	KD-R731BTEN	D
KD-R731BTEU	E	KD-R731BTEY	F	KD-R736BTU	G	KD-R736BTUN	H
KD-R736BTUP	I	KD-R739BTUR	J	KD-S79BTJ	K		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R517	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	1	K
	R518	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	K
	R519	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	K
	R520	NRS124J-100X	MG RESISTOR	10Ω 1/2W J	1	K
	R521	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	K
	R522	NRSA63J-512X	MG RESISTOR	5.1kΩ 1/16W J	1	K
	R523	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	K
	R524	NRSA63J-683X	MG RESISTOR	68kΩ 1/16W J	1	K
	R540	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	K
	R541	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	1	K
	R542	NRSA63J-823X	MG RESISTOR	82kΩ 1/16W J	1	K
	R544	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K
	R546	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	1	K
	R547	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	1	K
	R548	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K
	R549	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	K
	R550	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	K
	R551	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	K
	R552	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	1	K
	R553	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	1	K
	R554	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	K
	R556	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K
	R557	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K
	R558	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	K
	R559	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	K
	R560	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K
	R561	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K
	R562	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K
	R563	NRSA02J-100X	MG RESISTOR	10Ω 1/10W J	1	K
	R564	NRSA02J-100X	MG RESISTOR	10Ω 1/10W J	1	K
	R565	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	K
	R566	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K
	R571	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	1	K
	R572	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	1	K
	R573	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	1	K
	R574	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	1	K
	R575	NQR0022-005X	FERRITE BEADS		1	K
	R576	NQR0022-005X	FERRITE BEADS		1	K
	R577	NQR0022-005X	FERRITE BEADS		1	K
	R581	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K
	R583	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J	1	K
	R584	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J	1	K
	R585	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	K
	R586	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	K
	R587	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	1	K
	R588	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	1	K
	R591	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	K
	R592	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	K
	R593	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	K
	R594	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	K
	R603	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K
	R701	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	K
	R702	NRSA63J-106X	MG RESISTOR	10MΩ 1/16W J	1	K
	R703	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K
	R705	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	K
	R706	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	K
	R707	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	K
	R709	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	1	K
	R710	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	1	K
	R711	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	K
	R713	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	K
	R714	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	K
	R715	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	K
	R719	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	K
	R721	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	K
	R722	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	K
	R723	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	K
	R724	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	K
	R725	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J	1	K
	R726	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	K
	R727	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	K
	R728	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	K
	R729	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	K
	R730	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	K
	R731	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	K
	R735	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	K
	R736	NRSA63J-911X	MG RESISTOR	910Ω 1/16W J	1	K
	R737	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	K
	R738	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	K
	R739	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	K
	R740	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	K
	R741	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	K
	R743	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	K
	R744	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	K
	R745	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	K
	R746	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	K
	R749	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	K
	R751	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	K
	R754	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	K
	R755	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	K

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A735BTJ	A	KD-R730BTJ	B	KD-R731BTE	C	KD-R731BTEN	D
KD-R731BTEU	E	KD-R731BTEY	F	KD-R736BTU	G	KD-R736BTUN	H
KD-R736BTUP	I	KD-R739BTUR	J	KD-S79BTJ	K		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R756	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	K
	R757	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	K
	R758	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	K
	R759	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	K
	R760	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	K
	R761	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	1	K
	R762	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K
	R763	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	K
	R764	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	K
	R765	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	K
	R766	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	K
	R767	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	K
	R771	NRSA63J-271X	MG RESISTOR	270Ω 1/16W J	1	K
	R772	NRSA63J-271X	MG RESISTOR	270Ω 1/16W J	1	K
	R774	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	K
	R781	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	K
	R782	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	K
	R783	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	K
	R785	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K
	R786	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K
	R790	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	K
	R791	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	K
	R801	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	1	K
	R803	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	1	K
	R804	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	K
	R805	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	K
	R806	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	K
	R807	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	K
	R808	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	K
	R809	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	1	K
	R810	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	K
	R811	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	K
	R812	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	1	K
	R814	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K
	R881	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	1	K
	R882	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	K
	R901	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	K
	R902	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	1	K
	R904	NRSA63J-155X	MG RESISTOR	1.5MΩ 1/16W J	1	K
	R905	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	K
	R906	NRSA63D-273X	MG RESISTOR	27kΩ 1/16W D	1	K
	R908	NRS181J-682X	MG RESISTOR	6.8kΩ 1/8W J	1	K
	R909	NRS181J-682X	MG RESISTOR	6.8kΩ 1/8W J	1	K
	R921	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K
	R922	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K
	R923	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K
	R924	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K
	R925	NRSA63D-472X	MG RESISTOR	4.7kΩ 1/16W D	1	K
	R926	NRSA63D-152X	MG RESISTOR	1.5kΩ 1/16W D	1	K
	R927	NRSA63J-1R0X	MG RESISTOR	1Ω 1/16W J	1	K
	R931	NRSA63D-164X	MG RESISTOR	160kΩ 1/16W D	1	K
	R932	NRSA63D-333X	MG RESISTOR	33kΩ 1/16W D	1	K
	R933	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	K
	R934	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K
	R935	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	K
	R941	NRSA63D-472X	MG RESISTOR	4.7kΩ 1/16W D	1	K
	R942	NRSA63D-472X	MG RESISTOR	4.7kΩ 1/16W D	1	K
	R943	NRSA63D-152X	MG RESISTOR	1.5kΩ 1/16W D	1	K
	R944	NRSA63D-152X	MG RESISTOR	1.5kΩ 1/16W D	1	K
	R965	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	K
	R971	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	K
	R972	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	K
	R973	NRSA63J-203X	MG RESISTOR	20kΩ 1/16W J	1	K
	R974	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	K
	R975	NRSA02J-473X	MG RESISTOR	47kΩ 1/10W J	1	K
	R976	NRSA02J-683X	MG RESISTOR	68kΩ 1/10W J	1	K
	R977	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	K
	R981	NRS181J-332X	MG RESISTOR	3.3kΩ 1/8W J	1	K
	R987	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K
	R989	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	K
	R990	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K
	R991	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K
	R994	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K
	R995	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K
	R996	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	K
	R997	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	K
	R998	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	K
	R999	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	K
	L3	QQL232K-R27Z	COIL	0.27uH K	1	K
	L4	QQR1872-001	RF COIL		1	K
	L5	QQL244J-561Z	COIL	560uH J	1	K
	L6	QQL244J-561Z	COIL	560uH J	1	K
	L7	NQL79GM-4R7X	COIL	4.7uH M	1	K
	L8	NQL093K-4R7X	P COIL	4.7uH K	1	K
	L9	NQL093K-R47X	P COIL	0.47uH K	1	K
	L10	NQR0269-026X	FERRITE BEADS	10.500mA	1	K
	L11	NQL093K-R47X	P COIL	0.47uH K	1	K
	L12	NQL093K-1R8X	P COIL	1.8uH K	1	K

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A735BTJ	A	KD-R730BTJ	B	KD-R731BTE	C	KD-R731BTEN	D
KD-R731BTEU	E	KD-R731BTEY	F	KD-R736BTU	G	KD-R736BTUN	H
KD-R736BTUP	I	KD-R739BTUR	J	KD-S79BTJ	K		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	L182	NQL553J-27NX	COIL	27nH J	1	K
	L191	NQL79GM-4R7X	COIL	4.7uH M	1	K
	L521	NQL093K-1R8X	P COIL	1.8uH K	1	K
	L701	NQL79GM-4R7X	COIL	4.7uH M	1	K
	L702	NQL79GM-4R7X	COIL	4.7uH M	1	K
	L901	QQR1884-001	CHOKE COIL		1	K
	L902	NQL79GM-101X	COIL	100uH M	1	K
	L903	NQL79GM-4R7X	COIL	4.7uH M	1	K
	L931	QQL92AK-150Z	COIL	15uH K	1	K
	L932	QQL92AK-100Z	COIL	10uH K	1	K
	CN90	QGA2001F1-02	CONNECTOR	W-B (1-2)	1	K
	CN472	QGA2001C1-05	CONNECTOR	W-B (1-5)	1	K
	CN502	QGF1049F1-26X	CONNECTOR	FFC/FPC (1-26)	1	K
	CN701	QGZ1102J1-20	CONNECTOR	(1-20)	1	K
	CN901	QNZ0607-001	CAR CONNECTOR		1	K
	J1	QNB0190-001	ANT TERMINAL		1	K
	J1 or	QNB0348-001	ANT TERMINAL		1	K
	J321	QNN0866-001	PIN JACK		1	K
	J801	QNZ0095-001	CONNECTOR		1	K
	K581	NQR0022-005X	FERRITE BEADS		1	K
	K706	NQR0022-005X	FERRITE BEADS		1	K
	K707	NQR0022-005X	FERRITE BEADS		1	K
	K708	NQR0022-005X	FERRITE BEADS		1	K
	LF472	NQR0682-001X	CHOKE COIL		1	K
	S703	QSW0648-001Z	TACT SWITCH		1	K
	X11	QAX0952-001Z	CRYSTAL		1	K
	X521	QAX0714-001Z	C RESONATOR	16.000MHz	1	K
	X701	NAX0917-001X	C RESONATOR		1	K
	X702	QAX0401-001	CRYSTAL	32.768KHz	1	K

SWITCH UNIT Except R739BTUR <02>

	IC601	PCA9624PW-X	IC		1	A,B,C,D,E,F,G,H,I,K
	IC661	PTC6526LQ-L	IC		1	A,B,C,D,E,F,G,H,I,K
	IC681	KSM-2003TN5B	IR DETECT UNIT		1	A,B,C,D,E,F,G,H,I,K
	Q627	LSCR523UB-X	TRANSISTOR		1	A,B,C,D,E,F,G,H,I,K
	Q627 or	DSC5001/RS/-X	TRANSISTOR		1	A,B,C,D,E,F,G,H,I,K
	D621	NSSM065T-X	LED		1	A,B,C,D,E,F,G,H,I,K
	D622	NSSM065T-X	LED		1	A,B,C,D,E,F,G,H,I,K
	D623	NSSM065T-X	LED		1	A,B,C,D,E,F,G,H,I,K
	D624	NSSM065T-X	LED		1	A,B,C,D,E,F,G,H,I,K
	D625	NSSM065T-X	LED		1	A,B,C,D,E,F,G,H,I,K
	D627	RKZ5.6B2KG-X	Z DIODE		1	A,B,C,D,E,F,G,H,I,K
	D627 or	DZ2J056/M/-X	Z DIODE		1	A,B,C,D,E,F,G,H,I,K
	D630	SML-D12V8W-X	LED		1	A,B,C,D,E,F,G,H,I,K
	D661	RKS801KF-X	SI DIODE		1	A,B,C,D,E,F,G,H,I,K
	D661 or	DA2J101-X	SI DIODE		1	A,B,C,D,E,F,G,H,I,K
	D662	RKZ5.1B2KG-X	SB DIODE		1	A,B,C,D,E,F,G,H,I,K
	D662 or	DZ2J051/M/-X	Z DIODE		1	A,B,C,D,E,F,G,H,I,K
	D663	RKZ5.1B2KG-X	SB DIODE		1	A,B,C,D,E,F,G,H,I,K
	D663 or	DZ2J051/M/-X	Z DIODE		1	A,B,C,D,E,F,G,H,I,K
	D664	RKZ5.1B2KG-X	SB DIODE		1	A,B,C,D,E,F,G,H,I,K
	D664 or	DZ2J051/M/-X	Z DIODE		1	A,B,C,D,E,F,G,H,I,K
	D682	RKZ3.3B2KG-X	Z DIODE		1	A,B,C,D,E,F,G,H,I,K
	D682 or	DZ2J033/M/-X	Z DIODE		1	A,B,C,D,E,F,G,H,I,K
	D691	RKZ5.1B2KG-X	SB DIODE		1	A,B,C,D,E,F,G,H,I,K
	D691 or	DZ2J051/M/-X	Z DIODE		1	A,B,C,D,E,F,G,H,I,K
	D692	RKZ5.1B2KG-X	SB DIODE		1	A,B,C,D,E,F,G,H,I,K
	D692 or	DZ2J051/M/-X	Z DIODE		1	A,B,C,D,E,F,G,H,I,K
	C620	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,B,C,D,E,F,G,H,I,K
	C624	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,K
	C625	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	A,B,C,D,E,F,G,H,I,K
	C627	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,B,C,D,E,F,G,H,I,K
	C628	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,B,C,D,E,F,G,H,I,K
	C629	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,B,C,D,E,F,G,H,I,K
	C661	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,B,C,D,E,F,G,H,I,K
	C662	NDC31HJ-151X	C CAPACITOR	150pF 50V J	1	A,B,C,D,E,F,G,H,I,K
	C663	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,K
	C665	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,K
	C666	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,I,K
	C682	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,K
	C684	NDC31HJ-270X	C CAPACITOR	27pF 50V J	1	A,B,C,D,E,F,G,H,I,K
	C685	NDC31HJ-270X	C CAPACITOR	27pF 50V J	1	A,B,C,D,E,F,G,H,I,K
	C687	NCB31HK-472X	C CAPACITOR	4700pF 50V K	1	A,B,C,D,E,F,G,H,I,K
	C688	NCB31HK-472X	C CAPACITOR	4700pF 50V K	1	A,B,C,D,E,F,G,H,I,K
	C691	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	A,B,C,D,E,F,G,H,I,K
	R601	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R602	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R603	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R604	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R605	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R607	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R608	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R609	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R610	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R611	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R612	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R613	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R614	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R615	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R616	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R617	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,K

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A735BTJ	A	KD-R730BTJ	B	KD-R731BTE	C	KD-R731BTEN	D
KD-R731BTEU	E	KD-R731BTEY	F	KD-R736BTU	G	KD-R736BTUN	H
KD-R736BTUP	I	KD-R739BTUR	J	KD-S79BTJ	K		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R618	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R621	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,K
	R623	NRS181J-331X	MG RESISTOR	330Ω 1/8W J	1	A,B,C,D,E,F,G,H,I,K
	R624	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R625	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R627	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R628	NRS181J-4R7X	MG RESISTOR	4.7Ω 1/8W J	1	A,B,C,D,E,F,G,H,I,K
	R647	NRS181J-621X	MG RESISTOR	620Ω 1/8W J	1	A,B,C,D,E,F,G,H,I,K
	R648	NRS181J-621X	MG RESISTOR	620Ω 1/8W J	1	A,B,C,D,E,F,G,H,I,K
	R649	NRS181J-102X	MG RESISTOR	1kΩ 1/8W J	1	A,B,C,D,E,F,G,H,I,K
	R650	NRS181J-621X	MG RESISTOR	620Ω 1/8W J	1	A,B,C,D,E,F,G,H,I,K
	R651	NRS181J-621X	MG RESISTOR	620Ω 1/8W J	1	A,B,C,D,E,F,G,H,I,K
	R652	NRS181J-102X	MG RESISTOR	1kΩ 1/8W J	1	A,B,C,D,E,F,G,H,I,K
	R653	NRS181J-122X	MG RESISTOR	1.2kΩ 1/8W J	1	A,B,C,D,E,F,G,H,I,K
	R654	NRS181J-122X	MG RESISTOR	1.2kΩ 1/8W J	1	A,B,C,D,E,F,G,H,I,K
	R656	NRS181J-621X	MG RESISTOR	620Ω 1/8W J	1	A,B,C,D,E,F,G,H,I,K
	R657	NRS181J-621X	MG RESISTOR	620Ω 1/8W J	1	A,B,C,D,E,F,G,H,I,K
	R658	NRS181J-102X	MG RESISTOR	1kΩ 1/8W J	1	A,B,C,D,E,F,G,H,I,K
	R660	NRSA63J-394X	MG RESISTOR	390kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R661	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R662	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R663	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R664	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R665	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R666	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R667	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R678	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	A,B,C,D,E,F,G,H,I,K
	R681	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R693	NRS181J-103X	MG RESISTOR	10kΩ 1/8W J	1	A,B,C,D,E,F,G,H,I,K
	L621	NQR0022-005X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,K
	L674	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,K
	L675	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,K
	L676	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,K
	CN601	QGZ1102K2-20X	CONNECTOR	(1-20)	1	A,B,C,D,E,F,G,H,I
	CN601	QGZ1102K3-20X	CONNECTOR	(1-20)	1	K
	CN603	QNZ1076-001	USB CONNECTOR		1	A,B,C,D,E,F,G,H,I,K
	CN603 or	QNZ1057-001	USB CONNECTOR		1	A,B,C,D,E,F,G,H,I,K
	J601	QNS0298-001	3.5 JACK		1	A,B,C,D,E,F,G,H,I,K
	J601 or	QNS0280-001	3.5 JACK		1	K
	JS686	QSW1231-002	ROTARY ENCODER		1	A,B,C,D,E,F,G,H,I,K
	LF691	NQR0682-001X	CHOKE COIL		1	A,B,C,D,E,F,G,H,I,K
	S601	NSW0246-001X	TACT SWITCH		1	A,B,C,D,E,F,G,H,I,K
	S602	NSW0246-001X	TACT SWITCH		1	A,B,C,D,E,F,G,H,I,K
	S603	NSW0246-001X	TACT SWITCH		1	A,B,C,D,E,F,G,H,I,K
	S604	NSW0246-001X	TACT SWITCH		1	A,B,C,D,E,F,G,H,I,K
	S605	NSW0246-001X	TACT SWITCH		1	A,B,C,D,E,F,G,H,I,K
	S606	NSW0246-001X	TACT SWITCH		1	A,B,C,D,E,F,G,H,I,K
	S607	NSW0246-001X	TACT SWITCH		1	A,B,C,D,E,F,G,H,I,K
	S608	NSW0246-001X	TACT SWITCH		1	A,B,C,D,E,F,G,H,I,K
	S609	NSW0246-001X	TACT SWITCH		1	A,B,C,D,E,F,G,H,I,K
	S610	NSW0246-001X	TACT SWITCH		1	A,B,C,D,E,F,G,H,I,K
	S611	NSW0246-001X	TACT SWITCH		1	A,B,C,D,E,F,G,H,I,K
	S612	NSW0246-001X	TACT SWITCH		1	A,B,C,D,E,F,G,H,I,K
	S613	NSW0246-001X	TACT SWITCH		1	A,B,C,D,E,F,G,H,I,K
	S614	NSW0246-001X	TACT SWITCH		1	A,B,C,D,E,F,G,H,I,K
	S615	NSW0246-001X	TACT SWITCH		1	A,B,C,D,E,F,G,H,I,K
	S616	NSW0246-001X	TACT SWITCH		1	A,B,C,D,E,F,G,H,I,K
	S617	NSW0246-001X	TACT SWITCH		1	A,B,C,D,E,F,G,H,I,K

SWITCH UNIT R739BTUR <06>

	IC601	PCA9624PW-X	IC		1	J
	IC661	PTC6526LQ-L	IC		1	J
	IC681	KSM-2003TN5B	IR DETECT UNIT		1	J
	Q627	LSCR523UB-X	TRANSISTOR		1	J
	Q627 or	DSC5001/RS/-X	TRANSISTOR		1	J
	D621	NSSM065T-X	LED		1	J
	D622	NSSM065T-X	LED		1	J
	D623	NSSM065T-X	LED		1	J
	D624	NSSM065T-X	LED		1	J
	D625	NSSM065T-X	LED		1	J
	D627	RKZ5.6B2KG-X	Z DIODE		1	J
	D627 or	DZ2J056/M/-X	Z DIODE		1	J
	D630	SML-D12V8W-X	LED		1	J
	D661	RKS801KF-X	SI DIODE		1	J
	D661 or	DA2J101-X	SI DIODE		1	J
	D662	RKZ5.1B2KG-X	SB DIODE		1	J
	D662 or	DZ2J051/M/-X	Z DIODE		1	J
	D663	RKZ5.1B2KG-X	SB DIODE		1	J
	D663 or	DZ2J051/M/-X	Z DIODE		1	J
	D664	RKZ5.1B2KG-X	SB DIODE		1	J
	D664 or	DZ2J051/M/-X	Z DIODE		1	J
	D682	RKZ3.3B2KG-X	Z DIODE		1	J
	D682 or	DZ2J033/M/-X	Z DIODE		1	J
	D691	RKZ5.1B2KG-X	SB DIODE		1	J
	D691 or	DZ2J051/M/-X	Z DIODE		1	J
	D692	RKZ5.1B2KG-X	SB DIODE		1	J
	D692 or	DZ2J051/M/-X	Z DIODE		1	J
	C620	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	J
	C624	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	J
	C625	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	J

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A735BTJ	A	KD-R730BTJ	B	KD-R731BTE	C	KD-R731BTEN	D
KD-R731BTEU	E	KD-R731BTEY	F	KD-R736BTU	G	KD-R736BTUN	H
KD-R736BTUP	I	KD-R739BTUR	J	KD-S79BTJ	K		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C627	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	J
	C628	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	J
	C629	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	J
	C661	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	J
	C662	NDC31HJ-151X	C CAPACITOR	150pF 50V J	1	J
	C663	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	J
	C665	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	J
	C666	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	J
	C682	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	J
	C684	NDC31HJ-270X	C CAPACITOR	27pF 50V J	1	J
	C685	NDC31HJ-270X	C CAPACITOR	27pF 50V J	1	J
	C687	NCB31HK-472X	C CAPACITOR	4700pF 50V K	1	J
	C688	NCB31HK-472X	C CAPACITOR	4700pF 50V K	1	J
	C691	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	J
	R601	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	J
	R602	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	J
	R603	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	1	J
	R604	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	1	J
	R605	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	1	J
	R607	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	J
	R608	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	J
	R609	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	1	J
	R610	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	1	J
	R611	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	1	J
	R612	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	1	J
	R613	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	J
	R614	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	J
	R615	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	J
	R616	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	1	J
	R617	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	1	J
	R618	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	1	J
	R621	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	J
	R623	NRS181J-331X	MG RESISTOR	330Ω 1/8W J	1	J
	R624	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	J
	R625	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	J
	R627	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	J
	R628	NRS181J-4R7X	MG RESISTOR	4.7Ω 1/8W J	1	J
	R647	NRS181J-621X	MG RESISTOR	620Ω 1/8W J	1	J
	R648	NRS181J-621X	MG RESISTOR	620Ω 1/8W J	1	J
	R649	NRS181J-102X	MG RESISTOR	1kΩ 1/8W J	1	J
	R650	NRS181J-621X	MG RESISTOR	620Ω 1/8W J	1	J
	R651	NRS181J-621X	MG RESISTOR	620Ω 1/8W J	1	J
	R652	NRS181J-102X	MG RESISTOR	1kΩ 1/8W J	1	J
	R653	NRS181J-122X	MG RESISTOR	1.2kΩ 1/8W J	1	J
	R654	NRS181J-122X	MG RESISTOR	1.2kΩ 1/8W J	1	J
	R656	NRS181J-621X	MG RESISTOR	620Ω 1/8W J	1	J
	R657	NRS181J-621X	MG RESISTOR	620Ω 1/8W J	1	J
	R658	NRS181J-102X	MG RESISTOR	1kΩ 1/8W J	1	J
	R660	NRSA63J-394X	MG RESISTOR	390kΩ 1/16W J	1	J
	R661	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	J
	R662	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	J
	R663	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	J
	R664	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J	1	J
	R665	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	J
	R666	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	J
	R667	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	J
	R678	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	J
	R681	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	J
	R693	NRS181J-103X	MG RESISTOR	10kΩ 1/8W J	1	J
	L621	NQR0022-005X	FERRITE BEADS		1	J
	L674	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	1	J
	L675	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	1	J
	L676	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	1	J
	CN601	QGZ1102K2-20X	CONNECTOR	(1-20)	1	J
	CN603	QNZ1076-001	USB CONNECTOR		1	J
	CN603 or	QNZ1057-001	USB CONNECTOR		1	J
	J601	QNS0298-001	3.5 JACK		1	J
	J601 or	QNS0280-001	3.5 JACK		1	J
	JS686	QSW1231-002	ROTARY ENCODER		1	J
	LF691	NQR0682-001X	CHOKE COIL		1	J
	S601	NSW0246-001X	TACT SWITCH		1	J
	S602	NSW0246-001X	TACT SWITCH		1	J
	S603	NSW0246-001X	TACT SWITCH		1	J
	S604	NSW0246-001X	TACT SWITCH		1	J
	S605	NSW0246-001X	TACT SWITCH		1	J
	S606	NSW0246-001X	TACT SWITCH		1	J
	S607	NSW0246-001X	TACT SWITCH		1	J
	S608	NSW0246-001X	TACT SWITCH		1	J
	S609	NSW0246-001X	TACT SWITCH		1	J
	S610	NSW0246-001X	TACT SWITCH		1	J
	S611	NSW0246-001X	TACT SWITCH		1	J
	S612	NSW0246-001X	TACT SWITCH		1	J
	S613	NSW0246-001X	TACT SWITCH		1	J
	S614	NSW0246-001X	TACT SWITCH		1	J
	S615	NSW0246-001X	TACT SWITCH		1	J
	S616	NSW0246-001X	TACT SWITCH		1	J
	S617	NSW0246-001X	TACT SWITCH		1	J

USB UNIT Except R739BTUR <03>

⚠	IC401	TCC8600	IC		1	A,B,C,D,E,F,G,H,I,K

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A735BTJ	A	KD-R730BTJ	B	KD-R731BTE	C	KD-R731BTEN	D
KD-R731BTEU	E	KD-R731BTEY	F	KD-R736BTU	G	KD-R736BTUN	H
KD-R736BTUP	I	KD-R739BTUR	J	KD-S79BTJ	K		

Safe	Symbol No.		Parts No.	Parts Name	Description	QTY	Local
	IC402		R1EX24512ASAS-X	IC		1	A,B,C,D,E,F,G,H,I,K
	IC402	or	M24512-WMN6-X	IC		1	A,B,C,D,E,F,G,H,I,K
⚠	IC441		JVM546M	IC		1	A,B,C,D,E,F,G,H,I,K
⚠	IC442		A3V28S40FTP-G6	IC		1	A,B,C,D,E,F,G,H,I,K
	IC471		74LVC1G3157GW-X	IC		1	A,B,C,D,E,F,G,H,I,K
	IC481		MFI341S2162-X	IC		1	A,B,C,D,E,F,G,H,I,K
	IC491		NJM2878F4-18-X	IC		1	A,B,C,D,E,F,G,H,I,K
	IC601		PCM1780-X	IC		1	A,B,C,D,E,F,G,H,I,K
	Q401		LTC044EUB-X	DIGI TRANSISTOR		1	A,B,C,D,E,F,G,H,I,K
	Q401	or	DRC5144E-X	DIGI TRANSISTOR		1	A,B,C,D,E,F,G,H,I,K
	D601		RKZ5.1B2KG-X	SB DIODE		1	A,B,C,D,E,F,G,H,I,K
	D601	or	DZ2J051/M/-X	Z DIODE		1	A,B,C,D,E,F,G,H,I,K
	C401		NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	A,B,C,D,E,F,G,H,I,K
	C402		NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	A,B,C,D,E,F,G,H,I,K
	C403		NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	A,B,C,D,E,F,G,H,I,K
	C404		NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	A,B,C,D,E,F,G,H,I,K
	C405		NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	A,B,C,D,E,F,G,H,I,K
	C406		NDCA1HJ-471W	C CAPACITOR	470pF 50V J	1	A,B,C,D,E,F,G,H,I,K
	C407		NDC31HJ-270X	C CAPACITOR	27pF 50V J	1	A,B,C,D,E,F,G,H,I,K
	C408		NDC31HJ-270X	C CAPACITOR	27pF 50V J	1	A,B,C,D,E,F,G,H,I,K
	C409		NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	A,B,C,D,E,F,G,H,I,K
	C410		NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	A,B,C,D,E,F,G,H,I,K
	C414		NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	A,B,C,D,E,F,G,H,I,K
	C415		NCBA1HK-122W	C CAPACITOR	1200pF 50V K	1	A,B,C,D,E,F,G,H,I,K
	C416		NCJ30JM-106X-A	C CAPACITOR	10uF 6.3V M	1	A,B,C,D,E,F,G,H,I,K
	C417		NDCA1HJ-331W	C CAPACITOR	330pF 50V J	1	A,B,C,D,E,F,G,H,I,K
	C418		NCB31CK-154X	C CAPACITOR	0.15uF 16V K	1	A,B,C,D,E,F,G,H,I,K
	C419		NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	A,B,C,D,E,F,G,H,I,K
	C420		NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	A,B,C,D,E,F,G,H,I,K
	C421		NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	A,B,C,D,E,F,G,H,I,K
	C422		NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	A,B,C,D,E,F,G,H,I,K
	C423		NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	A,B,C,D,E,F,G,H,I,K
	C424		NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	A,B,C,D,E,F,G,H,I,K
	C425		NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,K
	C426		NDCA1HJ-200W	C CAPACITOR	20pF 50V J	1	A,B,C,D,E,F,G,H,I,K
	C430		NQR0450-001X	EMI FILTER	0.022uF 50V M	1	A,B,C,D,E,F,G,H,I,K
	C441		NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	A,B,C,D,E,F,G,H,I,K
	C442		NBE20JM-226X	TA E CAPACITOR	22uF 6.3V M	1	A,B,C,D,E,F,G,H,I,K
	C443		NBE20JM-226X	TA E CAPACITOR	22uF 6.3V M	1	A,B,C,D,E,F,G,H,I,K
	C444		NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	A,B,C,D,E,F,G,H,I,K
	C445		NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	A,B,C,D,E,F,G,H,I,K
	C446		NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	A,B,C,D,E,F,G,H,I,K
	C447		NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	A,B,C,D,E,F,G,H,I,K
	C448		NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	A,B,C,D,E,F,G,H,I,K
	C449		NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	A,B,C,D,E,F,G,H,I,K
	C450		NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	A,B,C,D,E,F,G,H,I,K
	C451		NDCA1HJ-471W	C CAPACITOR	470pF 50V J	1	A,B,C,D,E,F,G,H,I,K
	C452		NDCA1HJ-471W	C CAPACITOR	470pF 50V J	1	A,B,C,D,E,F,G,H,I,K
	C453		NDCA1HJ-471W	C CAPACITOR	470pF 50V J	1	A,B,C,D,E,F,G,H,I,K
	C454		NRSA6AJ-153W	MG RESISTOR	15kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	C455		NRSA6AJ-153W	MG RESISTOR	15kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	C471		NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	A,B,C,D,E,F,G,H,I,K
	C481		NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,K
	C482		NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	A,B,C,D,E,F,G,H,I,K
	C491		NBE41AM-476X	TA E CAPACITOR	47uF 10V M	1	A,B,C,D,E,F,G,H,I,K
	C492		NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	A,B,C,D,E,F,G,H,I,K
	C493		NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,K
	C494		NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	A,B,C,D,E,F,G,H,I,K
	C495		NBE20JM-226X	TA E CAPACITOR	22uF 6.3V M	1	A,B,C,D,E,F,G,H,I,K
	C497		NDC31HJ-331X	C CAPACITOR	330pF 50V J	1	A,B,C,D,E,F,G,H,I,K
	C601		NBE41AM-476X	TA E CAPACITOR	47uF 10V M	1	A,B,C,D,E,F,G,H,I,K
	C602		NCBA1CK-123W	C CAPACITOR	0.012uF 16V K	1	A,B,C,D,E,F,G,H,I,K
	C603		NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	A,B,C,D,E,F,G,H,I,K
	C604		NBE41AM-476X	TA E CAPACITOR	47uF 10V M	1	A,B,C,D,E,F,G,H,I,K
	C605		NDCA1HJ-101W	C CAPACITOR	100pF 50V J	1	A,B,C,D,E,F,G,H,I,K
	C606		NDCA1HJ-101W	C CAPACITOR	100pF 50V J	1	A,B,C,D,E,F,G,H,I,K
	R401		NRSA6AJ-470W	MG RESISTOR	47Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R402		NRSA6AJ-470W	MG RESISTOR	47Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R403		NRSA6AJ-470W	MG RESISTOR	47Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R404		NRSA6AJ-151W	MG RESISTOR	150Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R405		NRSA6AJ-105W	MG RESISTOR	1MΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R406		NQR0022-005X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,K
	R407		NQR0286-007X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,K
	R408		NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R409		NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R410		NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R411		NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R412		NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R413		NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R414		NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R415		NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R416		NRSA6AJ-271W	MG RESISTOR	270Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R417		NRSA6AJ-271W	MG RESISTOR	270Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R418		NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R419		NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R420		NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R421		NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R422		NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R423		NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R425		NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,K

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A735BTJ	A	KD-R730BTJ	B	KD-R731BTE	C	KD-R731BTEN	D
KD-R731BTEU	E	KD-R731BTEY	F	KD-R736BTU	G	KD-R736BTUN	H
KD-R736BTUP	I	KD-R739BTUR	J	KD-S79BTJ	K		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R426	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R427	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R428	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R429	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R430	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R431	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R432	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R435	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R436	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R441	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R443	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R444	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R445	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R446	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R451	NQR0286-007X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,K
	R452	NQR0286-007X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,K
	R453	NQR0286-007X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,K
	R454	NQR0286-007X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,K
	R455	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R456	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R457	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R458	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R462	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R463	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R469	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R481	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R521	NQR0286-007X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,K
	R601	NQR0286-007X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,K
	R602	NQR0286-007X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,K
	R603	NQR0286-007X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,K
	R604	NRSA6AJ-220W	MG RESISTOR	22Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R605	NRSA6AJ-220W	MG RESISTOR	22Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R606	NRSA6AJ-220W	MG RESISTOR	22Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R607	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	R608	NRS181J-181X	MG RESISTOR	180Ω 1/8W J	1	A,B,C,D,E,F,G,H,I,K
	R609	NRS181J-181X	MG RESISTOR	180Ω 1/8W J	1	A,B,C,D,E,F,G,H,I,K
	L401	NQL093K-R12X	P COIL	0.12uH K	1	A,B,C,D,E,F,G,H,I,K
	L402	NQL093K-R12X	P COIL	0.12uH K	1	A,B,C,D,E,F,G,H,I,K
	L403	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,K
	L404	NQR0022-005X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,K
	L405	NQR0022-005X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,K
	L406	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,K
	L407	NQR0022-005X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,K
	L491	NQL79GM-4R7X	COIL	4.7uH M	1	A,B,C,D,E,F,G,H,I,K
	L601	NQL79GM-470X	COIL	47uH M	1	A,B,C,D,E,F,G,H,I,K
	CN441	QGG2011M1-18X	CONNECTOR	(1-18)	1	A,B,C,D,E,F,G,H,I,K
	CN442	QGG2011M1-18X	CONNECTOR	(1-18)	1	A,B,C,D,E,F,G,H,I,K
	CN444	QGG2504M5-02	CONNECTOR	(1-2)	1	A,B,C,D,E,F,G,H,I,K
	K441	NQR0502-001X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,K
	K442	NQR0286-007X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,K
	K443	NQR0286-007X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,K
	K444	NQR0286-007X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,K
	K445	NQR0286-007X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,K
	K446	NQR0286-007X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,K
	K447	NQR0286-007X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,K
	K448	NQR0286-007X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,K
	K451	NQR0022-005X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,K
	K452	NQR0286-007X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,K
	K453	NQR0286-007X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,K
	LF409	NQR0682-001X	CHOKE COIL		1	A,B,C,D,E,F,G,H,I,K
	LF410	NQR0682-001X	CHOKE COIL		1	A,B,C,D,E,F,G,H,I,K
	X401	NAX1168-001X	CRYSTAL		1	A,B,C,D,E,F,G,H,I,K

USB UNIT R739BTUR <07>

Safe	Symbol No.		Parts No.	Parts Name	Description	QTY	Local
⚠	IC401		TCC8600	IC		1	J
	IC402		R1EX24512ASAS-X	IC		1	J
	IC402	or	M24512-WMN6-X	IC		1	J
⚠	IC441		JVM546M	IC		1	J
⚠	IC442		A3V28S40FTP-G6	IC		1	J
	IC471		74LVC1G3157GW-X	IC		1	J
	IC481		MFI341S2162-X	IC		1	J
	IC491		NJM2878F4-18-X	IC		1	J
	IC601		PCM1780-X	IC		1	J
	Q401		LTC044EUB-X	DIGI TRANSISTOR		1	J
	Q401	or	DRC5144E-X	DIGI TRANSISTOR		1	J
	D601		RKZ5.1B2KG-X	SB DIODE		1	J
	D601	or	DZ2J051/M/-X	Z DIODE		1	J
	C401		NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	J
	C402		NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	J
	C403		NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	J
	C404		NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	J
	C405		NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	J
	C406		NDCA1HJ-471W	C CAPACITOR	470pF 50V J	1	J
	C407		NDC31HJ-270X	C CAPACITOR	27pF 50V J	1	J
	C408		NDC31HJ-270X	C CAPACITOR	27pF 50V J	1	J
	C409		NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	J
	C410		NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	J
	C414		NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	J
	C415		NCBA1HK-122W	C CAPACITOR	1200pF 50V K	1	J
	C416		NCJ30JM-106X-A	C CAPACITOR	10uF 6.3V M	1	J

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A735BTJ	A	KD-R730BTJ	B	KD-R731BTE	C	KD-R731BTEN	D
KD-R731BTEU	E	KD-R731BTEY	F	KD-R736BTU	G	KD-R736BTUN	H
KD-R736BTUP	I	KD-R739BTUR	J	KD-S79BTJ	K		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C417	NDCA1HJ-331W	C CAPACITOR	330pF 50V J	1	J
	C418	NCB31CK-154X	C CAPACITOR	0.15uF 16V K	1	J
	C419	NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	J
	C420	NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	J
	C421	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	J
	C422	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	J
	C423	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	J
	C424	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	J
	C425	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	J
	C426	NDCA1HJ-200W	C CAPACITOR	20pF 50V J	1	J
	C430	NQR0450-001X	EMI FILTER	0.022uF 50V M	1	J
	C441	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	J
	C442	NBE20JM-226X	TA E CAPACITOR	22uF 6.3V M	1	J
	C443	NBE20JM-226X	TA E CAPACITOR	22uF 6.3V M	1	J
	C444	NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	J
	C445	NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	J
	C446	NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	J
	C447	NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	J
	C448	NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	J
	C449	NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	J
	C450	NDC31HJ-561X	C CAPACITOR	560pF 50V J	1	J
	C451	NDCA1HJ-471W	C CAPACITOR	470pF 50V J	1	J
	C452	NDCA1HJ-471W	C CAPACITOR	470pF 50V J	1	J
	C453	NDCA1HJ-471W	C CAPACITOR	470pF 50V J	1	J
	C454	NRSA6AJ-153W	MG RESISTOR	15kΩ 1/16W J	1	J
	C455	NRSA6AJ-153W	MG RESISTOR	15kΩ 1/16W J	1	J
	C471	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	J
	C481	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	J
	C482	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	J
	C491	NBE41AM-476X	TA E CAPACITOR	47uF 10V M	1	J
	C492	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	J
	C493	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	J
	C494	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	J
	C495	NBE20JM-226X	TA E CAPACITOR	22uF 6.3V M	1	J
	C497	NDC31HJ-331X	C CAPACITOR	330pF 50V J	1	J
	C601	NBE41AM-476X	TA E CAPACITOR	47uF 10V M	1	J
	C602	NCBA1CK-123W	C CAPACITOR	0.012uF 16V K	1	J
	C603	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	J
	C604	NBE41AM-476X	TA E CAPACITOR	47uF 10V M	1	J
	C605	NDCA1HJ-101W	C CAPACITOR	100pF 50V J	1	J
	C606	NDCA1HJ-101W	C CAPACITOR	100pF 50V J	1	J
	R401	NRSA6AJ-470W	MG RESISTOR	47Ω 1/16W J	1	J
	R402	NRSA6AJ-470W	MG RESISTOR	47Ω 1/16W J	1	J
	R403	NRSA6AJ-470W	MG RESISTOR	47Ω 1/16W J	1	J
	R404	NRSA6AJ-151W	MG RESISTOR	150Ω 1/16W J	1	J
	R405	NRSA6AJ-105W	MG RESISTOR	1MΩ 1/16W J	1	J
	R406	NQR0022-005X	FERRITE BEADS		1	J
	R407	NQR0286-007X	FERRITE BEADS		1	J
	R408	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	1	J
	R409	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	1	J
	R410	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	J
	R411	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	1	J
	R412	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	1	J
	R413	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	1	J
	R414	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	1	J
	R415	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	J
	R416	NRSA6AJ-271W	MG RESISTOR	270Ω 1/16W J	1	J
	R417	NRSA6AJ-271W	MG RESISTOR	270Ω 1/16W J	1	J
	R418	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	J
	R419	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	J
	R420	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	J
	R421	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	1	J
	R422	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	1	J
	R423	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	J
	R425	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	J
	R426	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	J
	R427	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	J
	R428	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	J
	R429	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	J
	R430	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	J
	R431	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	J
	R432	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	J
	R435	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	J
	R436	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	J
	R441	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	J
	R443	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	J
	R444	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	J
	R445	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	J
	R446	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	J
	R451	NQR0286-007X	FERRITE BEADS		1	J
	R452	NQR0286-007X	FERRITE BEADS		1	J
	R453	NQR0286-007X	FERRITE BEADS		1	J
	R454	NQR0286-007X	FERRITE BEADS		1	J
	R455	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	1	J
	R456	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	1	J
	R457	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	1	J
	R458	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	J
	R462	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	J
	R463	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	J
	R469	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	J

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A735BTJ	A	KD-R730BTJ	B	KD-R731BTE	C	KD-R731BTEN	D
KD-R731BTEU	E	KD-R731BTEY	F	KD-R736BTU	G	KD-R736BTUN	H
KD-R736BTUP	I	KD-R739BTUR	J	KD-S79BTJ	K		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R481	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	J
	R521	NQR0286-007X	FERRITE BEADS		1	J
	R601	NQR0286-007X	FERRITE BEADS		1	J
	R602	NQR0286-007X	FERRITE BEADS		1	J
	R603	NQR0286-007X	FERRITE BEADS		1	J
	R604	NRSA6AJ-220W	MG RESISTOR	22Ω 1/16W J	1	J
	R605	NRSA6AJ-220W	MG RESISTOR	22Ω 1/16W J	1	J
	R606	NRSA6AJ-220W	MG RESISTOR	22Ω 1/16W J	1	J
	R607	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	1	J
	R608	NRS181J-181X	MG RESISTOR	180Ω 1/8W J	1	J
	R609	NRS181J-181X	MG RESISTOR	180Ω 1/8W J	1	J
	L401	NQL093K-R12X	P COIL	0.12uH K	1	J
	L402	NQL093K-R12X	P COIL	0.12uH K	1	J
	L403	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	1	J
	L404	NQR0022-005X	FERRITE BEADS		1	J
	L405	NQR0022-005X	FERRITE BEADS		1	J
	L406	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	1	J
	L407	NQR0022-005X	FERRITE BEADS		1	J
	L491	NQL79GM-4R7X	COIL	4.7uH M	1	J
	L601	NQL79GM-470X	COIL	47uH M	1	J
	CN441	QGG2011M1-18X	CONNECTOR	(1-18)	1	J
	CN442	QGG2011M1-18X	CONNECTOR	(1-18)	1	J
	CN444	QGG2504M5-02	CONNECTOR	(1-2)	1	J
	K441	NQR0502-001X	FERRITE BEADS		1	J
	K442	NQR0286-007X	FERRITE BEADS		1	J
	K443	NQR0286-007X	FERRITE BEADS		1	J
	K444	NQR0286-007X	FERRITE BEADS		1	J
	K445	NQR0286-007X	FERRITE BEADS		1	J
	K446	NQR0286-007X	FERRITE BEADS		1	J
	K447	NQR0286-007X	FERRITE BEADS		1	J
	K448	NQR0286-007X	FERRITE BEADS		1	J
	K451	NQR0022-005X	FERRITE BEADS		1	J
	K452	NQR0286-007X	FERRITE BEADS		1	J
	K453	NQR0286-007X	FERRITE BEADS		1	J
	LF409	NQR0682-001X	CHOKE COIL		1	J
	LF410	NQR0682-001X	CHOKE COIL		1	J
	X401	NAX1168-001X	CRYSTAL		1	J

CD PLYAER UNIT (FLM-HC3-1D) <04>

	R1	NRSA63J-131X	MG RESISTOR	130Ω 1/16W J	1	
	CN101	QGF1044F2-26X	CONNECTOR	FFC/FPC (1-26)	1	
	CN102	QGF0522F3-15W	CONNECTOR	FFC/FPC (1-15)	1	
	SW1	NSW0291-001X	DETECT SWITCH		1	
	SW1 or	NSW0233-001X	DETECT SWITCH		1	
	SW2	NSW0291-001X	DETECT SWITCH		1	
	SW2 or	NSW0233-001X	DETECT SWITCH		1	
	SW3	NSW0291-001X	DETECT SWITCH		1	
	SW3 or	NSW0233-001X	DETECT SWITCH		1	
	SW4	NSW0291-001X	DETECT SWITCH		1	
	SW4 or	NSW0233-001X	DETECT SWITCH		1	

PACKING AND ACCESSORIES

No additional / supplemental order of WARRANTY CARDs are available.

Block No.M3MM

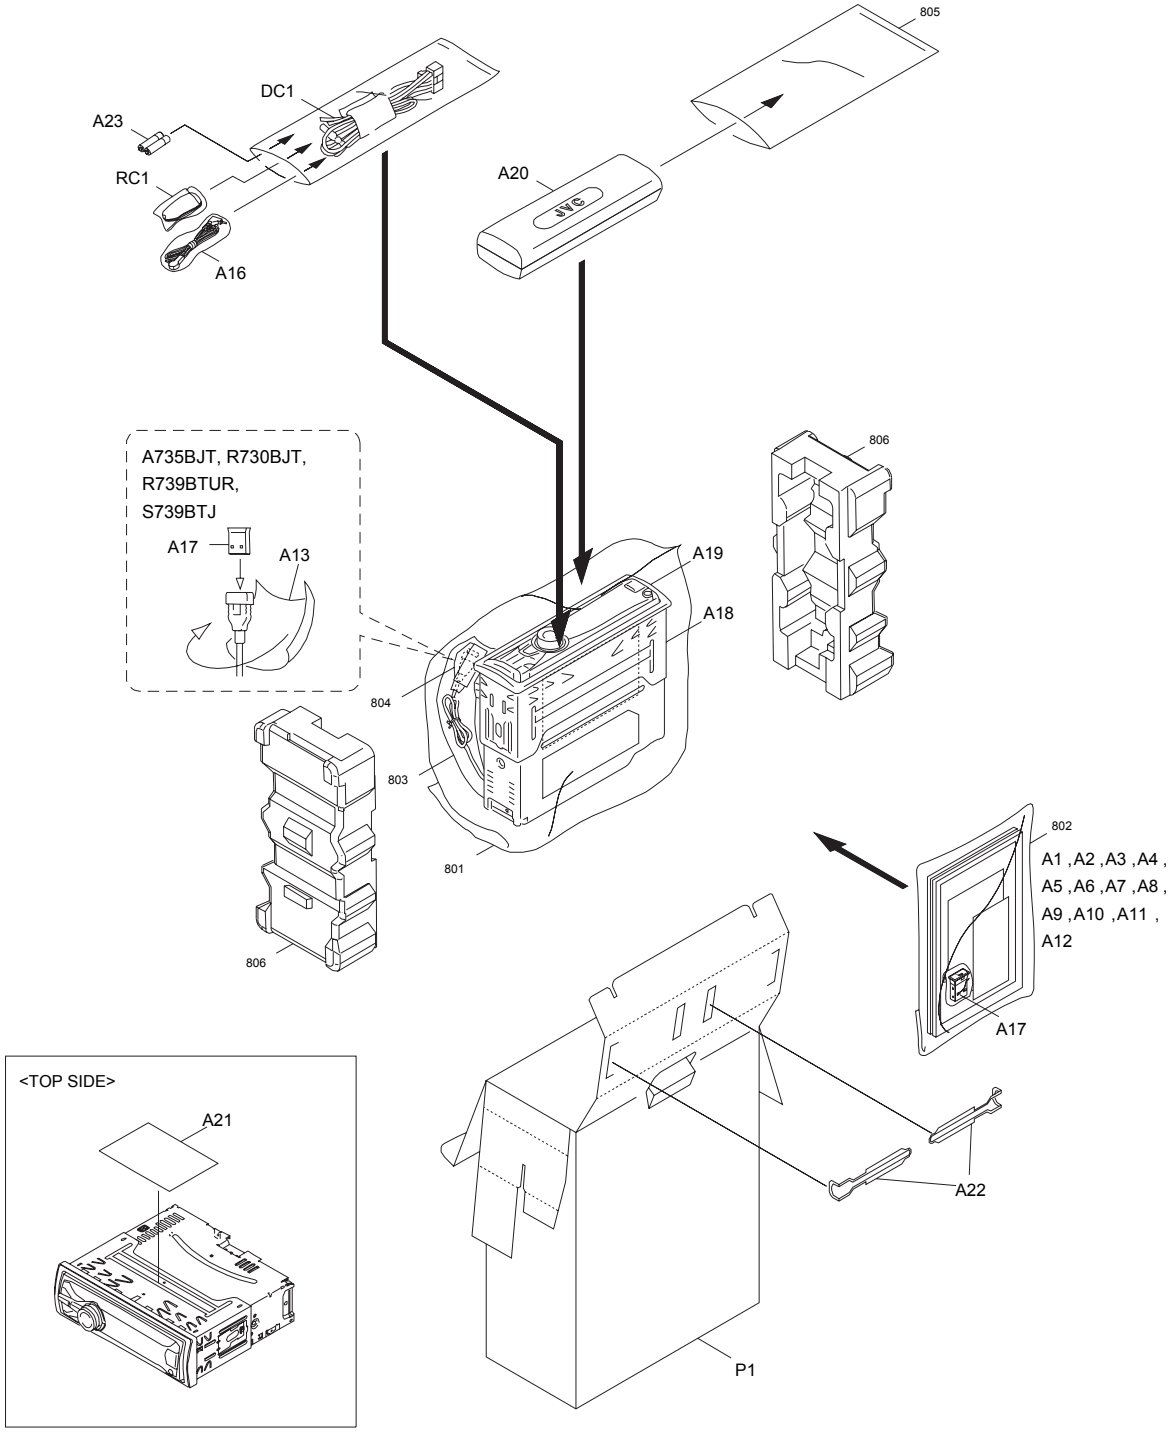

Parts with the exploded numbers larger than 800 are not supplied.

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-A735BTJ	A	KD-R730BTJ	B	KD-R731BTE	C	KD-R731BTEN	D
KD-R731BTEU	E	KD-R731BTEY	F	KD-R736BTU	G	KD-R736BTUN	H
KD-R736BTUP	I	KD-R739BTUR	J	KD-S79BTJ	K		

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
PACKING AND ACCESSORIES <M3MM>						
⚠	DC1	QAM1331-001	DC CORD		1	A,B,K
⚠	DC1	QAM1343-001	DC CORD		1	C,D,E,F
⚠	DC1	QAM1332-001	DC CORD		1	G,H,I
⚠	DC1	QAM1342-002	DC CORD		1	J
	RC1	RM-RK52M	REMOCON UNIT		1	A,B,C,D,E,F,G,H,I,K
	RC1	RM-RK52M3	REMOCON UNIT		1	J
	A1	GET0777-001A	INST BOOK	ENG SPA FRE	1	A,B
	A1	GET0779-001A	INST BOOK	GER	1	C,D,F
	A1	GET0779-005A	INST BOOK	TUR SPA ARA PER	1	E
	A1	GET0778-001A	INST BOOK	ENG RUS THA ARA PER	1	G
	A1	GET0778-004A	INST BOOK	ENG INA	1	H
	A1	GET0778-003A	INST BOOK	KOR	1	I
	A1	GET0815-001C	INST BOOK	POR	1	J
	A1	GET0865-001A	INST BOOK	ENG SPA FRE	1	K
	A2	GET0779-002A	INST BOOK	DUT SPA ITA POR	1	C
	A2	GET0779-004A	INST BOOK	SWE DAN FIN	1	D
	A2	GET0779-006A	INST BOOK	POL RUS GRE UKR	1	F
	A2	GET0778-002A	INST BOOK	CHI(TAIWAN)	1	G
	A3	GET0779-003A	INST BOOK	ENG FRE	1	C,D,E
	A3	GET0779-007A	INST BOOK	RUM BUL CZE HUN	1	F
	A4	GET0777-002A	INSTALL MANUAL	ENG SPA FRE	1	A,B
	A4	GET0779-008A	INSTALL MANUAL	GER	1	C,D,F
	A4	GET0779-012A	INSTALL MANUAL	TUR SPA ARA PER	1	E
	A4	GET0778-006A	INSTALL MANUAL	CHI(TAIWAN)	1	G
	A4	GET0778-008A	INSTALL MANUAL	ENG INA	1	H
	A4	GET0778-007A	INSTALL MANUAL	KOR	1	I
	A4	GET0815-002A	INSTALL MANUAL	POR	1	J
	A4	GET0865-002A	INSTALL MANUAL	ENG SPA FRE	1	K
	A5	GET0779-009A	INSTALL MANUAL	DUT SPA ITA POR	1	C
	A5	GET0779-011A	INSTALL MANUAL	SWE DAN FIN	1	D
	A5	GET0779-013A	INSTALL MANUAL	POL RUS GRE UKR	1	F
	A5	GET0778-005A	INSTALL MANUAL	ENG RUS THA	1	G
	A6	GET0779-010A	INSTALL MANUAL	ENG FRE	1	C,D,E
	A6	GET0779-014A	INSTALL MANUAL	RUM BUL CZE HUN	1	F
	A7	----------	WARRANTY CARD	BT-51029-3	1	A
	A7	----------	WARRANTY CARD	BT-51018-6	1	B,K
	A7	----------	WARRANTY CARD	BT-54045-1	1	C,D,F
	A7	----------	WARRANTY CARD	BT-53007-1	1	J
	A8	----------	WARRANTY CARD	BT-52008-1	1	A,B,K
	A9	BT-51044-1	REGISTRATION CARD		1	A,B,K
	A10	----------	USB/BT ADP SHT	GET0617-001H	1	A,B,C,D,E,F,G,H,I
	A10	----------	USB/BT ADP SHT	GET0617-001J	1	J,K
	A11	----------	BT COUNTRY LIST	GET0820-001A	1	
	A12	----------	RUSSIAN SHEET	LVT2328-001A	1	F
	A13	----------	BT DONGLE SHEET	GET0725-001A	1	A,B,K
	A13	----------	BT DONGLE SHEET	GET0725-002A	1	J
	A16	QAN0109-001	MICROPHONE		1	
	A17	QAU0526-002	RF MODULE		1	A,B,C,D,E,F,G,H,I
	A17	QAU0526-003	RF MODULE		1	J,K
	A18	GE20279-001A	MOUNTING SLEEVE		1	
	A19	GE20295-003A	TRIM PLATE		1	
	A20	GE32320-001A	HARD CASE ASSY		1	
	A21	----------	CAUTION SHEET	GET0713-001A	1	C,D,E,F,G,H,I
	A21	----------	CAUTION SHEET	GET0222-001B	1	K
	A22	GE40508-001A	HOOK		2	
⚠	A23	----------	BATTERY		1	J
	P1	GE34759-001A	CARTON		1	A
	P1	GE34762-001A	CARTON		1	B
	P1	GE34768-001A	CARTON		1	C,D,E,F
	P1	GE34765-001A	CARTON		1	G,H,I
	P1	GE35067-001A	CARTON		1	J
	P1	GE35401-001A	CARTON		1	K