


KTC-V500E/N/P

EXPLODED VIEW

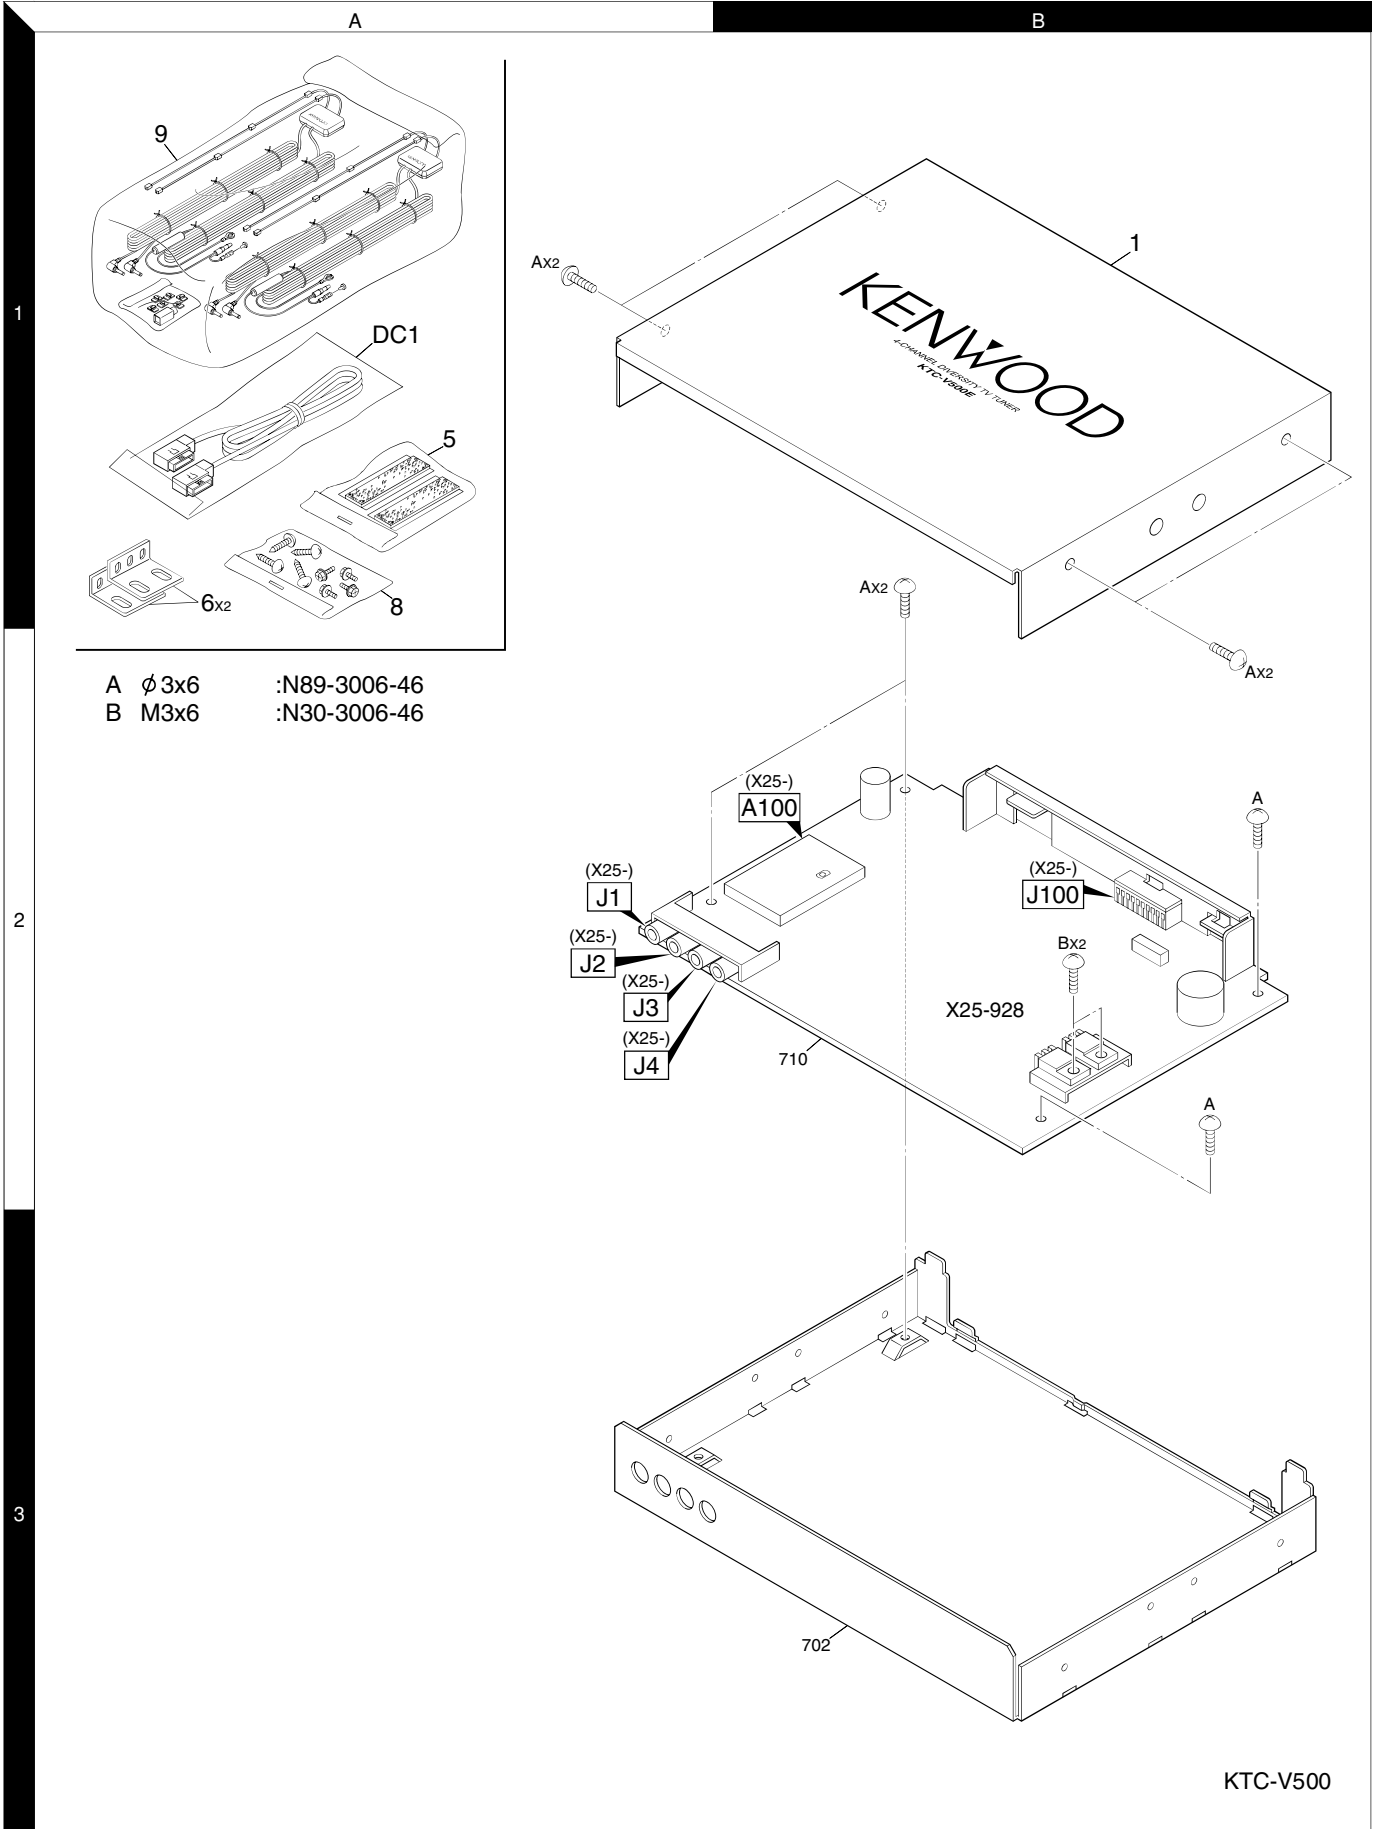

A ϕ 3x6 :N89-3006-46
 B M3x6 :N30-3006-46

KTC-V500

KTC-V500E/N/P

PARTS LIST

* New Parts

Parts without Part No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

(X25-928x-xx)

Ref. No.	A	N	Parts No.	Description	Desti-	Ref. No.	A	N	Parts No.	Description	Desti-		
	d	e			nation		d	e			nation		
	w	w					w	w					
KTC-V500E/N/P													
1	1B	*	A01-2791-02	METALLIC CABINET	K	C221			CC73GCH1H100D	CHIP C	10PF	D	E1
1	1B	*	A01-2792-02	METALLIC CABINET	M1	C222			CK73GB1E223K	CHIP C	0.022UF	K	E1
1	1B	*	A01-2793-02	METALLIC CABINET	E1	C223			CE04NW1H2R2M	ELECTRO	2.2UF	50WV	E1
-			B46-0100-50	WARRANTY CARD		C224			CK73GB1E473K	CHIP C	0.047UF	K	E1
-		*	B64-2141-00	INST. MANUAL (ENG,FRE,SPA)	K	C225-227			CK73GB1H103K	CHIP C	0.010UF	K	E1
-		*	B64-2142-00	INST. MANUAL (ENG,S-CHI)	M1	C228			CK73GB1A224K	CHIP C	0.22UF	K	E1
-		*	B64-2143-00	INST. MANUAL (ENG,FRE,GER,DUT)	E1	C229			CK73GB1A473K	CHIP C	0.047UF	K	E1
-		*	B64-2143-00	INST. MANUAL (ITA,SPA,POR)	E1	C231			CK73GB1A224K	CHIP C	0.22UF	K	E1
-		*	B64-2143-00	INST. MANUAL (ITA,SPA,POR)	E1	C232			CE04DW0J331M	ELECTRO	330UF	6.3WV	
DC1	1A		E30-4918-05	CORD WITH PLUG		C233			CK73GB1C104K	CHIP C	0.10UF	K	E1
5	1A		H30-0051-05	MAGIC TAPE		C234			C90-2592-05	ELECTRO	10UF	6.3WV	
-			H25-0336-04	PROTECTION BAG (170X250X0.03)		C235			CK73GB1H103K	CHIP C	0.010UF	K	E1
-			H25-0338-04	PROTECTION BAG (250X350X0.03)	KM1	C236			CE04NW0J221M	ELECTRO	220UF	6.3WV	E1
-			H25-1111-04	PROTECTION BAG (280X450X0.03)	E1	C237			CK73GB1A224K	CHIP C	0.22UF	K	E1
-		*	H54-2467-03	ITEM CARTON CASE (KTC-V500N)	K	C238			CE04NW0J221M	ELECTRO	220UF	6.3WV	E1
-		*	H54-2468-03	ITEM CARTON CASE (KTC-V500P)	M1	C239			CK73GB1A224K	CHIP C	0.22UF	K	E1
-		*	H54-2469-03	ITEM CARTON CASE (KTC-V500E)	E1	C240			CK73GB1H103K	CHIP C	0.010UF	K	
6	1A		J21-3801-04	MOUNTING HARDWARE		C241			CE04NW0J221M	ELECTRO	220UF	6.3WV	E1
8	1A		N99-1558-05	SCREW SET		C242			CK73GB1A224K	CHIP C	0.22UF	K	
A	1B		N89-3006-46	BINDING HEAD TAPTITE SCREW		C300			CE04NW1C470M	ELECTRO	47UF	16WV	
9	1A	*	T90-0551-05	ANTENNA ASSY		C301			CK73GB1C104K	CHIP C	0.10UF	K	
ELECTRIC UNIT (X25-928x-xx)													
C100-102			CK73GB1H222K	CHIP C	2200PF	K	E1	C302					
C103,104			CK73GB1H103K	CHIP C	0.010UF	K	E1	C303					
C107			CE04NW1H4R7M	ELECTRO	4.7UF	50WV		C304					
C108,109			CK73GB1H103K	CHIP C	0.010UF	K		C304,305					
C110			CE04NW0J470M	ELECTRO	47UF	6.3WV		C306					
C111,112			CE04DW1A221M	ELECTRO	220UF	10WV		C307					
C113			CK73GB1H103K	CHIP C	0.010UF	K		C308					
C114			CC73GCH1E102J	CHIP C	1000PF	J		C309					
C115			CE04NW1C220M	ELECTRO	22UF	16WV		C310					
C116-118			CK73GB1H103K	CHIP C	0.010UF	K		C311					
C119			CK73GB1H222K	CHIP C	2200PF	K		C312					
C120-127			CC73GCH1H101J	CHIP C	100PF	J		C313					
C128			CK73GB1H222K	CHIP C	2200PF	K		C314					
C200			CK73GB1C104K	CHIP C	0.10UF	K	E1	C316					
C201			CK73GB1H102K	CHIP C	1000PF	K	E1	C317					
C202,203			CE04NW1H010M	ELECTRO	1.0UF	50WV	E1	C318					
C204			CK73GB1H222K	CHIP C	2200PF	K	E1	C319					
C205			CK73GB1H472K	CHIP C	4700PF	K	E1	C320					
C206			CK73GB1C104K	CHIP C	0.10UF	K	E1	C321					
C207			CC73GCH1H101J	CHIP C	100PF	J	E1	C322					
C208			CE04NW1C470M	ELECTRO	47UF	16WV	E1	C323					
C209			CK73GB1H472K	CHIP C	4700PF	K	E1	C324,325					
C211			CC73GCH1H270J	CHIP C	27PF	J	E1	C326					
C212			CC73GCH1H471J	CHIP C	470PF	J	E1	C327					
C213,214			CK73GB1H102K	CHIP C	1000PF	K	E1	C328					
C215			CK73GB1H103K	CHIP C	0.010UF	K	E1	C329					
C216			CE04NW1HR47M	ELECTRO	0.47UF	50WV	E1	C330					
C217			CK73GB1C104K	CHIP C	0.10UF	K	E1	C331					
C220			CK73GB1C104K	CHIP C	0.10UF	K	E1	C332					
								C333,334					
								C335					
								C336					
								C337,338					
								C400					

E : Europe K : North America M : Other Areas

E1 : KTC-V500E

K : KTC-V500N

M1 : KTC-V500P

⚠ indicates safety critical components.

KTC-V500E/N/P

PARTS LIST

* New Parts

Parts without Part No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

(X25-928x-xx)

Ref. No.	A d	N e w	Parts No.	Description	Desti- nation	Ref. No.	A d	N e w	Parts No.	Description	Desti- nation
C401			CK73GB1C104K	CHIP C 0.10UF K	E1	CN2			E40-9706-05	PIN ASSY	E1
C402,403			CK73GB1H103K	CHIP C 0.010UF K	E1	CN300			E40-3640-05	PIN ASSY	
C404			CK73GB1E223K	CHIP C 0.022UF K		CN400			E40-3640-05	PIN ASSY	
C405			CK73GB1H472K	CHIP C 4700PF K		J1 -4			E11-0625-05	PHONE JACK (LGY6502-0900)	
C406			CK73GB1H103K	CHIP C 0.010UF K		J100			E58-0900-05	RECTANGULAR RECEPTACLE	
C407			CK73GB1H332K	CHIP C 3300PF K		P100			E23-0745-05	TERMINAL	
C408			CC73GCH1H330J	CHIP C 33PF J		F700	*		F53-0259-05	FUSE (5A)	
C409			CK73GB1H103K	CHIP C 0.010UF K		CF100	*		L72-0774-05	CERAMIC FILTER	E1
C410			CE04NW0J470M	ELECTRO 47UF 6.3WV		CF101			L72-0758-05	CERAMIC FILTER	E1
C411,412			CK73GB1H103K	CHIP C 0.010UF K		CF102			L72-0766-05	CERAMIC FILTER	K
C413-420			CC73GCH1H101J	CHIP C 100PF J		CF102			L72-0771-05	CERAMIC FILTER	M1
C421-424			CK73GB1H102K	CHIP C 1000PF K		CF200			L72-0751-05	CERAMIC FILTER	E1
C506			CE04NW1C470M	ELECTRO 47UF 16WV		CF300			L72-0742-05	CERAMIC FILTER	
C507			CK73GB1H103K	CHIP C 0.010UF K		CF301			L72-0707-05	CERAMIC FILTER	K
C508			CC73GCH1H181J	CHIP C 180PF J		CF301			L72-0751-05	CERAMIC FILTER	M1
C509			CK73GB1H102K	CHIP C 1000PF K		CF302	*		L72-0779-05	CERAMIC FILTER	M1
C510			CK73GB1A224K	CHIP C 0.22UF K		L100			L40-2795-34	SMALL FIXED INDUCTOR(2.7UH)	E1
C511			CK73GB1H102K	CHIP C 1000PF K		L101			L40-1295-34	SMALL FIXED INDUCTOR	E1
C515			CK73GB1H153K	CHIP C 0.015UF K	M1E1	L103			L40-1005-34	SMALL FIXED INDUCTOR	
C515			CK73GB1H223K	CHIP C 0.022UF K	K	L104			L40-6805-34	SMALL FIXED INDUCTOR	
C517			CK73GB1H223K	CHIP C 0.022UF K		L105-108			L40-5685-34	SMALL FIXED INDUCTOR(0.56UH)	
C518			CK73GB1C104K	CHIP C 0.10UF K		L109			L40-1095-34	SMALL FIXED INDUCTOR(1UH)	KE1
C519			CK73GB1H222K	CHIP C 2200PF K		L109			L40-1595-34	SMALL FIXED INDUCTOR(1.5UH)	M1
C521			CE04NW1C100M	ELECTRO 10UF 16WV		L110-113			L40-1585-34	SMALL FIXED INDUCTOR(0.15UH)	
C522			CK73GB1C473K	CHIP C 0.047UF K		L114			L40-1095-34	SMALL FIXED INDUCTOR(1UH)	K
C524			CK73GB1C473K	CHIP C 0.047UF K		L114			L40-1295-34	SMALL FIXED INDUCTOR	E1
C525			CK73GB1C104K	CHIP C 0.10UF K		L114			L40-2295-34	SMALL FIXED INDUCTOR	M1
C527			CE04NW1C470M	ELECTRO 47UF 16WV		L115			L40-1001-78	SMALL FIXED INDUCTOR(10UH)	
C528			CE04NW1C100M	ELECTRO 10UF 16WV		L200			L40-1001-78	SMALL FIXED INDUCTOR(10UH)	E1
C529			CK73GB1A224K	CHIP C 0.22UF K		L201			L40-5695-34	SMALL FIXED INDUCTOR(5.6UH)	E1
C530,531			CK73GB1H222K	CHIP C 2200PF K		L202			L40-1001-78	SMALL FIXED INDUCTOR(10UH)	
C532			CE04NW1C100M	ELECTRO 10UF 16WV		L300			L30-0756-05	TV IFT	
C700			CK73GB1H103K	CHIP C 0.010UF K		L301			L40-1001-78	SMALL FIXED INDUCTOR(10UH)	
C701			C90-2843-05	ELECTRO 2200UF 16WV		L302			L40-1005-34	SMALL FIXED INDUCTOR	E1
C702-704			CK73GB1H103K	CHIP C 0.010UF K		L303			L30-0745-05	TV IFT	K
C705			CE04NW1H2R2M	ELECTRO 2.2UF 50WV		L303			L30-0749-05	TV IFT	M1E1
C706			CE04NW1C330M	ELECTRO 33UF 16WV		L304			L40-1005-34	SMALL FIXED INDUCTOR	KM1
C707,708			CK73GB1C104K	CHIP C 0.10UF K		L400			L40-1005-34	SMALL FIXED INDUCTOR	
C709			C90-2654-05	ELECTRO 220UF 16WV	E1	L701			L33-1152-05	CHOKE COIL	
C710,711			CE04NW1C470M	ELECTRO 47UF 16WV		X201			L77-2096-05	CRYSTAL RESONATOR(4.43MHZ)	E1
C712			CK73GB1H103K	CHIP C 0.010UF K		X300			L77-2100-05	CRYSTAL RESONATOR(21.80MHZ)	M1
C713			C90-2673-05	ELECTRO 220UF 10WV	E1	X300			L77-2720-05	CRYSTAL RESONATOR(22.70MHZ)	E1
C714,715			CE04NW0J101M	ELECTRO 100UF 6.3WV		X301			L77-2099-05	CRYSTAL RESONATOR(21.30MHZ)	M1
C716,717			CK73GB1H103K	CHIP C 0.010UF K		X301			L77-2721-05	CRYSTAL RESONATOR(22.20MHZ)	E1
C718			CE04NW1H4R7M	ELECTRO 4.7UF 50WV		X302			L77-2098-05	CRYSTAL RESONATOR(20.80MHZ)	M1
C719			CK73FB1A105K	CHIP C 1.0UF K		X302			L77-2722-05	CRYSTAL RESONATOR(21.70MHZ)	E1
C720			CE04NW1H4R7M	ELECTRO 4.7UF 50WV		X303			L77-2084-05	CRYSTAL RESONATOR(30.55MHZ)	K
C721			CK73GB1H103K	CHIP C 0.010UF K		X800			L78-0829-05	RESONATOR (12.288MHZ)	
C722			C90-2673-05	ELECTRO 220UF 10WV		B	2B		N30-3006-46	PAN HEAD MACHINE SCREW	
C723			CK73GB1H103K	CHIP C 0.010UF K	E1	R100			RK73GB2A103J	CHIP R 10K J 1/10W	E1
C800			CK73GB1C104K	CHIP C 0.10UF K		R101			RK73GB2A332J	CHIP R 3.3K J 1/10W	
C801			CE04DWOJ331M	ELECTRO 330UF 6.3WV		R102	*		RK73GB2A681J	CHIP R 680 J 1/10W	E1
C802			CK73GB1C104K	CHIP C 0.10UF K							
C803			CK73GB1A224K	CHIP C 0.22UF K							
C804			CK73GB1C104K	CHIP C 0.10UF K	KM1						

E1 : KTC-V500E

K : KTC-V500N

M1 : KTC-V500P

E : Europe

K : North America

M : Other Areas

△ indicates safety critical components.

KTC-V500E/N/P

PARTS LIST

* New Parts

Parts without **Part No.** are not supplied.

Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

(X25-928x-xx)

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation	Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
R103			RK73GB2A470J	CHIP R 47 J 1/10W	E1	R311			RK73GB2A103J	CHIP R 10K J 1/10W	
R104			RK73GB2A103J	CHIP R 10K J 1/10W	E1	R312			RK73GB2A272J	CHIP R 2.7K J 1/10W	
R105			RK73GB2A123J	CHIP R 12K J 1/10W	E1	R313			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R106			RK73GB2A222J	CHIP R 2.2K J 1/10W	E1	R314	*		RK73GB2A152J	CHIP R 1.5K J 1/10W	
R107,108			RK73GB2A101J	CHIP R 100 J 1/10W	E1	R319			RK73GB2A473J	CHIP R 47K J 1/10W	
R109			RK73GB2A682J	CHIP R 6.8K J 1/10W	E1	R320			RK73GB2A333J	CHIP R 33K J 1/10W	
R110			RK73GB2A222J	CHIP R 2.2K J 1/10W	E1	R321			RK73GB2A473J	CHIP R 47K J 1/10W	E1
R112			RK73GB2A151J	CHIP R 150 J 1/10W	E1	R322			RK73GB2A471J	CHIP R 470 J 1/10W	E1
R113			RK73GB2A470J	CHIP R 47 J 1/10W	E1	R323,324	*		RK73GB2A331J	CHIP R 330 J 1/10W	
R115			RK73GB2A471J	CHIP R 470 J 1/10W		R325			RK73GB2A472J	CHIP R 4.7K J 1/10W	E1
R116			RK73GB2A151J	CHIP R 150 J 1/10W		R326-328			RK73GB2A103J	CHIP R 10K J 1/10W	E1
R117			RK73GB2A123J	CHIP R 12K J 1/10W		R329			RK73GB2A392J	CHIP R 3.9K J 1/10W	E1
R118			RK73GB2A222J	CHIP R 2.2K J 1/10W		R330			RK73GB2A822J	CHIP R 8.2K J 1/10W	E1
R119		*	RK73GB2A681J	CHIP R 680 J 1/10W		R331			RK73GB2A272J	CHIP R 2.7K J 1/10W	
R120			RK73GB2A470J	CHIP R 47 J 1/10W		R332			RK73GB2A471J	CHIP R 470 J 1/10W	E1
R121			RK73GB2A222J	CHIP R 2.2K J 1/10W	M1	R333			RK73GB2A332J	CHIP R 3.3K J 1/10W	KM1
R200,201			RK73GB2A471J	CHIP R 470 J 1/10W	E1	R334	*		RK73GB2A182J	CHIP R 1.8K J 1/10W	KM1
R202			RK73GB2A104J	CHIP R 100K J 1/10W	E1	R335			RK73GB2A223J	CHIP R 22K J 1/10W	KM1
R203			RK73GB2A153J	CHIP R 15K J 1/10W	E1	R336			RK73GB2A103J	CHIP R 10K J 1/10W	KM1
R204		*	RK73GB2A273J	CHIP R 27K J 1/10W	E1	R337	*		RK73GB2A181J	CHIP R 180 J 1/10W	KM1
R205			RK73GB2A103J	CHIP R 10K J 1/10W	E1	R338,339	*		RK73GB2A331J	CHIP R 330 J 1/10W	KM1
R206			RK73GB2A472J	CHIP R 4.7K J 1/10W	E1	R340			RK73GB2A102J	CHIP R 1.0K J 1/10W	KM1
R207			RK73GB2A470J	CHIP R 47 J 1/10W	E1	R341	*		RK73GB2A152J	CHIP R 1.5K J 1/10W	KM1
R208			RK73GB2A104J	CHIP R 100K J 1/10W	E1	R342			RK73GB2A682J	CHIP R 6.8K J 1/10W	KM1
R209			RK73GB2A223J	CHIP R 22K J 1/10W	E1	R343	*		RK73GB2A331J	CHIP R 330 J 1/10W	M1
R210,211			RK73GB2A103J	CHIP R 10K J 1/10W	E1	R343	*		RK73GB2A561J	CHIP R 560 J 1/10W	K
R212			RK73GB2A393J	CHIP R 39K J 1/10W	E1	R344			RK73GB2A104J	CHIP R 100K J 1/10W	KM1
R213			RK73GB2A103J	CHIP R 10K J 1/10W	E1	R345,346			RK73GB2A103J	CHIP R 10K J 1/10W	KM1
R214		*	RK73GB2A273J	CHIP R 27K J 1/10W	E1	R347			RK73GB2A472J	CHIP R 4.7K J 1/10W	KM1
R215			RK73GB2A393J	CHIP R 39K J 1/10W	E1	R349			RK73GB2A153J	CHIP R 15K J 1/10W	K
R216			RK73GB2A103J	CHIP R 10K J 1/10W	E1	R349	*		RK73GB2A683J	CHIP R 68K J 1/10W	M1E1
R217		*	RK73GB2A391J	CHIP R 390 J 1/10W	E1	R350			RK73GB2A124J	CHIP R 120K J 1/10W	K
R218			RK73GB2A223J	CHIP R 22K J 1/10W	E1	R350			RK73GB2A823J	CHIP R 82K J 1/10W	M1
R219,220			RK73GB2A101J	CHIP R 100 J 1/10W	E1	R350			RK73GB2A913J	CHIP R 91K J 1/10W	E1
R221-223			RK73GB2A102J	CHIP R 1.0K J 1/10W	E1	R400			RK73GB2A101J	CHIP R 100 J 1/10W	
R224,225			RK73GB2A471J	CHIP R 470 J 1/10W	E1	R401			RK73GB2A333J	CHIP R 33K J 1/10W	
R226		*	RK73GB2A391J	CHIP R 390 J 1/10W	E1	R402			RK73GB2A223J	CHIP R 22K J 1/10W	
R227			RK73GB2A470J	CHIP R 47 J 1/10W	E1	R403			RK73GB2A473J	CHIP R 47K J 1/10W	
R228,229			RK73GB2A471J	CHIP R 470 J 1/10W	E1	R404			RK73GB2A822J	CHIP R 8.2K J 1/10W	
R230		*	RK73GB2A391J	CHIP R 390 J 1/10W	E1	R405			RK73GB2A472J	CHIP R 4.7K J 1/10W	M1E1
R231-234			RK73GB2A102J	CHIP R 1.0K J 1/10W	E1	R406-409			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R235-238		*	RK73EB2E750J	CHIP R 75 J 1/4W	E1	R410-413			RK73GB2A101J	CHIP R 100 J 1/10W	
R238		*	RK73EB2E750J	CHIP R 75 J 1/4W	KM1	R509,510			RK73GB2A473J	CHIP R 47K J 1/10W	
R239		*	RK73GB2A152J	CHIP R 1.5K J 1/10W	E1	R511			RK73GB2A103J	CHIP R 10K J 1/10W	
R240			RK73GB2A471J	CHIP R 470 J 1/10W	E1	R512			RK73GB2A473J	CHIP R 47K J 1/10W	
R300-302			RK73GB2A222J	CHIP R 2.2K J 1/10W	M1E1	R514	*		RK73GB2A273J	CHIP R 27K J 1/10W	
R303		*	RK73GB2A273J	CHIP R 27K J 1/10W	E1	R515			RK73GB2A123J	CHIP R 12K J 1/10W	
R304-306			RK73GB2A104J	CHIP R 100K J 1/10W	M1E1	R516			RK73GB2A682J	CHIP R 6.8K J 1/10W	
R307			RK73GB2A103J	CHIP R 10K J 1/10W	M1E1	R517			RK73GB2A361J	CHIP R 360 J 1/10W	
R308			RK73GB2A433J	CHIP R 43K J 1/10W	E1	R518			RK73GB2A473J	CHIP R 47K J 1/10W	
R308			RK73GB2A473J	CHIP R 47K J 1/10W	M1	R519,520			RK73GB2A101J	CHIP R 100 J 1/10W	
R308			RK73GB2A563J	CHIP R 56K J 1/10W	K	R521,522			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R309			RK73GB2A393J	CHIP R 39K J 1/10W	KM1	R523			RK73GB2A473J	CHIP R 47K J 1/10W	
R309		*	RK73GB2A683J	CHIP R 68K J 1/10W	E1	R700			RK73GB2A153J	CHIP R 15K J 1/10W	
R310			RK73GB2A682J	CHIP R 6.8K J 1/10W		R701			R92-3209-05	SMALL-RD 680 J 1/2W	

E1 : KTC-V500E

K : KTC-V500N

M1 : KTC-V500P

E : Europe K : North America M : Other Areas

⚠ indicates safety critical components.

PARTS LIST

* New Parts

Parts without **Part No.** are not supplied.

Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

(X25-928x-xx)

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation	Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
R702			RK73EB2E221J	CHIP R 220 J 1/4W	E1	IC300			AN5186FB	ANALOGUE IC	
R703			RK73FB2B102J	CHIP R 1.0K J 1/8W		IC301			TA9830T	ANALOGUE IC	E1
R704,705		*	RK73FB2B182J	CHIP R 1.8K J 1/8W		IC400			BA7652AF	ANALOGUE IC	E1
R706			RK73GB2A103J	CHIP R 10K J 1/10W		IC401			CM0018AM	MOS-IC	
R707,708			RK73GB2A223J	CHIP R 22K J 1/10W		IC502			NJM4565M-TE2	ANALOGUE IC	
R709			RK73GH1J243D	CHIP R 24K D 1/16W		IC504		TA2005SN	ANALOGUE IC		
R710			RK73GH1J153D	CHIP R 15K D 1/16W		IC700		TA78DS05F	ANALOGUE IC		
R711			RK73GH1J432D	CHIP R 4.3K D 1/16W		IC701		BA6161F	ANALOGUE IC		
R712			RK73GB2A104J	CHIP R 100K J 1/10W		IC702		M5237ML	IC(VOLTAGE REGULATOR)		
R713		*	RK73GB2A122J	CHIP R 1.2K J 1/10W		IC800		UPD784214GC077	MI-COM IC	KM1	
R801			RK73GB2A104J	CHIP R 100K J 1/10W		IC800	*	784214AGC-136	MI-COM IC	E1	
R802,803			RK73GB2A101J	CHIP R 100 J 1/10W		IC801		PST9130NR	ANALOGUE IC		
R804			RK73GB2A103J	CHIP R 10K J 1/10W		Q100		DTC143TUA	DIGITAL TRANSISTOR	E1	
R807,808			RK73GB2A104J	CHIP R 100K J 1/10W		Q101		2SC2714(Y)	TRANSISTOR	E1	
R809			RK73GB2A473J	CHIP R 47K J 1/10W		Q102		DTC124EUA	DIGITAL TRANSISTOR	E1	
R810,811			RK73EB2E101J	CHIP R 100 J 1/4W		Q103		2SC2714(Y)	TRANSISTOR		
R812,813			RK73EB2E102J	CHIP R 1.0K J 1/4W		Q200-204		2SC4081	TRANSISTOR	E1	
R814			RK73EB2E101J	CHIP R 100 J 1/4W		Q205-207		DTC144EUA	DIGITAL TRANSISTOR	E1	
R815			RK73EB2E102J	CHIP R 1.0K J 1/4W		Q208-210		2SC4081	TRANSISTOR	E1	
R816-818			RK73GB2A101J	CHIP R 100 J 1/10W		Q211,212		2SA1576A	TRANSISTOR	E1	
R819			RK73GB2A102J	CHIP R 1.0K J 1/10W	KM1	Q300-302		DTC124EUA	DIGITAL TRANSISTOR	M1E1	
R820-824			RK73GB2A104J	CHIP R 100K J 1/10W	E1	Q303		2SC4081	TRANSISTOR	KM1	
R822-824			RK73GB2A104J	CHIP R 100K J 1/10W	KM1	Q303,304		2SC4081	TRANSISTOR	E1	
R825,826			RK73GB2A223J	CHIP R 22K J 1/10W		Q305		DTC124EUA	DIGITAL TRANSISTOR	E1	
R827			RK73GB2A104J	CHIP R 100K J 1/10W		Q306		2SA1576A	TRANSISTOR	KM1	
R828-830			RK73GB2A102J	CHIP R 1.0K J 1/10W	KM1	Q307,308		2SC4081	TRANSISTOR	KM1	
R831			RK73GB2A562J	CHIP R 5.6K J 1/10W		Q309		DTC143EUA	DIGITAL TRANSISTOR		
R832			RK73EB2E101J	CHIP R 100 J 1/4W		Q400		DTA114EUA	DIGITAL TRANSISTOR	E1	
R833			RK73GB2A562J	CHIP R 5.6K J 1/10W		Q401		DTC124EUA	DIGITAL TRANSISTOR		
R834,835			RK73GB2A104J	CHIP R 100K J 1/10W	M1	Q500		DTC323TU	DIGITAL TRANSISTOR		
R835			RK73GB2A104J	CHIP R 100K J 1/10W	E1	Q501		DTA114EUA	DIGITAL TRANSISTOR		
R835,836			RK73GB2A104J	CHIP R 100K J 1/10W	K	Q700		DTC114YUA	DIGITAL TRANSISTOR		
VR300			R32-0246-05	SEMI FIXED VARIABLE RESISTOR	KM1	Q701		2SB1443	TRANSISTOR		
VR301			R32-0234-05	SEMI FIXED VARIABLE RESISTOR	KM1	Q702		2SB1565F	TRANSISTOR		
VR400			R32-0234-05	SEMI FIXED VARIABLE RESISTOR		Q703		2SD2396F40	TRANSISTOR	E1	
W100-102			R92-1252-05	CHIP R 0 OHM J 1/16W	KM1	Q704,705		2SD1760	TRANSISTOR		
W300			R92-1252-05	CHIP R 0 OHM J 1/16W	M1	Q706		2SC4081	TRANSISTOR		
W300-302			R92-1252-05	CHIP R 0 OHM J 1/16W	K	Q800		DTC124EUA	DIGITAL TRANSISTOR		
W302			R92-1252-05	CHIP R 0 OHM J 1/16W	M1						
W400			R92-1252-05	CHIP R 0 OHM J 1/16W	KM1	A100	*	W02-3127-25	TUNER ASSY	K	
D100			DAN235U	DIODE	E1	A100		W02-3157-15	TUNER ASSY	M1	
D101-104			RN739F	DIODE		A100		W02-3191-15	TUNER ASSY	E1	
D201			DA204U	DIODE	E1						
D300,301			DAP236U	DIODE	M1E1						
D302			DA204U	DIODE							
D303			DAN235U	DIODE	E1						
D700			DAN202U	DIODE							
D702			MA8068-M	ZENER DIODE							
D705			MA8091-L	ZENER DIODE	E1						
D706,707			MA8056-M	ZENER DIODE							
D708			1SS250	DIODE							
D709,710			MA3056WA	ZENER DIODE							
IC200			TDA8842H	ANALOGUE IC	E1						
IC202,203			NJM2267V	ANALOGUE IC	E1						
IC203			NJM2267V	ANALOGUE IC	KM1						

E1 : KTC-V500E

K : KTC-V500N

M1 : KTC-V500P

E : Europe K : North America M : Other Areas

△ indicates safety critical components.