


EXPLODED VIEW (UNIT)

Block No.M1MM

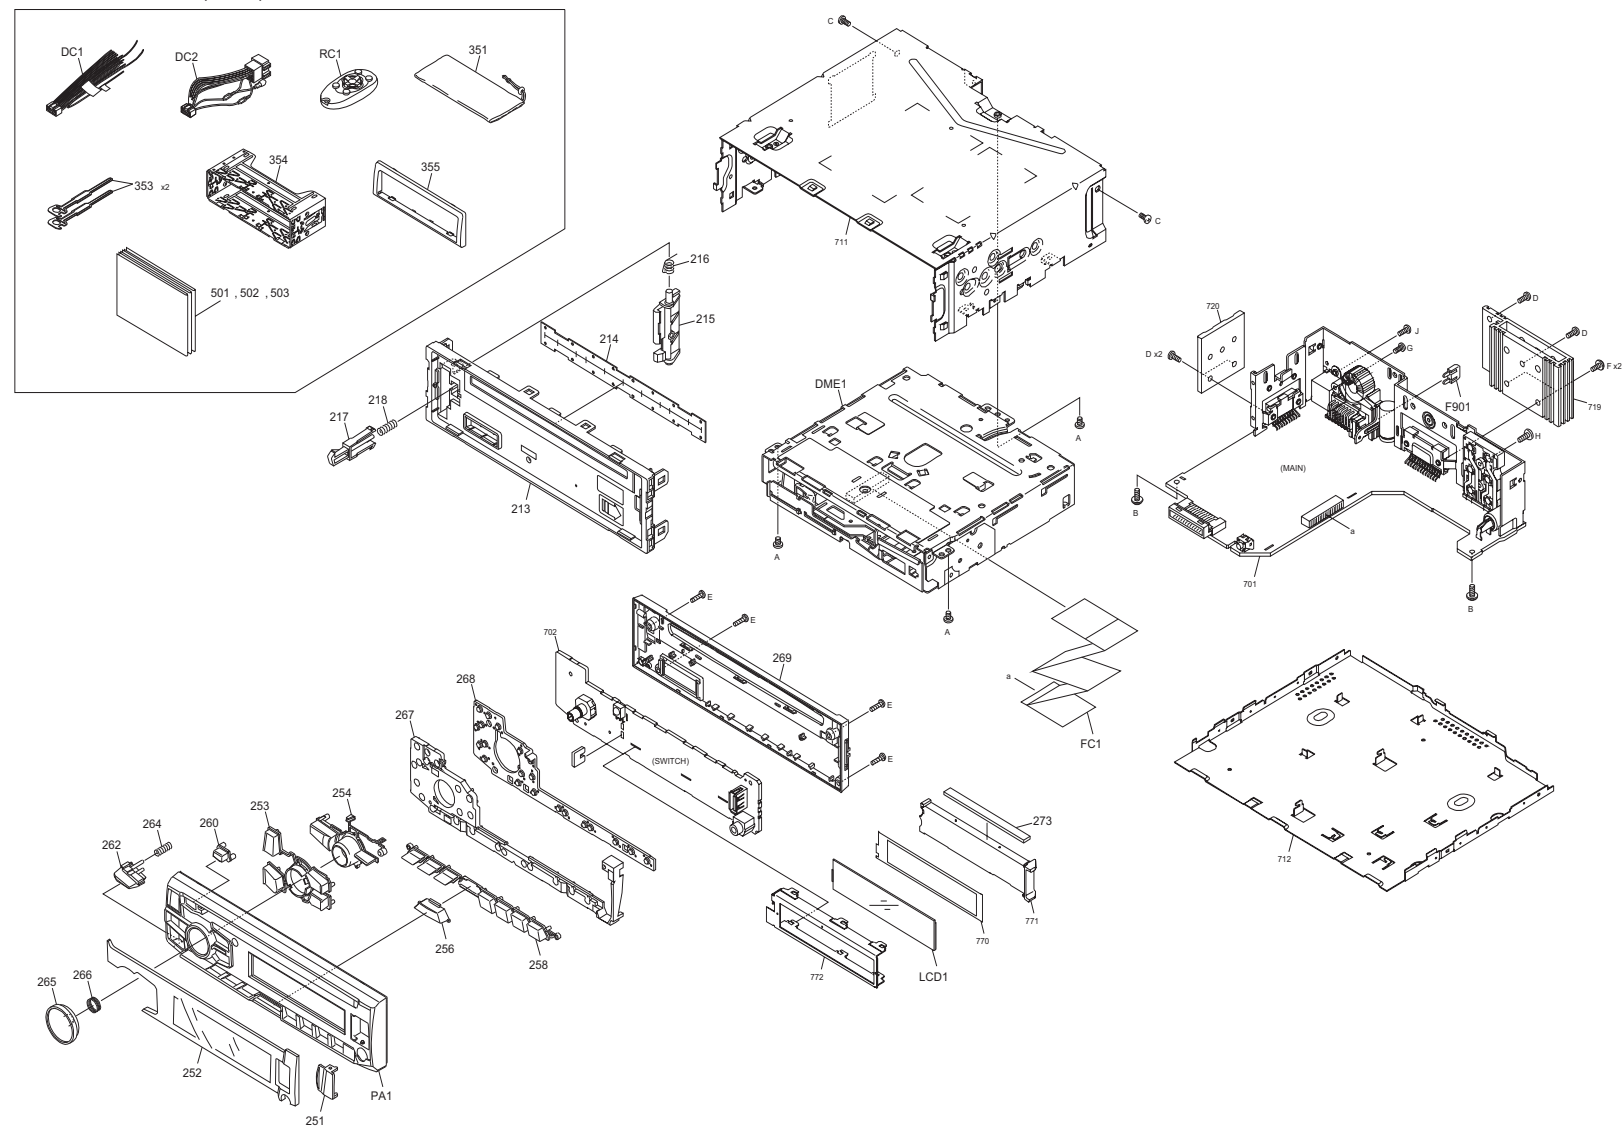

No.MA607

Parts with the exploded numbers larger than 700 are not supplied.

created date:2014-11-20

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-AR565J	A	KD-R561E	B	KD-R561EN	C	KD-R561EY	D
KD-R561EU	E	KD-R561U	F	KD-R567EE	G	KD-R760J	H
KD-AR765SJ	I	KD-R761E	J	KD-R761EN	K	KD-R761EY	L

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
------	------------	-----------	------------	-------------	-----	-------

EXPLODED VIEW (UNIT) <M1MM>


△	DC1	QAM1329-001	DC CORD		1	A,E,F,H,I
△	DC2	QAM1345-003	DC CORD		1	B,C,D,G,J,K,L
	DME1	FC2-2A00NXN	CD MECHANISM		1	
△	F901	FZB10BT-100	BLADE FUSE		1	
	FC1	WJT0335-001A-E	E-CARD WIRE		1	
	LCD1	B3H-0009-00	LCD		1	
	PA1	A6D-0020-02	PANEL		1	A,B,C,D,E,F,G,I,J,K,L
	PA1	A6D-0020-00	PANEL		1	L
	RC1	RM-RK52M	REMOTE CONTROL UNI		1	H
			T			A,F,H,I
	A	QYSDST2604ZA	TAP SCREW	M2.6 x 4mm	3	
	B	GE40377-002A	SPECIAL SCREW		2	
	C	QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	2	
	D	QYSDST2610ZA	TAP SCREW	M2.6 x 10mm	4	
	E	QYSDSF2008ZA	TAP SCREW	M2 x 8mm	4	
	F	GE40377-005A	SPECIAL SCREW		2	
	G	QYSDSG3006ZA	TAP SCREW	M3 x 6mm	1	
	H	QYSDSF2608ZA	TAP SCREW	M2.6 x 8mm	1	
	J	QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	1	I
	213	A2C-0003-00	SUB PANEL		1	A,B,C,D,G,H,I,J,K,L
	213	A2C-0003-01	SUB PANEL		1	E,F
	214	GE40630-003A	BLIND		1	
	215	GE35609-001A	LOCK LEVER		1	
	216	GE40514-004A	TORSION SPRING		1	
	217	GE35611-001A	RELEASE LEVER		1	
	218	GE30999-014A	COMP.SPRING		1	
	251	F0G-0011-00	COVER		1	
	252	B1A-0013-0A	FRONT GLASS		1	A
	252	B1A-0013-0C	FRONT GLASS		1	B,C,D
	252	B1A-0013-0D	FRONT GLASS		1	E,F
	252	B1A-0013-0E	FRONT GLASS		1	G
	252	B1A-0013-0K	FRONT GLASS		1	H
	252	B1A-0013-0L	FRONT GLASS		1	I
	252	B1A-0013-0P	FRONT GLASS		1	J,K,L
	253	K2F-0012-00	PUSH KNOB		1	
	254	K2F-0014-00	PUSH KNOB		1	A,B,C,D,E,F,G
	254	K2F-0014-01	PUSH KNOB		1	H,I,J,K,L
	256	K2E-0008-00	PUSH KNOB		1	
	258	K2F-0015-00	PUSH KNOB		1	
	260	K2E-0007-00	PUSH KNOB		1	
	262	K2E-0009-00	PUSH KNOB		1	
	264	GE30999-012A	COMP.SPRING		1	
	265	K2K-0102-04	KNOB		1	A,I
	265	K2K-0102-02	KNOB		1	B,C,D,E,F,G,J,K,L
	265	K2K-0102-00	KNOB		1	H
	266	GE40127-006A	KNOB SPRING		1	
	267	B1K-0017-10	LIGHTING BOARD		1	
	268	E2K-0011-00	CONDUCT RUBBER		1	
	269	A4G-0009-00	REAR COVER		1	
	273	E2K-0013-00	CONDUCT RUBBER		1	
	351	GE40521-001A	CARRYING CASE		1	E,F,G
	353	GE40685-001A	HOOK		2	
	354	GE20362-002A	MOUNTING SLEEVE		1	
	355	GE20368-001A	TRIM PLATE		1	
	501	B5A-0105-00	INST.MANUAL	ENG FRE SPA	1	A,H,I
	501	B5A-0107-00	INST.MANUAL	ENG FRE	1	B,C,J,K
	501	B5A-0107-05	INST.MANUAL	RUS UKR	1	D,G,L
	501	B5A-0107-06	INST.MANUAL	ENG FRE RUS PER TUR ARA	1	E
	501	B5A-0106-00	INST.MANUAL	ENG	1	F
	502	B5A-0107-01	INST.MANUAL	SPA ITA POR DUT GRE	1	B,J
	502	B5A-0107-03	INST.MANUAL	DAN SWE FIN	1	C,K
	502	B5A-0107-04	INST.MANUAL	POL HUN CZE ROM BUL	1	D,L
	502	B5A-0106-01	INST.MANUAL	RUS PER THA ARA	1	F
	503	B5A-0107-02	INST.MANUAL	GER	1	B,C,D,J,K,L
	503	B5A-0106-02	INST.MANUAL	CHI(TAIWAN)	1	F

EXPLODED VIEW (CD MECHANISM: FC2-2A00NXN)

Block No.MBMM

Grease

- ★ JVS-1003
- W01-2067-08

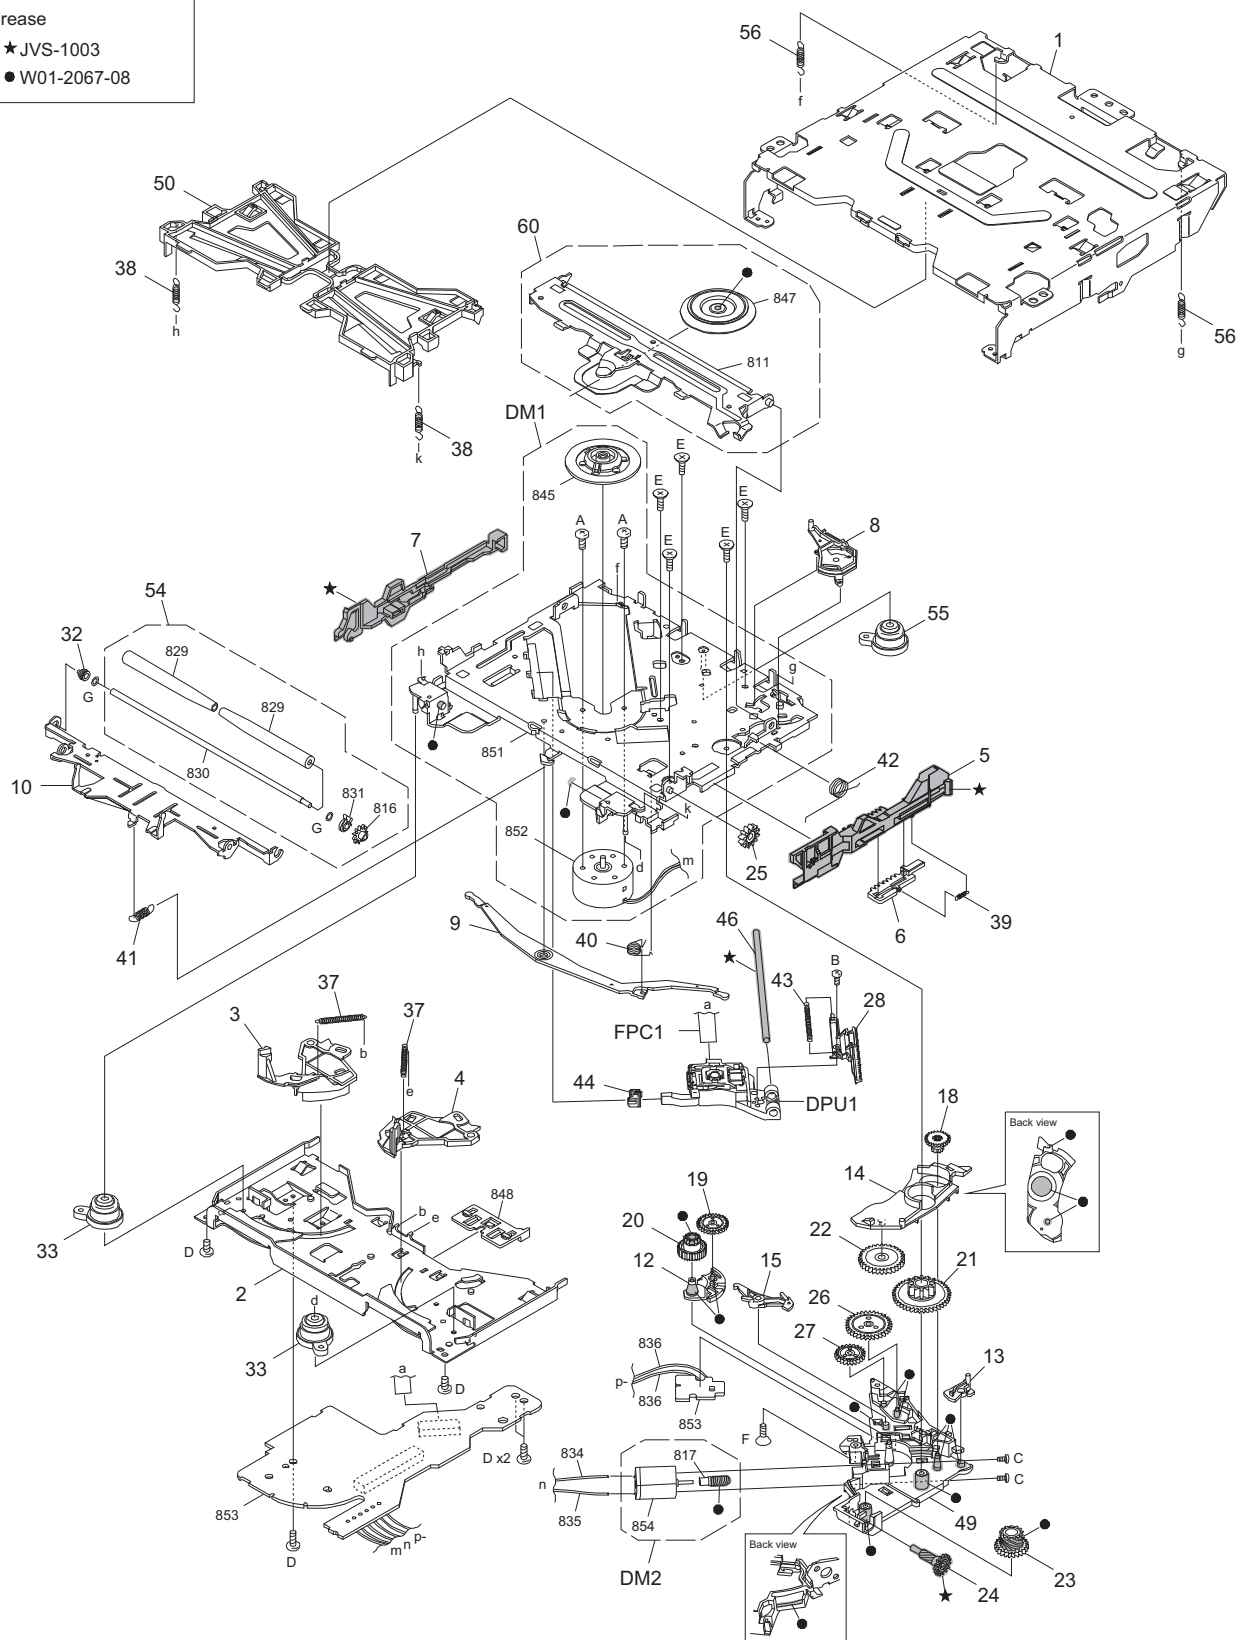

Parts with the exploded numbers larger than 800 are not supplied.

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-AR565J	A	KD-R561E	B	KD-R561EN	C	KD-R561EY	D
KD-R561EU	E	KD-R561U	F	KD-R567EE	G	KD-R760J	H
KD-AR765SJ	I	KD-R761E	J	KD-R761EN	K	KD-R761EY	L

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
------	------------	-----------	------------	-------------	-----	-------

EXPLODED VIEW (CD MECHANISM: FC2-2A00NXN) <MBMM>

	DM1	CM-FC2-MD	MD CHASSIS ASSY		1	
	DM2	CM-FC2-M	LOADING MOTOR ASSY		1	
△	DPU1	QAL1521-001	PICK UP		1	
	FPC1	QAL1465-001	FPC		1	
	A	LV45568-001A	MINI SCREW		2	
	B	QYSPSGT1745ZA	TAP SCREW	M1.7 x 4.5mm	1	
	C	QYSPSPT2025MA	SCREW	M2 x 2.5mm	2	
	D	VKZ4539-054	MINI SCREW		5	
	E	LV45818-001A	G.HOLDER SCREW		5	
	F	LV45815-001A	M. SHAFT SCREW		1	
	G	LV45816-001A	ROLLER WASHER		2	
	1	LV11877-003A	OUTER CHASSIS		1	
	2	LV11878-002A	LOWER CHASSIS		1	
	3	LV3A174-001A	DISC ARM L		1	
	4	LV3A175-001A	DISC ARM R		1	
	5	LV23057-001A	SLIDER R		1	
	6	LV3A178-001A	TRIGGER SLIDER		1	
	7	LV23058-001A	SLIDER L		1	
	8	LV3A179-002A	TRIGGER ARM		1	
	9	LV3A173-001A	JOINT LEVER		1	
	10	LV23055-002A	ROLLER LEVER		1	
	12	LV3A181-001A	TRANSFER ARM		1	
	13	LV45797-002A	SL LOCK CAM		1	
	14	LV3A182-003A	SL LOCK ARM		1	
	15	LV3A183-001A	PICK LOCK ARM		1	
	18	LV3A187-002A	HELICAL GEAR 1		1	
	19	LV3A188-001A	TRANSFER GEAR		1	
	20	LV3A189-001A	LOAD GEAR H		1	
	21	LV3A190-001A	DRIVE GEAR		1	
	22	LV3A191-001A	JOINT GEAR		1	
	23	LV3A192-001A	WORM GEAR 2		1	
	24	LV3A193-001A	HELICAL GEAR 2		1	
	25	LV3A194-001A	LOAD GEAR V		1	
	26	LV3A195-001A	PICK GEAR 1		1	
	27	LV3A196-001A	PICK GEAR 2		1	
	28	LV3A197-001A	RACK GEAR		1	
	32	LV45796-001A	R.RETAINER L		1	
	33	D39-0403-05	DAMPER		2	
	37	LV45808-001A	DISC ARM SPRING		2	
	38	LV45809-001A	FLOAT SPRING(F)		2	
	39	LV45810-001A	TRIGGER SPRING		1	
	40	LV45811-001A	LOAD SPRING		1	
	41	LV45812-001A	ROLLER SPRING		1	
	42	LV45813-001A	CLAMP SPRING		1	
	43	LV45814-001A	PICK SPRING		1	
	44	LV36813-201A	SUB GUIDE CAP		1	
	46	LV44555-001A	MAIN SHAFT		1	
	49	LV11881-002A	GEAR HOLDER		1	
	50	LV11880-003A	DISC GUIDE		1	
	54	CM-FC2-R	ROLLER ASSY		1	
	55	D39-0404-05	DAMPER		1	
	56	LV45835-001A	FLOAT SPRING(R)		2	
	60	LV3A271-001A	CL BASE ASSY		1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-AR565J	A	KD-R561E	B	KD-R561EN	C	KD-R561EY	D
KD-R561EU	E	KD-R561U	F	KD-R567EE	G	KD-R760J	H
KD-AR765SJ	I	KD-R761E	J	KD-R761EN	K	KD-R761EY	L

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
------	------------	-----------	------------	-------------	-----	-------

MAIN PWB ASSY (XJ1-033x-xx) <01>

	IC161	TDA7718C	ANALOG IC		1	
△	IC301	JCV8034	IC		1	
	IC411	MFI337S3959-X	IC		1	H,I,J,K,L
△	IC540	MN6627553APA	IC		1	
△	IC601	TEF6657HN-X	IC		1	
△	IC701	R5S726A0D216FP	IC		1	
△	IC821	W3F-0003-00	IC		1	
	IC831	BU4228F-W	IC		1	
	IC841	BR24T02FJ-W-X	IC		1	
	IC851	BU1CTD3WG-W	IC		1	
	IC861	MP9942GJ	ANALOG IC		1	
	IC891	NCP380HSNAJAA-X	IC		1	
△	IC901	LV5685PV-H	ANALOG IC		1	
	IC941	BU33TD3WG-W	IC		1	
	Q250	LTC043TEB-X	DIGI TRANSISTOR		1	A,B,C,D,E,F,G,H,J,K,L
	Q260	LTC043TEB-X	DIGI TRANSISTOR		1	
	Q270	LTA024EEB-X	DIGI TRANSISTOR		1	
	Q271	LSAR523UBFS8	TRANSISTOR		1	
	Q272	LTC024EEB-X	DIGI TRANSISTOR		1	
	Q273	LTA024EEB-X	DIGI TRANSISTOR		1	
	Q320	LTC043TEB-X	DIGI TRANSISTOR		1	H,I,J,K,L
	Q330	LTC043TEB-X	DIGI TRANSISTOR		1	H,I,J,K,L
	Q340	LTC043TEB-X	DIGI TRANSISTOR		1	I
	Q350	LTC043TEB-X	DIGI TRANSISTOR		1	I
	Q360	LSCR523UBFS8	TRANSISTOR		1	
	Q470	LTC014EEB-X	DIGI TRANSISTOR		1	I
	Q471	LTC043TEB-X	DIGI TRANSISTOR		1	I
	Q540	2SA2188/E/-X	TRANSISTOR		1	
	Q701	LTA014YEB-X	DIGI TRANSISTOR		1	
	D100	RSB6.8SM-X	BP Z DIODE		1	
	D101	RSB6.8SM-X	BP Z DIODE		1	
	D270	BAW56-TP-X	SI DIODE		1	
	D271	BAW56-TP-X	SI DIODE		1	
	D273	DA2J101	DIODE		1	
	D360	DZ2J068M	ZENER DIODE		1	
	D370	BAW56-TP-X	SI DIODE		1	
	D390	MBRX130	SCHOTTKY DIODE		1	
	D391	MBR0530-X	SB DIODE		1	
	D400	RB521SM-30-X	SB DIODE		1	
	D401	DZ2J051M	ZENER DIODE		1	
	D470	RSB6.8SM-X	BP Z DIODE		1	I
	D477	RSB6.8SM-X	BP Z DIODE		1	I
	D478	RSB6.8SM-X	BP Z DIODE		1	I
	D479	RSB6.8SM-X	BP Z DIODE		1	I
	D480	RSB6.8SM-X	BP Z DIODE		1	I
	D481	RSB6.8SM-X	BP Z DIODE		1	I
	D861	DB22306	SCHOTTKY DIODE		1	
	D902	SK34A-L-X	SB DIODE		1	
	D903	SK34A-L-X	SB DIODE		1	
△	D990	1N5401-BPC04	SI DIODE		1	
	C100	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C101	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C102	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C103	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C104	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C105	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C161	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C162	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C163	CD04AV1V4R7M	E CAPACITOR	4.7uF 35V M	1	
	C164	CD04AV1V4R7M	E CAPACITOR	4.7uF 35V M	1	
	C165	CD04AV1C100M	E CAPACITOR	10uF 16V M	1	
	C167	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C168	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C169	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C171	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C177	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C251	CK73EBB1C475K	C CAPACITOR	4.7uF 16V K	1	A,B,C,D,E,F,G,H,J,K,L
	C261	CK73EBB1C475K	C CAPACITOR	4.7uF 16V K	1	
	C303	CC73GCH1H820J	C CAPACITOR	82pF 50V J	1	
	C304	CD04AV1C470M	E CAPACITOR	47uF 16V M	1	
	C312	CK730AV1C105K	C CAPACITOR	1uF 16V K	1	
	C316	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	
	C317	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	
	C318	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	
	C319	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	
	C321	CK73EBB1C475K	C CAPACITOR	4.7uF 16V K	1	H,I,J,K,L
	C331	CK73EBB1C475K	C CAPACITOR	4.7uF 16V K	1	H,I,J,K,L
	C341	CK73EBB1C475K	C CAPACITOR	4.7uF 16V K	1	I
	C351	CK73EBB1C475K	C CAPACITOR	4.7uF 16V K	1	I
	C360	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C361	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	
	C368	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C369	CK73FBB0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C370	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C390	CK73FBB1H224K	C CAPACITOR	0.22uF 50V K	1	
	C391	CK73FBB1H224K	C CAPACITOR	0.22uF 50V K	1	
	C410	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	H,I,J,K,L
	C472	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	I

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-AR565J	A	KD-R561E	B	KD-R561EN	C	KD-R561EY	D
KD-R561EU	E	KD-R561U	F	KD-R567EE	G	KD-R760J	H
KD-AR765SJ	I	KD-R761E	J	KD-R761EN	K	KD-R761EY	L
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
	C473	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	I	
	C474	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	I	
	C475	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	I	
	C540	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C541	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C544	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1		
	C545	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1		
	C546	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1		
	C547	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1		
	C548	CK73FXR1C475K	C CAPACITOR	4.7uF 16V K	1		
	C549	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C550	CK73GBB1C154K	C CAPACITOR	0.15uF 16V K	1		
	C552	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1		
	C553	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C555	CK73GBB1H223K	C CAPACITOR	0.022uF 50V K	1		
	C556	CK73GBB1H332K	C CAPACITOR	3300pF 50V K	1		
	C557	CK73GBB1A334K	C CAPACITOR	0.33uF 10V K	1		
	C558	CK73FXR1A475K	C CAPACITOR	4.7uF 10V K	1		
	C559	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C560	CK73GBB1H681K	C CAPACITOR	680pF 50V K	1		
	C561	CK73EXR1A106K	C CAPACITOR	10uF 10V K	1		
	C562	CK73GBB1H153K	C CAPACITOR	0.015uF 50V K	1		
	C563	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C564	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1		
	C565	CK73GBB1E823K	C CAPACITOR	0.082uF 25V K	1		
	C567	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1		
	C568	CK73GBB1A334K	C CAPACITOR	0.33uF 10V K	1		
	C570	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C571	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C572	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1		
	C573	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C576	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C577	CC73GCH1H100D	C CAPACITOR	10pF 50V D	1		
	C578	CC73GCH1H120J	C CAPACITOR	12pF 50V J	1		
	C579	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C583	CK73GBB1H821K	C CAPACITOR	820pF 50V K	1		
	C584	CK73GBB1H821K	C CAPACITOR	820pF 50V K	1		
	C588	CK73GBB1H681K	C CAPACITOR	680pF 50V K	1		
	C589	CK73GBB1H681K	C CAPACITOR	680pF 50V K	1		
	C600	RK73FB2B151J	MG RESISTOR	150Ω 1/8W J	1		
	C601	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1		
	C602	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1		
	C603	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C604	CK73GBB1H152K	C CAPACITOR	1500pF 50V K	1		
	C605	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1		
	C606	CC73GCH1H090D	C CAPACITOR	9pF 50V D	1		
△	C607	CC73GCH1H010C	C CAPACITOR	1pF 50V C	1		
	C608	CC73GCH1H102J	C CAPACITOR	1000pF 50V J	1		
	C609	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C610	CC73GCH1H120J	C CAPACITOR	12pF 50V J	1		
△	C611	CC73GCH1H010C	C CAPACITOR	1pF 50V C	1		
	C612	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1		
	C614	CC73GCH1H220J	C CAPACITOR	22pF 50V J	1		
	C615	CC73GCH1H330J	C CAPACITOR	33pF 50V J	1		
	C616	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1		
	C617	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1		
	C618	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C619	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C624	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C700	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C701	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C702	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C703	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C704	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C705	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C706	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C707	CC73GCH1H090D	C CAPACITOR	9pF 50V D	1		
	C708	CC73GCH1H090D	C CAPACITOR	9pF 50V D	1		
	C709	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C710	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C711	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1		
	C712	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C713	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C716	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C717	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C718	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C722	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1		
	C723	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1		
	C724	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1		
	C820	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1		
	C830	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1		
	C831	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C832	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C840	CK73GBB1C473K	C CAPACITOR	0.047uF 16V K	1		
	C850	CK73GBB1C474K	C CAPACITOR	0.47uF 16V K	1		
	C851	CK73GBB1C474K	C CAPACITOR	0.47uF 16V K	1		
	C852	CD04AS0J101M	E CAPACITOR	100uF 6.3V M	1		
	C860	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C861	CK73EXR1A106K	C CAPACITOR	10uF 10V K	1		
	C862	CK73EXR1A106K	C CAPACITOR	10uF 10V K	1		
	C863	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1		
	C864	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-AR565J	A	KD-R561E	B	KD-R561EN	C	KD-R561EY	D
KD-R561EU	E	KD-R561U	F	KD-R567EE	G	KD-R760J	H
KD-AR765SJ	I	KD-R761E	J	KD-R761EN	K	KD-R761EY	L
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
	C866	CK73EXR1A106K	C CAPACITOR	10uF 10V K	1		
	C867	CK73EXR1A106K	C CAPACITOR	10uF 10V K	1		
	C868	QE20850-157Z	E CAPACITOR	150uF	1		
	C869	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1		
	C870	CC73GCH1H150J	C CAPACITOR	15pF 50V J	1		
	C891	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C892	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C903	CD04AS1C220M	E CAPACITOR	22uF 16V M	1		
	C904	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1		
	C905	CD04AR1C471M	E CAPACITOR	470uF 16V M	1		
	C906	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1		
	C907	CD04AS0J101M	E CAPACITOR	100uF 6.3V M	1		
	C908	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1		
	C909	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C911	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C912	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1		
	C914	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1		
	C916	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1		
	C940	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1		
	C941	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1		
	C942	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1		
	C990	QE20981-228	E CAPACITOR	2200uF	1		
	C1000	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1		
	C1010	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	F	
	C1011	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	F	
	C1012	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	F	
	C1013	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	F	
	C1014	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	F	
	C1015	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	F	
	C1016	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	F	
	C1017	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	F	
	C1022	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1		
	C1023	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1		
	C1028	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1		
	C1033	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1		
	C1034	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1		
	C1035	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1		
	C1090	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1		
	C1320	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C1600	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C1601	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C1602	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C1603	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C1604	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C1605	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C1900	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1		
	C1901	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1		
	R100	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1		
	R103	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1		
	R104	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1		
	R161	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	I	
	R163	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	I	
	R167	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1		
	R168	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1		
	R169	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1		
	R170	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1		
	R171	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1		
	R250	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	A,B,C,D,E,F,G,H,J,K,L	
	R251	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	A,B,C,D,E,F,G,H,J,K,L	
	R252	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	A,B,C,D,E,F,G,H,J,K,L	
	R253	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	I	
	R260	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1		
	R261	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1		
	R262	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1		
	R270	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1		
	R271	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1		
	R273	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1		
	R302	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1		
	R303	RK73EB2E5R1J	MG RESISTOR	5.1Ω 1/4W J	1		
	R304	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1		
	R320	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	H,I,J,K,L	
	R321	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	H,I,J,K,L	
	R323	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	H,I,J,K,L	
	R330	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	H,I,J,K,L	
	R331	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	H,I,J,K,L	
	R333	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	H,I,J,K,L	
	R340	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	I	
	R341	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	I	
	R343	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	I	
	R350	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	I	
	R351	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	I	
	R353	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	I	
	R360	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1		
	R361	RK73GB2A333J	MG RESISTOR	33kΩ 1/10W J	1		
	R362	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1		
	R363	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1		
	R364	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1		
	R365	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1		

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-AR565J	A	KD-R561E	B	KD-R561EN	C	KD-R561EY	D
KD-R561EU	E	KD-R561U	F	KD-R567EE	G	KD-R760J	H
KD-AR765SJ	I	KD-R761E	J	KD-R761EN	K	KD-R761EY	L
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
	R370	RK73GB2A683J	MG RESISTOR	68kΩ 1/10W J	1		
	R371	RK73GB2A123J	MG RESISTOR	12kΩ 1/10W J	1		
	R372	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1		
	R381	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	F	
	R390	RK73EB2E472J	MG RESISTOR	4.7kΩ 1/4W J	1		
	R400	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1		
	R403	RK73GB2A303J	MG RESISTOR	30kΩ 1/10W J	1		
	R410	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	H,I,J,K,L	
	R411	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	H,I,J,K,L	
	R412	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	H,I,J,K,L	
	R413	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	H,I,J,K,L	
	R414	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	H,I,J,K,L	
	R421	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1		
	R470	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	I	
	R471	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	I	
	R472	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	I	
	R476	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	I	
	R482	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	I	
	R483	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	1	I	
	R541	RK73GB2A562J	MG RESISTOR	5.6kΩ 1/10W J	1		
	R542	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1		
	R543	RK73GB2A562J	MG RESISTOR	5.6kΩ 1/10W J	1		
	R544	RK73GB2A183J	MG RESISTOR	18kΩ 1/10W J	1		
	R546	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1		
	R548	RK73GB2A123J	MG RESISTOR	12kΩ 1/10W J	1		
	R550	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1		
	R551	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1		
	R554	RK73GB2A225J	MG RESISTOR	2.2MΩ 1/10W J	1		
	R556	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1		
	R557	RK73EB2E4R7J	MG RESISTOR	4.7Ω 1/4W J	1		
	R558	RK73GB2A821J	MG RESISTOR	820Ω 1/10W J	1		
	R559	RK73GB2A272J	MG RESISTOR	2.7kΩ 1/10W J	1		
	R562	RK73EB2E823J	MG RESISTOR	82kΩ 1/4W J	1		
	R567	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1		
	R569	RK73EB2E102J	MG RESISTOR	1kΩ 1/4W J	1		
	R570	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1		
	R571	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1		
	R572	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1		
	R573	RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	1		
	R579	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1		
	R580	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1		
	R587	RK73GB2A220J	MG RESISTOR	22Ω 1/10W J	1		
	R589	RK73GB2A821J	MG RESISTOR	820Ω 1/10W J	1		
	R590	RK73GB2A821J	MG RESISTOR	820Ω 1/10W J	1		
	R600	RK73FB2B151J	MG RESISTOR	150Ω 1/8W J	1		
	R601	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1		
	R602	RK73GB2A820J	MG RESISTOR	82Ω 1/10W J	1		
	R603	RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	1		
	R604	RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	1		
	R605	RK73GB2A4R7J	MG RESISTOR	4.7Ω 1/10W J	1		
	R611	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1		
	R701	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1		
	R702	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1		
	R703	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1		
	R704	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1		
	R705	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1		
	R707	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1		
	R708	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	H,I,J,K,L	
	R709	RK73GB2A332J	MG RESISTOR	3.3kΩ 1/10W J	1		
	R711	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1		
	R712	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1		
	R713	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1		
	R714	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1		
	R715	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1		
	R716	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1		
	R717	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1		
	R718	RK73GB2A333J	MG RESISTOR	33kΩ 1/10W J	1		
	R719	RK73GB2A911J	MG RESISTOR	910Ω 1/10W J	1		
	R720	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1		
	R721	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1		
	R722	RK73GB2A911J	MG RESISTOR	910Ω 1/10W J	1		
	R723	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1		
	R724	RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	1		
	R725	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1		
	R726	RK73GB2A220J	MG RESISTOR	22Ω 1/10W J	1		
	R727	RK73GB2A153J	MG RESISTOR	15kΩ 1/10W J	1		
	R728	RK73GB2A220J	MG RESISTOR	22Ω 1/10W J	1		
	R729	RK73GB2A153J	MG RESISTOR	15kΩ 1/10W J	1		
	R730	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1		
	R731	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1		
	R732	RK73GB2A393J	MG RESISTOR	39kΩ 1/10W J	1	A,B,C,D,E,F,G	
	R732	RK73GB2A273J	MG RESISTOR	27kΩ 1/10W J	1	H,J,K,L	
	R732	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	I	
	R733	RK73GB2A822J	MG RESISTOR	8.2kΩ 1/10W J	1	A,B,C,D,E,F,G	
	R733	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	H,J,K,L	
	R733	RK73GB2A273J	MG RESISTOR	27kΩ 1/10W J	1	I	
	R734	RK73GB2A273J	MG RESISTOR	27kΩ 1/10W J	1	B,C,D,E,J,K,L	
	R734	RK73GB2A393J	MG RESISTOR	39kΩ 1/10W J	1	F	
	R734	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	G	
	R735	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,H,I	
	R735	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	B,C,D,E,J,K,L	
	R735	RK73GB2A822J	MG RESISTOR	8.2kΩ 1/10W J	1	F	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-AR565J	A	KD-R561E	B	KD-R561EN	C	KD-R561EY	D
KD-R561EU	E	KD-R561U	F	KD-R567EE	G	KD-R760J	H
KD-AR765SJ	I	KD-R761E	J	KD-R761EN	K	KD-R761EY	L

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R735	RK73GB2A273J	MG RESISTOR	27kΩ 1/10W J	1	G
	R743	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R744	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R745	RK73EB2E222J	MG RESISTOR	2.2kΩ 1/4W J	1	
	R746	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R747	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R748	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R749	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R750	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R751	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R752	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R753	RK73EB2E102J	MG RESISTOR	1kΩ 1/4W J	1	
	R754	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R755	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R756	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R757	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R758	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R760	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R761	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R762	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R763	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	A,B,C,D,E,F,G
	R764	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R820	RK73EB2E473J	MG RESISTOR	47kΩ 1/4W J	1	
	R821	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R822	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R830	RK73EB2E101J	MG RESISTOR	100Ω 1/4W J	1	
	R840	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R841	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R850	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R861	RK73GB2A200J	MG RESISTOR	20Ω 1/10W J	1	
	R862	RK73GB2A391J	MG RESISTOR	390Ω 1/10W J	1	
	R864	RK73GB2A393J	MG RESISTOR	39kΩ 1/10W J	1	
	R865	RK73GH2A683D	MG RESISTOR	68kΩ 1/10W D	1	
	R867	RK73GH2A393D	MG RESISTOR	39kΩ 1/10W D	1	
	R868	RK73GH2A183D	MG RESISTOR	18kΩ 1/10W D	1	
	R890	RK73GH2A203D	MG RESISTOR	20kΩ 1/10W D	1	
	R892	RK73GB2A391J	MG RESISTOR	390Ω 1/10W J	1	
	R900	RK73EB2E473J	MG RESISTOR	47kΩ 1/4W J	1	
	R901	RK73EB2E473J	MG RESISTOR	47kΩ 1/4W J	1	
	R902	RK73EB2E682J	MG RESISTOR	6.8kΩ 1/4W J	1	
	R903	RK73EB2E682J	MG RESISTOR	6.8kΩ 1/4W J	1	I
	R905	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R940	RK73EB2E100J	MG RESISTOR	10Ω 1/4W J	1	
	R1007	RK73GB2A163J	MG RESISTOR	16kΩ 1/10W J	1	
	R1017	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R1029	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R1036	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R1043	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R1045	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	R1047	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R1049	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R1064	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R1065	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R1070	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	
	R1071	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R1080	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R1086	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R1091	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R1160	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R1300	NRZ0084-0R0X	MG RESISTOR	0Ω	1	
	R1600	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	I
	R1715	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R1717	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R1861	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	RA470	RK74GB1J100J	NET RESISTOR	10Ω 1/16W J	1	
	RA580	RK74GB1J471J	NET RESISTOR	470Ω 1/16W J	1	
	RA701	RK74GB1J473J	NET RESISTOR	47kΩ 1/16W J	1	
	L540	NQR0713-001X	FERRITE BEADS		1	
	L574	NQR0713-001X	FERRITE BEADS		1	
	L600	LR73Z0AD4R7M	CHIP INDUCTOR	4.7uH	1	
	L601	LK73G0BE4R7K	M.CHIP INDUCTOR		1	
	L602	LK73G0BER47K	M.CHIP INDUCTOR		1	
	L603	NQLM93K-R10X	INDUCTOR	0.1uH K	1	
	L604	LK73G0BE1R0K	M.CHIP INDUCTOR		1	
	L605	LK73G0BER22K	M.CHIP INDUCTOR		1	
	L606	LK73G0BER12K	M.CHIP INDUCTOR		1	
	L607	LK73G0BER15K	M.CHIP INDUCTOR		1	
	L700	NQR0713-001X	FERRITE BEADS		1	
	L701	LB73G0BK-006	CHIP FERRITE		1	
	L709	NQR0713-001X	FERRITE BEADS		1	
	L710	NQR0713-001X	FERRITE BEADS		1	I
	L777	NQR0713-001X	FERRITE BEADS		1	
	L778	NQR0713-001X	FERRITE BEADS		1	
	L820	NQR0713-001X	FERRITE BEADS		1	
	L821	NQR0713-001X	FERRITE BEADS		1	
	L822	NQR0713-001X	FERRITE BEADS		1	
	L823	NQR0713-001X	FERRITE BEADS		1	
	L824	NQR0713-001X	FERRITE BEADS		1	
	L825	LB73G0CA-002	CHIP FERRITE		1	
	L826	NQR0403-003X	FERRITE BEADS		1	
	L827	LB73G0BK-006	CHIP FERRITE		1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-AR565J	A	KD-R561E	B	KD-R561EN	C	KD-R561EY	D
KD-R561EU	E	KD-R561U	F	KD-R567EE	G	KD-R760J	H
KD-AR765SJ	I	KD-R761E	J	KD-R761EN	K	KD-R761EY	L

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	L860	NQLL6EM-100X	INDUCTOR	10uH M	1	
	L861	NQLH65M-4R7X	INDUCTOR	4.7uH M	1	
	L990	QQR1927-001	CHOKE COIL		1	
	CN502	QGF1040F1-24	FFC/FPC CONNE	FFC/FPC (1-24)	1	
	CN701	QGZ2006J1-20	DETACHABLE CONN	(1-20)	1	
	CN990	QNZ0607-001	CAR CONNECTOR		1	
	J321	QNN0874-001	PIN JACK		1	A,B,C,D,E,F,G
	J321	QNN0868-001	PIN JACK		1	H,J,K,L
	J321	QNN0866-001	PIN JACK		1	I
	J470	QNZ0907-001	CIR CONNECTOR		1	I
	J600	QNB0356-001	ANT TERMINAL		1	
	S830	QSW0648-001Z	TACT SWITCH		1	
	VA600	F0K-0014-00	SURGE ABSORBER		1	
	X540	NAX1224-001X	CRYSTAL		1	
	X600	QAX0969-001Z	CRYSTAL		1	
	X701	NAX1251-001X	CRYSTAL		1	
SWITCH PWB ASSY (XJ6-035x-xx) <02>						
	IC1	BU97520AKV-M	MOS IC		1	
	IC2	PCA9633DP1-X	IC		1	H,I,J,K,L
	IC90	SIR8630B6T	IR DETECT UNIT		1	A,E,F,G,H,I
	Q1	LSCR523UBFS8	TRANSISTOR		1	
	Q50	LSCR523EBFS8	TRANSISTOR		1	
	Q51	LSCR523EBFS8	TRANSISTOR		1	
	Q52	LSCR523EBFS8	TRANSISTOR		1	
	Q53	LSCR523EBFS8	TRANSISTOR		1	H,I,J,K,L
	Q54	LSCR523EBFS8	TRANSISTOR		1	H,I,J,K,L
	Q55	LSCR523EBFS8	TRANSISTOR		1	
	Q56	LSCR523EBFS8	TRANSISTOR		1	H,I,J,K,L
	Q57	LSCR523EBFS8	TRANSISTOR		1	H,I,J,K,L
	Q58	LSCR523EBFS8	TRANSISTOR		1	H,I,J,K,L
	D1	DZ2J056M	ZENER DIODE		1	
	D2	MBRX130	SCHOTTKY DIODE		1	
	D20	NESM026DT-W	LED		1	
	D21	NESM026DT-W	LED		1	
	D22	NESM026DT-W	LED		1	
	D23	NESM026DT-W	LED		1	
	D48	LUWJNSH.PC//0	LED		1	A,B,C,D,E,F,G
	D49	NESM026DT-W	LED		1	H,I,J,K,L
	D80	DZ2J051M	ZENER DIODE		1	
	D81	DZ2J051M	ZENER DIODE		1	
	C1	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C3	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C5	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C6	CK73EXR1C106K	C CAPACITOR	10uF 16V K	1	
	C8	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	H,I,J,K,L
	C60	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C61	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C80	CC73GCH1H270J	C CAPACITOR	27pF 50V J	1	
	C81	CC73GCH1H270J	C CAPACITOR	27pF 50V J	1	
	C82	CK73EXR1C106K	C CAPACITOR	10uF 16V K	1	
	C83	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C84	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C85	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C86	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C91	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	A,E,F,G,H,I
	R1	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R3	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	
	R4	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R5	RK73EB2E331J	MG RESISTOR	330Ω 1/4W J	1	
	R6	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	
	R8	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	H,I,J,K,L
	R9	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	H,I,J,K,L
	R20	RK73GB2A821J	MG RESISTOR	820Ω 1/10W J	1	
	R22	RK73GB2A821J	MG RESISTOR	820Ω 1/10W J	1	
	R23	RK73GB2A132J	MG RESISTOR	1.3kΩ 1/10W J	1	
	R25	RK73GB2A821J	MG RESISTOR	820Ω 1/10W J	1	
	R26	RK73GB2A821J	MG RESISTOR	820Ω 1/10W J	1	
	R27	RK73GB2A132J	MG RESISTOR	1.3kΩ 1/10W J	1	
	R33	RK73GB2A911J	MG RESISTOR	910Ω 1/10W J	1	
	R34	RK73GB2A911J	MG RESISTOR	910Ω 1/10W J	1	
	R35	RK73GB2A132J	MG RESISTOR	1.3kΩ 1/10W J	1	
	R36	RK73GB2A132J	MG RESISTOR	1.3kΩ 1/10W J	1	
	R37	RK73GB2A911J	MG RESISTOR	910Ω 1/10W J	1	
	R38	RK73GB2A911J	MG RESISTOR	910Ω 1/10W J	1	
	R44	RK73GB2A122J	MG RESISTOR	1.2kΩ 1/10W J	1	A,B,C,D,E,F,G
	R44	RK73GB2A751J	MG RESISTOR	750Ω 1/10W J	1	H,I,J,K,L
	R45	RK73GB2A122J	MG RESISTOR	1.2kΩ 1/10W J	1	A,B,C,D,E,F,G
	R46	RK73GB2A911J	MG RESISTOR	910Ω 1/10W J	1	H,I,J,K,L
	R48	RK73GB2A751J	MG RESISTOR	750Ω 1/10W J	1	H,I,J,K,L
	R50	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R51	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R52	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R53	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	H,I,J,K,L
	R54	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	H,I,J,K,L
	R55	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R60	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	1	
	R61	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	1	
	R62	RK73FB2B4R7J	MG RESISTOR	4.7Ω 1/8W J	1	
	R80	RK73EB2E221J	MG RESISTOR	220Ω 1/4W J	1	
	R81	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-AR565J	A	KD-R561E	B	KD-R561EN	C	KD-R561EY	D
KD-R561EU	E	KD-R561U	F	KD-R567EE	G	KD-R760J	H
KD-AR765SJ	I	KD-R761E	J	KD-R761EN	K	KD-R761EY	L

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R91	RK73GB2A623J	MG RESISTOR	62kΩ 1/10W J	1	B,C,D,J,K,L
	R1004	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R1006	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,E,F,G,H,I
	R1008	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G
	R1009	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G
	R1010	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G
	RA1	RK74GB1J101J	NET RESISTOR	100Ω 1/16W J	1	
	RA2	RK74GB1J101J	NET RESISTOR	100Ω 1/16W J	1	
	RA3	RK74GB1J101J	NET RESISTOR	100Ω 1/16W J	1	
	RA4	RK74GB1J102J	NET RESISTOR	1kΩ 1/16W J	1	H,I,J,K,L
	L3	LB73G0BA-005	CHIP FERRITE		1	H,I,J,K,L
	CN1	QG22006K1-20X	DETACHABLE CONN	(1-20)	1	
	FL80	NQR0704-001X	CHOKE COIL		1	
	J60	QNS0322-001	3.5 JACK		1	
	J80	QNZ1076-001	USB CONNECTOR		1	
	S20	T9K-0007-00	ROTARY ENCODER		1	
CD MECHA PWB ASSY (LVA20106-01A) <03>						
	IC1	BD8266EFV-M-X	IC		1	
	C26	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C54	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C55	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	R18	RK73GB2A822J	MG RESISTOR	8.2kΩ 1/10W J	1	
	R21	RK73GB2A822J	MG RESISTOR	8.2kΩ 1/10W J	1	
	R24	RK73GB2A272J	MG RESISTOR	2.7kΩ 1/10W J	1	
	R27	RK73GB2A562J	MG RESISTOR	5.6kΩ 1/10W J	1	
	R28	RK73GB2A114J	MG RESISTOR	110kΩ 1/10W J	1	
	R29	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R30	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R36	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R37	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R38	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R40	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R42	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R47	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R48	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R50	RK73GB2A131J	MG RESISTOR	130Ω 1/10W J	1	
	CN1	QGF1044F2-24X	CONNECTOR	FFC/FPC (1-24)	1	
	CN2	QGF0522F6-15W	CONNECTOR	FFC/FPC (1-15)	1	
	SW1	NSW0291-001X	DETECT SWITCH		1	
	SW2	NSW0291-001X	DETECT SWITCH		1	
	SW3	NSW0313-001X	DETECT SWITCH		1	