
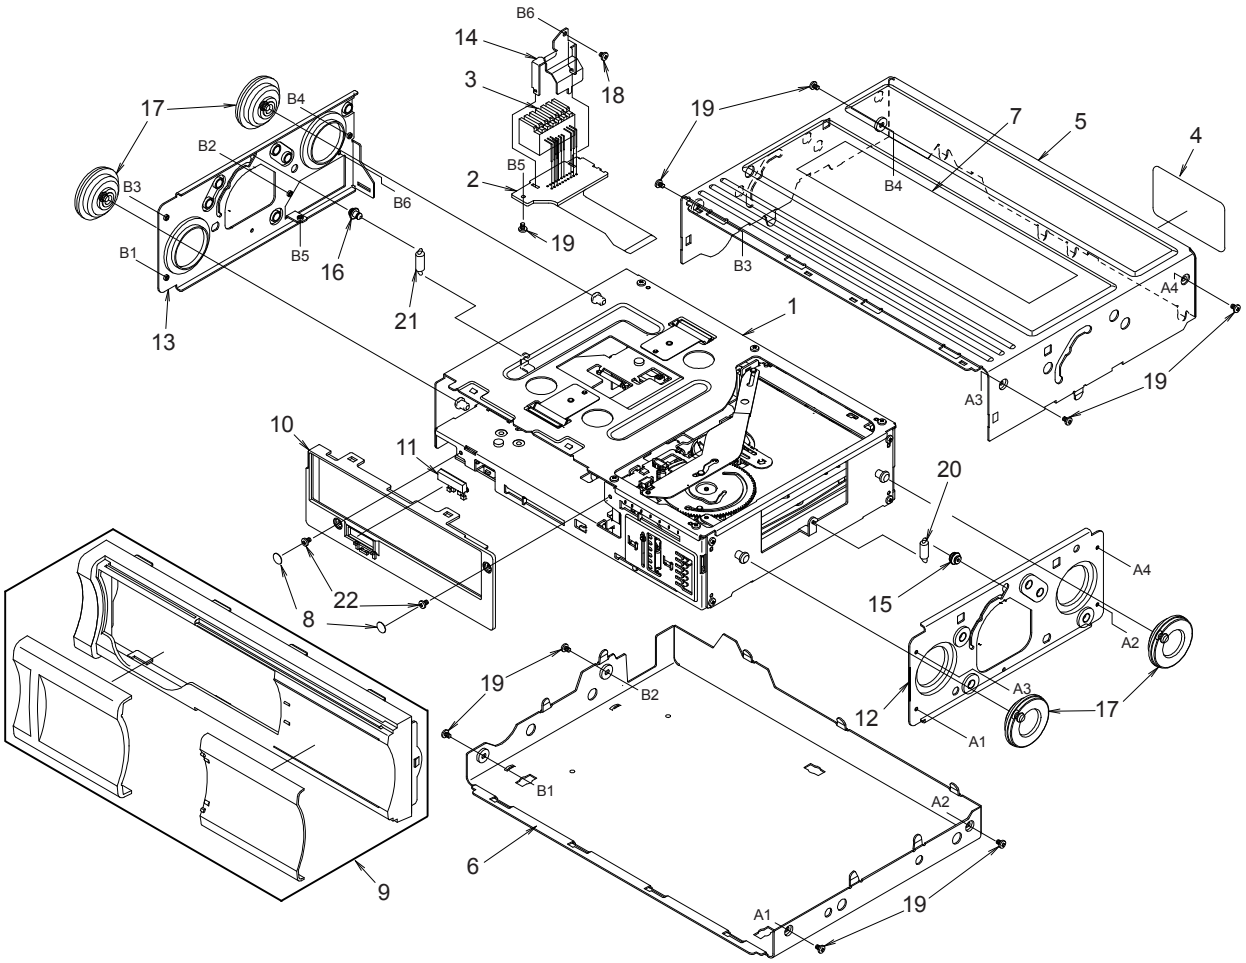


Note) Some parts depend on each model.
The model name is specified in the description.

NO.	PART NO.	DESCRIPTION	Q'TY
1	ー ー ー ー ー	CD CHANGER MECHANISM (027120)	1
2	039-2030-21	FLEXIBLE PWB (WITHOUT COMPONENT)	1
3	074-1087-02	OUTLET SOCKET(16P)	1
4	286-6088-00 286-6088-01 286-6077-00	SETPLATE(PN-2475F-A) SETPLATE(PN-2475F-B) SETPLATE(PN-2475D-A)	1
5	310-1748-21	UPPER CASE	1
6	311-1844-22	LOWER CASE	1
7	335-5993-00	LOCK FASTENER(D-A)	1
8	746-0767-00	WASHER	2
9	940-7993-11	ESCUTCHEON ASSY	1
10	371-5693-23	TRIM PLATE	1


NO.	PART NO.	DESCRIPTION	Q'TY
11	382-6254-20	BUTTON	1
12	620-0996-21	DAMPER PLATE R	1
13	620-1095-20	DAMPER PLATE L	1
14	620-1099-20	CONNECT HOLDER	1
15	622-1545-20	FL PIN R	1
16	622-1546-20	FL PIN L	1
17	629-0080-00	DAMPER	4
18	716-0484-00	SCREW(M2×2.5)	1
19	716-1716-00	SCREW	9
20	750-3459-21	FL-SPRING R	1
21	750-3460-21	FL-SPRING L	1
22	716-3486-00	SCREW	2

Changer mechanism section

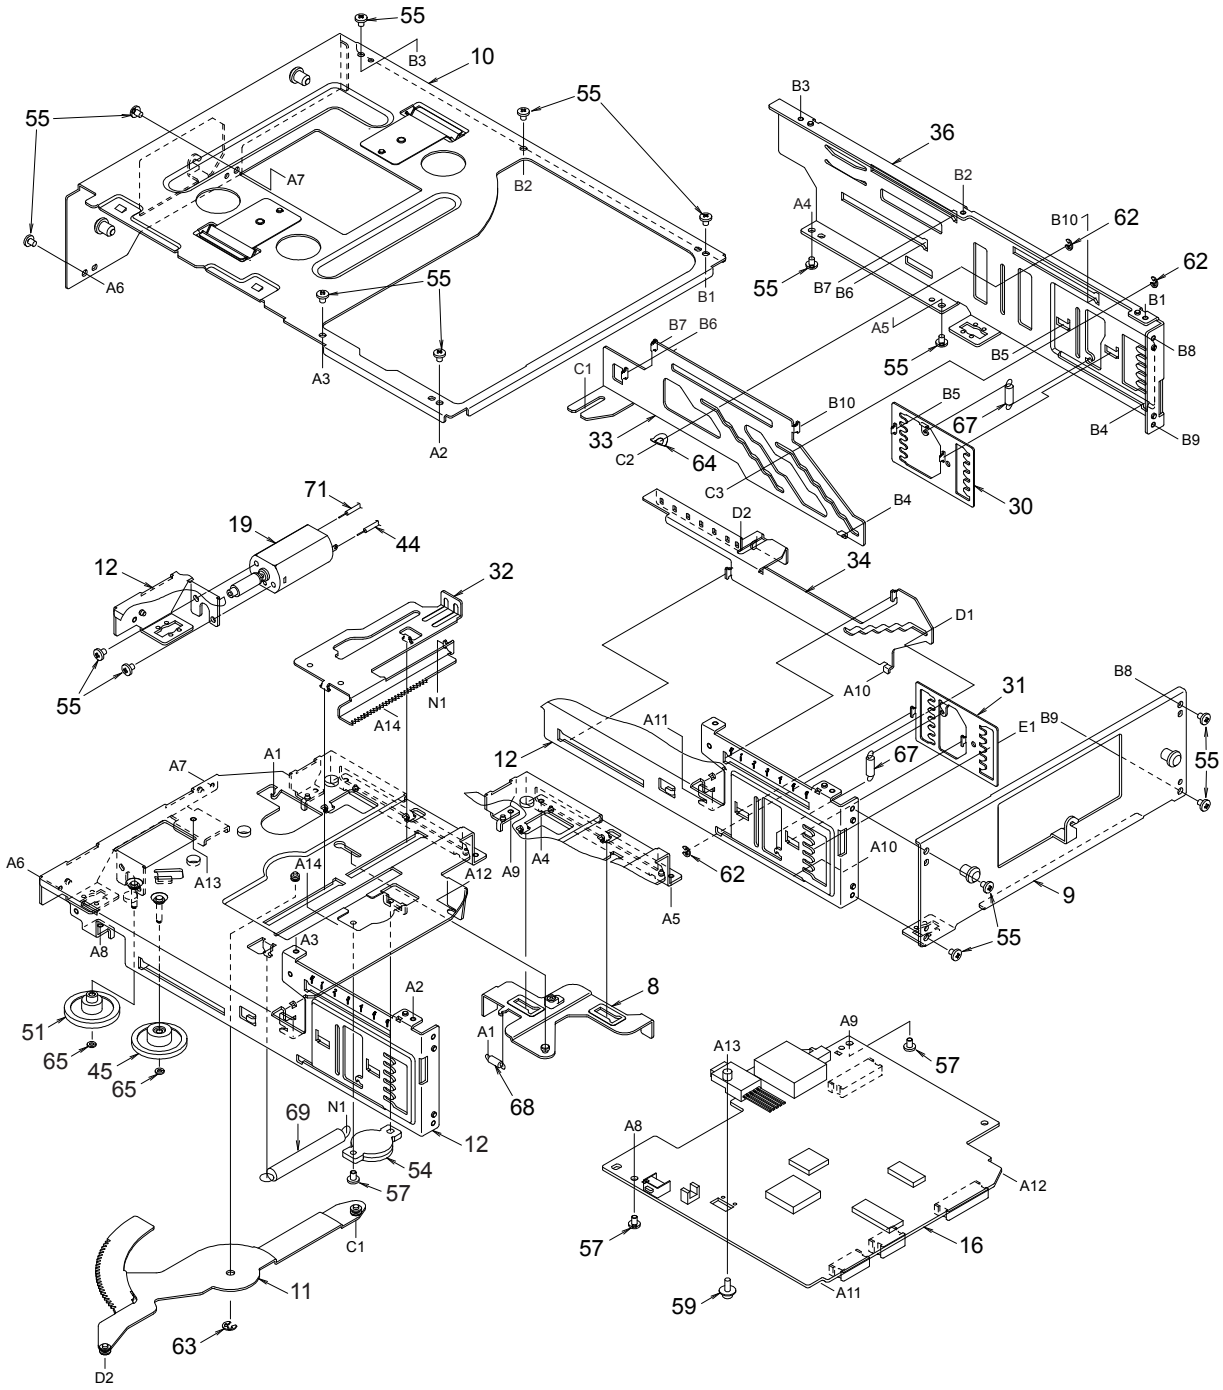

NO.	PART NO.	DESCRIPTION	Q'TY
1	966-0582-23	DRIVE-P-ASSY	1
2	966-0583-20	DISC HOLD ASSY	1
3	966-0584-23	CLAMP-P-ASSY F	1
4	966-0585-22	CAM GEAR ASSY	1
5	966-0586-22	MOTOR-P-ASSY	1
6	966-0588-22	HOLDER-L-ASSY	1
7	966-0589-24	L-UPPER-P-ASSY	1
8	966-0590-20	MG-LO-P-ASSY	1
9	966-0591-21	REAR PANEL ASSY	1
10	966-0592-20 966-0626-21	UP-PLATE ASSY(PN-2475) UP-PLATE ASSY(PN-2474)	1
11	966-0593-20	UD-GEAR-P-ASSY	1

NO.	PART NO.	DESCRIPTION	Q'TY
12	966-0594-24	V-CHASSIS ASSY	1
13	966-0454-00	SH-RACK-ASSY	1
14	966-0623-23	L-LOWER-P-ASSY	1
15	969-0061-30	PICK UP-ASSY	1
16	039-2063-21	MAIN PWB (WITHOUT COMPONENT)	1
17	001-0563-00	LED	1
18	013-7413-50	DETECTOR SWITCH	3
19	SMA-180-100	MOTOR ASSY(UP/DOWN)	1
20	SMA-181-100	MOTOR ASSY(SLED)	1
21	SMA-179-100	MOTOR ASSY(SPINDLE)	1
22	039-1949-20	DRIVE PWB (WITHOUT COMPONENT)	1

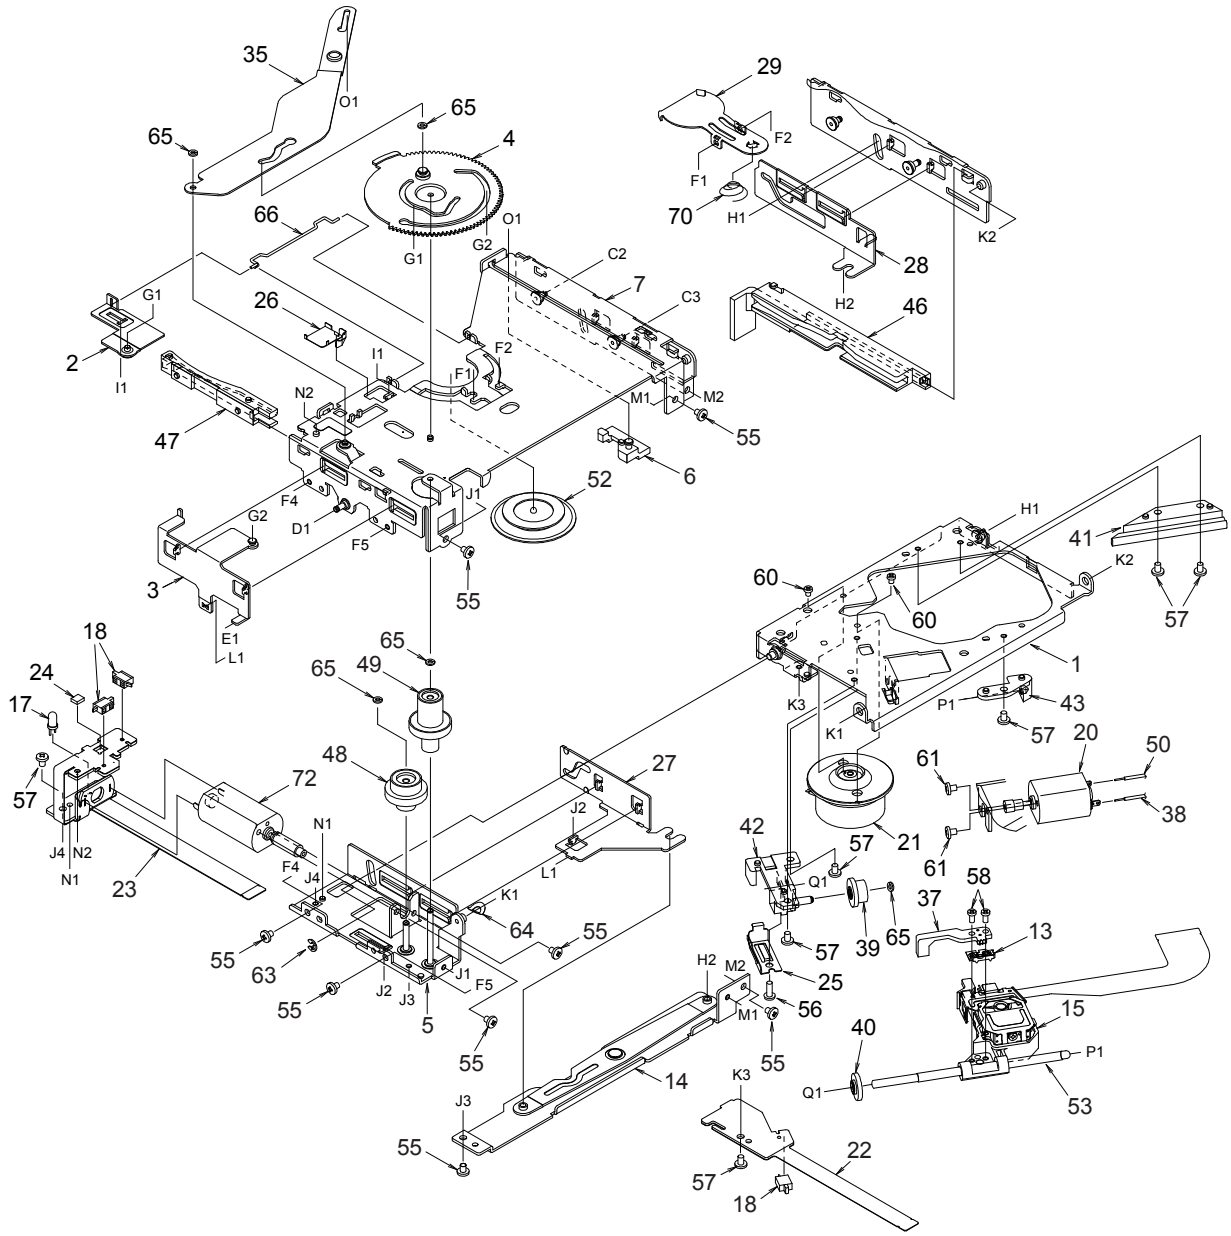

NO.	PART NO.	DESCRIPTION	Q'TY
23	039-1950-20	LOADING PWB (WITHOUT COMPONENT)	1
24	060-0252-01	PHOTO-TR	1
25	620-0999-21	LS-SPRING	1
26	620-1575-21	SWITCH PLATE	1
27	620-1007-22	CLAMP PLATE M	1
28	620-1008-24	CLAMP PLATE R	1
29	620-1009-22	CLAMPER PLATE	1
30	620-1016-20	GAP PLATE R	1
31	620-1017-20	GAP PLATE F	1
32	620-1018-20	MG EJECT PLATE	1
33	620-1019-20	SLIDE PLATE R	1
34	620-1020-21	SLIDE PLATE F	1
35	620-1031-21	LOADING ARM	1
36	620-1034-24	SIDE PANEL	1
37	621-0587-21	SCREW HOLD BASE	1
38	801-4912-60	VINYL-COAT-WIRE(BRN)	1
39	621-0589-20	SECOND GEAR	1

NO.	PART NO.	DESCRIPTION	Q'TY
40	621-0590-20	LS GEAR	1
41	621-0591-20	PICK UP GUIDE	1
42	621-0592-21	LS-HOLDER	1
43	621-0593-21	LS GUIDE	1
44	802-4906-60	VINYL-COAT-WIRE(RED)	1
45	621-0597-20	V-GEAR A	1
46	621-0630-22	HOLDER-G-RAIL R	1
47	621-0631-21	HOLDER-G-RAIL L	1
48	621-0703-20	L-GEAR A	1
49	621-0633-20	L-GEAR B	1
50	805-4912-60	VINYL-COAT-WIRE(GRN)	1
51	621-0635-20	V-HELICAL GEAR	1
52	621-0636-21	CLAMPER RING	1
53	624-3022-00	LEAD SCREW	1
54	629-0061-00	GEAR DAMPER	1
55	716-0484-00	SCREW(M2×2.5)	23
56	716-0675-00	SCREW(M2×5.5)	1

NO.	PART NO.	DESCRIPTION	Q'TY
57	716-1716-00	SCREW(M2×3)	10
58	716-3469-00	SCREW	2
59	735-2006-11	D-SEMS-SCREW(M2×6)	1
60	739-1722-17	SCREW(M1.7×2.2)	2
61	739-2022-17	SCREW(M2×2.2)	2
62	743-1500-10	E-RING	3
63	743-2000-10	E-RING	2
64	745-0789-01	DRIVE WASHER	2

NO.	PART NO.	DESCRIPTION	Q'TY
65	746-0761-00	WASHER	7
66	750-3461-21	DISC-H-SPRING	1
67	750-3462-21	GAP SPRING	2
68	750-3463-20	MG LOCK SPRING	1
69	750-3464-20	MG EJECT SPRING	1
70	750-3492-22	CLAMPER SPRING	1
71	800-4906-60	VINYL-COAT-WIRE(BLK)	1
72	SMA-188-100	MOTOR ASSY(LOADING)	1

■ELECTRICAL PARTS LIST

Note) Several different parts of the same reference number are alternative parts. One of those parts is used in the set.

Main PWB(B1) section

REF No.	PART No.	DESCRIPTION
C1	183-1073-17	6.3V100uF
C2	046-1032-78	0.01uF
C3	043-0533-50	0.047uF
C4	042-0426-31	6.3V100uF
C5	046-6822-58	6800pF
C6	168-1042-78	0.1uF
C7	178-1052-78	1uF
C8	183-3363-27	10V33uF
C9	183-3363-27	10V33uF
C10	168-1042-78	0.1uF
C11	168-1042-78	0.1uF
C12	045-5096-50	5pF
C13	183-3363-27	10V33uF
C14	178-1052-78	1uF
C15	046-1032-78	0.01uF
C16	178-1052-78	1uF
C17	045-5601-50	56pF
C18	168-1032-55	0.01uF
C19	043-0533-50	0.047uF
C20	046-1532-78	0.015uF
C21	045-4701-50	47pF
C22	043-0533-50	0.047uF
C23	046-1522-58	1500pF
C24	046-4722-58	4700pF
C25	046-1032-78	0.01uF
C26	043-0533-50	0.047uF
C27	046-3332-78	0.033uF
C28	046-3332-78	0.033uF
C29	046-4712-58	470pF
C30	045-4701-50	47pF
C31	168-1032-55	0.01uF
C32	043-0533-50	0.047uF
C33	043-0533-50	0.047uF
C34	168-1032-55	0.01uF
C35	168-1042-78	0.1uF
C36	166-1011-50	100pF
C37	166-1501-50	18pF
C38	166-1501-50	18pF
C39	046-1032-78	0.01uF
C40	168-1042-78	0.1uF
C41	168-1032-55	0.01uF
C42	046-1032-78	0.01uF
C43	183-3363-27	10V33uF
C44	046-1032-78	0.01uF
C45	183-3363-27	10V33uF
C46	168-1042-78	0.1uF
C47	168-1032-55	0.01uF
C48	183-3363-27	10V33uF
C49	183-3363-27	10V33uF
C50	045-2201-50	22pF
C51	045-2201-50	22pF
C52	168-1032-55	0.01uF
C53	042-0452-81	10V220uF
C54	183-1063-37	16V10uF
C55	168-1032-55	0.01uF
C56	183-1073-17	6.3V100uF
C57	168-1032-55	0.01uF
C58	183-1073-17	6.3V100uF
C59	168-1042-78	0.1uF
C60	042-0452-81	10V220uF
C61	045-2201-50	22pF
C62	042-0452-81	10V220uF
C63	173-1021-18	1000pF
C64	184-4773-31	16V470uF
C65	045-2201-50	22pF
C66	042-0452-81	10V220uF
C67	042-0452-81	10V220uF
C68	183-1063-39	16V10uF
C69	168-5632-78	0.056uF
C70	168-5632-78	0.056uF
C71	168-5632-78	0.056uF
C72	168-5632-78	0.056uF
C73	168-1042-78	0.1uF
C74	178-1052-78	1uF
C75	178-1052-78	1uF
C76	178-1052-78	1uF
C77	178-1052-78	1uF
C78	168-4722-55	4700pF
C79	168-4722-55	4700pF
C80	168-4722-55	4700pF
C81	168-4722-55	4700pF
D1	001-0516-90	MA111
D2	001-1304-90	DAN202U
D3	001-0504-33	HZS6B2L
D4	001-0516-90	MA111
D5	001-0422-38	MTZJ36
D6	001-0422-38	MTZJ36
D7	001-0516-90	MA111
D9	001-0516-90	MA111
D10	001-0466-90	S5688B
D11	001-0516-90	MA111
FIL1	060-3113-95	1000pF
FIL2	060-3113-95	1000pF
FIL3	060-3113-95	1000pF
IC1	051-5710-90	TA2157F
IC2	051-6060-08	BD7961FM
IC3	051-5806-00	GP1S94
IC4	051-6376-00	TC94A14FA
IC5	052-5050-01	UPD780065GC-710-8BT
IC6	051-1407-90	NJM4556AM
IC7	051-3289-00	BA09ST
IC8	051-5438-08	S-80830ANMP
IC9	051-1407-90	NJM4556AM
J1	074-1138-65	15P
J2	074-1158-56	6P
J3	074-1158-58	8P
J4	074-1158-65	15P
L1	010-3050-93	10uH
L2	010-2285-57	BLM21B102SPT
L3	010-2285-57	BLM21B102SPT
L4	010-2285-57	BLM21B102SPT
L5	010-2285-57	BLM21B102SPT
Q1	191-1237-50	2SB1237QR
Q2	191-1237-50	2SB1237QR
Q3	191-1237-50	2SB1237QR
Q4	125-0014-92	DTA114
Q5	190-1048-50	2SA1048Y/GR
Q6	125-2004-92	RN1402
Q7	193-1858-50	2SD1858QR
Q8	125-2004-92	RN1402
Q9	125-0014-92	DTA114
Q10	192-2712-51	2SC2712GL
Q11	193-1306-00	2SD1306
Q12	193-1306-00	2SD1306
Q13	192-2712-51	2SC2712GL
Q14	192-2712-51	2SC2712GL
Q15	125-0014-92	DTA114
Q16	192-2712-51	2SC2712GL
Q17	125-2004-92	RN1402
Q18	193-1306-00	2SD1306
Q19	193-1306-00	2SD1306
R1	033-1041-15	1/16W 100kΩ
R2	033-1041-15	1/16W 100kΩ
R3	033-1041-15	1/16W 100kΩ
R4	033-1041-15	1/16W 100kΩ
R5	033-1041-15	1/16W 100kΩ
R6	033-1041-15	1/16W 100kΩ
R7	033-2211-15	1/16W 220Ω
R8	111-2711-94	1/4WS 270Ω
R9	033-6831-15	1/16W 68kΩ
R10	111-2201-94	1/4WS 22Ω
R11	111-2201-94	1/4WS 22Ω
R12	119-1031-15	1/16W 10kΩ
R13	119-2231-15	1/16W 22kΩ
R14	033-8211-15	1/16W 820Ω
R15	111-1001-94	1/4WS 10Ω
R16	119-1031-15	1/16W 10kΩ
R17	119-1531-15	1/16W 15kΩ
R18	033-2721-15	1/16W 2.7kΩ
R19	033-6831-15	1/16W 68kΩ
R20	033-6831-15	1/16W 68kΩ
R21	033-1011-15	1/16W 100Ω
R22	033-1021-15	1/16W 1kΩ
R23	033-1031-15	1/16W 10kΩ
R24	033-1831-15	1/16W 18kΩ
R25	111-2711-94	1/4WS 270Ω
R26	050-0146-53	100kΩ×2
R27	033-1531-15	1/16W 15kΩ
R28	033-1031-15	1/16W 10kΩ
R29	033-4731-15	1/16W 47kΩ
R30	033-1041-15	1/16W 100kΩ
R31	050-0145-54	47kΩ×4
R32	033-5621-15	1/16W 5.6kΩ
R33	033-3331-15	1/16W 33kΩ
R34	033-1051-15	1/16W 1MΩ
R35	033-4711-15	1/16W 470Ω
R36	119-1031-15	1/16W 10kΩ
R37	033-1031-15	1/16W 10kΩ
R38	033-1031-15	1/16W 10kΩ
R39	033-2231-15	1/16W 22kΩ

REF No.	PART No.	DESCRIPTION
R40	033-2231-15	1/16W 22kΩ
R41	033-1041-15	1/16W 100kΩ
R42	119-2231-15	1/16W 22kΩ
R43	033-4711-15	1/16W 470Ω
R44	050-0146-54	47kΩ×2
R45	033-2201-15	1/16W 22Ω
R46	033-1031-15	1/16W 10kΩ
R47	033-8221-15	1/16W 8.2kΩ
R48	033-1021-15	1/16W 1kΩ
R49	033-2201-15	1/16W 22Ω
R50	119-1531-15	1/16W 15kΩ
R51	033-5631-15	1/16W 56kΩ
R52	033-1031-15	1/16W 10kΩ
R53	033-1031-15	1/16W 10kΩ
R54	033-4731-15	1/16W 47kΩ
R55	033-2201-15	1/16W 22Ω
R56	033-2201-15	1/16W 22Ω
R57	033-1031-15	1/16W 10kΩ

REF No.	PART No.	DESCRIPTION
R58	033-1031-15	1/16W 10kΩ
R59	033-5631-15	1/16W 56kΩ
R60	033-1031-15	1/16W 10kΩ
R61	033-2211-15	1/16W 220Ω
R62	033-1031-15	1/16W 10kΩ
R63	033-1031-15	1/16W 10kΩ
R64	033-1031-15	1/16W 10kΩ
R65	033-4731-15	1/16W 47kΩ
R66	033-1031-15	1/16W 10kΩ
R67	033-1031-15	1/16W 820Ω
R68	033-5621-15	1/16W 5.6kΩ
R69	119-4731-15	1/16W 47kΩ
R70	033-1031-15	1/16W 10kΩ
R71	033-1031-15	1/16W 10kΩ
R72	033-5631-15	1/16W 56kΩ
R73	033-1031-15	1/16W 10kΩ
R74	033-1031-15	1/16W 10kΩ
R75	033-1031-15	1/16W 10kΩ

REF No.	PART No.	DESCRIPTION
R76	033-1031-15	1/16W 10kΩ
R77	033-1031-15	1/16W 10kΩ
R78	033-1031-15	1/16W 10kΩ
R79	119-4731-15	1/16W 47kΩ
R80	119-4731-15	1/16W 47kΩ
R81	119-4731-15	1/16W 47kΩ
R82	119-4731-15	1/16W 47kΩ
R83	033-2251-15	1/16W 2.2MΩ
R84	119-1521-15	1/16W 1.5kΩ
R85	119-1521-15	1/16W 1.5kΩ
R86	119-1521-15	1/16W 1.5kΩ
R87	119-1521-15	1/16W 1.5kΩ
S1	013-7404-50	HLZ00110676
S2	013-7404-50	HLZ00110676
S3	013-6100-10	SKHLLD
T1	009-0679-00	CHOKE
X1	061-3038-00	16.9344M
X2	060-1035-90	CSTLS4M91G56-A0

Connector PWB(B2) section

REF No.	PART No.	DESCRIPTION
D50	001-2015-00	RL253

REF No.	PART No.	DESCRIPTION
J50	074-1087-02	16P

Loading PWB(B3) section

REF No.	PART No.	DESCRIPTION
D501	001-0563-00	GL380
Q501	060-0252-01	PT4850F

REF No.	PART No.	DESCRIPTION
S501	013-7413-50	SPVG12
S502	013-7413-50	SPVG12

Drive PWB(B4) section

REF No.	PART No.	DESCRIPTION
S503	013-7413-50	SPVG12