
2.3 EXTERIOR(1)(AVX-MG2237ZF,AVX-MG2337ZF)

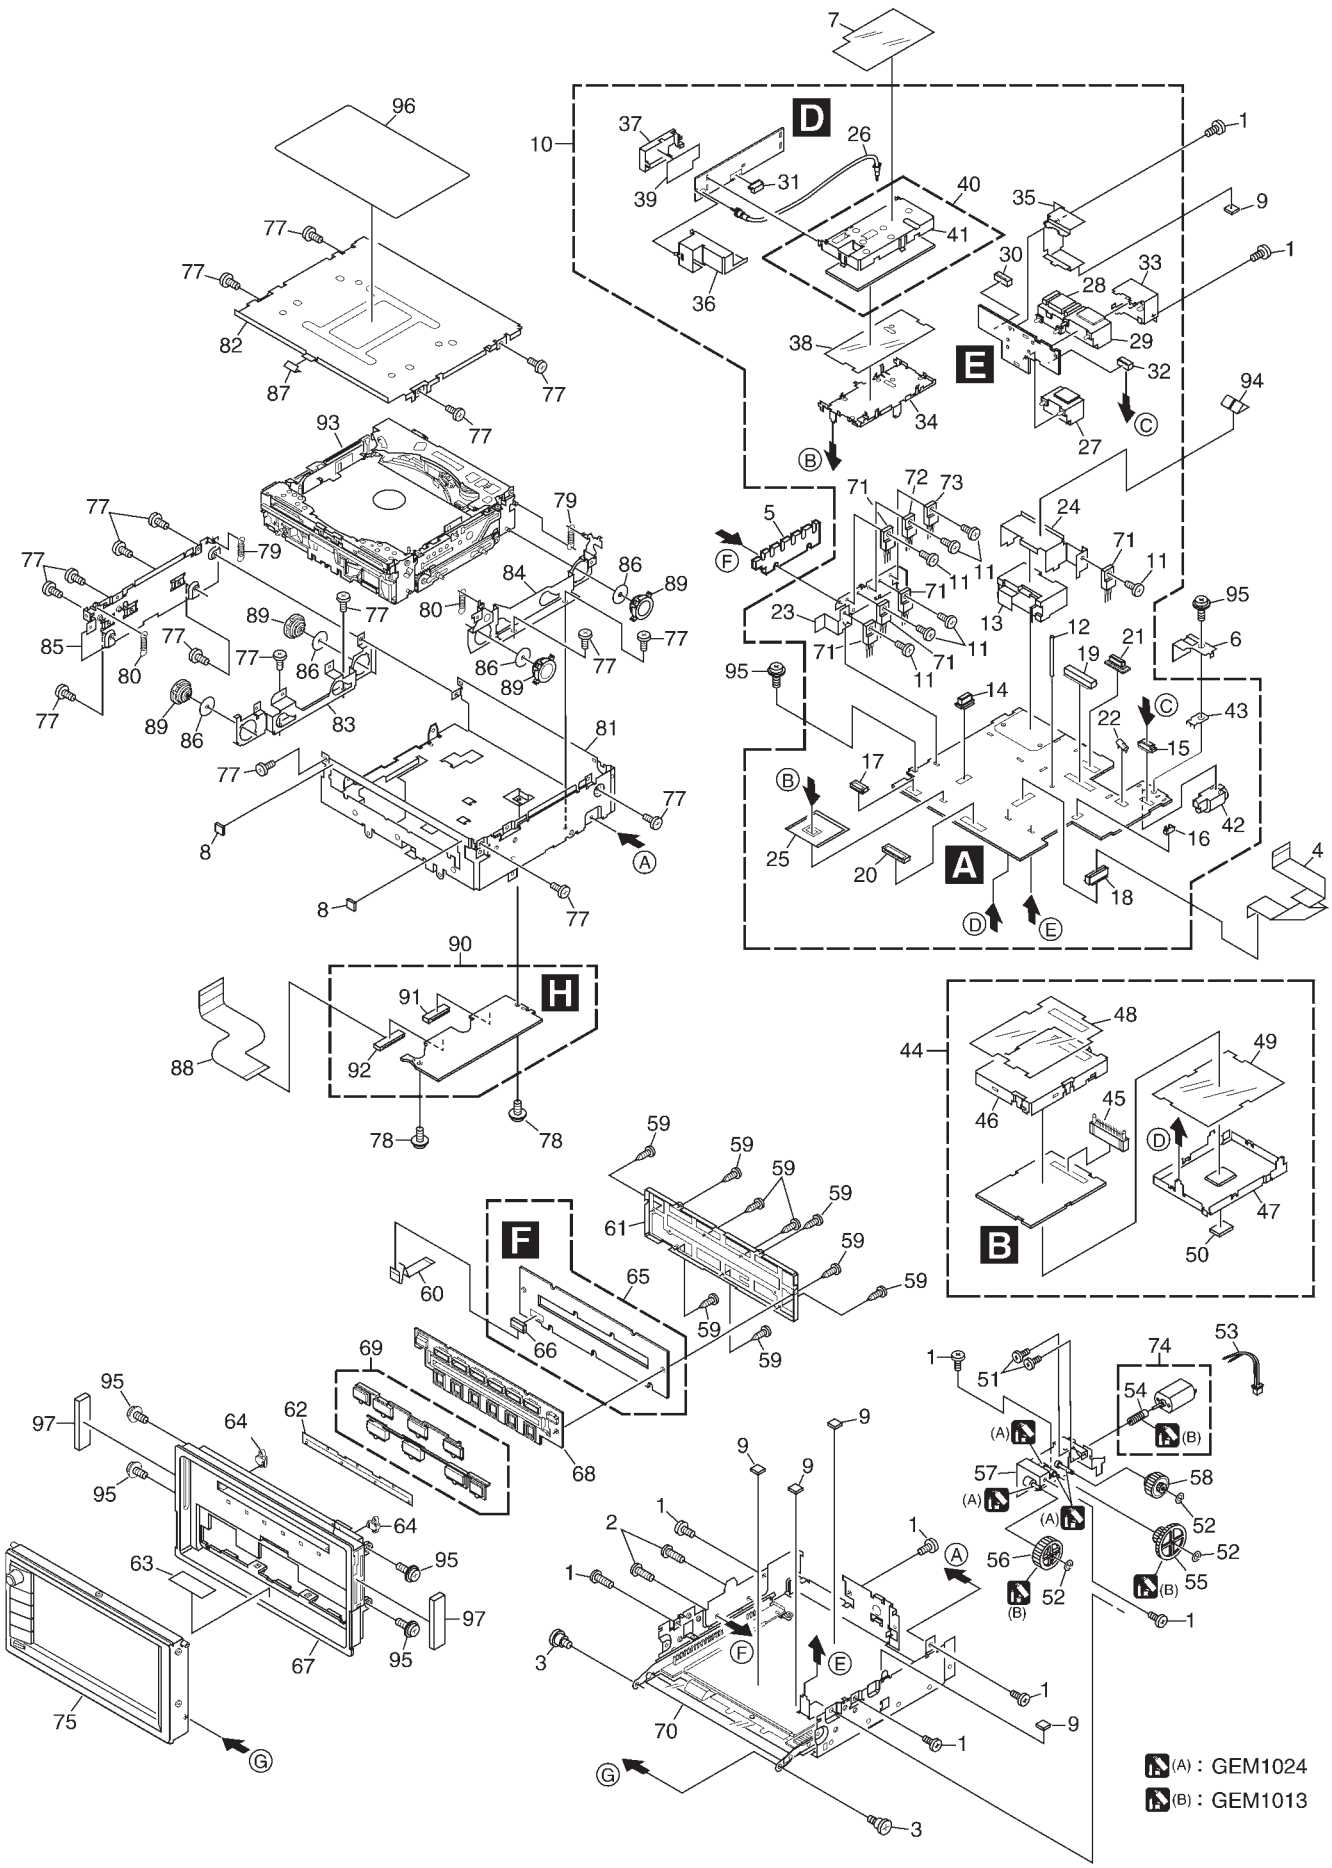

(1)EXTERIOR(1)(AVX-MG2237ZF,AVX-MG2337ZF) SECTION PARTS LIST


Mark	No.	Description	Part No.
	1	Screw	BMZ26P040FTC
	2	Screw	BMZ26P080FTC
	3	Screw(M2x2)	CBA1735
	4	Connector	CDE6618
	5	Heat Sink	CNC9449
	6	Shield	CNC9995
	7	Insulator	CNM7884
	8	Spacer	CNM7885
	9	Cushion	CNM7904
	10	Tuner Audio Unit	See Contrast table(2)
	11	Screw(M2.6x6)	CBA1732
	12	Clamper	CEF1034
	13	Connector(CN901)	CKM1349
	14	Connector(CN404)	CKS2811
	15	Connector(CN904)	CKS2811
	16	Connector(CN905)	CKS3124
	17	Connector(CN751)	CKS3810
	18	Connector(CN907)	CKS3859
	19	Connector(CN551)	CKS3982
	20	Connector(CN771)	CKS4052
	21	Connector(CN906)	CKS4065
	22	Connector(CN403)	CKX1044
	23	Holder	CNC9439
	24	Holder	CNC9440
	25	Shield	CNM7725
	26	Connector	CDH1311
	27	Connector(CN2802)	CKM1346
	28	Connector(CN2803)	CKM1347
	29	Connector(CN2804)	CKM1348
	30	Connector(CN2801)	CKS4066
	31	Connector(CN1402)	CKS4515
	32	Connector(CN2805)	CKS4515
	33	Holder	CNC9441
	34	Holder	CNC9442
	35	Holder	CNC9599
	36	Shield	CND1151
	37	Shield	CND1152
	38	Insulator	CNM7291
	39	Insulator	CNM7860
	40	FM/AM Tuner Unit	CWE1635
	41	Holder	CNC8855
	42	Antenna Jack(CN401)	HKX1054
	43	Terminal(CN402)	VNF1084
	44	DSP Unit	CWM7805
	45	Connector(CN1001)	CKS3981
	46	Shield	CNC9444
	47	Shield	CNC9445
	48	Insulator	CNM7289
	49	Insulator	CNM7290
	50	Conductor	CNM7728
	51	Screw	BMZ20P025FTC
	52	Washer	CBF1039
	53	Connector	CDE6704
	54	Gear	CNV5296
	55	Gear	CNV5297
	56	Gear	CNV5298
	57	Holder Unit	CXB7342
	58	Torque Limiter Unit	CXB8742
	59	Screw	BPZ20P060FTC
	60	Connector	CDE6619
	61	Holder	CNC9435
	62	Cover	CNM7367
	63	Cushion	CNM7905
	64	Lighting Conductor	CNV6802
	65	Panel PCB Unit	CWM7806
	66	Connector(CN1801)	CKS3965
	67	Panel Unit	CXB7758
	68	Housing Unit	CXB9194
	69	Button Unit	CXB9768
	70	Chassis Frame Assy	CXC2112
	71	Transistor(Q351,752,905,909,913)	2SB1185
	72	Transistor(Q902)	2SB1299
	73	Transistor(Q912)	2SB1299
	74	Motor Unit(M901)	CXC1191
*	75	Grille Assy	CXC2126
	76	•••••	
	77	Screw	BMZ26P040FTC
	78	Screw(M2x2.5)	CBA1624
	79	Spring(Black)	CBH2482
	80	Spring(Silver)	CBH2481
	81	Chassis	CNA2414
	82	Case	CNB2758
	83	Bracket	CNC9443
	84	Bracket	See Contrast table(2)
	85	Holder	See Contrast table(2)
	86	Sheet	CNM5981
	87	Sheet	CNM7731
	88	Flexible PCB	CNP7328
	89	Damper	CNV6608
	90	Control Unit(G2F)	CWX2589
	91	Connector(CN601)	CKS1956
	92	Connector(CN101)	CKS4512
	93	Service Mechanism Unit(G2AVX)	CXX1657
	94	Stick Finger	DNB1092
	95	Screw	IMS26P050FTC
	96	Label	CRW1462
	97	Insulator	See Contrast table(2)

(2) CONTRAST TABLE

AVX-MG2237ZF and AVX-MG2337ZF are constructed the same except for the following:

Mark	NO	Symbol and Description	AVX-MG2237ZF	AVX-MG2337ZF
	10	Tuner Audio Unit	CWM9104	CWM9105
	84	Bracket	CNC9453	CNC9601
	85	Holder	CNC9438	CNC9612
	97	Insulator	CNM8126	Not used


2.5 EXTERIOR(2)(AVX-MG2237ZF,AVX-MG2337ZF)

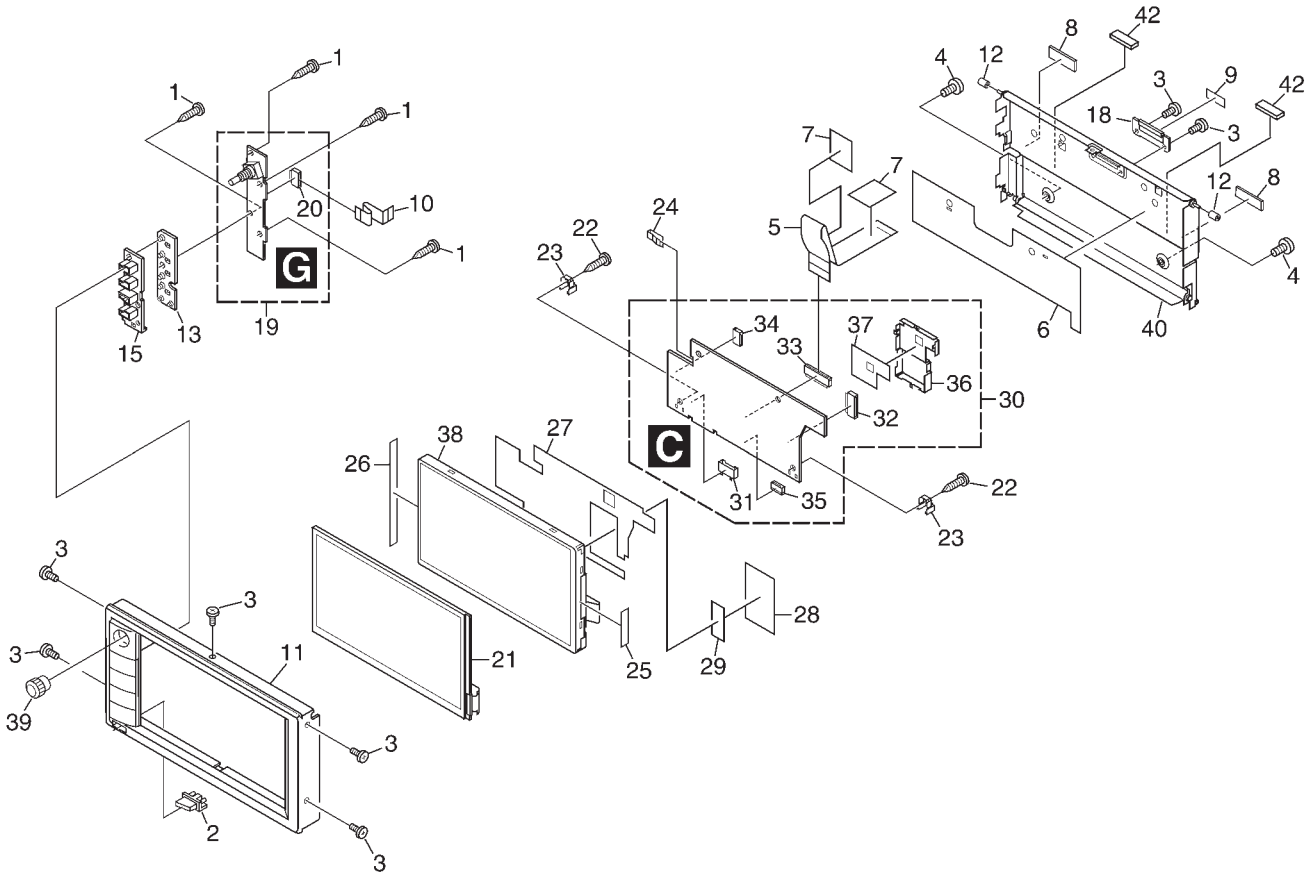

(1)EXTERIOR(2)(AVX-MG2237ZF,AVX-MG2337ZF) SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Screw	BPZ20P080FTC
	2	Button(OPEN/CLOSE)	CAC7817
	3	Screw(M2x1.925)	CBA1736
	4	Screw(M2.6x2.5)	CBA1737
	5	Connector	CDE6620
	6	Insulator	CNM7302
	7	Cover	CNM7720
	8	Cushion	CNM7727
	9	Sheet	CNM7886
	10	Flexible PCB	CNP6330
	11	Grille Unit	CXC3158
	12	Roller	CNV6198
	13	Rubber	CNV6749
	14	•••••	
	15	Housing	CNV7287
	16	•••••	
	17	•••••	
	18	Guide	CNV7234
	19	Keyboard Unit	CWM7807
	20	Connector(CN1851)	CKS4212
	21	Touch Panel	CWX2710
	22	Screw	BPZ20P050FTC
	23	Holder	CNC9456
	24	Earth	CND1003
	25	Sheet	CNM7473
	26	Sheet	CNM7648
	27	Insulator	CNM7862
	28	Insulator	CNM7863
*	29	Double Faced Tape	CNM7991
	30	Module Unit	CWM9123
	31	Connector(CN4161)	CKS3192
	32	Connector(CN4301)	CKS3991
	33	Connector(CN4001)	CKS4132
	34	Connector(CN4201)	CKS4212
	35	Connector(CN4202)	CKS4510
	36	Shield	CNC9457
	37	Insulator	CNM7303
	38	LCD Module	CWX2898
	39	Knob Unit	CXC2118
	40	Case Unit	CXC2115
	41	•••••	
	42	Cushion	CNM8451


2.6 SERVICE MECHANISM UNIT(G2AVX)(1)

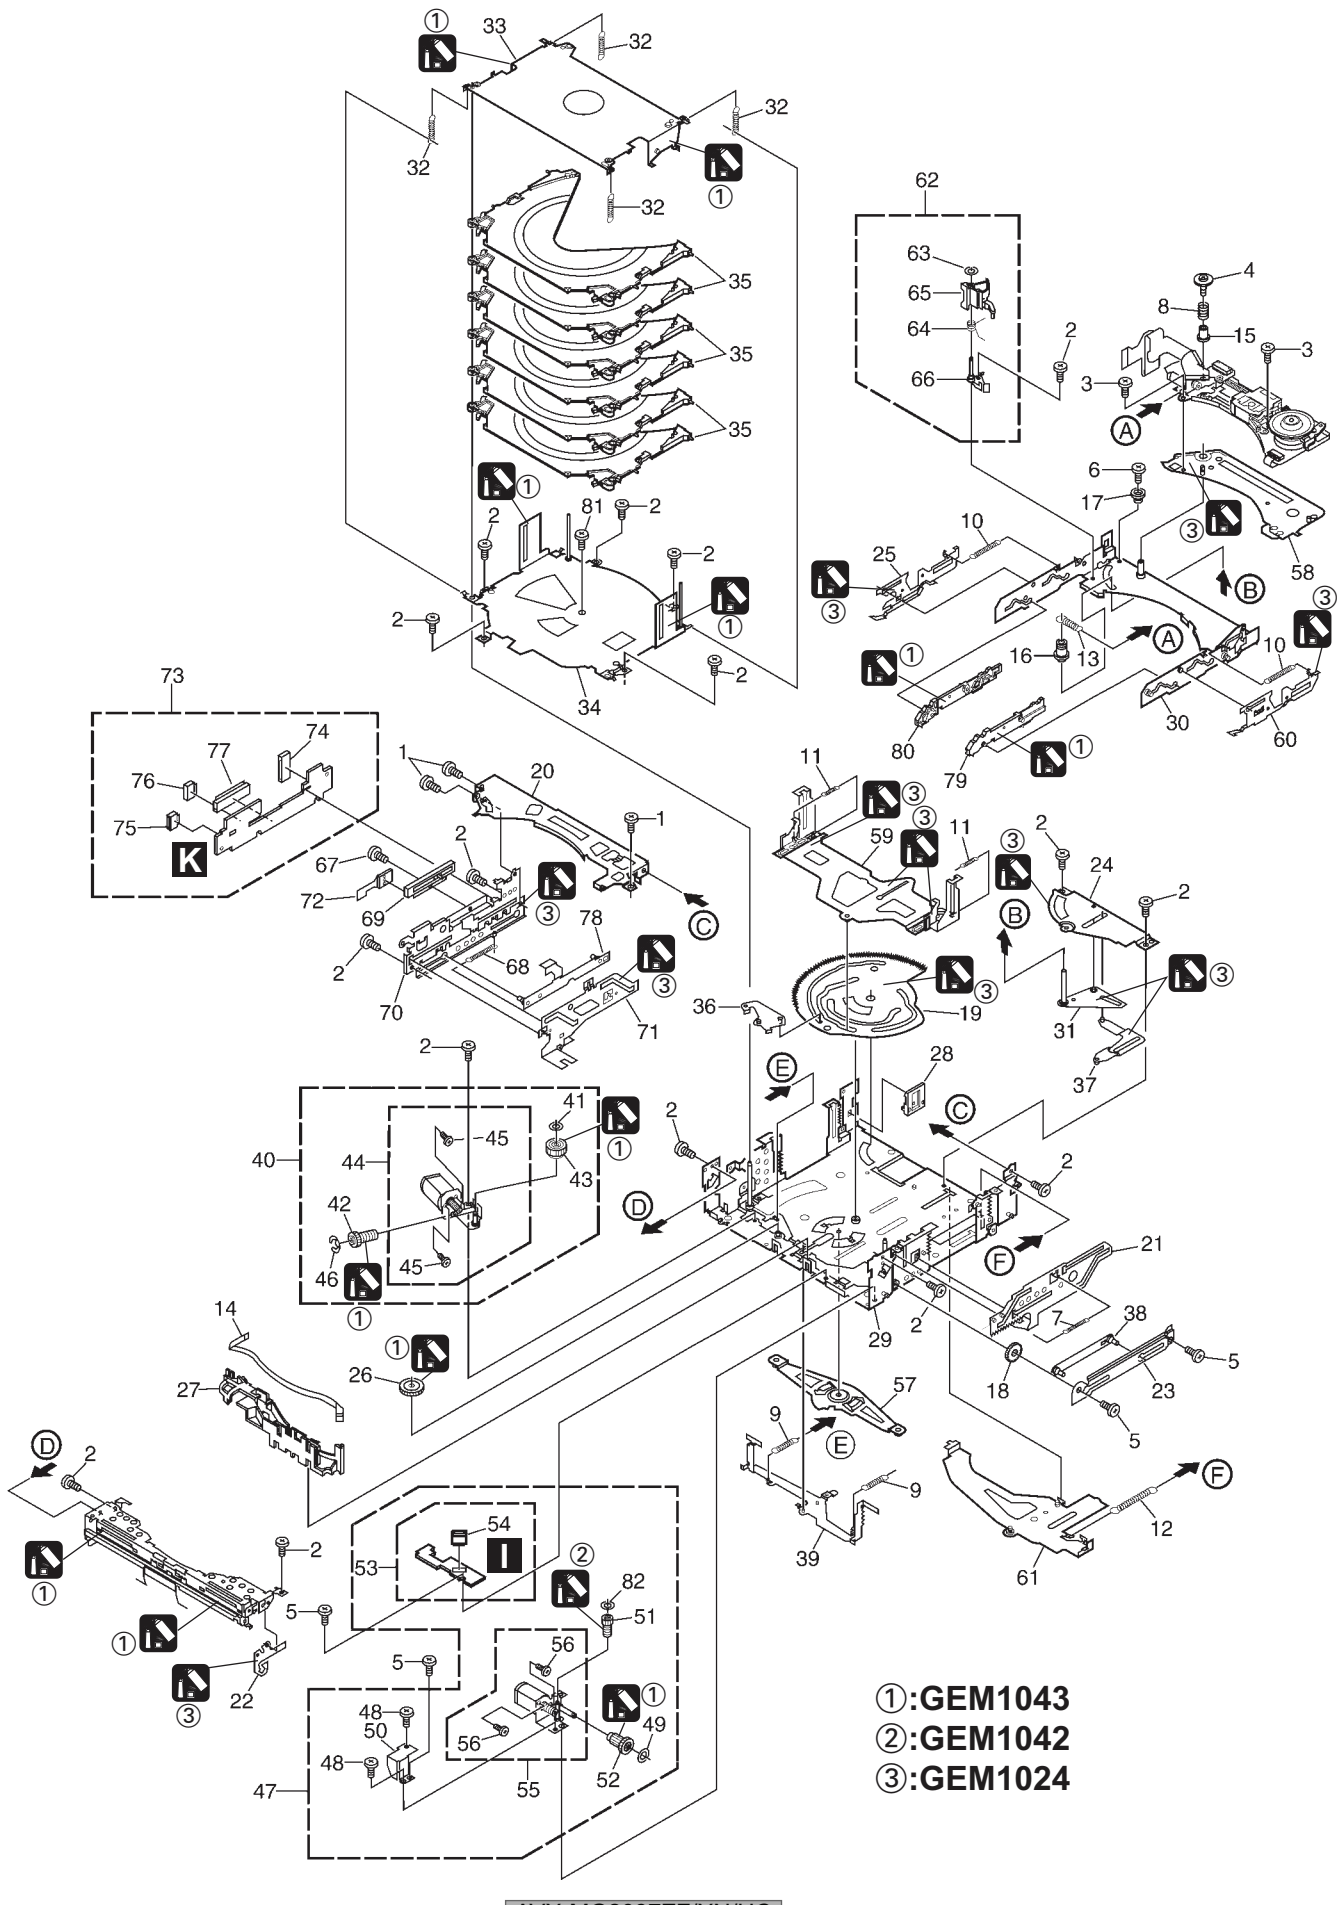

SERVICE MECHANISM UNIT(G2AVX)(1) SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Screw	BMZ20P020FZB
	2	Screw	BMZ20P025FTC
	3	Screw(M2x2)	CBA1556
	4	Screw(M2x2.5)	CBA1626
	5	Screw(M2x2.5)	CBA1609
	6	Screw(M2x4.5)	CBA1629
	7	Spring	CBH2460
	8	Spring	CBH2461
	9	Spring	CBH2484
	10	Spring	CBH2694
	11	Spring	CBH2486
	12	Spring	CBH2668
	13	Spring	CBH2500
	14	Connector	CDE6698
	15	Collar	CLA4329
	16	Collar	CLA4330
	17	Collar	CLA4331
	18	Gear	CND1649
*	19	Cam Gear	CND1650
	20	Frame	CND1651
	21	Steer	CND1655
	22	Arm	CND1657
	23	Bracket	CND1658
*	24	Bracket	CND1660
*	25	Lever	CNC9953
	26	Gear	CNV6612
	27	Holder	CNV6740
	28	Holder	CNV6738
*	29	Chassis Unit	CXC1642
*	30	Frame Unit	CXC1643
*	31	Arm Unit	CXC1647
	32	Spring	CBH2670
	33	Holder Unit	CXC1669
	34	Holder Unit	CXC1668
	35	Tray Unit	CXB6930
	36	Lever Unit	CXC1648
*	37	Lever Unit	CXC1649
	38	Lever Unit	CXC1650
*	39	Lever Unit	CXC1651
	40	Cam Motor Assy	CXB7522
	41	Washer	CBF1064
	42	Gear	CNV6610
	43	Gear	CNV6611
	44	Motor Unit(-A)(M1)	CXC1144
	45	Screw	JFZ20P020FTC
	46	Washer	YE20FUC
	47	ELV Motor Assy	CXB7523
	48	Screw	BMZ20P025FTC
	49	Washer	CBF1064
	50	Holder	CND1668
	51	Gear	CNV6634
	52	Gear	CNV6635
	53	PCB Unit(LED)	CWX2614
*	54	Connector(CN31)	CKS4523
	55	Motor Unit(-B)(M2)	CXC1145
	56	Screw	JFZ20P020FTC
*	57	Arm Unit	CXC1653
	58	Bracket Unit	CXC1654
*	59	Lever Unit	CXC2159
*	60	Lever Unit	CXC1659
*	61	Lever Unit	CXC1660
	62	Arm Assy	CXB8822
	63	Washer	CBF1038
	64	Spring	CBH2489
	65	Arm	CNV6735
	66	Bracket Unit	CXC1652
	67	Screw	BMZ20P025FTC
	68	Spring	CBH2667
	69	Volume(VR1)	CCW1023
	70	Bracket	CND1652
	71	Steer	CND1656
	72	Flexible PCB	CNP6368
	73	PCB Unit(SIDE)	CWX2613
	74	Connector(CN12)	CKS3991
*	75	Connector(CN14)	CKS4404
	76	Connector(CN13)	CKS4525
	77	Connector(CN11)	CKS4572
	78	Lever Unit	CXC1645
*	79	Lever Unit	CXB9121
*	80	Lever Unit	CXB9122
	81	Screw	JFZ20P020FTC
	82	Washer	CBF1037

2.7 SERVICE MECHANISM UNIT(G2AVX)(2)

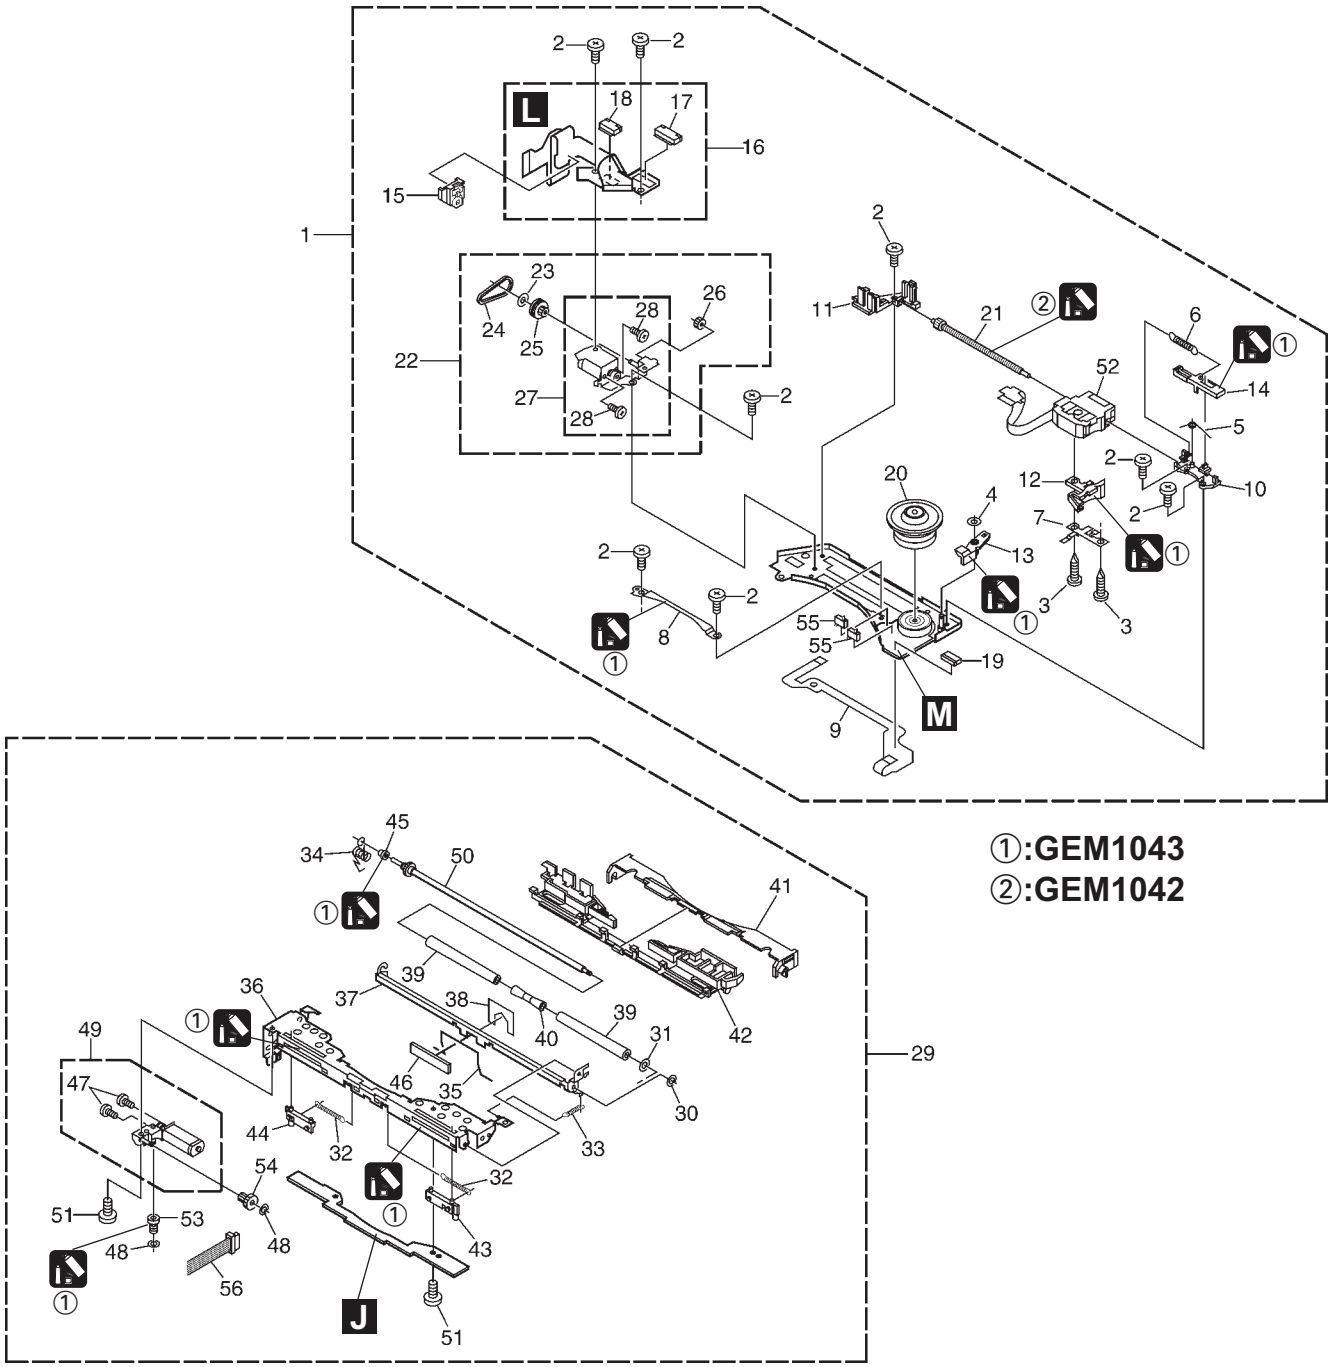

SERVICE MECHANISM UNIT(G2AVX)(2) SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Carriage Mech. Assy(G2)	CXB7520
	2	Screw(M2x2)	CBA1556
	3	Screw(M2x6)	CBA1628
	4	Washer	CBF1038
	5	Spring	CBH2453
	6	Spring	CBH2480
	7	Spring	CBL1521
*	8	Guide	CNC9402
	9	Flexible PCB	CNP6217
	10	Holder	CNV6624
	11	Holder	CNV6625
	12	Rack	CNV6642
	13	Arm	CNV6731
	14	Lever	CNV6736
	15	Holder	CNV6737
	16	PCB Unit	CWX2611
	17	Connector(CN41)	CKS3785
	18	Connector(CN42)	CKS4508
	19	Connector(CN1)	CKS4508
	20	Support Wheel Unit	CXC1657
	21	Screw Unit(-A)	CXB7518
	22	Carriage Motor Assy	CXB7521
	23	Washer	CBF1038
	24	Belt	CNT1088
	25	Pulley	CNV6627
	26	Gear	CNV6629
	27	Motor Unit(-A)(M3)	CXC1143
	28	Screw	JFZ14P020FTC
	29	Loading Mech. Assy	CXB7525
	30	Washer	CBF1037
*	31	Washer	CBF1075
*	32	Spring	CBH2450
	33	Spring	CBH2672
*	34	Spring	CBH2457
*	35	Spring	CBH2580
*	36	Frame	CND1653
*	37	Arm	CND1654
*	38	Sheet	CNM7295
	39	Roller	CNV6616
	40	Collar	CNV6617
*	41	Guide	CNV6622
*	42	Holder	CNV6636
*	43	Lever	CNV6732
*	44	Lever	CNV6733
	45	Collar	CNV6734
*	46	Holder	CNV7144
	47	Screw	JFZ12P018FTC
	48	Washer	CBF1037
*	49	Motor Unit(-C)	CXC1146
	50	Shaft Unit(-B)	CXB7528
	51	Screw	JFZ20P020FTC
	52	PU Unit(PX1)(Service)	CXX1568
*	53	Gear	CNV6620
*	54	Gear	CNV6621
	55	Switch(S1,2)	CSN1057
*	56	Connector	CDE6674

5. ELECTRICAL PARTS LIST

NOTE:

- *Parts whose parts numbers are omitted are subject to being not supplied.*
- *The part numbers shown below indicate chip components.*

Chip Resistor

RS1/◯S◯◯◯J,RS1/◯◯S◯◯◯J

Chip Capacitor (except for CQS.....)

CKS....., CCS....., CSZS.....

A

Unit Number:CWM9102(AVX-MG2037ZF)
Unit Name:Tuner Audio Unit

MISCELLANEOUS

Circuit Symbol and No.	Part Name	Part No.
IC 101	IC	PML011A
IC 151	IC	TC7S66F
IC 201	IC	NJM2068MD
IC 202	IC	NJM2068MD
IC 203	IC	NJM2068MD
IC 204	IC	NJM2068MD
IC 206	IC	NJM2068MD
IC 251	IC	NJM4558V
IC 252	IC	NJM4558V
IC 301	IC	DS36277
IC 302	IC	PCA82C250T
IC 303	IC	BA05SFP
IC 501	IC	PM4006B
IC 601	IC	S-93C56BD0I-J8
IC 602	IC	PD5904D
IC 603	IC	BU2099FV
IC 604	IC	S-80942CNMC-G9C
IC 771	IC	TC7S86FU
IC 772	Photo-interrupter	GP1S94
IC 773	IC	TC7S14FU
IC 901	IC	TK11835M
IC 902	IC	BA6288FS
IC 903	IC	TK11818M
IC 904	IC	S-812C50AMC-C3E
IC 905	IC	PAJ002A
Q 151	Transistor	DTA114EK
Q 201	Transistor	2SC2712
Q 351	Transistor	2SB1185
Q 352	Transistor	IMX1
Q 401	Transistor	2SC2412K
Q 501	Transistor	DTA124EK
Q 602	Transistor	DTC124EU
Q 603	Transistor	DTA124EK
Q 604	Transistor	DTA124EK
Q 701	Transistor	2SC2412K
Q 702	Transistor	2SC2412K
Q 703	Transistor	2SC2412K
Q 704	Transistor	2SC2412K
Q 751	Transistor	IMX1
Q 752	Transistor	2SB1185
Q 753	Transistor	2SB1132
Q 754	Transistor	DTA114EK
Q 771	Transistor	2SB1238
Q 772	Transistor	DTC114EK
Q 801	Transistor	2SA1576
Q 802	Transistor	DTC124EK
Q 803	Transistor	2SA1674
Q 810	Transistor	2SA1576
Q 811	Transistor	DTC124EK
Q 812	Transistor	2SA1674
Q 821	Transistor	2SC2412K
Q 822	Transistor	2SA1162
Q 823	Transistor	2SC2412K
Q 841	Transistor	2SC2412K
Q 842	Transistor	2SC2412K
Q 851	Transistor	DTA114EK
Q 852	Transistor	2SC2412K
Q 853	Transistor	DTC114TK
Q 882	Transistor	2SA1162
Q 883	Transistor	2SC2412K
Q 901	Transistor	2SB1238
Q 902	Transistor	2SB1299
Q 903	Transistor	IMX1
Q 904	Transistor	IMX1
Q 905	Transistor	2SB1185
Q 907	Transistor	IMX1
Q 908	Transistor	DTA124EK
Q 909	Transistor	2SB1185
Q 910	Transistor	IMX1
Q 911	Transistor	2SB1238
Q 912	Transistor	2SB1299
Q 913	Transistor	2SB1185
Q 914	Transistor	IMX1
Q 916	Transistor	DTA124EK
D 101	Diode	HZU3R3(B2)
D 213	Diode	HZS5LL(B)
D 301	Diode	HZS20L(2)
D 302	Diode	HZS20L(2)
D 303	Diode	HZS20L(2)
D 304	Diode	HZS20L(2)
D 351	Diode	HZS9L(A1)
D 352	Diode	MA111
D 701	Diode	UDZ18(B)
D 702	Diode	UDZ18(B)
D 703	Diode	UDZ18(B)
D 704	Diode	UDZ18(B)
D 705	Diode	UDZ18(B)
D 706	Diode	UDZ18(B)
D 707	Diode	UDZ18(B)

Circuit Symbol and No.	Part Name	Part No.
D 708	Diode	UDZ18(B)
D 751	Diode	HZS6L(B2)
D 752	Diode	MA153
D 753	Diode	MA153
D 754	Diode	MA153
D 755	Diode	MA153
D 756	Diode	MA153
D 757	Diode	MA153
D 758	Diode	MA153
D 759	Diode	UDZ10(B)
D 760	Diode	MA153
D 761	Diode	MA153
D 762	Diode	MA153
D 763	Diode	MA153
D 801	Diode	1SS133
D 802	Diode	1SS133
D 810	Diode	1SS133
D 811	Diode	1SS133
D 821	Diode	HZS5LL(C)
D 822	Diode	1SS133
D 823	Diode	HZS7L(B2)
D 841	Diode	HZS6L(B2)
D 842	Diode	MA152WK
D 843	Diode	MA111
D 851	Diode	HZS12L(C1)
D 861	Diode	1SS133
D 862	Diode	1SS133
D 863	Diode	1SS133
D 864	Diode	1SS133
D 871	Diode	1SS133
D 872	Diode	1SS133
D 881	Diode	HZS5LL(C)
D 882	Diode	MA111
D 883	Diode	HZS7L(B2)
D 901	Diode	HZU7R5(B3)
D 902	Diode	RB500V-40
D 903	Diode	HZS5LL(A)
D 904	Diode	HZS18L(3)
D 905	Diode	MA728
D 906	Diode	HZU8R2(B1)
D 907	Diode	MA728
D 908	Diode	UDZ8R2(B)
D 909	Diode	RM4Z-LFJ1
D 921	Diode	ERA15-02VH
D 922	Diode	1SS133
D 923	Diode	1SS133
L 101	Inductor	CTF1379
L 351	Inductor	LCTA2R2J2520
L 403	Inductor	LAU1R0K
L 404	Inductor	LAU1R0K
L 501	Inductor	LAU2R2K
L 502	Inductor	LAU2R2K
L 551	Inductor	LAU1R0K
L 552	Inductor	LAU1R0K
L 601	Chip-Inductor	LCTA2R2J3225
L 602	Inductor	LCTA2R2J2520
L 603	Inductor	CTF1379
L 604	Inductor	CTF1379
L 605	Inductor	CTF1306
L 606	Inductor	CTF1306

Circuit Symbol and No.	Part Name	Part No.
L 701	Inductor	CTF1379
L 751	Inductor	LAU2R2K
L 901	Inductor	CTF1499
L 902	Choke Coil 100µH	CTH1196
L 903	Transformer	CTX1088
L 905	Choke Coil 1.4mH	CTH1129
TH901	Thermistor	CCX1051
X 501	Crystal Resonator 4.332MHz	CSS1056
X 601	Radiator 16MHz	CSS1571
X 602	Radiator 32.768kHz	CSS1319
S 751	Spring Switch(OPEN)	CSN1046
S 752	Spring Switch(CLOSE)	CSN1046
FU901	Fuse 2A	CEK1176
FU902	Fuse 1.75A	CEK1177
FB902	Inductor	CTF1449
FB901	Inductor	CTF1449

RESISTORS

R 102	RS1/16S102J
R 103	RS1/16S103J
R 104	RS1/16S682J
R 106	RS1/16S102J
R 108	RS1/16S101J
R 151	RS1/16S104J
R 152	RS1/16S473J
R 153	RS1/16S473J
R 154	RS1/16S473J
R 155	RS1/16S473J
R 156	RS1/16S104J
R 157	RS1/16S104J
R 158	RS1/16S472J
R 159	RS1/16S472J
R 160	RS1/16S104J
R 161	RS1/16S104J
R 162	RS1/16S472J
R 163	RS1/16S472J
R 164	RS1/16S391J
R 165	RS1/16S912J
R 201	RS1/16S822J
R 202	RS1/16S822J
R 203	RS1/16S472J
R 204	RS1/16S472J
R 205	RS1/16S470J
R 206	RS1/16S470J
R 207	RS1/16S472J
R 208	RS1/16S472J
R 209	RS1/16S470J
R 210	RS1/16S470J
R 211	RS1/16S822J
R 212	RS1/16S822J
R 213	RS1/16S470J
R 214	RS1/16S470J
R 215	RS1/16S472J
R 216	RS1/16S472J
R 217	RS1/16S472J
R 218	RS1/16S472J
R 219	RS1/16S470J
R 220	RS1/16S470J
R 226	RS1/16S822J
R 227	RS1/16S470J

Circuit Symbol and No.	Part Name	Part No.
R 228		RS1/16S472J
R 229		RS1/16S472J
R 230		RS1/16S470J
R 231		RS1/16S102J
R 232		RS1/16S272J
R 233		RS1/16S473J
R 234		RS1/16S473J
R 236		RS1/16S473J
R 237		RS1/16S472J
R 238		RS1/16S472J
R 240		RS1/16S472J
R 251		RS1/16S333J
R 252		RS1/16S333J
R 253		RS1/16S333J
R 254		RS1/16S333J
R 255		RS1/16S333J
R 256		RS1/16S333J
R 257		RS1/16S333J
R 258		RS1/16S333J
R 259		RS1/16S753J
R 260		RS1/16S753J
R 261		RS1/16S753J
R 262		RS1/16S753J
R 263		RS1/16S753J
R 264		RS1/16S753J
R 265		RS1/16S753J
R 266		RS1/16S753J
R 301		RS1/16S223J
R 302		RS1/16S472J
R 303		RS1/16S472J
R 304		RS1/16S273J
R 305		RS1/16S472J
R 306		RD1/4PU470J
R 307		RD1/4PU470J
R 308		RS1/16S102J
R 351		RS1/16S223J
R 352		RS1/16S223J
R 353		RS1/16S223J
R 354		RS1/16S332J
R 355		RS1/16S121J
R 356		RS1/16S121J
R 357		RS1/16S221J
R 358		RS1/16S221J
R 359		RS1/16S222J
R 404		RS1/16S473J
R 405		RS1/16S681J
R 406		RS1/16S103J
R 407		RS1/16S681J
R 408		RS1/16S681J
R 409		RS1/16S681J
R 410		RS1/16S473J
R 411		RS1/16S681J
R 412		RS1/16S681J
R 413		RS1/16S272J
R 414		RS1/16S272J
R 415		RS1/16S393J
R 416		RS1/16S162J
R 417		RS1/16S162J
R 418		RS1/16S472J
R 419		RS1/16S473J

Circuit Symbol and No.	Part Name	Part No.
R 420		RS1/16S473J
R 424		RS1/16S222J
R 425		RS1/16S473J
R 501		RS1/16S393J
R 503		RS1/16S681J
R 504		RAB4C102J
R 505		RS1/16S102J
R 602		RS1/16S473J
R 603		RS1/16S473J
R 605		RS1/16S102J
R 607		RS1/16S474J
R 608		RS1/16S474J
R 609		RS1/16S474J
R 610		RS1/16S0R0J
R 611		RS1/16S473J
R 612		RS1/16S471J
R 613		RS1/16S102J
R 614		RS1/16S102J
R 615		RAB4C471J
R 619		RS1/16S471J
R 620		RS1/16S471J
R 621		RS1/16S471J
R 622		RAB4C471J
R 623		RS1/16S102J
R 624		RS1/16S102J
R 625		RS1/16S102J
R 626		RAB4C471J
R 627		RS1/16S471J
R 628		RS1/16S474J
R 629		RS1/16S474J
R 630		RS1/16S274J
R 631		RS1/16S274J
R 632		RS1/16S473J
R 633		RS1/16S103J
R 634		RS1/16S102J
R 635		RS1/16S274J
R 636		RS1/16S102J
R 637		RS1/16S274J
R 638		RS1/16S102J
R 640		RS1/16S102J
R 641		RAB4C102J
R 642		RS1/16S102J
R 643		RS1/16S102J
R 644		RS1/16S473J
R 649		RS1/16S0R0J
R 651		RS1/16S124J
R 652		RS1/16S102J
R 653		RS1/16S0R0J
R 654		RS1/16S473J
R 655		RAB4C102J
R 656		RS1/16S473J
R 657		RAB4C102J
R 659		RS1/16S471J
R 661		RS1/16S102J
R 662		RAB4C102J
R 663		RAB4C473J
R 664		RS1/16S472J
R 665		RS1/16S471J
R 666		RS1/16S102J
R 667		RS1/16S102J

Circuit Symbol and No.	Part Name	Part No.
R 668		RAB4C0R0J
R 669		RAB4C102J
R 680		RS1/16S473J
R 681		RS1/16S274J
R 685		RS1/16S102J
R 686		RS1/16S102J
R 688		RS1/16S471J
R 689		RS1/16S471J
R 693		RS1/16S102J
R 701		RS1/16S0R0J
R 702		RS1/16S0R0J
R 703		RS1/16S0R0J
R 704		RS1/16S0R0J
R 705		RS1/16S102J
R 706		RS1/16S102J
R 707		RS1/16S102J
R 708		RS1/16S102J
R 709		RS1/16S223J
R 710		RS1/16S223J
R 711		RS1/16S223J
R 712		RS1/16S223J
R 713		RS1/16S223J
R 714		RS1/16S223J
R 715		RS1/16S223J
R 716		RS1/16S223J
R 751		RS1/16S222J
R 752		RS1/16S222J
R 753		RS1/16S681J
R 754		RS1/16S105J
R 755		RS1/16S821J
R 757		RS1/16S223J
R 758		RS1/16S222J
R 759		RS1/16S222J
R 761		RS1/16S681J
R 762		RS1/16S473J
R 763		RS1/16S681J
R 764		RS1/16S681J
R 771		RS1/16S222J
R 772		RS1/16S222J
R 773		RS1/16S473J
R 774		RS1/16S103J
R 775		RS1/16S103J
R 776		RS1/16S473J
R 777		RS1/16S681J
R 778		RS1/16S681J
R 779		RS1/16S332J
R 801		RS1/16S220J
R 802		RS1/16S103J
R 803		RS1/16S103J
R 804		RS1/16S822J
R 805		RS1/16S103J
R 806		RD1/4PU101J
R 810		RS1/16S220J
R 811		RS1/16S103J
R 812		RS1/16S103J
R 813		RS1/16S822J
R 814		RS1/16S103J
R 815		RD1/4PU101J
R 821		RS1/16S392J
R 822		RS1/16S471J

Circuit Symbol and No.	Part Name	Part No.
R 823		RS1/16S473J
R 824		RS1/16S683J
R 825		RS1/16S473J
R 826		RD1/4PU101J
R 827		RD1/4PU102J
R 828		RS1/16S103J
R 829		RS1/16S471J
R 830		RS1/16S272J
R 832		RS1/16S223J
R 833		RS1/16S223J
R 841		RD1/4PU472J
R 842		RS1/16S222J
R 843		RS1/16S473J
R 844		RS1/16S333J
R 846		RS1/16S473J
R 847		RS1/16S103J
R 848		RS1/16S473J
R 851		RS1/16S473J
R 852		RS1/16S473J
R 853		RS1/16S473J
R 854		RS1/16S104J
R 855		RS1/16S473J
R 856		RS1/16S473J
R 858		RD1/4PU102J
R 860		RS1/16S473J
R 862		RS1/16S103J
R 863		RS1/8S362J
R 864		RD1/4PU471J
R 865		RS1/16S103J
R 866		RS1/8S362J
R 867		RS1/16S273J
R 868		RD1/4PU471J
R 871		RS1/16S102J
R 872		RS1/16S102J
R 873		RS1/16S102J
R 874		RS1/16S102J
R 875		RS1/16S102J
R 876		RS1/16S102J
R 881		RS1/16S392J
R 882		RS1/16S471J
R 883		RS1/16S473J
R 884		RS1/16S683J
R 885		RS1/16S473J
R 886		RD1/4PU101J
R 887		RS1/16S102J
R 888		RS1/16S103J
R 889		RS1/16S471J
R 890		RS1/16S102J
R 901		RS1/10S470J
R 902		RS1/10SR68J
R 903		RN1/10SK3903D
R 904		RS1/10S511J
R 905		RS1/10S151J
R 906		RN1/10SE3302D
R 907		RN1/10SK4303D
R 908		RS1/16S681J
R 909		RS1/16S621J
R 910		RS1/16S333J
R 911		RS1/16S471J
R 912		RS1/16S471J

Circuit Symbol and No.	Part Name	Part No.
R 913		RS1/16S471J
R 914		RS1/10S122J
R 915		RS1/16S223J
R 916		RS1/16S223J
R 917		RS1/16S332J
R 918		RS1/16S332J
R 919		RS1/10S102J
R 920		RS1/16S222J
R 921		RS1/16S472J
R 922		RS1/10S471J
R 923		RS1/16S821J
R 924		RS1/16S821J
R 925		RS1/10S681J
R 926		RS1/16S511J
R 927		RS1/16S223J
R 928		RS1/16S511J
R 929		RS1/16S472J
R 930		RS1/16S332J
R 931		RS1/16S124J
R 932		RS1/16S511J
R 933		RS1/16S102J
R 934		RD1/4PU2R2J
R 935		RD1/4PU2R2J
R 936		RS1/16S222J
R 937		RS1/16S911J
R 938		RS1/16S511J
R 939		RS1/16S223J
R 940		RS1/16S511J
R 941		RS1/16S224J
R 942		RS1/16S104J
R 943		RS1/16S511J
R 944		RS1/16S822J
R 945		RS1/16S332J
R 946		RS1/16S274J
R 947		RS1/16S104J
R 948		RS1/16S0R0J
R 949		RS1/16S0R0J
R 950		RS1/16S911J
R 951		RS1/16S102J
R 952		RS1/16S153J
R 953		RS1/16S332J
R 954		RS1/16S471J
R 955		RS1/4SA101J
R 956		RS1/16S0R0J
R 957		RS1/16S222J

CAPACITORS

Circuit Symbol and No.	Part Name	Part No.
C 101		CKSQYB225K10
C 102		CKSQYB225K10
C 103		CKSQYB225K10
C 104		CKSQYB225K10
C 105		CKSRYB224K16
C 106		CKSRYB224K16
C 107		CKSRYB474K10
C 108		CKSRYB474K10
C 109		CKSRYB104K16
C 110		CKSYB106K6R3
C 111		CKSYB106K6R3
C 112		CKSRYB105K10
C 113		CKSRYB104K16
C 114		CCSRCH101J50
C 116		CCSRCH101J50
C 117		CKSYB106K6R3
C 118		CKSYB106K6R3
C 120		CKSYB106K6R3
C 121		CKSRYB472K50
C 122		CKSRYB472K50
C 123		CCSRCH471J50
C 124		CCSRCH471J50
C 125		CKSRYB473K50
C 126		CCSRCH101J50
C 151		CKSRYB103K50
C 152		CKSYB106K6R3
C 153		CKSYB106K6R3
C 154		CKSRYB105K10
C 155		CKSRYB222K50
C 156		CKSRYB105K10
C 201		CCSRCH101J50
C 202		CCSRCH101J50
C 203		CCSRCH101J50
C 204		CCSRCH101J50
C 207		CKSRYB102K50
C 208		CKSRYB102K50
C 209		CKSRYB102K50
C 210		CKSRYB102K50
C 213		CCSRCH101J50
C 214		CCSRCH101J50
C 215		CCSRCH101J50
C 216		CCSRCH101J50
C 219		CKSRYB102K50
C 220		CKSRYB102K50
C 221		CKSRYB102K50
C 222		CKSRYB102K50
C 231		CCSRCH101J50
C 232		CCSRCH101J50
C 233		CCSRCH101J50
C 234		CKSRYB102K50
C 235		CKSRYB102K50
C 236		CCSRCH101J50
C 237		CEAT331M6R3
C 238		CEAL100M16
C 239		CCSRCH101J50
C 251		CCSRCH470J50
C 252		CCSRCH470J50
C 253		CCSRCH470J50
C 254		CCSRCH470J50
C 255		CCSRCH470J50
C 256		CCSRCH470J50
C 257		CCSRCH470J50
C 258		CCSRCH470J50
C 259	10µF	CCG1138
C 260	10µF	CCG1138
C 261	10µF	CCG1138
C 262	10µF	CCG1138
C 263	10µF	CCG1138
C 264	10µF	CCG1138
C 265		CKSRYB105K10
C 266		CKSRYB105K10
C 301		CKSRYB223K50
C 302		CEAL100M16

Circuit Symbol and No.	Part Name	Part No.
C 303		CEAL220M10
C 304		CKSRYB222K50
C 305		CKSRYB222K50
C 306		CCSQCH101J50
C 307		CCSRCH181J50
C 308		CCSQCH101J50
C 309		CCSRCH181J50
C 351		CKSRYB102K50
C 352		CEJQ101M16
C 353		CKSRYB104K16
C 354		CEAL100M16
C 355		CASA4R7M16
C 357		CKSRYB105K6R3
C 358		CKSYB106K6R3
C 405		CKSRYB103K50
C 406		CKSRYB183K50
C 407		CKSRYB183K50
C 408		CEJQ101M6R3
C 409		CKSRYB103K50
C 410		CEJQ101M16
C 411		CKSRYB472K50
C 412		CKSRYB103K50
C 421		CKSRYB683K16
C 501		CEAL100M16
C 502		CKSRYB104K16
C 503		CKSYB106K6R3
C 504		CKSRYB104K16
C 505		CKSRYB105K10
C 506		CKSRYB104K16
C 507		CKSRYB472K50
C 508		CCSRCH220J50
C 509		CCSRCH220J50
C 551		CKSRYB102K50
C 552		CKSRYB102K50
C 601		CKSRYB104K16
C 602		CCSRCH180J50
C 603		CKSYB106K6R3
C 604		CCSRCH101J50
C 605		CCSRCH180J50
C 607		CCSRCH220J50
C 608		CCSRCH180J50
C 609		CKSRYB104K16
C 610		CKSRYB102K50
C 611		CKSRYB103K50
C 612		CKSRYB103K50
C 613		CKSRYB103K50
C 614		CKSRYB102K50
C 615		CKSRYB102K50
C 616		CKSRYB104K16
C 617		CKSRYB104K16
C 618		CCSRCH101J50
C 619		CKSRYB104K16
C 620		CCSRCH101J50
C 702		CKSRYB103K50
C 703		CEAL470M10
C 704		CKSYB475K10
C 705		CKSYB475K10
C 706		CKSYB475K10
C 707		CKSYB475K10
C 751		CKSRYB104K16

Circuit Symbol and No.	Part Name	Part No.
C 752		CKSRYB104K16
C 771		CCSRCH681J50
C 772		CCSRCH681J50
C 801		CKSRYB103K50
C 810		CKSRYB103K50
C 811		CCSRCH101J50
C 841		CCSRCH221J50
C 842		CKSRYB103K50
C 852		CKSRYB102K50
C 853		CCSRCH181J50
C 861		CKSRYB473K50
C 862		CKSRYB473K50
C 871		CKSRYB103K50
C 881		CKSRYB224K16
C 901		CKSRYB105K10
C 902		CASA470M20
C 903		CKSRYB102K50
C 904		CKSRYB104K25
C 905		CKSRYB104K16
C 906		CKSRYB105K10
C 907		CEHAR470M16
C 908		CEJQ470M10
C 909		CEHAT331M10
C 910		CCSRCH101J50
C 911		CKSRYB102K50
C 912		CKSQYB104K25
C 913		CEJQ4R7M35
C 914		CCSRCH101J50
C 915		CKSRYB104K16
C 916		CEJQ100M25
C 917		CKSRYB102K50
C 918		CEHAT331M10
C 919		CKSRYB223K50
C 920		CKSRYB104K25
C 921		CEJQ220M10
C 922		CASA330M10
C 923		CKSRYB103K50
C 924		CEJQ470M6R3
C 925	470µF/6.3V	CCH1182
C 926	100µF/10V	CCH1323
C 927		CKSRYB103K50
C 928		CKSRYB105K10
C 929		CEHAR101M10
C 930	3300µF/16V	CCH1163(P35)
C 931		CKSRYB103K50
C 932		CKSRYB104K25
C 933		CKSRYB153K50
C 934		CKSYB105K16
C 937		CEAT102M16(P35)
C 938		CKSRYB103K50
C 939		CKSRYB103K50
C 940	0.1F/5.5V	CCL1023
C 941		CKSRYB473K50
C 942		CKSRYB104K25
C 943		CKSYB105K16
C 944		CCSRCH102J50

A

Unit Number:CWM9103(AVX-MG2137ZF)
Unit Name:Tuner Audio Unit

MISCELLANEOUS

Circuit Symbol and No.	Part Name	Part No.
IC 101	IC	PML011A
IC 151	IC	TC7S66F
IC 201	IC	NJM2068MD
IC 202	IC	NJM2068MD
IC 203	IC	NJM2068MD
IC 204	IC	NJM2068MD
IC 206	IC	NJM2068MD
IC 251	IC	NJM4558V
IC 252	IC	NJM4558V
IC 301	IC	DS36277
IC 302	IC	PCA82C250T
IC 303	IC	BA05SFP
IC 501	IC	PM4006B
IC 601	IC	S-93C56BD0I-J8
IC 602	IC	PD5904D
IC 603	IC	BU2099FV
IC 604	IC	S-80942CNMC-G9C
IC 771	IC	TC7S86FU
IC 772	Photo-interrupter	GP1S94
IC 773	IC	TC7S14FU
IC 901	IC	TK11835M
IC 902	IC	BA6288FS
IC 903	IC	TK11818M
IC 904	IC	S-812C50AMC-C3E
IC 905	IC	PAJ002A
Q 151	Transistor	DTA114EK
Q 201	Transistor	2SC2712
Q 351	Transistor	2SB1185
Q 352	Transistor	IMX1
Q 401	Transistor	2SC2412K
Q 501	Transistor	DTA124EK
Q 602	Transistor	DTC124EU
Q 603	Transistor	DTA124EK
Q 604	Transistor	DTA124EK
Q 701	Transistor	2SC2412K
Q 702	Transistor	2SC2412K
Q 703	Transistor	2SC2412K
Q 704	Transistor	2SC2412K
Q 751	Transistor	IMX1
Q 752	Transistor	2SB1185
Q 753	Transistor	2SB1132
Q 754	Transistor	DTA114EK
Q 771	Transistor	2SB1238
Q 772	Transistor	DTC114EK
Q 810	Transistor	2SA1576
Q 811	Transistor	DTC124EK
Q 812	Transistor	2SA1674
Q 821	Transistor	2SC2412K
Q 822	Transistor	2SA1162
Q 823	Transistor	2SC2412K
Q 841	Transistor	2SC2412K
Q 842	Transistor	2SC2412K
Q 851	Transistor	DTA114EK
Q 852	Transistor	2SC2412K
Q 853	Transistor	DTC114TK
Q 883	Transistor	2SC2412K
Q 901	Transistor	2SB1238
Q 902	Transistor	2SB1299
Q 903	Transistor	IMX1
Q 904	Transistor	IMX1
Q 905	Transistor	2SB1185
Q 907	Transistor	IMX1
Q 908	Transistor	DTA124EK
Q 909	Transistor	2SB1185
Q 910	Transistor	IMX1
Q 911	Transistor	2SB1238
Q 912	Transistor	2SB1299
Q 913	Transistor	2SB1185
Q 914	Transistor	IMX1
Q 916	Transistor	DTA124EK
D 101	Diode	HZU3R3(B2)
D 213	Diode	HZS5LL(B)
D 301	Diode	HZS20L(2)
D 302	Diode	HZS20L(2)
D 303	Diode	HZS20L(2)
D 304	Diode	HZS20L(2)
D 351	Diode	HZS9L(A1)
D 352	Diode	MA111
D 701	Diode	UDZ18(B)
D 702	Diode	UDZ18(B)
D 703	Diode	UDZ18(B)
D 704	Diode	UDZ18(B)
D 705	Diode	UDZ18(B)
D 706	Diode	UDZ18(B)
D 707	Diode	UDZ18(B)
D 708	Diode	UDZ18(B)
D 751	Diode	HZS6L(B2)
D 752	Diode	MA153
D 753	Diode	MA153
D 754	Diode	MA153
D 755	Diode	MA153
D 756	Diode	MA153
D 757	Diode	MA153
D 758	Diode	MA153
D 759	Diode	UDZ10(B)
D 760	Diode	MA153
D 761	Diode	MA153
D 762	Diode	MA153
D 763	Diode	MA153
D 810	Diode	1SS133
D 811	Diode	1SS133
D 821	Diode	HZS5LL(C)
D 822	Diode	1SS133
D 823	Diode	HZS7L(B2)
D 841	Diode	HZS6L(B2)
D 842	Diode	MA152WK
D 843	Diode	MA111
D 851	Diode	HZS12L(C1)
D 861	Diode	1SS133
D 862	Diode	1SS133
D 863	Diode	1SS133
D 864	Diode	1SS133
D 871	Diode	1SS133
D 872	Diode	1SS133
D 883	Diode	HZS7L(B2)

Circuit Symbol and No.	Part Name	Part No.
D 901	Diode	HZU7R5(B3)
D 902	Diode	RB500V-40
D 903	Diode	HZS5LL(A)
D 904	Diode	HZS18L(3)
D 905	Diode	MA728
D 906	Diode	HZU8R2(B1)
D 907	Diode	MA728
D 908	Diode	UDZ8R2(B)
D 909	Diode	RM4Z-LFJ1
D 921	Diode	ERA15-02VH
D 922	Diode	1SS133
D 923	Diode	1SS133
L 101	Inductor	CTF1379
L 351	Inductor	LCTA2R2J2520
L 403	Inductor	LAU1R0K
L 404	Inductor	LAU1R0K
L 501	Inductor	LAU2R2K
L 502	Inductor	LAU2R2K
L 551	Inductor	LAU1R0K
L 552	Inductor	LAU1R0K
L 601	Chip-Inductor	LCTA2R2J3225
L 602	Inductor	LCTA2R2J2520
L 603	Inductor	CTF1379
L 604	Inductor	CTF1379
L 605	Inductor	CTF1306
L 606	Inductor	CTF1306
L 701	Inductor	CTF1379
L 751	Inductor	LAU2R2K
L 901	Inductor	CTF1499
L 902	Choke Coil 100µH	CTH1196
L 903	Transformer	CTX1088
L 905	Choke Coil 1.4mH	CTH1129
TH901	Thermistor	CCX1051
X 501	Crystal Resonator 4.332MHz	CSS1056
X 601	Radiator 16MHz	CSS1571
X 602	Radiator 32.768kHz	CSS1319
S 751	Spring Switch(OPEN)	CSN1046
S 752	Spring Switch(CLOSE)	CSN1046
FU901	Fuse 2A	CEK1176
FU902	Fuse 1.75A	CEK1177
FB901	Inductor	CTF1449
FB902	Inductor	CTF1449

RESISTORS

Circuit Symbol and No.	Part Name	Part No.
R 102		RS1/16S102J
R 103		RS1/16S103J
R 104		RS1/16S682J
R 106		RS1/16S102J
R 108		RS1/16S101J
R 151		RS1/16S104J
R 152		RS1/16S473J
R 153		RS1/16S473J
R 154		RS1/16S473J
R 155		RS1/16S473J
R 156		RS1/16S104J
R 157		RS1/16S104J
R 158		RS1/16S332J
R 159		RS1/16S332J
R 160		RS1/16S683J
R 161		RS1/16S683J
R 162		RS1/16S472J
R 163		RS1/16S472J
R 164		RS1/16S391J
R 165		RS1/16S912J
R 201		RS1/16S562J
R 202		RS1/16S562J
R 203		RS1/16S472J
R 204		RS1/16S472J
R 205		RS1/16S470J
R 206		RS1/16S470J
R 207		RS1/16S472J
R 208		RS1/16S472J
R 209		RS1/16S470J
R 210		RS1/16S470J
R 211		RS1/16S562J
R 212		RS1/16S562J
R 213		RS1/16S470J
R 214		RS1/16S470J
R 215		RS1/16S472J
R 216		RS1/16S472J
R 217		RS1/16S472J
R 218		RS1/16S472J
R 219		RS1/16S470J
R 220		RS1/16S470J
R 226		RS1/16S562J
R 227		RS1/16S470J
R 228		RS1/16S472J
R 229		RS1/16S472J
R 230		RS1/16S470J
R 231		RS1/16S102J
R 232		RS1/16S272J
R 233		RS1/16S473J
R 234		RS1/16S473J
R 236		RS1/16S473J
R 237		RS1/16S472J
R 238		RS1/16S472J
R 240		RS1/16S472J
R 251		RS1/16S333J
R 252		RS1/16S333J
R 253		RS1/16S333J
R 254		RS1/16S333J
R 255		RS1/16S333J
R 256		RS1/16S333J
R 257		RS1/16S333J
R 258		RS1/16S333J
R 259		RS1/16S753J
R 260		RS1/16S753J
R 261		RS1/16S753J
R 262		RS1/16S753J
R 263		RS1/16S753J
R 264		RS1/16S753J
R 265		RS1/16S753J
R 266		RS1/16S753J
R 301		RS1/16S223J
R 302		RS1/16S472J
R 303		RS1/16S472J
R 304		RS1/16S273J
R 305		RS1/16S472J
R 306		RD1/4PU470J
R 307		RD1/4PU470J

Circuit Symbol and No.	Part Name	Part No.
R 308		RS1/16S102J
R 351		RS1/16S223J
R 352		RS1/16S223J
R 353		RS1/16S223J
R 354		RS1/16S332J
R 355		RS1/16S121J
R 356		RS1/16S121J
R 357		RS1/16S221J
R 358		RS1/16S221J
R 359		RS1/16S222J
R 404		RS1/16S473J
R 405		RS1/16S681J
R 406		RS1/16S103J
R 407		RS1/16S681J
R 408		RS1/16S681J
R 409		RS1/16S681J
R 410		RS1/16S473J
R 411		RS1/16S681J
R 412		RS1/16S681J
R 413		RS1/16S272J
R 414		RS1/16S272J
R 415		RS1/16S393J
R 416		RS1/16S162J
R 417		RS1/16S162J
R 418		RS1/16S472J
R 419		RS1/16S473J
R 420		RS1/16S473J
R 424		RS1/16S222J
R 425		RS1/16S473J
R 501		RS1/16S393J
R 503		RS1/16S681J
R 504		RAB4C102J
R 505		RS1/16S102J
R 602		RS1/16S473J
R 603		RS1/16S473J
R 605		RS1/16S102J
R 607		RS1/16S474J
R 608		RS1/16S474J
R 609		RS1/16S474J
R 610		RS1/16S0R0J
R 611		RS1/16S473J
R 612		RS1/16S471J
R 613		RS1/16S102J
R 614		RS1/16S102J
R 615		RAB4C471J
R 619		RS1/16S471J
R 620		RS1/16S471J
R 621		RS1/16S471J
R 622		RAB4C471J
R 623		RS1/16S102J
R 624		RS1/16S102J
R 625		RS1/16S102J
R 626		RAB4C471J
R 627		RS1/16S471J
R 628		RS1/16S474J
R 629		RS1/16S474J
R 631		RS1/16S473J
R 632		RS1/16S473J
R 633		RS1/16S103J
R 634		RS1/16S102J

Circuit Symbol and No.	Part Name	Part No.
R 635		RS1/16S274J
R 636		RS1/16S102J
R 637		RS1/16S274J
R 638		RS1/16S102J
R 640		RS1/16S102J
R 641		RAB4C102J
R 642		RS1/16S102J
R 643		RS1/16S102J
R 644		RS1/16S473J
R 649		RS1/16S0R0J
R 651		RS1/16S124J
R 652		RS1/16S102J
R 653		RS1/16S0R0J
R 654		RS1/16S473J
R 655		RAB4C102J
R 656		RS1/16S473J
R 657		RAB4C102J
R 659		RS1/16S471J
R 661		RS1/16S102J
R 662		RAB4C102J
R 663		RAB4C473J
R 664		RS1/16S472J
R 665		RS1/16S471J
R 666		RS1/16S102J
R 667		RS1/16S102J
R 668		RAB4C0R0J
R 669		RAB4C102J
R 680		RS1/16S473J
R 681		RS1/16S274J
R 685		RS1/16S102J
R 686		RS1/16S102J
R 688		RS1/16S471J
R 689		RS1/16S471J
R 693		RS1/16S102J
R 701		RS1/16S0R0J
R 702		RS1/16S0R0J
R 703		RS1/16S0R0J
R 704		RS1/16S0R0J
R 705		RS1/16S102J
R 706		RS1/16S102J
R 707		RS1/16S102J
R 708		RS1/16S102J
R 709		RS1/16S223J
R 710		RS1/16S223J
R 711		RS1/16S223J
R 712		RS1/16S223J
R 713		RS1/16S223J
R 714		RS1/16S223J
R 715		RS1/16S223J
R 716		RS1/16S223J
R 751		RS1/16S222J
R 752		RS1/16S222J
R 753		RS1/16S681J
R 754		RS1/16S105J
R 755		RS1/16S821J
R 757		RS1/16S223J
R 758		RS1/16S222J
R 759		RS1/16S222J
R 761		RS1/16S681J
R 762		RS1/16S473J

Circuit Symbol and No.	Part Name	Part No.
R 763		RS1/16S681J
R 764		RS1/16S681J
R 771		RS1/16S222J
R 772		RS1/16S222J
R 773		RS1/16S473J
R 774		RS1/16S103J
R 775		RS1/16S103J
R 776		RS1/16S473J
R 777		RS1/16S681J
R 778		RS1/16S681J
R 779		RS1/16S332J
R 810		RS1/16S220J
R 811		RS1/16S103J
R 812		RS1/16S103J
R 813		RS1/16S822J
R 814		RS1/16S103J
R 815		RD1/4PU101J
R 821		RS1/16S822J
R 822		RS1/16S471J
R 823		RS1/16S473J
R 824		RS1/16S104J
R 825		RS1/16S473J
R 826		RD1/4PU101J
R 827		RD1/4PU102J
R 828		RS1/16S103J
R 829		RS1/16S471J
R 830		RS1/16S393J
R 832		RS1/16S223J
R 833		RS1/16S223J
R 841		RD1/4PU472J
R 842		RS1/16S222J
R 843		RS1/16S473J
R 844		RS1/16S333J
R 846		RS1/16S473J
R 847		RS1/16S103J
R 848		RS1/16S473J
R 851		RS1/16S473J
R 852		RS1/16S473J
R 853		RS1/16S473J
R 854		RS1/16S104J
R 855		RS1/16S473J
R 856		RS1/16S473J
R 858		RD1/4PU102J
R 860		RS1/16S473J
R 862		RS1/16S103J
R 863		RS1/8S362J
R 864		RD1/4PU471J
R 865		RS1/16S103J
R 866		RS1/8S362J
R 867		RS1/16S273J
R 868		RD1/4PU471J
R 871		RS1/16S102J
R 872		RS1/16S102J
R 873		RS1/16S102J
R 874		RS1/16S102J
R 875		RS1/16S102J
R 876		RS1/16S102J
R 883		RS1/16S473J
R 884		RS1/16S683J
R 885		RS1/16S473J

Circuit Symbol and No.	Part Name	Part No.
R 887		RS1/16S102J
R 888		RS1/16S103J
R 890		RS1/16S102J
R 901		RS1/10S470J
R 902		RS1/10SR68J
R 903		RN1/10SK3903D
R 904		RS1/10S511J
R 905		RS1/10S151J
R 906		RN1/10SE3302D
R 907		RN1/10SK4303D
R 908		RS1/16S681J
R 909		RS1/16S621J
R 910		RS1/16S333J
R 911		RS1/16S471J
R 912		RS1/16S471J
R 913		RS1/16S471J
R 914		RS1/10S122J
R 915		RS1/16S223J
R 916		RS1/16S223J
R 917		RS1/16S332J
R 918		RS1/16S332J
R 919		RS1/10S102J
R 920		RS1/16S222J
R 921		RS1/16S472J
R 922		RS1/10S471J
R 923		RS1/16S821J
R 924		RS1/16S821J
R 925		RS1/10S681J
R 926		RS1/16S511J
R 927		RS1/16S223J
R 928		RS1/16S511J
R 929		RS1/16S472J
R 930		RS1/16S332J
R 931		RS1/16S124J
R 932		RS1/16S511J
R 933		RS1/16S102J
R 934		RD1/4PU2R2J
R 935		RD1/4PU2R2J
R 936		RS1/16S222J
R 937		RS1/16S911J
R 938		RS1/16S511J
R 939		RS1/16S223J
R 940		RS1/16S511J
R 941		RS1/16S224J
R 942		RS1/16S104J
R 943		RS1/16S511J
R 944		RS1/16S822J
R 945		RS1/16S332J
R 946		RS1/16S274J
R 947		RS1/16S104J
R 948		RS1/16S0R0J
R 949		RS1/16S0R0J
R 950		RS1/16S911J
R 951		RS1/16S102J
R 952		RS1/16S153J
R 953		RS1/16S332J
R 954		RS1/16S471J
R 955		RS1/4SA101J
R 956		RS1/16S0R0J
R 957		RS1/16S222J

CAPACITORS

Circuit Symbol and No.	Part Name	Part No.
C 101		CKSQYB225K10
C 102		CKSQYB225K10
C 103		CKSQYB225K10
C 104		CKSQYB225K10
C 105		CKSRYB224K16
C 106		CKSRYB224K16
C 107		CKSRYB474K10
C 108		CKSRYB474K10
C 109		CKSRYB104K16
C 110		CKSYB106K6R3
C 111		CKSYB106K6R3
C 112		CKSRYB105K10
C 113		CKSRYB104K16
C 114		CCSRCH101J50
C 116		CCSRCH101J50
C 117		CKSYB106K6R3
C 118		CKSYB106K6R3
C 120		CKSYB106K6R3
C 121		CKSRYB472K50
C 122		CKSRYB472K50
C 123		CCSRCH471J50
C 124		CCSRCH471J50
C 125		CKSRYB473K50
C 126		CCSRCH101J50
C 151		CKSRYB103K50
C 152		CKSYB106K6R3
C 153		CKSYB106K6R3
C 154		CKSRYB105K10
C 155		CKSRYB222K50
C 156		CKSRYB105K10
C 201		CCSRCH101J50
C 202		CCSRCH101J50
C 203		CCSRCH101J50
C 204		CCSRCH101J50
C 207		CKSRYB102K50
C 208		CKSRYB102K50
C 209		CKSRYB102K50
C 210		CKSRYB102K50
C 213		CCSRCH101J50
C 214		CCSRCH101J50
C 215		CCSRCH101J50
C 216		CCSRCH101J50
C 219		CKSRYB102K50
C 220		CKSRYB102K50
C 221		CKSRYB102K50
C 222		CKSRYB102K50
C 231		CCSRCH101J50
C 232		CCSRCH101J50
C 233		CCSRCH101J50
C 234		CKSRYB102K50
C 235		CKSRYB102K50
C 236		CCSRCH101J50
C 237		CEAT331M6R3
C 238		CEAL100M16
C 239		CCSRCH101J50
C 251		CCSRCH470J50
C 252		CCSRCH470J50
C 253		CCSRCH470J50
C 254		CCSRCH470J50
C 255		CCSRCH470J50
C 256		CCSRCH470J50
C 257		CCSRCH470J50
C 258		CCSRCH470J50
C 259	10µF	CCG1138
C 260	10µF	CCG1138
C 261	10µF	CCG1138
C 262	10µF	CCG1138
C 263	10µF	CCG1138
C 264	10µF	CCG1138
C 265		CKSRYB105K10
C 266		CKSRYB105K10
C 301		CKSRYB223K50
C 302		CEAL100M16
C 303		CEAL220M10
C 304		CKSRYB222K50
C 305		CKSRYB222K50
C 306		CCSQCH101J50
C 307		CCSRCH181J50
C 308		CCSQCH101J50
C 309		CCSRCH181J50
C 351		CKSRYB102K50
C 352		CEJQ101M16
C 353		CKSRYB104K16
C 354		CEAL100M16
C 355		CASA4R7M16
C 357		CKSRYB105K6R3
C 358		CKSYB106K6R3
C 405		CKSRYB103K50
C 406		CKSRYB183K50
C 407		CKSRYB183K50
C 408		CEJQ101M6R3
C 409		CKSRYB103K50
C 410		CEJQ101M16
C 411		CKSRYB472K50
C 412		CKSRYB103K50
C 421		CKSRYB474K10
C 501		CEAL100M16
C 502		CKSRYB104K16
C 503		CKSYB106K6R3
C 504		CKSRYB104K16
C 505		CKSRYB105K10
C 506		CKSRYB104K16
C 507		CKSRYB472K50
C 508		CCSRCH220J50
C 509		CCSRCH220J50
C 551		CKSRYB102K50
C 552		CKSRYB102K50
C 601		CKSRYB104K16
C 602		CCSRCH180J50
C 603		CKSYB106K6R3
C 604		CCSRCH101J50
C 605		CCSRCH180J50
C 607		CCSRCH220J50
C 608		CCSRCH180J50
C 609		CKSRYB104K16
C 610		CKSRYB102K50
C 611		CKSRYB103K50
C 612		CKSRYB103K50

Circuit Symbol and No.	Part Name	Part No.
C 613		CKSRYB103K50
C 614		CKSRYB102K50
C 615		CKSRYB102K50
C 616		CKSRYB104K16
C 617		CKSRYB104K16
C 618		CCSRCH101J50
C 619		CKSRYB104K16
C 620		CCSRCH101J50
C 702		CKSRYB103K50
C 703		CEAL470M10
C 704		CKSYB475K10
C 705		CKSYB475K10
C 706		CKSYB475K10
C 707		CKSYB475K10
C 751		CKSRYB104K16
C 752		CKSRYB104K16
C 771		CCSRCH681J50
C 772		CCSRCH681J50
C 810		CKSRYB103K50
C 811		CCSRCH101J50
C 841		CCSRCH221J50
C 842		CKSRYB103K50
C 852		CKSRYB102K50
C 853		CCSRCH181J50
C 861		CKSRYB473K50
C 862		CKSRYB473K50
C 871		CKSRYB103K50
C 881		CKSRYB224K16
C 901		CKSRYB105K10
C 902		CASA470M20
C 903		CKSRYB102K50
C 904		CKSRYB104K25
C 905		CKSRYB104K16
C 906		CKSRYB105K10
C 907		CEHAR470M16
C 908		CEJQ470M10
C 909		CEHAT331M10
C 910		CCSRCH101J50
C 911		CKSRYB102K50
C 912		CKSQYB104K25
C 913		CEJQ4R7M35
C 914		CCSRCH101J50
C 915		CKSRYB104K16
C 916		CEJQ100M25
C 917		CKSRYB102K50
C 918		CEHAT331M10
C 919		CKSRYB223K50
C 920		CKSRYB104K25
C 921		CEJQ220M10
C 922		CASA330M10
C 923		CKSRYB103K50
C 924		CEJQ470M6R3
C 925	470µF/6.3V	CCH1182
C 926	100µF/10V	CCH1323
C 927		CKSRYB103K50
C 928		CKSRYB105K10
C 929		CEHAR101M10
C 930	3300µF/16V	CCH1163(P35)
C 931		CKSRYB103K50
C 932		CKSRYB104K25
C 933		CKSRYB153K50
C 934		CKSYB105K16
C 937		CEAT102M16(P35)
C 938		CKSRYB103K50
C 939		CKSRYB103K50
C 940	0.1F/5.5V	CCL1023
C 941		CKSRYB473K50
C 942		CKSRYB104K25
C 943		CKSYB105K16
C 944		CCSRCH102J50

A

Unit Number:CWM9104(AVX-MG2237ZF)
Unit Name:Tuner Audio Unit

MISCELLANEOUS

IC 101	IC	PML011A
IC 151	IC	TC7S66F
IC 201	IC	NJM2068MD
IC 202	IC	NJM2068MD
IC 203	IC	NJM2068MD
IC 204	IC	NJM2068MD
IC 206	IC	NJM2068MD
IC 251	IC	NJM4558V
IC 252	IC	NJM4558V
IC 301	IC	DS36277
IC 302	IC	PCA82C250T
IC 303	IC	BA05SFP
IC 501	IC	PM4006B
IC 601	IC	S-93C56BD0I-J8
IC 602	IC	PD5904D
IC 603	IC	BU2099FV
IC 604	IC	S-80942CNMC-G9C
IC 771	IC	TC7S86FU
IC 772	Photo-interrupter	GP1S94
IC 773	IC	TC7S14FU
IC 901	IC	TK11835M
IC 902	IC	BA6288FS
IC 903	IC	TK11818M
IC 904	IC	S-812C50AMC-C3E
IC 905	IC	PAJ002A
Q 151	Transistor	DTA114EK
Q 201	Transistor	2SC2712
Q 351	Transistor	2SB1185
Q 352	Transistor	IMX1
Q 401	Transistor	2SC2412K
Q 501	Transistor	DTA124EK
Q 602	Transistor	DTC124EU
Q 603	Transistor	DTA124EK
Q 604	Transistor	DTA124EK
Q 701	Transistor	2SC2412K
Q 702	Transistor	2SC2412K
Q 703	Transistor	2SC2412K
Q 704	Transistor	2SC2412K
Q 751	Transistor	IMX1
Q 752	Transistor	2SB1185
Q 753	Transistor	2SB1132

Circuit Symbol and No.	Part Name	Part No.
Q 771	Transistor	2SB1238
Q 772	Transistor	DTC114EK
Q 810	Transistor	2SA1576
Q 811	Transistor	DTC124EK
Q 812	Transistor	2SA1674
Q 821	Transistor	2SC2412K
Q 822	Transistor	2SA1162
Q 823	Transistor	2SC2412K
Q 841	Transistor	2SC2412K
Q 842	Transistor	2SC2412K
Q 851	Transistor	DTA114EK
Q 852	Transistor	2SC2412K
Q 853	Transistor	DTC114TK
Q 854	Transistor	DTA114EK
Q 883	Transistor	2SC2412K
Q 901	Transistor	2SB1238
Q 902	Transistor	2SB1299
Q 903	Transistor	IMX1
Q 904	Transistor	IMX1
Q 905	Transistor	2SB1185
Q 907	Transistor	IMX1
Q 908	Transistor	DTA124EK
Q 909	Transistor	2SB1185
Q 910	Transistor	IMX1
Q 911	Transistor	2SB1238
Q 912	Transistor	2SB1299
Q 913	Transistor	2SB1185
Q 914	Transistor	IMX1
Q 916	Transistor	DTA124EK
D 101	Diode	HZU3R3(B2)
D 213	Diode	HZS5LL(B)
D 301	Diode	HZS20L(2)
D 302	Diode	HZS20L(2)
D 303	Diode	HZS20L(2)
D 304	Diode	HZS20L(2)
D 351	Diode	HZS9L(A1)
D 352	Diode	MA111
D 701	Diode	UDZ18(B)
D 702	Diode	UDZ18(B)
D 703	Diode	UDZ18(B)
D 704	Diode	UDZ18(B)
D 705	Diode	UDZ18(B)
D 706	Diode	UDZ18(B)
D 707	Diode	UDZ18(B)
D 708	Diode	UDZ18(B)
D 751	Diode	HZS6L(B2)
D 752	Diode	MA153
D 753	Diode	MA153
D 754	Diode	MA153
D 755	Diode	MA153
D 756	Diode	MA153
D 757	Diode	MA153
D 758	Diode	MA153
D 759	Diode	UDZ10(B)
D 760	Diode	MA153
D 761	Diode	MA153
D 762	Diode	MA153
D 763	Diode	MA153
D 810	Diode	1SS133
D 811	Diode	1SS133

Circuit Symbol and No.	Part Name	Part No.
D 821	Diode	HZS5LL(C)
D 822	Diode	1SS133
D 823	Diode	HZS7L(B2)
D 841	Diode	HZS6L(B2)
D 842	Diode	MA152WK
D 843	Diode	MA111
D 851	Diode	HZS12L(C1)
D 861	Diode	1SS133
D 862	Diode	1SS133
D 863	Diode	1SS133
D 864	Diode	1SS133
D 871	Diode	1SS133
D 872	Diode	1SS133
D 883	Diode	HZS7L(B2)
D 901	Diode	HZU7R5(B3)
D 902	Diode	RB500V-40
D 903	Diode	HZS5LL(A)
D 904	Diode	HZS18L(3)
D 905	Diode	MA728
D 906	Diode	HZU8R2(B1)
D 907	Diode	MA728
D 908	Diode	UDZ8R2(B)
D 909	Diode	RM4Z-LFJ1
D 921	Diode	ERA15-02VH
D 922	Diode	1SS133
D 923	Diode	1SS133
L 101	Inductor	CTF1379
L 351	Inductor	LCTA2R2J2520
L 403	Inductor	LAU1R0K
L 404	Inductor	LAU1R0K
L 501	Inductor	LAU2R2K
L 502	Inductor	LAU2R2K
L 551	Inductor	LAU1R0K
L 552	Inductor	LAU1R0K
L 601	Chip-Inductor	LCTA2R2J3225
L 602	Inductor	LCTA2R2J2520
L 603	Inductor	CTF1379
L 604	Inductor	CTF1379
L 605	Inductor	CTF1306
L 606	Inductor	CTF1306
L 701	Inductor	CTF1379
L 751	Inductor	LAU2R2K
L 901	Inductor	CTF1499
L 902	Choke Coil 100µH	CTH1196
L 903	Transformer	CTX1088
L 905	Choke Coil 1.4mH	CTH1129
TH901	Thermistor	CCX1051
X 501	Crystal Resonator 4.332MHz	CSS1056
X 601	Radiator 16MHz	CSS1571
X 602	Radiator 32.768kHz	CSS1319
S 751	Spring Switch(OPEN)	CSN1046
S 752	Spring Switch(CLOSE)	CSN1046
FU901	Fuse 2A	CEK1176
FU902	Fuse 1.75A	CEK1177
FB902	Inductor	CTF1449
FB901	Inductor	CTF1449

RESISTORS

R 102		RS1/16S102J
R 103		RS1/16S103J

Circuit Symbol and No.	Part Name	Part No.
R 104		RS1/16S682J
R 106		RS1/16S102J
R 108		RS1/16S101J
R 151		RS1/16S104J
R 152		RS1/16S473J
R 153		RS1/16S473J
R 154		RS1/16S473J
R 155		RS1/16S473J
R 156		RS1/16S104J
R 157		RS1/16S104J
R 158		RS1/16S272J
R 159		RS1/16S272J
R 160		RS1/16S563J
R 161		RS1/16S563J
R 162		RS1/16S472J
R 163		RS1/16S472J
R 164		RS1/16S391J
R 165		RS1/16S912J
R 201		RS1/16S472J
R 202		RS1/16S472J
R 203		RS1/16S472J
R 204		RS1/16S472J
R 205		RS1/16S470J
R 206		RS1/16S470J
R 207		RS1/16S472J
R 208		RS1/16S472J
R 209		RS1/16S470J
R 210		RS1/16S470J
R 211		RS1/16S472J
R 212		RS1/16S472J
R 213		RS1/16S470J
R 214		RS1/16S470J
R 215		RS1/16S472J
R 216		RS1/16S472J
R 217		RS1/16S472J
R 218		RS1/16S472J
R 219		RS1/16S470J
R 220		RS1/16S470J
R 226		RS1/16S472J
R 227		RS1/16S470J
R 228		RS1/16S472J
R 229		RS1/16S472J
R 230		RS1/16S470J
R 231		RS1/16S102J
R 232		RS1/16S272J
R 233		RS1/16S473J
R 234		RS1/16S473J
R 236		RS1/16S473J
R 237		RS1/16S472J
R 238		RS1/16S472J
R 240		RS1/16S472J
R 251		RS1/16S333J
R 252		RS1/16S333J
R 253		RS1/16S333J
R 254		RS1/16S333J
R 255		RS1/16S333J
R 256		RS1/16S333J
R 257		RS1/16S333J
R 258		RS1/16S333J
R 259		RS1/16S753J

Circuit Symbol and No.	Part Name	Part No.
R 260		RS1/16S753J
R 261		RS1/16S753J
R 262		RS1/16S753J
R 263		RS1/16S753J
R 264		RS1/16S753J
R 265		RS1/16S753J
R 266		RS1/16S753J
R 301		RS1/16S223J
R 302		RS1/16S472J
R 303		RS1/16S472J
R 304		RS1/16S273J
R 305		RS1/16S472J
R 306		RD1/4PU470J
R 307		RD1/4PU470J
R 308		RS1/16S102J
R 351		RS1/16S223J
R 352		RS1/16S223J
R 353		RS1/16S223J
R 354		RS1/16S332J
R 355		RS1/16S121J
R 356		RS1/16S121J
R 357		RS1/16S221J
R 358		RS1/16S221J
R 359		RS1/16S222J
R 404		RS1/16S473J
R 405		RS1/16S681J
R 406		RS1/16S103J
R 407		RS1/16S681J
R 408		RS1/16S681J
R 409		RS1/16S681J
R 410		RS1/16S473J
R 411		RS1/16S681J
R 412		RS1/16S681J
R 413		RS1/16S272J
R 414		RS1/16S272J
R 415		RS1/16S393J
R 416		RS1/16S162J
R 417		RS1/16S162J
R 418		RS1/16S472J
R 419		RS1/16S473J
R 420		RS1/16S473J
R 424		RS1/16S222J
R 425		RS1/16S473J
R 501		RS1/16S393J
R 503		RS1/16S681J
R 504		RAB4C102J
R 505		RS1/16S102J
R 602		RS1/16S473J
R 603		RS1/16S473J
R 605		RS1/16S102J
R 607		RS1/16S474J
R 608		RS1/16S474J
R 609		RS1/16S474J
R 610		RS1/16S0R0J
R 611		RS1/16S473J
R 612		RS1/16S471J
R 613		RS1/16S102J
R 614		RS1/16S102J
R 615		RAB4C471J
R 619		RS1/16S471J

Circuit Symbol and No.	Part Name	Part No.
R 620		RS1/16S471J
R 621		RS1/16S471J
R 622		RAB4C471J
R 623		RS1/16S102J
R 624		RS1/16S102J
R 625		RS1/16S102J
R 626		RAB4C471J
R 627		RS1/16S471J
R 628		RS1/16S474J
R 629		RS1/16S474J
R 630		RS1/16S124J
R 631		RS1/16S274J
R 632		RS1/16S473J
R 633		RS1/16S103J
R 634		RS1/16S102J
R 635		RS1/16S274J
R 636		RS1/16S102J
R 637		RS1/16S274J
R 638		RS1/16S102J
R 640		RS1/16S102J
R 641		RAB4C102J
R 642		RS1/16S102J
R 643		RS1/16S102J
R 644		RS1/16S473J
R 649		RS1/16S0R0J
R 651		RS1/16S124J
R 652		RS1/16S102J
R 653		RS1/16S0R0J
R 654		RS1/16S473J
R 655		RAB4C102J
R 656		RS1/16S473J
R 657		RAB4C102J
R 659		RS1/16S471J
R 661		RS1/16S102J
R 662		RAB4C102J
R 663		RAB4C473J
R 664		RS1/16S472J
R 665		RS1/16S471J
R 666		RS1/16S102J
R 667		RS1/16S102J
R 668		RAB4C0R0J
R 669		RAB4C102J
R 680		RS1/16S473J
R 681		RS1/16S274J
R 685		RS1/16S102J
R 686		RS1/16S102J
R 688		RS1/16S471J
R 689		RS1/16S471J
R 693		RS1/16S102J
R 701		RS1/16S0R0J
R 702		RS1/16S0R0J
R 703		RS1/16S0R0J
R 704		RS1/16S0R0J
R 705		RS1/16S102J
R 706		RS1/16S102J
R 707		RS1/16S102J
R 708		RS1/16S102J
R 709		RS1/16S223J
R 710		RS1/16S223J
R 711		RS1/16S223J

Circuit Symbol and No.	Part Name	Part No.
R 712		RS1/16S223J
R 713		RS1/16S223J
R 714		RS1/16S223J
R 715		RS1/16S223J
R 716		RS1/16S223J
R 751		RS1/16S152J
R 752		RS1/16S222J
R 753		RS1/16S681J
R 754		RS1/16S105J
R 757		RS1/16S223J
R 758		RS1/16S222J
R 759		RS1/16S222J
R 761		RS1/16S681J
R 762		RS1/16S473J
R 763		RS1/16S681J
R 764		RS1/16S681J
R 771		RS1/16S222J
R 772		RS1/16S222J
R 773		RS1/16S473J
R 774		RS1/16S103J
R 775		RS1/16S103J
R 776		RS1/16S473J
R 777		RS1/16S681J
R 778		RS1/16S681J
R 779		RS1/16S332J
R 810		RS1/16S220J
R 811		RS1/16S103J
R 812		RS1/16S103J
R 813		RS1/16S822J
R 814		RS1/16S103J
R 815		RD1/4PU101J
R 821		RS1/16S822J
R 822		RS1/16S471J
R 823		RS1/16S473J
R 824		RS1/16S683J
R 825		RS1/16S473J
R 826		RD1/4PU101J
R 827		RD1/4PU102J
R 828		RS1/16S103J
R 829		RS1/16S471J
R 830		RS1/16S272J
R 832		RS1/16S223J
R 833		RS1/16S223J
R 841		RD1/4PU472J
R 842		RS1/16S222J
R 843		RS1/16S473J
R 844		RS1/16S333J
R 846		RS1/16S473J
R 847		RS1/16S103J
R 848		RS1/16S473J
R 851		RS1/16S473J
R 852		RS1/16S473J
R 853		RS1/16S682J
R 854		RS1/16S104J
R 855		RS1/16S473J
R 856		RS1/16S473J
R 858		RD1/4PU102J
R 860		RS1/16S473J
R 861		RS1/16S103J
R 862		RS1/16S103J

Circuit Symbol and No.	Part Name	Part No.
R 863		RS1/8S362J
R 864		RD1/4PU471J
R 865		RS1/16S103J
R 866		RS1/8S362J
R 867		RS1/16S273J
R 868		RD1/4PU471J
R 871		RS1/16S102J
R 872		RS1/16S102J
R 873		RS1/16S102J
R 874		RS1/16S102J
R 875		RS1/16S102J
R 876		RS1/16S102J
R 883		RS1/16S473J
R 884		RS1/16S683J
R 885		RS1/16S473J
R 887		RS1/16S102J
R 888		RS1/16S103J
R 890		RS1/16S102J
R 901		RS1/10S470J
R 902		RS1/10SR68J
R 903		RN1/10SK3903D
R 904		RS1/10S511J
R 905		RS1/10S151J
R 906		RN1/10SE3302D
R 907		RN1/10SK4303D
R 908		RS1/16S681J
R 909		RS1/16S621J
R 910		RS1/16S333J
R 911		RS1/16S471J
R 912		RS1/16S471J
R 913		RS1/16S471J
R 914		RS1/10S122J
R 915		RS1/16S223J
R 916		RS1/16S223J
R 917		RS1/16S332J
R 918		RS1/16S332J
R 919		RS1/10S102J
R 920		RS1/16S222J
R 921		RS1/16S472J
R 922		RS1/10S471J
R 923		RS1/16S821J
R 924		RS1/16S821J
R 925		RS1/10S681J
R 926		RS1/16S511J
R 927		RS1/16S223J
R 928		RS1/16S511J
R 929		RS1/16S472J
R 930		RS1/16S332J
R 931		RS1/16S124J
R 932		RS1/16S511J
R 933		RS1/16S102J
R 934		RD1/4PU2R2J
R 935		RD1/4PU2R2J
R 936		RS1/16S222J
R 937		RS1/16S911J
R 938		RS1/16S511J
R 939		RS1/16S223J
R 940		RS1/16S511J
R 941		RS1/16S224J
R 942		RS1/16S104J
R 943		RS1/16S511J
R 944		RS1/16S822J
R 945		RS1/16S332J
R 946		RS1/16S274J
R 947		RS1/16S104J
R 948		RS1/16S0R0J
R 949		RS1/16S0R0J
R 950		RS1/16S911J
R 951		RS1/16S102J
R 952		RS1/16S153J
R 953		RS1/16S332J
R 954		RS1/16S471J
R 955		RS1/4SA101J
R 956		RS1/16S0R0J
R 957		RS1/16S222J

CAPACITORS

C 101		CKSQYB225K10
C 102		CKSQYB225K10
C 103		CKSQYB225K10
C 104		CKSQYB225K10
C 105		CKSRYB224K16
C 106		CKSRYB224K16
C 107		CKSRYB474K10
C 108		CKSRYB474K10
C 109		CKSRYB104K16
C 110		CKSYB106K6R3
C 111		CKSYB106K6R3
C 112		CKSRYB105K10
C 113		CKSRYB104K16
C 114		CCSRCH101J50
C 116		CCSRCH101J50
C 117		CKSYB106K6R3
C 118		CKSYB106K6R3
C 120		CKSYB106K6R3
C 121		CKSRYB472K50
C 122		CKSRYB472K50
C 123		CCSRCH471J50
C 124		CCSRCH471J50
C 125		CKSRYB473K50
C 126		CCSRCH101J50
C 151		CKSRYB103K50
C 152		CKSYB106K6R3
C 153		CKSYB106K6R3
C 154		CKSRYB105K10
C 155		CKSRYB222K50
C 156		CKSRYB105K10
C 201		CCSRCH101J50
C 202		CCSRCH101J50
C 203		CCSRCH101J50
C 204		CCSRCH101J50
C 207		CKSRYB102K50
C 208		CKSRYB102K50
C 209		CKSRYB102K50
C 210		CKSRYB102K50
C 213		CCSRCH101J50
C 214		CCSRCH101J50
C 215		CCSRCH101J50
C 216		CCSRCH101J50
C 219		CKSRYB102K50

Circuit Symbol and No.	Part Name	Part No.
C 220		CKSRYB102K50
C 221		CKSRYB102K50
C 222		CKSRYB102K50
C 231		CCSRCH101J50
C 232		CCSRCH101J50
C 233		CCSRCH101J50
C 234		CKSRYB102K50
C 235		CKSRYB102K50
C 236		CCSRCH101J50
C 237		CEAT331M6R3
C 238		CEAL100M16
C 239		CCSRCH101J50
C 251		CCSRCH470J50
C 252		CCSRCH470J50
C 253		CCSRCH470J50
C 254		CCSRCH470J50
C 255		CCSRCH470J50
C 256		CCSRCH470J50
C 257		CCSRCH470J50
C 258		CCSRCH470J50
C 259	10µF	CCG1138
C 260	10µF	CCG1138
C 261	10µF	CCG1138
C 262	10µF	CCG1138
C 263	10µF	CCG1138
C 264	10µF	CCG1138
C 265		CKSRYB105K10
C 266		CKSRYB105K10
C 301		CKSRYB223K50
C 302		CEAL100M16
C 303		CEAL220M10
C 304		CKSRYB222K50
C 305		CKSRYB222K50
C 306		CCSQCH101J50
C 307		CCSRCH181J50
C 308		CCSQCH101J50
C 309		CCSRCH181J50
C 351		CKSRYB102K50
C 352		CEJQ101M16
C 353		CKSRYB104K16
C 354		CEAL100M16
C 355		CASA4R7M16
C 357		CKSRYB105K6R3
C 358		CKSYB106K6R3
C 405		CKSRYB103K50
C 406		CKSRYB183K50
C 407		CKSRYB183K50
C 408		CEJQ101M6R3
C 409		CKSRYB103K50
C 410		CEJQ101M16
C 411		CKSRYB472K50
C 412		CKSRYB103K50
C 421		CKSRYB683K16
C 501		CEAL100M16
C 502		CKSRYB104K16
C 503		CKSYB106K6R3
C 504		CKSRYB104K16
C 505		CKSRYB105K10
C 506		CKSRYB104K16
C 507		CKSRYB472K50

Circuit Symbol and No.	Part Name	Part No.
C 508		CCSRCH220J50
C 509		CCSRCH220J50
C 551		CKSRYB102K50
C 552		CKSRYB102K50
C 601		CKSRYB104K16
C 602		CCSRCH180J50
C 603		CKSYB106K6R3
C 604		CCSRCH101J50
C 605		CCSRCH180J50
C 607		CCSRCH220J50
C 608		CCSRCH180J50
C 609		CKSRYB104K16
C 610		CKSRYB102K50
C 611		CKSRYB103K50
C 612		CKSRYB103K50
C 613		CKSRYB103K50
C 614		CKSRYB102K50
C 615		CKSRYB102K50
C 616		CKSRYB104K16
C 617		CKSRYB104K16
C 618		CCSRCH101J50
C 619		CKSRYB104K16
C 620		CCSRCH101J50
C 702		CKSRYB103K50
C 703		CEAL470M10
C 704		CKSYB475K10
C 705		CKSYB475K10
C 706		CKSYB475K10
C 707		CKSYB475K10
C 751		CKSRYB104K16
C 752		CKSRYB104K16
C 771		CCSRCH681J50
C 772		CCSRCH681J50
C 810		CKSRYB103K50
C 811		CCSRCH101J50
C 841		CCSRCH221J50
C 842		CKSRYB103K50
C 852		CKSRYB102K50
C 853		CCSRCH181J50
C 861		CKSRYB473K50
C 862		CKSRYB473K50
C 871		CKSRYB103K50
C 881		CKSRYB224K16
C 901		CKSRYB105K10
C 902		CASA470M20
C 903		CKSRYB102K50
C 904		CKSRYB104K25
C 905		CKSRYB104K16
C 906		CKSRYB105K10
C 907		CEHAR470M16
C 908		CEJQ470M10
C 909		CEHAT331M10
C 910		CCSRCH101J50
C 911		CKSRYB102K50
C 912		CKSQYB104K25
C 913		CEJQ4R7M35
C 914		CCSRCH101J50
C 915		CKSRYB104K16
C 916		CEJQ100M25
C 917		CKSRYB102K50

Circuit Symbol and No.	Part Name	Part No.
C 918		CEHAT331M10
C 919		CKSRYB223K50
C 920		CKSRYB104K25
C 921		CEJQ220M10
C 922		CASA330M10
C 923		CKSRYB103K50
C 924		CEJQ470M6R3
C 925	470µF/6.3V	CCH1182
C 926	100µF/10V	CCH1323
C 927		CKSRYB103K50
C 928		CKSRYB105K10
C 929		CEHAR101M10
C 930	3300µF/16V	CCH1163(P35)
C 931		CKSRYB103K50
C 932		CKSRYB104K25
C 933		CKSRYB153K50
C 934		CKSYB105K16
C 937		CEAT102M16(P35)
C 938		CKSRYB103K50
C 939		CKSRYB103K50
C 940	0.1F/5.5V	CCL1023
C 941		CKSRYB473K50
C 942		CKSRYB104K25
C 943		CKSYB105K16
C 944		CCSRCH102J50

A

Unit Number:CWM9105(AVX-MG2337ZF)
Unit Name:Tuner Audio Unit

MISCELLANEOUS

IC 101	IC	PML011A
IC 151	IC	TC7S66F
IC 201	IC	NJM2068MD
IC 202	IC	NJM2068MD
IC 203	IC	NJM2068MD
IC 204	IC	NJM2068MD
IC 206	IC	NJM2068MD
IC 251	IC	NJM4558V
IC 252	IC	NJM4558V
IC 301	IC	DS36277
IC 302	IC	PCA82C250T
IC 303	IC	BA05SFP
IC 501	IC	PM4006B
IC 601	IC	S-93C56BD0I-J8
IC 602	IC	PD5904D
IC 603	IC	BU2099FV
IC 604	IC	S-80942CNMC-G9C
IC 771	IC	TC7S86FU
IC 772	Photo-interrupter	GP1S94
IC 773	IC	TC7S14FU
IC 901	IC	TK11835M
IC 902	IC	BA6288FS
IC 903	IC	TK11818M
IC 904	IC	S-812C50AMC-C3E
IC 905	IC	PAJ002A
Q 151	Transistor	DTA114EK

Circuit Symbol and No.	Part Name	Part No.
Q 201	Transistor	2SC2712
Q 351	Transistor	2SB1185
Q 352	Transistor	IMX1
Q 401	Transistor	2SC2412K
Q 501	Transistor	DTA124EK
Q 602	Transistor	DTC124EU
Q 603	Transistor	DTA124EK
Q 604	Transistor	DTA124EK
Q 701	Transistor	2SC2412K
Q 702	Transistor	2SC2412K
Q 703	Transistor	2SC2412K
Q 704	Transistor	2SC2412K
Q 751	Transistor	IMX1
Q 752	Transistor	2SB1185
Q 753	Transistor	2SB1132
Q 771	Transistor	2SB1238
Q 772	Transistor	DTC114EK
Q 810	Transistor	2SA1576
Q 811	Transistor	DTC124EK
Q 812	Transistor	2SA1674
Q 821	Transistor	2SC2412K
Q 822	Transistor	2SA1162
Q 823	Transistor	2SC2412K
Q 841	Transistor	2SC2412K
Q 842	Transistor	2SC2412K
Q 851	Transistor	DTA114EK
Q 852	Transistor	2SC2412K
Q 853	Transistor	DTC114TK
Q 854	Transistor	DTA114EK
Q 883	Transistor	2SC2412K
Q 901	Transistor	2SB1238
Q 902	Transistor	2SB1299
Q 903	Transistor	IMX1
Q 904	Transistor	IMX1
Q 905	Transistor	2SB1185
Q 907	Transistor	IMX1
Q 908	Transistor	DTA124EK
Q 909	Transistor	2SB1185
Q 910	Transistor	IMX1
Q 911	Transistor	2SB1238
Q 912	Transistor	2SB1299
Q 913	Transistor	2SB1185
Q 914	Transistor	IMX1
Q 916	Transistor	DTA124EK
D 101	Diode	HZU3R3(B2)
D 213	Diode	HZS5LL(B)
D 301	Diode	HZS20L(2)
D 302	Diode	HZS20L(2)
D 303	Diode	HZS20L(2)
D 304	Diode	HZS20L(2)
D 351	Diode	HZS9L(A1)
D 352	Diode	MA111
D 701	Diode	UDZ18(B)
D 702	Diode	UDZ18(B)
D 703	Diode	UDZ18(B)
D 704	Diode	UDZ18(B)
D 705	Diode	UDZ18(B)
D 706	Diode	UDZ18(B)
D 707	Diode	UDZ18(B)
D 708	Diode	UDZ18(B)

Circuit Symbol and No.	Part Name	Part No.
D 751	Diode	HZS6L(B2)
D 752	Diode	MA153
D 753	Diode	MA153
D 754	Diode	MA153
D 755	Diode	MA153
D 756	Diode	MA153
D 757	Diode	MA153
D 758	Diode	MA153
D 759	Diode	UDZ10(B)
D 760	Diode	MA153
D 761	Diode	MA153
D 762	Diode	MA153
D 763	Diode	MA153
D 810	Diode	1SS133
D 811	Diode	1SS133
D 821	Diode	HZS5LL(C)
D 822	Diode	1SS133
D 823	Diode	HZS7L(B2)
D 841	Diode	HZS6L(B2)
D 842	Diode	MA152WK
D 843	Diode	MA111
D 851	Diode	HZS12L(C1)
D 861	Diode	1SS133
D 862	Diode	1SS133
D 863	Diode	1SS133
D 864	Diode	1SS133
D 871	Diode	1SS133
D 872	Diode	1SS133
D 883	Diode	HZS7L(B2)
D 901	Diode	HZU7R5(B3)
D 902	Diode	RB500V-40
D 903	Diode	HZS5LL(A)
D 904	Diode	HZS18L(3)
D 905	Diode	MA728
D 906	Diode	HZU8R2(B1)
D 907	Diode	MA728
D 908	Diode	UDZ8R2(B)
D 909	Diode	RM4Z-LFJ1
D 921	Diode	ERA15-02VH
D 922	Diode	1SS133
D 923	Diode	1SS133
L 101	Inductor	CTF1379
L 351	Inductor	LCTA2R2J2520
L 403	Inductor	LAU1R0K
L 404	Inductor	LAU1R0K
L 501	Inductor	LAU2R2K
L 502	Inductor	LAU2R2K
L 551	Inductor	LAU1R0K
L 552	Inductor	LAU1R0K
L 601	Chip-Inductor	LCTA2R2J3225
L 602	Inductor	LCTA2R2J2520
L 603	Inductor	CTF1379
L 604	Inductor	CTF1379
L 605	Inductor	CTF1306
L 606	Inductor	CTF1306
L 701	Inductor	CTF1379
L 751	Inductor	LAU2R2K
L 901	Inductor	CTF1499
L 902	Choke Coil 100µH	CTH1196
L 903	Transformer	CTX1088

Circuit Symbol and No.	Part Name	Part No.
L 905	Choke Coil 1.4mH	CTH1129
TH901	Thermistor	CCX1051
X 501	Crystal Resonator 4.332MHz	CSS1056
X 601	Radiator 16MHz	CSS1571
X 602	Radiator 32.768kHz	CSS1319
S 751	Spring Switch(OPEN)	CSN1046
S 752	Spring Switch(CLOSE)	CSN1046
FU901	Fuse 2A	CEK1176
FU902	Fuse 1.75A	CEK1177
FB902	Inductor	CTF1449
FB901	Inductor	CTF1449

RESISTORS

R 102		RS1/16S102J
R 103		RS1/16S103J
R 104		RS1/16S682J
R 106		RS1/16S102J
R 108		RS1/16S101J
R 151		RS1/16S104J
R 152		RS1/16S473J
R 153		RS1/16S473J
R 154		RS1/16S473J
R 155		RS1/16S473J
R 156		RS1/16S104J
R 157		RS1/16S104J
R 158		RS1/16S272J
R 159		RS1/16S272J
R 160		RS1/16S563J
R 161		RS1/16S563J
R 162		RS1/16S472J
R 163		RS1/16S472J
R 164		RS1/16S391J
R 165		RS1/16S912J
R 201		RS1/16S472J
R 202		RS1/16S472J
R 203		RS1/16S472J
R 204		RS1/16S472J
R 205		RS1/16S470J
R 206		RS1/16S470J
R 207		RS1/16S472J
R 208		RS1/16S472J
R 209		RS1/16S470J
R 210		RS1/16S470J
R 211		RS1/16S472J
R 212		RS1/16S472J
R 213		RS1/16S470J
R 214		RS1/16S470J
R 215		RS1/16S472J
R 216		RS1/16S472J
R 217		RS1/16S472J
R 218		RS1/16S472J
R 219		RS1/16S470J
R 220		RS1/16S470J
R 226		RS1/16S472J
R 227		RS1/16S470J
R 228		RS1/16S472J
R 229		RS1/16S472J
R 230		RS1/16S470J
R 231		RS1/16S102J
R 232		RS1/16S272J

Circuit Symbol and No.	Part Name	Part No.
R 233		RS1/16S473J
R 234		RS1/16S473J
R 236		RS1/16S473J
R 237		RS1/16S472J
R 238		RS1/16S472J
R 240		RS1/16S472J
R 251		RS1/16S333J
R 252		RS1/16S333J
R 253		RS1/16S333J
R 254		RS1/16S333J
R 255		RS1/16S333J
R 256		RS1/16S333J
R 257		RS1/16S333J
R 258		RS1/16S333J
R 259		RS1/16S753J
R 260		RS1/16S753J
R 261		RS1/16S753J
R 262		RS1/16S753J
R 263		RS1/16S753J
R 264		RS1/16S753J
R 265		RS1/16S753J
R 266		RS1/16S753J
R 301		RS1/16S223J
R 302		RS1/16S472J
R 303		RS1/16S472J
R 304		RS1/16S273J
R 305		RS1/16S472J
R 306		RD1/4PU470J
R 307		RD1/4PU470J
R 308		RS1/16S102J
R 351		RS1/16S223J
R 352		RS1/16S223J
R 353		RS1/16S223J
R 354		RS1/16S332J
R 355		RS1/16S121J
R 356		RS1/16S121J
R 357		RS1/16S221J
R 358		RS1/16S221J
R 359		RS1/16S222J
R 404		RS1/16S473J
R 405		RS1/16S681J
R 406		RS1/16S103J
R 407		RS1/16S681J
R 408		RS1/16S681J
R 409		RS1/16S681J
R 410		RS1/16S473J
R 411		RS1/16S681J
R 412		RS1/16S681J
R 413		RS1/16S272J
R 414		RS1/16S272J
R 415		RS1/16S393J
R 416		RS1/16S162J
R 417		RS1/16S162J
R 418		RS1/16S472J
R 419		RS1/16S473J
R 420		RS1/16S473J
R 424		RS1/16S222J
R 425		RS1/16S473J
R 501		RS1/16S393J
R 503		RS1/16S681J

Circuit Symbol and No.	Part Name	Part No.
R 504		RAB4C102J
R 505		RS1/16S102J
R 602		RS1/16S473J
R 603		RS1/16S473J
R 605		RS1/16S102J
R 607		RS1/16S474J
R 608		RS1/16S474J
R 609		RS1/16S474J
R 610		RS1/16S0R0J
R 611		RS1/16S473J
R 612		RS1/16S471J
R 613		RS1/16S102J
R 614		RS1/16S102J
R 615		RAB4C471J
R 619		RS1/16S471J
R 620		RS1/16S471J
R 621		RS1/16S471J
R 622		RAB4C471J
R 623		RS1/16S102J
R 624		RS1/16S102J
R 625		RS1/16S102J
R 626		RAB4C471J
R 627		RS1/16S471J
R 628		RS1/16S474J
R 629		RS1/16S474J
R 630		RS1/16S473J
R 632		RS1/16S473J
R 633		RS1/16S103J
R 634		RS1/16S102J
R 635		RS1/16S274J
R 636		RS1/16S102J
R 637		RS1/16S274J
R 638		RS1/16S102J
R 640		RS1/16S102J
R 641		RAB4C102J
R 642		RS1/16S102J
R 643		RS1/16S102J
R 644		RS1/16S473J
R 649		RS1/16S0R0J
R 651		RS1/16S124J
R 652		RS1/16S102J
R 653		RS1/16S0R0J
R 654		RS1/16S473J
R 655		RAB4C102J
R 656		RS1/16S473J
R 657		RAB4C102J
R 659		RS1/16S471J
R 661		RS1/16S102J
R 662		RAB4C102J
R 663		RAB4C473J
R 664		RS1/16S472J
R 665		RS1/16S471J
R 666		RS1/16S102J
R 667		RS1/16S102J
R 668		RAB4C0R0J
R 669		RAB4C102J
R 680		RS1/16S473J
R 681		RS1/16S274J
R 685		RS1/16S102J
R 686		RS1/16S102J

Circuit Symbol and No.	Part Name	Part No.
R 688		RS1/16S471J
R 689		RS1/16S471J
R 693		RS1/16S102J
R 701		RS1/16S0R0J
R 702		RS1/16S0R0J
R 703		RS1/16S0R0J
R 704		RS1/16S0R0J
R 705		RS1/16S102J
R 706		RS1/16S102J
R 707		RS1/16S102J
R 708		RS1/16S102J
R 709		RS1/16S223J
R 710		RS1/16S223J
R 711		RS1/16S223J
R 712		RS1/16S223J
R 713		RS1/16S223J
R 714		RS1/16S223J
R 715		RS1/16S223J
R 716		RS1/16S223J
R 751		RS1/16S152J
R 752		RS1/16S222J
R 753		RS1/16S681J
R 754		RS1/16S105J
R 757		RS1/16S223J
R 758		RS1/16S222J
R 759		RS1/16S222J
R 761		RS1/16S681J
R 762		RS1/16S473J
R 763		RS1/16S681J
R 764		RS1/16S681J
R 771		RS1/16S222J
R 772		RS1/16S222J
R 773		RS1/16S473J
R 774		RS1/16S103J
R 775		RS1/16S103J
R 776		RS1/16S473J
R 777		RS1/16S681J
R 778		RS1/16S681J
R 779		RS1/16S332J
R 810		RS1/16S220J
R 811		RS1/16S103J
R 812		RS1/16S103J
R 813		RS1/16S822J
R 814		RS1/16S103J
R 815		RD1/4PU101J
R 821		RS1/16S822J
R 822		RS1/16S471J
R 823		RS1/16S473J
R 824		RS1/16S104J
R 825		RS1/16S473J
R 826		RD1/4PU101J
R 827		RD1/4PU102J
R 828		RS1/16S103J
R 829		RS1/16S471J
R 830		RS1/16S393J
R 832		RS1/16S223J
R 833		RS1/16S223J
R 841		RD1/4PU472J
R 842		RS1/16S222J
R 843		RS1/16S473J

Circuit Symbol and No.	Part Name	Part No.
R 844		RS1/16S333J
R 846		RS1/16S473J
R 847		RS1/16S103J
R 848		RS1/16S473J
R 851		RS1/16S473J
R 852		RS1/16S473J
R 853		RS1/16S682J
R 854		RS1/16S104J
R 855		RS1/16S473J
R 856		RS1/16S473J
R 858		RD1/4PU102J
R 860		RS1/16S473J
R 861		RS1/16S103J
R 862		RS1/16S103J
R 863		RS1/8S362J
R 864		RD1/4PU471J
R 865		RS1/16S103J
R 866		RS1/8S362J
R 867		RS1/16S273J
R 868		RD1/4PU471J
R 871		RS1/16S102J
R 872		RS1/16S102J
R 873		RS1/16S102J
R 874		RS1/16S102J
R 875		RS1/16S102J
R 876		RS1/16S102J
R 883		RS1/16S473J
R 884		RS1/16S683J
R 885		RS1/16S473J
R 887		RS1/16S102J
R 888		RS1/16S103J
R 890		RS1/16S102J
R 901		RS1/10S470J
R 902		RS1/10SR68J
R 903		RN1/10SK3903D
R 904		RS1/10S511J
R 905		RS1/10S151J
R 906		RN1/10SE3302D
R 907		RN1/10SK4303D
R 908		RS1/16S681J
R 909		RS1/16S621J
R 910		RS1/16S333J
R 911		RS1/16S471J
R 912		RS1/16S471J
R 913		RS1/16S471J
R 914		RS1/10S122J
R 915		RS1/16S223J
R 916		RS1/16S223J
R 917		RS1/16S332J
R 918		RS1/16S332J
R 919		RS1/10S102J
R 920		RS1/16S222J
R 921		RS1/16S472J
R 922		RS1/10S471J
R 923		RS1/16S821J
R 924		RS1/16S821J
R 925		RS1/10S681J
R 926		RS1/16S511J
R 927		RS1/16S223J
R 928		RS1/16S511J

Circuit Symbol and No.	Part Name	Part No.
R 929		RS1/16S472J
R 930		RS1/16S332J
R 931		RS1/16S124J
R 932		RS1/16S511J
R 933		RS1/16S102J
R 934		RD1/4PU2R2J
R 935		RD1/4PU2R2J
R 936		RS1/16S222J
R 937		RS1/16S911J
R 938		RS1/16S511J
R 939		RS1/16S223J
R 940		RS1/16S511J
R 941		RS1/16S224J
R 942		RS1/16S104J
R 943		RS1/16S511J
R 944		RS1/16S822J
R 945		RS1/16S332J
R 946		RS1/16S274J
R 947		RS1/16S104J
R 948		RS1/16S0R0J
R 949		RS1/16S0R0J
R 950		RS1/16S911J
R 951		RS1/16S102J
R 952		RS1/16S153J
R 953		RS1/16S332J
R 954		RS1/16S471J
R 955		RS1/4SA101J
R 956		RS1/16S0R0J
R 957		RS1/16S222J

CAPACITORS

Circuit Symbol and No.	Part Name	Part No.
C 101		CKSQYB225K10
C 102		CKSQYB225K10
C 103		CKSQYB225K10
C 104		CKSQYB225K10
C 105		CKSRYB224K16
C 106		CKSRYB224K16
C 107		CKSRYB474K10
C 108		CKSRYB474K10
C 109		CKSRYB104K16
C 110		CKSYB106K6R3
C 111		CKSYB106K6R3
C 112		CKSRYB105K10
C 113		CKSRYB104K16
C 114		CCSRCH101J50
C 116		CCSRCH101J50
C 117		CKSYB106K6R3
C 118		CKSYB106K6R3
C 120		CKSYB106K6R3
C 121		CKSRYB472K50
C 122		CKSRYB472K50
C 123		CCSRCH471J50
C 124		CCSRCH471J50
C 125		CKSRYB473K50
C 126		CCSRCH101J50
C 151		CKSRYB103K50
C 152		CKSYB106K6R3
C 153		CKSYB106K6R3
C 154		CKSRYB105K10
C 155		CKSRYB222K50
C 156		CKSRYB105K10
C 201		CCSRCH101J50
C 202		CCSRCH101J50
C 203		CCSRCH101J50
C 204		CCSRCH101J50
C 207		CKSRYB102K50
C 208		CKSRYB102K50
C 209		CKSRYB102K50
C 210		CKSRYB102K50
C 213		CCSRCH101J50
C 214		CCSRCH101J50
C 215		CCSRCH101J50
C 216		CCSRCH101J50
C 219		CKSRYB102K50
C 220		CKSRYB102K50
C 221		CKSRYB102K50
C 222		CKSRYB102K50
C 231		CCSRCH101J50
C 232		CCSRCH101J50
C 233		CCSRCH101J50
C 234		CKSRYB102K50
C 235		CKSRYB102K50
C 236		CCSRCH101J50
C 237		CEAT331M6R3
C 238		CEAL100M16
C 239		CCSRCH101J50
C 251		CCSRCH470J50
C 252		CCSRCH470J50
C 253		CCSRCH470J50
C 254		CCSRCH470J50
C 255		CCSRCH470J50
C 256		CCSRCH470J50
C 257		CCSRCH470J50
C 258		CCSRCH470J50
C 259	10µF	CCG1138
C 260	10µF	CCG1138
C 261	10µF	CCG1138
C 262	10µF	CCG1138
C 263	10µF	CCG1138
C 264	10µF	CCG1138
C 265		CKSRYB105K10
C 266		CKSRYB105K10
C 301		CKSRYB223K50
C 302		CEAL100M16
C 303		CEAL220M10
C 304		CKSRYB222K50
C 305		CKSRYB222K50
C 306		CCSQCH101J50
C 307		CCSRCH181J50
C 308		CCSQCH101J50
C 309		CCSRCH181J50
C 351		CKSRYB102K50
C 352		CEJQ101M16
C 353		CKSRYB104K16
C 354		CEAL100M16
C 355		CASA4R7M16
C 357		CKSRYB105K6R3
C 358		CKSYB106K6R3
C 405		CKSRYB103K50
C 406		CKSRYB183K50

Circuit Symbol and No.	Part Name	Part No.
C 407		CKSRYB183K50
C 408		CEJQ101M6R3
C 409		CKSRYB103K50
C 410		CEJQ101M16
C 411		CKSRYB472K50
C 412		CKSRYB103K50
C 421		CKSRYB474K10
C 501		CEAL100M16
C 502		CKSRYB104K16
C 503		CKSYB106K6R3
C 504		CKSRYB104K16
C 505		CKSRYB105K10
C 506		CKSRYB104K16
C 507		CKSRYB472K50
C 508		CCSRCH220J50
C 509		CCSRCH220J50
C 551		CKSRYB102K50
C 552		CKSRYB102K50
C 601		CKSRYB104K16
C 602		CCSRCH180J50
C 603		CKSYB106K6R3
C 604		CCSRCH101J50
C 605		CCSRCH180J50
C 607		CCSRCH220J50
C 608		CCSRCH180J50
C 609		CKSRYB104K16
C 610		CKSRYB102K50
C 611		CKSRYB103K50
C 612		CKSRYB103K50
C 613		CKSRYB103K50
C 614		CKSRYB102K50
C 615		CKSRYB102K50
C 616		CKSRYB104K16
C 617		CKSRYB104K16
C 618		CCSRCH101J50
C 619		CKSRYB104K16
C 620		CCSRCH101J50
C 702		CKSRYB103K50
C 703		CEAL470M10
C 704		CKSYB475K10
C 705		CKSYB475K10
C 706		CKSYB475K10
C 707		CKSYB475K10
C 751		CKSRYB104K16
C 752		CKSRYB104K16
C 771		CCSRCH681J50
C 772		CCSRCH681J50
C 810		CKSRYB103K50
C 811		CCSRCH101J50
C 841		CCSRCH221J50
C 842		CKSRYB103K50
C 852		CKSRYB102K50
C 853		CCSRCH181J50
C 861		CKSRYB473K50
C 862		CKSRYB473K50
C 871		CKSRYB103K50
C 881		CKSRYB224K16
C 901		CKSRYB105K10
C 902		CASA470M20
C 903		CKSRYB102K50

Circuit Symbol and No.	Part Name	Part No.
C 904		CKSRYB104K25
C 905		CKSRYB104K16
C 906		CKSRYB105K10
C 907		CEHAR470M16
C 908		CEJQ470M10
C 909		CEHAT331M10
C 910		CCSRCH101J50
C 911		CKSRYB102K50
C 912		CKSQYB104K25
C 913		CEJQ4R7M35
C 914		CCSRCH101J50
C 915		CKSRYB104K16
C 916		CEJQ100M25
C 917		CKSRYB102K50
C 918		CEHAT331M10
C 919		CKSRYB223K50
C 920		CKSRYB104K25
C 921		CEJQ220M10
C 922		CASA330M10
C 923		CKSRYB103K50
C 924		CEJQ470M6R3
C 925	470µF/6.3V	CCH1182
C 926	100µF/10V	CCH1323
C 927		CKSRYB103K50
C 928		CKSRYB105K10
C 929		CEHAR101M10
C 930	3300µF/16V	CCH1163(P35)
C 931		CKSRYB103K50
C 932		CKSRYB104K25
C 933		CKSRYB153K50
C 934		CKSYB105K16
C 937		CEAT102M16(P35)
C 938		CKSRYB103K50
C 939		CKSRYB103K50
C 940	0.1F/5.5V	CCL1023
C 941		CKSRYB473K50
C 942		CKSRYB104K25
C 943		CKSYB105K16
C 944		CCSRCH102J50

B

Unit Number:CWM7805
Unit Name:DSP Unit

MISCELLANEOUS

IC 1001	IC	PD2071A
IC 1051	IC	PD2071A
IC 1101	IC	NJM4558MD
IC 1102	IC	NJM4558MD
IC 1201	IC	NJM4558MD
IC 1202	IC	NJM4558MD
IC 1203	IC	NJM4558MD
D 1101	Diode	HZU4R3(B2)
L 1001	Inductor	LCTA2R2J2520
L 1002	Inductor	CTF1379
L 1003	Inductor	CTF1379
L 1004	Inductor	CTF1379

Circuit Symbol and No.	Part Name	Part No.
L 1005	Inductor	CTF1379
L 1006	Inductor	CTF1379
L 1007	Inductor	CTF1379
L 1009	Inductor	CTF1379
L 1010	Inductor	LCTA2R2J2520
L 1011	Inductor	CTF1379
L 1012	Inductor	CTF1379
L 1013	Inductor	CTF1379
L 1014	Inductor	CTF1379
L 1016	Inductor	CTF1379
L 1017	Inductor	CTF1379
L 1018	Inductor	CTF1379
L 1019	Inductor	CTF1379
L 1020	Inductor	CTF1379
L 1021	Inductor	CTF1379
L 1022	Inductor	CTF1379
L 1023	Inductor	CTF1378
L 1051	Inductor	LCTA2R2J2520
L 1052	Inductor	CTF1379
L 1053	Inductor	CTF1379
L 1054	Inductor	CTF1379
L 1055	Inductor	CTF1379
L 1056	Inductor	CTF1379
L 1058	Inductor	CTF1379
L 1059	Inductor	CTF1379
L 1060	Inductor	LCTA2R2J2520
L 1061	Inductor	CTF1379
L 1062	Inductor	CTF1379
L 1063	Inductor	CTF1379
L 1064	Inductor	CTF1379
L 1066	Inductor	CTF1379
L 1067	Inductor	CTF1379
L 1068	Inductor	CTF1379
L 1069	Inductor	CTF1379
L 1070	Inductor	CTF1379
L 1071	Inductor	CTF1379
L 1072	Inductor	CTF1379
X 1001	Radiator 22.5792MHz	CSS1406

RESISTORS

R 1001		RS1/16S221J
R 1002		RS1/16S221J
R 1004		RS1/16S473J
R 1005		RS1/16S471J
R 1006		RS1/16S221J
R 1007		RS1/16S471J
R 1008		RS1/16S471J
R 1009		RS1/16S471J
R 1011		RS1/16S471J
R 1012		RS1/16S471J
R 1013		RS1/16S471J
R 1014		RS1/16S473J
R 1015		RS1/16S473J
R 1016		RS1/16S473J
R 1017		RS1/16S473J
R 1018		RS1/16S473J
R 1019		RS1/16S473J
R 1020		RS1/16S225J
R 1021		RS1/16S102J
R 1022		RS1/16S473J

Circuit Symbol and No.	Part Name	Part No.
R 1051		RS1/16S473J
R 1052		RS1/16S471J
R 1053		RS1/16S0R0J
R 1054		RS1/16S0R0J
R 1055		RS1/16S0R0J
R 1056		RS1/16S471J
R 1057		RS1/16S471J
R 1058		RS1/16S471J
R 1060		RS1/16S471J
R 1061		RS1/16S471J
R 1062		RS1/16S471J
R 1063		RS1/16S473J
R 1064		RS1/16S473J
R 1065		RS1/16S473J
R 1066		RS1/16S473J
R 1067		RS1/16S473J
R 1068		RS1/16S473J
R 1069		RS1/16S225J
R 1070		RS1/16S473J
R 1101		RS1/16S224J
R 1102		RS1/16S224J
R 1103		RS1/16S103J
R 1104		RS1/16S103J
R 1107		RS1/16S103J
R 1108		RS1/16S103J
R 1109		RS1/16S123J
R 1110		RS1/16S123J
R 1111		RS1/16S391J
R 1112		RS1/16S224J
R 1113		RS1/16S224J
R 1114		RS1/16S103J
R 1115		RS1/16S103J
R 1118		RS1/16S103J
R 1119		RS1/16S103J
R 1120		RS1/16S123J
R 1121		RS1/16S123J
R 1201		RS1/16S224J
R 1202		RS1/16S224J
R 1203		RS1/16S472J
R 1204		RS1/16S472J
R 1207		RS1/16S472J
R 1208		RS1/16S472J
R 1209		RS1/16S472J
R 1210		RS1/16S472J
R 1211		RS1/16S224J
R 1212		RS1/16S224J
R 1213		RS1/16S472J
R 1214		RS1/16S472J
R 1217		RS1/16S472J
R 1218		RS1/16S472J
R 1219		RS1/16S472J
R 1220		RS1/16S472J
R 1221		RS1/16S224J
R 1223		RS1/16S472J
R 1227		RS1/16S472J
R 1229		RS1/16S472J
R 1231		RS1/16S103J

CAPACITORS

C 1001		CEAL470M6R3

Circuit Symbol and No.	Part Name	Part No.
C 1002		CEAL470M6R3
C 1003		CKSRYB104K16
C 1004		CKSRYB104K16
C 1005		CEAL470M6R3
C 1006		CEAL470M6R3
C 1007		CEAL470M6R3
C 1008		CKSRYB104K16
C 1009		CEAL470M6R3
C 1010		CEAL470M6R3
C 1011		CEAL470M6R3
C 1012		CKSRYB104K16
C 1013		CKSRYB104K16
C 1014		CEAL470M6R3
C 1015		CKSRYB104K16
C 1016		CKSRYB104K16
C 1017		CKSRYB104K16
C 1018		CKSRYB104K16
C 1019		CEAL470M6R3
C 1020		CEAL470M6R3
C 1021		CEAL470M6R3
C 1022		CEAL470M6R3
C 1023		CKSRYB104K16
C 1024		CCSRCH120J50
C 1025		CCSRCH120J50
C 1027		CKSRYB104K16
C 1031		CKSRYB104K16
C 1032		CKSRYB104K16
C 1051		CEAL470M6R3
C 1052		CEAL470M6R3
C 1053		CKSRYB104K16
C 1054		CKSRYB104K16
C 1055		CEAL470M6R3
C 1056		CEAL470M6R3
C 1057		CEAL470M6R3
C 1058		CKSRYB104K16
C 1059		CEAL470M6R3
C 1060		CEAL470M6R3
C 1061		CEAL470M6R3
C 1062		CKSRYB104K16
C 1063		CKSRYB104K16
C 1064		CEAL470M6R3
C 1065		CKSRYB104K16
C 1066		CKSRYB104K16
C 1067		CKSRYB104K16
C 1068		CKSRYB104K16
C 1069		CEAL470M6R3
C 1070		CEAL470M6R3
C 1071		CEAL470M6R3
C 1072		CEAL470M6R3
C 1073		CKSRYB104K16
C 1075		CKSRYB103K50
C 1076		CKSRYB104K16
C 1081		CKSRYB104K16
C 1082		CKSRYB104K16
C 1101		CKSRYB105K10
C 1102		CKSRYB105K10
C 1103		CCSRCH220J50
C 1104		CCSRCH220J50
C 1105		CCSRCH221J50
C 1106		CCSRCH221J50

Circuit Symbol and No.	Part Name	Part No.
C 1107		CKSRYB103K50
C 1108		CKSRYB102K50
C 1109		CEAL101M6R3
C 1110		CKSRYB105K10
C 1111		CKSRYB105K10
C 1112		CCSRCH220J50
C 1113		CCSRCH220J50
C 1114		CCSRCH221J50
C 1115		CCSRCH221J50
C 1116		CKSRYB103K50
C 1117		CEALNP4R7M35
C 1118		CEALNP4R7M35
C 1119		CEALNP4R7M35
C 1120		CEALNP4R7M35
C 1201		CKSRYB105K10
C 1202		CKSRYB105K10
C 1203		CCSRCH681J50
C 1204		CCSRCH681J50
C 1205		CKSRYB182K50
C 1206		CKSRYB182K50
C 1207		CCSRCH101J50
C 1208		CCSRCH101J50
C 1209		CKSRYB103K50
C 1210		CKSQYB225K10
C 1211		CKSQYB225K10
C 1212		CKSRYB105K10
C 1213		CKSRYB105K10
C 1214		CCSRCH681J50
C 1215		CCSRCH681J50
C 1216		CKSRYB182K50
C 1217		CKSRYB182K50
C 1218		CCSRCH101J50
C 1219		CCSRCH101J50
C 1220		CKSRYB103K50
C 1221		CKSQYB225K10
C 1222		CKSQYB225K10
C 1223		CKSRYB105K10
C 1225		CCSRCH681J50
C 1227		CKSRYB182K50
C 1229		CCSRCH101J50
C 1231		CKSRYB103K50
C 1232		CKSQYB225K10

F

Unit Number:CWM7801 (AVX-MG2037ZF,MG2137ZF)

Unit Name:Panel PCB Unit

MISCELLANEOUS

IC 1801	IC	BU2099FV
Q 1801	Transistor	DTC144EU
Q 1802	Transistor	DTC144EU
Q 1804	Transistor	2SB1132
D 1807	LED	CL170PGCD(AB)
D 1808	LED	CL170PGCD(AB)
D 1809	LED	CL170PGCD(AB)
D 1810	LED	CL170PGCD(AB)
D 1811	LED	CL170PGCD(AB)

Circuit Symbol and No.	Part Name	Part No.
D 1812	LED	CL170PGCD(AB)
D 1815	LED	CL170PGCD(AB)
D 1816	LED	CL170PGCD(AB)
D 1817	Diode	DAN202U
D 1820	Diode	RB751V40
D 1831	LED	CL170PGCD(AB)
D 1832	LED	CL170PGCD(AB)
D 1833	LED	CL170PGCD(AB)
D 1834	LED	CL170PGCD(AB)
D 1835	LED	CL170PGCD(AB)
D 1836	LED	CL170PGCD(AB)
D 1837	LED	CL170PGCD(AB)
D 1838	LED	CL170PGCD(AB)
D 1839	LED	CL170PGCD(AB)
S 1801	Push Switch	CSG1126
S 1802	Push Switch	CSG1126
S 1803	Push Switch	CSG1126
S 1804	Push Switch	CSG1126
S 1805	Push Switch	CSG1126
S 1806	Push Switch	CSG1126
S 1807	Push Switch	CSG1126
S 1808	Push Switch	CSG1126

RESISTORS

R 1801		RS1/16S561J
R 1802		RS1/16S561J
R 1803		RS1/16S561J
R 1804		RS1/16S561J
R 1806		RS1/10S201J
R 1807		RS1/10S181J
R 1808		RS1/10S201J
R 1809		RS1/10S181J
R 1810		RS1/10S201J
R 1811		RS1/10S181J
R 1812		RS1/10S201J
R 1813		RS1/10S181J
R 1814		RS1/10S201J
R 1815		RS1/10S181J
R 1816		RS1/10S201J
R 1817		RS1/10S181J
R 1818		RS1/16S223J
R 1819		RS1/16S222J
R 1820		RS1/10S221J
R 1821		RS1/10S221J
R 1822		RS1/10S221J
R 1823		RS1/10S221J
R 1824		RS1/10S221J
R 1825		RS1/10S221J
R 1826		RS1/10S221J
R 1827		RS1/10S221J
R 1828		RS1/10S221J
R 1829		RS1/10S221J
R 1830		RS1/10S221J
R 1831		RS1/10S221J
R 1832		RS1/16S221J
R 1833		RS1/16S221J
R 1834		RS1/10S221J
R 1835		RS1/10S221J
R 1836		RS1/10S331J
R 1837		RS1/10S331J
R 1838		RS1/10S331J
R 1839		RS1/10S331J
R 1840		RS1/16S221J
R 1841		RS1/16S221J

CAPACITORS

C 1801		CKSRYB104K25
C 1802		CKSRYB104K16
C 1821		CKSQYB104K25
C 1822		CKSQYB104K25
C 1823		CKSQYB104K25
C 1824		CKSQYB104K25
C 1825		CKSQYB104K25
C 1826		CKSQYB104K25

F

Unit Number:CWM7806 (AVX-MG2237ZF,MG2337ZF)
Unit Name:Panel PCB Unit

MISCELLANEOUS

IC 1801	IC	BU2099FV
Q 1801	Transistor	DTC144EU
Q 1802	Transistor	DTC144EU
Q 1804	Transistor	2SB1132
D 1807	Chip LED	LWM673-Q2R2-4C4D
D 1808	Chip LED	LWM673-Q2R2-4C4D
D 1809	Chip LED	LWM673-Q2R2-4C4D
D 1810	Chip LED	LWM673-Q2R2-4C4D
D 1811	Chip LED	LWM673-Q2R2-4C4D
D 1812	Chip LED	LWM673-Q2R2-4C4D
D 1815	Chip LED	LWM673-Q2R2-4C4D
D 1816	Chip LED	LWM673-Q2R2-4C4D
D 1817	Diode	DAN202U
D 1820	Diode	RB751V40
D 1831	Chip LED	LWM673-Q2R2-4C4D
D 1832	Chip LED	LWM673-Q2R2-4C4D
D 1833	Chip LED	LWM673-Q2R2-4C4D
D 1834	Chip LED	LWM673-Q2R2-4C4D
D 1835	Chip LED	LWM673-Q2R2-4C4D
D 1836	Chip LED	LWM673-Q2R2-4C4D
D 1837	Chip LED	LWM673-Q2R2-4C4D
D 1838	Chip LED	LWM673-Q2R2-4C4D
D 1839	Chip LED	LWM673-Q2R2-4C4D
S 1801	Push Switch	CSG1126
S 1802	Push Switch	CSG1126
S 1803	Push Switch	CSG1126
S 1804	Push Switch	CSG1126
S 1805	Push Switch	CSG1126
S 1806	Push Switch	CSG1126
S 1807	Push Switch	CSG1126
S 1808	Push Switch	CSG1126

RESISTORS

R 1801		RS1/16S561J
R 1802		RS1/16S561J
R 1803		RS1/16S561J

Circuit Symbol and No.	Part Name	Part No.
R 1804		RS1/16S561J
R 1806		RS1/10S391J
R 1807		RS1/10S681J
R 1808		RS1/10S391J
R 1809		RS1/10S681J
R 1810		RS1/10S391J
R 1811		RS1/10S681J
R 1812		RS1/10S391J
R 1813		RS1/10S681J
R 1814		RS1/10S391J
R 1815		RS1/10S681J
R 1816		RS1/10S391J
R 1817		RS1/10S681J
R 1818		RS1/16S223J
R 1819		RS1/16S222J
R 1820		RS1/10S681J
R 1821		RS1/10S391J
R 1822		RS1/10S681J
R 1823		RS1/10S391J
R 1824		RS1/10S681J
R 1825		RS1/10S391J
R 1826		RS1/10S681J
R 1827		RS1/10S391J
R 1828		RS1/10S681J
R 1829		RS1/10S391J
R 1830		RS1/10S681J
R 1831		RS1/10S391J
R 1832		RS1/16S391J
R 1833		RS1/16S331J
R 1834		RS1/10S102J
R 1835		RS1/10S561J
R 1836		RS1/10S391J
R 1837		RS1/10S681J
R 1838		RS1/10S391J
R 1839		RS1/10S681J
R 1840		RS1/16S391J
R 1841		RS1/16S331J
CAPACITORS		
C 1801		CKSRYB104K25
C 1802		CKSRYB104K16
C 1803		CKSRYB104K16
C 1804		CKSQYB104K25
C 1805		CKSRYB104K16
C 1811		CKSQYB104K25
C 1812		CKSQYB104K25
C 1813		CKSQYB104K25
C 1814		CKSQYB104K25
C 1815		CKSQYB104K25
C 1816		CKSQYB104K25
C 1821		CKSQYB104K25
C 1822		CKSQYB104K25
C 1823		CKSQYB104K25
C 1824		CKSQYB104K25
C 1825		CKSQYB104K25
C 1826		CKSQYB104K25

Circuit Symbol and No.	Part Name	Part No.

Unit Number:CWM9123
Unit Name:Module Unit

MISCELLANEOUS

IC 4001	IC	IR3Y29B
IC 4062	IC	TC7S32FU
IC 4081	IC	NJM2286V
IC 4082	IC	NJM2235V
IC 4101	IC	NJM082BV
IC 4121	IC	M62354GP
IC 4171	IC	NJM062V
IC 4301	IC	TC160G11AF-1146
IC 4303	IC	NJM2107F
IC 4351	IC	TC7W02FU
Q 4101	Transistor	FMY3A
Q 4102	Transistor	FMY4A
Q 4161	Transistor	2SA1577
Q 4162	Transistor	2SC3518-Z
Q 4163	Transistor	2SC3518-Z
Q 4164	Transistor	DTC114EU
Q 4201	Transistor	2SC4116
Q 4202	Transistor	2SC4116
Q 4203	Transistor	2SA1586
Q 4204	Transistor	2SA1586
Q 4301	Transistor	2SC4097
D 4181	Diode	MA728
D 4182	Diode	MA728
D 4183	Diode	MA728
D 4201	Diode	MA8051(M)
D 4202	Diode	MA8051(M)
D 4203	Diode	MA8051(M)
D 4204	Diode	MA8051(M)
D 4205	Diode	MA8051(M)
D 4206	Diode	MA8051(M)
D 4207	Diode	MA8051(M)
D 4212	Diode	MA8051(M)
D 4213	Diode	MA8051(M)
D 4301	Diode	MA111
D 4302	Diode	1SV231
D 4303	Diode	MA111
L 4001	Inductor	LCTA100J3225
L 4002	Inductor	LCTA100J3225
L 4081	Inductor	LCTA100J3225
L 4101	Inductor	LCTA101J3225
L 4102	Inductor	LCTA101J3225
L 4121	Inductor	LCTB100K2125
L 4122	Inductor	LCTB100K2125
L 4161	Coil	CTH1195
L 4162	Coil	CTH1195
L 4171	Inductor	LCTA101J3225
L 4301	Inductor	LCTA150J3225
L 4302	Coil	CTE1157
L 4303	Inductor	CTF1306
L 4304	Inductor	LCTB100K2125
L 4305	Chip-Inductor	LCTA2R2J3225
L 4306	Inductor	LCTB100K2125
L 4307	Inductor	CTF1306
L 4308	Inductor	CTF1306
L 4310	Inductor-Array	CTF1421

Circuit Symbol and No.	Part Name	Part No.
L 4311	Inductor-Array	CTF1421
L 4312	Inductor	CTF1306
L 4313	Inductor	CTF1306
T 4161	Transformer	CTT1114
T 4162	Transformer	CTT1114
VR4002	Semi-fixed 33kΩ(B)	CCP1426
VR4003	Semi-fixed 33kΩ(B)	CCP1426
VR4004	Semi-fixed 33kΩ(B)	CCP1426
VR4005	Semi-fixed 33kΩ(B)	CCP1426
VR4006	Semi-fixed 10kΩ(B)	CCP1423
VR4101	Semi-fixed 10kΩ(B)	CCP1423
FU4161	Fuse 1.6A	CEK1256
EF4305	EMI Filter	CCG1060

RESISTORS

R 4014		RS1/16S6202D
R 4015		RS1/16S153J
R 4016		RS1/16S273J
R 4017		RS1/16S273J
R 4018		RS1/16S473J
R 4019		RS1/16S273J
R 4020		RS1/16S513J
R 4022		RS1/16S333J
R 4023		RS1/16S473J
R 4024		RS1/16S333J
R 4025		RS1/16S473J
R 4026		RS1/16S101J
R 4027		RS1/16S101J
R 4028		RS1/16S561J
R 4029		RS1/16S102J
R 4031		RS1/16S393J
R 4032		RS1/16S513J
R 4033		RS1/16S563J
R 4034		RS1/16S473J
R 4036		RS1/16S682J
R 4037		RS1/16S682J
R 4038		RS1/16S682J
R 4039		RS1/16S1802D
R 4040		RS1/16S124J
R 4041		RS1/16S2402D
R 4042		RS1/16S3602D
R 4047		RS1/16S101J
R 4048		RS1/16S101J
R 4049		RS1/16S101J
R 4061		RS1/16S473J
R 4081		RS1/16S105J
R 4082		RS1/16S105J
R 4083		RS1/16S105J
R 4084		RS1/16S104J
R 4085		RS1/16S473J
R 4087		RS1/16S473J
R 4101		RS1/16S303J
R 4102		RS1/16S913J
R 4103		RS1/16S113J
R 4104		RS1/16S473J
R 4105		RS1/16S363J
R 4106		RS1/16S473J
R 4107		RS1/16S101J
R 4108		RS1/16S153J
R 4109		RS1/16S100J

Circuit Symbol and No.	Part Name	Part No.
R 4110		RS1/16S153J
R 4111		RS1/16S100J
R 4123		47kΩCCN1131
R 4161		RS1/16S102J
R 4162		RS1/10S222J
R 4163		RS1/4S751J
R 4164		RS1/4S821J
R 4171		RS1/16S103J
R 4172		RS1/16S104J
R 4173		RS1/16S104J
R 4174		RS1/16S104J
R 4175		RS1/16S105J
R 4176		RS1/16S103J
R 4177		RS1/16S103J
R 4178		RS1/16S103J
R 4201		RS1/16S104J
R 4202		RS1/16S104J
R 4205		RS1/16S102J
R 4206		RS1/16S102J
R 4207		RS1/16S472J
R 4208		RS1/16S472J
R 4209		RS1/16S102J
R 4210		RS1/16S102J
R 4211		RS1/16S472J
R 4222		RS1/16S472J
R 4303		RS1/16S621J
R 4305	680Ω	CCN1119
R 4306	680Ω	CCN1119
R 4308		RS1/16S105J
R 4309		RS1/16S1R0J
R 4310		RS1/16S331J
R 4311		RS1/16S272J
R 4312		RS1/16S332J
R 4314		RS1/16S153J
R 4315		RS1/16S105J
R 4316		RS1/16S103J
R 4317		RS1/16S123J
R 4318		RS1/16S683J
R 4319		RS1/16S472J
R 4320		RS1/16S563J
R 4321		RS1/16S332J
R 4322		RS1/16S221J
R 4325		RS1/16S220J
R 4326		RS1/16S750J
R 4328		RS1/16S0R0J
R 4329		RS1/16S0R0J
R 4332		1kΩCCN1120
R 4333		1kΩCCN1120
R 4334		RS1/16S0R0J
R 4335		RS1/16S0R0J
R 4351		RS1/16S222J

CAPACITORS

C 4001		CKSRYB103K50
C 4002		CKSRYB104K25
C 4003		CKSRYB103K50
C 4004		CKSRYB473K50
C 4005		CKSRYB104K25
C 4007		CKSRYB103K50
C 4008		CKSRYB103K50

Circuit Symbol and No.	Part Name	Part No.
C 4010		CKSRYB105K10
C 4011		CKSRYB105K10
C 4012		CKSQYB105K16
C 4013		CSZSR330M10
C 4014		CKSRYB105K10
C 4015		CKSRYB103K50
C 4016		CKSRYB103K50
C 4017		CKSRYB103K50
C 4018		CKSRYB105K10
C 4019		CKSRYB103K50
C 4020		CKSRYB103K50
C 4023		CKSRYB103K50
C 4024		CKSRYB103K50
C 4026		CKSRYB104K25
C 4027		CKSRYB104K25
C 4028		CKSRYB104K25
C 4029		CKSRYB105K10
C 4030		CSZSR330M10
C 4031		CKSRYB682K50
C 4032		CKSQYB105K16
C 4033		CKSRYB105K10
C 4034		CCSRCH821J50
C 4063		CKSRYB104K25
C 4081		CSZSR330M10
C 4082		CKSRYB104K25
C 4083		CCSRCH101J50
C 4084		CCSRCH101J50
C 4085		CCSRCH101J50
C 4086		CKSRYB105K10
C 4087		CKSRYB105K10
C 4088		CKSRYB105K10
C 4089		CKSRYB104K25
C 4090		CCSRCH101J50
C 4091		CKSRYB105K10
C 4092		CKSRYB104K25
C 4101		CSZSR330M10
C 4102		CKSRYB103K50
C 4103		CSZSR4R7M25
C 4104		CKSRYB103K50
C 4105		CKSQYB105K16
C 4106		CKSQYB105K16
C 4107		CKSRYB104K25
C 4108		CSZSR4R7M25
C 4121		CSZS100M10
C 4122		CKSRYB104K25
C 4123		CKSRYB104K25
C 4124		CSZS100M10
C 4125		CKSRYB104K25
C 4130		CKSRYB104K25
C 4136		CKSRYB105K10
C 4157		CKSRYB104K25
C 4161		CKSRYB104K25
C 4162		CKSRYB473K50
C 4163		CKSRYB104K25
C 4164	100µF/10V	CCH1332
C 4165		CKSQYB225K10
C 4166		CFHSN104J50
C 4167	22pF	CCG1140
C 4168	22pF	CCG1140
C 4171		CSZSR330M10
C 4172		CKSRYB104K25
C 4173		CFHS473J16
C 4174		CKSRYB105K10
C 4175		CKSRYB472K50
C 4180		CKSRYB102K50
C 4181		CKSRYB102K50
C 4182		CKSRYB102K50
C 4183		CKSRYB102K50
C 4184		CCSRCH101J50
C 4185		CCSRCH101J50
C 4186		CCSRCH101J50
C 4187		CCSRCH101J50
C 4190		CKSRYB102K50
C 4205		CKSRYB102K50
C 4206		CKSRYB102K50
C 4207		CKSRYB102K50
C 4208		CKSRYB102K50
C 4209		CKSRYB102K50
C 4210		CKSRYB102K50
C 4211		CKSRYB102K50
C 4212		CKSRYB102K50
C 4213		CKSRYB102K50
C 4214		CKSRYB102K50
C 4215		CKSRYB102K50
C 4216		CKSRYB102K50
C 4217		CKSRYB102K50
C 4302		CCSRCH561J50
C 4303		CKSRYB104K25
C 4304		CSZSR330M10
C 4305		CKSRYB104K25
C 4306		CKSRYB104K25
C 4307		CCSRCH391J50
C 4308		CCSRCH221J50
C 4309		CKSRYB102K50
C 4310		CCSRCH221J50
C 4311		CKSRYB104K25
C 4312		CKSRYB184K10
C 4313		CKSRYB472K50
C 4314		CKSRYB102K50
C 4315		CKSRYB104K25
C 4316		CKSRYB104K25
C 4317		CKSRYB104K25
C 4318		CKSRYB104K25
C 4321		CKSRYB104K25
C 4323		CKSRYB104K25
C 4324		CSZSR4R7M25
C 4325		CKSRYB103K50
C 4326	100µF/10V	CCH1332
C 4327		CKSRYB103K50
C 4328		CSZSR4R7M25
C 4329		CKSRYB103K50
C 4351		CKSRYB104K25
C 4352		CCSRCH102J50

G

Unit Number:CWM7802
(AVX-MG2037ZF,MG2137ZF)
Unit Name:Keyboard Unit

Circuit Symbol and No.	Part Name	Part No.
MISCELLANEOUS		
Q 1851	Transistor	DTC144EU
Q 1852	Transistor	DTC144EU
D 1851	LED	CL170PGCD(AB)
D 1852	LED	CL170PGCD(AB)
D 1853	LED	CL170PGCD(AB)
D 1854	LED	CL170PGCD(AB)
D 1855	LED	CL170PGCD(AB)
D 1856	LED	CL170PGCD(AB)
D 1857	LED	CL170PGCD(AB)
D 1858	Diode	DAN202U
D 1859	Diode	RB751V40
D 1860	Diode	RB751V40
VR1851	Switch(POWER/VOLUME)	CSD1064
RESISTORS		
R 1851		RS1/10S101J
R 1852		RS1/10S101J
R 1853		RS1/10S101J
R 1854		RS1/10S101J
R 1855		RS1/10S101J
R 1856		RS1/10S101J
R 1857		RS1/10S101J
R 1858		RS1/10S101J
R 1859		RS1/10S101J
R 1860		RS1/10S101J
R 1861		RS1/10S101J
R 1862		RS1/10S101J
R 1863		RS1/10S101J
R 1864		RS1/10S101J

G

Unit Number:CWM7807 (AVX-MG2237ZF,MG2337ZF)
Unit Name:Keyboard Unit

Circuit Symbol and No.	Part Name	Part No.
MISCELLANEOUS		
Q 1851	Transistor	DTC144EU
Q 1852	Transistor	DTC144EU
D 1851	Chip LED	LWM673-Q2R2-4C4D
D 1852	Chip LED	LWM673-Q2R2-4C4D
D 1853	Chip LED	LWM673-Q2R2-4C4D
D 1854	Chip LED	LWM673-Q2R2-4C4D
D 1855	Chip LED	LWM673-Q2R2-4C4D
D 1856	Chip LED	LWM673-Q2R2-4C4D
D 1857	Chip LED	LWM673-Q2R2-4C4D
D 1858	Diode	DAN202U
D 1859	Diode	RB751V40
D 1860	Diode	RB751V40
VR1851	Switch(POWER/VOLUME)	CSD1064
RESISTORS		
R 1851		RS1/10S391J
R 1852		RS1/10S391J
R 1853		RS1/10S101J
R 1854		RS1/10S221J
R 1855		RS1/10S101J
R 1856		RS1/10S221J
R 1857		RS1/10S101J
R 1858		RS1/10S221J
R 1859		RS1/10S101J
R 1860		RS1/10S221J
R 1861		RS1/10S121J
R 1862		RS1/10S151J
R 1863		RS1/10S121J
R 1864		RS1/10S151J

Tuner Connector Unit
Consists of
Tuner PCB
Connector PCB

DE

Unit Number:
Unit Name:Tuner Connector Unit

Circuit Symbol and No.	Part Name	Part No.
MISCELLANEOUS		
L 1401	Inductor	LCTA4R7J3225
L 1402	Coil	CTB1103
L 2801	Inductor	CTF1379
L 2802	Inductor	CTF1379
L 2803	Inductor	CTF1379
L 2804	Inductor	CTF1379
L 2806	Inductor	CTF1379
L 2807	Inductor	CTF1379
L 2808	Inductor	CTF1379
L 2809	Inductor	CTF1379
L 2810	Inductor	CTF1379
L 2811	Inductor	CTF1379
L 2813	Inductor	CTF1379
L 2815	Inductor	CTF1379
L 2816	Inductor	CTF1306
L 2817	Inductor	CTF1306
L 2820	Inductor	CTF1379
L 2821	Inductor	CTF1379
L 2822	Inductor	CTF1306
L 2823	Inductor	CTF1306
L 2824	Inductor	CTF1379
L 2825	Inductor	CTF1379
L 2826	Inductor	CTF1379
	FM/AM Tuner Unit	CWE1635
AR1401	Surge Protrctor	DSP-201M-S00B
RESISTORS		
R 1401		RS1/16S222J
R 1403		RS1/16S473J
R 1404		RS1/16S473J
R 2801		RS1/16S750J
R 2802		RS1/16S750J
R 2803		RS1/16S750J
R 2804		RS1/16S750J
R 2806		RS1/16S0R0J
R 2809		RS1/16S0R0J
CAPACITORS		

Circuit Symbol and No.	Part Name	Part No.
C 1401		CKSQYB103K50
C 1402		CKSRYB103K50
C 1403		CKSRYB682K50
C 1404		CKSRYB332K50
C 1405		CCSRCH820J50
C 1406		CKSYB105K16
C 1407		CCSRCH101J50
C 2816		CKSRYB102K50
C 2817		CKSRYB102K50
C 2818		CKSRYB102K50
C 2819		CKSRYB102K50

H

Unit Number:CWX2589
Unit Name:Control Unit(G2F)

MISCELLANEOUS

IC 201	IC	UPD63711GC
IC 301	IC	BD7962FM
IC 302	IC	S-818A33AUC-BGN
IC 303	IC	BA05SFP
IC 501	IC	SM5903BFP
IC 503	IC	PD4501B
IC 504	IC	TC74VHCT08AFT
IC 505	IC	TC74VHC541FT
IC 507	IC	MSM51V17400F6TFT
IC 702	IC	PD5705B
Q 101	Transistor	2SB1132
Q 601	Transistor	DTC114EK
Q 602	Transistor	DTA123JK
Q 603	Transistor	DTC314TK
Q 604	Transistor	DTC314TK
Q 702	Transistor	UMD3N
D 101	Diode	1SS355
D 301	Diode	S1G-6904G2P
D 303	Diode	S1G-6904G2P
D 601	Chip Diode	MA151WA
L 201	Inductor	CTF1306
L 601	Inductor	CTF1295
TH701	Thermistor	CCX1015
X 201	Radiator 16.93MHz	CSS1581
X 701	Radiator 10.00MHz	CSS1428

RESISTORS

R 101	RS1/8S120J
R 102	RS1/8S100J
R 103	RS1/16S222J
R 104	RS1/16S102J
R 105	RS1/16S0R0J
R 201	RS1/16S104J
R 202	RAB4CQ681J
R 203	RS1/16S0R0J
R 204	RS1/16S0R0J
R 205	RS1/16S103J
R 206	RS1/16S393J
R 207	RS1/16S0R0J
R 209	RS1/16S0R0J
R 210	RS1/16S0R0J
R 211	RS1/16S0R0J
R 212	RS1/16S562J
R 213	RS1/16S153J
R 214	RS1/16S123J
R 216	RS1/16S0R0J
R 217	RS1/16S0R0J
R 220	RS1/16S471J
R 221	RS1/16S681J
R 298	RS1/16S0R0J
R 301	RS1/16S103J
R 302	RS1/16S153J
R 303	RS1/16S103J
R 304	RS1/16S103J
R 305	RS1/16S272J
R 306	RS1/16S272J
R 307	RS1/16S182J
R 308	RS1/16S272J
R 309	RS1/16S682J
R 310	RS1/16S822J
R 311	RS1/16S103J
R 312	RS1/16S681J
R 313	RS1/16S103J
R 314	RS1/16S153J
R 315	RS1/16S153J
R 316	RS1/16S153J
R 317	RS1/16S103J
R 318	RS1/16S103J
R 319	RS1/16S102J
R 320	RS1/16S392J
R 322	RS1/16S103J
R 323	RS1/16S103J
R 324	RS1/16S103J
R 325	RS1/16S103J
R 502	RS1/16S102J
R 503	RAB4CQ681J
R 504	RS1/16S331J
R 508	RS1/16S392J
R 511	RS1/16S0R0J
R 512	RS1/16S333J
R 513	RS1/16S473J
R 516	RS1/16S331J
R 601	RS1/16S102J
R 602	RS1/16S102J
R 603	RS1/16S223J

RESISTORS

R 604	RS1/16S223J
R 605	RS1/16S102J
R 606	RS1/16S681J
R 607	RS1/16S681J
R 608	RS1/16S102J
R 609	RAB4CQ681J
R 701	RAB4CQ104J
R 702	RS1/16S222J
R 703	RS1/16S681J
R 704	RAB4CQ222J
R 705	RAB4CQ681J
R 706	RS1/16S473J
R 707	RS1/16S473J

Circuit Symbol and No.	Part Name	Part No.
R 708		RS1/16S222J
R 709		RS1/16S222J
R 711		RAB4CQ104J
R 712		RS1/16S473J
R 713		RS1/16S681J
R 714		RS1/16S473J
R 715		RAB4CQ222J
R 716		RS1/16S103J
R 718		RS1/16S473J
R 719		RS1/16S104J
R 720		RS1/16S103J
R 724		RS1/16S104J
R 727		RS1/16S0R0J
R 734		RS1/16S104J
R 736		RS1/16S681J
R 739		RS1/16S473J
R 741		RS1/16S104J
R 742		RS1/16S222J
R 743		RS1/16S681J
R 758		RS1/16S822J
R 759		RS1/16S103J
R 760		RS1/16S433J
R 767		RS1/16S154J
R 775		RAB4CQ681J

CAPACITORS

C 101		CKSRYB103K25
C 102		CKSRYB104K25
C 103		CEVL101M10
C 104		CEVL470M6R3
C 105		CKSRYB224K16
C 106		CKSRYB224K16
C 107		CKSRYB224K16
C 201		CKSRYB104K25
C 202		CEVL220M16
C 203		CKSRYB473K25
C 204		CKSRYB182K50
C 205		CKSRYB104K25
C 206		CKSRYB152K50
C 207		CKSRYB224K16
C 208		CCSRCH180J50
C 209		CCSRCK2R0C50
C 210		CCSRCH181J50
C 211		CCSRCH510J50
C 212		CKSRYB682K50
C 213		CKSRYB104K25
C 214		CKSRYB104K25
C 215		CKSRYB103K25
C 216		CKSRYB104K25
C 217		CKSRYB104K25
C 218		CKSRYB104K25
C 219		CKSRYB104K25
C 220		CKSRYB104K25
C 221		CEVL470M6R3
C 222		CKSRYB104K25
C 223		CKSRYB102K50
C 224		CKSRYB104K25
C 225		CKSRYB103K25
C 226		CCSRCH510J50
C 301		CEVL101M10

Circuit Symbol and No.	Part Name	Part No.
C 302		CKSRYB224K16
C 303		CKSRYB224K16
C 304	10µF/10V	CCH1349
C 305		CKSRYB224K16
C 306	10µF/10V	CCH1349
C 307		CKSRYB224K16
C 309		CKSYB475K16
C 501		CKSRYB102K50
C 502		CKSRYB104K25
C 503		CKSRYB104K25
C 504		CKSRYB104K25
C 505		CKSRYB104K25
C 506		CKSRYB104K25
C 508		CKSRYB104K25
C 509		CKSRYB104K25
C 601		CEVL220M6R3
C 602		CEVL220M6R3
C 701		CKSRYB104K25
C 702		CKSRYB104K25
C 703		CKSRYB103K25
C 704		CKSRYB103K25
C 705		CKSRYB104K25
C 706		CKSRYB104K25
C 707		CKSRYB103K25
C 708		CKSRYB473K25

J

Unit Number:
Unit Name:PCB Unit(Load)

Q 21	Photo-transistor	CPT231SCTU
Q 22	Photo-transistor	CPT231SCTU
L 21	Inductor	LCYBR15J1608
L 22	Inductor	LCYBR15J1608
S 21	Spring Switch(LOAD1)	CSN1051
S 22	Spring Switch(LOAD2)	CSN1052

I

Unit Number:CWX2614
Unit Name:PCB Unit(LED)

D 31	Chip LED	CL205IRXTU
D 32	Chip LED	CL205IRXTU
S 31	Spring Switch(CAMLOAD)	CSN1052
S 32	Spring Switch(CAMEOK)	CSN1052
R 31		RS1/16S0R0J

L

Unit Number:CWX2611
Unit Name:PCB Unit

L 1	Inductor	CTF1389
S 41	Spring Switch(LOAD3)	CSN1051

K

Circuit Symbol and No. Part Name Part No.

Unit Number:CWX2613
Unit Name:PCB Unit(Side)

MISCELLANEOUS

S 11	Spring Switch(CAMCLMP)	CSN1052
VR11	Semi-fixed 1kΩ(B)	CCP1338

RESISTORS

R 11		RS1/16S562J
R 12		RS1/16S562J
R 13		RS1/10S391J
R 14		RS1/10S391J
R 15		RS1/16S0R0J
R 16		RS1/16S0R0J

CAPACITORS

C 12		CKSRYB104K25

M

Unit Number:
Unit Name:PCB Unit(M2 Unit)

IC 1	IC	BA6849FS
S 1	Switch(HOME)	CSN1057
S 2	Switch(CLAMP)	CSN1057

RESISTORS

R 1		RS1/16S221J
R 2		RS1/16S221J
R 3		RS1/16S4R7J
R 4		RS1/16S1R0J

CAPACITORS

C 1		CKSRYB104K16

Miscellaneous Parts List

M 1	Motor Unit(-A)(CAMGEAR)	CXC1144
M 2	Motor Unit(-B)(ELEVATION)	CXC1145
M 3	Motor Unit(-A)(CRG)	CXC1143
VR1	Variable Resistor 10kΩ	CCW1023
	PU Unit(Service)(PX1)	CXX1568
M 901	Motor Unit(FLAP)	CXC1191