
9. EXPLODED VIEWS AND PARTS LIST

NOTES:
- *Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.*
- *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
- *Screws adjacent to ▼ mark on product are used for disassembly.*
- *For the applying amount of lubricants or glue, follow the instructions in this manual. (In the case of no amount instructions, apply as you think it appropriate.)*

9.1 PACKING SECTION

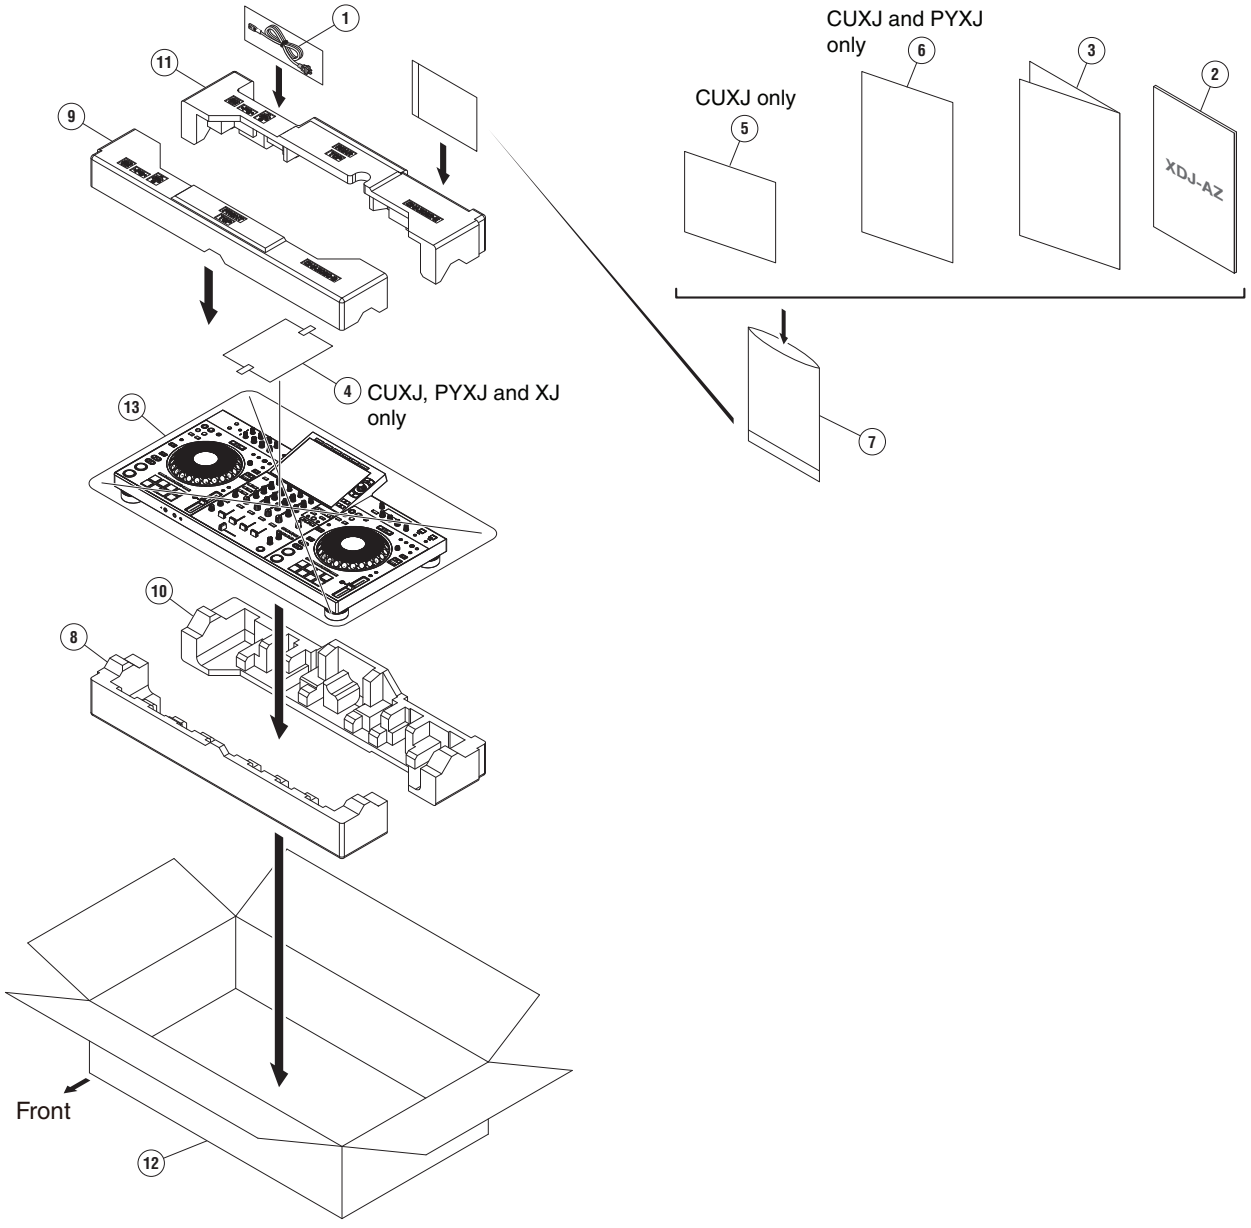

(1) PACKING SECTION PARTS LIST


Mark	No.	Description	Part No.
⚠	1	Power cord	See Contrast table (2)
	2	Quick Start Guide	See Contrast table (2)
	3	Precautions for Use	See Contrast table (2)
NSP	4	Leaflet	See Contrast table (2)
NSP	5	Leaflet	See Contrast table (2)
NSP	6	Warranty	See Contrast table (2)
NSP	7	Polyethylene Bag 0.06*230*340	AHG7117
	8	Packing Pad	DHA2059
	9	Packing Pad	DHA2060
	10	Packing Pad	DHA2061
	11	Packing Pad	DHA2062
	12	Packing Case	See Contrast table (2)
	13	Mirror Mat	DHL1201

(2) CONTRAST TABLE

XDJ-AZ/CUXJ, PYXJ, XJ and XJCN are constructed the same except for the following:

Mark	No.	Symbol and Description	XDJ-AZ/CUXJ	XDJ-AZ/PYXJ	XDJ-AZ/XJ	XDJ-AZ/XJCN
⚠	1	Power cord	DDG1108	ADG1244	ADG1244	DDG1114
	2	Quick Start Guide	DRH1792	DRH1792	DRH1792	DRH1793
	3	Precautions for Use	DRH1794	DRH1794	DRH1794	DRH1796
NSP	4	Leaflet	DRH1797	DRH1797	DRH1797	Not used
NSP	5	Leaflet	DRH1799	Not used	Not used	Not used
NSP	6	Warranty	DRY1283	DRY1280	Not used	Not used
	12	Packing Case	DHG3939	DHG3937	DHG3938	DHG3941

9.2 EXTERIOR SECTION

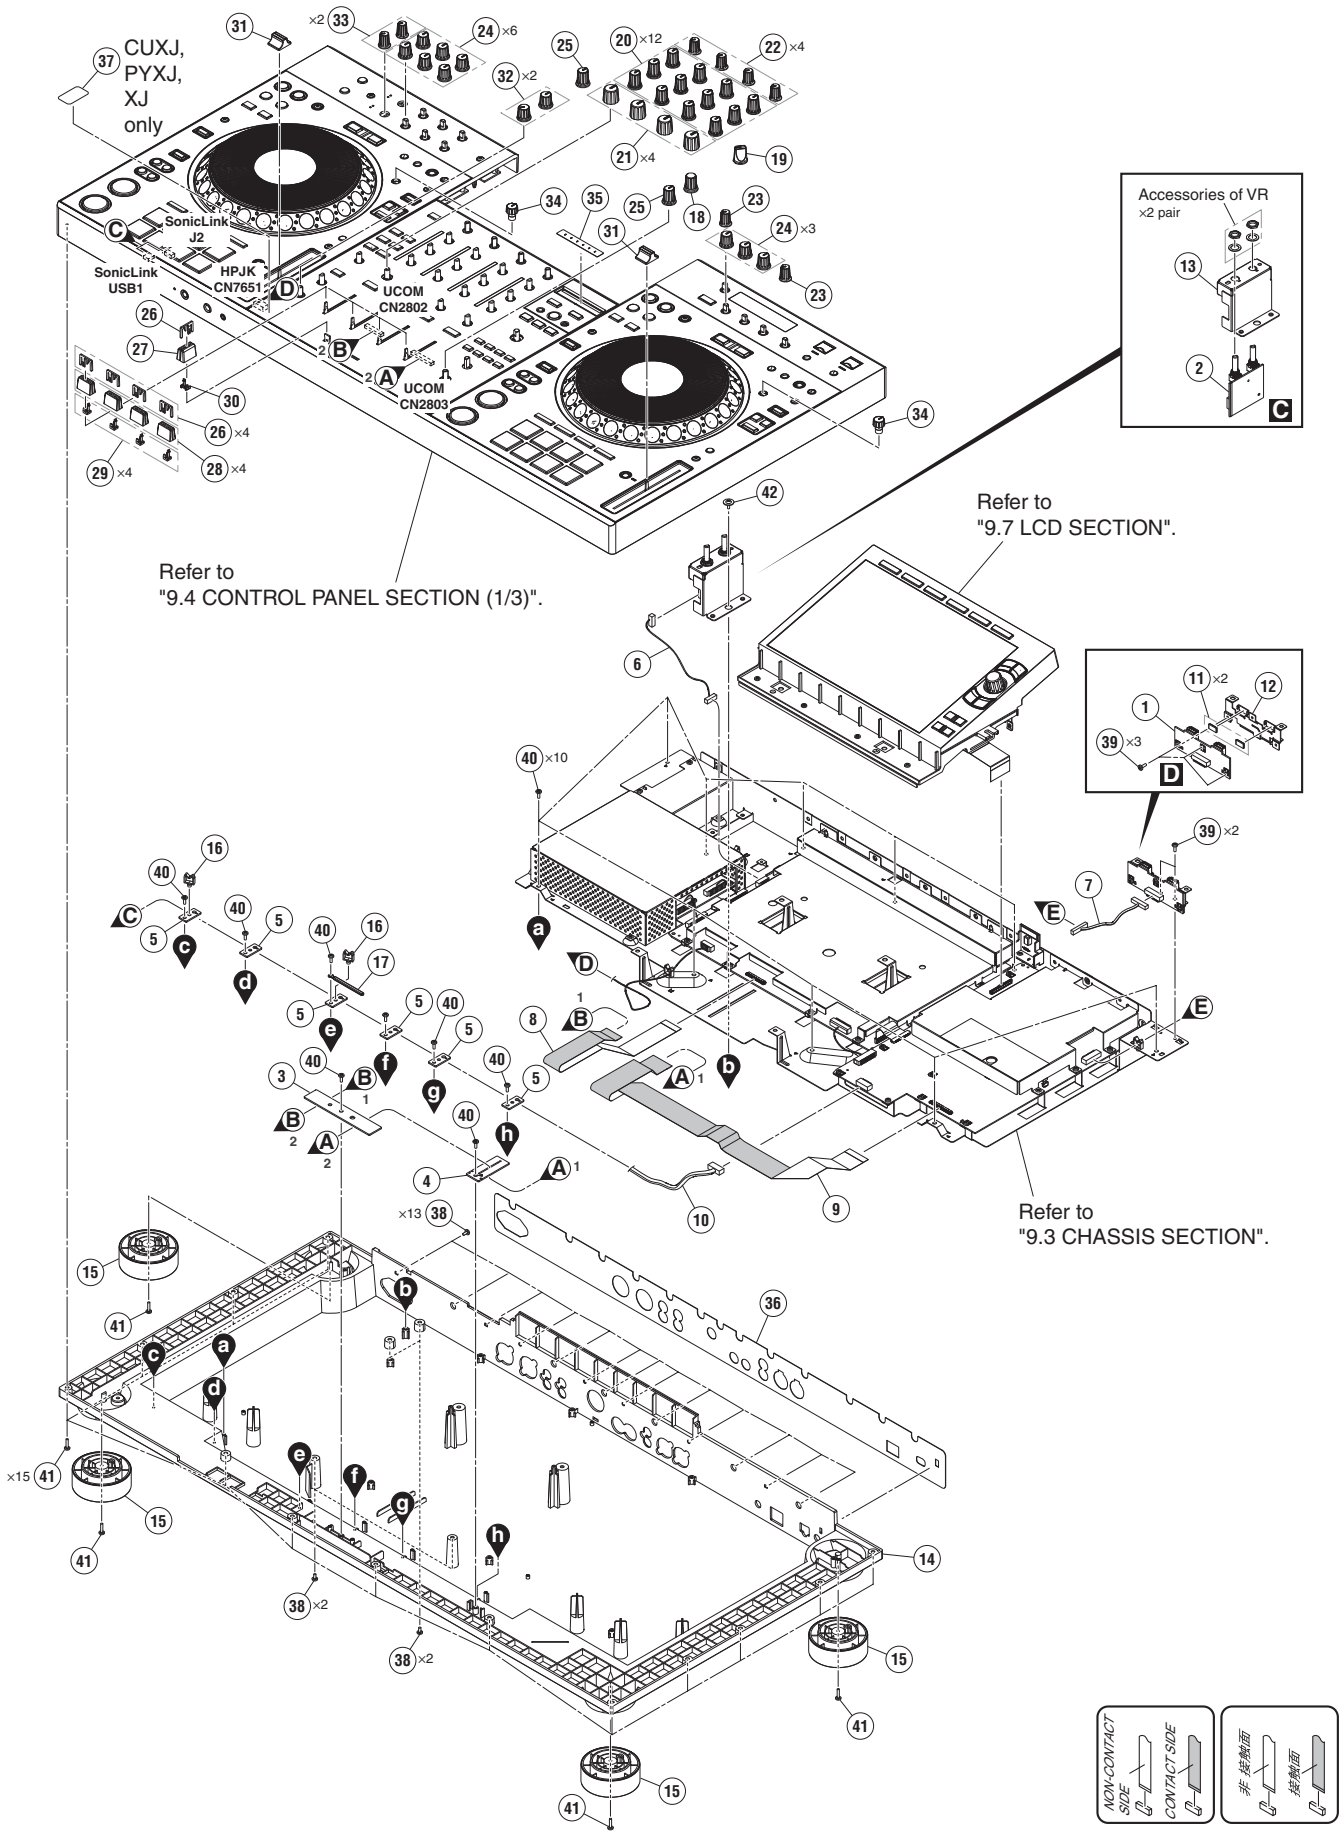

(1) EXTERIOR SECTION PARTS LIST


Mark	No.	Description	Part No.
	1	USBA Assy	DWX5019
	2	MCTR Assy	DWX5038
	3	STL1 Assy	DWX5053
	4	STL2 Assy	DWX5054
	5	STL3 Assy	DWX5055
	6	Shielded Conn-Cable	DDA1115
	7	Shielded Conn-Cable	DDA1116
	8	FFC	DDD2205
	9	FFC	DDD2206
	10	Complex Conn-Cable	DDE1159
	11	Gasket	DEC4155
	12	Stay	DNH3614
	13	Stay	DNH3615
⚠	14	Chassis	DNK7189
	15	Insulator	DXB2215
	16	Holder	VEC1355
	17	Cord Clamper	DEX1025
	18	Rotary SW Knob (C)	DAA1180
	19	Select Knob	DAA1205
	20	Knob/RSW	DAA1305
	21	Knob	DAA1462
	22	Knob	DAA1490
	23	Knob	DAA1409
	24	Knob	DAA1432
	25	Knob	DAA1434
	26	Slider Knob 2	DAC2685
	27	Knob	DAC3238
	28	Knob	DAC3705
	29	Slider Knob Stopper	DNK5888
	30	Stopper	DNK6440
	31	Knob/SLD	DNK5981
	32	Knob	DAA1435
	33	Knob	DAA1470
	34	Knob	DAA1444
	35	Panel	DNK7136
⚠	36	Rear Panel	See Contrast table (2)
NSP	37	Label	See Contrast table (2)
	38	Screw	BBZ30P060FTB
	39	Screw	BBZ30P060FTC
	40	Screw	BPZ30P080FTC
	41	Screw	BPZ30P120FTB
	42	DM Screw (FTC)	DBA1260

(2) CONTRAST TABLE

XDJ-AZ/CUXJ, PYXJ, XJ and XJCN are constructed the same except for the following:

Mark	No.	Symbol and Description	XDJ-AZ/CUXJ	XDJ-AZ/PYXJ	XDJ-AZ/XJ	XDJ-AZ/XJCN
⚠	36	Rear Panel	DAH3441	DAH3441	DAH3441	DAH3442
NSP	37	Label	DRW3080	DRW3080	DRW3080	Not used

9.3 CHASSIS SECTION

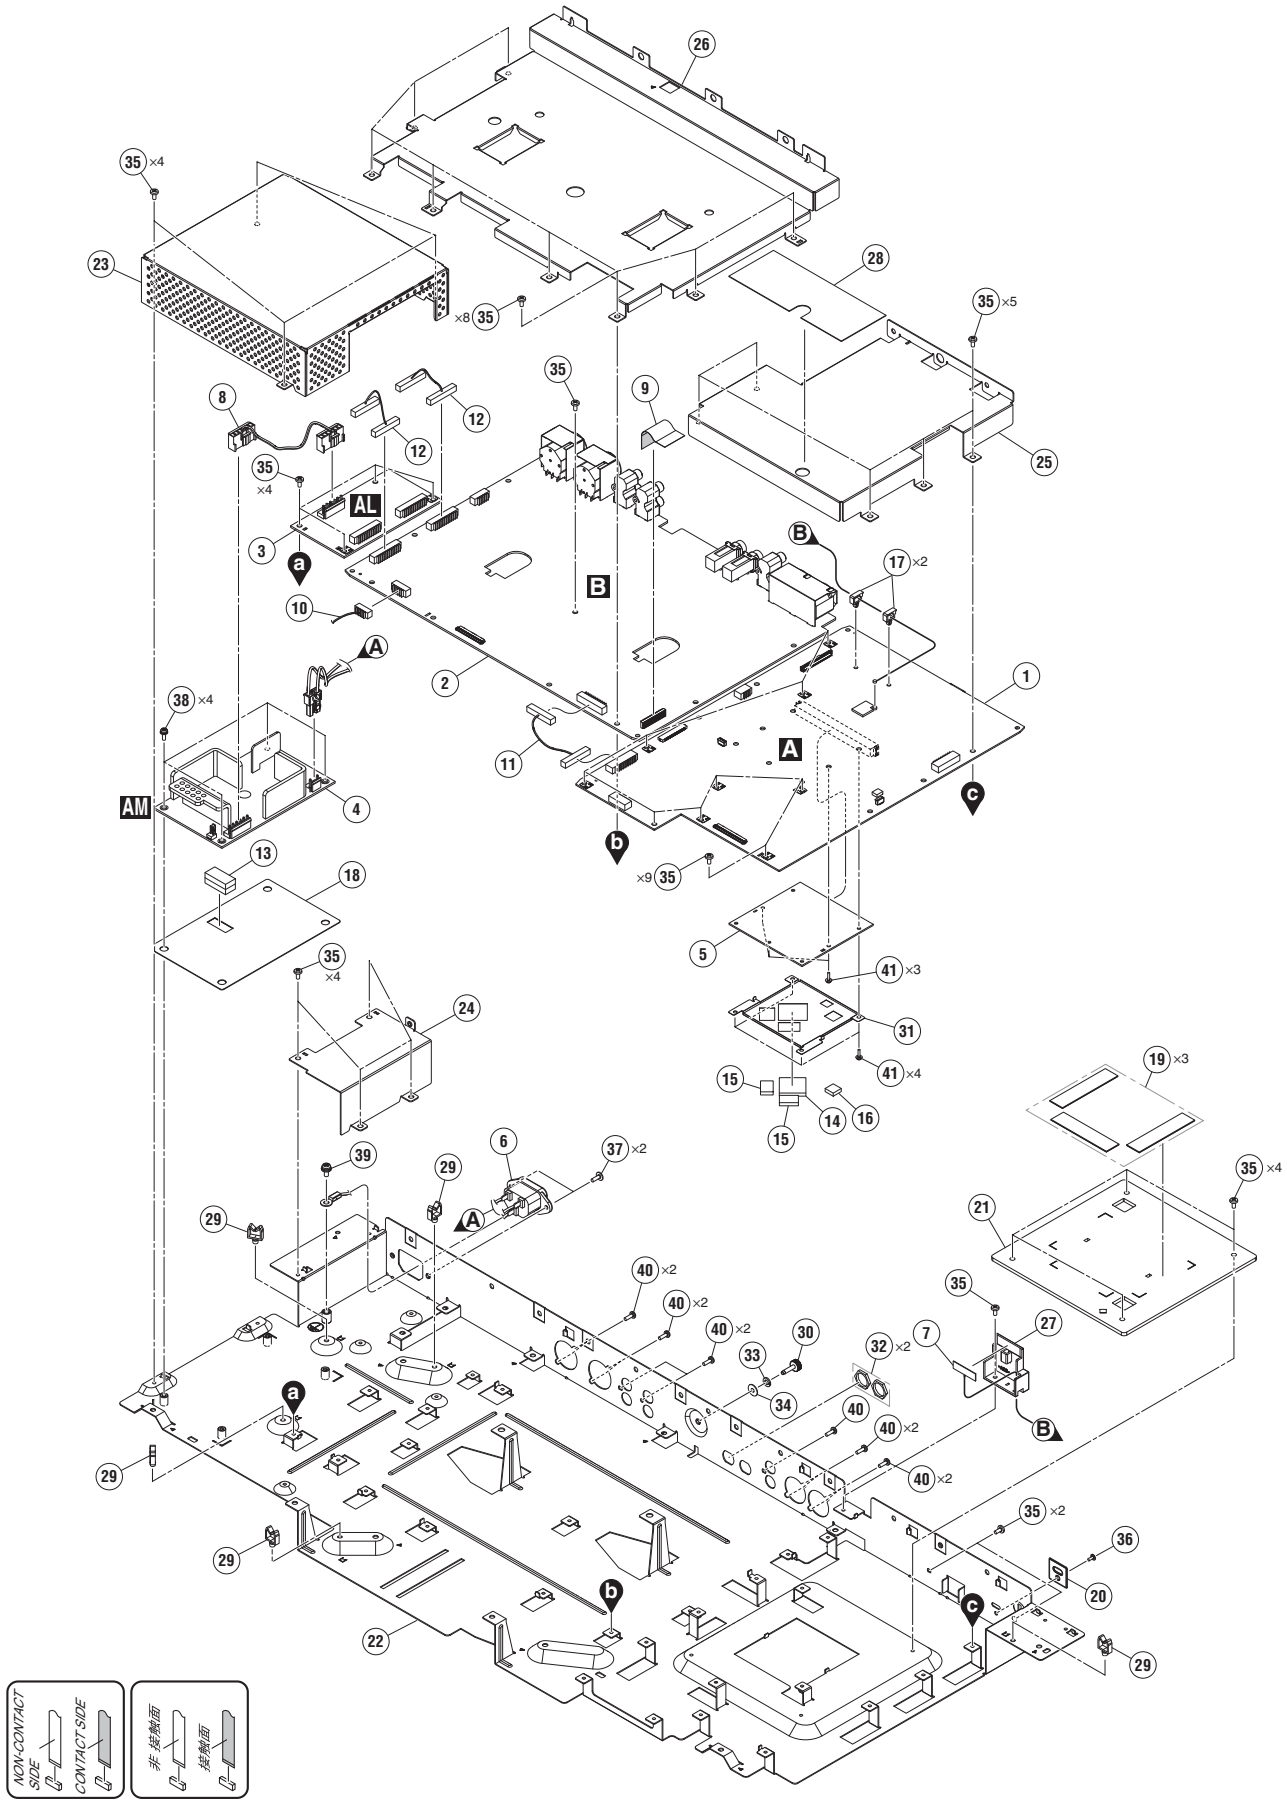


CHASSIS SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	MAIN Assy	DWX5013
	2	AUDIO Assy	DWX5014
	3	PWRB Assy	DWX5028
⚠	4	SW POWER SUPPLY	DWR1590
	5	SoM Module	DWX4722
⚠	6	AC Inlet	DKP4000
	7	Wi-Fi Antenna	DSD1005
	8	Crimp Connector	DDC1059
	9	FFC	DDD2204
	10	Parallel Jumper	PF06HH-D35A
	11	Parallel Jumper	PF12HH-S10A
	12	Parallel Jumper	PF13HH-S05A
	13	Heat Cond Sheet	DEB2091
	14	Heat Cond Sheet	DEB2092
	15	Heat Cond Sheet	DEB2093
	16	Heat Cond Sheet	DEB2094
	17	Locking Mini Clamp	DEC2439
⚠	18	Barrier	DEC4052
	19	EMI Absorb Sheet	DEC4091
	20	Sheet	DEC4182
	21	Heat Sink	DNH3535
	22	Stay	DNH3616
	23	Shield Case	DNH3617
	24	Shield Case	DNH3618
	25	Shield Case	DNH3619
	26	Shield Case	DNH3620
	27	Holder	DNK7188
	28	EMI Absorb Sheet	DEC4213
	29	Holder	VEC1355
	30	Earth Terminal	DKE1015
	31	Shield Case	DNH3526
	32	Nut (M12)	NKX2FNI
	33	Washer	WA32F100Q050
	34	Spring Lock Washer	WS40FNI
	35	Screw	BBZ30P060FTC
	36	Screw (M3*5)	DBA1340
	37	Screw	IBZ30P080FTB
	38	Screw	PMH30P080FTB
	39	Screw	PMH40P080FTC
	40	Screw	PPZ30P080FTB
	41	Screw	PMB20P080FNI

9.4 CONTROL PANEL SECTION (1/3)

• Bottom view




CONTROL PANEL SECTION (1/3) PARTS LIST

Mark	No.	Description	Part No.
	1	PLAY1 Assy	DWX5041
	2	PLAY2 Assy	DWX5042
	3	HPJK Assy	DWX5037
	4	SER1 Assy	DWX5039
	5	SER2 Assy	DWX5040
	6	DCKL Assy	DWX5044
	7	TMP1 Assy	DWX5045
	8	PWSW Assy	DWX5050
	9	DCKR Assy	DWX5046
	10	TMP2 Assy	DWX5047
	11	UCOM Assy	DWX5015
	12	SonicLink Module	DWX5139
	13	FFC	DDD2209
	14	FFC	DDD2213
	15	FFC	DDD2214
	16	FFC	DDD2215
	17	FFC	DDD2218
	18	FFC	DDD2219
	19	Parallel Jumper	PF03HH-B05A
	20	Parallel Jumper	PF03HH-B15A
	21	Parallel Jumper	PF03HH-B30A
	22	Button	DAC3738
	23	Lever	DNK7196
	24	Holder	DNK7197
	25	Case	DNK7198
	26	Lens	DNK7199
	27	Power Knob	DAC2306
	28	Barrier	DEC4170
	29	Barrier	DEC4171
	30	Stay/HP	DNH3182
	31	Stay	DNH3625
	32	Stay	DNH3626
	33	Nut	DBN1028
	34	Screw	BBZ30P060FTC
	35	Screw	BPZ20P060FTC
	36	Screw	BPZ30P080FTC

9.5 CONTROL PANEL SECTION (2/3)


• Bottom view

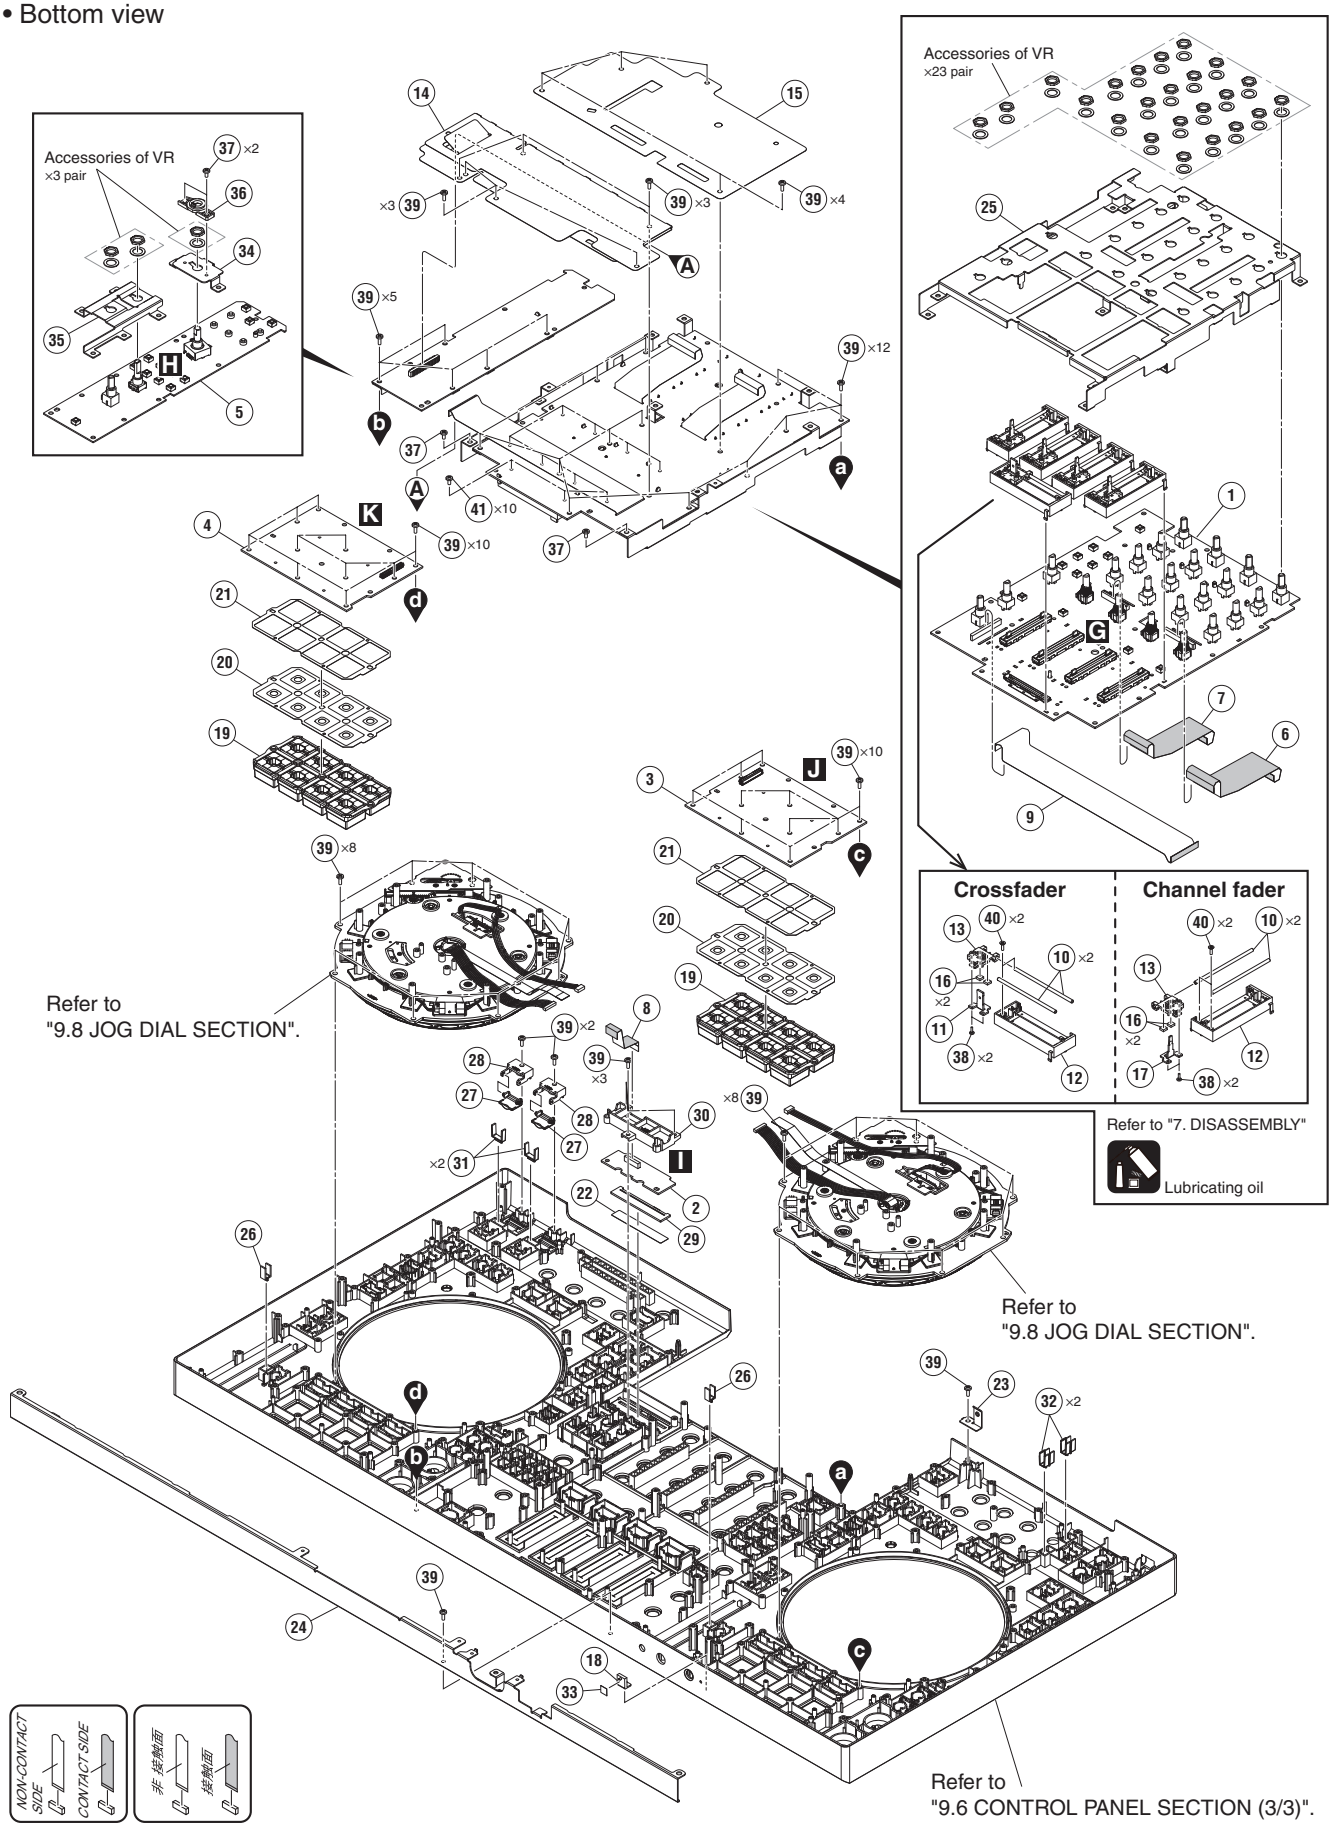


CONTROL PANEL SECTION (2/3) PARTS LIST

Mark	No.	Description	Part No.
	1	MIXER Assy	DWX5016
	2	XPAD Assy	DWX5018
	3	PADL Assy	DWX5024
	4	PADR Assy	DWX5025
	5	EFSW Assy	DWX5043
	6	FFC	DDD2211
	7	FFC	DDD2212
	8	FFC	DDD2216
	9	FFC	DDD2217
	10	Guide Shaft VK1	DLA1978
	11	Lever	DNH3505
	12	Holder	DNK7070
	13	Slider	DNK7071
	14	Barrier	DEC4172
	15	Barrier	DEC4173
	16	Cushion	DEC3640
	17	Lever	DNH3504
	18	Lens	DNK7200
	19	Button	DEB2075
	20	Sheet	DEC3739
	21	Spacer	DEC3740
	22	DS Tape	DEH1125
	23	Bracket	DNH3312
	24	Frame	DNH3624
	25	Stay	DNH3629
	26	Lens	DNK5862
	27	Door	DNK6497
	28	Holder	DNK6710
	29	Lens	DNK7052
	30	Holder	DNK7068
	31	Lens	DNK7201
	32	Lens	DNK7202
	33	DS Tape	DEH1111
	34	Stay	DNH3627
	35	Stay	DNH3628
	36	Stopper	DNK7069
	37	Screw	BBZ30P060FTC
	38	Screw	BPZ20P060FTC
	39	Screw	BPZ30P080FTC
	40	Screw	CPZ26P080FTC
	41	Screw	IPZ20P080FTC

9.6 CONTROL PANEL SECTION (3/3)

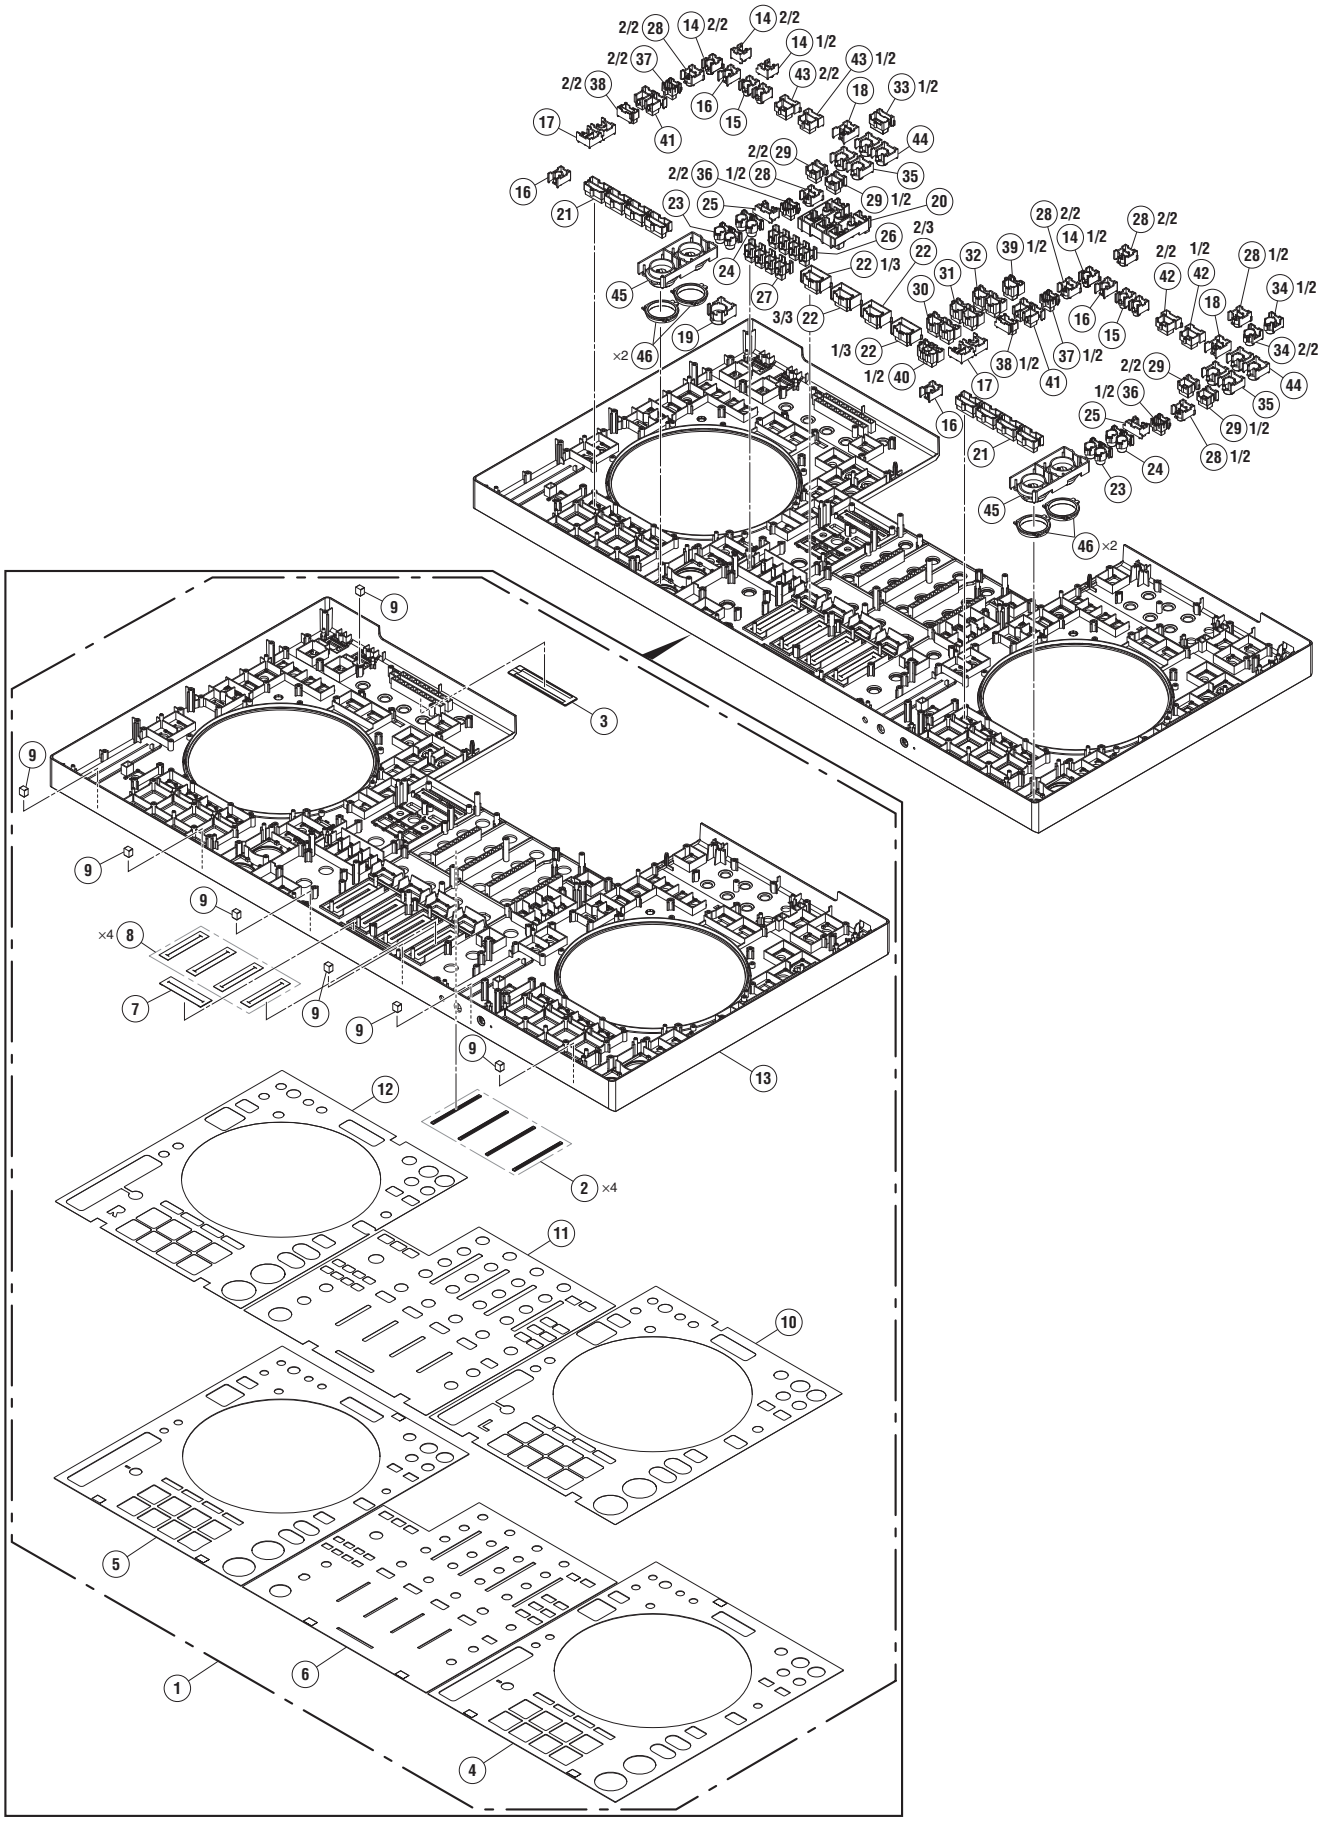


● **Cut position**

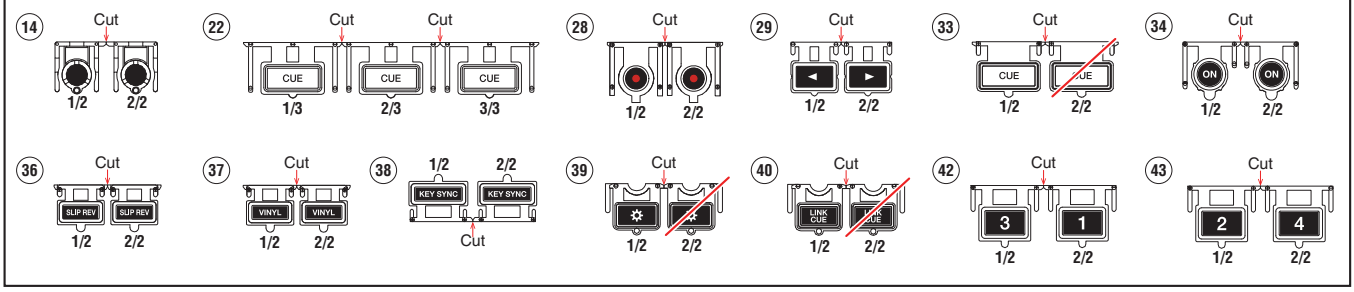

CONTROL PANEL SECTION (3/3) PARTS LIST

Mark	No.	Description	Part No.
	1	1..XDJ-AZ Panel Service Assy	DEA1181
NSP	2	2..Plate	DAH3267
NSP	3	2..Plate	DAH3437
NSP	4	2..Plate	DAH3438
NSP	5	2..Plate	DAH3439
NSP	6	2..Plate	DAH3440
	7	2..Packing	DEC3642
	8	2..Sheet	DEC3795
	9	2..Gasket	DEC4159
NSP	10	2..DS Tape	DEH1154
NSP	11	2..DS Tape	DEH1155
NSP	12	2..DS Tape	DEH1156
NSP	13	2..Control Panel	DNK7203
	14	Button/TMP	DAC2845
	15	Button/CAL	DAC3020
	16	Button/DLT	DAC3021
	17	Button/MT	DAC3029
	18	Button/REL	DAC3030
	19	Button	DAC3670
	20	Button	DAC3142
	21	Button	DAC3285
	22	Button	DAC3287
	23	Button	DAC3363
	24	Button	DAC3413
	25	Button	DAC3502
	26	Button	DAC3807
	27	Button	DAC3634
	28	Button	DAC3646
	29	Button	DAC3663
	30	Button	DAC3665
	31	Button	DAC3666
	32	Button	DAC3667
	33	Button	DAC3739
	34	Button	DAC3740
	35	Button	DAC3741
	36	Button	DAC3742
	37	Button	DAC3743
	38	Button	DAC3744
	39	Button	DAC3745
	40	Button	DAC3746
	41	Button	DAC3747
	42	Button	DAC3748
	43	Button	DAC3773
	44	Button	DAC3774
	45	Button Unit	DXB2238
	46	Ring Lens (PLAY)	DNK5315


9.7 LCD SECTION

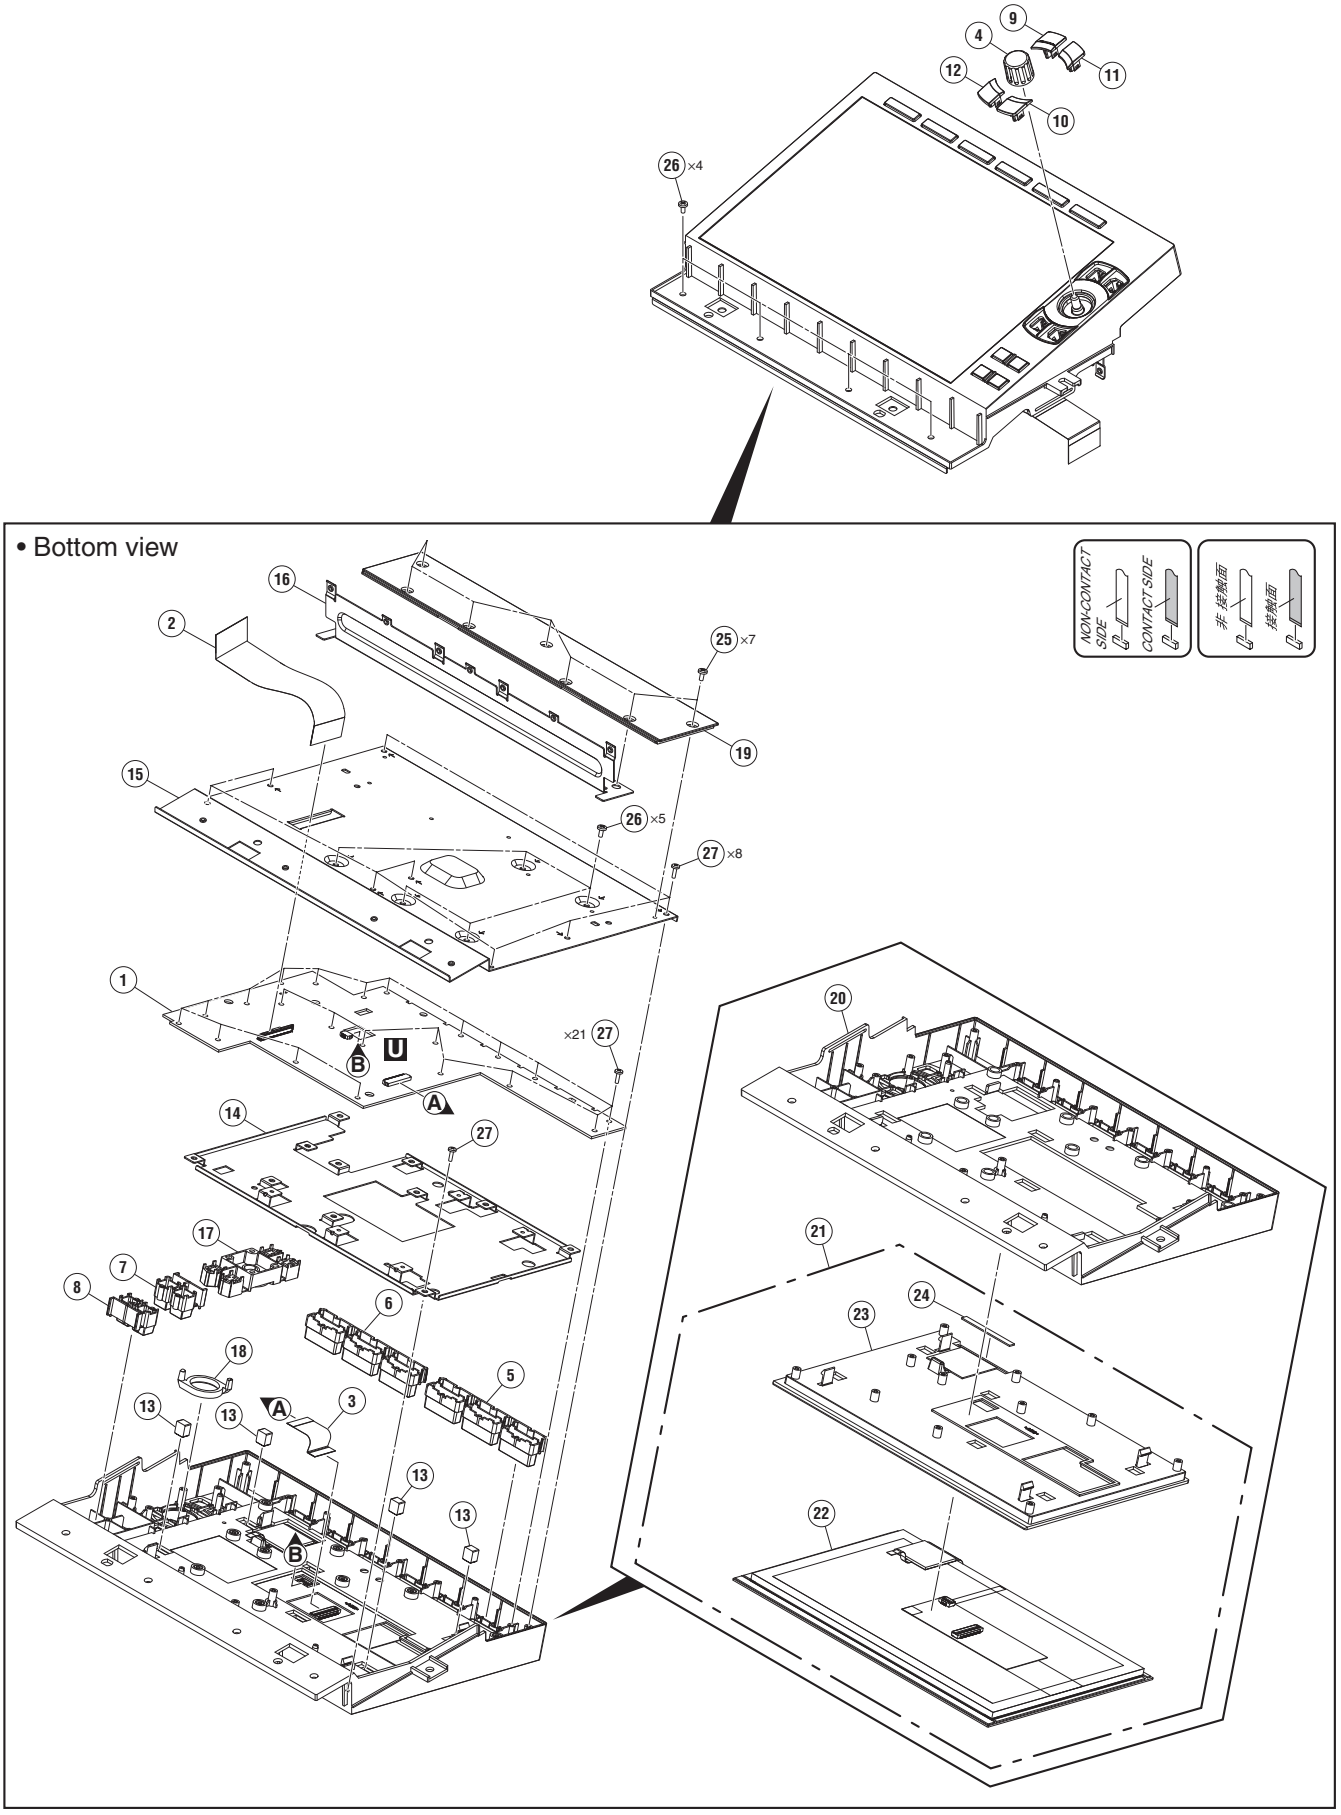

LCD SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	LCDB Assy	DWX5017
	2	FFC	DDD2207
	3	FFC	DDD2208
	4	Knob	DAA1489
	5	Button	DAC3804
	6	Button	DAC3805
	7	Button	DAC3589
	8	Button	DAC3737
	9	Button	DAC3749
	10	Button	DAC3750
	11	Button	DAC3751
	12	Button	DAC3752
	13	Gasket	DEC4159
	14	Stay	DNH3621
	15	Shield Case	DNH3622
	16	Angle	DNH3623
	17	Button	DNK7190
	18	Lens	DNK7191
	19	Cover	DNK7193
	20	Panel	DNK7194
	21	1..LCD Holder Assy	DEA1183
NSP	22	2..LCD Module	•••••
NSP	23	2..Holder	•••••
NSP	24	2..Cushion	•••••
	25	Screw	BBZ30P060FTB
	26	Screw	BBZ30P060FTC
	27	Screw	BPZ26P080FTC

9.8 JOG DIAL SECTION

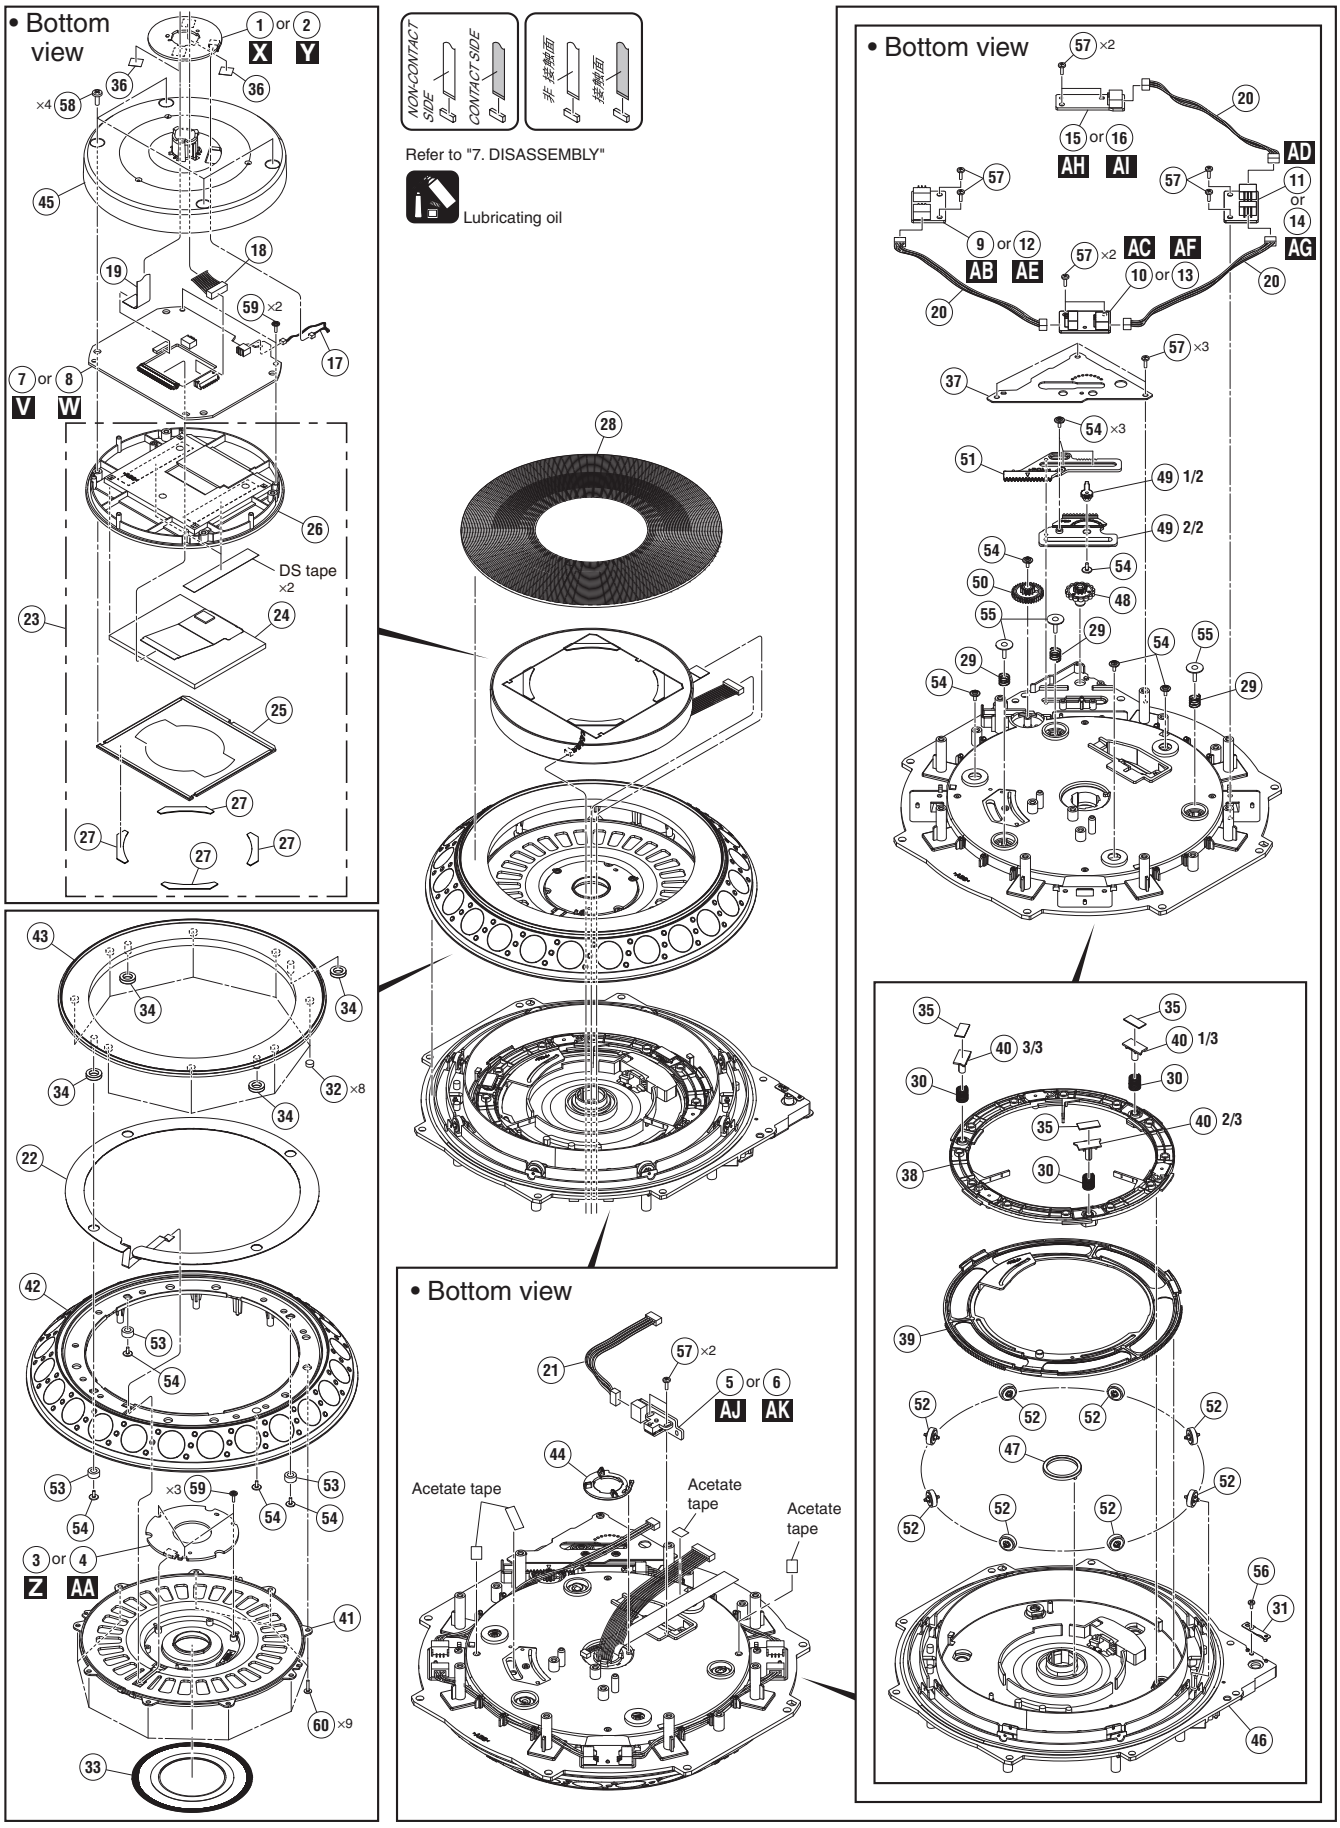

JOG DIAL SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	COILU1 Assy	DWX5020
	2	COILU2 Assy	DWX5021
	3	COILD1 Assy	DWX5022
	4	COILD2 Assy	DWX5023
	5	JOG1 ASSY	DWX5048
	6	JOG2 ASSY	DWX5049
	7	JLCDL Assy	DWX5026
	8	JLCDR Assy	DWX5027
	9	JILM1 Assy	DWX5029
	10	JILM2 Assy	DWX5030
	11	JILM3 Assy	DWX5031
	12	JILM4 Assy	DWX5032
	13	JILM5 Assy	DWX5033
	14	JILM6 Assy	DWX5034
	15	JILME1 Assy	DWX5035
	16	JILME2 Assy	DWX5036
	17	Crimp Connector	DDC1033
	18	Crimp Connector	DDC1058
	19	FFC	DDD2210
	20	Parallel Jumper	PF03HH-B12A
	21	Parallel Jumper	PF04HH-C22A
	22	Sensor	DSX1139
	23	1..JOG LCD Holder Assy	DEA1167
NSP	24	2..TFT LCD	•••••
NSP	25	2..Cover	•••••
NSP	26	2..Holder	•••••
NSP	27	2..Sheet	•••••
	28	Window	DAH3206
	29	Spring	DBH1816
	30	Spring	DBH1817
	31	Leaf Spring	DBK1394
	32	SW Cushion HH48/2	DEC2538
	33	Slit	DEC3589
	34	Cushion	DEC3807
	35	Brake	DED1189
	36	DS Tape	DEH1111
	37	Cover	DNH3367
	38	Base	DNK6774
	39	Cam	DNK6775
	40	Base	DNK6776
	41	Jog Dial	DNK6777
	42	Jog Dial	DNK6778
	43	Base	DNK6779
	44	Holder	DNK6780
	45	Holder	DNK6782

Mark	No.	Description	Part No.
	46	Holder	DNK6784
	47	Shaft	DNK6785
	48	Gear	DNK6786
	49	Gear	DNK6787
	50	Gear	DNK6788
	51	Gear	DNK6789
	52	Roller	DXB2178
	53	Damper	DEB2083
	54	Screw (FE)	DBA1265
	55	Float Screw	DBA1286
	56	Screw	BPZ20P040FTB
	57	Screw	BPZ20P060FTC
	58	Screw	BPZ30P080FTC
	59	Screw	IPZ20P060FTC
	60	Screw	IPZ20P080FTC

12. PCB PARTS LIST

NOTES: ● *Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.*

● *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*

● *When ordering resistors, first convert resistance values into code form as shown in the following examples.*

Ex.1 When there are 2 effective digits (any digit apart from 0), such as 560 ohm and 47 k ohm (tolerance is shown by J = 5%, and K = 10%).

560 Ω → 56 × 10[1] → 561 ····· RD1/4PU 5 6 1 J
47 kΩ → 47 × 10[3] → 473 ····· RD1/4PU 4 7 3 J
0.5 Ω → R50 ····· RN2H R 5 0 K
1 Ω → 1R0 ····· RS1P 1 R 0 K

Ex.2 When there are 3 effective digits (such as in high precision metal film resistors).

5.62 kΩ → 562 × 10[1] → 5621 ····· RN1/4PC 5 6 2 1 F

LIST OF ASSEMBLIES

Mark	No.	Description	Part No.
	1	MAIN ASSY	DWX5013
	1	AUDIO ASSY	DWX5014
	1	MIXER ASSY	DWX5016
NSP	1	LCDB ASSY	DWM2907
	2	LCDB ASSY	DWX5017
	2	XPAD ASSY	DWX5018
	2	USBA ASSY	DWX5019
	2	COILU1 ASSY	DWX5020
	2	COILU2 ASSY	DWX5021
	2	COILD1 ASSY	DWX5022
	2	COILD2 ASSY	DWX5023
	2	PWRB ASSY	DWX5028
	2	JOG1 ASSY	DWX5048
	2	JOG2 ASSY	DWX5049
NSP	1	PADA ASSY	DWM2908
	2	PADL ASSY	DWX5024
	2	PADR ASSY	DWX5025
	2	JLCDL ASSY	DWX5026
	2	JLCDR ASSY	DWX5027
	2	JILM1 ASSY	DWX5029
	2	JILM2 ASSY	DWX5030
	2	JILM3 ASSY	DWX5031
	2	JILM4 ASSY	DWX5032
	2	JILM5 ASSY	DWX5033
	2	JILM6 ASSY	DWX5034
	2	JILME1 ASSY	DWX5035
	2	JILME2 ASSY	DWX5036
	2	PLAY1 ASSY	DWX5041
	2	PLAY2 ASSY	DWX5042
NSP	1	SUBA ASSY	DWM2909
	2	HPJK ASSY	DWX5037
	2	MCTR ASSY	DWX5038
	2	SER1 ASSY	DWX5039
	2	SER2 ASSY	DWX5040
NSP	1	PNL1 ASSY	DWM2910
	2	DCKL ASSY	DWX5044
	2	TMP1 ASSY	DWX5045
	2	PWSW ASSY	DWX5050
NSP	1	PNL2 ASSY	DWM2911
	2	DCKR ASSY	DWX5046
	2	TMP2 ASSY	DWX5047

Mark	No.	Description	Part No.
NSP	1	UCOM ASSY	DWM2912
	2	UCOM ASSY	DWX5015
	2	EFSW ASSY	DWX5043
⚠	1	SW POWER SUPPLY	DWR1590

A MAIN ASSY

SEMICONDUCTORS

Mark	No.	Description	Part No.
	IC	101,102,104,105	U74AHC1G08G-AL5
⚠	IC	301	NJM7805DL1A
⚠	IC	302	BD9329EFJ
⚠	IC	303,304,307,308	BD9328EFJ
⚠	IC	305	AP64500SP@V
⚠	IC	306,311,2056	AP22653W6@V
	IC	309	NJM7805DL1A
⚠	IC	312	BD00IC0WEFJ
	IC	601,604,608,611	U74LVC125AG-P14
	IC	602,605,607,610	SN74LV4T125PW
	IC	612	SN74LV4T125PW
	IC	801	TMS320C6747DZKB4@V
	IC	802	W9812G6KH-6
	IC	1003	SN74AUC1G08DCK
	IC	1004,1303-1305,1503	U74AHC1G08G-AL5
NSP	IC	1203	MIMXRT1062DVJ6B@V
	IC	1302	DYW2384*
	*Part number of the initial firmware equipped		
	IC	1501	PST8430N
	IC	1502	VL211-Q4
	IC	1504	DYW2383*
	*Part number of the initial firmware equipped		
NSP	IC	1751	RTL8152B-VB-CG
	IC	1752	RTL8367N-VB-CG@V
	IC	1755	BR24G08FVT-3A@V
	IC	2053	PCM1753DBQ
	IC	2054	NJM4565MD
⚠	IC	2055	BD9851EFV
	Q	101,104,106,314	LTC023JEB
	Q	102,110,601	YJL3134KAX
	Q	103,105,107,602	LTA023JEB
	Q	108,309,316,317	MMBTSC1623YW
	Q	109,1501,1759,1957	LP3475T1G@V

Mark	No.	Description	Part No.
	Q	111,303,1758	LTC024EEB
	Q	112,304,306	MMBTSA1576QW
	Q	301	LTA024EEB
⚠	Q	302	LN2333
	Q	305,315,325,332	UMX1N_MC
	Q	310-313,318,320	MMBTSA1576QW
	Q	321,324,328,329	MMBTSC1623YW
	Q	322,323	RT3N22M
	Q	326,327,330,331	MMBTSA1576QW
	Q	333,1959,2058,2060	MMBTSA1576QW
	Q	603,604,607,609	LTC023JEB
	Q	605,606,608,610	LTA023JEB
	Q	611,613,1952,1954	LTC023JEB
	Q	612,1951	LTA023JEB
	Q	802,1960	LTC124EUB
	Q	1502,1503,2055,2056	INC2002AC1
	Q	1504,1953,2057,2059	MMBTSC1623YW
	Q	1955	2SB1689
	Q	1956	LTC023JEB
	Q	1958	LP3475T1G@V
	Q	2053,2054	2SK209G-BL-AE3
	Q	2061,2063	2SCR573D3
	Q	2062,2064	2SAR573D3
⚠	Q	2067,2068	CJL3407
	Q	2069	LTC014EEB
⚠	Q	2070	LP3475T1G@V
	Q	2071,2072	INC2002AC1
	D	102,1506,1753,1951	1SS355L@V
	D	307	MMBD202CCW
⚠	D	308,309	MM3Z5V1B
	D	614-617,1507,1508	DF2B5M4CT@V
	D	1751,1752	DAN202UM
	D	1952	RB060MM-30TF
	D	2052-2055,2059	1SS355L@V
	D	2056,2058	LMBR140F
	D	2057	RB551VM-30
	D	2060,2061	RB501VM-40

MISCELLANEOUS

	L	102,601 SMD FERRITE BEADS	DTF1122
	L	301,306,307 CHOKE COIL (10 uH)	CTH1486
	L	302 SMD SPL INDUCTOR (22 uH)	CTH1521
	L	303 SMD SPL INDUCTOR (47 uH)	CTH1597
	L	304 CHOKE COIL (4.7 uH)	CTH1480
	L	602,607 SMD FERRITE BEADS	DTF1124
	L	603,604,609,1502 COIL	ATH7015
	L	608,611 SMD FERRITE BEADS	DTF1122
	L	610 SMD FERRITE BEADS	DTF1124
	L	801 SMD FERRITE BEADS	CTF1823
	L	1203,1501 POWER INDUCTOR (4.7 uH)	ATH7047
	L	1301,1302 SMD FERRITE BEADS	DTF1122
	L	1751,1753 SMD FERRITE BEADS	DTF1123
	L	1756,1757 COIL	ATH7015
	L	2052,2053 POWER INDUCTOR (2 uH)	ATH7011
	L	2054,2055 FERRITE CORE	VTF1093
	L	2056 CHIP SOLID INDUCTOR	XTL3010
	F	301 EMI FILTER	DTL1106
NSP	JA	1501 USB JACK	DKN1694
	JA	1751 RJ45 CONNECTOR	VKN2023
	K	601-607 SPACER	YSMTSO-75846-ET@V
	KN	101,102 SCREW PLATE	VNE1948
	KN	103-109 WRAPPING TERMINAL	CKF1089
	KN	111 WRAPPING TERMINAL	CKF1089
	KN	1501 SUPPORT	DNH3537
	T	1751,1752,1757,1758 TRANSFORMER	DTX1012
	X	1201 CRYSTAL RESONATOR (24 MHz)	DSS1241
	X	1501,1751 CRYSTAL RESONATOR (25 MHZ)	DSS1218
	X	1752 CRYSTAL RESONATOR (25.000 MHz)	DSS1218
	CN	101 CONNECTOR	HWW-SR1220-J1@V
	CN	102 FFC/FPC CONNECTOR	CKS6869
	CN	103 FFC/FPC CONNECTOR	CKS6646
	CN	104 FFC/FPC CONNECTOR	CKS6543
	CN	601 CONNECTOR	HWW-SR1020-J1@V
	CN	602 CARD EDGE CONNECTOR	DKX1057
	CN	2051 CONNECTOR	HWW-SR0720-J1@V
NSP	U	1951 WI-FI MODULE	SX-SDMAX-2530S

RESISTORS

	R	101-104,106,107	RC0402JR-0722RL@V
	R	105,108,112-122	RC0402JR-070RL@V
	R	109-111,123,126	RC0402JR-0722RL@V
	R	124,127,128,131	RC0402JR-070RL@V
	R	125	RT0603DRD0768RL@V
	R	129,130,133,136	RC0402JR-0722RL@V
	R	132,134,135,137	RC0402JR-070RL@V
	R	138,148,1329,1339	RC0402JR-0756RL@V
	R	139,141,147	RC0402JR-0722RL@V
	R	143-145,149,184	RC0402JR-070RL@V
	R	150,152,364,370	RC0402JR-0710KL@V
	R	151,161,166,356	RC0402JR-072K2L@V
	R	153,314,315,319	RC0402JR-071KL@V
	R	154,168,176	RC0402JR-07100RL@V
	R	155,2086,2088	RC0402JR-0722KL@V
	R	156,355,464,474	RC0402JR-0733KL@V
	R	157,445,665,1535	RC0402JR-0747KL@V
	R	158,316,317,321	RC0402JR-07100KL@V
	R	162-164	RC1206JR-072RL@V
	R	167,436,437,719	RC0402JR-074K7L@V
	R	169-174,177-183	RC0402JR-0722RL@V
	R	175,303-306,312	RC0805JR-070RL@V
	R	185-187	RC0402JR-0768RL@V
	R	301,302	RC1206JR-070RL@V
	R	308,310,313,368	RC0402JR-0722RL@V
	R	318,416,629,1201	RC0603JR-070RL@V
	R	320	RC0402DR-0739KL@V
	R	322	RC0402DR-07200KL@V
	R	323,345	RC0402DR-0722KL@V
	R	324,327,339,344	RC0402DR-0715KL@V
	R	325,379,380,634	RC0402JR-071KL@V
	R	326	RC0402DR-0733KL@V
	R	328,390,393,430	RC0402DR-0718KL@V
	R	329,381,382,1363	RC0402JR-07100KL@V
	R	331,394,443	RC0402DR-072K2L@V
	R	332,383,418,444	RC0402DR-078K2L@V
	R	333,334,384,385	RC0402DR-0710KL@V
	R	336	RC0402DR-07750RL@V
	R	337,371,404,417	RC0402DR-073K3L@V
	R	338	RC0402DR-079K1L@V
	R	342,346-348,358	RC0805JR-070RL@V
	R	343	RC0402DR-07110KL@V

Mark	No.	Description	Part No.
	R	349,357,372,373	RC0402JR-070RL@V
	R	350,411,412,2143	RC0603JR-071KL@V
	R	351	RC0603JR-07100KL@V
	R	353,360,377,386	RC0402DR-071K5L@V
	R	354,378,473,477	RC0402DR-074K7L@V
	R	359,362,363,406	RC0805JR-070RL@V
	R	361,387,427,453	RC0402DR-072K7L@V
	R	365,399,409,420	RC0402JR-072K2L@V
	R	369,421,422,621	RC0402JR-0722RL@V
	R	388,391	RC0402DR-0782KL@V
	R	389,392,2097-2100	RC0402DR-071KL@V
	R	396,405,413,414	RC0402JR-0710KL@V
	R	400	RC0402DR-074K3L@V
	R	401	RC0402DR-076K8L@V
	R	402,408,410,415	RC0402JR-070RL@V
	R	403,460,2101-2104	RC0402DR-071K8L@V
	R	407,438,440,1538	RC0805JR-070RL@V
	R	419,1980	RC0402JR-0718KL@V
	R	423,442,447,458	RC0402JR-070RL@V
	R	424,425,2066	RC0402JR-07180RL@V
	R	426,431,433,454	RC0402DR-071K5L@V
	R	428,446,451,457	RC0402JR-072K2L@V
	R	429,434,435,456	RC0402JR-0710KL@V
	R	432,2067	RC0402DR-0718KL@V
	R	439,441,615,647	RC0402JR-07330RL@V
	R	448,2083,2084	RC0402DR-073K3L@V
	R	449	RC0402DR-078K2L@V
	R	450	RC0402JR-0768KL@V
	R	452,2120	RC0402DR-075K6L@V
	R	455	RC0402DR-072K7L@V
	R	459,461,466	RC0402JR-070RL@V
	R	465,475,479,620	RC0402JR-072K2L@V
	R	468-471,644	RC0402JR-070RL@V
	R	472,476,2068	RC0402DR-071K5L@V
	R	478	RC0402JR-0733KL@V
	R	601-603,606,607	RC0402JR-07100RL@V
	R	604,694	RC0402JR-07220RL@V
	R	605,608,610,614	RC0402JR-0710KL@V
	R	609,611,612	RC0402JR-07100RL@V
	R	622,1751,1770	RC0402JR-072K2L@V
	R	623,692,697-699	RC0402JR-0722RL@V
	R	625-628,631,632	RC0402JR-07100RL@V
	R	635,637,638	RC0402JR-07100RL@V
	R	636,652,653,657	RC0402JR-0710KL@V
	R	639,669,676,677	RC0402JR-071KL@V
	R	640-642,645,646	RC0402JR-07100RL@V
	R	648,660,693,1956	RC0402JR-07330RL@V
	R	649-651,654,655	RC0402JR-070RL@V
	R	656,658,659	RC0402JR-07100RL@V
	R	661-664,666-668	RC0402JR-07100RL@V
	R	671-674,678,681	RC0402JR-07100RL@V
	R	679,685,1008	RC0402JR-0710KL@V
	R	682,684,686	RC0402JR-07100RL@V
	R	688-691,695	RC0402JR-07100RL@V
	R	701-711,716,717	RC0402JR-07100RL@V
	R	721,825,1010	RC0402JR-071KL@V
	R	801,802	RAB4CQ680J
	R	803,804,806-808	RC0402JR-0782RL@V
	R	805	RC0402JR-0733RL@V

Mark	No.	Description	Part No.
	R	809,810,818	RAB4CQ820J
	R	811,812,1007,1036	RC0402JR-070RL@V
	R	813-817	RC0402JR-0782RL@V
	R	819,1003-1006,1009	RC0402JR-07100RL@V
	R	820-823	RAB4CQ470J
	R	1013-1017,1022-1024	RC0402JR-071KL@V
	R	1018-1020,1031,1034	RC0402JR-0710KL@V
	R	1026,1027,1029,1030	RC0402JR-07100RL@V
	R	1028,1033,1038,1039	RC0402JR-0722RL@V
	R	1032,1035,1037	RC0402JR-07100RL@V
	R	1040,1047,1061,1063	RC0402JR-0710KL@V
	R	1041,1783,1959-1962	RC0402JR-0722RL@V
	R	1042-1044,1046	RC0402JR-07100RL@V
	R	1045,1049,1050	RC0402JR-070RL@V
	R	1048,1054,1504,1508	RC0402JR-074K7L@V
	R	1051-1053,1058-1060	RC0402JR-07100RL@V
	R	1055-1057,1066,1071	RC0402JR-070RL@V
	R	1062,1064,1065	RC0402JR-07100RL@V
	R	1067-1070,1073,1225	RC0402JR-07100RL@V
	R	1072,1074,1229,1233	RC0402JR-070RL@V
	R	1227	RC0603JR-072M2L@V
	R	1228,1232,1302,1303	RC0402JR-0710KL@V
	R	1231,1322,1324-1326	RC0402JR-07100RL@V
	R	1304,1307,1380,1382	RC0402JR-071KL@V
	R	1305,1311,1313,1314	RC0402JR-0710KL@V
	R	1306,1309	RC0402JR-073K3L@V
	R	1316,1318,1319,1321	RC0402JR-0710KL@V
	R	1323,1333,1352,1357	RC0402JR-070RL@V
	R	1328,1336,1338,1343	RC0402JR-0710KL@V
	R	1330-1332,1334,1350	RC0402JR-07100RL@V
	R	1340,1341	RC0402JR-07150RL@V
	R	1345-1347,1359,1379	RC0402JR-0710KL@V
	R	1355,1356,1358	RC0402JR-07100RL@V
	R	1360-1362,1367,1368	RC0402JR-07100RL@V
	R	1364,1501,1525,1763	RC0603JR-070RL@V
	R	1365,1369,1371,1372	RC0402JR-07100KL@V
	R	1370,1376,1507,1511	RC0402JR-07100RL@V
	R	1373-1375,1377,1378	RC0402JR-070RL@V
	R	1381,1384,1391,1505	RC0402JR-0710KL@V
	R	1383,1385	RC0402JR-071KL@V
	R	1386,1515,1520,1523	RC0402JR-070RL@V
	R	1502	RC0402FR-071K2L@V
	R	1503	RC0402DR-074K7L@V
	R	1506,1509,1510,1512	RC0402JR-0710KL@V
	R	1513,1514,1516,1766	RC0402JR-07100RL@V
	R	1517,1518,1521,1522	RC0402JR-0710KL@V
	R	1524,1526-1528,1531	RC0402JR-0710KL@V
	R	1529,1530	RC0603DR-075K1L@V
	R	1532,1534,1539,1767	RC0402JR-0710KL@V
	R	1533,1800,1977,2139	RC0402JR-07100KL@V
	R	1536	RC0402JR-0747KL@V
	R	1537	RC1206JR-0710RL@V
	R	1754,1757,1760,1765	RC0402JR-074K7L@V
	R	1755,1772	RC0402FR-072K49L@V
	R	1761,1762,1825-1828	RC0603JR-0775RL@V
	R	1768,1769,1777,1778	RC0402JR-07100RL@V
	R	1771,1779,1780,1784	RC0402JR-074K7L@V
	R	1773-1776,1964,1978	RC0402JR-070RL@V
	R	1785,1788	RC0402JR-07100RL@V

Mark	No.	Description	Part No.
R	1786,1789-1794,1797		RC0402JR-074K7L@V
R	1795		RAB4CQ472J
R	1798,1985		RC0402JR-074K7L@V
R	1799,1955,1974-1976		RC0402JR-0710KL@V
R	1965-1967,2065		RC0402JR-0722RL@V
R	1979,1981,2125,2126		RC0402JR-0710KL@V
R	1984,2052,2076,2140		RC0402JR-070RL@V
R	1986		RC0402JR-07470RL@V
R	2051,2053		RC0402DR-07470RL@V
R	2073-2075		RC0402JR-0722RL@V
R	2079,2080		RC0402DR-075K1L@V
R	2081,2082,2115		RC0402DR-0715KL@V
R	2085,2087		RC0402JR-071ML@V
R	2090,2092		RC0805JR-0768RL@V
R	2093-2096		RC0603DR-073K3L@V
R	2105-2112		RC1206JR-0722RL@V
R	2116,2123,2133		RC0402DR-0710KL@V
R	2117,2129		RC0402DR-0730KL@V
R	2118,2132		RC0402DR-0768KL@V
R	2119		RC0402DR-0751KL@V
R	2121		RC0402JR-0720KL@V
R	2122		RC0402DR-07220RL@V
R	2124,2127		RC0603JR-0722RL@V
R	2128,2138		RC0402JR-0710KL@V
R	2131		RC0402JR-075K1L@V
R	2134		RC0402DR-0762KL@V
R	2135		RC0402DR-071KL@V
R	2136		RC0402DR-073KL@V
R	2141,2142		RC0603JR-0722KL@V
R	2144		RC0603JR-071KL@V

CAPACITORS

C	104,106,111,113		CC0402KRX7R9BB102
C	105,114,119,138		0402B104K250CT
C	107,136,137,155		0402B103K250CT
C	108,112,122,128		CC0402KRX7R7BB104
C	110,116,121		VWV107M025ANG03K
C	117,123,126,129		CC0402KRX7R9BB102
C	133,141,145,147		CC0402KRX7R7BB104
C	134,135,304,307		CC0402JRNPO9BN100
C	139,143,314,316		0402B104K250CT
C	140,142,144,146		CC0402KRX7R9BB102
C	151,305,309,317		CC0402KRX7R7BB104
C	152,302,308,312		CC0402KRX7R9BB102
C	156,337		0402B472K500CT
C	157		0402X105K250CT
C	158		0603X474K250CT
C	301,430,835,1260		0603X105K160CT
C	303,2144,2150,2160		0805X106K160CT
C	306,323,324,326		0805X226M250CT
C	313,347,351,354		0805X106K250CT
C	319,329,331,332		CC0402KRX7R9BB102
C	320,325,345,352		CC0402KRX7R7BB104
C	321,448		0603X225K250CT
C	327,330,334,391		0402B104K160CT
C	328,335,365,378		0402B104K250CT
C	333,413-415,426		0402B103K250CT
C	338,344,348,357		CC0402KRX7R9BB102
C	341		0402B222K500CT
C	346		0402B332K500CT
C	353,358,409,410		VWV476M016ANE01K
C	356,363,372		0805X106K250CT
C	359,373,383,384		CC0402KRX7R7BB104
C	361 (0.1 uF)		ACE7100
C	362,364,367,381		0805X226M250CT
C	366 (220 uF/6.3 V)		DCH1367
C	368,376,377,385		CC0402KRX7R9BB102
C	369,601 (1 uF)		ACE7129
C	370 (100 uF/6.3 V)		ACH7275
C	371,374,602,607		CC0402JRNPO9BN100
C	375,431		0603X106K6R3CT
C	380 (100 uF/16 V)		CCH1565
C	382		0805X226M250CT
C	386,393-396,401		CC0402KRX7R9BB102
C	389,390,403,404		CC0402KRX7R7BB104
C	392		0402B104K160CT
C	399,400,434,438		CC0402JRNPO9BN101
C	402,436,440,445		CC0402KRX7R9BB102
C	405-408,416,417		0805X106K250CT
C	411,412,418,420		CC0402KRX7R7BB104
C	422-425,1752,2071		0805X106K100CT
C	427,801-805,807		0402B103K250CT
C	428,429		VWV107M016ANE04K
C	432		VDV107M6R3ANE01K
C	433,435,437,439		0402B104K250CT
C	441,444,446		0402B104K250CT
C	442,443,606,832		CC0402JRNPO9BN101
C	603,838,1282,1307		0805X106K250CT
C	604,608,609,611		CC0402KRX7R7BB104
C	605,610,616,618		CC0402KRX7R9BB102
C	615,617,619,620		CC0402KRX7R7BB104
C	624,625,627-630		CC0402KRX7R7BB104
C	806,808,810,812		CC0402KRX7R9BB102
C	809,811,813,815		0402B103K250CT
C	814,816,818,820		CC0402KRX7R9BB102
C	817,819,821,823		0402B103K250CT
C	822,824,826,828		CC0402KRX7R9BB102
C	825,827,829,831		0402B103K250CT
C	830,833,1006,1010		CC0402KRX7R9BB102
C	834,837,839-845		0402B103K250CT
C	836,1264,1268		0402B224K160CT
C	1001,1003,1007,1011		CC0402KRX7R7BB104
C	1005,1009,1263,1274		0402B103K250CT
C	1012,1247,1249,1251		CC0402KRX7R7BB104
C	1013,1301,1311,1316		CC0402KRX7R9BB102
C	1246,1250,1253,1258		0603X475K100CT
C	1248,1259,1291,1501		CC0402JRNPO9BN100
C	1252,1254,1255,1262		CC0402KRX7R7BB104
C	1256,1289		VWV226M6R3ANB01K
C	1265,1267,1287,1288		0603X475K100CT
C	1266,1275		0402N5R0C500CT
C	1269,1306,1308,1310		CC0402JRNPO9BN471
C	1270-1273,1276-1279		0402B224K160CT
C	1281,1283-1285,1290		0402B224K160CT
C	1292-1295		0402B224K160CT
C	1296,2156		0603X475K100CT
C	1302,1303,1507,1773		0402B103K250CT
C	1305,1312,1314,1315		CC0402KRX7R7BB104
C	1309,1324,1770,1849		CC0402JRNPO9BN101
C	1317,1319,1323,1503		CC0402KRX7R7BB104

Mark	No.	Description	Part No.
	C	1318,1320,1520,1963	CC0402KRX7R9BB102
	C	1321,2162	CC0402JRNPO9BN471
	C	1502,1504,1506,1522	0805X106K250CT
	C	1505,1508-1515,1518	CC0402KRX7R7BB104
	C	1516,1517,1751,1753	CC0402JRNPO9BN120
	C	1521,1525-1527	CC0402KRX7R7BB104
	C	1528	0603B104K500CT
	C	1529	1206X225K500CT
	C	1531,1533,2077,2093	0603B104K250CT
	C	1532,1534	0603B102K500CT
	C	1754-1762,1764,1767	CC0402KRX7R7BB104
	C	1763,1765,1766,1769	0603X105K160CT
	C	1768,1778,1785,1859	CC0402KRX7R7BB104
	C	1771,1772	CC0603JRNPO9BN102
	C	1775,1780,2063,2064	0805X106K250CT
	C	1776,1810,1812	0603X105K160CT
	C	1779,1781-1784,1786	0402B103K250CT
	C	1789	CC0402JRNPO9BN120
	C	1790,1793-1796	0402B103K250CT
	C	1797	CC0402JRNPO9BN100
	C	1798-1809,1811,1969	0402B103K250CT
	C	1860 (1000 pF)	ACG1127
	C	1862,1863,1959-1962	CC0402KRX7R7BB104
	C	1953-1955	0805X226M100CT
	C	1956-1958,1971,1976	0603X105K160CT
	C	1964,1979,2165,2166	CC0402KRX7R9BB102
	C	1965,1966	CC0402JRNPO9BN101
	C	1977,2149,2151,2153	0603X105K250CT
	C	1978,2062,2069,2148	CC0402KRX7R7BB104
	C	2061,2079,2175,2178	CC0402JRNPO9BN102
	C	2065	VWV476M016ANE01K
	C	2067,2073,2078,2172	0402B103K250CT
	C	2068	0805X106K250CT
	C	2072,2169,2170	0805X106K100CT
	C	2075	VGV107M016ANE01K
	C	2094 (22 uF/25 V)	DCH1383
	C	2095,2096	VGV476M016ANE01K
	C	2097,2098	CC0603JRNPO9BN391
	C	2100,2101	CC0603JRNPO9BN680
	C	2102,2105	CC0402JRNPO9BN330
	C	2103,2107,2108,2110	0603B104K250CT
	C	2112,2117	VGV227M016ANG03K
	C	2113-2116	0603B104K250CT
	C	2138	0603X474K160CT
	C	2139	0603X334K250CT
	C	2140,2145	CC0402JRNPO9BN221
	C	2141	CC0402KRX7R7BB223
	C	2146,2147	0805B104K500CT
	C	2155	CC0402KRX7R9BB682
	C	2158,2159,2164	CC0402KRX7R7BB104
	C	2161	0805X106K160CT
	C	2163,2167,2168	0603X105K160CT
	C	2171,2173 (470 uF/16 V)	CCH1680
	C	2177,2179	0603B223K500CT

B AUDIO ASSY

SEMICONDUCTORS

Mark	No.	Description	Part No.
⚠	IC	5001	NJM78M09DL1A
⚠	IC	5002,5006-5008	NJM2872BF33
⚠	IC	5003	NJM7805DL1A
⚠	IC	5004,5005	BD9851EFV
⚠	IC	5010	NJM78M15DL1A
⚠	IC	5011	LM337KVUG3
⚠	IC	5012	BD9E302EFJ@V
⚠	IC	5013,5015,5055	BD9328EFJ
	IC	5018	ES9016K2M@V
	IC	5019	NJM8080RB1S1
	IC	5020-5034	U74AHC1G08G-AL5
	IC	5035,5036,5039,5040	NJM4580MD
	IC	5037,5038	NJM4580DD
	IC	5041,5044	PCM1753DBQ
	IC	5042,5043,5052,5053	NJM4580MD
	IC	5045	NJM4565MD
	IC	5046,5047	NJM4585M
	IC	5050,5051,5054	PCM1803ADB
⚠	Q	5001,5003	CJL3407
⚠	Q	5002	DMP4065S
⚠	Q	5004	LN2333
	Q	5005,5006	LTC014EEB
⚠	Q	5007,5008,5013	LP3475T1G@V
	Q	5011,5012,5015,5089	LTC024EEB
	Q	5014,5017,5019,5021	MMBTSA1576QW
	Q	5016,5018,5032	2SC4154-11
	Q	5022	LTC014YEB
	Q	5023-5025,5031,5068	MMBTSC1623YW
	Q	5026	MMDT5212W
	Q	5027	LSC4081UB
	Q	5028	LSA1576UB
	Q	5029	RT3T22M
	Q	5030,5034	RT3N22M
	Q	5033	HN1A01FUS1
	Q	5035	RN2903
	Q	5036-5049,5056-5059	INC2002AC1
	Q	5064,5065,5084-5087	2SK209G-BL-AE3
	Q	5066,5067,5078-5081	INC2002AC1
	Q	5069,5071,5088,5092	MMBTSA1576QW
	Q	5070	MMBTSC1623YW
	Q	5072,5074	2SCR573D3
	Q	5073,5075	2SAR573D3
	Q	5082,5083	LTA024EEB
	Q	5093	LTC024EEB
	Q	5094	MMBTSA1576QW
⚠	D	5002,5003,5007,5010	LMBR140F
	D	5006	RB551VM-30
⚠	D	5009	1SS355L@V
	D	5011,5012,5021,5022	1SS355L@V
	D	5015,5016,5018,5019	RB501VM-40
⚠	D	5020	UDZV7R5
	D	5023,5028,5029	MMBD202CCW
	D	5024,5027,5033	1SS355L@V
	D	5030	UDZV7R5
	D	5031	RBR1MM30A
	D	5035-5038,5053,5054	1SS355L@V
	D	5039-5042	AZ4612-01L
	D	5043-5046	RB548W
	D	5051,5052	DAN217UM

MISCELLANEOUS

Mark	No.	Description	Part No.
	L	5001-5004 POWER INDUCTOR (22 uH)	ATH7011
	L	5007,5008 FERRITE CORE	VTF1093
	L	5009 CHOKE COIL (4.7 uH)	CTH1480
	L	5010 SMD SPL INDUCTOR (47 uH)	CTH1597
	L	5011,5012 CHOKE COIL (15 uH)	CTH1487
	L	5013-5016 CHIP SOLID INDUCTOR	XTL3010
	L	5017 CHIP SOLID INDUCTOR	QTL1013
	JA	5001,5002 CANON CONNECTOR	DKB1093
	JA	5003,5006,5007 RCA JACK	DKB1131
	JA	5004,5005 6.5 DIA JACK	DKN1669
	JA	5008,5009 XLR SOCKET	DKB1124
	X	5001 OSCILLATOR (22.5792 MHz)	DSS1237
	CN	5001,5003 CONNECTOR	HWW-SL1320-J1@V
	CN	5002,5007 CONNECTOR	HWW-SL0620-J1@V
	CN	5004 CONNECTOR	HWW-SL1220-J1@V
	CN	5005 FFC/FPC CONNECTOR	CKS6645
	CN	5006 FFC/FPC CONNECTOR	DKN1678
		9001 CANON SHIELD	DNF1789
		9002,9003 PHONE SHIELD	DNF1875
		9004,9005 MIC SHIELD	DNF1849
	VA	5001-5022 VARISTORS	EZJZ1V270RM

RESISTORS

	R	5003,5076,5077,5653	RC0805JR-070RL@V
	R	5004	RC0402JR-07220RL@V
	R	5005-5007,5009-5012	RC0402JR-070RL@V
	R	5016,5018,5035,5446	RC0402DR-0715KL@V
	R	5017,5019,5030,5034	RC0402DR-0710KL@V
	R	5020,5022,5046,5047	RC0402DR-0730KL@V
	R	5021,5023,5052,5054	RC0402DR-0768KL@V
	R	5026	RC0402DR-0751KL@V
	R	5027	RC0402DR-07180KL@V
	R	5028	RC0402DR-075K6L@V
	R	5029,5031	RC0402JR-0720KL@V
	R	5032,5172,5174,5448	RC0402DR-073K3L@V
	R	5033,5115,5143	RC0402DR-0733KL@V
	R	5036,5038,5043	RC0603JR-0722RL@V
	R	5037,5039-5041,5044	RC0402JR-0710KL@V
	R	5042,5374,5375	RC0603JR-0733RL@V
	R	5045,5064,5066,5067	RC0402JR-0710KL@V
	R	5050,5169,5462-5465	RC0402DR-071KL@V
	R	5051	RC0402DR-076K2L@V
	R	5055,5056,5110,5168	RC0402DR-0710KL@V
	R	5057,5118,5122	RC0402DR-07150KL@V
	R	5058,5444,5445	RC0402DR-075K1L@V
	R	5059	RC0402DR-0762KL@V
	R	5060,5154,5166	RC0402DR-07100RL@V
	R	5061,5102	RC0402DR-0720KL@V
	R	5062	RC0402DR-073KL@V
	R	5068	RC0402JR-07150KL@V
	R	5069,5093,5106-5108	RC0402JR-07100KL@V
	R	5070,5100,5101,5147	RC0402JR-070RL@V
	R	5071-5074,5482,5483	RC1206JR-070RL@V
	R	5081,5082	RC0603DR-07620RL@V
	R	5083	RC0603DR-0775RL@V
	R	5084,5298-5301	RC0603DR-07120RL@V
	R	5096,5177-5180,5224	RC0402JR-0722RL@V
	R	5103-5105	RC0402JR-071KL@V
	R	5111	RC0402DR-0775KL@V
	R	5112	RC0402DR-0724KL@V

Mark	No.	Description	Part No.
	R	5113,5114	RC0402DR-0727KL@V
	R	5116,5117,5120,5124	RC0402DR-0718KL@V
	R	5119,5123	RC0402DR-0712KL@V
	R	5127,5149,5204,5521	RC0402JR-0710KL@V
	R	5128	RC0402JR-073K3L@V
	R	5129-5131,5134-5136	RC1206JR-073R3L@V
	R	5133	RC0402JR-0733KL@V
	R	5137,5138,5654,5680	RC0402JR-074K7L@V
	R	5144,5165	RC0402DR-072K4L@V
	R	5145	RC0402DR-072K2L@V
	R	5148,5190,5205,5206	RC0402JR-0722KL@V
	R	5150,5155,5160	RC0402DR-078K2L@V
	R	5151,5161-5163,5176	RC0402JR-070RL@V
	R	5152	RC0402DR-0730KL@V
	R	5153	RC0402DR-072K7L@V
	R	5159	RC0402DR-072KL@V
	R	5164	RC0402DR-071K2L@V
	R	5167,5173	RC0402DR-074K7L@V
	R	5170,5689,5690	RC0402DR-07470RL@V
	R	5171,5175,5572,5579	RC0402JR-07100RL@V
	R	5181,5187,5248	RC0402JR-070RL@V
	R	5188,5189	RC0402JR-07390KL@V
	R	5191,5192	RC0402JR-0711KL@V
	R	5193,5194	RC0603JR-071KL@V
	R	5200,5201,5554	RC0603JR-07100RL@V
	R	5202,5203,5220,5221	RC0402JR-0747KL@V
	R	5207,5210	RC0603DR-075K1L@V
	R	5208,5211,5378,5379	RC0603DR-073K3L@V
	R	5209,5212,5542-5545	RC0603JR-070RL@V
	R	5213,5214,5451,5453	RC0402JR-0722KL@V
	R	5215,5216	RC0402JR-07220KL@V
	R	5225,5228,5229,5231	RT0603DRD0722RL@V
	R	5226,5227,5230	RC0402JR-0722RL@V
	R	5232,5233,5236-5238	RC0402JR-0747RL@V
	R	5234,5247	RT0603DRD0747RL@V
	R	5239,5241-5243	RC0603JR-0768RL@V
	R	5240	RT0603DRD0768RL@V
	R	5249-5251,5255	RC0402JR-0722RL@V
	R	5252-5254,5396,5400	RC0402JR-070RL@V
	R	5257-5261,5384	RC0402JR-0722RL@V
	R	5262-5265	RT0603DRD071KL@V
	R	5266-5269,5340,5341	RC0603DR-07680RL@V
	R	5270-5273	RC0603JR-0751KL@V
	R	5274-5281	RC0805FR-07560RL@V
	R	5282-5285,5294-5297	RC0603JR-0722KL@V
	R	5286-5289	RC0805FR-07220RL@V
	R	5302-5305	RC0603DR-07150RL@V
	R	5306-5313,5588-5593	RT0603DRD073K3L@V
	R	5314-5317,5342-5345	RC0603DR-072K2L@V
	R	5318,5319,5330,5331	RC0603DR-072K7L@V
	R	5320-5327	RT0603DRD0710KL@V
	R	5328,5329,5664,5665	RC0603DR-071K2L@V
	R	5335,5336,5338,5339	RC1206JR-07330RL@V
	R	5346,5347,5414-5417	RC0603JR-07100KL@V
	R	5348-5351,5528,5529	RC0402JR-07100KL@V
	R	5352-5357,5422-5425	RC0603JR-0718KL@V
	R	5358-5361	RT0603DRD0733RL@V
	R	5380,5381	RC0603DR-0712KL@V
	R	5382,5383	RC0603DR-075K6L@V

Mark	No.	Description	Part No.
	R	5385,5386	RC0402JR-0756RL@V
	R	5387-5394	RC0603DR-0715KL@V
	R	5397-5399,5401-5405	RC0603DR-0739KL@V
A	R	5406,5408,5410,5412	RC1206JR-07680RL@V
	R	5418-5421,5520,5522	RC0603DR-0722KL@V
	R	5426-5429	RC0603JR-0733RL@V
	R	5438-5440,5565,5567	RC0402JR-0722RL@V
	R	5441,5561,5563,5569	RC0402JR-070RL@V
	R	5447	RC0402DR-0715KL@V
	R	5449	RC0402DR-073K3L@V
	R	5450,5452	RC0402JR-071ML@V
	R	5455,5457	RC0805JR-0768RL@V
	R	5458-5461	RC0603DR-073K3L@V
B	R	5466-5469	RC0402DR-071K8L@V
	R	5470-5477	RC1206JR-0722RL@V
	R	5486,5487,5693,5694	RC1206JR-070RL@V
	R	5488-5491	RT0603DRD07100RL@V
	R	5492-5495	RT0603DRD07120RL@V
	R	5496-5499	RC0603DR-0747KL@V
	R	5504-5507,5512-5515	RT0603DRD071K8L@V
	R	5516-5519	RC0603DR-07270KL@V
	R	5523,5525,5527,5682	RC0402JR-0710KL@V
	R	5524,5526	RC0603DR-0722KL@V
	R	5546-5549	RC0603DR-073K6L@V
C	R	5550-5553,5660-5663	RC0603DR-071K8L@V
	R	5556-5558	RC0603JR-07100RL@V
	R	5564,5574,5621	RC0402JR-07330RL@V
	R	5571,5573,5578,5620	RC0402JR-070RL@V
	R	5575,5577,5622,5623	RC0402JR-0722RL@V
	R	5580-5583	RT0603DRD07220RL@V
	R	5584-5587	RC0603JR-070RL@V
	R	5594,5595,5603,5605	RT0603DRD074K7L@V
	R	5596,5597,5600,5601	RT0603DRD071K5L@V
	R	5598,5599	RT0603DRD07820RL@V
	R	5602,5604	RT0603DRD07150RL@V
D	R	5606,5607	RT0603DRD073K3L@V
	R	5609,5610	RC0603JR-071K2L@V
	R	5612,5613	RC0603DR-0762KL@V
	R	5614,5615	RC0402DR-073K6L@V
	R	5616,5617	RC0402DR-07820RL@V
	R	5624	RC0402JR-07100RL@V
	R	5627,5628,5631	RC0402JR-070RL@V
	R	5640-5645,5652,5684	RC0402JR-070RL@V
	R	5647-5650	RC0402JR-0722RL@V
	R	5655-5657	RC1206JR-072RL@V
E	R	5659	RC0402JR-071RL@V
	R	5674-5679	RC1206JR-073R3L@V
	R	5681	RC0805JR-070RL@V
	R	5683	RC0402JR-0710KL@V
	R	5685	RC0402JR-072K2L@V
	R	5687	RC0402DR-074K3L@V
	R	5688	RC0402DR-076K8L@V
	R	5691,5692	RC0603DR-072K2L@V
	R	5696-5700	RC1206JR-070RL@V

CAPACITORS

	C	5001-5003,5091,5092	CC0402JRNPO9BN101
F	C	5006-5008,5093,5094	0402N102J500CT
	C	5009,5022,5076,5097	0603B104K250CT
	C	5011,5013,5601-5604	0603N332J500CT
	C	5012,5060,5064,5080	0603X105K250CT
	C	5014,5095,5098,5197	0603B103K500CT
	C	5016,5033,5036,5042	0402B103K500CT
	C	5017,5804,5807,5814 (0.1 uF)	ACE7100
	C	5018,5030,5706,5707 (100 uF/25 V)	CCH2000
	C	5023,5100,5199,5200 (1 uF)	ACE7129
	C	5026 (100 uF/16 V)	DCH1387
	C	5027,5282,5414-5417 (220 uF/16 V)	DCH1368
	C	5032,5035,5041,5044	0402B102K500CT
	C	5034,5037,5046,5049	CC0402KRX7R7BB104
	C	5043,5564,5566,5675	0603B104K500CT
	C	5045,5048,5055,5087	0402B103K500CT
	C	5047,5050,5054,5178	0402B102K500CT
	C	5051,5056,5068,5105	CC0402KRX7R7BB104
	C	5061,5077,5084,5085	0805X106K160CT
	C	5062,5856	0603X474K160CT
	C	5063,5122-5124,5162	0603X105K160CT
	C	5065,5171,5172	0603X334K250CT
	C	5069,5086,5089	CC0402JRNPO9BN221
	C	5070	CC0402JRNPO9BN680
	C	5074	CC0402KRX7R7BB223
	C	5075	0402B223K250CT
	C	5081,5099,5106,5108	0603X105K250CT
	C	5088,5090,5102,5103	0805B104K500CT
	C	5101,5104,5288 (100 uF/16 V)	DCH1365
	C	5107,5134,5135,5176	CC0402KRX7R7BB104
	C	5109,5110,5116,5140	0805X106K160CT
	C	5111,5112,5118,5121	0603X105K250CT
	C	5119,5120,5142,5143	0603B104K250CT
	C	5127,5239,5240	CC0402KRX7R9BB682
	C	5129,5277	0603X475K100CT
	C	5131	0402B332K500CT
	C	5132,5133,5151,5180	0402B103K500CT
	C	5136,5137,5156,5157	0402N102J500CT
	C	5141,5203,5206-5209	0805X106K160CT
	C	5144	CC0402JRNPO9BN102
	C	5147,5817	ACE7113
	C	5148,5177,5189,5313	0603X105K250CT
	C	5149,5150,5169,5173	0603B104K250CT
	C	5152,5153,5253,5256	0805X106K250CT
	C	5155,5158-5161,5842	0402X105K250CT
	C	5167,5168 (220 uF/25 V)	DCH1369
	C	5174,5175,5183,5195	0402N102J500CT
	C	5179,5214,5215,5217	0402B102K500CT
	C	5182 (10 uF/25 V)	DCH1381
	C	5185,5186,5655,5665	0603X105K160CT
	C	5187,5210,5222,5226	0603B104K250CT
	C	5190,5191,5623,5634	0805X106K100CT
	C	5193,5194,5242,5280	CC0402JRNPO9BN101
	C	5196,5228,5327,5330	0402N102J500CT
	C	5198,5298,5300,5302	0603B103K500CT
	C	5211,5227,5229,5230	0402B104K160CT
	C	5212,5213,5223-5225	CC0402KRX7R7BB104
	C	5218,5231,5235,5236	0402B102K500CT
	C	5232,5233,5252,5254	CC0402KRX7R7BB104
	C	5234	0402B682K500CT
	C	5241,5247-5249,5784	0402B102K500CT
	C	5243,5278,5320,5325	0603B104K250CT
	C	5246,5251,5255,5258	0805X106K160CT
	C	5250	0402B104K160CT

Mark	No.	Description	Part No.
	C	5259,5274,5522,5523	VGV476M016ANE01K
	C	5260,5262,5838	0805X106K160CT
	C	5263,5264,5437,5438	VGV107M016ANE01K
	C	5265,5271,5273,5275	CC0402KRX7R7BB104
	C	5276,5281,5312,5317	0402B103K500CT
	C	5279,5285,5290,5295	0603N102J500CT
	C	5283,5287,5293,5624 (1 uF)	ACE7129
	C	5284,5289,5294 (0.01 uF)	ACE7097
	C	5286,5291,5296,5328	CC0402JRNPO9BN101
	C	5292 (470 uF/16 V)	CCH1680
	C	5297,5299,5303,5305	0603B102K500CT
	C	5306,5308,5310,5326	0603B103K500CT
	C	5307,5309,5439,5441	0603B102K500CT
	C	5314,5321,5322	0603X105K250CT
	C	5318,5477,5521 (22 uF/25 V)	DCH1383
	C	5319 (220 uF/16 V)	DCH1391
	C	5329,5331,5333,5335	CC0402KRX7R7BB104
	C	5332,5334,5336,5338	0402N102J500CT
	C	5337,5339,5341,5343	CC0402KRX7R7BB104
	C	5340,5342,5344,5346	0402N102J500CT
	C	5345,5354,5357,5359	CC0402KRX7R7BB104
	C	5355,5356,5358,5361	0402N102J500CT
	C	5360,5362,5364,5643	CC0402KRX7R7BB104
	C	5363,5365,5458,5506	0402N102J500CT
	C	5366-5369	CFHXSQ472J16
	C	5370,5371,5431,5563	0603N102J500CT
	C	5372,5374,5376,5378	CC0603JRNPO9BN561
	C	5380-5383,5392,5396	0603B103K500CT
	C	5384,5385 (100 uF/35 V)	DCH1366
	C	5394,5397,5398,5401	CC0603JRNPO9BN101
	C	5400,5402,5411,5412	0603B103K500CT
	C	5404-5407,5459-5462	CC0603JRNPO9BN101
	C	5419,5420,5583-5586	DCH1368
	C	5425-5430 (1000 pF)	ACE7099
	C	5433,5435,5457,5500	0402B103K500CT
	C	5440,5442,5446,5448	0603B103K500CT
	C	5443,5444	CC0603JRNPO9BN182
	C	5445,5447,5658,5660	0603B102K500CT
	C	5449,5450	CC0603JRNPO9BN151
	C	5451,5452,5455	0603B104K250CT
	C	5453,5478-5481,5502	VGV107M016ANE01K
	C	5463-5466,5468,5504	0603B104K250CT
	C	5469-5476,5694,5695	CC0603JRNPO9BN101
	C	5484,5485	VGV227M025ANG03K
	C	5496-5499,5690-5693	CC0603JRNPO9BN471
	C	5505,5785,5832,5854	0402B103K500CT
	C	5520,5530,5534,5535	0603B104K250CT
	C	5524,5525	0402N391J500CT
	C	5527,5528	0402N680J500CT
	C	5529,5532	CC0402JRNPO9BN330
	C	5537,5540-5543	0603B104K250CT
	C	5539,5544	VGV227M016ANG03K
	C	5565,5674,5676	0603N102J500CT
	C	5567-5574	CC0603JRNPO9BN221
	C	5575-5578,5698,5699	CC0603JRNPO9BN331
	C	5587-5590 (0.012 uF)	ACE7125
	C	5591,5597	VGV476M025ANE01K
	C	5592-5596,5598-5600	0603B104K250CT
	C	5617-5619,5621,5627	VGV106M016ANB01K

Mark	No.	Description	Part No.
	C	5622,5745	0805X226M100CT
	C	5625,5629,5633,5636	0603B104K250CT
	C	5626,5637,5651,5663	0402N102J500CT
	C	5630,5638,5644,5747	VGV106M016ANB01K
	C	5635,5863,5866 (1 uF)	ACE7129
	C	5640,5648,5653,5664	0603B104K250CT
	C	5641,5642 (220 uF/16 V)	DCH1368
	C	5656,5670,5746,5768	0805X106K100CT
	C	5657,5764,5787,5788	CC0402KRX7R7BB104
	C	5659,5661,5667,5669	0603B103K500CT
	C	5662,5666,5668,5671	0603B102K500CT
	C	5672,5696,5697	0603B103K500CT
	C	5673,5720,5722,5726	0603B102K500CT
	C	5677,5786	0603B104K500CT
	C	5682-5689	0603N102J500CT
	C	5700,5701	CC0603JRNPO9BN821
	C	5702-5705,5721,5723	0603B103K500CT
	C	5708,5709	VRV106M016ANC01K
	C	5724,5725	CC0603JRNPO9BN471
	C	5728,5730,5731,5733	0603B102K500CT
	C	5732,5756,5760,5762	0603B103K500CT
	C	5740,5741,5802	CC0402JRNPO9BN471
	C	5748,5751,5757	VGV106M016ANB01K
	C	5749,5752,5758,5767	0603B104K250CT
	C	5750	0402N102J500CT
	C	5759,5761,5763,5795	0603B102K500CT
	C	5766	CC0603JRNPO9BN101
	C	5772	DCH1393
	C	5782	0402B104K100CT
	C	5799,5801,5803	0402B472K500CT
	C	5805 (0.47 uF)	ACE7114
	C	5808,5809,5837,5853	CC0402JRNPO9BN101
	C	5810-5812,5831	0402B472K500CT
	C	5815,5816	CC0402JRNPO9BN100
	C	5834	0603X105K160CT
	C	5835	CC0402KRX7R7BB104
	C	5836,5845	0402N331J500CT
	C	5843,5855	0402X105K250CT
	C	5859,5861	CC0402JRNPO9BN101
	C	5864,5867	0603B103K500CT
	C	5865,5868,5872 (0.1 uF)	ACE7100

SUBA ASSY
Consists of
HPJK ASSY
MCTR ASSY
SER1 ASSY
SER2 ASSY

CEPQ

SUBA ASSY

SEMICONDUCTORS

	Q	7651,7652	INC2002AC1
	Q	7751,7801	LTC124EUB
	D	7651-7654	DF2B18FU
	D	7751-7755,7801-7805	1SS355L@V

MISCELLANEOUS

	JA	7651 STEREO MINI JACK	XKN3017

Mark	No.	Description	Part No.
	JA 7652	6.5 DIA JACK	DKN1669
	KN 7651	SCREW PLATE	VNE1948
	VR 7701,7702	ROTARY VR	DCS1123
	S 7751-7755	TACTILE SWITCH	DSG1159
	S 7801-7805	TACTILE SWITCH	DSG1159
	CN 7651,7701	CONNECTOR	HWW-R0620-J1@V
	CN 7751,7801	19P CONNECTOR	VKN1250
	CN 7752,7802	10P CONNECTOR	VKN1853
	VA 7651,7652	VARISTORS	EZJZ1V270RM

RESISTORS

	R 7651,7652		RC0603JR-0722KL@V
	R 7653,7654		RC0603JR-071KL@V

CAPACITORS

	C 7651-7654	(220 uF/6.3 V)	DCH1344
	C 7655-7658		0603B223K500CT
	C 7659,7661		0603B104K250CT

LCDB ASSY
Consists of
LCDB ASSY
XPAD ASSY
USBA ASSY
COILU1 ASSY
COILU2 ASSY
COILD1 ASSY
COILD2 ASSY
PWRB ASSY
JOG1 ASSY
JOG2 ASSY

D I U X Y Z

AA AJ AK AL

LCDB ASSY

SEMICONDUCTORS

	IC 1		AD7147ACPZ500RL7
	IC 2		U74AHC1G08G-AL5
	IC 2501,2551		U74LVC1G08G-AL5
	IC 2502,2552		PST8430N
⚠	IC 2503,2553		NJM2386ADL3-33
	IC 2601		U74AHC164G-P14
NSP	IC 2602		SN75DPHY440SSRHR
	Q 2501-2503,2551-2553		YJJ3400A
	Q 2602,2603		LTC024EEB
	Q 2604-2610		LTC023JEB
	Q 2611-2614,2616		MMBTSC1623YW
	Q 2615		MMBTSA1576QW
	Q 7401		RT1N241M
	Q 7402,7407		RT3N22M
	Q 7403-7406,7408		LP3475T1G@V
	D 1,3,4		LTST-108TBL@V
	D 6		UDZV3R6
	D 7-9		LTST-108TBL@V
	D 51,55		DF2B18FU
	D 52,56		EZAEG2N50A
	D 53,54,57,58		DF2B5M4CT@V
	D 2501,2551		RBR2MM40A
	D 2502,2552		RB751SM-40
	D 2601-2606,2632		MMBD202CCW
	D 2608-2611,2620,2621		NHSW146A-A21460
	D 2612-2619		FC-F1608BAK5
	D 2622,2623		LTL17KTBP5D@V
	D 2624,2625		LTW-1GHCW4-P(A)@V
	D 7401-7405		1SS355L@V

MISCELLANEOUS

	L 1	CHIP SOLID INDUCTOR	XTL3010
	L 2606	CHOKE COIL	CWS5025C-102
	JA 51,52	USB JACK	DKB1118
	KN 51-53	WRAPPING TERMINAL	CKF1089
	KN 7401,7402	WRAPPING TERMINAL	CKF1089
	S 2601-2604,2606-2615	PUSH SWITCH	CSG1155
	S 2605	ENCODER SW	DSX1080
NSP	CN 1	CONNECTOR	CKS3856
	CN 51	CONNECTOR	HWW-SL1020-J1@V
	CN 2401,2451	CONNECTOR	VKN1940
	CN 2501,2551	04P CONNECTOR	RKN1045
	CN 2601	FFC/FPC CONNECTOR	CKS6543
	CN 2602	FFC/FPC CONNECTOR	CKS6644
	CN 2603	FFC/FPC CONNECTOR	CKS6648
	CN 7401	B TO W CONNECTOR	HWW-0106-396-T2
	CN 7402,7403	CONNECTOR	HWW-SL1320-J1@V
	CN 9601,9651	CONNECTOR	HWW-R0420-J1@V
⚠	P 7401,7402	PROTECTOR (3.500 A)	DEK1129
⚠	P 7403,7404	PROTECTOR (3.000 A)	DEK1103
⚠	P 7405	PROTECTOR (3.000 A)	DEK1128
⚠	P 7406	PROTECTOR (3.000 A)	DEK1103
	PC 9601,9651	PHOTO INTERRUPTER	KE-2N10-36
	VA 51-54	SMD VARISTOR	EZJZ1V80010

RESISTORS

	R 1-3,7-12		RC0402JR-073KL@V
	R 16,21,2692,2693		RC0402JR-072K2L@V
	R 17		RC0402JR-0756RL@V
	R 18,19		RC0402JR-07220RL@V
	R 20,2605,2611,2613		RC0402JR-07100RL@V
	R 29-31,33-35		RC0402JR-073KL@V
	R 37-39		RC0402JR-073KL@V
	R 2501,2551,2606,2610		RC0402JR-070RL@V
	R 2502,2552		RC0402JR-078K2L@V
	R 2503,2506,2508,2509		RC1206JR-07150RL@V
	R 2504,2505,2554,2555		RC0402JR-0715KL@V
	R 2507,2511,2557,2561		RC0402JR-0739KL@V
	R 2510,2560,7410,7416		RC0402JR-07100KL@V
	R 2512,2562,2612,2618		RC0402JR-0710KL@V
	R 2553,2556,2558,2559		RC1206JR-07150RL@V
	R 2603,2604		RC0805JR-070RL@V
	R 2607-2609,2620,2625		RC0402JR-0722RL@V
	R 2614-2616		RC0402JR-070RL@V
	R 2617,7401-7403,7413		RC0402JR-07100RL@V
	R 2619,2624		RAB4CQ101J
	R 2621,2623		RC0402JR-0722KL@V
	R 2622,7404,7405,7408		RC0402JR-0747KL@V
	R 2627,2632		RC0402JR-071KL@V
	R 2628,2633,2661,2664		RC0603JR-071K6L@V
	R 2630,2635,2662,2665		RC0603JR-071K8L@V
	R 2637,2640,2643,2646		RC0603JR-07820RL@V
	R 2638,2641,2644,2647		RC0603JR-071K2L@V
	R 2649,2652,2655,2658		RC0603JR-07820RL@V
	R 2650,2653,2656,2659		RC0603JR-071K2L@V

Mark	No.	Description	Part No.
	R	2666-2669	RC0603JR-072K2L@V
	R	2670-2673	RC0603JR-0747KL@V
	R	2674-2677	RC0603JR-07820RL@V
	R	2678,2680	RC0603JR-073K9L@V
	R	2679,2681	RC0603JR-075K6L@V
	R	2690	RC0402DR-074K7L@V
	R	2691	RC0402JR-0710KL@V
	R	7406,7407,7409,7414	RC0402JR-0733KL@V
	R	7411,7412	RC0402JR-07220KL@V
	R	7415,7417	RC0402JR-0747KL@V
	R	7418	RC0402JR-0733KL@V
	R	7419,9601,9602,9651	RC0402JR-07100RL@V
	R	7420	RC0402JR-07390KL@V
	R	9603,9653	RC0402JR-0782RL@V
	R	9652	RC0402JR-07100RL@V
CAPACITORS			
	C	2,3,5	0603B104K250CT
	C	6	0603X106K6R3CT
	C	52,57,2619,2642	0402B103K500CT
	C	53,54,58,59	0402N5R0C500CT
	C	55,60,2602,2604	CC0402KRX7R9BB102
	C	2401,2402,2451,2452	0402N331J500CT
	C	2501,2503,2551,2553	CC0402JRNPO9BN101
	C	2502,2552,2601,2605	CC0402KRX7R7BB104
	C	2504,2554	0402B153K160CT
	C	2506-2508,2556-2558	0805X226K6R3CT
	C	2509,2559	0402N220J500CT
	C	2603,2615	0805X226M160CT
	C	2606,2625,2637,2638	CC0402KRX7R9BB102
	C	2607,2608,2618,2623	CC0402KRX7R7BB104
	C	2616,2622,7427,7428	0805X106K160CT
	C	2617	0402B472K500CT
	C	2624	0603X105K160CT
	C	2632-2634,2641,2648	CC0402KRX7R7BB104
	C	2644	0603X474K160CT
	C	2649,2651,2653,2654	CC0402KRX7R9BB102
	C	2650,2652,2655,2656	CC0402KRX7R7BB104
	C	2657	CC0402KRX5R5BB224
	C	2662,2672	0603X474K250CT
	C	2671	0402X105K250CT
	C	7401,7417-7419,7438	CC0402JRNPO9BN101
	C	7402,7420-7422,7439	0402N102J500CT
	C	7404,7443	0603B103K500CT
	C	7405 (0.1 uF)	DCE1072
	C	7406,7408,7410-7413	0402B103K500CT
	C	7407,7409 (470 uF/35 V)	DCH1359
	C	7414-7416,7434,7437	CC0402KRX7R7BB104
	C	7423-7425,7432,7433	0402B103K500CT
	C	7426	0805X226M250CT
	C	7429,7430	VGV107M016ANE01K
	C	7431	VGV476M025ANE01K
	C	7435,7436,7440	0402B103K500CT
	C	7441	CC0402JRNPO9BN101
	C	7442	0402N102J500CT
	C	7444 (0.1 uF)	DCE1031
	C	9602,9652	0603X225K100CT
	C	9603,9653	CC0402KRX7R7BB104

Mark	No.	Description	Part No.
UCOM ASSY			
Consists of			
UCOM ASSY			
EFSW ASSY			

F H

UCOM ASSY

SEMICONDUCTORS

	IC	2803,2804,2809,2812	U74AHC1G08G-AL5
	IC	2807,2808	74LCX244FT
	IC	2813,4002,4502	U74AHC1G08G-AL5
	IC	3201,3203	PST8430N
NSP	IC	3202,4001,4501	MIMXRT1052DVJ6B@V
	IC	3205	DYW2385*
	*Part number of the initial firmware equipped		
	IC	3601	DYW2386*
	*Part number of the initial firmware equipped		
	IC	3602	MIMXRT1021DAG5B@V
	IC	4003,4503	DYW238*
	*Part number of the initial firmware equipped		
	IC	4201,4701	W9812G6KH-6
	IC	4401,4901	BU8254KVT
	Q	3001,3002,3005,3010	LTC024EEB
	Q	3003,3004,3008,3009	ISA1602AM1
	Q	3006,3202,3204	LTA023JEB
	Q	3007	2SC4097
	Q	3011,3205,4402,4902	LTC024EEB
	Q	3201,3203	LTC023JEB
	Q	3206	LP3475T1G@V
	Q	4401,4901	MMBTSA1576QW
	Q	4403,4404,4406,4903	MMBTSC1623YW
	Q	4405,4905	YJL3134KAX
	Q	4407,4907	HN1A01FUS1
	Q	4904,4906	MMBTSC1623YW
	Q	9751-9757	LTC024EEB
	Q	9758,9763	MMDT5212W
	Q	9759-9761,9765-9769	2SC4154-11
	Q	9762,9764	2SB1689
	D	3203,9751,9752	1SS355L@V
	D	4201,4701	UDZV3R6
	D	9753	DAN202UM
	D	9754-9770,9773-9783	1SS355L@V
	D	9784	LTL17KTGP4J-P@V
	D	9786,9790,9792,9794	LTL17KTBP5D@V
	D	9787,9789,9791,9793	1SS355L@V
	D	9788	LTL17KRH5D-P
	D	9795,9797,9799,9801	1SS355L@V
	D	9796,9798,9800,9802	LTL17KTBP5D@V
	D	9803,9805,9807,9809	LTL17KTBP5D@V
	D	9804,9806,9808,9810	1SS355L@V

MISCELLANEOUS

	L	3001-3008 COIL	ATH7015
	L	3201,3602 SMD FERRITE BEADS	DTF1123
	L	3202,3601,4002 POWER INDUCTOR (4.7 uH)	ATH7047
	L	3603-3606 SMD FERRITE BEADS	DTF1124
	L	4001,4501 SMD FERRITE BEADS	DTF1123
	L	4502 POWER INDUCTOR (4.7 uH)	ATH7047
	F	4401-4403,4901-4903 EMI FILTER	DTL1106
	S	9751 ROTARY ENCODER	DSX1136

Mark	No.	Description	Part No.
	S	9752,9754,9755 TACTILE SWITCH	DSG1157
	S	9756,9757,9761,9765 TACT SWITCH	DSG1079
	S	9758-9760 TACTILE SWITCH	DSG1157
	S	9762-9764 TACTILE SWITCH	DSG1157
	S	9766 TACT SWITCH	DSG1079
	S	9767-9769 TACTILE SWITCH	DSG1157
	S	9770 ROTARY ENCODER	DSX1137
	X	3201,3601 CRYSTAL RESONATOR (24.000 MHz)	DSS1241
	X	4001,4501 CRYSTAL RESONATOR (24.000 MHz)	DSS1241
	CN	2801,2802 FFC/FPC CONNECTOR	CKS6645
	CN	2803 FFC/FPC CONNECTOR	CKS6646
	CN	2804 FFC/FPC CONNECTOR	CKS6645
	CN	3001,3007 FFC/FPC CONNECTOR	S100-SSA-35-T2@V
	CN	3002,3015 CONNECTOR	HWW-SR0420-J1@V
	CN	3003,3012 CONNECTOR	HWW-SR0320-J1@V
	CN	3004,3013 CONNECTOR	VKN1947
	CN	3005,3014 FFC/FPC CONNECTOR	S100-SSA-40-T2@V
	CN	3006,3009 FFC/FPC CONNECTOR	DKN1676
NSP	CN	3008 CONNECTOR	CKS3856
	CN	3010 CONNECTOR	CKS3871
	CN	3011,9751 FFC/FPC CONNECTOR	S100-SSA-35-T2@V

RESISTORS

	R	2801-2808,2817,2818	RC0402JR-070RL@V
	R	2810,2811,2841,2870	RC0402JR-0756RL@V
	R	2822,2825,2829,2837	RC0402JR-0722RL@V
	R	2826,2827,2832,2838	RC0402JR-070RL@V
	R	2828,2836,2847	RC0402JR-0768RL@V
	R	2833,2844	RC0402JR-0727RL@V
	R	2834,2835,2842,2845	RC0402JR-07100RL@V
	R	2840,2849-2851	RC0402JR-070RL@V
	R	2846,2881,3203,3209	RC0402JR-07100RL@V
	R	2848,2852,4409,4909	RC0402JR-0722RL@V
	R	2853-2855,2858-2860	RC0402JR-070RL@V
	R	2861	RC0402JR-0733RL@V
	R	2865-2867,2873-2880	RC0402JR-070RL@V
	R	2871,3051-3054,3215	RC0402JR-0756RL@V
	R	2882-2885,3030,3031	RC0402JR-0710KL@V
	R	3001-3003,3064,3065	RC0603JR-0756KL@V
	R	3004,3009,3010	RC0402JR-070RL@V
	R	3005,3006,3061,3062	RC0603JR-071K8L@V
	R	3007,3008,3059,3060	RC0603JR-0722KL@V
	R	3012-3016,3025	RC0402JR-070RL@V
	R	3027,3202,3206,3314	RC0402JR-071KL@V
	R	3032,4412,4437,4912	RC0402JR-071K5L@V
	R	3033-3038,3048-3050	RC0402JR-070RL@V
	R	3056-3058,3063,3068	RC0402JR-070RL@V
	R	3067	RC0603JR-0756KL@V
	R	3069,3070,3201,3205	RC0603JR-070RL@V
	R	3071-3073,3208,3214	RC0402JR-070RL@V
	R	3204,3213,3233-3239	RC0402JR-0710KL@V
	R	3211,3731,4008,4508	RC0402JR-072M2L@V
	R	3217-3219,3221-3228	RC0402JR-0756RL@V
	R	3220,3393,3424,3647	RC0402JR-074K7L@V
	R	3230-3232,3319,3320	RC0402JR-0756RL@V
	R	3240	RC0402JR-07100KL@V
	R	3241,3243,3430-3432	RC0402JR-070RL@V
	R	3244,4405,4905	RC0402JR-0747KL@V
	R	3301,3303-3305	RC0402JR-0710KL@V
	R	3307-3312,3316-3318	RC0402JR-0710KL@V
	R	3323,3324,3327,3329	RAB4CQ101J
	R	3332,3340,3347,3348	RC0402JR-07100RL@V
	R	3333-3335,3349,3350	RC0402JR-0756RL@V
	R	3351,3354,3360,3368	RAB4CQ560J
	R	3352,3353,3358,3359	RC0402JR-0756RL@V
	R	3361,3362,3365-3367	RC0402JR-0756RL@V
	R	3371,3373,3374	RC0402JR-0756RL@V
	R	3378-3382,3384,3402	RC0402JR-0756RL@V
	R	3388,3419,3427,3676	RC0402JR-07100RL@V
	R	3389,3606,4222,4421	RC0402JR-071KL@V
	R	3391,3392,3604,3605	RC0402JR-0710KL@V
	R	3394,3398,3400,3404	RAB4CQ560J
	R	3405,3417,3422,3610	RC0402JR-0756RL@V
	R	3406,3412,3421,3614	RAB4CQ560J
	R	3607,3608,3623,3644	RC0402JR-0710KL@V
	R	3617,3618,3624-3626	RC0402JR-0756RL@V
	R	3627,3628,3658,3660	RAB4CQ560J
	R	3634-3636,3665,3673	RC0402JR-0756RL@V
	R	3646,3648-3657,3667	RC0402JR-0710KL@V
	R	3668,4201,4202,4220	RAB4CQ560J
	R	3677,3681,3683,3698	RC0402JR-0756RL@V
	R	3678,3679,3682,3685	RC0402JR-07100RL@V
	R	3686,4256-4259	RAB4CQ101J
	R	3689,3691-3693,3702	RC0402JR-07100RL@V
	R	3696,3699,3706	RC0402JR-0710KL@V
	R	3701,3703,3705	RC0402JR-0756RL@V
	R	3704,3716,3721,3722	RC0402JR-07100RL@V
	R	3707-3710,3723,3724	RC0402JR-0756RL@V
	R	3711-3713,3715,4002	RC0402JR-0710KL@V
	R	3714,3719,3720,3729	RC0603JR-070RL@V
	R	3717,3718,3728,4006	RC0402JR-070RL@V
	R	3725,4004,4209,4210	RC0402JR-07100RL@V
	R	3726,3734,4013-4015	RC0402JR-0756RL@V
	R	3730,3732,4001,4003	RC0603JR-070RL@V
	R	4010,4027-4033,4223	RC0402JR-0710KL@V
	R	4011,4034,4403,4413	RC0402JR-074K7L@V
	R	4012,4016,4229,4231	RC0402JR-070RL@V
	R	4017-4026,4204,4205	RC0402JR-0756RL@V
	R	4203,4501,4503,4703	RC0603JR-070RL@V
	R	4211,4227,4228,4230	RC0402JR-0756RL@V
	R	4216-4218,4716-4718	RC0402JR-07220RL@V
	R	4219,4414,4423,4442	RC0402JR-072K2L@V
	R	4221,4701,4702,4720	RAB4CQ560J
	R	4226,4260-4264,4504	RC0402JR-07100RL@V
	R	4265,4502,4510	RC0402JR-0710KL@V
	R	4401,4402,4406,4407	RC1206JR-072R7L@V
	R	4404,4904	RC0805JR-070RL@V
	R	4410,4411,4910,4911	RC0402JR-0710RL@V
	R	4415,4915	RC0603DR-0718RL@V
	R	4416,4418,4419,4916	RC0603DR-0722RL@V
	R	4417,4917	RC0402DR-07270RL@V
	R	4420,4424-4434,4436	RC0402JR-070RL@V
	R	4422,4922	RC0402JR-076K8L@V
	R	4435,4935	RC0402JR-073K3L@V
	R	4438,4440,4441,4443	RC0402JR-070RL@V
	R	4439,4444,4511,4534	RC0402JR-074K7L@V
	R	4445,4719,4914,4923	RC0402JR-072K2L@V
	R	4446,4448,4450-4457	RC0402JR-070RL@V
	R	4506,4512,4516,4729	RC0402JR-070RL@V

Mark	No.	Description	Part No.
	R	4513-4515,4517-4526	RC0402JR-0756RL@V
	R	4527-4533,4723,4766	RC0402JR-0710KL@V
	R	4704,4705,4711,4727	RC0402JR-0756RL@V
	R	4709,4710,4726	RC0402JR-07100RL@V
	R	4721	RAB4CQ560J
	R	4722,4921	RC0402JR-071KL@V
	R	4728,4730	RC0402JR-0756RL@V
	R	4731,4920,4924-4934	RC0402JR-070RL@V
	R	4757-4760	RAB4CQ101J
	R	4761-4765	RC0402JR-07100RL@V
	R	4901,4902,4906,4907	RC1206JR-072R7L@V
	R	4903,4913,4939,4944	RC0402JR-074K7L@V
	R	4918,4919	RC0603DR-0722RL@V
	R	4936,4938,4940,4941	RC0402JR-070RL@V
	R	4937	RC0402JR-071K5L@V
	R	4942,4945	RC0402JR-072K2L@V
	R	4943,4946,4948	RC0402JR-070RL@V
	R	4950-4957	RC0402JR-070RL@V
	R	9751,9752,9804,9805	RC0603JR-070RL@V
	R	9753,9755,9774-9777	RC0603JR-073K3L@V
	R	9754	RC0603JR-076K8L@V
	R	9756-9758,9778-9781	RC0603JR-0747KL@V
	R	9759,9761,9766,9768	RC0603JR-0722KL@V
	R	9760,9767	RC0603JR-075K6L@V
	R	9762	RC0603JR-07560RL@V
	R	9763,9769,9770	RC0603JR-071K5L@V
	R	9764,9791,9803	RC0603JR-07470RL@V
	R	9765,9771-9773	RC0603JR-07820RL@V
	R	9782-9785,9792-9795	RC0603JR-071K5L@V
	R	9786-9789,9796-9799	RC0603JR-07820RL@V
	R	9800	RC0603JR-073K3L@V
	R	9801	RC0603JR-0747KL@V
	R	9802	RC0603JR-0722KL@V
	R	9806	RC0603JR-07820RL@V
	VR	9751 POTENTIONETER	DCS1065

CAPACITORS

	C	2801,2802,2812,2817	CC0402KRX7R7BB104
	C	2815,2816,2835,2839	VGV107M016ANE01K
	C	2818,2822,2827,2829	CC0402KRX7R7BB104
	C	2821,2905	VGV476M025ANE01K
	C	2825,2908,3013,3014	0402N101J500CT
	C	2826,2906,3003,3005	CC0402KRX7R9BB102
	C	2836,2840,2855,2856	CC0402KRX7R7BB104
	C	2841	CC0402JRNPO9BN100
	C	2872,2882,2884	CC0402KRX7R7BB104
	C	2899-2901,2903,3002	CC0402KRX7R7BB104
	C	3006,3007,3009,3010	CC0402KRX7R7BB104
	C	3008,3062,3237,3340	0805X106K160CT
	C	3015,3020,3023	CC0402KRX7R7BB104
	C	3017,3051 (1 uF)	ACE7129
	C	3021,3043,3103-3107	0402B103K500CT
	C	3022,3024,3041,3044	CC0402KRX7R9BB102
	C	3025-3028,3033,3040	CC0402KRX7R7BB104
	C	3042,3047,3054,3060	CC0402KRX7R7BB104
	C	3053,3057,3080,3082	0402N101J500CT
	C	3061,3064,3065,3068	CC0402KRX7R7BB104
	C	3066,3067,3081,3090	CC0402KRX7R9BB102
	C	3072,3073,3079,3086	CC0402KRX7R7BB104
	C	3083,3085,3087,3088	0402N101J500CT

Mark	No.	Description	Part No.
	C	3093-3095,3097,3099	CC0402KRX7R9BB102
	C	3096,3115,3257	0402N101J500CT
	C	3102,3108,3247,3258	CC0402KRX7R9BB102
	C	3109,3229,3251,3339	0402B103K500CT
	C	3110-3113,3116-3119	CC0402KRX7R7BB104
	C	3202-3206,3216,3235	0603X475K6R3CT
	C	3207,3240,3243,3669	0805X226K6R3CT
	C	3208-3211,3214,3215	CC0402KRX7R7BB104
	C	3212,3219,3221,3222	0402B224K160CT
	C	3217,3675,4016,4516	VGV107M016ANE01K
	C	3218,3226,3245,3254	CC0402KRX7R7BB104
	C	3220,4018,4518	0402X105K100CT
	C	3224,3227,3230-3234	0402B224K160CT
	C	3225,3301-3316	0402N471J500CT
	C	3228	0402N561J500CT
	C	3236,3238,3239,3646	0402B224K160CT
	C	3241,3242,3611,3617	0603X475K6R3CT
	C	3246	0402N102J500CT
	C	3248,4045,4545	CC0402JRNPO9BN470
	C	3249,3250,3683,3686	0402N5R0C500CT
	C	3259,3331,3337,3338	CC0402KRX7R7BB104
	C	3260,3655,3678,4404	0603X106K6R3CT
	C	3317,3318,4044,4205	CC0402KRX7R9BB102
	C	3320-3322,3324-3329	0402N471J500CT
	C	3333-3336,3648,3649	0402N471J500CT
	C	3341,3601,3602,3612	CC0402KRX7R7BB104
	C	3603-3610,3614,3615	0402B471K500CT
	C	3613,3616,3618,3619	CC0402KRX7R7BB104
	C	3620,3625,3632,3645	0603X475K6R3CT
	C	3621,3622,3624,3631	CC0402KRX7R7BB104
	C	3623,3636,3639,3644	0402B471K500CT
	C	3626,3627,3629,3630	0402B103K500CT
	C	3633,3635,3637,3638	0402B103K500CT
	C	3634,3641,3643,3654	CC0402KRX7R7BB104
	C	3640,3642,3666,3673	0402B103K500CT
	C	3647,3651,3653,3657	0603X475K6R3CT
	C	3650,3652,3656,3658	0402B224K160CT
	C	3660,3664,3667,3687	CC0402KRX7R7BB104
	C	3661,3681,3684	0603X475K6R3CT
	C	3665,3668,3670,3676	0402B224K160CT
	C	3672,4403,4415,4903	0603X105K160CT
	C	3674	VGV476M016ANE01K
	C	3682,3685,4015,4037	0805X226K6R3CT
	C	4002-4006,4020,4032	0603X475K6R3CT
	C	4007,4012,4021,4022	0402B224K160CT
	C	4008-4011,4013,4014	CC0402KRX7R7BB104
	C	4017,4047,4049,4201	CC0402KRX7R7BB104
	C	4023,4523	0402N471J500CT
	C	4024,4025,4027-4031	0402B224K160CT
	C	4026,4043,4203	0402B103K500CT
	C	4033,4035,4036,4507	0402B224K160CT
	C	4034,4204,4214,4534	0805X106K160CT
	C	4038,4039,4502-4506	0603X475K6R3CT
	C	4040,4515,4537,4540	0805X226K6R3CT
	C	4041,4042	0402N6R0C500CT
	C	4202,4217,4401,4402	CC0402KRX7R7BB104
	C	4206-4213,4406,4408	0402B103K500CT
	C	4215,4216,4715,4716	0402B471K500CT
	C	4218,4219,4544,4705	CC0402KRX7R9BB102

Mark	No.	Description	Part No.
	C	4407,4409-4411,4416	CC0402KRX7R7BB104
	C	4412,4413,4418,4422	0402B103K500CT
	C	4414,4914	0402N151J500CT
	C	4417,4419-4421	CC0402KRX7R7BB104
	C	4508-4511,4513,4514	CC0402KRX7R7BB104
	C	4512,4521,4522,4524	0402B224K160CT
	C	4517,4547,4549,4701	CC0402KRX7R7BB104
	C	4520,4532,4538,4539	0603X475K6R3CT
	C	4525,4527-4531,4533	0402B224K160CT
	C	4526,4543,4703	0402B103K500CT
	C	4535,4536	0402B224K160CT
	C	4541,4542	0402N5R0C500CT
	C	4702,4717,4901,4902	CC0402KRX7R7BB104
	C	4704,4714	0805X106K160CT
	C	4706-4713,4906,4908	0402B103K500CT
	C	4718,4719	CC0402KRX7R9BB102
	C	4904	0603X106K6R3CT
	C	4907,4909-4911,4916	CC0402KRX7R7BB104
	C	4912,4913,4918,4922	0402B103K500CT
	C	4915	0603X105K160CT
	C	4917,4919-4921	CC0402KRX7R7BB104
	C	9751,9752	0603B103K500CT
	C	9753,9756	0603B104K500CT
	C	9755,9757,9758	0603B104K250CT

G MIXER ASSY

SEMICONDUCTORS

	IC	6501-6503	TC74HC4051AF
	IC	6504	SN74LV164ANS
	IC	6505,6506	TC74VHC595F
	Q	6501-6511,6523-6527	MMBTSC1623YW
	Q	6512,6513,6515,6517	MMDT5212W
NSP	Q	6514	2SB1694
	Q	6516,6518,6520,6522	2SB1689
	Q	6519,6521,6528-6531	MMDT5212W
	D	6501,6503,6505,6507	LTW-1GHCW4-P(A)@V
	D	6502,6504,6506,6508	1SS355L@V
	D	6509,6511	LTW-1GHCW4-P(A)@V
	D	6510,6512,6588-6611	1SS355L@V
	D	6513,6535,6546,6568	LTL17KRH5D-P
	D	6514-6517,6536-6539	LTL17KSL5D-P
	D	6518-6523,6540-6545	LTL17KTGP4J-P@V
	D	6524-6534,6557-6567	DAN202UM
	D	6547-6550,6569-6572	LTL17KSL5D-P
	D	6551-6556,6573-6578	LTL17KTGP4J-P@V
	D	6579-6587	LTL17KSL5D-P

MISCELLANEOUS

	S	6501-6512 TACTILE SWITCH	DSG1157
	CN	6501,6503 FFC/FPC CONNECTOR	DKN1692
	CN	6502 30P CONNECTOR	VKN1261
		9001 SPACER	DEC3622
	VA	6501-6505 VARISTORS	EZJZ1V270RM

RESISTORS

	R	6501-6522,6534-6544	RC0603JR-0747KL@V
	R	6523-6533,6594,6600	RC0603JR-072K2L@V
	R	6545-6550,6569,6571	RC0603JR-071K8L@V
	R	6557,6582,6584,6585	RC0603JR-0722KL@V
	R	6558	RC0603JR-0712KL@V
	R	6559,6651	RC0603JR-074K7L@V
	R	6560-6567,6595	RC0603JR-07820RL@V
	R	6568,6570,6572,6574	RC0603JR-071KL@V
	R	6573,6575,6577,6579	RC0603JR-071K8L@V
	R	6576,6578,6580	RC0603JR-071KL@V
	R	6581	RC0603JR-071K8L@V
	R	6583,6586,6589,6592	RC0603JR-075K6L@V
	R	6587,6588,6590,6591	RC0603JR-0722KL@V
	R	6593	RC0603JR-0722KL@V
	R	6596,6602,6608,6614	RC0603JR-0747KL@V
	R	6597-6599,6601	RC0603JR-07820RL@V
	R	6603-6605,6607	RC0603JR-07820RL@V
	R	6606,6612,6618	RC0603JR-072K2L@V
	R	6609-6611,6613	RC0603JR-07820RL@V
	R	6615-6617	RC0603JR-07820RL@V
	R	6619,6621	RC0603JR-07680RL@V
	R	6620	RC0603JR-0747KL@V
	R	6622-6626	RC0603JR-07220KL@V
	R	6627-6630,6653	RC0603JR-0722RL@V
	R	6631-6645,6647-6650	RC0603JR-07100RL@V
	R	6646	RC0603JR-0710KL@V
	R	6652,6654-6657	RC0603JR-07100RL@V
	VR	6501 VARIABLE RESISTOR	CCW1024
	VR	6502-6505 SLIDE VR	DCV1027
	VR	6506,6512,6518,6523 ROTARY VR	DCS1104
	VR	6507-6511,6513-6517 ROTARY VR	DCS1078
	VR	6519-6522 ROTARY VR	DCS1078
	VR	6524 ROTARY VR	DCS1104
	VR	6525-6528 ROTARY VR	DCS1126

CAPACITORS

	C	6501-6510,6523-6525	0603B104K250CT
	C	6511-6522,6526-6537	CC0603JRNPO9BN471
	C	6538-6546	CC0603JRNPO9BN102
	C	6547-6569,6578,6582	0603B104K250CT
	C	6579	0603X106K100CT
	C	6583,6587,6593,6594	0603B104K250CT
	C	6584,6585	KS7107M016A5E07K
	C	6586,6589	CC0603JRNPO9BN471
	C	6588,6591	0603B103K500CT
	C	6590	CC0603KRX7R8BB103
	C	6600,6601	0603B104K250CT
	C	6602-6605	0603B102K500CT

PADA ASSY
Consists of
PADL ASSY
PADR ASSY
JLCDL ASSY
JLCDR ASSY
JILM1 ASSY
JILM2 ASSY
JILM3 ASSY
JILM4 ASSY
JILM5 ASSY
JILM6 ASSY
JILME1 ASSY
JILME2 ASSY
PLAY1 ASSY
PLAY2 ASSY

J K R S V W

AB AC AD AE AF AG AH

A I

PADA ASSY

SEMICONDUCTORS

Mark	No.	Description	Part No.
⚠	IC	2201,2301	MM1856A50N
⚠	IC	2202,2302	NJM2872BF33
	IC	2203,2303	BU90R104
	IC	2204,2304	74AHC1GU04SE
	IC	2205,2305	U74LVC74AG-P14
	IC	2206,2306	74LCX04FT
	IC	7001,7002,7201,7202	U74AHC595G-P16
	Q	2201,2301	LTC024EEB
	Q	2202,2302	LTA024EEB
	Q	2203,2303	RHP020N06
	Q	7001-7008,7029-7034	MMDT521MW
	Q	7017,7019,7021,7217	MMDT5212W
	Q	7018,7020,7022,7218	2SB1689
	Q	7023-7028,7035-7040	MMBTSC1623YW
	Q	7041-7046,7201-7208	MMDT521MW
	Q	7219,7221	MMDT5212W
	Q	7220,7222	2SB1689
	Q	7223-7228,7235-7240	MMBTSC1623YW
	Q	7229-7234,7241-7246	MMDT521MW
	Q	7451-7455,7471-7475	MMBTSA1576QW
	Q	7491-7495,7511-7515	MMBTSA1576QW
	Q	7531-7535,7551-7555	MMBTSA1576QW
	Q	7571-7575,7611-7615	MMBTSA1576QW
	Q	7851-7853,7901-7903	LTC014EEB
	D	2201-2208,2301-2308	EZAEG2N50A
⚠	D	2209,2210,2309,2310	1SS355L@V
	D	7009-7012,7021-7024	NSSM124F-A21107
	D	7013-7020,7025-7032	1SS355L@V
	D	7033,7035,7037,7039	NSSM124F-A21107
	D	7034,7036,7038	1SS355L@V
	D	7040-7060,7213-7220	1SS355L@V
	D	7209-7212,7221-7224	NSSM124F-A21107
	D	7225-7232,7234,7236	1SS355L@V
	D	7233,7235,7237,7239	NSSM124F-A21107
	D	7238,7240-7260	1SS355L@V
	D	7451,7452,7471,7472	SML-D12U8W
	D	7453,7473,7493,7513	NHSW157B-A17842
	D	7491,7492,7511,7512	SML-D12U8W
	D	7531,7532,7551,7552	SML-D12U8W
	D	7533,7553,7573,7613	NHSW157B-A17842
	D	7571,7572,7611,7612	SML-D12U8W
	D	7851,7901	FC-1608UGK-520D
	D	7852-7856,7902-7906	SML-D12Y8W

MISCELLANEOUS

Mark	No.	Description	Part No.
	L	2201,2226 CHIP BEEDS FILTER	BTX1047
	L	2202,2203 CHIP SOLID INDUCTOR	XTL3010
	L	2204 SMD FERRITE BEADS	DTF1122
	L	2207-2225 SMD FERRITE BEADS	DTF1122
	L	2301,2326 CHIP BEEDS FILTER	BTX1047
	L	2302,2303 CHIP SOLID INDUCTOR	XTL3010
	L	2304 SMD FERRITE BEADS	DTF1122
	L	2307-2325 SMD FERRITE BEADS	DTF1122
	S	7001-7004,7201-7204 PUSH SWITCH	CSG1155
	S	7851,7852,7901 TACTILE SWITCH	DSG1151
	S	7902 TACTILE SWITCH	DSG1151
	X	2201,2301 CRYSTAL RESONATOR (8 MHz)	CSS1886
	CN	2201,2301 FFC/FPC CONNECTOR	DKN1676
	CN	2202,2302 CONNECTOR	VKN1947
	CN	2204,2303 CONNECTOR	VKN1940
	CN	2205,2304 FFC/FPC CONNECTOR	CKS6646
	CN	7001,7201 FFC/FPC CONNECTOR	DKP3953
	CN	7451,7471,7491,7511 CONNECTOR	HWW-SL0320-J1@V
	CN	7452,7472,7492,7512 CONNECTOR	HWW-SR0320-J1@V
	CN	7531,7551 CONNECTOR	HWW-SL0320-J1@V
	CN	7532,7552,7571,7611 CONNECTOR	HWW-SR0320-J1@V
	CN	7851,7901 10P CONNECTOR	VKN1302

RESISTORS

Mark	No.	Description	Part No.
	R	2201,2202,2207,2208	RC1206JR-0756RL@V
	R	2203-2206,2303-2306	RC0402DR-07100RL@V
	R	2209-2212,2218-2220	RC0402JR-070RL@V
	R	2213-2216,2242	RC0402JR-0710KL@V
	R	2217,2247,2255	RC0402JR-07220RL@V
	R	2221,2228,2230-2232	RC0402JR-07330RL@V
	R	2222,2225,2229,2233	RC0402JR-073K3L@V
	R	2227,2329	RC0402JR-071ML@V
	R	2234-2239,2248-2251	RC0402JR-07330RL@V
	R	2241,2243-2245	RC0402JR-0768RL@V
	R	2246,2348	RAB4CQ331J
	R	2252-2254,2343	RC0402JR-0768RL@V
	R	2256,2358	RC1206JR-070RL@V
	R	2257-2259,2318,2349	RC0402JR-07220RL@V
	R	2260,2362	RC1206JR-0747RL@V
	R	2262,2364,7141,7341	RC0402JR-0722KL@V
	R	2266,2309-2312	RC0402JR-070RL@V
	R	2301,2302,2307,2308	RC1206JR-0756RL@V
	R	2313-2316,2344,7042	RC0402JR-0710KL@V
	R	2320-2322,2366,7145	RC0402JR-070RL@V
	R	2323,2330,2332-2334	RC0402JR-07330RL@V
	R	2324,2327,2331,2335	RC0402JR-073K3L@V
	R	2336-2341,2350-2353	RC0402JR-07330RL@V
	R	2345-2347,2354-2356	RC0402JR-0768RL@V
	R	2357,2359-2361	RC0402JR-07220RL@V
	R	7017-7028,7048-7059	RC0603JR-07680RL@V
	R	7029-7032,7060-7063	RC0805JR-07330RL@V
	R	7033-7036,7064-7067	RC0805JR-07390RL@V
	R	7037,7068,7095,7237	RC0402JR-071K5L@V
	R	7038-7041,7069-7072	RC1206JR-07270RL@V
	R	7043,7074,7101,7243	RC0402JR-0756KL@V
	R	7044-7047,7075-7078	RC1206JR-07330RL@V
	R	7073,7100,7242,7273	RC0402JR-0710KL@V
	R	7079-7086,7279-7286	RC1206JR-07560RL@V
	R	7087-7094,7287-7294	RC0805JR-071K2L@V
	R	7096-7099,7296-7299	RC1206JR-071K5L@V
	R	7102-7105,7302-7305	RC1206JR-071K2L@V
	R	7106,7110,7118,7125	RAB4CQ222J
	R	7107,7111,7119,7122	RC0603JR-078K2L@V
	R	7108,7112,7120,7123	RC0603JR-0712KL@V
	R	7109,7113,7121,7124	RC0603JR-0710KL@V
	R	7114-7117,7126-7130	RC0603JR-070RL@V

Mark	No.	Description	Part No.
	R	7131,7132,7332,7333	RC0402JR-074K7L@V
	R	7133,7134,7136-7140	RC0402JR-07100RL@V
	R	7142,7160,7161	RC0402JR-073K3L@V
	R	7143,7343	RC0402JR-073K9L@V
	R	7144,7344	RC0402JR-075K6L@V
	R	7147-7159,7162,7163	RC0402JR-070RL@V
	R	7164-7169,7342,7358	RC0402JR-073K3L@V
	R	7170,7331,7334-7340	RC0402JR-07100RL@V
	R	7171-7174,7369-7372	RC0402JR-0747KL@V
	R	7217-7228,7248-7259	RC0603JR-07680RL@V
	R	7229-7232,7244-7247	RC1206JR-07330RL@V
	R	7233-7236,7264-7267	RC0805JR-07390RL@V
	R	7238-7241,7269-7272	RC1206JR-07270RL@V
	R	7260-7263,7275-7278	RC1206JR-07330RL@V
	R	7268,7295	RC0402JR-071K5L@V
	R	7274,7301	RC0402JR-0756KL@V
	R	7300	RC0402JR-0710KL@V
	R	7306,7307,7314,7317	RAB4CQ222J
	R	7308,7311,7320,7323	RC0603JR-078K2L@V
	R	7309,7312,7321,7324	RC0603JR-0712KL@V
	R	7310,7313,7322,7325	RC0603JR-0710KL@V
	R	7315,7316,7318,7319	RC0603JR-070RL@V
	R	7326-7330	RC0603JR-070RL@V
	R	7345-7357,7360-7362	RC0402JR-070RL@V
	R	7359,7363-7368	RC0402JR-073K3L@V
	R	7451,7455,7471,7475	RC0603JR-0733RL@V
	R	7452,7456,7472,7476	RC0603JR-07680RL@V
	R	7453,7454,7457,7473	RC0603JR-07100RL@V
	R	7474,7477,7493,7494	RC0603JR-07100RL@V
	R	7491,7495,7511,7515	RC0603JR-0733RL@V
	R	7492,7496,7512,7516	RC0603JR-07680RL@V
	R	7497,7513,7514,7517	RC0603JR-07100RL@V
	R	7531,7535,7551,7555	RC0603JR-0733RL@V
	R	7532,7536,7552,7556	RC0603JR-07680RL@V
	R	7533,7534,7537,7553	RC0603JR-07100RL@V
	R	7554,7557,7573,7574	RC0603JR-07100RL@V
	R	7571,7575,7611,7615	RC0603JR-0733RL@V
	R	7572,7576,7612,7616	RC0603JR-07680RL@V
	R	7577,7613,7614,7617	RC0603JR-07100RL@V
	R	7851,7901	RC0603JR-07300RL@V
	R	7852,7902	RC0603JR-07270RL@V
	R	7853,7903	RC0603JR-071K2L@V
	R	7854,7855,7904,7905	RC0603JR-071K5L@V
	R	7856,7857,7906,7907	RC0603JR-07560RL@V

CAPACITORS

	C	2201,2209,2214,2216	0402N102J500CT
	C	2204,2208,2222,2225	0402B104K160CT
	C	2205,2245,2305,2345	0805X106K160CT
	C	2210,2253-2255,2310	0402N101J500CT
	C	2215,2223,2224,2226	0402B103K250CT
	C	2217,2317,7031,7230	0402B104K100CT
	C	2218,2219,2318,2319	0805B105K250CT
	C	2220,2320 (1 uF)	ACE7129
	C	2221,2228,2321,2328	0603X105K160CT
	C	2227,2232,2234,2236	0402B104K160CT
	C	2229,2233,2237,2240	0402B103K250CT
	C	2230,2235,2330,2335	0402N100J500CT
	C	2231,2331	0603X225K100CT
	C	2238,2239,2241,2247	0402B104K160CT
	C	2242,2342	0603N222J500CT
	C	2246,2346	0805B474K160CT
	C	2248,2251,2301,2309	0402N102J500CT
	C	2249,2349	0402N331J500CT
	C	2250,2252,2304,2308	0402B104K160CT
	C	2314,2316,2348,2351	0402N102J500CT
	C	2315,2323,2324,2326	0402B103K250CT
	C	2322,2325,2327,2332	0402B104K160CT
	C	2329,2333,2337,2340	0402B103K250CT
	C	2334,2336,2338,2339	0402B104K160CT
	C	2341,2347,2350,2352	0402B104K160CT
	C	2353-2355,7003-7008	0402N101J500CT
	C	7001,7002,7020-7025	0402B103K160CT
	C	7013,7213	0805X106K100CT
	C	7028,7227	VGV107M016ANE01K
	C	7029,7030,7201,7202	0402B103K160CT
	C	7203-7208	0402N101J500CT
	C	7219-7224,7228,7229	0402B103K160CT
	C	7851,7901	1206B106K160CT
	C	7852,7902	0603B104K250CT
	C	7853,7903	0603B103K500CT

PNL1 ASSY
Consists of
DCKL ASSY
TMP1 ASSY
PWSW ASSY

L N T

PNL1 ASSY

SEMICONDUCTORS

	IC	8001	TC74HC4051AF
	IC	8002	SN74LV164ANS
	Q	8001-8005,8009,8014	MMDT5212W
	Q	8006,8011,8018,8021	2SB1689
	Q	8007,8008,8010,8012	MMDT521MW
	Q	8013,8016,8017,8020	MMDT521MW
	Q	8015,8019,8024,8026	MMDT5212W
	Q	8022,8023	MMDT521MW
	Q	8025,8027	2SB1689
	Q	8028,8029	MMBTSC1623YW
	Q	8501	LTC124EUB
	D	8001-8020,8023,8025	1SS355L@V
	D	8021,8022,8027,8028	LTL17KTBP5D@V
	D	8024,8026,8035,8052	LTL17KSL5D-P
	D	8029,8033,8050	LTW-1GHCW4-P(A)@V
	D	8030,8031,8048	LTL17KTBP5D@V
	D	8032,8034,8040,8042	1SS355L@V
	D	8036-8039,8041,8044	LTL17KRH5D-P
	D	8043,8047	LTL17KTGP4J-P@V
	D	8045,8049,8051,8053	1SS355L@V
	D	8046,8501	LTL17KRH5D-P
	D	8502,8503,8505-8511	1SS355L@V
	D	8504	LTL17KGH5D-P

MISCELLANEOUS

KN	8501	EARTH TERMINAL	AKF7002
S	8001-8003,8007,8010	TACT SWITCH	DSG1079
S	8004,8008,8009	TACT SWITCH	DSG1089

Mark	No.	Description	Part No.
S	8005,8006	TACTILE SWITCH	DSG1159
S	8011,8021	TACT SWITCH	DSG1079
S	8012-8020,8022-8024	TACT SWITCH	DSG1089
S	8501-8503	TACT SWITCH	DSG1089
S	9701	PUSH SW	ASG1102
CN	8001	FFC/FPC CONNECTOR	DKN1692
CN	8002	FFC/FPC CONNECTOR	DKN1721
CN	8003	19P CONNECTOR	VKN1250
CN	8004,8501	16P CONNECTOR	VKN1247
CN	8005	CONNECTOR	HWW-R0320-J1@V
CN	9701	CONNECTOR	HWW-L0320-J1@V

RESISTORS

R	8001-8003,8079,8089		RC0603JR-0722RL@V
R	8005,8011,8044,8053		RC0603JR-07680RL@V
R	8006,8010,8013,8014		RC0603JR-071K2L@V
R	8008,8024,8036,8046		RC0603JR-0722KL@V
R	8009,8025,8037,8047		RC0603JR-0756KL@V
R	8012,8017,8019,8022		RC0603JR-071K5L@V
R	8015,8018,8020,8023		RC0603JR-072K7L@V
R	8021,8031,8034,8045		RC0603JR-071K2L@V
R	8026,8028		RC0603JR-072K7L@V
R	8027,8030,8035,8041		RC0603JR-071K5L@V
R	8032,8039,8040,8059		RC0603JR-071K8L@V
R	8038,8067,8068		RC0603JR-07560RL@V
R	8048-8050,8055		RC0603JR-071K5L@V
R	8057,8064,8069,8070		RC0603JR-071K2L@V
R	8058		RC0603JR-07470RL@V
R	8060,8065		RC0603JR-0722KL@V
R	8061,8066		RC0603JR-0756KL@V
R	8063		RC0603JR-071K8L@V
R	8071-8074		RC0603JR-0710KL@V
R	8075,8076		RC0603JR-0747KL@V
R	8077,8078		RC0603JR-070RL@V
R	8080-8087,8090-8097		RC0603JR-07100RL@V
R	8088		RC0603JR-074K7L@V
R	8098		RC0603JR-07680RL@V
R	8101-8103		RC0603JR-071KL@V
R	8502		RC0603JR-07820RL@V
R	8503-8505		RC0603JR-07560RL@V
R	8506,8507		RC0603JR-073K6L@V
VR	8001-8006	ROTARY VR	DCS1116
VR	8501	SLIDE VR	DCV1032
VR	8502	VARIABLE RESISTOR	DCP1107

CAPACITORS

C	8001-8004,8007,8008		CC0603JRNPO9BN471
C	8006,8012-8017		0603B104K250CT
C	8009-8011		CC0603JRNPO9BN102
C	8018-8023,8040,8044		0603B103K500CT
C	8025-8030,8041-8043		0603B104K250CT
C	8031,8034,8036,8037		1206B106K160CT
C	8032,8035		KS7107M016A5E07K
C	8038,8039		CC0603JRNPO9BN471
C	8045,8502,8504		0603B104K250CT
C	8503		KS7476M016A5C07K

Mark	No.	Description	Part No.

PNL2 ASSY
Consists of
DCKR ASSY
TMP2 ASSY

LNT

PNL2 ASSY

SEMICONDUCTORS

IC	9001		TC74HC4051AF
IC	9002		NJM2903M
IC	9003,9004		TC74VHC595F
IC	9005		SN74LV164ANS
Q	9001-9004,9006,9010		MMDT5212W
Q	9005		LTA143EUB
Q	9007,9011,9014,9017		2SB1689
Q	9008,9009,9015		MMDT521MW
Q	9012,9013,9016,9018		MMDT5212W
Q	9019,9021,9023,9039		2SB1689
Q	9020,9022,9038,9040		MMDT5212W
Q	9024-9037		MMBTSC1623YW
Q	9041		2SB1689
Q	9501		LTC124EUB
D	9001-9022,9024,9026		1SS355L@V
D	9023,9027,9031,9035		LTL17KTBP5D@V
D	9025,9028-9030,9041		LTL17KSL5D-P
D	9032,9036,9050		LTW-1GHCW4-P(A)@V
D	9033,9034,9038,9040		1SS355L@V
D	9037,9039,9042,9044		LTL17KRH5D-P
D	9043,9045,9047,9049		1SS355L@V
D	9046,9054,9055,9065		LTL17KRH5D-P
D	9048		LTL17KTBP5D@V
D	9051,9053,9088,9502		1SS355L@V
D	9052,9056-9059		LTL17KSL5D-P
D	9060-9064,9083-9087		LTL17KTGP4J-P@V
D	9066-9076		DAN202UM
D	9077,9078,9501		LTL17KRH5D-P
D	9079-9082		LTL17KSL5D-P
D	9503,9505-9511		1SS355L@V
D	9504		LTL17KGH5D-P

MISCELLANEOUS

KN	9501	EARTH TERMINAL	AKF7002
S	9001-9003,9007,9010	TACT SWITCH	DSG1079
S	9004,9008,9009	TACT SWITCH	DSG1089
S	9005,9006	TACTILE SWITCH	DSG1159
S	9011,9023	TACT SWITCH	DSG1079
S	9012-9022,9501-9503	TACT SWITCH	DSG1089
CN	9001	FFC/FPC CONNECTOR	DKN1721
CN	9002	FFC/FPC CONNECTOR	DKN1692
CN	9003	19P CONNECTOR	VKN1250
CN	9004,9501	16P CONNECTOR	VKN1247

RESISTORS

R	9001,9009		RC0603JR-07220KL@V
R	9002,9013,9030,9037		RC0603JR-0722KL@V
R	9003,9021,9029,9151		RC0603JR-071KL@V
R	9004		RC0603JR-071ML@V
R	9005,9076-9079,9190		RC0603JR-0710KL@V
R	9006-9008,9173,9197		RC0603JR-0722RL@V
R	9011,9016,9018,9020		RC0603JR-071K2L@V

Mark	No.	Description	Part No.
	R	9012,9017,9043,9161	RC0603JR-07680RL@V
	R	9014,9031,9038,9047	RC0603JR-0756KL@V
	R	9019,9022,9027,9032	RC0603JR-071K5L@V
	R	9023,9028,9033,9035	RC0603JR-072K7L@V
	R	9024-9026,9036,9042	RC0603JR-071K2L@V
	R	9034,9040,9041,9044	RC0603JR-071K5L@V
	R	9039,9052,9055-9059	RC0603JR-07560RL@V
	R	9045,9051,9064	RC0603JR-071K2L@V
	R	9046,9053,9065,9070	RC0603JR-0722KL@V
	R	9048,9049	RC0603JR-071K5L@V
	R	9054,9066,9071	RC0603JR-0756KL@V
	R	9060	RC0603JR-07470RL@V
	R	9061,9063,9152,9154	RC0603JR-071K8L@V
	R	9067-9069	RC0603JR-071K2L@V
	R	9072,9073,9080-9091	RC0603JR-0747KL@V
	R	9074,9075,9214,9215	RC0603JR-07560RL@V
	R	9092-9102	RC0805JR-0747KL@V
	R	9103,9116-9127	RC0603JR-0747KL@V
	R	9104-9115	RC0805JR-072K2L@V
	R	9128-9137	RC1206JR-070RL@V
	R	9139-9150,9502-9505	RC0603JR-07820RL@V
	R	9153,9155,9157,9159	RC0603JR-071KL@V
	R	9156,9158,9160	RC0603JR-071K8L@V
	R	9162,9164,9167,9213	RC0603JR-07680RL@V
	R	9163,9165,9166,9168	RC0603JR-0722KL@V
	R	9169-9172	RC0603JR-070RL@V
	R	9174-9189,9191-9195	RC0603JR-07100RL@V
	R	9196	RC0603JR-074K7L@V
	R	9198-9204	RC0805JR-07100RL@V
	R	9205-9212	RC0603JR-07100RL@V
	R	9216	RC0603JR-07680RL@V
	R	9218,9219	RC0603JR-071KL@V
	R	9506,9507	RC0603JR-073K6L@V
	VR	9001,9005 ROTARY VR	DCS1117
	VR	9002-9004 ROTARY VR	DCS1116
	VR	9501 SLIDE VR	DCV1032
	VR	9502 VARIABLE RESISTOR	DCP1107

CAPACITORS

	C	9001,9003-9005,9007	0603B104K250CT
	C	9002,9009-9011,9013	CC0603JRNPO9BN471
	C	9008,9012,9015	0603B104K250CT
	C	9014,9016,9017	CC0603JRNPO9BN102
	C	9018-9020,9030-9035	0603B104K250CT
	C	9025-9029,9045,9047	0603B103K500CT
	C	9036,9037,9039,9041	1206B106K160CT
	C	9038,9040	KS7107M016A5E07K
	C	9042,9063	1206B106K160CT
	C	9043,9046	CC0603JRNPO9BN471
	C	9044,9050,9051,9059	0603B104K250CT
	C	9048,9052-9058	CC0603JRNPO9BN221
	C	9049,9061	0603B103K500CT
	C	9060,9062,9502,9504	0603B104K250CT
	C	9503	KS7476M016A5C07K

AM SW POWER SUPPLY

There is no service parts.