


EXPLODED VIEW/PARTS LIST

Panel assy section

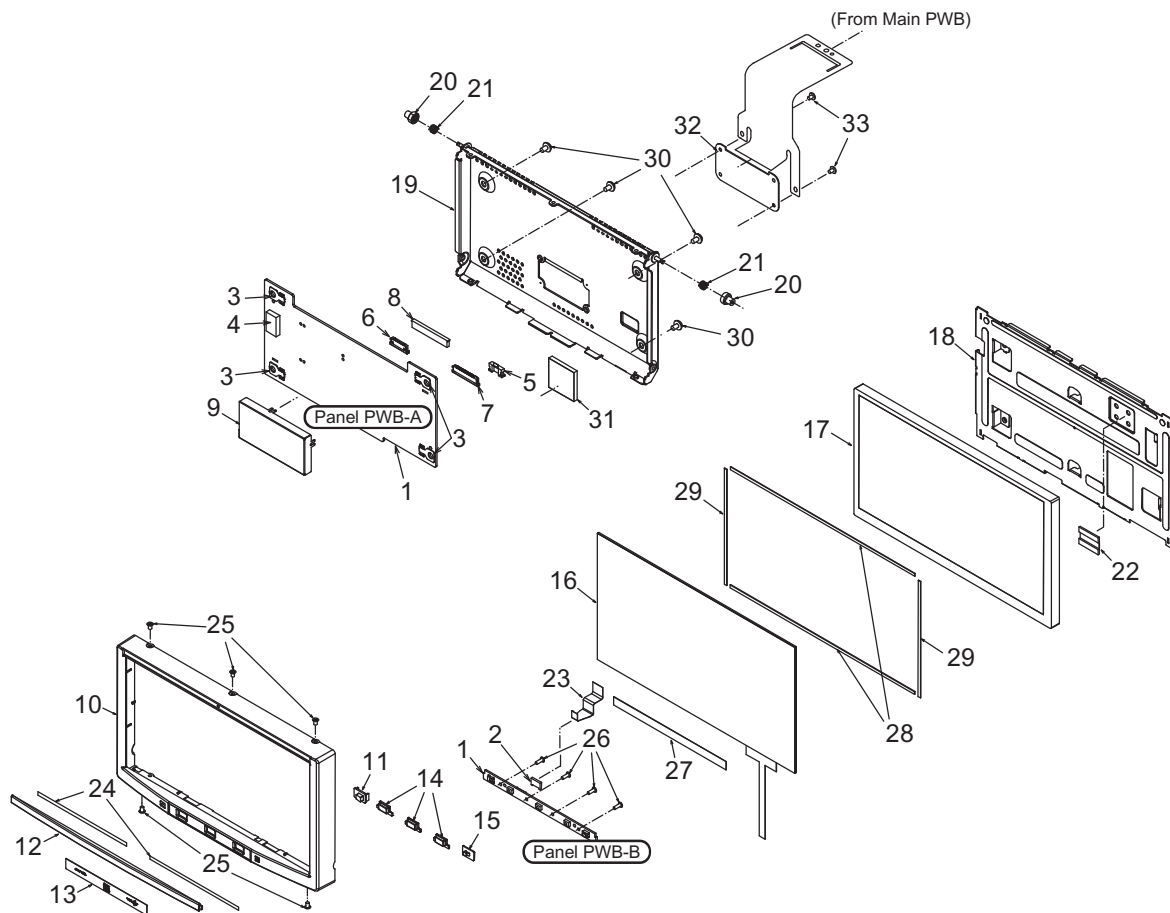


* Please do not reuse the screw of the lock type. (No.25, No.33)

NO.	PART NO.	DESCRIPTION	Q'TY
1	-----	PANEL PWB	1
2	074-2236-65	OUTLET SOCKET(15P)	1
3	073-0762-90	TERMINAL	4
4	076-0529-02	PLUG(LCD 2P)	1
5	074-2219-54	OUTLET SOCKET(T/P 4P)	1
6	074-2225-66	OUTLET SOCKET(SW FPC 16P)	1
7	074-2226-80	OUTLET SOCKET(30P)	1
8	074-2233-50	OUTLET SOCKET(50P)	1
9	331-4805-00	SHIELD CASE	1
10	370-6443-00	ESCUTCHEON	1
11	335-8654-00	IR-FILTER	1
12	378-0559-00 378-0559-02	BADGE(for QY5010BA) BADGE(for QY5010KA/B)	1
13	382-9175-00	SHEET KEY	1
14	382-9176-00	BUTTON(VOL/SRC)	3
15	382-9177-00	BUTTON(RESET)	1
16	013-9723-00	SWITCH(T/P)	1
17	379-0478-00	INDICATOR(LCD)	1

NO.	PART NO.	DESCRIPTION	Q'TY
18	331-4803-00	LCD HOLDER	1
19	331-4804-00	REAR-CVR	1
20	335-7074-00	ROLLER	2
21	750-6746-10	ROLLER SPRING	2
22	331-3038-00	EARTH PLATE	1
23	039-3225-00	FPC(SW-LCD)	1
24	347-8742-00	DOUBLE FACE(BADGE)	2
25	780-2003-03	SPECIAL SCREW(M2x3 LOCK)	5
26	778-2004-01	PAD SCREW(M1.7x5)	4
27	347-8743-00	FILM	1
28	347-8740-00	SPACER(U/D)	2
29	347-8741-00	SPACER(L/R)	2
30	716-1611-50	SPECIAL SCREW(M2.6x4)	4
31	345-6395-00	HEAT RUBBER	1
32	039-3502-00	PWB(COVER)	1
33	716-1851-00	SPECIAL SCREW(M2x3 LOCK)	2

Main section

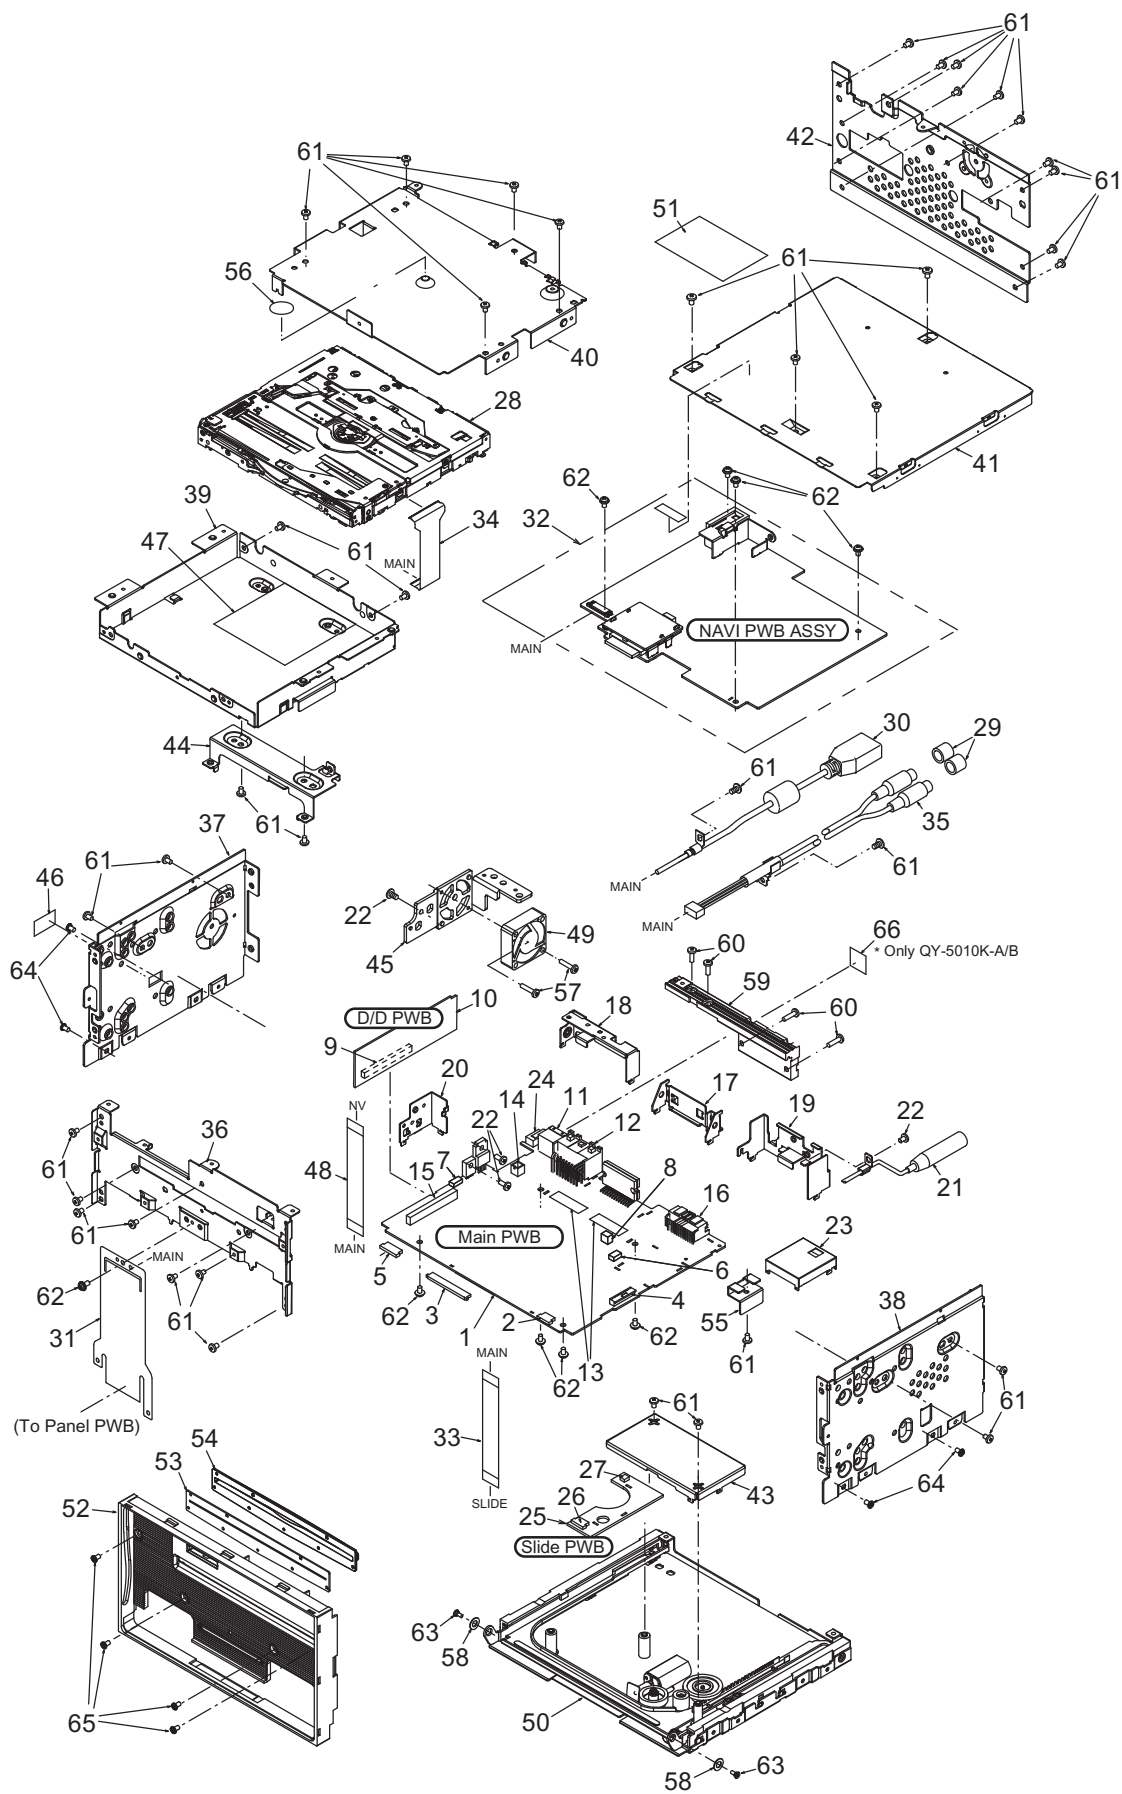

- * Please do not reuse the screw of the lock type(No.57).
 - * The internal parts of NAVI PWB ASSY(No.32) cannot be repaired.
 - * It is necessary to adjust with the special equipment when the internal parts of DVD mechanism (No.28) are exchanged.
- Please do not exchange the internal parts of DVD mechanism without the special equipment.

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	-----	MAIN PWB	1	35	855-5577-50	RCA PIN CORD(RCA-2CH)	1
2	074-2233-08	OUTLET SOCKET(MA-SENS 8P)	1	36	309-1900-00	FRONT PLATE	1
3	074-2233-50	OUTLET SOCKET(MA-PAN 50P)	1	37	312-0503-00	SIDE CHASSIS(L)	1
4	074-2238-36	OUTLET SOCKET(MEC-MA 36P)	1	38	312-0504-00	SIDE CHASSIS(R)	1
5	074-2233-24	OUTLET SOCKET(MA-NV 24P)	1	39	312-0505-01	CHASSIS	1
6	076-0478-55	PLUG(USB 5P)	1	40	312-0506-00	UPPER CHASSIS	1
7	076-0478-57	PLUG(7P)	1	41	310-1831-02	UPPER CASE	1
8	076-0312-03	PLUG(RCA AUX2 2CH)	1	42	307-0738-01	REAR PLATE	1
9	074-0881-20	OUTLET SOCKET(20P)	1	43	331-4806-00	PWB HOLDER(SLIDE-PWB)	1
10	-----	D/D PWB	1	44	331-4807-00	M-PWB HOLDER(MAIN-PWB)	1
11	074-1194-00	OUTLET SOCKET(13P)	1	45	313-2075-00	HEAT SINK(FAN)	1
12	074-4030-00	OUTLET SOCKET(POWER 18P)	1	46	347-8527-00	SHADE	1
13	347-7739-20	DOUBLE FACE	2	47	347-8504-00	INSULATOR(MECH FPC)	1
14	076-0349-02	PLUG(FAN 2P)	1	48	816-3041-55	FLAT WIRE(MAIN-NAVI)	1
15	076-0353-20	PLUG(D/D PWB 20P)	1	49	020-3053-00	DC-MOTOR(FAN)	1
16	076-0714-24	PLUG(RCA 24P)	1	50	932-0121-80	SLIDE MECH	1
17	331-4179-00	IC HOLDER(POWER)	1	51	276-0656-00 276-0662-00 276-0663-00	SETPLATE(for QY5010BA) SETPLATE(for QY5010KA) SETPLATE(for QY5010KB)	1
18	331-4792-00	CONNECT HOLD(L)	1	52	370-6444-00 370-6444-01	ESCUTCHEON(for QY5010BA) ESCUTCHEON(for QY5010KA/B)	1
19	331-4864-00	CONNECT HOLD(R)	1	53	346-0221-00	LEAHER SHEET	1
20	331-4791-00	IC HOLDER(TR)	1	54	335-8199-00	DISC GUIDE	1
21	092-2216-50	ANT-RECEPT	1	55	331-4870-00	EARTH PLATE	1
22	714-2606-8B	MACHINE SCREW(M2.6x6)	4	56	347-8760-00	SPACER	1
23	331-4794-00	TUNER BRKT	1	57	780-2612-50	SCREW(M2.6x12 LOCK)	2
24	075-0339-00	JACK	1	58	335-7903-00	BUSH	2
25	-----	SLIDE PWB	1	59	313-2076-00	HEAT SINK(IC)	1
26	074-2225-58	OUTLET SOCKET(8P)	1	60	714-2608-8H	MACHINE SCREW(M2.6x8)	4
27	076-0478-52	PLUG(2P)	1	61	714-2604-8B	MACHINE SCREW(M2.6x4)	39
28	929-2153-81	DVD-MECH-MODULE	1	62	780-2604-50	IT SCREW(M2.6x4)	9
29	345-3799-20	RUBBER PART	2	63	716-3577-00	DECORATIVESCREW	2
30	855-0613-51	USB CABLE	1	64	780-2604-51	SCREW(M2.6x4)	4
31	039-3448-00	FPC(MAIN-PANEL)	1	65	780-2604-52	SCREW(M2.6x4)	4
32	-----	NAVI PWB ASSY	1	66	347-8719-00	SPACER(for QY5010KA/B)	1
33	816-3040-55	FLAT WIRE(MAIN-SLIDE)	1				
34	039-3447-00	FPC(MAIN-MECH)	1				

ELECTRICAL PARTS LIST

Panel PWB(B1) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C104	168-1052-78	16V 1uF K	C189	043-6401-90	16V 10uF	D108	001-2643-90	CUS02
C108	168-1042-78	16V 0.1uF K	C190	043-0540-00	6.3V 10uF	D109	001-2643-90	CUS02
C109	043-0552-90	6.3V 47uF M	C191	166-1521-50	1500pF CH	D112	001-4305-20	UDZSTE-17 5.6B
C111	168-1042-78	16V 0.1uF K	C192	043-6401-90	16V 10uF	D113	001-4305-20	UDZSTE-17 5.6B
C112	166-2001-50	20pF CH	C193	168-1042-78	16V 0.1uF K	D114	001-4305-20	UDZSTE-17 5.6B
C115	166-2001-50	20pF CH	C194	168-1032-55	0.01uF K	D115	001-4305-20	UDZSTE-17 5.6B
C116	168-1042-78	16V 0.1uF K	C195	166-1521-50	1500pF CH	D116	001-1306-90	HSU83 TRF-E
C117	166-2001-50	20pF CH	C196	166-1521-50	1500pF CH	D701	001-0529-29	MA8051-M
C118	043-0540-00	6.3V 10uF	C197	043-6401-90	16V 10uF	D703	001-0367-91	1SS226
C119	168-1042-38	50V 0.1uF K	C198	166-1521-50	1500pF CH	D704	001-0367-91	1SS226
C120	166-4711-50	470pF CH	C199	043-0540-00	6.3V 10uF	D901	001-0516-90	MA111
C121	166-1011-50	100pF CH	C200	168-1042-78	16V 0.1uF K	D902	001-7103-90	CL-191HR-CD-T
C122	043-0566-90	50V 2.2uF K	C201	043-0540-00	6.3V 10uF	D903	001-7097-90	CL194S-WM-D-T
C124	168-2242-58	0.22uF K	C202	043-0540-00	6.3V 10uF	D904	001-7097-90	CL194S-WM-D-T
C125	168-1042-78	16V 0.1uF K	C203	043-0566-90	50V 2.2uF K	D905	001-7097-90	CL194S-WM-D-T
C126	166-1011-50	100pF CH	C204	043-0568-90	25V 2.2uF	D909	001-4305-20	UDZSTE-17 5.6B
C127	043-0540-00	6.3V 10uF	C205	168-1042-78	16V 0.1uF K	D910	001-4305-20	UDZSTE-17 5.6B
C128	168-1042-78	16V 0.1uF K	C206	166-2211-50	220pF CH	D911	001-4305-20	UDZSTE-17 5.6B
C129	168-1042-78	16V 0.1uF K	C207	043-6401-90	16V 10uF	D912	001-4305-20	UDZSTE-17 5.6B
C130	168-1042-78	16V 0.1uF K	C208	168-1042-78	16V 0.1uF K	F701	060-8100-50	F0603E1R00FSTRM
C131	168-1042-78	16V 0.1uF K	C209	168-1042-78	16V 0.1uF K	IC103	051-6467-00	MST7701-I-LF
C132	043-0540-00	6.3V 10uF	C210	168-1042-78	16V 0.1uF K	IC104	052-7094-01	MX25L3205DMI-12G
C134	043-0568-90	25V 2.2uF	C211	043-6401-90	16V 10uF	IC105	051-1292-90	NJM4565M-D
C135	043-0568-90	25V 2.2uF	C212	043-6401-90	16V 10uF	IC701	125-9023-90	TPCF8402TE85L,F
C136	043-0540-00	6.3V 10uF	C213	166-1021-50	1000pF CH	IC702	051-3925-90	OZ9910ISN-T2
C137	168-1042-78	16V 0.1uF K	C214	166-1021-50	1000pF CH	IC703	125-9023-90	TPCF8402TE85L,F
C138	168-1042-78	16V 0.1uF K	C215	168-1032-55	0.01uF K	IR901	060-4023-90	RS-471
C139	166-1021-50	1000pF CH	C216	168-1032-55	0.01uF K	J102	074-2219-54	4P
C140	168-1042-78	16V 0.1uF K	C217	168-1032-55	0.01uF K	J103	074-2233-50	50P
C141	168-1042-78	16V 0.1uF K	C218	168-1032-55	0.01uF K	J104	074-2226-80	30P
C142	043-0540-00	6.3V 10uF	C219	168-1032-55	0.01uF K	J105	074-2225-66	16P
C143	168-1042-78	16V 0.1uF K	C257	043-6401-90	16V 10uF	J901	074-2236-65	15P
C144	168-1042-78	16V 0.1uF K	C262	043-0559-90	6.3V 22uF	L102	010-3104-50	30 ohm/100MHz
C145	168-1042-78	16V 0.1uF K	C701	178-2255-79	2.2uF	L103	010-3105-70	240ohm/100MHz
C147	168-1042-78	16V 0.1uF K	C702	043-0549-50	3KV 10PF	L104	010-3105-70	240ohm/100MHz
C148	166-1801-50	18pF CH	C703	043-6401-90	16V 10uF	L105	010-3105-70	240ohm/100MHz
C149	166-1801-50	18pF CH	C704	168-1045-56	25V 0.1uF Z	L106	010-3105-70	240ohm/100MHz
C150	168-1042-78	16V 0.1uF K	C705	168-1032-55	0.01uF K	L107	010-3105-62	1k ohm/100MHz
C151	168-1042-78	16V 0.1uF K	C706	166-3911-50	390pF CH	L108	010-3414-91	3.3uH
C152	168-1042-78	16V 0.1uF K	C707	168-1022-55	1000pF K	L109	010-3514-90	15uH M
C153	168-1042-78	16V 0.1uF K	C708	168-1032-55	0.01uF K	L110	010-3514-90	15uH M
C156	168-1032-55	0.01uF K	C709	166-1811-50	180pF CH	L111	010-3104-50	30 ohm/100MHz
C157	168-1042-78	16V 0.1uF K	C710	168-4722-55	4700pF K	L112	010-3506-90	47uH
C158	043-0540-00	6.3V 10uF	C711	168-6832-78	0.068uF K	L113	010-3506-90	47uH
C159	168-1042-78	16V 0.1uF K	C712	178-2255-79	2.2uF	L114	010-3104-50	30 ohm/100MHz
C160	168-1042-78	16V 0.1uF K	C713	168-2232-55	0.022uF K	L115	010-3103-70	MMZ1608Y121BTA00
C161	168-1042-78	16V 0.1uF K	C714	043-0567-90	25V 22uF	L116	010-3104-50	30 ohm/100MHz
C162	168-1042-78	16V 0.1uF K	C715	043-0567-90	25V 22uF	L117	010-3104-50	30 ohm/100MHz
C164	168-1042-78	16V 0.1uF K	C716	168-1032-55	0.01uF K	L118	010-3104-50	30 ohm/100MHz
C165	168-1042-78	16V 0.1uF K	C717	043-0567-90	25V 22uF	L119	010-3104-50	30 ohm/100MHz
C166	168-1042-78	16V 0.1uF K	C720	042-1763-90	25V 47uF M	L120	010-3104-50	30 ohm/100MHz
C167	168-1042-78	16V 0.1uF K	C721	168-1042-78	16V 0.1uF K	L121	010-3407-68	33uH J
C168	043-6401-90	16V 10uF	C724	166-1021-50	1000pF CH	L122	010-3104-50	30 ohm/100MHz
C169	168-1042-78	16V 0.1uF K	C725	043-0554-90	25V 10uF	L123	010-3104-50	30 ohm/100MHz
C170	168-1042-78	16V 0.1uF K	C726	043-0554-90	25V 10uF	L124	010-3104-50	30 ohm/100MHz
C171	168-1042-78	16V 0.1uF K	C727	043-0554-90	25V 10uF	L125	010-3104-50	30 ohm/100MHz
C172	168-1042-78	16V 0.1uF K	C848	043-6401-90	16V 10uF	L126	010-3407-62	10uH J
C173	168-1042-78	16V 0.1uF K	C901	168-1042-78	16V 0.1uF K	L127	010-3506-90	47uH
C174	043-0540-00	6.3V 10uF	CCT102	050-0140-59	1/32W 33 ohm x4J	L128	010-3505-90	22uH
C175	168-1042-78	16V 0.1uF K	CCT104	050-0140-59	1/32W 33 ohm x4J	L129	010-3104-50	30 ohm/100MHz
C176	043-6401-90	16V 10uF	CCT105	050-0140-59	1/32W 33 ohm x4J	L130	010-3104-50	30 ohm/100MHz
C177	168-1042-78	16V 0.1uF K	CCT106	050-0140-59	1/32W 33 ohm x4J	L131	010-3105-62	1k ohm/100MHz
C178	168-1042-78	16V 0.1uF K	CCT107	050-0140-59	1/32W 33 ohm x4J	L132	010-3105-62	1k ohm/100MHz
C179	166-2701-50	27pF CH	D100	001-0367-91	1SS226	L133	010-3105-62	1k ohm/100MHz
C180	043-6401-90	16V 10uF	D101	001-4305-28	UDZSTE-17 12B	L134	010-3105-62	1k ohm/100MHz
C181	166-4711-50	470pF CH	D102	001-2643-90	CUS02	L135	010-3105-62	1k ohm/100MHz
C182	166-4711-50	470pF CH	D103	001-0367-91	1SS226	L136	010-3105-62	1k ohm/100MHz
C183	166-4711-50	470pF CH	D104	001-0367-91	1SS226	L137	010-3105-62	1k ohm/100MHz
C186	168-1042-78	16V 0.1uF K	D105	001-0367-91	1SS226	L138	010-3105-62	1k ohm/100MHz
C187	168-1032-55	0.01uF K	D106	001-0367-91	1SS226	L139	010-3105-62	1k ohm/100MHz
C188	043-0540-00	6.3V 10uF	D107	001-4305-25	UDZSTE-17 9.1B	L140	010-3105-62	1k ohm/100MHz

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
L141	010-3105-69	80 ohm/100MHz	R139	119-1041-15	1/10W 100k ohm	R217	119-4721-15	1/10W 4.7k ohm
L142	010-3105-69	80 ohm/100MHz	R140	119-1051-15	1/10W 1M ohm	R218	119-4731-15	1/10W 47k ohm
L143	010-3105-69	80 ohm/100MHz	R141	119-1001-15	1/10W 10 ohm	R221	119-0000-05	1/10W 0 ohm JW
L701	010-3059-90	200 ohm FILTER	R144	119-0000-05	1/10W 0 ohm JW	R250	119-4731-15	1/10W 47k ohm
L702	010-3108-54	MPZ2012S601A	R145	119-1031-15	1/10W 10k ohm	R252	119-2211-15	1/10W 220 ohm
L703	010-3108-54	MPZ2012S601A	R146	119-2221-15	1/10W 2.2k ohm	R253	119-1511-15	1/10W 150 ohm
P701	076-0529-02	2P	R147	119-2221-15	1/10W 2.2k ohm	R254	119-1511-15	1/10W 150 ohm
Q100	125-7011-90	RSR025P03TL	R149	119-3331-15	1/10W 33k ohm	R255	119-1511-15	1/10W 150 ohm
Q102	125-7011-90	RSR025P03TL	R150	119-3331-15	1/10W 33k ohm	R260	119-1041-15	1/10W 100k ohm
Q103	125-7011-90	RSR025P03TL	R151	119-1031-15	1/10W 10k ohm	R261	119-1041-15	1/10W 100k ohm
Q104	125-3014-90	ISA1602AM1 E,F	R152	119-1031-15	1/10W 10k ohm	R262	119-4731-15	1/10W 47k ohm
Q105	125-3014-90	ISA1602AM1 E,F	R153	119-3331-15	1/10W 33k ohm	R263	119-4731-15	1/10W 47k ohm
Q106	125-8028-90	RSR025N03 TL	R154	119-3321-15	1/10W 3.3k ohm	R264	119-4731-15	1/10W 47k ohm
Q107	125-7011-90	RSR025P03TL	R155	119-3331-15	1/10W 33k ohm	R701	116-6811-15	1/4W 680 ohm
Q108	125-0034-93	RT1P241M	R157	119-1231-15	1/10W 12k ohm	R702	119-1041-15	1/10W 100k ohm
Q109	125-2041-93	RT1N241M	R158	119-1031-15	1/10W 10k ohm	R703	119-3931-15	1/10W 39k ohm
Q110	125-2041-93	RT1N241M	R159	119-2231-15	1/10W 22k ohm	R705	032-0140-05	1/10W 82k ohm F
Q112	125-2041-93	RT1N241M	R160	119-3331-15	1/10W 33k ohm	R706	119-3351-15	1/10W 3.3M ohm
Q113	125-0034-93	RT1P241M	R161	119-1031-15	1/10W 10k ohm	R707	119-1021-15	1/10W 1k ohm
Q701	125-0025-92	RN2302	R163	032-0218-50	1/3W 0.047 ohm	R708	119-1021-15	1/10W 1k ohm
Q702	125-2032-92	RN1302	R165	119-0000-05	1/10W 0 ohm JW	R709	119-1031-15	1/10W 10k ohm
Q705	192-4155-49	2SC4155A R,S	R166	119-0000-05	1/10W 0 ohm JW	R711	119-6841-15	1/10W 680k ohm
Q901	192-4081-00	2SC4081	R168	032-0219-50	1/8W 0.22 ohm	R712	119-1051-15	1/10W 1M ohm
Q902	192-4081-00	2SC4081	R169	032-0140-94	1/10W 30k ohm F	R713	032-0140-79	1/10W 2.7k ohm F
R101	119-1301-15	1/10W 13 ohm	R170	119-0000-05	1/10W 0 ohm JW	R714	032-0140-90	1/10W 560 ohm F
R102	032-0218-50	1/3W 0.047 ohm	R171	119-0000-05	1/10W 0 ohm JW	R715	119-1021-15	1/10W 1k ohm
R103	119-1031-15	1/10W 10k ohm	R172	119-0000-05	1/10W 0 ohm JW	R716	119-1021-15	1/10W 1k ohm
R105	032-0140-12	1/10W 75 ohm F	R173	032-0140-08	1/10W 13k ohm F	R720	119-1021-15	1/10W 1k ohm
R106	119-1301-15	1/10W 13 ohm	R177	119-1031-15	1/10W 10k ohm	R721	119-1021-15	1/10W 1k ohm
R108	119-6201-15	1/10W 62 ohm	R178	119-3301-15	1/10W 33 ohm	R901	119-1021-15	1/10W 1k ohm
R109	119-1301-15	1/10W 13 ohm	R179	119-3301-15	1/10W 33 ohm	R902	119-1011-15	1/10W 100 ohm
R110	032-0218-50	1/3W 0.047 ohm	R180	119-3301-15	1/10W 33 ohm	R903	119-3311-15	1/10W 330 ohm
R111	032-0140-12	1/10W 75 ohm F	R181	119-1211-15	1/10W 120 ohm	R904	119-3311-15	1/10W 330 ohm
R114	119-6201-15	1/10W 62 ohm	R182	119-0000-05	1/10W 0 ohm JW	R905	119-3311-15	1/10W 330 ohm
R115	119-1301-15	1/10W 13 ohm	R183	119-0000-05	1/10W 0 ohm JW	R906	119-2211-15	1/10W 220 ohm
R116	032-0140-12	1/10W 75 ohm F	R185	119-0000-05	1/10W 0 ohm JW	R907	119-5611-15	1/10W 560 ohm
R117	119-6201-15	1/10W 62 ohm	R188	119-0000-05	1/10W 0 ohm JW	S901	013-6312-50	SKRP-ABE-010
R118	119-6201-15	1/10W 62 ohm	R194	116-5611-15	1/4W 560 ohm	S902	013-6318-51	SKRKAEE010
R119	032-0219-50	1/8W 0.22 ohm	R197	119-4731-15	1/10W 47k ohm	S903	013-6318-51	SKRKAEE010
R120	119-6201-15	1/10W 62 ohm	R198	119-4731-15	1/10W 47k ohm	S904	013-6318-51	SKRKAEE010
R121	032-0140-12	1/10W 75 ohm F	R199	119-0000-05	1/10W 0 ohm JW	T701	007-1178-00	OUTPUT-TRANS
R123	119-6201-15	1/10W 62 ohm	R200	119-0000-05	1/10W 0 ohm JW			BLC4126
R124	032-0140-04	1/10W 8.2k ohm F	R201	119-4731-15	1/10W 47k ohm	TM100	073-0762-90	TERMINAL
R125	032-0140-50	1/10W 10k ohm F	R202	119-0000-05	1/10W 0 ohm JW	TM101	073-0762-90	TERMINAL
R126	032-0140-99	1/10W 39k ohm F	R203	119-6891-15	1/10W 6.8 ohm	TM102	073-0762-90	TERMINAL
R127	032-0140-55	1/10W 4.7k ohm F	R204	119-6891-15	1/10W 6.8 ohm	TM103	073-0762-90	TERMINAL
R128	119-0000-05	1/10W 0 ohm JW	R205	119-6891-15	1/10W 6.8 ohm	TM104	073-0785-90	TERMINAL
R131	119-3311-15	1/10W 330 ohm	R206	119-6891-15	1/10W 6.8 ohm	TM105	073-0785-90	TERMINAL
R132	119-1021-15	1/10W 1k ohm	R208	119-0000-05	1/10W 0 ohm JW	X101	061-3569-90	NX3225GA
R133	119-4791-15	1/10W 4.7 ohm	R213	119-0000-05	1/10W 0 ohm JW	PWB	039-3500-00	PWB(WITHOUT COMPONENT)
R136	119-4721-15	1/10W 4.7k ohm	R215	119-4721-15	1/10W 4.7k ohm			
R137	119-3301-15	1/10W 33 ohm	R216	119-4731-15	1/10W 47k ohm			

Main PWB(B2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
ANT201	092-2216-50	ANTENNA RECEPT	C119	168-1032-55	0.01uF K	C214	043-0540-00	6.3V 10uF
C101	168-1022-55	1000pF K	C120	168-2232-55	0.022uF K	C215	043-0540-00	6.3V 10uF
C102	166-2096-50	2pF +/-0.25pF CK	C121	177-1062-78	10pF	C216	043-0540-00	6.3V 10uF
C104	166-1501-50	15pF CH	C122	168-1042-78	16V 0.1uF K	C217	043-0540-00	6.3V 10uF
C105	168-1022-55	1000pF K	C123	168-1042-78	16V 0.1uF K	C218	043-0540-00	6.3V 10uF
C106	166-3901-50	39pF CH	C200	166-2201-50	22pF CH	C219	043-0540-00	6.3V 10uF
C107	168-2242-58	0.22uF K	C202	168-1042-78	16V 0.1uF K	C220	043-0540-00	6.3V 10uF
C108	166-1201-50	12pF CH	C203	043-0540-00	6.3V 10uF	C221	043-0540-00	6.3V 10uF
C109	168-2242-58	0.22uF K	C204	043-0540-00	6.3V 10uF	C222	043-0540-00	6.3V 10uF
C110	168-1052-78	16V 1uF K	C205	168-1022-55	1000pF K	C223	043-0540-00	6.3V 10uF
C111	168-2242-58	0.22uF K	C206	168-1022-55	1000pF K	C224	043-0540-00	6.3V 10uF
C112	166-1201-50	12pF CH	C207	043-0540-00	6.3V 10uF	C225	166-2711-50	270pF CH
C113	168-1052-78	16V 1uF K	C208	043-0540-00	6.3V 10uF	C226	166-2711-50	270pF CH
C114	168-1032-55	0.01uF K	C209	043-0540-00	6.3V 10uF	C227	166-1211-50	120pF CH
C115	168-1032-55	0.01uF K	C210	043-0540-00	6.3V 10uF	C228	166-1211-50	120pF CH
C116	168-1032-55	0.01uF K	C211	168-1042-78	16V 0.1uF K	C229	166-6811-50	680pF CH
C117	168-1042-78	16V 0.1uF K	C212	168-1042-78	16V 0.1uF K	C230	166-6811-50	680pF CH
C118	168-1042-78	16V 0.1uF K	C213	043-0540-00	6.3V 10uF	C234	166-2201-50	22pF CH

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C236	166-2201-50	22pF CH	C492	043-0551-90	6.3V 4.7uF M	C711	046-1042-78	0.1uF K B
C241	168-1042-78	16V 0.1uF K	C501	043-0540-00	6.3V 10uF	C712	046-1042-78	0.1uF K B
C243	168-1042-78	16V 0.1uF K	C504	168-1042-78	16V 0.1uF K	C713	045-1007-50	10 +/-0.5pF CH
C244	168-1042-78	16V 0.1uF K	C505	168-1042-78	16V 0.1uF K	C714	045-1007-50	10 +/-0.5pF CH
C245	042-1764-90	16V 100uF M	C506	043-0540-00	6.3V 10uF	C715	168-1042-78	16V 0.1uF K
C246	168-1042-78	16V 0.1uF K	C507	168-1042-78	16V 0.1uF K	C716	046-1042-78	0.1uF K B
C251	043-0540-00	6.3V 10uF	C508	043-0551-90	6.3V 4.7uF M	C717	046-2222-58	2200pF K B
C252	043-0540-00	6.3V 10uF	C509	166-2201-50	22pF CH	C718	046-1042-78	0.1uF K B
C256	168-1042-78	16V 0.1uF K	C510	168-1032-55	0.01uF K	C719	168-1042-78	16V 0.1uF K
C257	168-1042-78	16V 0.1uF K	C511	168-1022-55	1000pF K	C720	046-1032-78	0.01uF K B
C258	165-4763-35	16V 47uF	C512	168-1052-78	16V 1uF K	C721	046-1042-78	0.1uF K B
C260	168-1042-78	16V 0.1uF K	C513	168-1042-78	16V 0.1uF K	C722	046-1042-78	0.1uF K B
C262	168-1042-78	16V 0.1uF K	C514	168-4732-78	0.047uF K	C723	043-0552-90	6.3V 47uF M
C263	165-4763-35	16V 47uF	C515	165-1063-35	16V 10uF	C725	046-1042-78	0.1uF K B
C272	168-1022-55	1000pF K	C516	042-4022-90	6.3V 1000uF	C726	046-1042-78	0.1uF K B
C273	168-1022-55	1000pF K	C517	168-1052-78	16V 1uF K	C727	046-1042-78	0.1uF K B
C274	168-1022-55	1000pF K	C518	165-4763-15	6.3V 47uF	C728	046-1042-78	0.1uF K B
C275	168-1042-78	16V 0.1uF K	C520	168-1042-78	16V 0.1uF K	C730	045-1801-50	18pFJ CH
C279	166-2201-50	22pF CH	C521	166-1201-50	12pF CH	C731	045-1801-50	18pFJ CH
C280	166-2201-50	22pF CH	C522	166-1201-50	12pF CH	C732	046-1042-78	0.1uF K B
C282	168-1042-78	16V 0.1uF K	C523	166-1011-50	100pF CH	C733	046-1032-78	0.01uF K B
C283	168-1042-78	16V 0.1uF K	C527	168-1022-55	1000pF K	C734	045-1007-50	10 +/-0.5pF CH
C284	168-1042-78	16V 0.1uF K	C528	042-1764-90	16V 100uF M	C735	045-1007-50	10 +/-0.5pF CH
C285	168-1042-78	16V 0.1uF K	C529	168-1042-78	16V 0.1uF K	C736	168-1042-78	16V 0.1uF K
C287	168-1052-78	16V 1uF K	C530	168-1042-78	16V 0.1uF K	C737	046-1042-78	0.1uF K B
C288	165-1063-35	16V 10uF	C531	165-2263-35	16V 22uF	C738	046-1032-78	0.01uF K B
C290	166-4711-50	470pF CH	C532	168-1042-78	16V 0.1uF K	C739	168-1042-78	16V 0.1uF K
C291	166-4711-50	470pF CH	C534	043-6401-90	16V 10uF	C740	168-1042-78	16V 0.1uF K
C293	168-1042-78	16V 0.1uF K	C535	043-6401-90	16V 10uF	C741	043-0540-00	6.3V 10uF
C294	165-1063-35	16V 10uF	C601	168-2222-55	2200pF K	C742	043-0540-00	6.3V 10uF
C295	165-1063-35	16V 10uF	C602	168-2222-55	2200pF K	C743	168-1022-55	1000pF K
C296	165-1063-35	16V 10uF	C603	168-2222-55	2200pF K	C744	168-1022-55	1000pF K
C297	165-1063-35	16V 10uF	C604	168-2222-55	2200pF K	C745	168-1042-78	16V 0.1uF K
C298	165-1063-35	16V 10uF	C605	168-2222-55	2200pF K	C746	043-0552-90	6.3V 47uF M
C299	165-1063-35	16V 10uF	C606	168-2222-55	2200pF K	C747	046-1042-78	0.1uF K B
C300	165-1063-35	16V 10uF	C607	168-2222-55	2200pF K	C748	043-0540-00	6.3V 10uF
C301	165-1063-35	16V 10uF	C608	168-2222-55	2200pF K	C749	043-0540-00	6.3V 10uF
C302	166-3911-50	390pF CH	C610	165-4763-35	16V 47uF	C750	168-1042-78	16V 0.1uF K
C303	166-3911-50	390pF CH	C611	168-1052-78	16V 1uF K	C751	168-1042-78	16V 0.1uF K
C304	043-0540-00	6.3V 10uF	C612	165-1053-65	50V 1uF	C752	043-0552-90	6.3V 47uF M
C305	043-0540-00	6.3V 10uF	C613	042-1545-00	16V 2200uF	C755	168-1022-55	1000pF K
C322	168-1022-55	1000pF K	C614	168-1032-55	0.01uF K	C756	168-1022-55	1000pF K
C323	168-1022-55	1000pF K	C616	172-2241-11	0.22uF	C757	168-1032-55	0.01uF K
C324	168-2242-58	0.22uF K	C617	042-1545-00	16V 2200uF	C758	168-1022-55	1000pF K
C325	168-2242-58	0.22uF K	C618	172-2241-11	0.22uF	CCT701	050-0140-63	1/32W 47k ohm x4J
C326	168-2242-58	0.22uF K	C619	042-1764-90	16V 100uF M	CCT702	050-0140-63	1/32W 47k ohm x4J
C327	168-2242-58	0.22uF K	C620	168-1042-78	16V 0.1uF K	CCT703	050-0140-63	1/32W 47k ohm x4J
C385	166-1011-50	100pF CH	C622	168-1042-78	16V 0.1uF K	CCT704	050-0140-63	1/32W 47k ohm x4J
C386	166-1011-50	100pF CH	C623	168-1032-55	0.01uF K	CCT705	050-0140-63	1/32W 47k ohm x4J
C387	168-1042-78	16V 0.1uF K	C625	165-4763-35	16V 47uF	CCT706	050-0140-63	1/32W 47k ohm x4J
C388	168-1032-55	0.01uF K	C626	168-1042-78	16V 0.1uF K	CCT707	050-0140-63	1/32W 47k ohm x4J
C401	043-0540-00	6.3V 10uF	C630	165-3363-45	25V 33uF	CCT708	050-0140-63	1/32W 47k ohm x4J
C404	043-0540-00	6.3V 10uF	C633	042-1764-90	16V 100uF M	CCT709	050-0140-63	1/32W 47k ohm x4J
C405	043-0540-00	6.3V 10uF	C634	043-6401-90	16V 10uF	D351	001-0529-14	MA8030-L
C406	168-1042-78	16V 0.1uF K	C635	043-6401-90	16V 10uF	D352	001-0529-14	MA8030-L
C407	043-6401-90	16V 10uF	C636	168-4732-78	0.047uF K	D353	001-0529-14	MA8030-L
C408	166-1007-50	10pF CH	C637	043-6401-90	16V 10uF	D354	001-0529-14	MA8030-L
C410	168-1022-55	1000pF K	C638	043-0540-00	6.3V 10uF	D355	001-0529-14	MA8030-L
C423	168-1042-78	16V 0.1uF K	C639	043-0540-00	6.3V 10uF	D356	001-0529-14	MA8030-L
C424	168-1042-78	16V 0.1uF K	C640	168-1052-78	16V 1uF K	D361	001-0516-90	MA111
C425	168-1042-78	16V 0.1uF K	C641	166-1011-50	100pF CH	D362	001-0516-90	MA111
C426	168-1042-78	16V 0.1uF K	C642	043-6401-90	16V 10uF	D363	001-0529-44	MA8082-M
C427	042-1764-90	16V 100uF M	C643	043-6401-90	16V 10uF	D389	001-0516-90	MA111
C428	168-1042-78	16V 0.1uF K	C671	168-3342-58	0.33uF K	D390	001-0516-90	MA111
C429	168-1052-78	16V 1uF K	C701	043-0540-00	6.3V 10uF	D391	001-0516-90	MA111
C430	168-1052-78	16V 1uF K	C702	043-0540-00	6.3V 10uF	D421	001-0529-14	MA8030-L
C431	168-1042-78	16V 0.1uF K	C703	042-4022-90	6.3V 1000uF	D422	001-0529-14	MA8030-L
C432	168-1052-78	16V 1uF K	C704	046-1042-78	0.1uF K B	D504	001-0529-53	MA8110M
C433	168-1052-78	16V 1uF K	C705	043-0559-90	6.3V 22uF	D515	001-0516-90	MA111
C435	168-1052-78	16V 1uF K	C706	168-1042-78	16V 0.1uF K	D516	001-4313-50	HZU6A2L
C436	168-1022-55	1000pF K	C707	168-1042-78	16V 0.1uF K	D519	001-0529-43	MA8082-L
C455	042-1764-90	16V 100uF M	C708	043-0540-00	6.3V 10uF	D521	001-0584-23	MA8075
C460	168-1032-55	0.01uF K	C709	168-1042-78	16V 0.1uF K	D601	001-0516-90	MA111
C491	043-0551-90	6.3V 4.7uF M	C710	043-0540-00	6.3V 10uF	D602	001-0516-90	MA111

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D603	001-0516-90	MA111	L204	010-2003-04	30uH	Q221	125-2041-96	RT1N436M
D604	001-4912-90	SM5S22A-HE3/2D	L205	010-3407-58	4.7uH J	Q222	192-4155-49	2SC4155A R,S
D606	001-0516-90	MA111	L206	010-3105-62	1k ohm/100MHz	Q223	125-2041-93	RT1N241M
D607	001-0529-14	MA8030-L	L207	010-3103-64	1.5k ohm/100MHz	Q224	125-2041-93	RT1N241M
D608	001-0516-90	MA111	L208	010-3103-64	1.5k ohm/100MHz	Q381	192-4155-49	2SC4155A R,S
D609	001-0516-90	MA111	L210	010-3103-64	1.5k ohm/100MHz	Q382	192-4155-49	2SC4155A R,S
D610	001-0516-90	MA111	L211	010-3103-64	1.5k ohm/100MHz	Q383	192-4155-49	2SC4155A R,S
D611	001-2403-90	M1F60	L212	010-3103-64	1.5k ohm/100MHz	Q384	125-3014-90	ISA1602AM1 E,F
D613	001-2403-90	M1F60	L213	010-3103-64	1.5k ohm/100MHz	Q385	125-3014-90	ISA1602AM1 E,F
D614	001-0516-90	MA111	L214	010-3103-64	1.5k ohm/100MHz	Q401	190-1365-50	2SA1365 AF,AG
D615	001-0529-26	MA8047-M	L215	010-3103-64	1.5k ohm/100MHz	Q402	125-2041-96	RT1N436M
D616	001-2403-90	M1F60	L216	010-3103-64	1.5k ohm/100MHz	Q403	190-2071-00	2SA2071
D617	001-2403-90	M1F60	L217	010-3103-64	1.5k ohm/100MHz	Q404	125-2041-96	RT1N436M
D618	001-0516-90	MA111	L218	010-3103-64	1.5k ohm/100MHz	Q451	190-2071-00	2SA2071
D619	001-2403-90	M1F60	L219	010-3103-64	1.5k ohm/100MHz	Q452	192-4155-49	2SC4155A R,S
D620	001-0504-47	HZS9 B3L	L220	010-3104-53	220 ohm/100MHz	Q501	192-4155-49	2SC4155A R,S
D623	001-2403-90	M1F60	L222	010-3103-64	1.5k ohm/100MHz	Q502	192-4155-49	2SC4155A R,S
D624	001-0529-32	TEF6606/V4	L223	010-3103-64	1.5k ohm/100MHz	Q503	192-4155-49	2SC4155A R,S
D625	001-0529-69	MA8180-M	L401	010-3103-50	1500 ohm/100MHz	Q504	125-0034-93	RT1P241M
D626	001-0529-69	MA8180-M	L402	010-3103-50	1500 ohm/100MHz	Q505	125-3014-90	ISA1602AM1 E,F
D701	060-8078-00	EZAEG3A50AV	L403	010-3103-50	1500 ohm/100MHz	Q506	192-4155-49	2SC4155A R,S
D702	060-8078-00	EZAEG3A50AV	L404	010-3103-55	120 ohm/100MHz	Q507	125-2041-92	RT1N141M
IC101	051-4700-90	TEF6606/V4	L405	010-3103-64	1.5k ohm/100MHz	Q511	125-2041-96	RT1N436M
IC200	051-6739-90	AK4388ET-E2	L406	010-3103-64	1.5k ohm/100MHz	Q512	192-4155-49	2SC4155A R,S
IC203	051-3057-90	BA4558RFV	L407	010-3103-64	1.5k ohm/100MHz	Q601	125-4021-90	3CG1260 Q
IC205	051-3057-90	BA4558RFV	L408	010-3104-50	30 ohm/100MHz	Q602	125-3014-90	ISA1602AM1 E,F
IC206	051-7106-90	CD4052B-PWR	L409	010-3104-50	30 ohm/100MHz	Q604	125-3014-90	ISA1602AM1 E,F
IC207	051-3057-90	BA4558RFV	L411	010-3104-50	30 ohm/100MHz	Q605	192-4155-49	2SC4155A R,S
IC208	051-7106-90	CD4052B-PWR	L412	010-3041-90	10uH	Q607	192-4155-49	2SC4155A R,S
IC209	051-5048-90	NJW1222-TE2	L413	010-3103-64	1.5k ohm/100MHz	Q610	125-4021-90	3CG1260 Q
IC212	051-3057-90	BA4558RFV	L421	010-3406-66	22uH J	Q612	125-4021-90	3CG1260 Q
IC381	051-7262-48	TC7WH14FU-TE12L,F	L491	010-3104-50	30 ohm/100MHz	Q614	125-3014-90	ISA1602AM1 E,F
IC421	051-5352-90	AK4254	L501	010-2279-50	4.7uH	Q616	125-2041-96	RT1N436M
IC491	051-3568-90	S-1172B19-E6T1G	L502	010-2279-50	4.7uH	Q617	125-2041-96	RT1N436M
IC503	-----	UPD70F3347GJ-UEN-A(FLASH 032510-052)	L503	010-3407-78	220uH J	Q618	192-4155-49	2SC4155A R,S
IC504	051-5440-08	S-80931CNMC-G81	L551	010-3108-54	600 ohm/100MHz	Q619	192-4155-49	2SC4155A R,S
IC505	051-3406-90	NJM2078M	L552	010-3108-54	600 ohm/100MHz	Q620	102-3420-50	2SC3420 GR,BL
IC506	051-5410-38	BU4820G-TR	L601	010-3407-66	22uH J	Q621	125-3014-90	ISA1602AM1 E,F
IC507	051-9432-90	S-24CS04AFT-V-G	L602	010-3104-50	30 ohm/100MHz	Q622	198-0662-18	2SK0662MRL
IC508	051-6100-90	BD6221F-E2	L603	010-3104-50	30 ohm/100MHz	Q623	125-2041-96	RT1N436M
IC601	051-2070-00	TB2926HQ	L701	010-3103-64	1.5k ohm/100MHz	Q627	125-2041-96	RT1N436M
IC602	051-3335-90	AN77L04M	L702	010-3103-64	1.5k ohm/100MHz	Q628	192-5824-00	2SC5824
IC605	051-6600-90	LA2335M	L703	010-3103-64	1.5k ohm/100MHz	Q634	101-1375-00	2SB1375
IC701	051-3392-90	S-1323B15NB-N8ATFG	L704	010-3103-55	120 ohm/100MHz	Q701	190-1365-50	2SA1365 AF,AG
IC702	051-3392-90	S-1323B15NB-N8ATFG	L705	010-3103-64	1.5k ohm/100MHz	Q703	125-2041-93	RT1N241M
IC703	051-6711-40	TC94A34FG-010	L706	010-3103-64	1.5k ohm/100MHz	R101	119-4741-15	1/10W 470k ohm
IC704	051-6739-90	AK4388ET-E2	L707	010-3105-62	1k ohm/100MHz	R102	119-4741-15	1/10W 470k ohm
IC705	052-3409-94	TMP92FD28AFG	L708	010-3104-53	220 ohm/100MHz	R103	119-1011-15	1/10W 100 ohm
IC706	051-6926-90	BD2051AFJ-TR	P200	076-0312-03	3P	R104	119-4721-15	1/10W 4.7k ohm
IC707	051-5418-08	S-80827CNMC-B8K	P203	076-0714-24	24P	R105	116-2201-15	1/4W 22 ohm
IC708	051-7226-08	TC7SH00FU	P504	076-0478-57	7P	R106	119-1011-15	1/10W 100 ohm
IC709	051-6928-90	341S2094	P601	076-0349-02	2P	R107	119-1011-15	1/10W 100 ohm
IC710	051-7221-18	TC7SH04FU	P602	076-0353-20	20P	R108	119-0000-05	1/10W 0 ohm JW
J382	074-2233-24	24P	P702	076-0478-55	6P	R116	119-0000-05	1/10W 0 ohm JW
J401	074-2238-36	36P	Q201	125-2041-93	RT1N241M	R200	119-1021-15	1/10W 1k ohm
J452	074-2233-50	50P	Q202	125-2041-93	RT1N241M	R201	119-0000-05	1/10W 0 ohm JW
J502	074-2233-08	8P	Q203	192-6053-00	2SC6053	R203	119-4731-15	1/10W 47k ohm
J506	075-0339-00	MINI JACK	Q204	192-6053-00	2SC6053	R204	119-4731-15	1/10W 47k ohm
J601	074-4030-00	18P	Q205	192-6053-00	2SC6053	R205	119-4731-15	1/10W 47k ohm
J602	074-1194-00	13P CE-NET	Q206	192-6053-00	2SC6053	R206	119-4731-15	1/10W 47k ohm
L101	010-3406-50	1uH J	Q207	192-6053-00	2SC6053	R207	119-1011-15	1/10W 100 ohm
L102	010-3406-53	1.8uH J	Q208	192-6053-00	2SC6053	R208	119-1011-15	1/10W 100 ohm
L103	010-3062-54	LQH31HNR29J03L	Q209	192-6053-00	2SC6053	R209	119-4731-15	1/10W 47k ohm
L104	010-3406-43	0.27uH J	Q210	192-6053-00	2SC6053	R210	119-4731-15	1/10W 47k ohm
L105	010-3072-90	560uH	Q211	192-4155-49	2SC4155A R,S	R213	119-1031-15	1/10W 10k ohm
L106	010-3072-90	560uH	Q212	192-4155-49	2SC4155A R,S	R214	119-1031-15	1/10W 10k ohm
L107	010-4054-00	35.7pF/100MHz	Q213	192-4155-49	2SC4155A R,S	R217	119-1031-15	1/10W 10k ohm
L108	010-3105-62	1k ohm/100MHz	Q214	192-4155-49	2SC4155A R,S	R218	119-1031-15	1/10W 10k ohm
L109	010-3105-62	1k ohm/100MHz	Q215	125-0034-96	RT1P436M	R220	119-0000-05	1/10W 0 ohm JW
			Q216	125-0034-96	RT1P436M	R221	119-2731-15	1/10W 27k ohm
			Q217	125-0034-96	RT1P436M	R222	119-2731-15	1/10W 27k ohm
			Q218	125-0034-96	RT1P436M	R223	119-5621-15	1/10W 5.6k ohm
			Q219	125-2041-96	RT1N436M	R224	119-5621-15	1/10W 5.6k ohm
			Q220	192-4155-49	2SC4155A R,S	R226	119-0000-05	1/10W 0 ohm JW

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R227	119-0000-05	1/10W 0 ohm JW	R319	119-3921-15	1/10W 3.9k ohm	R424	119-7501-15	1/10W 75 ohm
R229	119-0000-05	1/10W 0 ohm JW	R320	119-3921-15	1/10W 3.9k ohm	R425	119-7501-15	1/10W 75 ohm
R230	119-0000-05	1/10W 0 ohm JW	R321	119-1021-15	1/10W 1k ohm	R426	119-0000-05	1/10W 0 ohm JW
R231	032-0140-89	1/10W 47k ohm F	R322	119-1021-15	1/10W 1k ohm	R427	119-0000-05	1/10W 0 ohm JW
R232	032-0140-63	1/10W 27k ohm F	R323	119-1031-15	1/10W 10k ohm	R428	119-0000-05	1/10W 0 ohm JW
R233	032-0140-89	1/10W 47k ohm F	R324	119-1031-15	1/10W 10k ohm	R429	119-7501-15	1/10W 75 ohm
R234	119-1831-15	1/10W 18k ohm	R325	119-1021-15	1/10W 1k ohm	R430	119-0000-05	1/10W 0 ohm JW
R235	119-5631-15	1/10W 56k ohm	R326	119-1021-15	1/10W 1k ohm	R431	119-4731-15	1/10W 47k ohm
R236	119-5631-15	1/10W 56k ohm	R327	119-8231-15	1/10W 82k ohm	R451	119-1031-15	1/10W 10k ohm
R237	032-0140-89	1/10W 47k ohm F	R328	119-8231-15	1/10W 82k ohm	R452	116-3311-15	1/4W 330 ohm
R238	032-0140-63	1/10W 27k ohm F	R329	119-2231-15	1/10W 22k ohm	R453	116-3311-15	1/4W 330 ohm
R239	032-0140-89	1/10W 47k ohm F	R330	119-2231-15	1/10W 22k ohm	R468	119-0000-05	1/10W 0 ohm JW
R240	119-1831-15	1/10W 18k ohm	R331	119-1021-15	1/10W 1k ohm	R469	119-0000-05	1/10W 0 ohm JW
R241	119-1831-15	1/10W 18k ohm	R332	119-2231-15	1/10W 22k ohm	R471	119-0000-05	1/10W 0 ohm JW
R242	119-5631-15	1/10W 56k ohm	R333	119-1021-15	1/10W 1k ohm	R472	119-4721-15	1/10W 4.7k ohm
R243	119-5631-15	1/10W 56k ohm	R334	119-8221-15	1/10W 8.2k ohm	R473	119-4731-15	1/10W 47k ohm
R244	032-0140-63	1/10W 27k ohm F	R335	119-1021-15	1/10W 1k ohm	R500	119-2211-15	1/10W 220 ohm
R245	119-0000-05	1/10W 0 ohm JW	R336	119-1021-15	1/10W 1k ohm	R501	119-2211-15	1/10W 220 ohm
R246	032-0140-63	1/10W 27k ohm F	R350	119-4731-15	1/10W 47k ohm	R502	119-1041-15	1/10W 100k ohm
R247	119-1831-15	1/10W 18k ohm	R351	119-4731-15	1/10W 47k ohm	R503	119-1021-15	1/10W 1k ohm
R250	119-0000-05	1/10W 0 ohm JW	R352	119-5621-15	1/10W 5.6k ohm	R504	119-1031-15	1/10W 10k ohm
R251	119-1831-15	1/10W 18k ohm	R353	119-4731-15	1/10W 47k ohm	R505	119-0000-05	1/10W 0 ohm JW
R252	119-1831-15	1/10W 18k ohm	R354	119-4731-15	1/10W 47k ohm	R506	119-1031-15	1/10W 10k ohm
R253	119-4731-15	1/10W 47k ohm	R355	119-5621-15	1/10W 5.6k ohm	R507	119-1011-15	1/10W 100 ohm
R254	119-4731-15	1/10W 47k ohm	R356	119-5621-15	1/10W 5.6k ohm	R508	119-4721-15	1/10W 4.7k ohm
R255	119-1031-15	1/10W 10k ohm	R357	119-4731-15	1/10W 47k ohm	R509	119-1031-15	1/10W 10k ohm
R260	032-0140-89	1/10W 47k ohm F	R358	119-4731-15	1/10W 47k ohm	R510	119-4721-15	1/10W 4.7k ohm
R261	032-0140-89	1/10W 47k ohm F	R359	119-5621-15	1/10W 5.6k ohm	R511	119-1011-15	1/10W 100 ohm
R262	119-0000-05	1/10W 0 ohm JW	R361	119-0000-05	1/10W 0 ohm JW	R512	119-1031-15	1/10W 10k ohm
R263	032-0140-55	1/10W 4.7k ohm F	R366	119-0000-05	1/10W 0 ohm JW	R513	119-4721-15	1/10W 4.7k ohm
R264	032-0140-55	1/10W 4.7k ohm F	R367	119-0000-05	1/10W 0 ohm JW	R514	119-1031-15	1/10W 10k ohm
R265	119-0000-05	1/10W 0 ohm JW	R368	119-0000-05	1/10W 0 ohm JW	R515	119-1031-15	1/10W 10k ohm
R266	119-0000-05	1/10W 0 ohm JW	R369	119-0000-05	1/10W 0 ohm JW	R516	119-1011-15	1/10W 100 ohm
R270	119-0000-05	1/10W 0 ohm JW	R370	119-0000-05	1/10W 0 ohm JW	R517	119-1011-15	1/10W 100 ohm
R271	119-0000-05	1/10W 0 ohm JW	R371	119-0000-05	1/10W 0 ohm JW	R520	119-1021-15	1/10W 1k ohm
R272	119-0000-05	1/10W 0 ohm JW	R372	119-0000-05	1/10W 0 ohm JW	R521	119-1031-15	1/10W 10k ohm
R273	119-0000-05	1/10W 0 ohm JW	R373	119-0000-05	1/10W 0 ohm JW	R522	119-2231-15	1/10W 22k ohm
R274	119-0000-05	1/10W 0 ohm JW	R374	119-0000-05	1/10W 0 ohm JW	R523	119-1031-15	1/10W 10k ohm
R275	119-4731-15	1/10W 47k ohm	R375	119-0000-05	1/10W 0 ohm JW	R524	119-1031-15	1/10W 10k ohm
R276	119-0000-05	1/10W 0 ohm JW	R376	119-0000-05	1/10W 0 ohm JW	R525	119-1031-15	1/10W 10k ohm
R277	119-0000-05	1/10W 0 ohm JW	R377	119-0000-05	1/10W 0 ohm JW	R526	119-1041-15	1/10W 100k ohm
R278	119-4731-15	1/10W 47k ohm	R379	119-0000-05	1/10W 0 ohm JW	R527	119-1031-15	1/10W 10k ohm
R279	119-1011-15	1/10W 100 ohm	R380	119-0000-05	1/10W 0 ohm JW	R529	119-4721-15	1/10W 4.7k ohm
R280	119-1011-15	1/10W 100 ohm	R381	119-1011-15	1/10W 100 ohm	R530	119-1031-15	1/10W 10k ohm
R281	119-6831-15	1/10W 68k ohm	R382	119-3911-15	1/10W 390 ohm	R531	119-1031-15	1/10W 10k ohm
R282	119-6831-15	1/10W 68k ohm	R383	119-0000-05	1/10W 0 ohm JW	R537	119-0000-05	1/10W 0 ohm JW
R283	119-4731-15	1/10W 47k ohm	R384	119-1021-15	1/10W 1k ohm	R538	119-4721-15	1/10W 4.7k ohm
R284	119-4731-15	1/10W 47k ohm	R385	119-4711-15	1/10W 470 ohm	R539	119-4721-15	1/10W 4.7k ohm
R285	119-2231-15	1/10W 22k ohm	R386	119-2231-15	1/10W 22k ohm	R540	119-1031-15	1/10W 10k ohm
R286	119-2231-15	1/10W 22k ohm	R387	119-2231-15	1/10W 22k ohm	R541	119-1031-15	1/10W 10k ohm
R287	119-2231-15	1/10W 22k ohm	R388	119-1031-15	1/10W 10k ohm	R542	119-0000-05	1/10W 0 ohm JW
R288	119-2231-15	1/10W 22k ohm	R389	119-1031-15	1/10W 10k ohm	R543	119-2231-15	1/10W 22k ohm
R289	119-2231-15	1/10W 22k ohm	R390	119-2231-15	1/10W 22k ohm	R544	119-4711-15	1/10W 470 ohm
R290	119-2231-15	1/10W 22k ohm	R391	119-2231-15	1/10W 22k ohm	R545	119-1031-15	1/10W 10k ohm
R291	119-2231-15	1/10W 22k ohm	R392	119-2231-15	1/10W 22k ohm	R546	119-1031-15	1/10W 10k ohm
R292	119-2231-15	1/10W 22k ohm	R393	119-2231-15	1/10W 22k ohm	R547	119-1041-15	1/10W 100k ohm
R293	119-1031-15	1/10W 10k ohm	R394	119-4731-15	1/10W 47k ohm	R548	119-1031-15	1/10W 10k ohm
R294	119-1031-15	1/10W 10k ohm	R395	119-4721-15	1/10W 4.7k ohm	R549	119-1031-15	1/10W 10k ohm
R295	119-3311-15	1/10W 330 ohm	R396	119-1031-15	1/10W 10k ohm	R550	119-1031-15	1/10W 10k ohm
R296	119-1021-15	1/10W 1k ohm	R397	119-4731-15	1/10W 47k ohm	R551	119-1031-15	1/10W 10k ohm
R297	119-1021-15	1/10W 1k ohm	R398	119-4721-15	1/10W 4.7k ohm	R554	119-1011-15	1/10W 100 ohm
R298	119-3311-15	1/10W 330 ohm	R399	119-4721-15	1/10W 4.7k ohm	R555	119-1011-15	1/10W 100 ohm
R299	119-3311-15	1/10W 330 ohm	R401	119-0000-05	1/10W 0 ohm JW	R556	119-1011-15	1/10W 100 ohm
R300	119-1021-15	1/10W 1k ohm	R402	119-1031-15	1/10W 10k ohm	R557	119-1011-15	1/10W 100 ohm
R301	119-1021-15	1/10W 1k ohm	R403	119-5611-15	1/10W 560 ohm	R558	119-1011-15	1/10W 100 ohm
R302	119-3311-15	1/10W 330 ohm	R406	119-1031-15	1/10W 10k ohm	R559	119-1011-15	1/10W 100 ohm
R303	119-3311-15	1/10W 330 ohm	R407	116-3311-15	1/4W 330 ohm	R560	119-1031-15	1/10W 10k ohm
R304	119-1021-15	1/10W 1k ohm	R409	119-5601-15	1/10W 56 ohm	R561	119-1031-15	1/10W 10k ohm
R305	119-1021-15	1/10W 1k ohm	R410	119-8211-15	1/10W 820 ohm	R562	119-1031-15	1/10W 10k ohm
R306	119-3311-15	1/10W 330 ohm	R411	119-8211-15	1/10W 820 ohm	R563	119-4731-15	1/10W 47k ohm
R307	119-3311-15	1/10W 330 ohm	R412	119-8211-15	1/10W 820 ohm	R564	119-2231-15	1/10W 22k ohm
R308	119-1021-15	1/10W 1k ohm	R421	119-4731-15	1/10W 47k ohm	R566	119-1031-15	1/10W 10k ohm
R309	119-1021-15	1/10W 1k ohm	R422	119-7501-15	1/10W 75 ohm	R567	119-1031-15	1/10W 10k ohm
R310	119-3311-15	1/10W 330 ohm	R423	119-7501-15	1/10W 75 ohm	R568	119-2241-15	1/10W 220k ohm

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R569	119-4741-15	1/10W 470k ohm	R631	119-3321-15	1/10W 3.3k ohm	R730	119-4731-15	1/10W 47k ohm
R570	119-1041-15	1/10W 100k ohm	R632	119-1031-15	1/10W 10k ohm	R731	119-4731-15	1/10W 47k ohm
R571	119-1041-15	1/10W 100k ohm	R634	119-4721-15	1/10W 4.7k ohm	R732	119-4731-15	1/10W 47k ohm
R572	119-1041-15	1/10W 100k ohm	R637	116-1521-15	1/4W 1.5k ohm	R734	119-4731-15	1/10W 47k ohm
R573	032-0140-66	1/10W 220 ohm F	R638	119-3321-15	1/10W 3.3k ohm	R735	119-1031-15	1/10W 10k ohm
R574	119-1041-15	1/10W 100k ohm	R639	119-2231-15	1/10W 22k ohm	R736	033-0000-05	1/16W 0 ohm
R575	119-4731-15	1/10W 47k ohm	R640	119-4731-15	1/10W 47k ohm	R737	119-1021-15	1/10W 1k ohm
R576	119-1031-15	1/10W 10k ohm	R641	119-1031-15	1/10W 10k ohm	R739	119-0000-05	1/10W 0 ohm JW
R577	119-1031-15	1/10W 10k ohm	R642	119-1011-15	1/10W 100 ohm	R740	033-4731-15	1/16W 47k ohm J
R578	119-5621-15	1/10W 5.6k ohm	R643	119-4721-15	1/10W 4.7k ohm	R741	033-1041-15	1/16W 100k ohm J
R579	119-3331-15	1/10W 33k ohm	R644	119-3321-15	1/10W 3.3k ohm	R742	033-1031-15	1/16W 10k ohm J
R580	032-0140-03	1/10W 220k ohm F	R645	119-0000-05	1/10W 0 ohm JW	R743	033-0000-05	1/16W 0 ohm
R581	119-1041-15	1/10W 100k ohm	R647	116-6801-15	1/4W 68 ohm	R744	033-2211-15	1/16W 220 ohm J
R582	032-0140-67	1/10W 3.3k ohm F	R648	119-0000-05	1/10W 0 ohm JW	R747	033-0000-05	1/16W 0 ohm
R583	119-4721-15	1/10W 4.7k ohm	R687	119-2201-15	1/10W 22 ohm	R748	033-2211-15	1/16W 220 ohm J
R584	119-4721-15	1/10W 4.7k ohm	R688	119-0000-05	1/10W 0 ohm JW	R749	119-2211-15	1/10W 220 ohm
R585	119-1031-15	1/10W 10k ohm	R689	119-1211-15	1/10W 120 ohm	R750	119-2211-15	1/10W 220 ohm
R586	119-1051-15	1/10W 1M ohm	R690	119-1211-15	1/10W 120 ohm	R751	032-0140-88	1/10W 100k ohm F
R587	032-0140-16	1/10W 180k ohm F	R691	119-4721-15	1/10W 4.7k ohm	R752	033-0000-05	1/16W 0 ohm
R589	032-0140-03	1/10W 220k ohm F	R692	119-4731-15	1/10W 47k ohm	R753	033-1041-15	1/16W 100k ohm J
R590	032-0140-52	1/10W 33k ohm F	R693	116-3301-15	1/4W 33 ohm	R754	033-1041-15	1/16W 100k ohm J
R591	032-0140-56	1/10W 12k ohm F	R694	116-3301-15	1/4W 33 ohm	R755	033-1031-15	1/16W 10k ohm J
R592	119-1031-15	1/10W 10k ohm	R695	116-3301-15	1/4W 33 ohm	R756	032-0163-96	1/2W 27 ohm J
R593	119-1031-15	1/10W 10k ohm	R696	116-5601-15	1/4W 56 ohm	R757	032-0163-96	1/2W 27 ohm J
R594	119-1031-15	1/10W 10k ohm	R697	116-5601-15	1/4W 56 ohm	R758	119-4731-15	1/10W 47k ohm
R595	119-1031-15	1/10W 10k ohm	R698	116-5601-15	1/4W 56 ohm	R759	033-1031-15	1/16W 10k ohm J
R597	119-1031-15	1/10W 10k ohm	R699	116-3301-15	1/4W 33 ohm	R760	033-5621-15	1/16W 5.6k ohm J
R599	119-1031-15	1/10W 10k ohm	R701	033-2211-15	1/16W 220 ohm J	R761	119-1031-15	1/10W 10k ohm
R601	119-4731-15	1/10W 47k ohm	R702	033-2211-15	1/16W 220 ohm J	R762	119-1531-15	1/10W 15k ohm
R602	119-4731-15	1/10W 47k ohm	R703	033-2211-15	1/16W 220 ohm J	R763	119-1531-15	1/10W 15k ohm
R603	119-1221-15	1/10W 1.2k ohm	R704	033-4721-15	1/16W 4.7k ohm J	R765	119-0000-05	1/10W 0 ohm JW
R604	119-1231-15	1/10W 12k ohm	R705	033-4721-15	1/16W 4.7k ohm J	R766	119-8211-15	1/10W 820 ohm
R605	119-3331-15	1/10W 33k ohm	R706	033-2211-15	1/16W 220 ohm J	R767	119-8211-15	1/10W 820 ohm
R606	119-4721-15	1/10W 4.7k ohm	R707	033-1031-15	1/16W 10k ohm J	R768	119-8211-15	1/10W 820 ohm
R607	119-4731-15	1/10W 47k ohm	R708	033-1221-15	1/16W 1.2k ohm J	R771	033-0000-05	1/16W 0 ohm
R608	119-1031-15	1/10W 10k ohm	R709	033-0000-05	1/16W 0 ohm	R772	033-0000-05	1/16W 0 ohm
R609	032-0140-50	1/10W 10k ohm F	R712	033-2211-15	1/16W 220 ohm J	R775	119-0000-05	1/10W 0 ohm JW
R610	119-4731-15	1/10W 47k ohm	R713	033-2211-15	1/16W 220 ohm J	R998	119-0000-05	1/10W 0 ohm JW
R611	119-1031-15	1/10W 10k ohm	R714	033-2221-15	1/16W 2.2k ohm J	SUP201	060-8057-90	CSA20-141N-T
R612	119-2231-15	1/10W 22k ohm	R715	033-1051-15	1/16W 1M ohm J	TH501	002-0315-00	TN10-3U153JT
R613	119-4711-15	1/10W 470 ohm	R716	033-2211-15	1/16W 220 ohm J	TM101	073-0785-90	TERMINAL
R614	119-6821-15	1/10W 6.8k ohm	R717	119-1031-15	1/10W 10k ohm	TM102	073-0785-90	TERMINAL
R615	116-1591-15	1/4W 1.5 ohm	R718	119-2211-15	1/10W 220 ohm	X101	061-3031-00	4.00MHz
R616	116-1591-15	1/4W 1.5 ohm	R719	119-2211-15	1/10W 220 ohm	X501	061-3560-90	3.145728MHz AT-41CD2
R618	119-1031-15	1/10W 10k ohm	R720	119-2211-15	1/10W 220 ohm	X503	060-0100-71	HAS-RP2-14-41-11
R619	116-1591-15	1/4W 1.5 ohm	R721	119-1041-15	1/10W 100k ohm	X701	061-3534-90	16.92MHz
R620	116-1591-15	1/4W 1.5 ohm	R722	033-1041-15	1/16W 100k ohm J	X702	061-3568-90	32.768kHz
R624	119-1031-15	1/10W 10k ohm	R724	119-1811-15	1/10W 180 ohm	X703	061-3559-90	9.000MHz
R625	119-4711-15	1/10W 470 ohm	R725	119-1031-15	1/10W 10k ohm	PWB	039-3461-01	PWB(WITHOUT COMPONENT)
R626	116-1221-15	1/4W 1.2k ohm	R726	033-2211-15	1/16W 220 ohm J			
R627	119-5621-15	1/10W 5.6k ohm	R727	033-2211-15	1/16W 220 ohm J			
R628	119-5621-15	1/10W 5.6k ohm	R728	033-2211-15	1/16W 220 ohm J			
R630	116-1221-15	1/4W 1.2k ohm	R729	033-1021-15	1/16W 1k ohm J			

D/D PWB(B3) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C750	168-2232-55	0.022uF K	C769	168-3332-78	0.033uF K	C788	043-6401-90	16V 10uF
C751	168-2232-55	0.022uF K	C770	043-6401-90	16V 10uF	C789	043-6401-90	16V 10uF
C752	166-4701-50	47pF CH	C771	043-6401-90	16V 10uF	C790	043-6401-90	16V 10uF
C753	168-3322-55	3300pF K	C772	043-6401-90	16V 10uF	C791	168-3332-78	0.033uF K
C754	166-3301-50	33pF CH	C773	043-0554-90	25V 10uF	C792	168-1022-55	1000pF K
C755	168-2222-55	2200pF K	C774	043-0554-90	25V 10uF	C793	168-1022-55	1000pF K
C756	168-1522-55	1500pF K	C775	168-2232-55	0.022uF K	C794	168-3332-78	0.033uF K
C757	043-0574-90	25V 1.0uF	C776	168-2232-55	0.022uF K	C795	043-6401-90	16V 10uF
C758	168-1522-55	1500pF K	C777	166-3301-50	33pF CH	C796	043-6401-90	16V 10uF
C759	043-6400-90	16V 4.7uF K	C778	168-2222-55	2200pF K	C797	043-6401-90	16V 10uF
C760	043-6400-90	16V 4.7uF K	C779	166-3301-50	33pF CH	C798	043-0554-90	25V 10uF
C763	043-6401-90	16V 10uF	C780	168-2222-55	2200pF K	C799	043-0554-90	25V 10uF
C764	043-6401-90	16V 10uF	C781	168-1022-55	1000pF K	IC750	051-3569-90	BD9017KV-E2
C765	043-6401-90	16V 10uF	C782	043-0574-90	25V 1.0uF	IC751	051-3569-90	BD9017KV-E2
C766	168-3332-78	0.033uF K	C783	166-8211-50	820pF CH	J750	074-0881-20	20P
C767	168-1022-55	1000pF K	C784	043-6400-90	16V 4.7uF K	L750	010-3500-92	10uH
C768	168-1022-55	1000pF K	C785	043-6400-90	16V 4.7uF K	L751	010-3408-61	22uH M

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
L752	010-3408-61	22uH M	R755	119-6221-15	1/10W 6.2k ohm	R779	032-0140-50	1/10W 10k ohm F
L753	010-3500-92	10uH	R756	032-0140-89	1/10W 47k ohm F	R780	119-3311-15	1/10W 330 ohm
L754	010-3108-53	330 ohm/100MHz	R757	032-0140-56	1/10W 12k ohm F	R781	032-0140-05	1/10W 82k ohm F
L755	010-3108-53	330 ohm/100MHz	R758	119-2711-15	1/10W 270 ohm	R782	119-5611-15	1/10W 560 ohm
L756	010-3108-54	600 ohm/100MHz	R759	032-0140-22	1/10W 68k ohm F	R783	119-1001-15	1/10W 10 ohm
L757	010-3108-53	330 ohm/100MHz	R760	119-3011-15	1/10W 300 ohm	R784	119-1001-15	1/10W 10 ohm
L758	010-3108-53	330 ohm/100MHz	R761	119-1001-15	1/10W 10 ohm	R787	119-1011-15	1/10W 100 ohm
L759	010-3108-54	600 ohm/100MHz	R762	119-1001-15	1/10W 10 ohm	R788	119-1011-15	1/10W 100 ohm
Q750	125-2041-93	RT1N241M	R765	119-1011-15	1/10W 100 ohm	R791	032-0217-50	1/3W 0.056 ohm
Q751	125-8029-90	SP8K23 TB	R766	119-1011-15	1/10W 100 ohm	R793	032-0217-51	1/3W 0.039 ohm
Q752	125-8029-90	SP8K23 TB	R769	032-0217-52	1/3W 0.082 ohm	R794	032-0140-90	1/10W 560 ohm F
Q753	125-2041-93	RT1N241M	R771	032-0217-51	1/3W 0.039 ohm	R795	032-0140-76	1/10W 9.1k ohm F
Q754	125-8029-90	SP8K23 TB	R772	032-0140-76	1/10W 9.1k ohm F	R796	032-0140-67	1/10W 3.3k ohm F
Q755	125-8029-90	SP8K23 TB	R773	032-0140-00	1/10W 56k ohm F	R797	032-0140-67	1/10W 3.3k ohm F
R750	032-0140-76	1/10W 9.1k ohm F	R774	119-4741-15	1/10W 470k ohm	R802	032-0140-75	1/10W 1.5k ohm F
R751	032-0140-00	1/10W 56k ohm F	R775	119-6221-15	1/10W 6.2k ohm	R803	032-0140-90	1/10W 560 ohm F
R752	119-4741-15	1/10W 470k ohm	R776	032-0140-56	1/10W 12k ohm F	PWB	039-3462-00	PWB(WITHOUT COMPONENT)
R753	119-3021-15	1/10W 3k ohm	R777	119-4721-15	1/10W 4.7k ohm			
R754	032-0140-08	1/10W 13k ohm F	R778	032-0140-22	1/10W 68k ohm F			

Slide PWB(B4) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C5603	168-1042-78	16V 0.1uF K	P5603	076-0478-52	2P	PWB	039-3501-00	PWB(WITHOUT COMPONENT)
IC5604	051-5806-01	GP1S93	R5603	119-3311-15	1/10W 330 ohm			
IC5606	051-5806-01	GP1S93	R5621	116-5611-15	1/4W 560 ohm			
J5001	074-2225-58	8P	R5625	116-5611-15	1/4W 560 ohm			