



TK-260G/270G

EXPLODED VIEW (TK-270G)

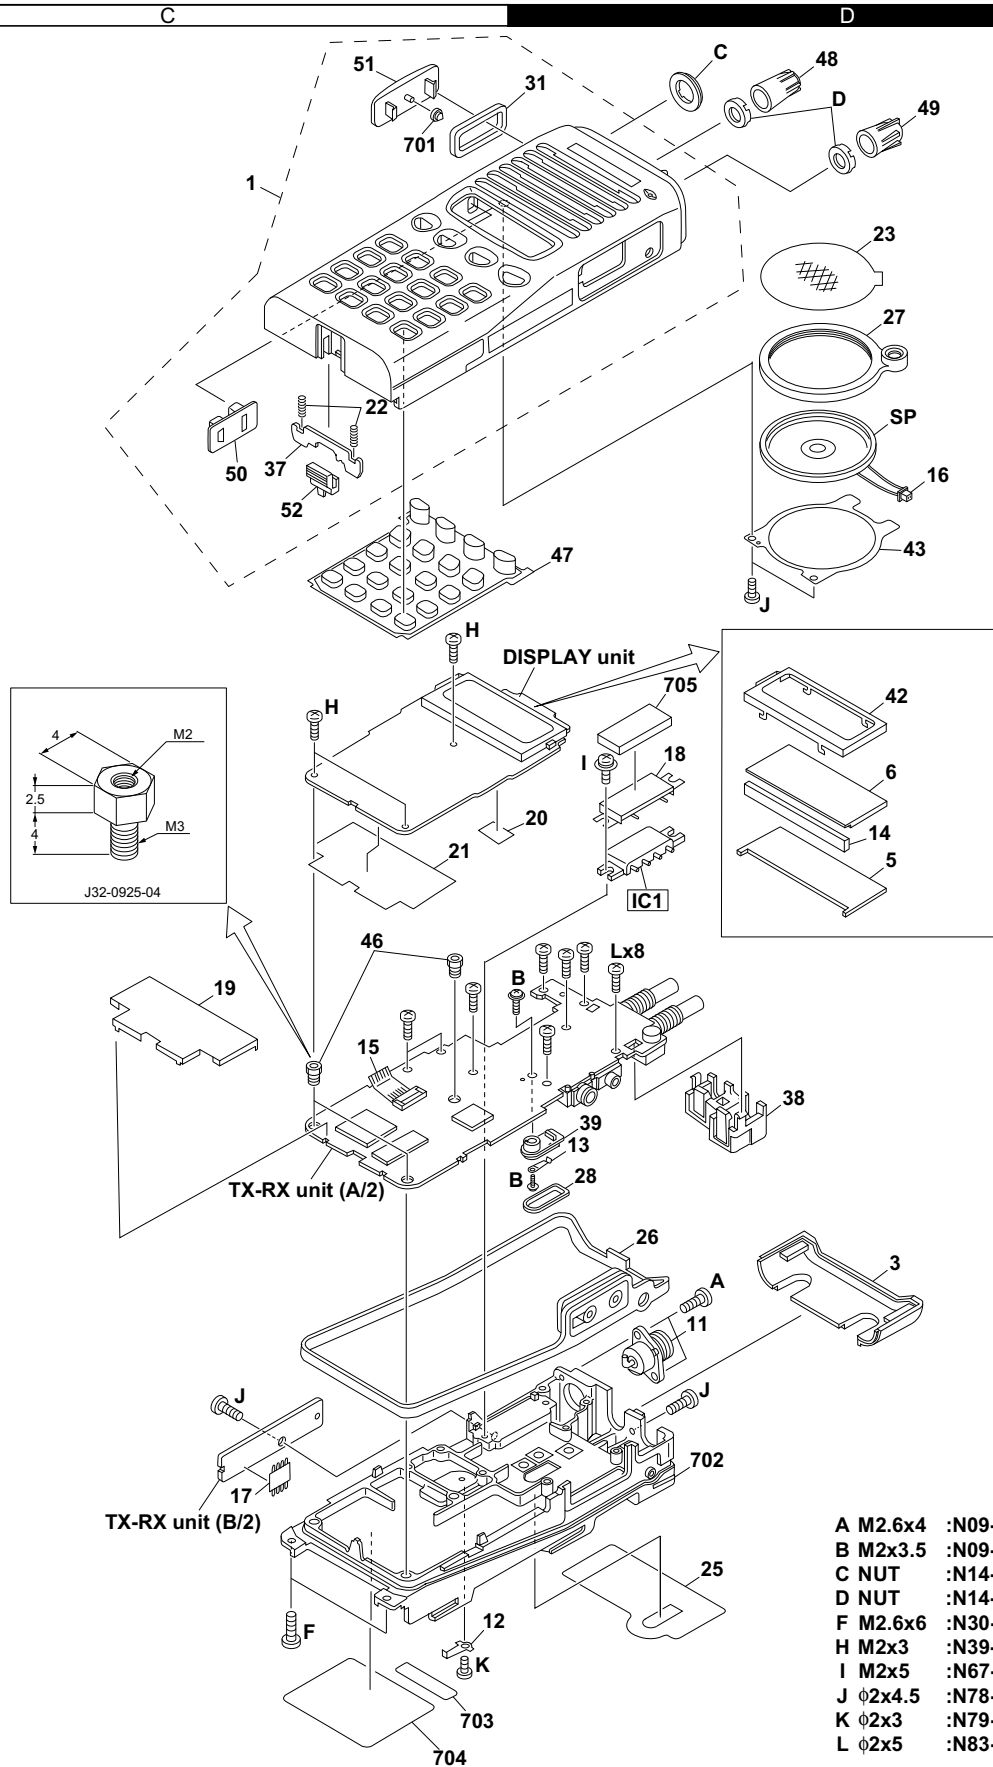

PACKING

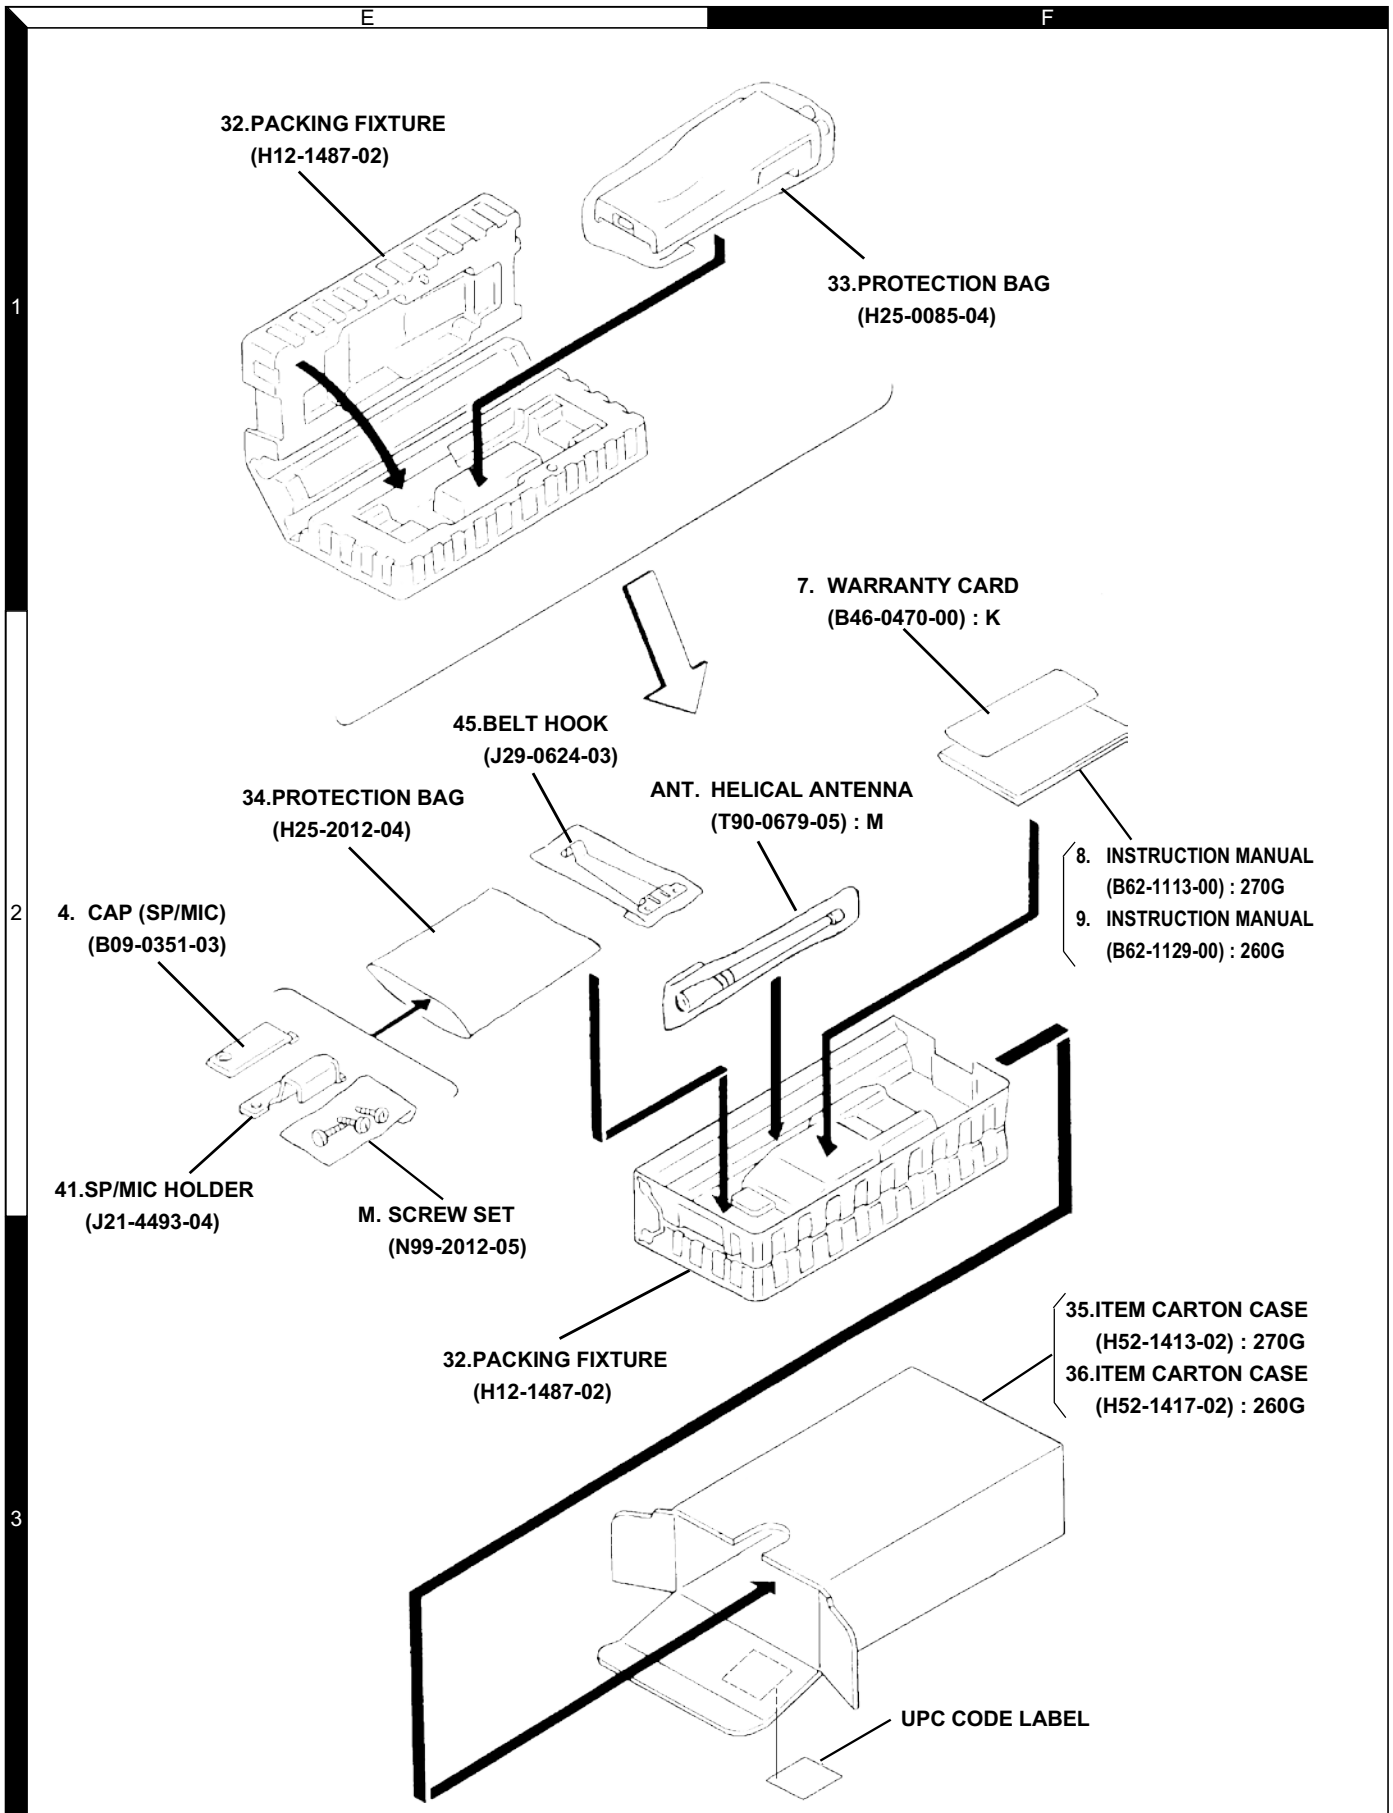

TK-260G/270G

PARTS LIST

* New Parts.  indicates safety critical components.
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

L: Scandinavia
Y: PX (Far East, Hawaii)
Y: AAFES (Europe)
K: USA
T: England
X: Australia
P: Canada
E: Europe
M: Other Areas

TK-260G/270G

Ref. No.	Address	New parts	Parts No.	Description	Destination
TK-260G/270G					
1	1C	*	A02-2385-23	CABINET ASSY	270G
2	1A	*	A02-2391-23	CABINET ASSY	260G
3	3B,3D	*	A82-0036-02	REAR PANEL	
4	2E		B09-0351-03	CAP(SP/MIC)	
5	2D		B11-1220-03	ILLUMINATION GUIDE	
6	2D	*	B38-0820-05	LCD	270G
7	2F		B46-0470-00	WARRANTY CARD	K
8	2F	*	B62-1113-00	INSTRUCTION MANUAL	270G
9	2F	*	B62-1129-00	INSTRUCTION MANUAL	260G
10	1B	*	D32-0423-05	STOPPER	260G
11	3B,3D		E04-0413-05	RF COAXIAL RECEPTACLE(SMA)	
12	3A,3C		E23-1006-04	RELAY TERMINAL(BATT -)	
13	2A,2D	*	E23-1125-14	RELAY TERMINAL(BATT +)	
14	2D	*	E29-1177-04	INTER CONNECTOR(LCD)	270G
15	2C	*	E37-0805-05	FLAT CABLE(TX/RX-DISP)	270G
16	2B,1D	*	E37-0829-05	SPEAKER LEAD ASSY	
17	3A,3C	*	E37-0830-05	FLAT CABLE(PTT)	
18	2A,2D	*	F10-2302-04	SHIELDING COVER(POWER MODULE)	
19	2A,2C	*	F10-2304-03	SHIELDING COVER(TX/RX UNIT)	
20	2C	*	F20-3307-04	INSULATING SHEET(TX/RX UNIT)	270G
21	2C	*	F20-3308-04	INSULATING SHEET(TX/RX UNIT)	270G
22	1A,1C		G01-0881-04	COIL SPRING(BATT RELEASE)	
23	1D	*	G10-1232-04	FIBROUS SHEET(SPEAKER)	270G
24	1A	*	G10-1233-04	FIBROUS SHEET(SPEAKER)	260G
25	3B,3D	*	G13-1744-14	CUSHION(CHASSIS-BATT)	
26	3A,3D	*	G53-0881-02	PACKING(SIDE)	
27	1D	*	G53-0882-03	PACKING(SPEAKER/ECM)	270G
28	2A,2D	*	G53-0883-04	PACKING(BATT TERMINAL)	
29	1B	*	G53-0884-04	PACKING(ECM)	260G
30	1A	*	G53-0885-04	PACKING(SPEAKER)	260G
31	1A,1C	*	G53-0891-04	PACKING(PTT KNOB)	
32	1E,2F		H12-1487-02	PACKING FIXTURE	
33	1F		H25-0085-04	PROTECTION BAG (100/200/0.07)	
34	2E		H25-2012-04	PROTECTION BAG (75/100/0.08)	
35	3F	*	H52-1413-02	ITEM CARTON CASE	270G
36	3F	*	H52-1417-02	ITEM CARTON CASE	260G
37	1A,1C		J19-1572-04	HOLDER(BATT RELEASE)	
38	2D	*	J19-5352-03	HOLDER(VOL/ENC)	270G
39	2A,2D	*	J19-5353-14	HOLDER(BATT TERMINAL)	
40	2B	*	J19-5355-03	HOLDER(VOL/CHANNEL SW)	260G
41	2E		J21-4493-04	SP/MIC HOLDER	
42	2D	*	J21-8377-03	LCD HOLDER	270G
43	1D	*	J21-8378-04	SPEAKER FIXTURE	270G
44	2A	*	J21-8381-14	SPEAKER FIXTURE	260G
45	2E		J29-0624-03	BELT HOOK	
46	2C	*	J32-0925-04	HEXAGON BOSS	270G
47	1C	*	K29-5330-02	KEY TOP(DTMF)	270G
48	1D	*	K29-5331-03	KNOB(ENCODER)	270G
49	1B,1D	*	K29-5332-03	KNOB(VOLUME)	

Ref. No.	Address	New parts	Parts No.	Description	Destination
50	1A,1C	*	K29-5333-13	BUTTON KNOB(MONI/LAMP)	
51	1A,1C	*	K29-5334-13	BUTTON KNOB(PTT)	
52	1A,1C		K29-5337-03	LEVER KNOB(BATT RELEASE)	
53	1B	*	K29-5341-03	KNOB(CHANNEL SELCTOR)	260G
A	3B,3D		N09-2319-05	BINDING HEAD SCREW	
B	2A,2D	*	N09-2331-05	SPECIAL SCREW	
C	1B,1D		N14-0582-14	CIRCULAR NUT	
D	1B,1D		N14-0583-04	CIRCULAR NUT	
E	1B	*	N14-0588-04	CIRCULAR NUT	260G
F	3A,3C		N30-2606-46	PAN HEAD MACHINE SCREW	
G	2A		N30-3004-46	PAN HEAD MACHINE SCREW	260G
H	2C		N39-2030-46	PAN HEAD MACHINE SCREW	270G
I	2A,2D	*	N67-2005-46	PAN HEAD SEMS SCREW W	
J	3A,3C	*	N78-2045-46	PAN HEAD TAPTITE SCREW	
K	3A,3C	*	N79-2030-46	PAN HEAD TAPTITE SCREW	
L	2A,2C,2D		N83-2005-46	PAN HEAD TAPTITE SCREW	
M	2E	*	N99-2012-05	SCREW SET	
VR2	-	*	R31-0628-15	VARIABLE RESISTOR	
S1	-	*	S60-0413-05	ROTARY SWITCH	260G
SP	1D		T07-0326-05	SPEAKER	270G
SP	2A		T07-0327-05	SPEAKER	260G
ANT	-		T90-0679-05	HELICAL ANTENNA	M
S1	-	*	W02-1969-05	ENCODER	270G
DISPLAY UNIT (X54-3250-10) (TK-270G only)					
D506			B30-2210-05	LED(LCD BACK LIGHT)	
D508-510			B30-2171-05	LED(KEY BACK LIGHT)	
D511			B30-2210-05	LED(LCD BACK LIGHT)	
D512-516			B30-2171-05	LED(KEY BACK LIGHT)	
C501-509			CC73GCH1H221J	CHIP C 220PF J	
C513			CK73GB1H102K	CHIP C 1000PF K	
C515,516			CC73GCH1H101J	CHIP C 100PF J	
CN501		*	E40-6012-05	FLAT CABLE CONNECTOR	
L501,502			L92-0138-05	FERRITE CHIP	
CP501			R90-0748-05	MULTI-COMP 47K X4	
CP502,503			R90-0724-05	MULTI-COMP 1K X4	
R501-510			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R511			R92-1252-05 0	CHIP R 0 OHM	
R512			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R513-515			RK73GB1J103J	CHIP R 10K J 1/16W	
R516			RK73GB1J473J	CHIP R 47K J 1/16W	
R517			RK73GB1J103J	CHIP R 10K J 1/16W	
R518			RK73GB1J471J	CHIP R 470 J 1/16W	
R519-522			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R523			RK73GB1J473J	CHIP R 47K J 1/16W	
R524			RK73GB1J471J	CHIP R 470 J 1/16W	
D501-504			MA2S111	DIODE	
D505			1SS373	DIODE	

PARTS LIST

TX-RX UNIT (X57-5870-10)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
D507			MA2S111	DIODE		C82			CK73GB1H102K	CHIP C 1000PF K	
IC501			LC75823W	IC(MOS-IC)		C84 ,85			CK73GB1H102K	CHIP C 1000PF K	
Q501			2SB1132(Q,R)	TRANSISTOR		C86 ,87			CC73GCH1H100D	CHIP C 10PF D	
Q502			2SC4617(S)	TRANSISTOR		C88			CC73GCH1H1R5B	CHIP C 1.5PF B	
						C89			CC73GCH1H050B	CHIP C 5.0PF B	
TX-RX UNIT (X57-5870-XX) -10:TK-260G K,M -11:TK-270G K -21:TK-270G M						C90			C92-0560-05	CHIP-TAN 10UF 6.3WV	
D18			B30-2019-05	LED(RED/GRN)		C94			C92-0560-05	CHIP-TAN 10UF 6.3WV	
C1			CK73GB1H471K	CHIP C 470PF K		C95 ,96			CK73GB1H102K	CHIP C 1000PF K	
C3,4			CC73GCH1H070B	CHIP C 7.0PF B		C98			C92-0560-05	CHIP-TAN 10UF 6.3WV	
C5			CC73GCH1H100C	CHIP C 10PF C		C99			CK73GB1C104K	CHIP C 0.10UF K	
C6			CK73GB1C104K	CHIP C 0.10UF K		C100			C92-0507-05	CHIP-TAN 4.7UF 6.3WV	
C8			CC73GCH1H030B	CHIP C 3.0PF B		C101			CK73GB1H102K	CHIP C 1000PF K	
C9 ,10			CK73GB1H102K	CHIP C 1000PF K		C104			CK73GB1H102K	CHIP C 1000PF K	
C11 ,12			CC73GCH1H180J	CHIP C 18PF J		C107,108			CK73GB1C104K	CHIP C 0.10UF K	
C13			CK73GB1H102K	CHIP C 1000PF K		C109			C92-0560-05	CHIP-TAN 10UF 6.3WV	
C14			CC73GCH1H010B	CHIP C 1.0PF B		C110			CK73GB1H103K	CHIP C 0.010UF K	
C16		*	CC73GCH1H150G	CHIP C 15PF G		C111			CK73GB1H102K	CHIP C 1000PF K	
C17			CC73GCH1H060B	CHIP C 6.0PF B		C112			CC73GCH1H020B	CHIP C 2.0PF B	
C18			CC73GCH1H330G	CHIP C 33PF G		C113			CK73GB1H471K	CHIP C 470PF K	
C22			CC73GCH1H101J	CHIP C 100PF J		C114			CC73GCH1H221J	CHIP C 220PF J	
C23			CC73GCH1H220G	CHIP C 22PF G		C115			CK73GB1C104K	CHIP C 0.10UF K	
C24			CC73GCH1H160G	CHIP C 16PF G		C118			CK73GB1H102K	CHIP C 1000PF K	
C25			CC73GCH1H130G	CHIP C 13PF G		C119			CK73FB1A105K	CHIP C 1.0UF K	
C27			CC73GCH1H0R5B	CHIP C 0.5PF B		C120,121			CK73GB1H102K	CHIP C 1000PF K	
C28			CC73GCH1H040C	CHIP C 4.0PF C		C122			CK73FB1A105K	CHIP C 1.0UF K	
C30			CC73GCH1H100D	CHIP C 10PF D		C123			CC73GCH1H221J	CHIP C 220PF J	
C31			C92-0507-05	CHIP-TAN 4.7UF 6.3WV		C124			CC73GCH1H100D	CHIP C 10PF D	
C32			CK73GB1C104K	CHIP C 0.10UF K		C125,126			CK73GB1H103K	CHIP C 0.010UF K	
C33			CC73GCH1H050B	CHIP C 5.0PF B		C128			CC73GCH1H040C	CHIP C 4.0PF C	
C35 -37			CK73GB1H102K	CHIP C 1000PF K		C129			CC73GCH1H020C	CHIP C 2.0PF C	
C40 ,41			CK73GB1H102K	CHIP C 1000PF K		C130			CK73GB1H471K	CHIP C 470PF K	
C42 -44			CC73GCH1H101J	CHIP C 100PF J		C131			CC73GCH1H100D	CHIP C 10PF D	
C45			CK73GB1H471K	CHIP C 470PF K		C132			CK73GB1H103K	CHIP C 0.010UF K	
C48 ,49			C92-0001-05	CHIP-C 0.1UF 35WV		C133			CC73GCH1H820J	CHIP C 82PF J	
C51			C92-0514-05	CHIP-TAN 2.2UF 10WV		C135			CK73GB1H103K	CHIP C 0.010UF K	
C52			CC73GCH1H390J	CHIP C 39PF J		C136			CC73GCH1H100D	CHIP C 10PF D	
C53			CK73GB1H102K	CHIP C 1000PF K		C137			CK73GB1H102K	CHIP C 1000PF K	
C54			CK73FB1C474K	CHIP C 0.47UF K		C138			CK73GB1C104K	CHIP C 0.10UF K	
C55			CK73GB1H102K	CHIP C 1000PF K		C139			CC73GCH1H181J	CHIP C 180PF J	
C57			CK73FB1C474K	CHIP C 0.47UF K		C140			CK73GB1H103K	CHIP C 0.010UF K	
C58			CK73GB1H103K	CHIP C 0.010UF K		C141			CK73GB1C104K	CHIP C 0.10UF K	
C60			CK73GB1H103K	CHIP C 0.010UF K		C142			CK73FB1A105K	CHIP C 1.0UF K	
C62			CC73GCH1H221J	CHIP C 220PF J		C143,144			CK73GB1H102K	CHIP C 1000PF K	
C63			CC73GCH1H050B	CHIP C 5.0PF B		C146,147			CK73GB1C104K	CHIP C 0.10UF K	
C64			CC73GCH1H010B	CHIP C 1.0PF B		C148			CK73GB1H103K	CHIP C 0.010UF K	
C68			C92-0565-05	CHIP-TAN 6.8UF 10WV		C150-153			CK73GB1H102K	CHIP C 1000PF K	
C70			CK73GB1H103K	CHIP C 0.010UF K		C155			C92-0662-05	CHIP-TAN 15UF 6.3WV	
C71			CC73GCH1H101J	CHIP C 100PF J		C156,157			CK73GB1H102K	CHIP C 1000PF K	
C72			CC73GCH1H060B	CHIP C 6.0PF B		C158			CK73FB1A105K	CHIP C 1.0UF K	
C73			CK73GB1H102K	CHIP C 1000PF K		C159			CK73GB1H102K	CHIP C 1000PF K	
C74			CK73FB1E104K	CHIP C 0.10UF K		C161			CK73GB1H102K	CHIP C 1000PF K	
C75 ,76			CK73GB1H102K	CHIP C 1000PF K		C162			CK73GB1H103K	CHIP C 0.010UF K	
C78			CC73GCH1H470J	CHIP C 47PF J		C163,164			CK73GB1H102K	CHIP C 1000PF K	
C81			CC73GCH1H010C	CHIP C 1.0PF C		C165			CK73GB1H103K	CHIP C 0.010UF K	
						C166			CK73FF1E104Z	CHIP C 0.10UF Z	
						C167			CK73GB1H102K	CHIP C 1000PF K	
						C170,171			CK73GB1H471K	CHIP C 470PF K	

260G : TK-260G (K),(M)

M : TK-260G(M),TK-270G(M)

270G : TK-270G (K),(M)

K : TK-260G(K),TK-270G(K)

TK-260G/270G

PARTS LIST

TX-RX UNIT (X57-5870-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
C173			C92-0567-05	CHIP-TAN 68UF 6.3WV		C247			CK73GB1E123K	CHIP C 0.012UF K	
C174			CK73GB1H102K	CHIP C 1000PF K		C248			CK73GB1H103K	CHIP C 0.010UF K	
C176			CC73GCH1H101J	CHIP C 100PF J		C249			CK73GB1H222K	CHIP C 2200PF K	
C177			CK73GB1C473K	CHIP C 0.047UF K		C250			CK73GB1C683K	CHIP C 0.068UF K	
C178			C92-0560-05	CHIP-TAN 10UF 6.3WV		C251			CK73GB1C104K	CHIP C 0.10UF K	
C179			CK73GB1C104K	CHIP C 0.10UF K		C252			CK73GB1C473K	CHIP C 0.047UF K	
C180			CK73GB1H103K	CHIP C 0.010UF K		C253,254			CK73GB1H103K	CHIP C 0.010UF K	
C181			CK73GB1C393K	CHIP C 0.039UF K		C255			CK73GB1H183K	CHIP C 0.018UF K	
C182			CK73GB1H102K	CHIP C 1000PF K		C257			CK73GB1E153K	CHIP C 0.015UF K	
C183,184			CK73GB1C104K	CHIP C 0.10UF K		C258			CK73GB1C333K	CHIP C 0.033UF K	
C185			CC73GCH1H180J	CHIP C 18PF J		C259			CC73GCH1H121J	CHIP C 120PF J	
C189			CK73GB1H103K	CHIP C 0.010UF K		C260			CK73GB1H183K	CHIP C 0.018UF K	
C190,191			CK73GB1C104K	CHIP C 0.10UF K		C261			CK73GB1E153K	CHIP C 0.015UF K	
C192,193			CC73GCH1H300J	CHIP C 30PF J		C262			CK73GB1H102K	CHIP C 1000PF K	
C194			C92-0507-05	CHIP-TAN 4.7UF 6.3WV		C263			CK73GB1C104K	CHIP C 0.10UF K	
C196			CC73GCH1H101J	CHIP C 100PF J		C265,266			CK73GB1C104K	CHIP C 0.10UF K	
C198,199			CK73GB1H103K	CHIP C 0.010UF K		C268			CK73GB1H102K	CHIP C 1000PF K	
C200			CK73GB1A224K	CHIP C 0.22UF K		C269			CK73GB1H152K	CHIP C 1500PF K	
C201			CK73GB1H103K	CHIP C 0.010UF K		C270			CK73GB1H222K	CHIP C 2200PF K	
C202,203			CK73GB1C104K	CHIP C 0.10UF K		C271			CK73GB1H102K	CHIP C 1000PF K	
C204			CK73FB1C474K	CHIP C 0.47UF K		C301			CK73GB1C104K	CHIP C 0.10UF K	
C205			CK73GB1H103K	CHIP C 0.010UF K		C303			CK73GB1H102K	CHIP C 1000PF K	
C206-208			CK73GB1C104K	CHIP C 0.10UF K		C305			CK73GB1H102K	CHIP C 1000PF K	
C209			CK73GB1H332K	CHIP C 3300PF K		C307			CC73GCH1H100D	CHIP C 10PF D	
C210			CK73GB1H102K	CHIP C 1000PF K		C308			CK73GB1H102K	CHIP C 1000PF K	
C211			C92-0507-05	CHIP-TAN 4.7UF 6.3WV		C310			CC73GCH1H220G	CHIP C 22PF G	
C212			CK73GB1H122K	CHIP C 1200PF K		C311		*	CC73GCH1H180G	CHIP C 18PF G	
C213			CK73GB1H103K	CHIP C 0.010UF K		C312			CC73GCH1H220J	CHIP C 22PF J	
C215			CK73GB1C104K	CHIP C 0.10UF K		C316			CC73GCH1H390J	CHIP C 39PF J	
C216			CK73GB1H332K	CHIP C 3300PF K		C317,318			CK73GB1H102K	CHIP C 1000PF K	
C217			CK73GB1E153K	CHIP C 0.015UF K		C319			CC73GCH1H390J	CHIP C 39PF J	
C218			CK73FB1H563K	CHIP C 0.056UF K		C320			CK73GB1C104K	CHIP C 0.10UF K	
C219,220			CK73GB1C104K	CHIP C 0.10UF K		C323			CK73GB1C104K	CHIP C 0.10UF K	
C221			CK73GB1H471K	CHIP C 470PF K		C324			CC73GCH1H090D	CHIP C 9.0PF D	
C222			CK73GB1H103K	CHIP C 0.010UF K		C326			CK73GB1H102K	CHIP C 1000PF K	
C223			C92-0560-05	CHIP-TAN 10UF 6.3WV		TC1 ,2			C05-0384-05	CERAMIC TRIMMER CAP(10P)	
C224			CK73GB1H122K	CHIP C 1200PF K		CN1		*	E40-6012-05	FLAT CABLE CONNECTOR	270G
C225			CC73GCH1H101J	CHIP C 100PF J		CN3		*	E40-5662-05	PIN ASSY SOCKET	
C226,227			CK73GB1H562K	CHIP C 5600PF K		CN5		*	E40-5932-05	PIN ASSY SOCKET	
C229			CK73FB1H102K	CHIP C 1000PF K		J1			E11-0457-05	PHONE JACK (2.5/3.5)	
C230			CK73GB1H562K	CHIP C 5600PF K		F1			F53-0130-05	FUSE	
C231			C92-0521-05	CHIP-TAN 0.47UF 20WV		CD1			L79-1474-05	TUNING COIL	
C232			CK73GB1H471K	CHIP C 470PF K		CF1		*	L72-0968-05	CERAMIC FILTER	
C233			CC73GCH1H151J	CHIP C 150PF J		CF2		*	L72-0969-05	CERAMIC FILTER	
C234,235			CK73GB1H272K	CHIP C 2700PF K	270G	L2			L92-0138-05	FERRITE CHIP	
C236			CK73GB1C104K	CHIP C 0.10UF K	260G	L3			L40-3391-86	SMALL FIXED INDUCTOR(3.3U)	
C238			CK73GB1H392K	CHIP C 3900PF K		L4			L33-0745-05	SMALL FIXED INDUCTOR	
C239			CK73GB1C104K	CHIP C 0.10UF K		L5			L34-4548-05	AIR-CORE COIL	
C240			CK73GB1H272K	CHIP C 2700PF K		L6			L34-4549-05	AIR-CORE COIL	
C241			CK73GB1H102K	CHIP C 1000PF K		L7		*	L34-4548-05	AIR-CORE COIL	
C242			C92-0560-05	CHIP-TAN 10UF 6.3WV		L9			L40-5675-92	SMALL FIXED INDUCTOR(56NH)	
C243			CK73FB1A105K	CHIP C 1.0UF K		L10			L40-1095-34	SMALL FIXED INDUCTOR(1UH)	
C244			C92-0560-05	CHIP-TAN 10UF 6.3WV		L11			L40-1092-81	SMALL FIXED INDUCTOR	
C245			CK73GB1H471K	CHIP C 470PF K		L12			L40-3391-86	SMALL FIXED INDUCTOR(3.3UH)	
C246			CK73FB1A105K	CHIP C 1.0UF K							

PARTS LIST

TX-RX UNIT (X57-5870-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
L14		*	L40-1085-92	SMALL FIXED INDUCTOR(100NH)		R22			RK73GB1J472J	CHIP R 4.7K J 1/16W	
L15		*	L40-5675-92	SMALL FIXED INDUCTOR(56NH)		R23			RK73GB1J122J	CHIP R 1.2K J 1/16W	
L17			L34-4550-05	AIR-CORE COIL		R26			RK73GB1J561J	CHIP R 560 J 1/16W	
L18 -20			L92-0138-05	FERRITE CHIP		R27			RK73GB1J270J	CHIP R 27 J 1/16W	
L21			L40-1875-92	SMALL FIXED INDUCTOR(18NH)		R28 ,29			RK73GB1J271J	CHIP R 270 J 1/16W	
L22		*	L40-1085-92	SMALL FIXED INDUCTOR(100NH)		R30			RK73GB1J182J	CHIP R 1.8K J 1/16W	
L23			L92-0138-05	FERRITE CHIP		R31			RK73GB1J101J	CHIP R 100 J 1/16W	
L24			L40-5681-86	SMALL FIXED INDUCTOR(0.56UH)		R33			RK73GB1J101J	CHIP R 100 J 1/16W	
L25		*	L40-1085-92	SMALL FIXED INDUCTOR(100NH)		R34			RK73GB1J473J	CHIP R 47K J 1/16W	
L26			L33-0745-05	SMALL FIXED INDUCTOR		R35			RK73GB1J104J	CHIP R 100K J 1/16W	
L27			L92-0149-05	FERRITE CHIP		R36			RK73GB1J473J	CHIP R 47K J 1/16W	
L30		*	L40-2702-86	SMALL FIXED INDUCTOR(27UH)		R37			RK73GB1J472J	CHIP R 4.7K J 1/16W	
L31		*	L40-1085-92	SMALL FIXED INDUCTOR(100NH)		R38			RK73GB1J101J	CHIP R 100 J 1/16W	
L32			L40-1005-85	SMALL FIXED INDUCTOR(10UH)		R39			RK73GB1J562J	CHIP R 5.6K J 1/16W	
L35		*	L40-1285-92	SMALL FIXED INDUCTOR(120NH)		R40			RK73GB1J183J	CHIP R 18K J 1/16W	
L36		*	L40-1085-85	SMALL FIXED INDUCTOR(0.10UH)		R41			RK73GB1J101J	CHIP R 100 J 1/16W	
L37			L40-5685-85	SMALL FIXED INDUCTOR(0.56UH)		R42			RK73GB1J220J	CHIP R 22 J 1/16W	
L38			L92-0138-05	FERRITE CHIP		R43			RK73GB1J101J	CHIP R 100 J 1/16W	
L39			L92-0149-05	FERRITE CHIP		R44			RK73GB1J102J	CHIP R 1.0K J 1/16W	
L40 ,41			L92-0138-05	FERRITE CHIP		R45			RK73GB1J331J	CHIP R 330 J 1/16W	
L42			L92-0131-05	FERRITE CHIP		R46			RN73GH1J154D	CHIP R 150K D 1/16W	
L43 ,44			L92-0138-05	FERRITE CHIP		R47			RK73GB1J104J	CHIP R 100K J 1/16W	
L302			L33-0745-05	SMALL FIXED INDUCTOR		R48			RK73GB1J334J	CHIP R 330K J 1/16W	
L304		*	L40-8288-76	SMALL FIXED INDUCTOR(0.82UH)		R49			RK73GB1J103J	CHIP R 10K J 1/16W	
L305		*	L34-4621-05	COIL		R50			RN73GH1J154D	CHIP R 150K D 1/16W	
L306		*	L34-4622-05	COIL		R51			RK73GB1J102J	CHIP R 1.0K J 1/16W	
L307			L34-4446-05	COIL		R52			RK73GB1J151J	CHIP R 150 J 1/16W	
L308		*	L40-4785-85	SMALL FIXED INDUCTOR(0.47UH)		R53			RK73GB1J472J	CHIP R 4.7K J 1/16W	
X1		*	L77-1794-05	TCXO (16.8MHZ)		R54			RN73GH1J154D	CHIP R 150K D 1/16W	
X2		*	L78-0479-05	RESONATOR (3.58MHZ)		R55			RK73GB1J105J	CHIP R 1.0M J 1/16W	
X3		*	L77-1810-05	CRYSTAL RESONATOR(9.8304MHZ)		R56 -58			RK73EB2ER39K	CHIP R 0.39 K 1/4W	
XF1		*	L71-0546-05	CRYSTAL FILTER (49.95MHZ)		R59			RN73GH1J154D	CHIP R 150K D 1/16W	
CP1			R90-0724-05	MULTI-COMP 1K X4		R60			R92-1252-05	CHIP R 0 OHM	
CP2 -9			R90-0741-05	MULTIPLE RESISTOR		R61			RK73GB1J473J	CHIP R 47K J 1/16W	
CP10			R90-0724-05	MULTI-COMP 1K X4		R62			RN73GH1J154D	CHIP R 150K D 1/16W	
CP11 -18			R90-0741-05	MULTIPLE RESISTOR		R64 ,65			RK73GB1J104J	CHIP R 100K J 1/16W	
CP19			R90-0718-05	MULTI-COMP 4.7K X4		R68			RN73GH1J154D	CHIP R 150K D 1/16W	
CP20		*	RK75HA1J472J	CHIP R 4.7K J 1/16W		R69			RK73GB1J220J	CHIP R 22 J 1/16W	
R1			RK73GB1J124J	CHIP R 120K J 1/16W		R70			RK73GB1J104J	CHIP R 100K J 1/16W	
R2			RK73GB1J104J	CHIP R 100K J 1/16W		R71			RK73GB1J124J	CHIP R 120K J 1/16W	
R3			RK73GB1J682J	CHIP R 6.8K J 1/16W		R72			RK73GB1J103J	CHIP R 10K J 1/16W	
R4			RK73GB1J102J	CHIP R 1.0K J 1/16W		R73			RK73GB1J273J	CHIP R 27K J 1/16W	
R5			RK73GB1J152J	CHIP R 1.5K J 1/16W		R74 ,75			RK73GB1J223J	CHIP R 22K J 1/16W	
R6			R92-1252-05	CHIP R 0 OHM		R76			R92-0670-05	CHIP R 0 OHM	
R7			RK73GB1J100J	CHIP R 10 J 1/16W		R77			R92-1252-05	CHIP R 0 OHM	
R8			RK73GB1J102J	CHIP R 1.0K J 1/16W		R78 ,79			RK73GB1J153J	CHIP R 15K J 1/16W	
R10			RK73GB1J331J	CHIP R 330 J 1/16W		R80 ,81			RK73GB1J223J	CHIP R 22K J 1/16W	
R13			RK73GB1J822J	CHIP R 8.2K J 1/16W		R82			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R14			RK73GB1J561J	CHIP R 560 J 1/16W		R83			RK73GB1J103J	CHIP R 10K J 1/16W	
R16			RK73GB1J391J	CHIP R 390 J 1/16W		R84			RK73GB1J184J	CHIP R 180K J 1/16W	
R17			RK73GB1J103J	CHIP R 10K J 1/16W		R85			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R18			RK73GB1J124J	CHIP R 120K J 1/16W		R86			RK73GB1J124J	CHIP R 120K J 1/16W	
R19			RK73GB1J332J	CHIP R 3.3K J 1/16W		R87			RK73GB1J221J	CHIP R 220 J 1/16W	
R20			RK73GB1J122J	CHIP R 1.2K J 1/16W		R88			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R21			RK73GB1J221J	CHIP R 220 J 1/16W		R89			RK73GB1J821J	CHIP R 820 J 1/16W	
						R90 ,91			RK73GB1J332J	CHIP R 3.3K J 1/16W	

260G : TK-260G (K),(M)

M : TK-260G(M),TK-270G(M)

270G : TK-270G (K),(M)

K : TK-260G(K),TK-270G(K)

TK-260G/270G

PARTS LIST

TX-RX UNIT (X57-5870-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
R92			RK73GB1J100J	CHIP R 10 J 1/16W		R157			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R93			RK73GB1J332J	CHIP R 3.3K J 1/16W		R158			R92-1252-05	CHIP R 0 OHM	
R94			RK73GB1J681J	CHIP R 680 J 1/16W		R159			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R95			RK73GB1J222J	CHIP R 2.2K J 1/16W		R160			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R96			RK73GB1J151J	CHIP R 150 J 1/16W		R161			RK73GB1J563J	CHIP R 56K J 1/16W	
R97			RK73GB1J183J	CHIP R 18K J 1/16W		R162			RN73GH1J333D	CHIP R 33K D 1/16W	
R98			RK73GB1J473J	CHIP R 47K J 1/16W		R163			RN73GH1J274D	CHIP R 270K D 1/16W	
R99			RK73GB1J684J	CHIP R 680K J 1/16W		R164			RK73GB1J184J	CHIP R 180K J 1/16W	
R100			RK73GB1J473J	CHIP R 47K J 1/16W		R165			RK73GB1J473J	CHIP R 47K J 1/16W	
R101			RK73GB1J104J	CHIP R 100K J 1/16W		R166			RK73GB1J103J	CHIP R 10K J 1/16W	
R102,103			RK73GB1J272J	CHIP R 2.7K J 1/16W		R167			RK73GB1J564J	CHIP R 560K J 1/16W	
R104			RK73GB1J472J	CHIP R 4.7K J 1/16W		R168			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R105			RK73GB1J222J	CHIP R 2.2K J 1/16W		R169			RK73GB1J473J	CHIP R 47K J 1/16W	
R106			RK73GB1J272J	CHIP R 2.7K J 1/16W		R170			RK73GB1J394J	CHIP R 390K J 1/16W	
R107			RK73GB1J470J	CHIP R 47 J 1/16W		R171			RK73GB1J474J	CHIP R 470K J 1/16W	
R108			RK73GB1J222J	CHIP R 2.2K J 1/16W		R172			RK73GB1J473J	CHIP R 47K J 1/16W	
R109			RK73GB1J102J	CHIP R 1.0K J 1/16W		R173			RK73GB1J104J	CHIP R 100K J 1/16W	
R110,111			RK73GB1J103J	CHIP R 10K J 1/16W		R174			R92-1252-05	CHIP R 0 OHM	
R112			RK73GB1J102J	CHIP R 1.0K J 1/16W		R175			RK73GB1J103J	CHIP R 10K J 1/16W	
R113			RK73GB1J391J	CHIP R 390 J 1/16W		R176			R92-1252-05	CHIP R 0 OHM	
R114,115			RK73GB1J103J	CHIP R 10K J 1/16W		R177			RK73GB1J473J	CHIP R 47K J 1/16W	
R116,117			RK73GB1J153J	CHIP R 15K J 1/16W		R178,179			RK73GB1J104J	CHIP R 100K J 1/16W	
R118			RK73GB1J473J	CHIP R 47K J 1/16W		R180			RK73GB1J222J	CHIP R 2.2K J 1/16W	
R119			R92-1252-05	CHIP R 0 OHM		R181			RK73GB1J472J	CHIP R 4.7K J 1/16W	
R120,121			RK73GB1J473J	CHIP R 47K J 1/16W		R182,183			R92-1252-05	CHIP R 0 OHM	
R122			RK73GB1J102J	CHIP R 1.0K J 1/16W		R184			RK73GB1J333J	CHIP R 33K J 1/16W	
R123			RK73GB1J104J	CHIP R 100K J 1/16W		R185			RK73GB1J102J	CHIP R 1.0K J 1/16W	
R124			RK73GB1J334J	CHIP R 330K J 1/16W		R186			RK73GB1J155J	CHIP R 1.5M J 1/16W	
R126			RK73GB1J472J	CHIP R 4.7K J 1/16W		R198			RK73GB1J154J	CHIP R 150K J 1/16W	
R127			RK73GB1J333J	CHIP R 33K J 1/16W		R199			RK73GB1J103J	CHIP R 10K J 1/16W	
R128			RK73GB1J102J	CHIP R 1.0K J 1/16W		R200			RK73GB1J101J	CHIP R 100 J 1/16W	
R129			RK73GB1J224J	CHIP R 220K J 1/16W		R201			R92-1252-05	CHIP R 0 OHM	
R130			R92-1252-05	CHIP R 0 OHM		R202			RK73GB1J474J	CHIP R 470K J 1/16W	
R131			RK73GB1J101J	CHIP R 100 J 1/16W		R203			R92-1252-05	CHIP R 0 OHM	
R132			RK73GB1J104J	CHIP R 100K J 1/16W		R204			RK73GB1J104J	CHIP R 100K J 1/16W	
R133			R92-1252-05	CHIP R 0 OHM		R205			RK73GB1J182J	CHIP R 1.8K J 1/16W	
R135			RK73GB1J100J	CHIP R 10 J 1/16W		R206			RK73GB1J471J	CHIP R 470 J 1/16W	
R137			RK73GB1J101J	CHIP R 100 J 1/16W		R207			RK73GB1J101J	CHIP R 100 J 1/16W	
R138			RK73GB1J102J	CHIP R 1.0K J 1/16W		R208			RN73GH1J682D	CHIP R 6.8K D 1/16W	
R139			RK73GB1J151J	CHIP R 150 J 1/16W		R209			RK73GB1J224J	CHIP R 220K J 1/16W	
R140			RK73GB1J102J	CHIP R 1.0K J 1/16W		R210			RK73GB1J474J	CHIP R 470K J 1/16W	
R142			R92-1252-05	CHIP R 0 OHM		R211			RK73GB1J103J	CHIP R 10K J 1/16W	
R143			RK73GB1J184J	CHIP R 180K J 1/16W		R212			RN73GH1J683D	CHIP R 68K D 1/16W	
R144			R92-1252-05	CHIP R 0 OHM		R213			RN73GH1J682D	CHIP R 6.8K D 1/16W	
R145			RK73GB1J474J	CHIP R 470K J 1/16W		R214			RK73GB1J184J	CHIP R 180K J 1/16W	
R146			RK73GB1J472J	CHIP R 4.7K J 1/16W		R215			RK73GB1J474J	CHIP R 470K J 1/16W	
R147			RK73GB1J470J	CHIP R 47 J 1/16W		R218			R92-1252-05	CHIP R 0 OHM	
R148			RK73GB1J220J	CHIP R 22 J 1/16W		R219			RK73GB1J273J	CHIP R 27K J 1/16W	
R149			RK73GB1J104J	CHIP R 100K J 1/16W		R220,221			RK73GB1J184J	CHIP R 180K J 1/16W	
R150			RK73GB1J102J	CHIP R 1.0K J 1/16W		R222			RK73GB1J153J	CHIP R 15K J 1/16W	
R151			RK73GB1J473J	CHIP R 47K J 1/16W		R223			RK73GB1J223J	CHIP R 22K J 1/16W	
R152			RK73GB1J823J	CHIP R 82K J 1/16W		R224			RK73GB1J103J	CHIP R 10K J 1/16W	
R153			RK73GB1J104J	CHIP R 100K J 1/16W		R225			RK73GB1J153J	CHIP R 15K J 1/16W	
R154			RK73GB1J564J	CHIP R 560K J 1/16W		R226			R92-1252-05	CHIP R 0 OHM	
R155			RK73GB1J473J	CHIP R 47K J 1/16W		R230			RK73GB1J223J	CHIP R 22K J 1/16W	
R156			RN73GH1J683D	CHIP R 68K D 1/16W		R231			RK73GB1J104J	CHIP R 100K J 1/16W	

PARTS LIST

TX-RX UNIT (X57-5870-XX)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
R232			RK73GB1J152J	CHIP R 1.5K J 1/16W		IC1			PF0314-03	IC(RF POWER AMP)	
R233			R92-1252-05	CHIP R 0 OHM		IC2			MB15A02	IC	
R234			RK73GB1J124J	CHIP R 120K J 1/16W		IC3			NJM2904V	IC(APC)	
R235			RK73GB1J334J	CHIP R 330K J 1/16W		IC4			TA31136FN	IC(FM IF DETECTOR)	
R237			R92-1252-05	CHIP R 0 OHM		IC5 ,6			BU4094BCFV	IC(8bit SHIFT/STORE REGISTER)	
R239			RK73GB1J153J	CHIP R 15K J 1/16W		IC7			S-81350HG-KD	IC(VOLTAGE REGULATOR)	
R240			RK73GB1J223J	CHIP R 22K J 1/16W		IC8			PST9140NR	IC(RESET SW)	
R241			RK73GB1J334J	CHIP R 330K J 1/16W		IC9			RN5VL45C	IC(REGULATOR)	
R242			R92-1252-05	CHIP R 0 OHM		IC10			AT2408N10SI2.5	IC(8kbit SERIAL EEPROM)	
R244			RK73GB1J561J	CHIP R 560 J 1/16W		IC11			TA7368F	IC(AF POWER AMP)	
R249			R92-1252-05	CHIP R 0 OHM		IC12			AT29C020-90TI	IC	
R250			RK73GB1J472J	CHIP R 4.7K J 1/16W		IC13	*		30622M4102GP	MPU	
R252,253			R92-1252-05	CHIP R 0 OHM		IC14			TC35453F	IC(AUDIO PROCESSOR)	
R256-258			R92-1252-05	CHIP R 0 OHM		IC15			TA75W01FU	IC(OP AMP X2)	
R259			RK73GB1J473J	CHIP R 47K J 1/16W		IC16			TC75W51FU	IC(OP AMP X2)	
R260,261			RK73GB1J224J	CHIP R 220K J 1/16W		IC17			X9C103SI	IC(TERMINAL VOLTAGE)	
R301			R92-0679-05	CHIP R 0 OHM		IC18			LC73872M	IC(DTMF RECEIVER)	
R302			R92-1252-05	CHIP R 0 OHM		IC19			TA75W01FU	IC(OP AMP X2)	
R303			RK73GB1J101J	CHIP R 100 J 1/16W		IC301			UPB1509GV	IC	
R304			RK73GB1J472J	CHIP R 4.7K J 1/16W		Q1			2SC5108(Y)	TRANSISTOR	
R305			R92-1252-05	CHIP R 0 OHM		Q2			2SC4226(R24)	TRANSISTOR	
R306			RK73GB1J222J	CHIP R 2.2K J 1/16W		Q3 ,4			2SC5108(Y)	TRANSISTOR	
R308			R92-0670-05	CHIP R 0 OHM		Q6			2SC4988	TRANSISTOR	
R311			RK73GB1J221J	CHIP R 220 J 1/16W		Q7			2SJ243	FET	
R312-314			RK73GB1J104J	CHIP R 100K J 1/16W		Q8			UMC4	TRANSISTOR	
R316			RK73GB1J470J	CHIP R 47 J 1/16W		Q9			DTC144EE	DIGITAL TRANSISTOR	
R318			R92-1252-05	CHIP R 0 OHM		Q10			2SK508NV(K52)	FET	
R319			RK73GB1J102J	CHIP R 1.0K J 1/16W		Q11			2SC4617(S)	TRANSISTOR	
VR1			R12-7491-05	TRIMMING POT.(68K/8)		Q12			2SC4649(N,P)	TRANSISTOR	
S401			S70-0457-05	TACT SWITCH		Q13 ,14			DTA144EE	DIGITAL TRANSISTOR	
S402,403			S70-0424-05	TACT SWITCH		Q15			DTC114EE	DIGITAL TRANSISTOR	
MIC1			T91-0579-05	MIC ELEMENT		Q16			DTA114YE	DIGITAL TRANSISTOR	
D1			MA2S111	DIODE		Q17			DTC144EE	DIGITAL TRANSISTOR	
D2	*		MA2SV05	VARIABLE CAPACITANCE DIODE		Q18			FP210	TRANSISTOR	
D3			HVU131	DIODE		Q19	*		3SK166A	FET	
D4	*		MA2SV05	VARIABLE CAPACITANCE DIODE		Q20 ,21			UMG3N	TRANSISTOR	
D5			HSC277	DIODE		Q22			2SC4619	TRANSISTOR	
D6			MA360	VARIABLE CAPACITANCE DIODE		Q23			UMC4	TRANSISTOR	
D7			HSC277	DIODE		Q24 ,25			DTC114EE	DIGITAL TRANSISTOR	
D8			MA8062	ZENER DIODE		Q26			DTA114EE	DIGITAL TRANSISTOR	
D9			MA2S304	VARIABLE CAPACITANCE DIODE		Q27			UPA572T	FET	
D10			HSC277	DIODE		Q28			DTA114YE	DIGITAL TRANSISTOR	
D11			MA2S304	VARIABLE CAPACITANCE DIODE		Q30			2SK1588	FET	
D12			MA2S111	DIODE		Q31			2SC4619	TRANSISTOR	
D13 ,14			DAN235E	DIODE		Q32			2SA1362(GR)	TRANSISTOR	
D15			HSC277	DIODE		Q33 ,34			DTC144EE	DIGITAL TRANSISTOR	
D17			MA2S111	DIODE	K	Q35			UPA672T	FET	
D19			MA2S111	DIODE		Q36			2SK1824	FET	
D21			1SS373	DIODE	260G	Q301			2SK1215(E)	FET	
D22			1SR154-400	DIODE							
D23			RB706F-40	DIODE							
D302,303			HVC350B	VARIABLE CAPACITANCE DIODE							
D305			HVC350B	VARIABLE CAPACITANCE DIODE							

260G : TK-260G (K),(M) M : TK-260G(M),TK-270G(M)

270G : TK-270G (K),(M) K : TK-260G(K),TK-270G(K)