


EXPLODED VIEW (MECHANISM)

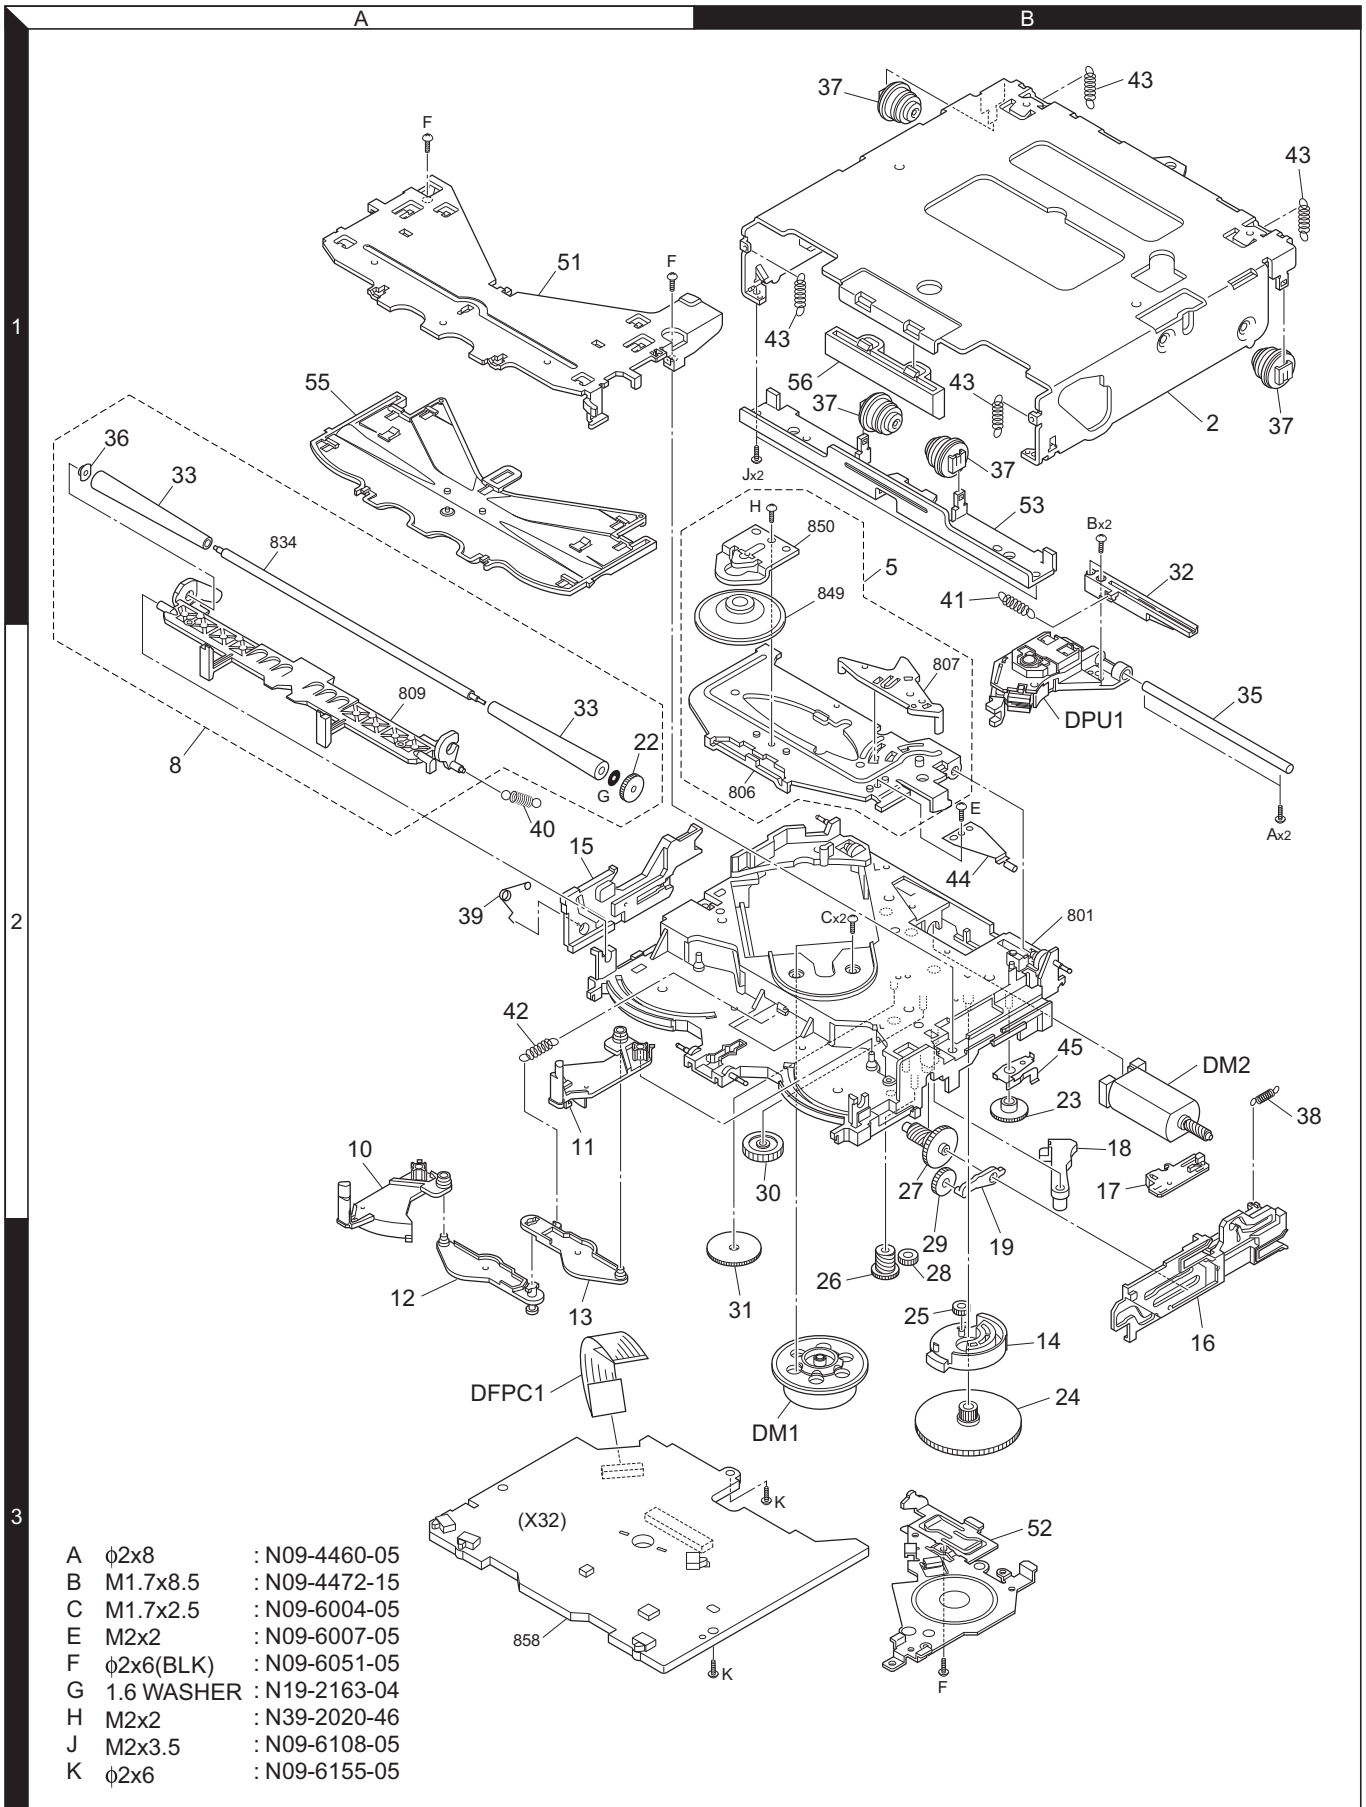

EXPLODED VIEW (UNIT)

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	Added	New	Parts No.	Description	Destination
KDC-3025/325/5026/5026G					
201	1C		A02-1486-13	PLASTIC CABINET ASSY	
203	3D		A22-2982-22	SUB PANEL ASSY	
205	2C	*	A46-1797-01	REAR COVER	
206	1D		A52-0829-02	TOP PLATE	
PA1	3C	*	A64-3183-12	PANEL ASSY	K
PA1	3C	*	A64-3185-12	PANEL ASSY	K1
PA1	3C	*	A64-3190-12	PANEL ASSY	M
PA1	3C	*	A64-3191-12	PANEL ASSY	M1
RM1	1C		A70-2040-05	REMOTE CONTROLLER ASSY (RC-505)	KK1M1
-			B46-0100-50	WARRANTY CARD	
-			B46-0606-04	ID CARD	KK1
-			B46-0612-14	ID CARD	MM1
-		*	B46-0653-03	USER CARD	KK1
-		*	B64-2694-00	INSTRUC. MANUAL (ENG.FRE.SPA.)	KK1
-		*	B64-2697-00	INSTRUCTION MANUAL (ENG.T-CHI.)	MM1
-		*	B64-2698-00	INSTRUCTION MANUAL (ARABIC)	MM1
208	1C		B07-3083-02	ESCUTCHEON	M
208	1C		B07-3098-02	ESCUTCHEON	KM1
208	1C	*	B07-3100-02	ESCUTCHEON	K1
209	3C	*	B09-0533-03	CAP (ROTARY)	
210	3C	*	B10-4471-11	FRONT GLASS	K
210	3C	*	B10-4473-11	FRONT GLASS	K1
210	3C	*	B10-4478-11	FRONT GLASS	M
210	3C	*	B10-4479-11	FRONT GLASS	M1
211	3C	*	B10-4493-12	FRONT GLASS	KK1M1
211	3C	*	B10-4496-12	FRONT GLASS	M
212	3C	*	B11-1440-04	OPTICAL DIFFUSER	
213	3C	*	B43-1518-04	BADGE	
215	1C		D10-4589-04	LEVER	
216	3D		D10-4730-03	LEVER (LOCK)	
217	3D		D10-4731-03	LEVER (PUSH)	
218	3D		D39-0255-05	DAMPER	
221	3C	*	E29-1967-02	CONDUCTIVE RUBBER	
222	1D		E30-6229-05	CORD WITH PINPLUG (1PRE FRONT)	K1
DC1	1C		E30-6322-05	DC CORD	
FC1	2D		E39-0476-05	FLAT CABLE (22PIN)	
229	1D		F29-0626-04	INSULATING COVER	K1
△ F1	2D		F52-0006-05	FUSE (MINI BLADE TYPE) (32V 10A)	
232	3C		G01-3203-04	COMPRESSION SPRING	
233	3D		G01-3171-04	TORSION COIL SPRING (LOCK)	
234	3D		G01-3172-04	TORSION COIL SPRING (PUSH)	
235	2C		G01-3173-04	COMPRESSION SPRING (REAR COVER)	
236	3D		G13-1267-04	CUSHION	
237	3D	*	G13-1273-04	CUSHION	
-			H10-4856-12	POLYSTYRENE FOAMED FIXTURE	
-		*	H13-2043-04	CARTON BOARD	K1
-			H25-0329-04	PROTECTION BAG (280X450X0.03)	
-			H25-0337-04	PROTECTION BAG (180X300X0.03)	
-		*	H54-3003-03	ITEM CARTON CASE	K
-		*	H54-3004-03	ITEM CARTON CASE	K1

Ref. No.	Added	New	Parts No.	Description	Destination
-		*	H54-3011-03	ITEM CARTON CASE	M1
-		*	H54-3012-03	ITEM CARTON CASE	M
240	3D		J19-5203-03	HOLDER (LEFT)	
241	3D		J19-5204-03	HOLDER (RIGHT)	
242	2C		J19-5205-03	HOLDER (REAR COVER)	
243	3C	*	J19-5271-02	HOLDER	
244	1D		J22-0011-03	MOUNTING HARDWARE ASSY	
250	3C	*	K23-1081-03	KNOB (ROTARY)	
251	3D		K24-4000-03	KNOB (EJECT)	
252	3C	*	K24-4102-03	KNOB (SRC)	
253	3C	*	K24-4103-04	KNOB (REL)	
254	3C	*	K25-1593-03	KNOB (AUTO/CLK)	
255	3C	*	K25-1594-03	KNOB (PLAY/Q)	
256	3C	*	K25-1641-02	KNOB (PRESET)	
257	3C	*	K25-1642-03	KNOB (FM/AM)	
260	1C		N99-1719-05	SCREW SET	
261	1C		N99-1730-15	SCREW SET (TENJI)	
B	3D		N30-3008-46	PAN HEAD MACHINE SCREW (M3X8)	
C	3C		N80-2006-46	PAN HEAD TAPTITE SCREW (2X6)	
D	2C		N80-2008-45	PAN HEAD TAPTITE SCREW (2X8)	
E	1D		N83-3005-46	PAN HEAD TAPTITE SCREW (3X5)	
F	3D		N84-2005-45	PAN HEAD TAPTITE SCREW	
G	3D		N84-2606-45	PAN HEAD TAPTITE SCREW (2.6X6)	
DME1	1D		X92-4650-00	CD MECHANISM ASSY	
SWITCH UNIT (X16-2500-xx)					
280	2D	*	B11-1439-04	OPTICAL DIFFUSER	
281	2D	*	B11-1441-04	REFLECTION SHEET	
282	2D	*	B19-2243-02	LIGHTING BOARD	
D1			B30-1564-05	LED (1608,BLUE)	MM1
D2			B30-1566-05	LED (1608,RED)	
D2-13			B30-1566-05	LED (1608,RED)	KK1
D3-13			B30-1565-05	LED (1608,PG)	MM1
D31,32			B30-1571-05	LED (WHITE)	
ED1		*	B38-1135-05	LIQUID CRYSTAL	MM1
ED1		*	B38-1141-05	LIQUID CRYSTAL	KK1
C6			CK73GB1H103K	CHIP C 0.010UF K	
C7			CK73FB1A225K	CHIP C 2.2UF K	
C8			CK73GB1H103K	CHIP C 0.010UF K	
C10-13			CK73GB1H103K	CHIP C 0.010UF K	
283	2D	*	E29-1968-04	CONDUCTIVE RUBBER	
J1			E59-0829-05	RECTANGULAR PLUG	
CP1			R90-0714-05	MULTI-COMP 10K X4	
CP2			R90-1016-05	MULTI-COMP 470 X4	
CP3,4			R90-0724-05	MULTI-COMP 1K X4	
R7			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R8			RK73GB2A4R7J	CHIP R 4.7 J 1/10W	
R10			RK73GB2A101J	CHIP R 100 J 1/10W	
R11			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R16			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R21			RK73FB2B561J	CHIP R 560 J 1/8W	
R22-25			RK73FB2B331J	CHIP R 330 J 1/8W	
R31			RK73FB2B271J	CHIP R 270 J 1/8W	

K : KDC-325 K1 : KDC-3025 M : KDC-5026G M1 : KDC-5026
 (K : North America M : Other Areas)

△ Indicates safety critical components.

PARTS LIST

* New parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnes dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

SWITCH UNIT (X16-2500-xx)

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
S2			S70-0814-05	TACT SWITCH	
S1		*	T99-0449-05	ROTARY ENCODER	
IC1			NJU6535	MOS-IC	
IC2			PNA4S22M	ANALOGUE IC	
Q1			DTA114EE	DIGITAL TRANSISTOR	
Q4			DTC144EE	DIGITAL TRANSISTOR	
CD PLAYER UNIT (X32-5390-00)					
C1			C92-0566-05	CHIP-TAN 10UF 6.3VW	
C2			CK73FB1A225K	CHIP C 2.2UF K	
C3			CK73GB0J105K	CHIP C 1.0UF K	
C5			CC73GCH1H020C	CHIP C 2.0PF C	
C6			CC73GCH1H390J	CHIP C 39PF J	
C7			CK73GB1C104K	CHIP C 0.10UF K	
C8			CK73GB0J105K	CHIP C 1.0UF K	
C9			CK73GB1H472K	CHIP C 4700PF K	
C10			CK73GB1C333K	CHIP C 0.033UF K	
C11			CK73GB1H682K	CHIP C 6800PF K	
C12			CK73GB1H332K	CHIP C 3300PF K	
C13			CC73GCH1H271J	CHIP C 270PF J	
C14			CK73GB1H472K	CHIP C 4700PF K	
C15			CK73GB1H222K	CHIP C 2200PF K	
C16			CC73GCH1H331J	CHIP C 330PF J	
C17,18			CK73GB1C104K	CHIP C 0.10UF K	
C31-34			CK73GB1C104K	CHIP C 0.10UF K	
C36			CK73FB1A225K	CHIP C 2.2UF K	
C37-39			CK73GB1H103K	CHIP C 0.010UF K	
C40			CK73GB1H153K	CHIP C 0.015UF K	
C41			CK73GB1H102K	CHIP C 1000PF K	
C42			CK73GB1E473K	CHIP C 0.047UF K	
C43			CK73GB1H222K	CHIP C 2200PF K	
C44			CK73GB1H102K	CHIP C 1000PF K	
C45-47			CK73GB1C104K	CHIP C 0.10UF K	
C48			CK73GB1H682K	CHIP C 6800PF K	
C49			CK73GB1H152K	CHIP C 1500PF K	
C50			CK73GB1H472K	CHIP C 4700PF K	
C51			CK73GB1H681K	CHIP C 680PF K	
C52			CK73GB1C104K	CHIP C 0.10UF K	
C61			CK73FB1A225K	CHIP C 2.2UF K	
C62			CK73GB1C104K	CHIP C 0.10UF K	
C71,72			CK73GB1H471K	CHIP C 470PF K	
C73,74			CC73GCH1H680J	CHIP C 68PF J	
C75,76			CK73GB1H222K	CHIP C 2200PF K	
C77,78			CK73GB1C104K	CHIP C 0.10UF K	
C100-102			CK73GB1H102K	CHIP C 1000PF K	
CN1			E40-9536-05	FLAT CABLE CONNECTOR	
CN1			E41-0193-05	FLAT CABLE CONNECTOR	
CN2			E40-9339-05	FLAT CABLE CONNECTOR	
CN2			E41-0129-05	FLAT CABLE CONNECTOR	
X1			L78-0851-05	RESONATOR (16.93MHZ)	
CP1			R90-1019-05	MULTI-COMP 100 X2	
CP2			R90-1014-05	MULTI-COMP 100 X4	
CP3			R90-0974-05	MULT R 1.8K X4	

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
CP4			R90-0718-05	MULTI-COMP 4.7K X4	
CP5			R90-0720-05	MULTI-COMP 100K X4	
R1			RK73GB2A910J	CHIP R 91 J 1/10W	
R2,3			RK73GB2A562J	CHIP R 5.6K J 1/10W	
R4			RK73FB2B100J	CHIP R 10 J 1/8W	
R5,6			RK73GB2A332J	CHIP R 3.3K J 1/10W	
R7			RK73GB2A362J	CHIP R 3.6K J 1/10W	
R8			RK73GB2A273J	CHIP R 27K J 1/10W	
R9			RK73GB2A392J	CHIP R 3.9K J 1/10W	
R10			RK73GB2A104J	CHIP R 100K J 1/10W	
R11			RK73GB2A333J	CHIP R 33K J 1/10W	
R12			RK73GB2A244J	CHIP R 240K J 1/10W	
R13			RK73GB2A914J	CHIP R 910K J 1/10W	
R14			RK73GB2A104J	CHIP R 100K J 1/10W	
R15			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R31			RK73GB2A273J	CHIP R 27K J 1/10W	
R32			RK73GB2A103J	CHIP R 10K J 1/10W	
R33			RK73GB2A183J	CHIP R 18K J 1/10W	
R34			RK73GB2A103J	CHIP R 10K J 1/10W	
R35			RK73GB2A393J	CHIP R 39K J 1/10W	
R36			RK73GB2A103J	CHIP R 10K J 1/10W	
R37			RK73GB2A622J	CHIP R 6.2K J 1/10W	
R38			RK73GB2A224J	CHIP R 220K J 1/10W	
R39			RK73GB2A104J	CHIP R 100K J 1/10W	
R40			RK73GB2A821J	CHIP R 820 J 1/10W	
R41			RK73GB2A473J	CHIP R 47K J 1/10W	
R42			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R43			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R44,45			RK73GB2A103J	CHIP R 10K J 1/10W	
R46			RK73GB2A273J	CHIP R 27K J 1/10W	
R47			RK73GB2A222J	CHIP R 2.2K J 1/10W	
R48			RK73GB2A103J	CHIP R 10K J 1/10W	
R49			RK73GB2A473J	CHIP R 47K J 1/10W	
R50			RK73GB2A392J	CHIP R 3.9K J 1/10W	
R51			RK73GB2A103J	CHIP R 10K J 1/10W	
R52,53			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R71			RK73GB2A133J	CHIP R 13K J 1/10W	
R72			RK73FB2B201J	CHIP R 200 J 1/8W	
R81-86			RK73FB2B203J	CHIP R 20K J 1/8W	
R87,88			RK73FB2B331J	CHIP R 330 J 1/8W	
R89,90			RK73GB2A332J	CHIP R 3.3K J 1/10W	
R91,92			RK73GB2A562J	CHIP R 5.6K J 1/10W	
R94			RK73GB2A104J	CHIP R 100K J 1/10W	
R100			RK73GB2A100J	CHIP R 10 J 1/10W	
S1,2			S68-0863-05	PUSH SWITCH	
S3			S68-0862-05	PUSH SWITCH	
D1			DAN202U	DIODE	
D1			MA142WK	DIODE	
D2			MA8051-L	ZENER DIODE	
D3			DA204U	DIODE	
IC1			AN22002AA	ANALOGUE IC	
IC2			MN6627771KP	MOS-IC	
IC3			BA5824FP	ANALOGUE IC	
IC4			NJM4580M1	ANALOGUE IC	

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

CD PLAYER UNIT (X32-5390-00)

Ref. No.	Added	New	Parts No.	Description	Destination	Ref. No.	Added	New	Parts No.	Description	Destination
Q1			MCH6101	TRANSISTOR		CN2			E40-9550-05	FLAT CABLE CONNECTOR	K1
Q2			2SA1362(Y)	TRANSISTOR		CN3			E40-3238-05	PIN ASSY	
Q3			DTC124EUA	DIGITAL TRANSISTOR	△	J1			E58-0863-15	RECTANGULAR RECEPTACLE	
Q3			UN5212	DIGITAL TRANSISTOR		J2			E56-0834-05	CYLINDRICAL RECEPTACLE	
Q4			DTA143XUA	DIGITAL TRANSISTOR		J3			E63-0887-05	PIN JACK	
Q5			2SC4081	TRANSISTOR		J4			E04-0312-05	RF COAXIAL CABLE RECEPTACLE	
Q6			2SA1576A	TRANSISTOR		L1			L33-1170-05	CHOKE COIL ASSY	
ELECTRIC UNIT (X34-3090-xx)						L2			L33-1926-05	CHOKE COIL	
C1			C94-0216-05	ELECTRO 3300UF 16WV		L3			L33-1123-05	LINE FILTER COIL	
C2			CK73GB1H103K	CHIP C 0.010UF K		L10,11			L40-4795-91	SMALL FIXED INDUCTOR (4.7UH,J)	
C3			CK73GB1H102K	CHIP C 1000PF K		X1			L78-0879-05	RESONATOR (10.0MHZ)	
C4-6			CK73GB1H103K	CHIP C 0.010UF K		X2			L77-2793-05	CRYSTAL RESONATOR	
C20			C90-2962-05	ELECTRO 100UF 16WV		E	2D		N83-3005-46	PAN HEAD TAPTITE SCREW	
C21			CD04AS1A101M	ELECTRO 100UF 10WV		H	2D		N80-3008-46	PAN HEAD TAPTITE SCREW	
C22,23			CD04AS1E100M	ELECTRO 10UF 25WV		J	2D		N80-3010-46	PAN HEAD TAPTITE SCREW	
C24,25			CD04AS1C100M	ELECTRO 10UF 16WV		K	2D		N83-3020-46	PAN HEAD TAPTITE SCREW	
C26			CD04AS1E100M	ELECTRO 10UF 25WV		L	2D		N86-2606-46	BINDING HEAD TAPTITE SCREW	
C27			CD04AT1H100M	ELECTRO 10UF 50WV		R1			RK73GB2A823J	CHIP R 82K J 1/10W	
C28			C90-2980-05	ELECTRO 220UF 16WV		R2			RK73GB2A363J	CHIP R 36K J 1/10W	
C29			CD04AS1C100M	ELECTRO 10UF 16WV		R3			RK73GB2A104J	CHIP R 100K J 1/10W	
C51,52			CK73GB1H103K	CHIP C 0.010UF K		R4			RK73FB2B203J	CHIP R 20K J 1/8W	
C111			CK73GB1H102K	CHIP C 1000PF K		R5,6			RK73GB2A103J	CHIP R 10K J 1/10W	
C119			CK73GB1H103K	CHIP C 0.010UF K		R7			RK73GB2A223J	CHIP R 22K J 1/10W	
C163			CK73GB1H103K	CHIP C 0.010UF K		R8			RD14DB2H332J	SMALL-RD 3.3K J 1/2W	
C164			CD04AS1C100M	ELECTRO 10UF 16WV		R9			RD14BB2C333J	RD 33K J 1/6W	
C165			CK73GB1H103K	CHIP C 0.010UF K		R10,11			RK73GB2A223J	CHIP R 22K J 1/10W	
C201,202			CD04AS1H2R2M	ELECTRO 2.2UF 50WV		R12			RK73GB2A473J	CHIP R 47K J 1/10W	
C203			CK73GB1H223K	CHIP C 0.022UF K		R13			RD14BB2C562J	RD 5.6K J 1/6W	
C204			CK73GB1H103K	CHIP C 0.010UF K		R21			RK73FB2B152J	CHIP R 1.5K J 1/8W	
C205			CK73GB1A474K	CHIP C 0.47UF K		R22,23			RD14BB2C472J	RD 4.7K J 1/6W	
C206			CC73GCH1H151J	CHIP C 150PF J		R24-28			RK73GB2A103J	CHIP R 10K J 1/10W	
C209			CD04AS1H2R2M	ELECTRO 2.2UF 50WV		R51,52			RK73GB2A222J	CHIP R 2.2K J 1/10W	
C210			CK73GB1H103K	CHIP C 0.010UF K		R53-56			RK73GB2A102J	CHIP R 1.0K J 1/10W	
C211			CD04AS1A470M	ELECTRO 47UF 10WV		R58			RK73GB2A222J	CHIP R 2.2K J 1/10W	
C212,213			CK73GB1C104K	CHIP C 0.10UF K		R59			RK73GB2A101J	CHIP R 100 J 1/10W	
C251-254			C94-0179-05	ELECTRO 0.22UF 50WV		R60			RK73GB2A102J	CHIP R 1.0K J 1/10W	
C255			CD04AS1H010M	ELECTRO 1UF 50WV		R61,62			RK73GB2A104J	CHIP R 100K J 1/10W	
C256			CD04AS1C220M	ELECTRO 22UF 16WV		R63			RK73GB2A222J	CHIP R 2.2K J 1/10W	
C257			CK73GB1A105K	CHIP C 1.0UF K		R64,65			RK73GB2A104J	CHIP R 100K J 1/10W	
C258		*	C94-0048-05	ELECTRO 0.22UF 50WV		R67,68			RK73GB2A471J	CHIP R 470 J 1/10W	
C301,302		*	CD04AS1HR47M	ELECTRO 0.47UF 50WV		R101			RK73GB2A102J	CHIP R 1.0K J 1/10W	
C303			CD04AS1A470M	ELECTRO 47UF 10WV		R102			RK73GB2A471J	CHIP R 470 J 1/10W	
C304			CK73GB1H103K	CHIP C 0.010UF K		R103			RK73GB2A472J	CHIP R 4.7K J 1/10W	
C306			CK73GB1H103K	CHIP C 0.010UF K		R104			RK73GB2A471J	CHIP R 470 J 1/10W	
C351-354			CD04AS1C100M	ELECTRO 10UF 16WV	K1	R105			RK73GB2A472J	CHIP R 4.7K J 1/10W	
C351,352			CD04AS1C100M	ELECTRO 10UF 16WV	KMM1	R106			RK73GB2A222J	CHIP R 2.2K J 1/10W	
C356			CK73GB1H103K	CHIP C 0.010UF K	K1	R152-154			RK73GB2A471J	CHIP R 470 J 1/10W	
C356,357			CK73GB1H103K	CHIP C 0.010UF K		R155			RK73GB2A222J	CHIP R 2.2K J 1/10W	
C401			CC73GCH1H180J	CHIP C 18PF J		R157,158			RK73GB2A471J	CHIP R 470 J 1/10W	
C402			CC73GCH1H220J	CHIP C 22PF J		R159			RK73GB2A102J	CHIP R 1.0K J 1/10W	
C403			CK73GB1C104K	CHIP C 0.10UF K		R160			RK73GB2A222J	CHIP R 2.2K J 1/10W	
C409		*	CD04AS0J470M	ELECTRO 47UF 6.3WV		R161			RK73GB2A225J	CHIP R 2.2M J 1/10W	
C410,411			CK73GB1H103K	CHIP C 0.010UF K		R162,163			RK73GB2A104J	CHIP R 100K J 1/10W	
CN1			E41-0167-05	PIN ASSY							

K : KDC-325 K1 : KDC-3025 M : KDC-5026G M1 : KDC-5026
 (K : North America M : Other Areas)

△ Indicates safety critical components.

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

ELECTRIC UNIT (X34-3090-xx)

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
R164,165 R166 R167 R168 R184,185			RK73GB2A473J RK73GB2A472J RK73GB2A474J RK73GB2A102J RK73GB2A474J	CHIP R 47K J 1/10W CHIP R 4.7K J 1/10W CHIP R 470K J 1/10W CHIP R 1.0K J 1/10W CHIP R 470K J 1/10W	
R186 R187 R201 R202-204 R205			RK73GB2A222J RK73GB2A473J RK73GB2A103J RK73GB2A472J RK73GB2A222J	CHIP R 2.2K J 1/10W CHIP R 47K J 1/10W CHIP R 10K J 1/10W CHIP R 4.7K J 1/10W CHIP R 2.2K J 1/10W	
R206-208 R209,210 R251 R253 R254			RK73GB2A102J RK73GB2A103J RK73GB2A473J RK73GB2A432J RK73GB2A100J	CHIP R 1.0K J 1/10W CHIP R 10K J 1/10W CHIP R 47K J 1/10W CHIP R 4.3K J 1/10W CHIP R 10 J 1/10W	
R255 R256 R257 R301,302 R303			RK73GB2A331J RK73GB2A334J RK73GB2A153J RK73EB2E100J RK73EB2E101J	CHIP R 330 J 1/10W CHIP R 330K J 1/10W CHIP R 15K J 1/10W CHIP R 10 J 1/4W CHIP R 100 J 1/4W	
R304,305 R306 R307-309 R310,311 R312-315			RK73EB2E472J RK73EB2E4R7J RK73EB2E472J RK73EB2E101J RK73GB2A104J	CHIP R 4.7K J 1/4W CHIP R 4.7 J 1/4W CHIP R 4.7K J 1/4W CHIP R 100 J 1/4W CHIP R 100K J 1/10W	
R351,352 R355,356 R357,358 R359,360 R361,362			RK73GB2A361J RK73GB2A223J RK73FB2B181J RK73GB2A361J RK73GB2A223J	CHIP R 360 J 1/10W CHIP R 22K J 1/10W CHIP R 180 J 1/8W CHIP R 360 J 1/10W CHIP R 22K J 1/10W	K1 K1
R363,364 R374 R401 R402,403 R404			RK73FB2B181J RK73EB2E102J RK73GB2A102J RK73GB2A104J RK73GB2A223J	CHIP R 180 J 1/8W CHIP R 1.0K J 1/4W CHIP R 1.0K J 1/10W CHIP R 100K J 1/10W CHIP R 22K J 1/10W	K1 KK1
R406 R409 R409,410 R411 R413			RK73GB2A223J RK73GB2A223J RK73GB2A223J RK73GB2A223J RK73GB2A223J	CHIP R 22K J 1/10W CHIP R 22K J 1/10W CHIP R 22K J 1/10W CHIP R 22K J 1/10W CHIP R 22K J 1/10W	MM1 KK1 MM1
R414 R501 W102 W103,104 W201			RK73GB2A104J RK73GB2A102J R92-1252-05 R92-2053-05 R92-1252-05	CHIP R 100K J 1/10W CHIP R 1.0K J 1/10W CHIP R 0 OHM J 1/16W CHIP R 0 J 1/8W CHIP R 0 OHM J 1/16W	
W203			R92-1252-05	CHIP R 0 OHM J 1/16W	
S1			S74-0821-05	MICRO SWITCH	
D1 D2-4 D21 D22,23 D24,25			1N5393G-M6 MA4068(N)-M MA4082(N)-L AM01ZNF D1F60	DIODE ZENER DIODE ZENER DIODE DIODE DIODE	
D26,27			1SS133	DIODE	

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
D151-155 D157,158 D160-163 D201,202 D203			MA4062-L MA4062-L MA4062-L MA4068(N)-M 1SS133	ZENER DIODE ZENER DIODE ZENER DIODE ZENER DIODE DIODE	
D269 D271 D301-308 D309-311 D401			1SS133 1SS133 MA4062-L MA4068 (N)-M 1SS133	DIODE DIODE ZENER DIODE ZENER DIODE DIODE	
IC1 IC2 IC3 IC4 IC6		*	M30302MC-1N4FP TDA7407D BA4911-V4 TB2903H HD74HC27FP-E	MICROCONTROLLER IC ANALOGUE IC ANALOGUE IC ANALOGUE IC MOS-IC	
IC8 IC10 Q1-3 Q4 Q21			PST3435UL BR24C01AF-W 2SC4081 2SA1036K 2SD2375	MOS-IC ROM IC TRANSISTOR TRANSISTOR TRANSISTOR	KK1
Q22,23 Q151 Q152 Q153 Q153			UMC2N DTA114YUA 2SA1576A DTC144EUA KRC404	TRANSISTOR DIGITAL TRANSISTOR TRANSISTOR DIGITAL TRANSISTOR DIGITAL TRANSISTOR	
Q154 Q201 Q351,352 Q354 Q354			2SA1577 DTC143TUA DTC143TUA DTA124EUA KRA303	TRANSISTOR DIGITAL TRANSISTOR DIGITAL TRANSISTOR DIGITAL TRANSISTOR DIGITAL TRANSISTOR	
Q355,356 Q501 Q501 Q502 Q502			DTC143TUA DTA124EUA KRA303 DTC144EUA KRC404	DIGITAL TRANSISTOR DIGITAL TRANSISTOR DIGITAL TRANSISTOR DIGITAL TRANSISTOR DIGITAL TRANSISTOR	K1
TH1			PTH9C42BE471Q	POSITIVE RESISTOR	
A1			X86-3720-11	FRONT-END UNIT	
DAUGHTER UNIT (X89-2570-10)					
C1			CK73GB1H103K	CHIP C 0.010UF K	
CN1 J1			E41-0169-05 E58-0865-05	SOCKET FOR PIN ASSY RECTANGULAR RECEPTACLE	
R1 R2-5 R6,7 R8 R9,10			RK73EB2E102J RK73EB2E471J RK73EB2E102J RK73EB2E241J RK73EB2E471J	CHIP R 1.0K J 1/4W CHIP R 470 J 1/4W CHIP R 1.0K J 1/4W CHIP R 240 J 1/4W CHIP R 470 J 1/4W	
R11-13			RK73EB2E102J	CHIP R 1.0K J 1/4W	
S1			S70-0871-05	TACT SWITCH	
CD MECHANISM ASSY (X92-4650-00)					
2	1B	*	A10-4827-32	CHASSIS	

K : KDC-325 K1 : KDC-3025 M : KDC-5026G M1 : KDC-5026

(K : North America M : Other Areas)

△ Indicates safety critical components.

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

CD MECHANISM ASSY (X92-4650-00)

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation	Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
5	1B	*	D10-4576-63	ARM ASSY							
8	2A		D10-4579-13	LEVER ASSY							
10	2A		D10-4581-13	ARM							
11	2A		D10-4582-13	ARM							
12	3A		D10-4583-03	ARM							
13	3A		D10-4584-03	ARM							
14	3B		D10-4585-03	ARM							
15	2A		D10-4586-13	SLIDER							
16	3B		D10-4587-32	SLIDER							
17	2B		D10-4588-13	SLIDER							
18	2B		D10-4595-04	ARM							
19	3B		D10-4596-14	ARM							
22	2A		D13-2151-04	GEAR							
23	2B		D13-2152-04	GEAR							
24	3B		D13-2153-04	GEAR							
25	3B		D13-2154-04	GEAR							
26	3B		D13-2155-04	WORM							
27	2B		D13-2156-14	GEAR							
28	3B		D13-2157-04	GEAR							
29	3B		D13-2158-04	GEAR							
30	2B		D13-2168-04	GEAR							
31	3B		D13-2171-04	GEAR							
32	2B		D13-2172-03	RACK (GEAR)							
33	2A		D14-0759-04	ROLLER							
35	2B		D21-2382-04	SHAFT							
36	1A		D23-0954-04	RETAINER							
37	1B		D39-0246-05	DAMPER							
38	2B		G01-3072-04	EXTENSION SPRING							
39	2A		G01-3073-04	TORSION COIL SPRING							
40	2A		G01-3074-04	EXTENSION SPRING							
41	1B		G01-3075-14	EXTENSION SPRING							
42	2A		G01-3076-04	EXTENSION SPRING							
43	1B		G01-3077-14	EXTENSION SPRING							
44	2B		G02-1399-04	FLAT SPRING							
45	2B		G02-1408-04	FLAT SPRING							
51	1A		J21-9676-22	MOUNTING HARDWARE							
52	3B	*	J21-9677-22	MOUNTING HARDWARE							
53	1B		J21-9678-13	MOUNTING HARDWARE							
55	1A		J90-1001-11	GUIDE							
56	1B		J90-1023-03	GUIDE							
A	2B		N09-4460-05	TAPTITE SCREW (OVAL P TAPTIT)							
B	1B		N09-4472-15	MACHINE SCREW (M1.7X8.0)							
C	2B		N09-6004-05	MACHINE SCREW (M1.7X2.5 IB-L)							
E	2B		N09-6007-05	MACHINE SCREW (PAN M2X2)							
F	1A		N09-6051-05	TAPTITE SCREW (BIND P 2X5)							
G	2A		N19-2163-04	FLAT WASHER							
H	1B		N39-2020-46	PAN HEAD MACHIN SCREW							
J	1B		N09-6108-05	MACHINE SCREW (M2*3.5TYPE3)							
K	3B		N09-6155-05	SEMS (TAPTITE SCREW) (PT2X6)							
DM1	3B		T42-1066-04	DC MOTOR ASSY (SP)							
DM2	2B		T42-1067-04	DC MOTOR ASSY (LO)							
DPU1	2B		X93-2010-00	OPTICAL PICKUP ASSY							

K : KDC-325 K1 : KDC-3025 M : KDC-5026G M1 : KDC-5026
 (K : North America M : Other Areas)

△ Indicates safety critical components.