


EXPLODED VIEW (UNIT)

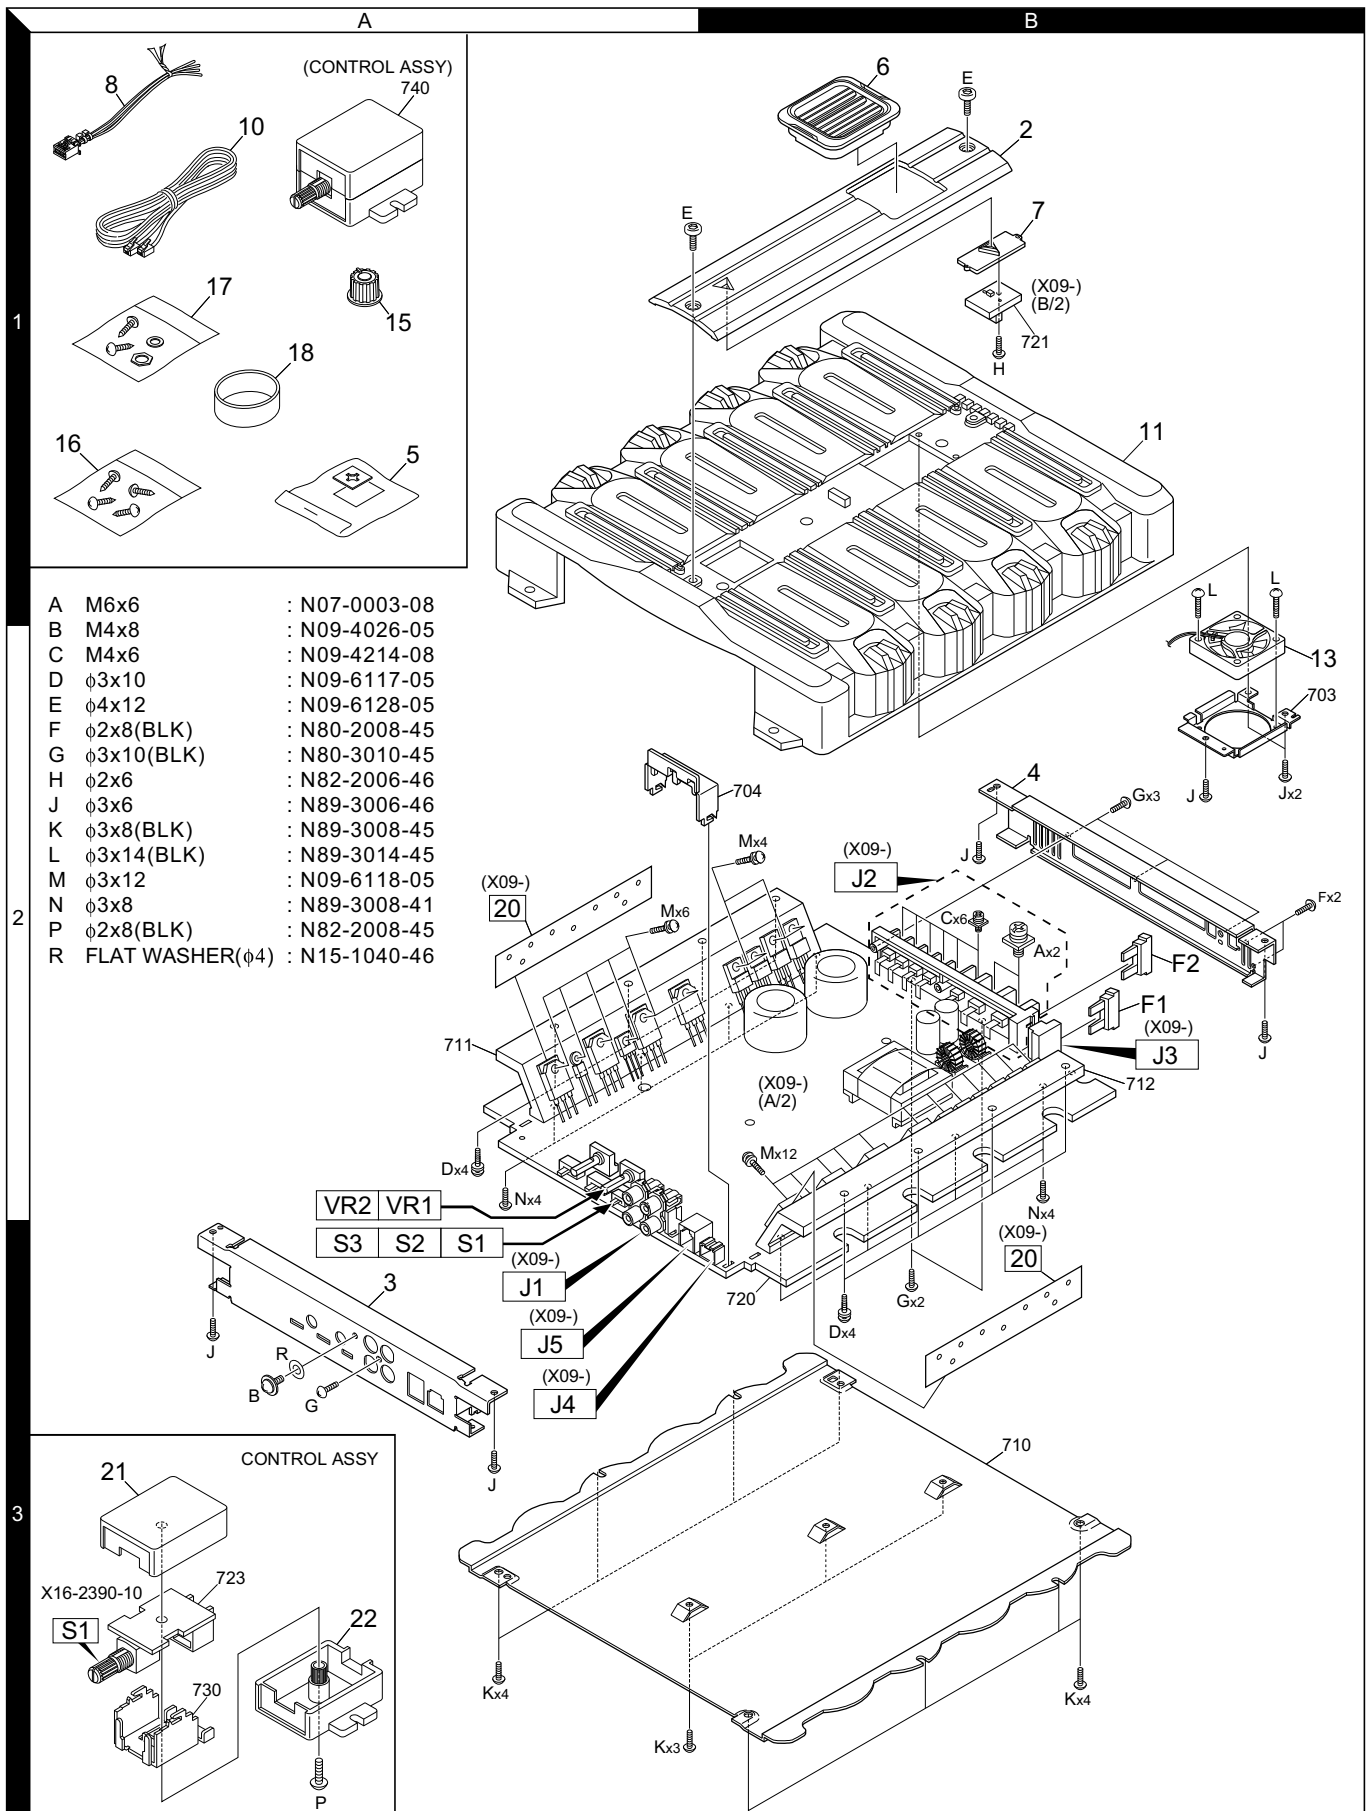

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation	Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
KAC-7201/7251						C11-14 C15-18 C19,20 C21,22 C23,24			CE04DW1C100M CC73GCH1H150J CK73FB1C224K CE04HW1H2R2M CC73GCH1H101J	ELECTRO 10UF 16WV CHIP C 15PF J CHIP C 0.22UF K NP-ELEC 2.2UF 50WV CHIP C 100PF J	
2	1B	*	A21-4268-03	DRESSING PANEL	K1E1	C25			CF92FV1H474J	MF-C 0.47UF J	
2	1B	*	A21-4269-03	DRESSING PANEL	K2E2M	C26			CF92FV1H224J	MF-C 0.22UF J	
3	3A	*	A64-3051-02	PANEL	K1E1	C27			CF92FV1H474J	MF-C 0.47UF J	
3	3A	*	A64-3052-02	PANEL	K2E2M	C28-30 C39,40			CE04DW1C100M CE04DW1C100M	ELECTRO 10UF 16WV ELECTRO 10UF 16WV	
4	2B	*	A84-0346-02	REAR PANEL		C41,42 C43			CC73GCH1H470J CC73GCH1H471J	CHIP C 47PF J CHIP C 470PF J	
5	1A	*	B03-5024-04	DRESSING PLATE	K1E1	C50,51			CC73GCH1H150J	CHIP C 15PF J	
6	1B	*	B07-3084-02	ESCUTCHEON		C52,53			CE04DW1C100M	ELECTRO 10UF 16WV	
7	1B	*	B19-2214-03	LIGHTING BOARD		C60			CK73GB1H103K	CHIP C 0.010UF K	
-		*	B46-0100-50	WARRANTY CARD		C71,72 C100			CK73GB1H103K	CHIP C 0.010UF K	K1E1
-		*	B64-2569-00	INST. MANUAL (ENG,FRE,SPA)	K1E1	C101,102 C103,104 C105,106			CF92FV1H102J CE04DW1E220M CK45FB1H102K CF92FV1H472J	MF-C 1000PF J ELECTRO 22UF 25WV CERAMIC 1000PF K MF-C 4700PF J	
-		*	B64-2569-00	INST. MANUAL (ENG,FRE,SPA)	K2E2	C107,108 C109,110			CC45FSL1H470J CE04DW1E470M	CERAMIC 47PF J ELECTRO 47UF 25WV	
-		*	B64-2570-00	INST. MANUAL (GER,DUT,ITA,POR)	E1E2	C111,112			CC45FSL1H331J	CERAMIC 330PF J	
-		*	B64-2571-00	INST. MANUAL (ENG,T-CHI)	M	C113,114 C115,116			CC45FSL1H220J CF92FV1H102J	CERAMIC 22PF J MF-C 1000PF J	
8	1A		E30-6145-05	CONNECTING CORD ASS'Y		C117,118 C121-128			CF92FV1H473J CC45FSL1H471J	MF-C 0.047UF J CERAMIC 470PF J	
10	1A	*	E30-6240-05	MODULAR CABLE	K1E1	C129,130 C165 C201-204			CC45FSL1H220J CF92FV1H472J CE04DW1E470M	CERAMIC 22PF J MF-C 4700PF J ELECTRO 47UF 25WV	
11	1B	*	F01-1727-01	HEAT SINK		C205			CE04DW1H221M	ELECTRO 220UF 50WV	
13	2B	*	F09-1824-05	FAN		C206			CE04DW1V100M	ELECTRO 10UF 35WV	
F1,2	2B	*	F52-0015-05	FUSE (BLADE TYPE : 30A)		C207-210 C211,212 C213,214			CK45FB1H471K C90-5445-05 CF92FV1H152J	CERAMIC 470PF K ELECTRO 4700UF 56WV MF-C 1500PF J	
-		*	H10-4870-03	POLYSTYRENE FOAMED FIXTURE		C215			CK73GB1H103K	CHIP C 0.010UF K	
-		*	H21-1117-04	PROTECTION SHEET		C216			CF92FV1H182J	MF-C 1800PF J	
-		*	H25-0336-04	PROTECTION BAG		C217,218			C90-2921-05	ELECTRO 3900UF 16WV	
-		*	H25-1179-04	PROTECTION BAG	K1E1	C219			CK73GB1H102K	CHIP C 1000PF K	
-		*	H30-0578-04	ADHESIVE DOUBLE-COATED TAPE	K1E1	C221			CE04DW1C100M	ELECTRO 10UF 16WV	
-		*	H54-2876-03	ITEM CARTON CASE	K1E1	C222			CE04DW1E470M	ELECTRO 47UF 25WV	
-		*	H54-2877-03	ITEM CARTON CASE	K2E2	C223			CE04DW1C100M	ELECTRO 10UF 16WV	
-		*	H54-2878-03	ITEM CARTON CASE	M	C224			CF92FV1H102J	MF-C 1000PF J	
15	1A	*	K23-1076-03	KNOB	K1E1	C225			CE04DW1C100M	ELECTRO 10UF 16WV	
16	1A		N99-1587-05	SCREW SET		C226			CE04DW1H0R1M	ELECTRO 0.1UF 50WV	
17	1A		N99-1740-05	SCREW SET	K1E1	C227			CE04HW1H2R2M	NP-ELEC 2.2UF 50WV	
A	2B		N07-0003-08	SCREW (M6)		C228			CE04DW0J101M	ELECTRO 100UF 6.3WV	
B	3A		N09-4026-05	TAPPING SCREW		C229			CE04DW1V100M	ELECTRO 10UF 35WV	
C	2B		N09-4214-08	SCREW (M4)		C230,231 C232		*	CE04DW2A2R2M CE04HW1C100M	ELECTRO 2.2UF 100WV NP-ELEC 10UF 16WV	
D	2B	*	N09-6117-05	TAPTITE SCREW		C233			CK73GB1H103K	CHIP C 0.010UF K	
E	1B	*	N09-6128-05	DRESSED SCREW		C301-303			CE04DW1HR33M	ELECTRO 0.33UF 50WV	
F	2B		N80-2008-45	PAN HEAD TAPTITE SCREW		C304			CE04DW1HR22M	ELECTRO 0.22UF 50WV	
G	2B		N80-3010-45	PAN HEAD TAPTITE SCREW		C320			CE04DW1H0R1M	ELECTRO 0.1UF 50WV	
H	1B		N82-2006-46	BINDING HEAD TAPTITE SCREW		C321			CE04DW1V100M	ELECTRO 10UF 35WV	
J	2B		N89-3006-46	BINDING HEAD TAPTITE SCREW							
K	3A		N89-3008-45	BINDING HEAD TAPTITE SCREW							
L	2B		N89-3014-45	BINDING HEAD TAPTITE SCREW							
R	3A		N15-1040-46	FLAT WASHER							
18	1A		W01-1606-05	ACCESSORY							
740	1A	*	-	CONTROL ASS'Y	K1E1						
-		*	X09-5600-10	AUDIO UNIT	K1E1						
-		*	X09-5600-11	AUDIO UNIT	K2E2M						
AUDIO UNIT (X09-5600-1x)											
C1,2			CK73GB1H102K	CHIP C 1000PF K							
C3,4			CE04DW1C100M	ELECTRO 10UF 16WV							
C5,6			CC73GCH1H150J	CHIP C 15PF J							
C8,9			CF92FV1H103J	MF-C 0.010UF J							

E1 : KAC-7251 (Europe) K1 : KAC-7251 (North America)

E2 : KAC-7201 (Europe) K2 : KAC-7201 (North America) M : KAC-7201 (Other Areas)

△ Indicates safety critical components.

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

AUDIO UNIT (X09-5600-1x)

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation	Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
C400			CK73GB1H103K	CHIP C 0.010UF K		R52-54			RK73FB2B473J	CHIP R 47K J 1/8W	
C402			CK73GB1H103K	CHIP C 0.010UF K		R55			RK73FB2B682J	CHIP R 6.8K J 1/8W	
C403			CE04DW0J101M	ELECTRO 100UF 6.3WV		R56			RK73FB2B302J	CHIP R 3.0K J 1/8W	
CN1			E40-3247-05	PIN ASS'Y (3PIN)		R61			RK73FB2B472J	CHIP R 4.7K J 1/8W	
CN3			E40-3246-05	PIN ASS'Y (2PIN)		R62			RK73FB2B113J	CHIP R 11K J 1/8W	
J1	*		E63-0889-05	PIN JACK		R63			RK73FB2B472J	CHIP R 4.7K J 1/8W	
J2	*		E70-0838-05	SCREW TERMINAL BOARD		R65			RK73FB2B472J	CHIP R 4.7K J 1/8W	
J4			E58-0919-05	RECTANGULAR RECEPTACLE		R66			RK73FB2B113J	CHIP R 11K J 1/8W	
J5	*		E58-0966-05	RECTANGULAR RECEPTACLE	K1E1	R67			RK73FB2B472J	CHIP R 4.7K J 1/8W	
W21-24			E29-1863-05	LEAD PLATE		R68			RK73FB2B113J	CHIP R 11K J 1/8W	
W25-27			E29-1862-05	LEAD PLATE		R69,70			RK73FB2B473J	CHIP R 47K J 1/8W	
W29			E29-1862-05	LEAD PLATE		R100			RD14BB2C102J	RD 1.0K J 1/6W	
W40-197			E31-0001-00	JUMPER WIRE		R101,102			RD14BB2C222J	RD 2.2K J 1/6W	
W199-250			E31-0001-00	JUMPER WIRE		R103,104	*		RD14BB2C133J	RD 13K J 1/6W	
W252-254			E31-0001-00	JUMPER WIRE		R105,106			RD14BB2C682J	RD 6.8K J 1/6W	
W255			E31-0001-00	JUMPER WIRE	K1E1	R107-110			RD14BB2C102J	RD 1.0K J 1/6W	
W256-273			E31-0001-00	JUMPER WIRE		R111,112			RD14BB2C101J	RD 100 J 1/6W	
W276-286			E31-0001-00	JUMPER WIRE		R113,114			RD14BB2C102J	RD 1.0K J 1/6W	
W288,289			E31-0001-00	JUMPER WIRE		R115,116	*		RD14BB2C133J	RD 13K J 1/6W	
W291			E31-0001-00	JUMPER WIRE		R117-120	*		RD14BB2C151J	RD 150 J 1/6W	
W293			E31-0001-00	JUMPER WIRE		R121-124	*		RD14BB2E682J	RD 6.8K J 1/4W	
W295			E31-0001-00	JUMPER WIRE		R125,126	*		RD14BB2C151J	RD 150 J 1/6W	
W297-299			E31-0001-00	JUMPER WIRE		R127,128			RD14BB2C182J	RD 1.8K J 1/6W	
WH1	*		E39-0538-05	WIRING HARNESS		R129,130	*		RD14BB2C511J	RD 510 J 1/6W	
20	2A	*	F20-2244-04	INSULATING SHEET		R131-134			RD14NB2E101J	RD 100 J 1/4W	
J3			J13-0602-05	FUSE HOLDER		R135-150			RD14NB2E4R7J	RD 4.7 J 1/4W	
L1,2	*		L33-1920-05	CHOKE COIL		R151-158			R92-0205-05	METAL-PLATE 0.1 K 2W	
L4	*		L19-0743-05	TRANSFORMER FOR CONVERTER		R159,160			RD14NB2E4R7J	RD 4.7 J 1/4W	
G	2B		N80-3010-45	PAN HEAD TAPTITE SCREW		R161,162			RD14NB2E221J	RD 220 J 1/4W	
M	2A	*	N09-6118-05	TAPTITE SCREW		R163,164			RD14BB2C330J	RD 33 J 1/6W	
N	2B		N89-3008-41	BINDING HEAD TAPTITE SCREW		R165			RD14BB2C221J	RD 220 J 1/6W	
R1,2			RD14BB2C102J	RD 1.0K J 1/6W		R201,202	*		RD14BB2E121J	RD 120 J 1/4W	
R3-8			RK73FB2B103J	CHIP R 10K J 1/8W		R203,204	*		RD14BB2C133J	RD 13K J 1/6W	
R9-12			R92-3040-05	CHIP R 10K D 1/10W		R205,206			RD14BB2C103J	RD 10K J 1/6W	
R13,14			RD14BB2C222J	RD 2.2K J 1/6W		R207	*		RD14DB2H100J	SMALL-RD 10 J 1/2W	
R15-18	*		RD14BB2C623J	RD 62K J 1/6W		R209,210			RD14BB2C473J	RD 47K J 1/6W	
R19-22			RK73FB2B473J	CHIP R 47K J 1/8W		R211,212			RD14BB2C333J	RD 33K J 1/6W	
R23-26			R92-3040-05	CHIP R 10K D 1/10W		R215-218	*		RD14BB2C681J	RD 680 J 1/6W	
R27,28			RK73FB2B431J	CHIP R 430 J 1/8W		R219-222			RD14BB2C102J	RD 1.0K J 1/6W	
R29,30			RK73GB2A102J	CHIP R 1.0K J 1/10W		R223,224	*		RD14DB2H100J	SMALL-RD 10 J 1/2W	
R31,32			RK73FB2B223J	CHIP R 22K J 1/8W		R226	*		RD14DB2H100J	SMALL-RD 10 J 1/2W	
R33,34			RK73FB2B301J	CHIP R 300 J 1/8W		R229,230			RD14BB2C750J	RD 75 J 1/6W	
R35,36			RK73FB2B681J	CHIP R 680 J 1/8W		R231,232			RD14BB2C100J	RD 10 J 1/6W	
R37,38			RK73FB2B331J	CHIP R 330 J 1/8W		R233,234			RD14BB2C152J	RD 1.5K J 1/6W	
R39,40			RK73FB2B221J	CHIP R 220 J 1/8W		R239,240			RD14BB2C472J	RD 4.7K J 1/6W	
R41-44			RK73FB2B222J	CHIP R 2.2K J 1/8W		R241			RD14DB2H150J	SMALL-RD 15 J 1/2W	
R45,46			RK73FB2B103J	CHIP R 10K J 1/8W		R244-247	*		RD14BB2C332J	RD 3.3K J 1/6W	
R47,48			RK73FB2B223J	CHIP R 22K J 1/8W		R248,249			RD14BB2C362J	RD 3.6K J 1/6W	
R49			RK73FB2B152J	CHIP R 1.5K J 1/8W		R250			RD14BB2C303J	RD 30K J 1/6W	
R50	*		RK73FB2B242J	CHIP R 2.4K J 1/8W		R251			RD14BB2C472J	RD 4.7K J 1/6W	
R51			RK73FB2B152J	CHIP R 1.5K J 1/8W		R252	*		RD14BB2C154J	RD 150K J 1/6W	
						R253			RD14BB2E103J	RD 10K J 1/4W	
						R254			RD14BB2C104J	RD 100K J 1/6W	
						R255			RD14BB2C333J	RD 33K J 1/6W	
						R256,257			RD14BB2C103J	RD 10K J 1/6W	

E1 : KAC-7251 (Europe) K1 : KAC-7251 (North America)

E2 : KAC-7201 (Europe) K2 : KAC-7201 (North America) M : KAC-7201 (Other Areas)

△ Indicates safety critical components.

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

AUDIO UNIT (X09-5600-1x)

Ref. No.	Added	New	Parts No.	Description	Destination	Ref. No.	Added	New	Parts No.	Description	Destination
R258,259		*	RD14BB2C681J	RD 680 J 1/6W		D1-4			1SS133	DIODE	
R260			RD14BB2C101J	RD 100 J 1/6W		D7-16			1SS133	DIODE	
R261			RD14BB2C103J	RD 10K J 1/6W		D17,18			RD16JS(B)	ZENER DIODE	
R262			RD14BB2C102J	RD 1.0K J 1/6W		D23			RM4ZLF-J1	DIODE	
R263		*	RD14BB2C163J	RD 16K J 1/6W		D24			MA3056WA	ZENER DIODE	
R264			RD14BB2C103J	RD 10K J 1/6W		D25			RD7.5JS(B)	ZENER DIODE	
R265		*	RD14BB2C913J	RD 91K J 1/6W		D26			RD16JS(B)	ZENER DIODE	
R266		*	RD14BB2C334J	RD 330K J 1/6W		D27,28			1SS133	DIODE	
R267			RD14BB2C103J	RD 10K J 1/6W		D30			RD10JS(B)	ZENER DIODE	
R268,269		*	RD14BB2C273J	RD 27K J 1/6W		D31,32			1SS133	DIODE	
R270			RD14BB2C473J	RD 47K J 1/6W		D34			1SS133	DIODE	
R271			RD14BB2C333J	RD 33K J 1/6W		D37-40			1SS133	DIODE	
R273			RD14BB2C223J	RD 22K J 1/6W		D41			FML22S	DIODE	
R274			RD14BB2C103J	RD 10K J 1/6W		D43			FML22R	DIODE	
R280			RD14BB2C103J	RD 10K J 1/6W		D45-48			1SS133	DIODE	
R281			RD14BB2C102J	RD 1.0K J 1/6W		D49,50			DA204K	DIODE	
R301,302			RK73FB2B682J	CHIP R 6.8K J 1/8W		D54			RD10JS(B)	ZENER DIODE	
R320		*	RD14BB2C513J	RD 51K J 1/6W		D55-60			1SS133	DIODE	
R321		*	RD14BB2C562J	RD 5.6K J 1/6W		D71,72			RD8.2JS(B)	ZENER DIODE	K1E1
R322			RD14BB2C243J	RD 24K J 1/6W		D73,74			DA204K	DIODE	K1E1
R323,324		*	RD14BB2C273J	RD 27K J 1/6W		D78			1SS133	DIODE	
R325,326		*	RD14BB2C562J	RD 5.6K J 1/6W		D100			B30-1669-05	LED	
R327,328		*	RD14BB2C510J	RD 51 J 1/6W		D101,102			1SS133	DIODE	
R331,332			RK73FB2B473J	CHIP R 47K J 1/8W	K1E1	D400			1SS133	DIODE	
R333,334			RK73FB2B224J	CHIP R 220K J 1/8W		IC1-3			NJM2058M	IC (OP AMP)	
R335,336			RK73FB2B224J	CHIP R 220K J 1/8W	K1E1	IC5			UPC494GS	ANALOGUE IC	
R337,338		*	RD14BB2C122J	RD 1.2K J 1/6W	K1E1	IC7			TC4052BF(N)	MOS-IC	K1E1
R339,340			RK73FB2B101J	CHIP R 100 J 1/8W	K1E1	Q1			2SD2375	TRANSISTOR	
R341-343			RK73FB2B102J	CHIP R 1.0K J 1/8W	K1E1	Q2			2SB1548(P)	TRANSISTOR	
R400			RD14BB2C102J	RD 1.0K J 1/6W		Q3,4			2SC945(A)(Q,P)	TRANSISTOR	
R401		*	RD14BB2C123J	RD 12K J 1/6W		Q5,6			2SC1845(F,E)	TRANSISTOR	
R402			RD14BB2C103J	RD 10K J 1/6W		Q7,8			2SA992(F,E)	TRANSISTOR	
R403			RD14BB2C222J	RD 2.2K J 1/6W		Q11-16			FKV550T	FET	
R404		*	RD14BB2C123J	RD 12K J 1/6W		Q19,20			2SC945(A)(Q,P)	TRANSISTOR	
R405		*	RD14BB2C622J	RD 6.2K J 1/6W		Q21,22			2SA733(A)(Q,P)	TRANSISTOR	
R406			RD14BB2C222J	RD 2.2K J 1/6W		Q24,25			2SC945(A)(Q,P)	TRANSISTOR	
VR1			R31-0223-05	VARIABLE RESISTOR (100K : A)		Q26			2SA1534A(R,S)	TRANSISTOR	
VR2			R31-0229-05	VARIABLE RESISTOR (100K : C)		Q27			2SC945(A)(Q,P)	TRANSISTOR	
VR3,4			R12-0092-05	VARIABLE RESISTOR (220)		Q28			2SA733(A)(Q,P)	TRANSISTOR	
W350-353			R92-1252-05	CHIP R 0 OHM J 1/16W		Q29			2SC945(A)(Q,P)	TRANSISTOR	
W354,355			R92-2053-05	CHIP R 0 J 1/8W		Q34,35			2SC1845(F,E)	TRANSISTOR	
W356			R92-2053-05	CHIP R 0 J 1/8W	K1E1	Q36			2SA992(F,E)	TRANSISTOR	
W357,358			R92-1252-05	CHIP R 0 OHM J 1/16W		Q37			2SC1845(F,E)	TRANSISTOR	
W359,360			R92-2053-05	CHIP R 0 J 1/8W		Q38			2SA992(F,E)	TRANSISTOR	
W361-365			R92-1252-05	CHIP R 0 OHM J 1/16W		Q101-104			2SA992(F,E)	TRANSISTOR	
W367			R92-2053-05	CHIP R 0 J 1/8W		Q105,106			2SA1123(Q,R)	TRANSISTOR	
W368-370			R92-1252-05	CHIP R 0 OHM J 1/16W		Q107,108			2SC4137(V,W)	TRANSISTOR	
W371			R92-2053-05	CHIP R 0 J 1/8W		Q109-112			2SC2631(Q,R)	TRANSISTOR	
W381,382			R92-1252-05	CHIP R 0 OHM J 1/16W		Q113-116			2SC2235	TRANSISTOR	
W383-385			R92-2053-05	CHIP R 0 J 1/8W		Q117-120			2SA965	TRANSISTOR	
W386			R92-1252-05	CHIP R 0 OHM J 1/16W		Q121,122			2SC4467	TRANSISTOR	
S1			S62-0842-05	SLIDE SWITCH		Q123,124			2SA1694	TRANSISTOR	
S2			S62-0845-05	SLIDE SWITCH		Q125,126			2SC4467	TRANSISTOR	
S3			S31-2630-05	SLIDE SWITCH		Q127,128			2SA1694	TRANSISTOR	
						Q400,401			2SC945(A)(Q,P)	TRANSISTOR	

E1 : KAC-7251 (Europe) K1 : KAC-7251 (North America)

E2 : KAC-7201 (Europe) K2 : KAC-7201 (North America) M : KAC-7201 (Other Areas)

△ Indicates safety critical components.

PARTS LIST

* New parts

Parts without **Parts No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

AUDIO UNIT (X09-5600-1x)

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation	Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
Q402			2SA733(A)(Q,P)	TRANSISTOR							
Q403			2SC945(A)(Q,P)	TRANSISTOR							
TH1,2			PTH9M04BD222T	POSITIVE RESISTOR							
TH3			PTH9L04BD222TS	POSITIVE RESISTOR							
SWITCH UNIT (X16-2390-10)											
J1		*	E58-0966-05	RECTANGULAR RECEPTACLE	K1E1						
S1			S60-0807-05	ROTARY SWITCH	K1E1						
D1,2			1SS133	DIODE	K1E1						
CONTROL ASSY											
21	3A	*	A02-2728-02	PLASTIC CABINET	K1E1						
22	3A	*	A02-2729-02	PLASTIC CABINET	K1E1						
P	3A		N82-2008-45	BINDING HEAD TAPTITE SCREW	K1E1						
-		*	X16-2390-10	SWITCH UNIT	K1E1						

E1 : KAC-7251 (Europe) K1 : KAC-7251 (North America)

E2 : KAC-7201 (Europe) K2 : KAC-7201 (North America) M : KAC-7201 (Other Areas)

△ Indicates safety critical components.