


EXPLODED VIEW • PARTS LIST


DCP section

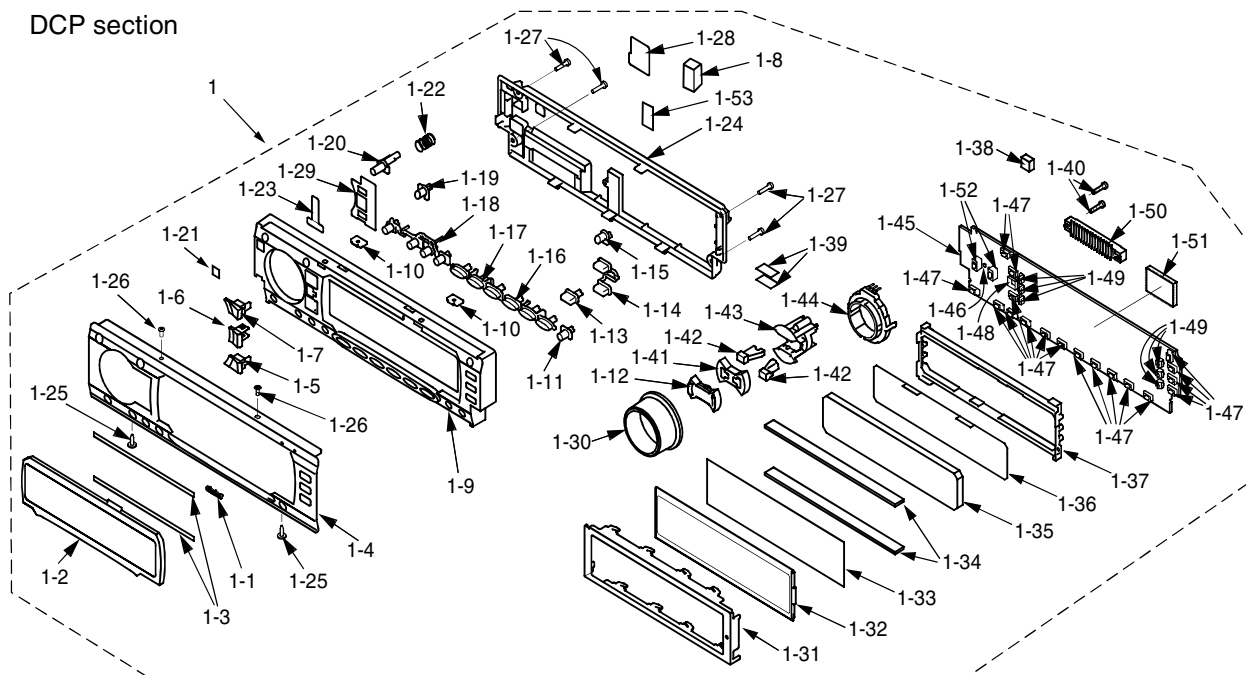

Note) Several different parts of the same reference number are alternative parts. One of those parts is used in the set.

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	DCP-335-600 DCP-336-600 DCP-334-600	DCP-ASSY(PE-2408B) DCP-ASSY(PE-2441B) DCP-ASSY(PE-2443B)	1	1-27	716-0872-12	PAD SCREW(M1.7x8)	4
1-2	373-0951-10 373-0951-40 373-0951-20	DIAL-CVR(PE-2408B) DIAL-CVR(PE-2441B) DIAL-CVR(PE-2443B)	1	1-28	347-6529-00	COVER FILM	1
1-3	347-6482-01	DOUBLE FACE	2	1-29	353-0535-00	SHADE	1
1-4	371-5691-00 371-5691-40 371-5691-05	FACE PANEL(PE-2408B) FACE PANEL(PE-2441B) FACE PANEL(PE-2443B)	1	1-30	947-0518-00 947-0518-01	KNOB-ASSY(PE-2408B/2441B) KNOB-ASSY(PE-2443B)	1
1-5	382-6106-00	BUTTON(BND)	1	1-31	331-3114-00	LCD-CVR	1
1-6	335-6494-00	IR-FILTER	1	1-32	379-1204-51 379-1206-51	INDICATOR(PE-2408B/2443B) INDICATOR(PE-2441B)	1
1-7	382-6105-00	BUTTON(FNC)	1	1-33	347-6484-00	FILM	1
1-8	345-8647-00	CUSHION	1	1-34	345-8608-00	RUBBER CONNECT	2
1-9	370-5934-01 370-5934-02 370-5934-00	ESCUTCHEON(PE-2408B) ESCUTCHEON(PE-2441B) ESCUTCHEON(PE-2443B)	1 1	1-35	335-6504-00	ILLUMI PLATE	1
1-10	331-3149-00	SCREW PLATE	2	1-36	347-6485-00	REFLECTOR	1
1-11	382-6115-00	BUTTON(Z-EHCR)	1	1-37	335-6503-00	LCD-HOLDR	1
1-12	382-6108-00	BUTTON(SRCH)	1	1-38	345-7560-00	RUBBER PART	1
1-13	382-6117-00	BUTTON(PRT)	1	1-39	347-6549-00	SPACER	2
1-14	382-6116-00	BUTTON(SCN/RDM)	1	1-40	716-0872-01	PAD SCREW	2
1-15	382-6119-00	BUTTON(EJECT)	1	1-41	345-8612-00	SPONGE	1
1-16	382-6113-00	BUTTON(4-6)	1	1-42	335-6496-00	PUSH LOD	2
1-17	382-6112-00	BUTTON(1-3)	1	1-43	335-6495-00	BUTTON-HOLDER	1
1-18	382-6111-00	BUTTON(PLY/PUSE)	1	1-44	013-8002-00	JOG ROTARY SW	1
1-19	382-6110-00	BUTTON(TTL)	1	1-45	039-1906-00	SW-PWB (WITHOUT COMPONENT)	1
1-20	382-6107-01	BUTTON(OPEN)	1	1-46	001-7045-91 001-7045-90	DIODE(PE-2408B/2441B) DIODE(PE-2443B)	1
1-21	347-6522-00	DOUBLE FACE	1	1-47	013-6518-50 013-6512-50	L-SWITCH(PE-2408B/2441B) L-SWITCH(PE-2443B)	18
1-22	750-3455-00	SPRING	1	1-48	060-4008-00	IR-RECEIVER	1
1-23	347-6491-00	SURGE FILM	1	1-49	001-7055-90	DIODE	6
1-24	335-6493-00	REAR-CVR	1	1-50	076-0647-00	PLUG	1
1-25	716-1809-01 716-1809-02	PAD SCREW(PE-2408B/2443B) PAD SCREW(PE-2441B)	2	1-51	051-6057-00	IC(ML9090-01)	1
1-26	716-3443-00 716-3443-01	SCREW(PE-2408B/2443B) SCREW(PE-2441B)	2	1-52	013-6302-50	SWITCH	2
				1-53	347-6628-00	FILM	1

Main section

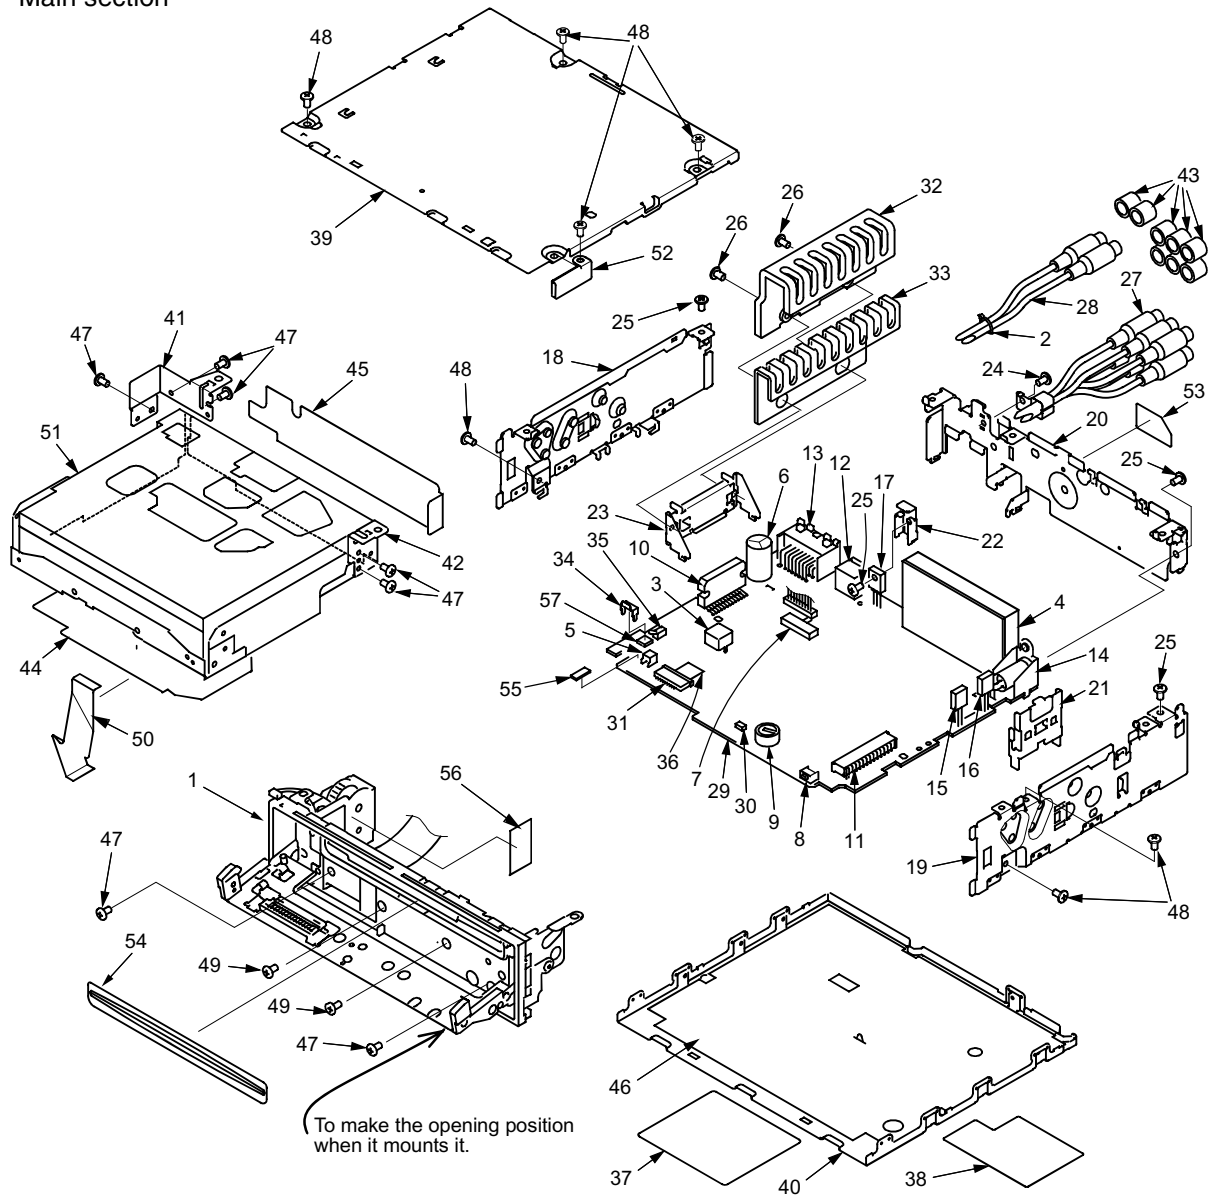


NO.	PART NO.	DESCRIPTION	Q'TY
1	-----	INNER-ES ASSY	1
2	335-0833-01	LEAD HOLDER	1
3	331-2869-00	SHIELD CASE	1
4	880-2087G	TUNER	1
5	076-0313-02	PLUG	1
6	042-0447-00 042-0547-04 042-0447-00	ALUMI-ELE-C(PE-2408B) ALUMI-ELE-C(PE-2441B) ALUMI-ELE-C(PE-2443B)	1
7	013-5102-00	SLIDE-SW(PE-2408B/2443B)	1
8	013-6100-00	SWITCH	1
9	042-0576-00	DOUBLE-LAYER-C	1
10	051-2031-10 051-2038-10	IC LA4743A(PE-2408B-A/2443B) IC LA47501(PE-2408B-B)	1
11	074-1186-26	OUTLET SOCKET	1
12	074-1194-00	OUTLET SOCKET	1
13	074-1214-00	OUTLET SOCKET	1
14	092-4000-51	ANT-RECEPT	1
15	101-0941-00	TRANSISTOR (2SB941)	1
16	103-2012-00	TRANSISTOR (2SD2012)	1

NO.	PART NO.	DESCRIPTION	Q'TY
17	102-3420-50	TRANSISTOR (2SC3420 G)	1
18	305-0274-01	SIDE-CVR(L)	1
19	305-0275-00	SIDE-CVR(R)	1
20	307-0616-03	REAR-CVR	1
21	313-1651-21	HEAT SINK	1
22	313-1715-20	HEAT SINK	1
23	331-2255-20	IC-HOLDER(PE-2408B/2443B)	1
24	731-3006-80	TAPTIGHT	1
25	714-3006-81	MACHINE SCREW	4
26	731-3008-89	TAPTIGHT(PE-2408B/2443B)	2
27	855-5424-50 855-5460-30 855-5424-50	RCA PIN CORD(PE-2408B) RCA PIN CORD(PE-2441B) RCA PIN CORD(PE-2443B)	1
28	855-5458-50 855-5461-30 855-5458-50	RCA PIN CORD(PE-2408B) RCA PIN CORD(PE-2441B) RCA PIN CORD(PE-2443B)	1
29	039-1905-01	MAIN PWB (WITHOUT COMPONENT)	1
30	001-7011-05	DIODE	1
31	074-1198-68	OUTLET SOCKET	1

NO.	PART NO.	DESCRIPTION	Q'TY
32	313-1813-00	HEAT SINK(PE-2408B/2443B)	1
33	313-1814-00	HEAT SINK(PE-2408B/2443B)	1
34	331-3223-00	SW-HOLDER	1
35	013-7106-00	DETECTOR SWITCH(C)	1
36	347-6215-00	SPACER-FILM	1
37	286-9600-00 286-9613-00 286-9597-00	SETPLATE(PE-2408B) SETPLATE(PE-2441B) SETPLATE(PE-2443B)	1
38	290-7672-00	LABEL	1
39	303-0472-00	UPPER-CVR	1
40	304-0460-01	LOWER-CVR	1
41	331-2493-00	CD-SUB-BRKT	1
42	331-2494-00	CD-SUB-BRKT	1
43	345-3799-20	RUBBER PART	8
44	347-5916-02	INSULATOR	1

NO.	PART NO.	DESCRIPTION	Q'TY
45	347-5917-00	INSULATOR	1
46	347-5918-00	INSULATOR	1
47	716-0717-10	STEEL SCREW	7
48	731-3006-80	TAPTIGHT(M3X8)	7
49	780-2005-00	SPECIAL SCREW	2
50	816-2391-00	FLAT CABLE	1
51	929-0092-82	CD-MECH-MODULE	1
52	331-2744-00	STOPPER	1
53	347-6245-00	FILM	1
54	346-0137-00	LEATHER SHEET	1
55	345-8627-00	CUSHION	1
56	347-6536-00	PROTECT SHEET	1
57	013-7206-50	DETECTOR SWITCH(O)	1

Inner-Es assy section

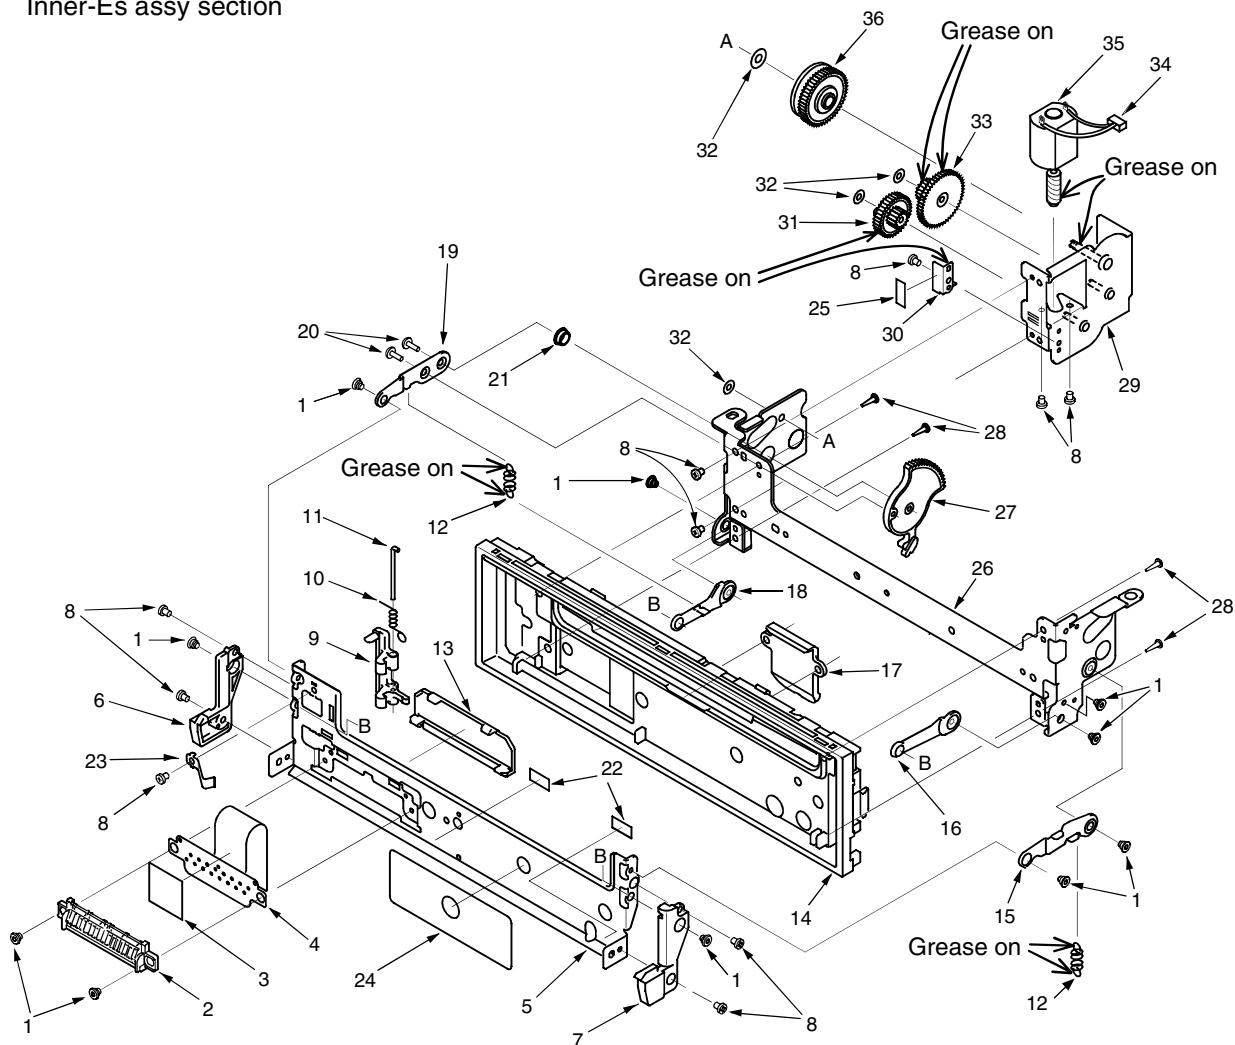


NO.	PART NO.	DESCRIPTION	Q'TY
1	716-1715-02	DECO-SCREW(M2)	10
2	074-1278-00	OUTLET SOCKET	1
3	347-6528-00	INSULATOR	1
4	039-1862-00	FPC	1
5	331-3115-00	DCP HOLDER	1
6	335-6507-00	ARM-COVER LEFT	1

NO.	PART NO.	DESCRIPTION	Q'TY
7	335-6508-00	ARM-COVER RIGHT	1
8	716-1468-20	SPECIAL SCREW(M2X2.5)	10
9	335-6506-00	HOOK	1
10	750-3431-01	SPRING(HOOK)	1
11	341-1736-00	SHAFT	1
12	750-3303-20	SPRING(ARM)	2

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
13	335-6499-00	CN-CVR	1	25	347-6275-00	FILM	1
14	370-5935-00	ESCUTCHEON INNER	1	26	309-0772-01	FRONT PLATE	1
15	331-3117-01	LEVER-UP(R)	1	27	613-0719-00	ARM GEAR	1
16	331-3118-01	LEVER-LO(R)	1	28	716-0872-00	PAD SCREW(M1.7X5)	4
17	335-6505-00	ILLUMI PLATE	1	29	946-0079-00	GEAR-BOX ASSY	1
18	331-3119-00	LEVER-LO(L)	1	30	750-3432-00	SPRING(MOTO)	1
19	331-3120-00	LEVER-UP(L)	1	31	613-0720-00	HUS-GEAR	1
20	716-1758-00	PAD SCREW(2X5)	2	32	746-0768-20	SPECIAL WASHER	4
21	341-1740-00	ROLLER(ARM)	1	33	613-0717-00	INPUT GEAR	1
22	347-6527-00	CUSHION	2	34	854-4380-01	EXTENSION LEAD	1
23	750-3457-00	SPRING	1	35	634-0023-00	MOTOR ASSY	1
24	291-0093-00	STICKER	1	36	947-0513-00	T-LIM-GEAR-ASSY	1


CD mechanism :Mecha chassis section

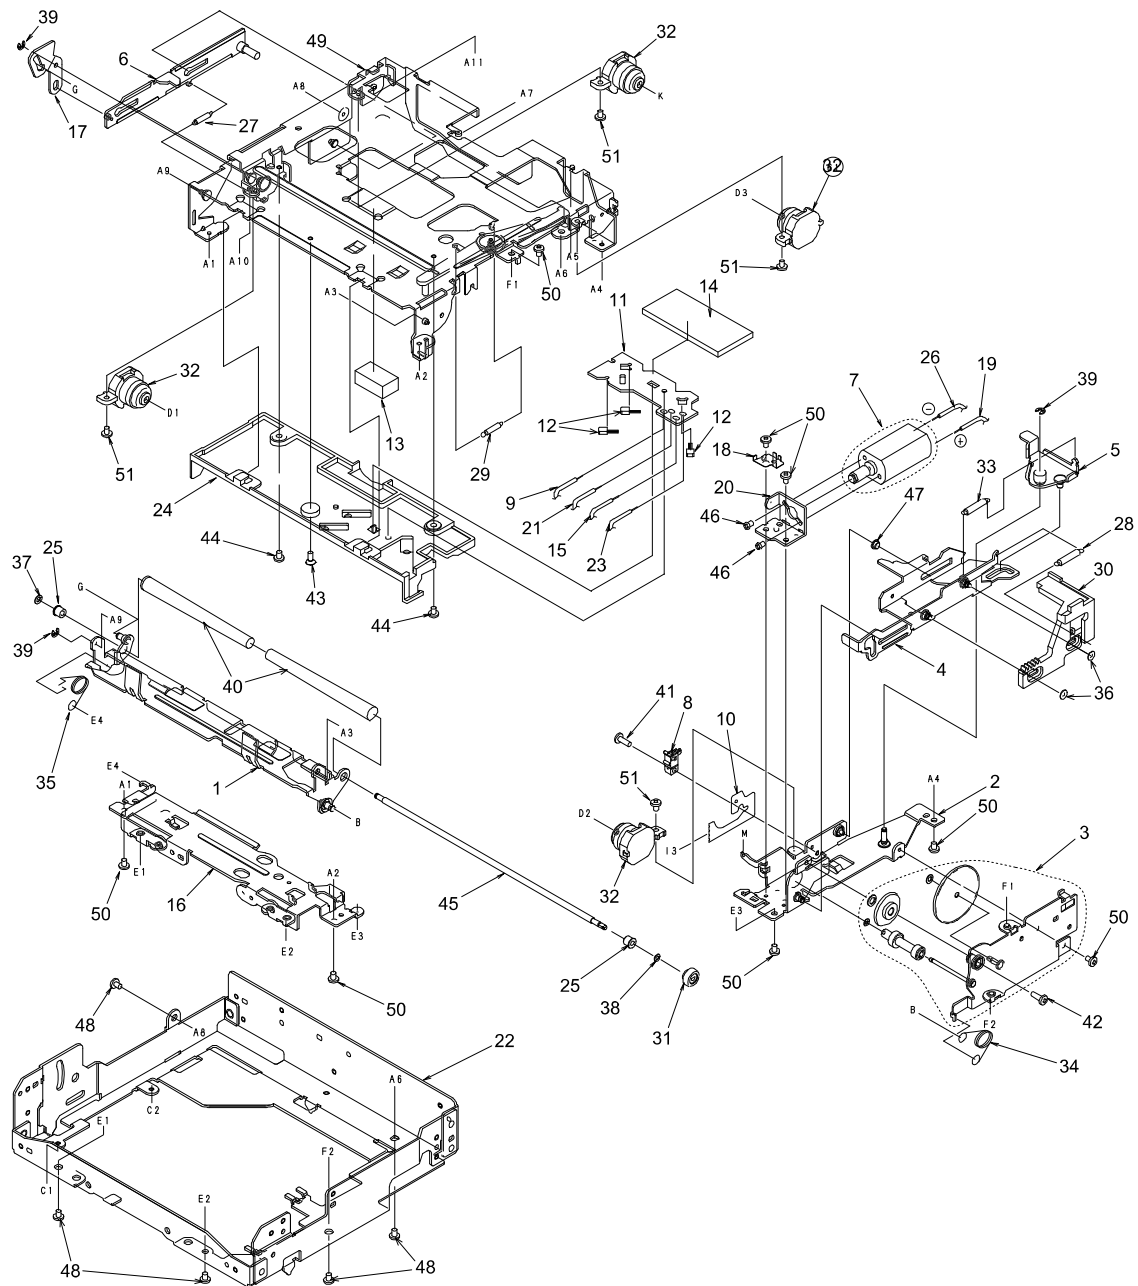

NO.	PART NO.	DESCRIPTION	Q'TY
1	966-0309-05	L-DISC-G-ASSY	1
2	966-0310-06	SHIFT-P-CH-ASSY	1
3	HBS-430-100	GEAR PLATE ASSY	1
4	966-0312-06	SHIFT-PLATE-ASSY	1
5	966-0358-01	DRIVE-L-PLATE-ASSY	1
6	966-0359-03	SIDE-L-PLATE-ASSY	1
7	SMA-147-100	MOTOR ASSY(LOADING)	1
8	013-3879-01	CHUCKING SWITCH	1
9	804-4910-60	VINYL-COAT-WIRE(YEL)	1
10	039-0586-01	CHUCKING SWITCH PWB (WITHOUT COMPONENT)	1
11	039-0588-01	SENSOR PWB (WITHOUT COMPONENT))	1
12	060-0252-01	PHOTO-TR	3
13	345-7513-01	CLAMPER SHEET	1
14	345-7514-00	SENSOR PWB SHEET	1
15	802-4910-60	VINYL-COAT-WIRE(RED)	1
16	620-0485-04	FRONT PLATE	1
17	620-0488-01	S-L-LINK PLATE	1
18	620-0489-02	MOTOR PLATE	1
19	802-4904-60	VINYL-COAT-WIRE(RED)	1
20	620-0492-01	MOTOR BRACKET	1
21	801-4910-60	VINYL-COAT-WIRE(BRN)	1
22	620-0773-01	CD-MECH-BRKT	1
23	800-4910-60	VINYL-COAT-WIRE(BLK)	1
24	621-0402-01	U-DISC GUIDE-F	1
25	621-0243-02	ROLLER SLEEVE	2

NO.	PART NO.	DESCRIPTION	Q'TY
26	800-4904-60	VINYL-COAT-WIRE(BLK)	1
27	750-3189-00	SIDE-L-SPRING	1
28	750-3098-00	L-LINK SPRING	1
29	750-3094-00	S-ARM SPRING	1
30	621-0248-07	RACK GEAR	1
31	621-0249-02	ROLLER GEAR	1
32	629-0074-00	DAMPER	4
33	750-3092-03	SHIFT SPRING	1
34	750-3091-03	ROADING-SPRING-R	1
35	750-3090-02	ROADING-SPRING-L	1
36	746-0877-02	WASHER	2
37	746-0762-00	WASHER	1
38	746-0712-03	WASHER	1
39	743-1500-10	E-RING	3
40	621-0258-03	LOADING ROLLER	2
41	716-1742-00	SCREW(M2×5)	1
42	716-1704-00	SCREW(M2×7)	1
43	716-1677-00	SCREW(M2×5)	1
44	716-1507-00	SCREW(M2×3)	2
45	622-1072-05	ROLLER SHAFT	1
46	716-1468-00	SCREW(M2×2.5)	2
47	622-1219-01	SHIFT ROLLER	1
48	714-2603-81	SCREW(M2.6×3)	5
49	966-0308-11	CHASSIS ASSY	1
50	714-2003-81	SCREW(M2×3)	8
51	716-1670-00	SCREW(M2×4)	4

Drive unit section

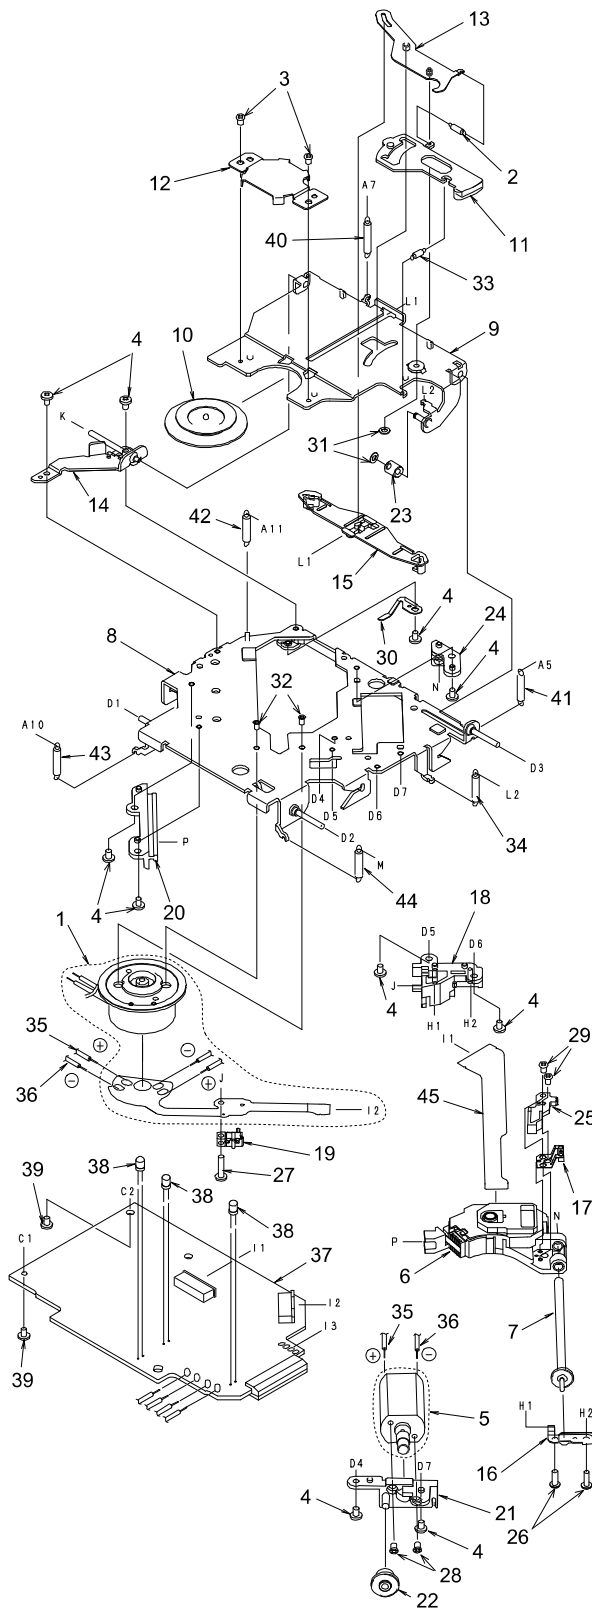

NO.	PART NO.	DESCRIPTION	Q'TY
1	SMA-151-100	MOTOR ASSY(SPINDLE)	1
2	750-3098-00	L-LINK SPRING	1
3	716-1468-00	SCREW(M2×2.5)	2
4	716-2003-81	SCREW(M2×3)	10
5	SMA-146-100	MOTOR ASSY(SLED)	1
6	969-0008-00	PICK UP UNIT	1
7	HBS-432-100	LS-GEAR ASSY	1
8	966-0447-07	DR-PLATE-ASSY	1
9	966-0449-04	CLAMP-LINK-ASSY	1
10	621-0205-02	CLAMPER RING	1
11	621-0251-03	LOCK LINK	1
12	620-0198-03	CLAMPER PLATE	1
13	966-0314-01	STOP LINK-ASSY	1
14	966-0448-01	SIDE PLATE-ASSY	1
15	621-0252-03	DISC STOPPER	1
16	620-0491-03	SPRING PLATE	1
17	966-0454-00	SCREW H-RACK-ASSY	1
18	621-0358-02	LS-HOLDER-F	1
19	013-7100-00	SWITCH(LIMIT)	1
20	621-0357-03	PICK UP GUIDE	1
21	621-0253-02	MOTOR HOLDER	1
22	621-0255-02	SECOND GEAR	1
23	622-1073-02	CLAMPER ROLLER	1
24	621-0359-02	LS-HOLDER-R	1
25	621-0375-00	SH-BASE	1
26	716-0675-00	SCREW(M2×5.5)	2
27	716-1555-00	WAVE SCREW(Φ2×8)	1
28	732-2004-11	SEMS SCREW(M2×4)	2
29	739-1735-17	PRECISION SCREW (M1.7×3.5)	2
30	620-0690-01	RATTLE PLATE	1
31	746-0761-00	WASHER	2
32	716-1733-00	SCREW(M1.7×2.3)	2
33	750-3099-00	ES-SPRING	1
34	750-3097-03	CLAMPER SPRING	1
35	816-2373-00	LEAD WIRE(WHT)	1
36	816-2372-00	LEAD WIRE(BLU)	1
37	039-1732-01	CD PWB (WITHOUT COMPONENT)	1
38	001-0563-00	LED	3
39	716-1670-00	SCREW(M2×4)	2
40	750-3202-00	CENTER SPRING-B	1
41	750-3096-01	DR-SPRING R	1
42	750-3164-00	DR-SPRING LR	1
43	750-3188-00	DR-SPRING F-B	1
44	750-3201-00	DR-SPRING F-R	1
45	039-1587-00	FPC (WITHOUT COMPONENT)	1

ELECTRICAL PARTS LIST

Main PWB(B1) section

Note) Several different parts of the same reference number are alternative parts.

One of those parts is used in the set.

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
BL 1	880-2087G	TUNER PACK	C 283	042-0631-50	10V100 μ F	C 551	168-1032-05	0.01 μ F
C 1	166-1011-00	100pF CH	C 284	168-2232-05	0.022 μ F	C 553	042-0423-00	10V3.3 μ F
C 4	042-0592-73	50V1 μ F	C 285	168-1042-78	16V 0.1 μ F	C 554	168-1042-78	16V 0.1 μ F
C 7	183-4763-31	16V47 μ F	C 286	168-2212-05	220pF	C 556	168-1042-78	16V 0.1 μ F
C 8	168-2232-05	0.022 μ F	C 287	168-1042-78	16V 0.1 μ F	C 557	042-0416-02	10V10 μ F TAN
C 9	166-1011-00	100pF CH	C 302	042-0592-58	16V10 μ F	C 558	042-0416-02	10V10 μ F TAN
C 10	168-6822-05	6800pF	C 304	042-0592-58	16V10 μ F	C 559	168-1042-78	16V 0.1 μ F
C 11	183-1073-21	10V100 μ F	C 305	042-0592-58	16V10 μ F	C 560	042-0397-00	16V1 μ F TAN
C 12	183-4763-31	16V47 μ F	C 306	042-0592-58	16V10 μ F	C 561	168-1022-05	1000pF
C 14	166-2096-00	2pF CK	C 308	042-0592-58	16V10 μ F	C 562	168-1042-78	16V 0.1 μ F
C 15	168-1022-05	1000pF	C 309	042-0592-58	16V10 μ F	C 564	166-4701-00	47pF CH
C 16	168-1042-78	16V 0.1 μ F	C 310	042-0592-58	16V10 μ F	C 601	166-1011-00	100pF CH
C 18	163-1053-60	50V1 μ F	C 311	042-0592-58	16V10 μ F	C 605	042-0505-00	25V 1 μ F
C 20	163-4763-10	6.3V47 μ F	C 312	042-0592-58	16V10 μ F	C 606	168-4732-78	0.047 μ F
C 22	166-1011-00	100pF CH	C 313	042-0592-58	16V10 μ F	C 613	042-0576-00	5.5V0.1F
C 23	166-1011-00	100pF CH	C 405	042-0592-74	50V 2.2 μ F	C 614	168-1032-05	0.01 μ F
C 24	166-3311-00	330pF CH	C 406	042-0592-74	50V 2.2 μ F	C 615	042-0577-00	6.3V100 μ F
C 25	166-1501-00	15pF CH	C 407	042-0592-74	50V 2.2 μ F	C 616	163-1063-30	16V10 μ F
C 26	166-1501-00	15pF CH	C 408	042-0592-74	50V 2.2 μ F	C 617	168-1022-05	1000pF
C 27	168-1032-05	0.01 μ F	C 409	042-0592-50	6.3V22 μ F	C 619	168-4732-78	0.047 μ F
C 28	168-1032-05	0.01 μ F	C 410	042-0592-50	6.3V22 μ F	C 620	178-2242-78	0.22 μ F
C 29	168-2232-05	0.022 μ F	C 411	042-0592-50	6.3V22 μ F	C 630	166-1011-00	100pF CH
C 30	168-2732-05	16V 0.027 μ F	C 412	042-0592-50	6.3V22 μ F	C 631	166-1011-00	100pF CH
C 31	168-2732-05	16V 0.027 μ F	C 413	042-0592-50	6.3V22 μ F	C 632	168-1032-05	0.01 μ F
C 55	166-2201-00	22pF CH	C 414	042-0592-50	6.3V22 μ F	C 633	168-1032-05	0.01 μ F
C 66	166-2201-00	22pF CH	C 415	168-4732-78	0.047 μ F	C 635	168-1042-78	16V 0.1 μ F
C 67	168-1032-05	0.01 μ F	C 416	168-4732-78	0.047 μ F	C 904	168-1032-05	0.01 μ F
C 68	168-2232-05	0.022 μ F	C 417	042-0592-58	16V10 μ F	C 905	168-1032-05	0.01 μ F
C 101	178-4742-78	0.47 μ F	C 418	042-0592-58	16V10 μ F	C 907	168-1032-05	0.01 μ F
C 102	178-4742-78	0.47 μ F	C 419	042-0592-58	16V10 μ F	C 908	168-1022-05	1000pF
C 103	178-4742-78	0.47 μ F	C 420	042-0592-58	16V10 μ F	C 909	168-1022-05	1000pF
C 104	178-4742-78	0.47 μ F	C 421	042-0592-58	16V10 μ F	C 911	168-1022-05	1000pF
C 106	163-4763-30	16V47 μ F	C 422	042-0592-58	16V10 μ F	C 914	168-1022-05	1000pF
C 107	183-3343-61	50V0.33 μ F	C 423	042-0592-58	16V10 μ F	C 915	168-1032-05	0.01 μ F
C 108	163-2263-30	16V22 μ F	C 424	042-0592-58	16V10 μ F	C 917	168-1032-05	0.01 μ F
C 109	043-0506-00	0.1 μ F	C 430	163-1063-30	16V10 μ F	D 101	001-2403-90	M1F60
C 109	172-3331-15	0.033 μ F (PE-2408B-B)	C 431	042-0563-71	16V100 μ F	D 102	001-2403-90	M1F60
C 110	043-0506-00	0.1 μ F	C 433	166-2201-00	22pF CH	D 103	001-2403-90	M1F60
C 110	172-3331-15	0.033 μ F (PE-2408B-B)	C 434	166-2201-00	22pF CH	D 104	001-2403-90	M1F60
C 111	043-0506-00	0.1 μ F	C 435	166-2201-00	22pF CH	D 105	001-2403-90	M1F60
C 111	172-3331-15	0.033 μ F (PE-2408B-B)	C 436	166-2201-00	22pF CH	D 106	001-2403-90	M1F60
C 112	043-0506-00	0.1 μ F	C 437	166-2201-00	22pF CH	D 107	001-2403-90	M1F60
C 112	172-3331-15	0.033 μ F (PE-2408B-B)	C 438	166-2201-00	22pF CH	D 108	001-2403-90	M1F60
C 113	183-3353-61	50V 1 μ F (PE-2408B-B)	C 439	168-2222-05	2200pF	D 201	001-0592-00	RM4Z
C 114	166-8201-50	82pF CH	C 440	168-2222-05	2200pF	D 203	001-0503-46	HZS9B2L
C 116	168-1022-05	1000pF	C 441	168-2222-05	2200pF	D 211	001-0516-00	MA111
C 201	042-0447-00	16V2200 μ F	C 442	168-2222-05	2200pF	D 212	001-0516-00	MA111
C 202	172-2231-11	0.022 μ F	C 443	168-2222-05	2200pF	D 221	001-0466-00	S5688B
C 203	042-0563-71	16V100 μ F	C 444	168-2222-05	2200pF	D 222	001-0466-00	S5688B
C 204	183-2263-31	16V22 μ F	C 502	042-0592-74	50V 2.2 μ F	D 223	001-0516-00	MA111
C 205	168-4732-78	0.047 μ F	C 504	042-0592-74	50V 2.2 μ F	D 224	001-0466-01	S5688G
C 210	042-0592-50	6.3V22 μ F	C 507	042-0592-74	50V 2.2 μ F	D 225	001-0466-01	S5688G
C 211	163-2263-30	16V22 μ F	C 508	168-1042-78	16V 0.1 μ F	D 228	001-0377-11	MA4030M
C 216	042-0452-02	16V100 μ F	C 509	042-0592-74	50V 2.2 μ F	D 229	001-0377-11	MA4030M
C 222	183-4763-31	16V47 μ F	C 510	168-1042-78	16V 0.1 μ F	D 229	001-0466-00	S5688B
C 223	168-2232-05	0.022 μ F	C 511	168-1042-78	16V 0.1 μ F	D 230	001-0466-00	S5688B
C 224	172-4731-11	0.047 μ F	C 512	168-1042-78	16V 0.1 μ F	D 231	001-0466-00	S5688B
C 230	042-0631-50	10V100 μ F	C 513	168-4732-78	0.047 μ F	D 241	001-0503-46	HZS9B2L
C 241	183-1063-31	16V10 μ F	C 517	042-0592-58	16V10 μ F	D 280	001-2606-90	M1FS4
C 243	183-1073-21	10V100 μ F	C 521	042-0592-58	16V10 μ F	D 401	001-0516-00	MA111
C 244	183-1073-12	6.3V100 μ F	C 523	042-0592-58	16V10 μ F	D 402	001-0516-00	MA111
C 245	168-1042-78	16V 0.1 μ F	C 530	042-0592-74	50V 2.2 μ F	D 403	001-0528-44	MA8082-M
C 280	042-0416-02	10V10 μ F TAN	C 531	042-0592-74	50V 2.2 μ F	D 404	001-0516-00	MA111
C 281	042-0452-01	10V220 μ F	C 532	042-0592-58	16V10 μ F	D 405	001-0516-00	MA111
C 282	042-0631-50	10V100 μ F	C 533	042-0592-58	16V10 μ F	D 501	001-0528-34	MA8062-L
			C 534	042-0592-58	16V10 μ F	D 603	001-0516-00	MA111
			C 535	042-0592-58	16V10 μ F	D 610	001-0516-00	MA111
			C 536	042-0592-74	50V 2.2 μ F	D 651	001-7011-05	CL-150FG-CD
			C 537	042-0592-74	50V 2.2 μ F	D 903	001-0516-00	MA111
			C 550	168-1042-78	16V 0.1 μ F	FIL 401	060-3104-00	NFM41P11C204

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
IC 1	051-6201-00	LC72146M	Q 243	100-1298-00	2SA1298	R 243	119-1031-10	1/16W 10kΩ
IC 101	051-2031-10	LA4743A	Q 244	125-0002-02	RN2402	R 246	119-1031-10	1/16W 10kΩ
IC 101	051-2038-10	LA47501 (PE-2408B-B)	Q 245	125-2004-06	RN1406	R 247	119-1011-10	1/16W 100Ω
IC 220	051-3201-00	AN77L06	Q 246	100-1298-00	2SA1298	R 248	119-1031-10	1/16W 10kΩ
IC 230	051-1014-05	TA7291F	Q 247	125-2004-03	RN1403	R 249	032-0104-67	1/4W 1.2kΩ
IC 280	051-3605-00	NJM2360AM	Q 248	125-2004-03	RN1403	R 250	119-1031-10	1/16W 10kΩ
IC 302	051-3034-90	NJM4558V	Q 249	125-2004-03	RN1403	R 251	032-0104-67	1/4W 1.2kΩ
IC 303	051-7232-08	74VHC4066M	Q 250	103-2012-00	2SD2012	R 252	032-0104-69	1/4W 1.5kΩ
IC 401	051-3034-90	NJM4558V	Q 252	125-2004-06	RN1406	R 253	119-4711-10	1/16W 470Ω
IC 402	051-3034-90	NJM4558V	Q 307	125-0002-06	RN2406	R 254	119-0000-00	1/16W 0Ω JW
IC 403	051-3034-90	NJM4558V	Q 308	125-2004-03	RN1403	R 256	032-0104-67	1/4W 1.2kΩ
IC 404	051-6327-08	LC89051VD	Q 401	103-1306-00	2SD1306	R 257	032-0104-67	1/4W 1.2kΩ
IC 405	051-6370-08	AK4380VT	Q 402	103-1306-00	2SD1306	R 260	119-2721-10	1/16W 2.7kΩ
IC 406	051-3034-90	NJM4558V	Q 403	103-1306-00	2SD1306	R 261	119-1031-10	1/16W 10kΩ
IC 407	051-3034-90	NJM4558V	Q 404	103-1306-00	2SD1306	R 281	119-2291-15	1/16W2.2Ω
IC 408	051-3034-90	NJM4558V	Q 405	103-1306-00	2SD1306	R 282	119-2291-15	1/16W2.2Ω
IC 501	051-5020-00	M61508FP	Q 406	103-1306-00	2SD1306	R 283	119-2721-10	1/16W 2.7kΩ
IC 502	051-6600-38	CA0008AM	Q 414	125-2004-06	RN1406	R 284	119-1531-10	1/16W 15kΩ
IC 504	052-3368-00	M30624MGA-D65GP	Q 415	102-2712-00	2SC2712	R 311	119-1021-10	1/16W 1kΩ
IC 505	051-5407-18	S-80721SN-DJ-T1	Q 416	125-0002-06	RN2406	R 331	119-1041-10	1/16W 100kΩ
IC 506	051-0869-55	NJM2103M	Q 602	125-2004-03	RN1403	R 332	119-1041-10	1/16W 100kΩ
J 201	074-1214-00	16P	Q 603	100-1162-00	2SA1162	R 333	119-1041-10	1/16W 100kΩ
J 601	074-1194-00	13P CE-NET	Q 617	125-2004-03	RN1403	R 334	119-1041-10	1/16W 100kΩ
J 602	074-1198-18	18P	R 1	119-1021-10	1/16W 1kΩ	R 335	119-1041-10	1/16W 100kΩ
J 604	076-0313-02	2P	R 7	119-1231-10	1/16W 12kΩ	R 336	119-1041-10	1/16W 100kΩ
J 902	074-1186-26	26P	R 8	119-1031-10	1/16W 10kΩ	R 337	119-1041-10	1/16W 100kΩ
L 1	010-2199-40	220μH J	R 9	119-4741-10	1/16W 470kΩ	R 338	119-1041-10	1/16W 100kΩ
L 2	010-2285-08	BLM21A102FPB	R 10	119-2221-10	1/16W 2.2kΩ	R 339	119-4731-10	1/16W 47kΩ
L 3	010-2285-08	BLM21A102FPB	R 14	119-5631-10	1/16W 56kΩ	R 340	119-1011-10	1/16W 100Ω
L 52	010-4046-00	30μH	R 15	119-1031-10	1/16W 10kΩ	R 341	119-1011-10	1/16W 100Ω
L 211	010-2174-16	22μH	R 16	119-2221-10	1/16W 2.2kΩ	R 342	119-1011-10	1/16W 100Ω
L 280	010-2199-78	22μH J	R 18	119-1031-10	1/16W 10kΩ	R 343	119-1011-10	1/16W 100Ω
L 281	010-2199-78	22μH J	R 19	119-1031-10	1/16W 10kΩ	R 402	119-0000-00	1/16W 0Ω JW
L 282	010-6003-03	270μH	R 21	119-1021-10	1/16W 1kΩ	R 403	119-0000-00	1/16W 0Ω JW
L 283	010-2285-56	BLM21B222S	R 24	119-1521-10	1/16W 1.5kΩ	R 404	119-0000-00	1/16W 0Ω JW
L 408	010-2285-08	BLM21A102FPB	R 25	119-1521-10	1/16W 1.5kΩ	R 405	119-0000-00	1/16W 0Ω JW
L 409	010-2285-08	BLM21A102FPB	R 26	119-1031-10	1/16W 10kΩ	R 409	117-1021-10	1/10W 1kΩ
L 410	010-2285-08	BLM21A102FPB	R 27	119-1021-10	1/16W 1kΩ	R 410	117-1021-10	1/10W 1kΩ
L 411	010-2285-08	BLM21A102FPB	R 28	119-1021-10	1/16W 1kΩ	R 411	117-2231-10	1/10W 22kΩ
L 412	010-2285-08	BLM21A102FPB	R 29	119-8211-10	1/16W 820Ω	R 412	117-2231-10	1/10W 22kΩ
L 413	010-2285-08	BLM21A102FPB	R 30	119-1041-10	1/16W 100kΩ	R 413	119-1031-10	1/16W 10kΩ
L 414	010-2285-08	BLM21A102FPB	R 83	119-2221-10	1/16W 2.2kΩ	R 414	119-1031-10	1/16W 10kΩ
L 501	010-2199-78	22μH J	R 84	119-0000-00	1/16W 0Ω JW	R 415	117-1021-10	1/10W 1kΩ
L 502	010-2199-78	22μH J	R 101	119-1231-10	1/16W 12kΩ	R 416	117-1021-10	1/10W 1kΩ
L 505	010-2285-56	BLM21B222S	R 102	119-1031-10	1/16W 10kΩ	R 417	117-1021-10	1/10W 1kΩ
L 601	010-2198-56	2.2μH	R 103	119-0000-00	1/16W 0Ω JW	R 418	117-1021-10	1/10W 1kΩ
L 602	010-2198-56	2.2μH	R 210	119-1031-10	1/16W 10kΩ	R 419	119-1041-10	1/16W 100kΩ
L 603	010-2198-56	2.2μH	R 211	119-4731-10	1/16W 47kΩ	R 420	119-1041-10	1/16W 100kΩ
L 604	010-2198-56	2.2μH	R 212	119-1531-10	1/16W 15kΩ	R 421	119-1041-10	1/16W 100kΩ
Q 6	100-1162-00	2SA1162	R 213	119-1031-10	1/16W 10kΩ	R 422	119-1041-10	1/16W 100kΩ
Q 7	100-1162-00	2SA1162	R 214	119-4731-10	1/16W 47kΩ	R 423	117-2231-10	1/10W 22kΩ
Q 8	125-2004-03	RN1403	R 215	119-2221-10	1/16W 2.2kΩ	R 424	119-1031-10	1/16W 10kΩ
Q 201	102-3420-50	2SC3420GR,BL	R 216	119-2221-10	1/16W 2.2kΩ	R 425	119-1031-10	1/16W 10kΩ
Q 202	108-0241-50	2SK241Y,GR	R 220	119-1031-10	1/16W 10kΩ	R 426	117-2231-10	1/10W 22kΩ
Q 210	125-0013-07	RN2427	R 221	119-3921-10	1/16W 3.9kΩ	R 427	119-1031-10	1/16W 10kΩ
Q 211	125-2004-06	RN1406	R 222	119-1801-10	1/16W 18Ω	R 428	119-1031-10	1/16W 10kΩ
Q 212	100-1162-00	2SA1162	R 223	119-1031-10	1/16W 10kΩ	R 429	117-2231-10	1/10W 22kΩ
Q 213	102-2712-00	2SC2712	R 224	032-0104-63	1/4W 1.5Ω	R 430	117-2231-10	1/10W 22kΩ
Q 222	100-1162-00	2SA1162	R 224	111-4700-91	1/4WS 47Ω	R 431	119-2231-10	1/16W 22kΩ
Q 223	125-2004-03	RN1403	R 225	032-0104-63	1/4W 1.5Ω	R 432	119-2231-10	1/16W 22kΩ
Q 224	101-0941-00	2SB941	R 225	111-4700-91	1/4WS 47Ω	R 433	119-2231-10	1/16W 22kΩ
Q 225	100-1162-00	2SA1162	R 226	119-4731-10	1/16W 47kΩ	R 434	119-2231-10	1/16W 22kΩ
Q 226	102-2712-00	2SC2712	R 227	119-3321-10	1/16W 3.3kΩ	R 435	119-2231-10	1/16W 22kΩ
Q 227	101-1237-50	2SB1237QR	R 228	119-3321-10	1/16W 3.3kΩ	R 436	119-2231-10	1/16W 22kΩ
Q 228	125-2004-03	RN1403	R 229	032-0104-63	1/4W 1.5Ω	R 437	119-3311-10	1/16W 330Ω
Q 229	100-1416-00	2SA1416	R 230	119-2231-10	1/16W 22kΩ	R 438	119-3311-10	1/16W 330Ω
Q 230	100-1162-00	2SA1162	R 231	032-0104-63	1/4W 1.5Ω	R 439	119-3311-10	1/16W 330Ω
Q 231	100-1416-00	2SA1416	R 232	119-0000-00	1/16W 0Ω JW	R 440	119-3311-10	1/16W 330Ω
Q 232	101-1237-50	2SB1237QR	R 236	119-1031-10	1/16W 10kΩ	R 441	119-3311-10	1/16W 330Ω
Q 235	125-2004-03	RN1403	R 238	119-3321-10	1/16W 3.3kΩ	R 442	119-3311-10	1/16W 330Ω
Q 236	100-1162-00	2SA1162	R 239	119-1221-10	1/16W 1.2kΩ	R 443	119-1021-10	1/16W 1kΩ
Q 239	125-2004-06	RN1406	R 240	032-0104-73	1/4W 330Ω	R 444	119-1021-10	1/16W 1kΩ
Q 240	125-2004-03	RN1403	R 241	119-1031-10	1/16W 10kΩ	R 445	119-1021-10	1/16W 1kΩ
			R 242	032-0104-73	1/4W 330Ω	R 446	032-0140-50	1/16W 10kΩ 1%

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R 447	032-0140-56	1/16W 51kΩ 1%	R 517	119-1021-10	1/16W 1kΩ	R 644	119-1541-10	1/16W 150kΩ
R 448	119-2231-10	1/16W 22kΩ	R 525	032-0140-52	1/16W 33kΩ 1%	R 645	119-8221-10	1/16W 8.2kΩ
R 449	119-3311-10	1/16W 330Ω	R 526	032-0140-52	1/16W 33kΩ 1%	R 646	119-4321-15	1/16W 4.3kΩ
R 450	032-0140-50	1/16W 10kΩ 1%	R 527	032-0140-52	1/16W 33kΩ 1%	R 647	119-0000-00	1/16W 0Ω JW
R 451	032-0140-56	1/16W 51kΩ 1%	R 528	032-0140-52	1/16W 33kΩ 1%	R 651	119-1011-10	1/16W 100Ω
R 452	119-3311-10	1/16W 330Ω	R 529	032-0140-89	1/4W 47kΩ 1%	R 652	119-1811-10	1/16W 180Ω
R 453	032-0140-50	1/16W 10kΩ 1%	R 530	032-0140-89	1/4W 47kΩ 1%	R 653	119-1811-10	1/16W 180Ω
R 454	032-0140-56	1/16W 51kΩ 1%	R 531	032-0140-89	1/4W 47kΩ 1%	R 654	119-1811-10	1/16W 180Ω
R 455	119-2231-10	1/16W 22kΩ	R 532	032-0140-89	1/4W 47kΩ 1%	R 655	119-0000-00	1/16W 0Ω JW
R 456	032-0140-50	1/16W 10kΩ 1%	R 533	119-1041-10	1/16W 100kΩ	R 657	119-1811-10	1/16W 180Ω
R 457	032-0140-56	1/16W 51kΩ 1%	R 534	119-1041-10	1/16W 100kΩ	R 658	119-1521-10	1/16W 1.5kΩ
R 458	032-0140-50	1/16W 10kΩ 1%	R 550	119-2711-10	1/16W 270Ω	R 659	119-0000-00	1/16W 0Ω JW
R 459	032-0140-56	1/16W 51kΩ 1%	R 551	119-2711-10	1/16W 270Ω	R 660	119-0000-00	1/16W 0Ω JW
R 460	119-2231-10	1/16W 22kΩ	R 552	119-2711-10	1/16W 270Ω	R 661	119-0000-00	1/16W 0Ω JW
R 461	119-3311-10	1/16W 330Ω	R 553	119-3341-10	1/16W 330kΩ	R 662	119-0000-00	1/16W 0Ω JW
R 462	032-0140-50	1/16W 10kΩ 1%	R 554	119-2431-10	1/16W 24kΩ	R 663	119-0000-00	1/16W 0Ω JW
R 463	032-0140-56	1/16W 51kΩ 1%	R 555	119-2421-15	1/16W 2.4kΩ	R 667	119-0000-00	1/16W 0Ω JW
R 464	119-3311-10	1/16W 330Ω	R 556	119-5121-15	1/16W 5.1kΩ	R 670	119-0000-00	1/16W 0Ω JW
R 465	032-0140-50	1/16W 10kΩ 1%	R 557	119-1511-10	1/16W 150Ω	R 671	119-4731-10	1/16W 47kΩ
R 466	032-0140-56	1/16W 51kΩ 1%	R 559	119-2711-10	1/16W 270Ω	R 672	119-0000-00	1/16W 0Ω JW
R 467	119-2231-10	1/16W 22kΩ	R 560	119-2711-10	1/16W 270Ω	R 674	032-0104-67	1/4W 1.2kΩ
R 468	032-0140-50	1/16W 10kΩ 1%	R 561	119-2711-10	1/16W 270Ω	R 677	119-1031-10	1/16W 10kΩ
R 469	032-0140-56	1/16W 51kΩ 1%	R 562	119-4701-10	1/16W 47Ω	R 678	119-1031-10	1/16W 10kΩ
R 474	119-0000-00	1/16W 0Ω JW	R 603	032-0104-64	1/4W 68Ω	R 680	119-0000-00	1/16W 0Ω JW
R 477	119-0000-00	1/16W 0Ω JW	R 604	119-3321-10	1/16W 3.3kΩ	R 681	119-0000-00	1/16W 0Ω JW
R 478	119-1041-10	1/16W 100kΩ	R 607	119-2231-10	1/16W 22kΩ	R 682	119-0000-00	1/16W 0Ω JW
R 479	119-1241-10	1/16W 120kΩ	R 608	119-1031-10	1/16W 10kΩ	R 683	119-0000-00	1/16W 0Ω JW
R 480	119-1021-10	1/16W 1kΩ	R 609	119-4731-10	1/16W 47kΩ	R 686	119-0000-00	1/16W 0Ω JW
R 481	119-1221-10	1/16W 1.2kΩ	R 610	119-4721-10	1/16W 4.7kΩ	R 687	119-0000-00	1/16W 0Ω JW
R 482	032-0104-58	1/4W 390Ω	R 625	119-1041-10	1/16W 100kΩ	R 689	119-0000-00	1/16W 0Ω JW
R 483	119-8221-10	1/16W 8.2kΩ	R 626	119-1041-10	1/16W 100kΩ	R 690	119-4721-10	1/16W 4.7kΩ
R 484	119-1021-10	1/16W 1kΩ	R 627	119-1041-10	1/16W 100kΩ	R 691	119-4721-10	1/16W 4.7kΩ
R 485	119-2231-10	1/16W 22kΩ	R 628	119-4731-10	1/16W 47kΩ	R 692	119-0000-00	1/16W 0Ω JW
R 486	119-1021-10	1/16W 1kΩ	R 637	119-1241-10	1/16W 120kΩ	S 401	013-5102-00	
R 487	119-1041-10	1/16W 100kΩ	R 638	119-4731-10	1/16W 47kΩ	S 601	013-6100-00	SKHLLB
R 488	119-1041-10	1/16W 100kΩ	R 639	119-4721-10	1/16W 4.7kΩ	S 602	013-7106-00	TKR00120670MM
R 492	119-0000-00	1/16W 0Ω JW	R 640	119-4731-10	1/16W 47kΩ	S 603	013-7206-50	SPPB530701
R 496	119-1021-10	1/16W 1kΩ	R 641	119-1831-10	1/16W 18kΩ	SUP 51	060-0122-20	DSP-141N-S00B
R 515	119-4721-10	1/16W 4.7kΩ	R 642	119-1031-10	1/16W 10kΩ	X 1	061-1066-00	7.2MHz
R 516	119-4721-10	1/16W 4.7kΩ	R 643	119-5621-10	1/16W 5.6kΩ	X 601	060-1505-50	10MHz

Switch PWB(B2) section

REF No.	PART No.	DESCRIPTION
C	705	042-0415-52 6.3V/10 μ F TAN
C	706	168-1042-78 16V 0.1 μ F
C	707	042-0415-52 6.3V/10 μ F TAN
C	708	042-0415-00 16V4.7 μ F TAN
C	710	168-1042-78 16V 0.1 μ F
C	711	042-0415-00 16V4.7 μ F TAN
D	701	001-40528-32 MA8056-M
D	704	001-7045-91 CL-165
D	713	001-7055-90 NSCWS405T
D	714	001-7055-90 NSCWS405T
D	715	001-7055-90 NSCWS405T
D	716	001-7055-90 NSCWS405T
D	717	001-7055-90 NSCWS405T
D	718	001-7055-90 NSCWS405T
IC	701	051-6057-00 ML9090A-01GA
IR	701	060-4008-00 RS171
LCD	701	379-1204-51 INDICATOR
P	701	076-0647-00 16P
Q	702	125-2017-07 RN1427
Q	702	125-2017-07 RN1427
Q	705	100-1162-00 25A1162
Q	706	102-2712-51 2SC2712G.L
R	705	119-3921-10 1/16W 3.9k Ω
R	707	119-1011-10 1/16W 100 Ω
R	708	119-1041-10 1/16W 100k Ω
R	714	032-0140-98 1/16W 120k Ω 1%
R	715	032-0140-98 1/16W 120k Ω 1%

REF No.	PART No.	DESCRIPTION
R	716	032-0140-98 1/16W 120k Ω 1%
R	717	032-0140-98 1/16W 120k Ω 1%
R	718	032-0140-98 1/16W 120k Ω 1%
R	719	032-0140-98 1/16W 120k Ω 1%
R	720	032-0140-98 1/16W 120k Ω 1%
R	721	032-0140-98 1/16W 120k Ω 1%
R	722	032-0140-98 1/16W 120k Ω 1%
R	723	032-0140-98 1/16W 120k Ω 1%
R	724	032-0140-98 1/16W 120k Ω 1%
R	725	032-0140-98 1/16W 120k Ω 1%
R	726	119-1221-10 1/16W 1.2k Ω
R	727	119-1221-10 1/16W 1.2k Ω
R	728	119-1521-10 1/16W 1.5k Ω
R	729	119-1521-10 1/16W 1.5k Ω
R	730	119-1221-10 1/16W 1.2k Ω
R	731	119-1221-10 1/16W 1.2k Ω
R	732	119-1221-10 1/16W 1.2k Ω
R	733	119-1221-10 1/16W 1.2k Ω
R	734	119-1221-10 1/16W 1.2k Ω
R	735	119-1221-10 1/16W 1.2k Ω
R	736	119-1521-10 1/16W 1.5k Ω
R	737	119-1521-10 1/16W 1.5k Ω
R	741	119-1221-10 1/16W 1.2k Ω
R	742	119-1221-10 1/16W 1.2k Ω
R	743	119-0000-00 1/16W 0 Ω JW
R	744	119-0000-00 1/16W 0 Ω JW
R	745	119-0000-00 1/16W 0 Ω JW

REF No.	PART No.	DESCRIPTION
R	746	119-0000-00 1/16W 0 Ω JW
R	750	032-0140-00 1/16W 10k Ω 1%
R	751	032-0140-53 1/16W 2.2k Ω 1%
R	752	032-0140-98 1/16W 120k Ω 1%
R	753	119-4731-10 1/16W 47k Ω
R	754	119-4731-10 1/16W 47k Ω
S	701	013-8002-00 LA22809
S	702	013-6518-50 LS9T2M-2SR/PG
S	703	013-6518-50 LS9T2M-2SR/PG
S	704	013-6518-50 LS9T2M-2SR/PG
S	706	013-6518-50 LS9T2M-2SR/PG
S	707	013-6518-50 LS9T2M-2SR/PG
S	708	013-6518-50 LS9T2M-2SR/PG
S	709	013-6518-50 LS9T2M-2SR/PG
S	710	013-6518-50 LS9T2M-2SR/PG
S	711	013-6302-50 SKQMAL
S	712	013-6518-50 LS9T2M-2SR/PG
S	713	013-6518-50 LS9T2M-2SR/PG
S	714	013-6518-50 LS9T2M-2SR/PG
S	715	013-6518-50 LS9T2M-2SR/PG
S	716	013-6302-50 SKQMAL
S	717	013-6518-50 LS9T2M-2SR/PG
S	718	013-6518-50 LS9T2M-2SR/PG
S	719	013-6518-50 LS9T2M-2SR/PG
S	720	013-6518-50 LS9T2M-2SR/PG
S	721	013-6518-50 LS9T2M-2SR/PG
S	722	013-6518-50 LS9T2M-2SR/PG

PRINTED WIRING BOARD

Switch PWB(B2) section

