


9. EXPLODED VIEWS AND PARTS LIST

- NOTES:**
- Parts marked by “NSP” are generally unavailable because they are not in our Master Spare Parts List.
 - The $\triangle$ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
 - Screws adjacent to $\blacktriangledown$ mark on product are used for disassembly.
 - For the applying amount of lubricants or glue, follow the instructions in this manual.
(In the case of no amount instructions, apply as you think it appropriate.)

9.1 PACKING SECTION

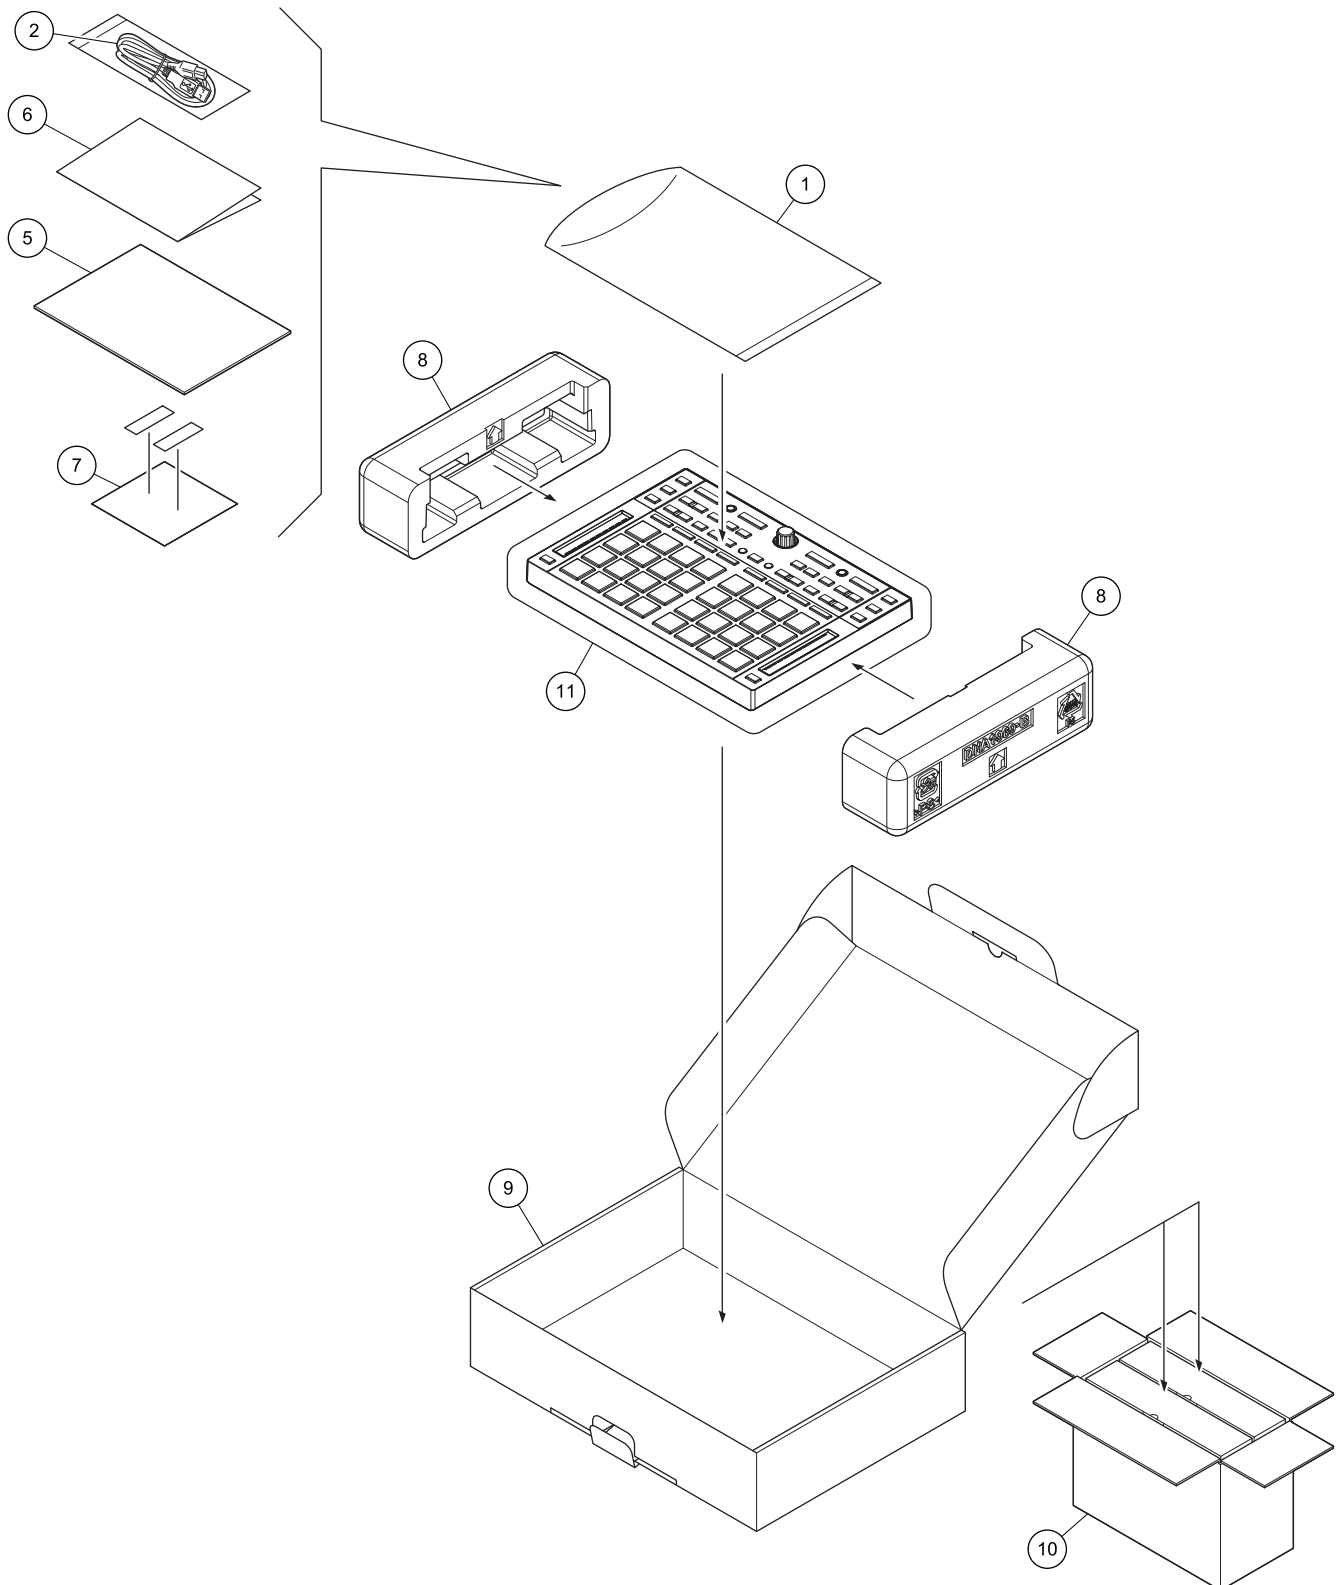

(1) PACKING SECTION PARTS LIST

Mark	No.	Description	Part No.
A	NSP 1	Polyethylene Bag	AHG7117
	2	USB Cable	DDE1140
	3	•••••	
	4	•••••	
	5	Operating Instructions (Quick Start Guide)	See Contrast table (2)
B	NSP 6	Warranty	See Contrast table (2)
	NSP 7	Leaflet	DRM1419
	8	Pad	DHA1969
	9	Packing Case	See Contrast table (2)
	10	Master Carton	See Contrast table (2)
	11	Mirror Mat	DHL1204

(2) CONTRAST TABLE

SYXJ and XJCN are constructed the same except for the following:

Mark	No.	Symbol and Description	SYXJ	XJCN
C	NSP 5	Operating Instructions (Quick Start Guide)	DRH1568	DRH1569
	6	Warranty	DRY1270	Not used
	9	Packing Case	DHG3738	DHG3739
	10	Master Carton	DHG3740	DHG3741

■

D


■

E


■

F

9.2 MAIN SECTION

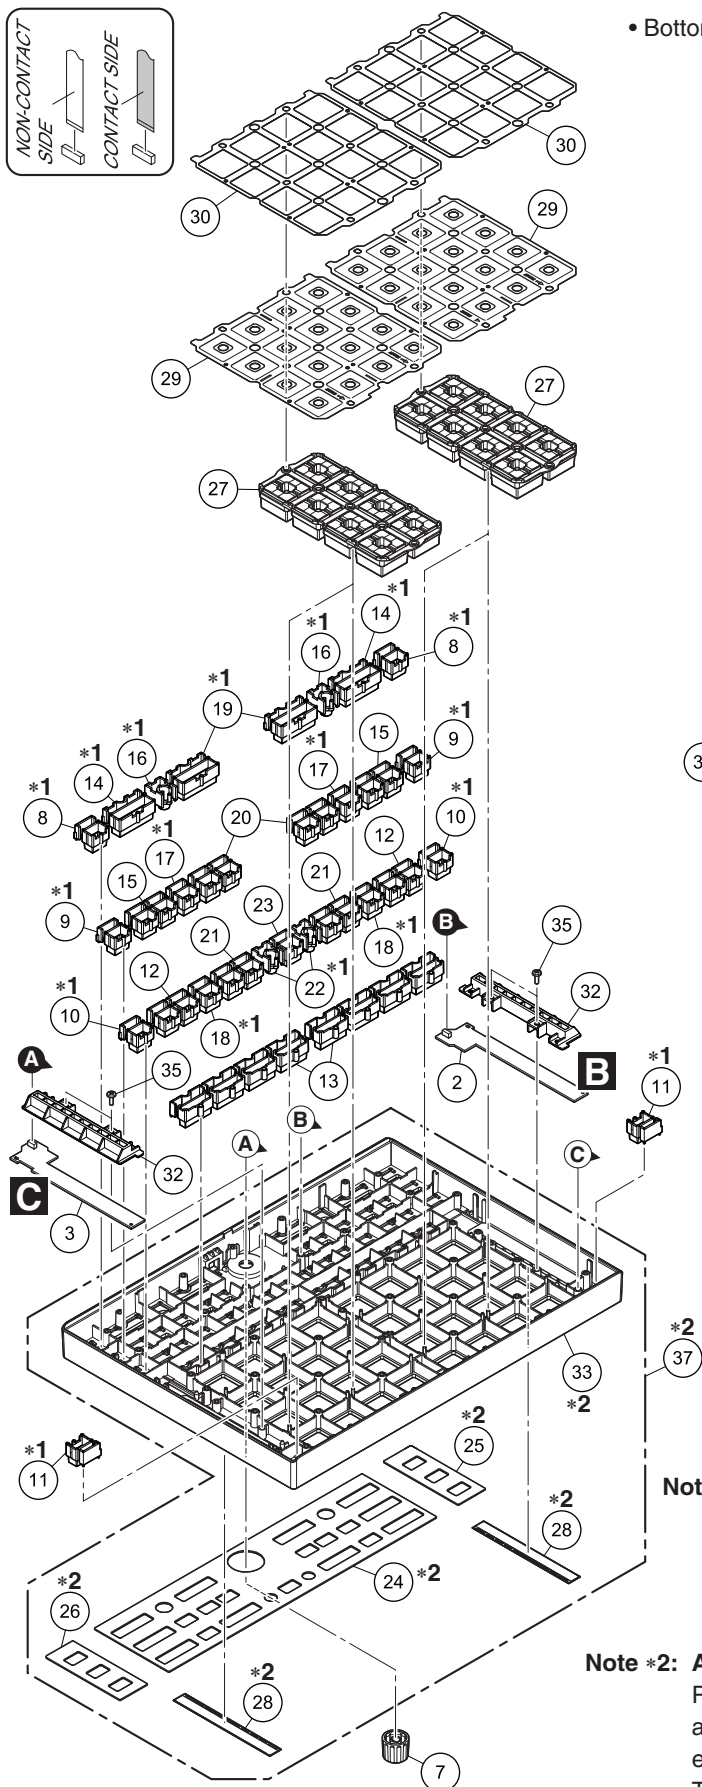

• Bottom view

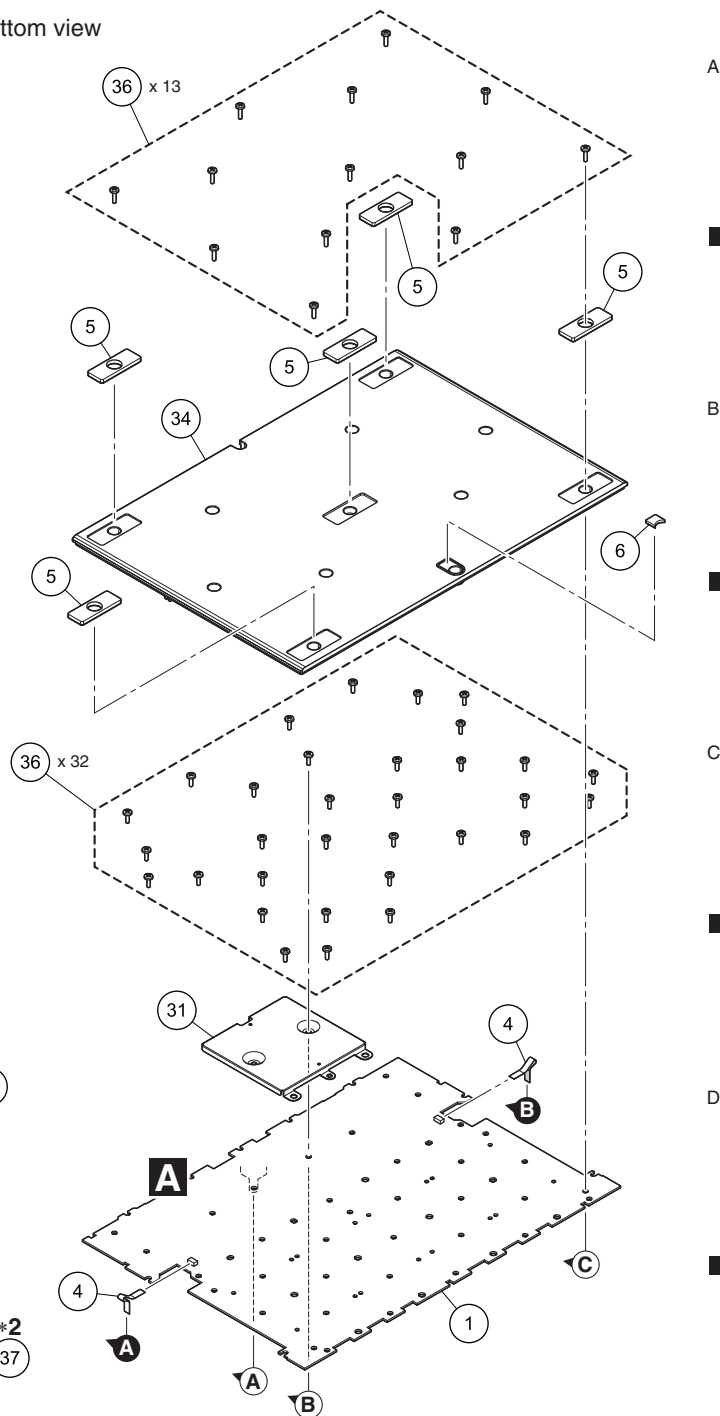

Note *1: Button No. 8, 9, 10, 11, 14, 16, 17, 18, 19 and 22 are supplied in connected pairs. Split each pair before use. Refer to "[1] Buttons Location" of 7. DISASSEMBLY, including the placement of Buttons.

Note *2: About Removal/Attachment of the Panels (Acrylic Panels)
Panels (Acrylic Panels: No. 24, 25 and 26) and Sheets No. 28 are adhered to the Control Panel with double-sided tapes over entire surfaces, and are difficult to remove. They must be replaced as a whole unit of the DDJ-XP2 Panel Service ASSY No. 37.

(1) MAIN SECTION PARTS LIST


Mark	No.	Description	Part No.	Mark	No.	Description	Part No.
A	1	MAIN ASSY	DWX4409	21	Button		DAC3342
	2	CDCL ASSY	DWX4130	22	Button		DAC3344
	3	CDCR ASSY	DWX4131	23	Button		DAC3345
	4	FFC	DDD1847	NSP 24	Panel		DAH3294
	5	Foot	DEC3759	NSP 25	Panel		DAH3172
	6	Cushion	DEC3778	NSP 26	Panel		DAH3173
	7	Knob	DAA1384	27	Button		DEB2059
	8	Button	DAC3328	NSP 28	Sheet		DEC3756
	9	Button	DAC3329	29	Sheet		DEC3757
	10	Button	DAC3330	30	Spacer		DEC3758
B	11	Button	DAC3331	31	Plate		DNH3335
	12	Button	DAC3332	32	Holder		DNK6732
	13	Button	DAC3516	NSP 33	Control Panel		DNK6891
	14	Button	DAC3517	34	Chassis		DNK6892
	15	Button	DAC3518	35	Screw		BPZ30P080FNI
	16	Button	DAC3336	36	Screw		BPZ30P120FTB
	17	Button	DAC3521	37	DDJ-XP2 Panel Service ASSY		DEA1093
	18	Button	DAC3338	NSP 38	Name Label		See Contrast table (2)
	19	Button	DAC3339				
	20	Button	DAC3519				

(2) CONTRAST TABLE

SYXJ and XJCN are constructed the same except for the following:

Mark	No.	Symbol and Description	SYXJ	XJCN
NSP	38	Name Label	Not used	DRW2815

No.34 Chassis (/XJCN) Bottom view

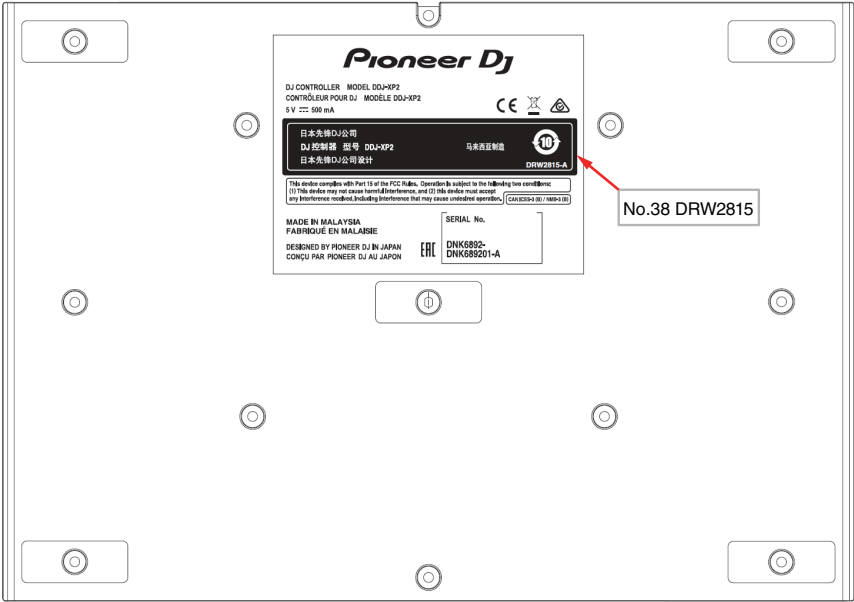

12. PCB PARTS LIST

NOTES: ● Parts marked by “NSP” are generally unavailable because they are not in our Master Spare Parts List.

- The Δ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.

- When ordering resistors, first convert resistance values into code form as shown in the following examples.

Ex.1 When there are 2 effective digits (any digit apart from 0), such as 560 ohm and 47 k ohm (tolerance is shown by J = 5%, and K = 10%).

560 Ω $\rightarrow$ 56×10^1 $\rightarrow$ 561 RD1/4PU $\begin{bmatrix} 5 \\ 6 \end{bmatrix} \begin{bmatrix} 1 \end{bmatrix} J$

47 k Ω $\rightarrow$ 47×10^3 $\rightarrow$ 473 RD1/4PU $\begin{bmatrix} 4 \\ 7 \end{bmatrix} \begin{bmatrix} 3 \end{bmatrix} J$

0.5 Ω $\rightarrow$ R50 RN2H $\begin{bmatrix} R \end{bmatrix} \begin{bmatrix} 5 \\ 0 \end{bmatrix} K$

1 Ω $\rightarrow$ 1R0 RS1P $\begin{bmatrix} 1 \end{bmatrix} \begin{bmatrix} R \end{bmatrix} \begin{bmatrix} 0 \end{bmatrix} K$

Ex.2 When there are 3 effective digits (such as in high precision metal film resistors).

5.62 k Ω $\rightarrow$ 562×10^1 $\rightarrow$ 5621 RN1/4PC $\begin{bmatrix} 5 \\ 6 \end{bmatrix} \begin{bmatrix} 2 \end{bmatrix} \begin{bmatrix} 1 \end{bmatrix} F$

Mark No. Description Part No.

LIST OF ASSEMBLIES

NSP	1..MOTHER ASSY	DWM2745
	2..MAIN ASSY	DWX4409
	2..CDCL ASSY	DWX4130
	2..CDCR ASSY	DWX4131

Mark No. Description Part No.

MOTHER ASSY

Consist of
MAIN ASSY
CDCL ASSY
CDCR ASSY

A B C

Unit Number: DWM2745

Unit Name: MOTHER ASSY

SEMICONDUCTORS

Δ IC	201,202 DC-DC Converter	BD9328EFJ
IC	402 Flash ROM	DYW2183*
	*Part number of the initial firmware equipped	
IC	403 Flash Blank UC IC	R5S72670P144FP
IC	405 IC	S-80927CNMC-G8X
IC	3001,4001 CDC IC	AD7147ACPZ500RL7

Q	201,402 Resistor Built-IN TR	LTC024EEB
Q	202,210 FET	RTQ040P02
Q	209 Bipolar TR	LSCR523UB
Q	401,403 Resistor Built-IN TR	LTA024EEB
Q	404 Resistor Built-IN TR	LTC024EEB

Q	1045,1047,1049 Bipolar TR	HN1A01FUS1
Q	1046 Resistor Built-IN TR	LTC014EEB
Q	1048,1056 Chip Transistor	2SB1689
Q	1053,1055,1057 Bipolar TR	HN1A01FUS1
Q	1054 Resistor Built-IN TR	LTC014EEB

Q	1060,1063,1075 Bipolar TR	HN1A01FUS1
Q	1061 Resistor Built-IN TR	LTC014EEB
Q	1062,1067 Chip Transistor	2SB1689
Q	1064 Resistor Built-IN TR	LTC014EEB
Q	1068 Resistor Built-IN TR	LTC014EEB

Q	1069,1072 Chip Transistor	2SB1689
Q	1071 Resistor Built-IN TR	LTC014EEB

Mark No. Description Part No.

Q	1073 Resistor Built-IN TR	LTC014EEB
Q	1074 Chip Transistor	2SB1689
Q	1076,1077,1079 Bipolar TR	HN1A01FUS1

Q	1080,1081,1083 Bipolar TR	HN1A01FUS1
Q	1084,1088,1089 Bipolar TR	HN1A01FUS1
Q	1085 Resistor Built-IN TR	LTC023JEB
Q	1086 Resistor Built-IN TR	LTC023JEB
Q	1087 Resistor Built-IN TR	LTC023JEB

Q	1090,1091,1092 Bipolar TR	HN1A01FUS1
Q	1093,1094,1096 Bipolar TR	HN1A01FUS1
Q	1097 Resistor Built-IN TR	LTC023JEB
Q	1098 Resistor Built-IN TR	LTC023JEB
Q	1099 Resistor Built-IN TR	LTC023JEB

Q	1100,1102,1103 Bipolar TR	HN1A01FUS1
Q	1104,1105,1106 Bipolar TR	HN1A01FUS1
Q	1108,1109,1115 Bipolar TR	HN1A01FUS1
Q	1110 Resistor Built-IN TR	LTC023JEB
Q	1111 Resistor Built-IN TR	LTC023JEB

Q	1112 Resistor Built-IN TR	LTC023JEB
Q	1116,1117,1118 Bipolar TR	HN1A01FUS1
Q	1119,1122,1123 Bipolar TR	HN1A01FUS1
Q	1124,1131,1132 Bipolar TR	HN1A01FUS1
Q	1126 Resistor Built-IN TR	LTC023JEB

Q	1127 Resistor Built-IN TR	LTC023JEB
Q	1130 Resistor Built-IN TR	LTC023JEB
Q	1133,1134,1135 Bipolar TR	HN1A01FUS1
Q	1136,1137,1138 Bipolar TR	HN1A01FUS1
Q	1139,1140,1141 Bipolar TR	HN1A01FUS1

Q	1142,1143,1144 Bipolar TR	HN1A01FUS1
Q	1145,1146,1165 Bipolar TR	HN1A01FUS1
Q	1147 Resistor Built-IN TR	LTC023JEB
Q	1148 Resistor Built-IN TR	LTC023JEB
Q	1164 Resistor Built-IN TR	LTC023JEB

Q	1186,1187,1195 Bipolar TR	HN1A01FUS1
Q	1193 Resistor Built-IN TR	LTC023JEB
Q	1194 Resistor Built-IN TR	LTC023JEB
Q	1196,1197,1198 Bipolar TR	HN1A01FUS1
Q	1199 Resistor Built-IN TR	LTC023JEB

Q	1200,1204,1205 Bipolar TR	HN1A01FUS1
Q	1201 Resistor Built-IN TR	LTC023JEB
Q	1202 Resistor Built-IN TR	LTC023JEB
Q	1203 Resistor Built-IN TR	LTC023JEB
Q	1206,1207,1210 Bipolar TR	HN1A01FUS1

Q	1208 Resistor Built-IN TR	LTC014EEB
Q	1209 Chip Transistor	2SB1689

Mark	No.	Description	Part No.
------	-----	-------------	----------

A	Q	1211,1212,1213 Bipolar TR	HN1A01FUS1
	Q	1214 Resistor Built-IN TR	LTC023JEB
	Q	1215 Resistor Built-IN TR	LTC023JEB
	Q	1216 Resistor Built-IN TR	LTC023JEB
	Q	1217,1218,1219 Bipolar TR	HN1A01FUS1
	Q	1220,1221,1222 Bipolar TR	HN1A01FUS1
	Q	1223,1224 Bipolar TR	HN1A01FUS1
	Q	1225 Resistor Built-IN TR	LTC023JEB

	Q	1226 Resistor Built-IN TR	LTC023JEB
	Q	1227 Resistor Built-IN TR	LTC023JEB
	Q	1228 Resistor Built-IN TR	LTC023JEB
	Q	1229 Resistor Built-IN TR	LTC023JEB
	Q	1230 Resistor Built-IN TR	LTC023JEB

B	Q	2001,2002,2003 Transistor	LTC124EUB
	Q	2004,2005,2006 Transistor	LTC124EUB
	Q	2007,2008,2009 Transistor	LTC124EUB
	Q	2010,2011,2012 Transistor	LTC124EUB
	Q	2013,2014,2015 Transistor	LTC124EUB

	Q	2016,2017,2018 Transistor	LTC124EUB
	Q	2019,2020,2021 Transistor	LTC124EUB
	Q	2022,2023,2024 Transistor	LTC124EUB
	Q	2025,2026,2027 Transistor	LTC124EUB
	Q	2028,2029,2030 Transistor	LTC124EUB

C	Q	2031,2032,2033 Transistor	LTC124EUB
	Q	2034,2035,2036 Transistor	LTC124EUB
	Q	2037,2038 Transistor	LTC124EUB
	Q	5001,5003,5007 Bipolar TR	LSAR523UB
	Q	5008,5010,5012 Bipolar TR	LSAR523UB

	Q	5011 Resistor Built-IN TR	RN1903S1
	Q	5016,5017,5018 Bipolar TR	LSAR523UB
	Q	5020,5025,5026 Bipolar TR	LSAR523UB
	Q	5022,5038,5047 Transistor	2SAR502UB
	Q	5027,5029,5033 Bipolar TR	LSAR523UB

D	Q	5034,5035,5037 Bipolar TR	LSAR523UB
	Q	5042,5043,5045 Bipolar TR	LSAR523UB
	Q	5044 Resistor Built-IN TR	RN1903S1
	Q	5049,5050,5059 Bipolar TR	LSAR523UB
	Q	5052,5054,5055 Transistor	2SAR502UB

	Q	5053 Resistor Built-IN TR	RN1903S1
	Q	5056 Resistor Built-IN TR	RN1903S1
	Q	5057,5062,5082 Transistor	2SAR502UB
	Q	5060,5064,5065 Bipolar TR	LSAR523UB
	Q	5067,5071,5072 Bipolar TR	LSAR523UB

E	Q	5073,5075,5079 Bipolar TR	LSAR523UB
	Q	5080,5084,5087 Bipolar TR	LSAR523UB
	Q	5081 Resistor Built-IN TR	RN1903S1
	Q	5083,5108,5109 Bipolar TR	LSCR523UB
	Q	5088,5091,5092 Bipolar TR	LSAR523UB

	Q	5095,5096,5099 Bipolar TR	LSAR523UB
	Q	5100,5103,5104 Bipolar TR	LSAR523UB
	Q	5107,5117,5120 Bipolar TR	LSAR523UB
	Q	5110,5111,5112 Bipolar TR	LSCR523UB
	Q	5113,5114,5115 Bipolar TR	LSCR523UB

F	Q	5116,5131,5132 Bipolar TR	LSCR523UB
	Q	5121,5124,5125 Bipolar TR	LSAR523UB
	Q	5128 Bipolar TR	LSAR523UB
	Q	5129 Resistor Built-IN TR	RN1903S1
	Q	5130 Transistor	2SAR502UB

	Q	5133,5134 Bipolar TR	LSCR523UB
--	---	----------------------	-----------

Mark	No.	Description	Part No.
------	-----	-------------	----------

D	201	Rectifier Diode	DA2J101
D	1057,1058,1059,1060,1061	LED	NSSM124F-A21107
D	1070,1071,1072,1073,1074	LED	NSSM124F-A21107
D	1075,1076,1077,1078,1079	LED	NSSM124F-A21107

D	1080,1081,1082,1083,1084	LED	NSSM124F-A21107
D	1085,1086,1087,1088,1089	LED	NSSM124F-A21107
D	1092,1093,1094,1095,1096	LED	NSSM124F-A21107
D	1105,1106,1107,1108,1109	LED	NSSM124F-A21107
D	1113,1114,1115,1116,1117	LED	NSSM124F-A21107

D	2003,2004	Rectifier Diode	DAN202UM
D	2012,2013	Rectifier Diode	DAN202UM
D	2021,2022	Rectifier Diode	DAN202UM
D	2024,2026	Rectifier Diode	DAN202UM
D	2027,2043	Rectifier Diode	DAN202UM

D	2044,2048	Rectifier Diode	DAN202UM
D	2049,2056	Rectifier Diode	DAN202UM
D	2057,2058	Rectifier Diode	DAN202UM
D	2059,2060	Rectifier Diode	DAN202UM
D	2069,2070	Rectifier Diode	DAN202UM

D	2071,2072	Rectifier Diode	DAN202UM
D	2073	Rectifier Diode	DAN202UM
D	3001,4001	Zener Diode	DZ2J056M0
D	5005,5010,5012,5013,5018	LED	FC-F1608BAK5
D	5011,5044,5045	White LED	NHSW157B-A13072

D	5019,5024,5025,5030,5031	LED	FC-F1608BAK5
D	5036,5037,5042,5043,5048	LED	FC-F1608BAK5
D	5051,5062,5075,5080,5084	LED	FC-F1608BAK5
D	5053,5056,5061,5064	Red LED	FC-1608SXXK630D08
D	5057,5060,5063,5070,5073	LED	FC-1608YXK585F08

D	5066,5069,5074,5077	Red LED	FC-1608SXXK630D08
D	5076,5107,5108,5109,5110	LED	FC-1608YXK585F08
D	5083	White LED	NHSW157B-A13072
D	5087,5090,5093,5096,5099	LED	FC-F1608BAK5
D	5102	LED	FC-F1608BAK5

D	5103,5104	Rectifier Diode	DA2J101
D	5105,5106	Rectifier Diode	DA2J101
D	5111,5112,5115,5116,5117	LED	FC-1608YXK585F08
D	5113,5114,5119,5120	Red LED	FC-1608SXXK630D08
D	5118	LED	FC-1608YXK585F08

MISCELLANEOUS

L	104	Coil	ATH7015
L	201,202	SMD SPL Inductor	DTH1213
L	402,403,404	Inductor	CTF1793
L	3001	Chip Solid Inductor	XTL3010
L	4001	Chip Solid Inductor	XTL3010

X	401	Resonator	GSS1760
P	101	Protector(1.250A)	DEK1098
S	2001,2003	Tactile Switch	DSG1143
S	2002,2008,2014	Push Switch	CSG1155
S	2004,2005	Tactile Switch	DSG1143

S	2006,2007	Tactile Switch	DSG1143
S	2009,2010	Tactile Switch	DSG1143
S	2011,2012	Tactile Switch	DSG1143
S	2013,2016	Tactile Switch	DSG1143
S	2015,2017,2026	Push Switch	CSG1155

S	2018,2019	Tactile Switch	DSG1143
S	2020,2021	Tactile Switch	DSG1143
S	2022,2023	Tactile Switch	DSG1143
S	2024	Encoder	DSX1082

Mark	No.	Description	Part No.	Mark	No.	Description	Part No.	
S	2025,2027	Tactile Switch	DSG1143	R	514,526,528,529		RS1/16SS472J	
				R	516		RS1/10SR0R0J	
S	2028,2029	Tactile Switch	DSG1143					
S	2030,2031	Tactile Switch	DSG1143	R	519,530,538,539,540,541		RS1/8SQ0R0J	A
S	2032,2034	Tactile Switch	DSG1143	R	531		RS1/16SS105J	
S	2033,2038,2039	Push Switch	CSG1155	R	532,533,1155,1164,1174		RS1/16SS0R0J	
S	2035,2036	Tactile Switch	DSG1143	R	534		RS1/16SS681J	
				R	542,544,545		RS1/8SQ0R0J	
S	2037,2040	Tactile Switch	DSG1143					
S	2041	Push Switch	CSG1155	R	543,548,549,1170		RS1/16SS103J	
S	2042,2043	Tactile Switch	DSG1143	R	1001,1002		RS1/4SA0R0J	
S	2044,2045	Tactile Switch	DSG1143	R	1148,1150,1167,1175,1190		RS1/10SR121J	
S	2046	Tactile Switch	DSG1143	R	1149,1151,1176,1201		RS1/10SR821J	
				R	1152,1162,1165,1177,1188		RS1/10SR330J	
CN	101,102	FFC/FPC Connector	CKS6635					
CN	3001,4001	Connector	VKN2038	R	1156,1181,1186,1210		RS1/10SR151J	
JA	101	Connector	DKN1607	R	1168,1196,1222,1223		RS1/10SR471J	B
				R	1169,1197,1224,1227,1230		RS1/16SS152J	
				R	1171,1199,1226,1229,1235		RS1/16SS563J	
				R	1180,1187,1195,1209,1212		RS1/16SS0R0J	

RESISTORS

R	101,102,103,104,105,106	RS1/10SR0R0J		R	1198,1225,1228,1234,1237	RS1/16SS103J	
R	107,108,109,110,111,112	RS1/10SR0R0J		R	1200,1215,1221,1242,1248	RS1/10SR121J	
R	202,229	RS1/10SR153J		R	1202,1206,1213	RS1/10SR330J	
R	203,405	RS1/16SS103J		R	1236,1239	RS1/16SS152J	
R	205,233,406	RS1/16SS104J		R	1238,1241	RS1/16SS563J	
R	207,209	RS1/16SS220J		R	1240	RS1/16SS103J	
R	208,213	RS1/10SR103J		R	1243,1249,1267,1287	RS1/10SR821J	
R	210	RS1/16SS3901D		R	1250,1256,1260,1268,1280	RS1/10SR220J	C
R	211	RS1/16SS1500F		R	1253,1259,1265,1271,1279	RS1/16SS0R0J	
R	212,217	RS1/16SS1002D		R	1254,1272,1278,1296,1315	RS1/10SR101J	
R	216	RS1/16SS91R0F		R	1262,1266,1282,1286,1303	RS1/10SR121J	
R	218	RS1/16SS2702D		R	1263,1285,1305,1306,1323	RS1/10SR471J	
R	235,237	RS1/16SS223J		R	1284,1295,1298,1314,1319	RS1/16SS0R0J	
R	236	RS1/16SS473J		R	1290,1292,1299,1311,1317	RS1/10SR220J	
R	238	RS1/16SS102J		R	1304,1307,1309,1322,1326	RS1/10SR121J	
R	239	RS1/16SS394J		R	1308,1310,1327,1343	RS1/10SR821J	
R	401,403,404	RS1/10SR0R0J		R	1320,1328,1336,1344,1346	RS1/10SR220J	
R	407,413,414,415,416,417	RS1/16SS560J		R	1325,1331,1335,1340,1349	RS1/16SS0R0J	D
R	411,412	RS1/8SQ0R0J		R	1332,1334,1350,1370	RS1/10SR101J	
R	418,419,421,423,425,427	RS1/16SS560J		R	1338,1342,1355,1356,1360	RS1/10SR121J	
R	428,429,430,432,434,436	RS1/16SS560J		R	1341,1358,1359,1378,1396	RS1/10SR471J	
R	431,433,435,441,445,461	RS1/16SS221J		R	1352,1367,1374,1380,1386	RS1/16SS0R0J	
R	437,438,439,440,443,444	RS1/16SS560J		R	1353,1364,1372,1375,1383	RS1/10SR220J	
R	442,471,473,475,476	RS1/16SS820J		R	1361,1363,1382,1398,1415	RS1/10SR821J	
R	446,447,451,452,458,459	RS1/16SS560J		R	1362,1377,1381,1393,1397	RS1/10SR121J	
R	448,449	RS1/16SS104J		R	1387,1389,1405,1422	RS1/10SR101J	
R	453,457,460	RS1/16SS330J		R	1390,1395,1404,1407,1421	RS1/16SS0R0J	
R	455,456,470	RS1/16SS103J		R	1391,1399,1401,1408,1418	RS1/10SR220J	
R	462,464,474,477,485,489	RS1/16SS560J		R	1410,1411,1414,1416,1429	RS1/10SR121J	E
R	463,465,466,468,472,479	RS1/16SS221J		R	1412,1413,1430,1451	RS1/10SR471J	
R	467	RS1/16SS470J		R	1417,1434,1453	RS1/10SR821J	
R	478	RS1/10SR0R0J		R	1424,1427,1436,1444,1454	RS1/10SR220J	
R	480,481,482,483,486,487	RS1/16SS221J		R	1426,1432,1439,1443,1450	RS1/16SS0R0J	
R	488,490,492,494	RS1/16SS221J		R	1433,1448,1452,1465,1466	RS1/10SR121J	
R	491,495,497,499,500,501	RS1/16SS560J		R	1440,1442,1460	RS1/10SR101J	
R	493,496,498,507,509	RS1/16SS820J		R	1456,1463	RS1/10SR220J	
R	502,503,522,523,524,525	RS1/16SS560J		R	1459,1462,1476,1481,1487	RS1/16SS0R0J	
R	504,510,512,517,527	RS1/16SS103J		R	1467,1468,1485,1504	RS1/10SR471J	
R	505,518,520,521	RS1/16SS101J		R	1469,1471,1484,1488,1500	RS1/10SR121J	
R	506	RS1/16SS470J		R	1470,1472,1489,1506	RS1/10SR821J	F
R	508	RAB4CQ472J		R	1473,1479,1482,1490,1498	RS1/10SR330J	
R	511,515,535	RS1/16SS102J		R	1477,1494,1496,1513	RS1/10SR151J	
R	513	RS1/16SS5601F					

Mark	No.	Description	Part No.
------	-----	-------------	----------

Mark	No.	Description	Part No.
------	-----	-------------	----------

A

R	1493,1497,1502,1512,1517	RS1/16SS0R0J
R	1505,1520,1521,1524,1526	RS1/10SR121J
R	1507,1509,1518	RS1/10SR330J
R	1522,1523,1540,1563	RS1/10SR471J
R	1525,1527,1544,1565	RS1/10SR821J
R	1528,1534,1537,1545,1558	RS1/10SR220J
R	1531,1536,1542,1552,1557	RS1/16SS0R0J
R	1532,1553,1556,1574,1600	RS1/10SR101J

R	5059,5127,5160	RS1/16SS563J
R	5061,5067,5089,5095,5117	RS1/10SR121J
R	5068,5090,5096,5118,5124	RS1/10SR681J
R	5086,5109,5114,5140,5145	RS1/10SR220J
R	5123,5148,5173	RS1/10SR121J
R	5149,5174	RS1/10SR681J
R	5150,5157,5163,5169,5176	RS1/10SR820J
R	5158,5164,5170,5177,5200	RS1/10SR101J
R	5168,5202	RS1/10SR390J

B

R	1539,1543,1560,1564,1582	RS1/10SR121J
R	1562,1573,1576,1599,1604	RS1/16SS0R0J
R	1568,1570,1577,1590,1602	RS1/10SR220J
R	1583,1586,1588,1612,1616	RS1/10SR121J
R	1584,1585,1613,1632	RS1/10SR471J

R	5171,5205	RS1/16SS0R0J
R	5179,5182,5185,5188,5203	RS1/16SS331J
R	5180,5183,5186,5189,5207	RS1/16SS223J
R	5181,5184,5187,5190,5208	RS1/16SS563J
R	5193,5199,5204,5212,5219	RS1/10SR820J

C

R	1587,1589,1617,1637,1655	RS1/10SR821J
R	1605,1618,1627,1638,1640	RS1/10SR220J
R	1615,1621,1626,1631,1643	RS1/16SS0R0J
R	1623,1625,1644,1667	RS1/10SR101J
R	1629,1636,1649,1650,1654	RS1/10SR121J

R	5206,5213,5221	RS1/10SR101J
R	5210,5222,5228,5247,5251	RS1/10SR121J
R	5211,5223,5229,5252,5258	RS1/10SR681J
R	5242,5248,5271,5276,5297	RS1/10SR220J
R	5257,5282,5283,5286,5300	RS1/10SR121J

D

R	1646,1661,1671,1677,1683	RS1/16SS0R0J
R	1647,1658,1669,1672,1680	RS1/10SR220J
R	1652,1653,1675,1693,1709	RS1/10SR471J
R	1656,1674,1678,1690,1694	RS1/10SR121J
R	1657,1679,1695,1712,1714	RS1/10SR821J

R	5279	RS1/16SS331J
R	5280,5285,5371,5373,5375	RS1/16SS223J
R	5281	RS1/16SS563J
R	5284,5370,5372,5374,5376	RS1/16SS332J
R	5287,5301,5315,5329,5343	RS1/10SR681J

E

R	1684,1686,1702,1719	RS1/10SR101J
R	1687,1692,1701,1704,1718	RS1/16SS0R0J
R	1688,1696,1698,1705,1715	RS1/10SR220J
R	1707,1708,1711,1713,1726	RS1/10SR121J
R	1710,1727,1745	RS1/10SR471J

R	5311,5325,5339,5353,5367	RS1/10SR220J
R	5314,5328,5342,5356,5394	RS1/10SR121J
R	5357,5395,5409,5423	RS1/10SR681J
R	5377,5379,5381,5383,5385	RS1/16SS223J
R	5378,5380,5443,5445	RS1/16SS122J

F

R	1721,1724,1732,1740,1784	RS1/10SR220J
R	1723,1729,1735,1739,1744	RS1/16SS0R0J
R	1730,1742,1777,1900,1901	RS1/10SR121J
R	1731,1778	RS1/10SR821J
R	1736,1738,1895,2010,2014	RS1/10SR101J

R	5382,5384,5386,5439,5441	RS1/16SS332J
R	5387,5437,5440,5442,5444	RS1/16SS223J
R	5391,5405,5419,5433	RS1/10SR390J
R	5392,5406,5420,5434	RS1/16SS0R0J
R	5408,5422	RS1/10SR121J

R	1806,1898	RS1/10SR220J
R	1894,1897	RS1/16SS0R0J
R	1902,1903	RS1/10SR471J
R	1909	RS1/16SS152J
R	1910	RS1/16SS103J

R	5436	RS1/16SS331J
R	5438	RS1/16SS563J
R	5446	RS1/16SS223J
R	5447,5448	RS1/4SA0R0J
R	5452,5453,5454,5455,5459	RS1/10SR750J

R	1911	RS1/16SS563J
R	2002,2021	RS1/10SR0R0J
R	2003,2004,2005,2006,2007	RS1/16SS223J
R	2011,2012,2013,2027,2028	RS1/10SR223J
R	2015,2016,2017,2018,2019	RS1/16SS223J

R	5457,5467,5481,5493	RS1/10SR101J
R	5460,5464,5465,5482,5494	RS1/10SR750J
R	5469,5471,5473,5477,5485	RS1/10SR820J
R	5489	RS1/10SR820J

CAPACITORS

E

R	2022,2023,2024,2025,2026	RS1/16SS223J
R	2029	RS1/10SR223J
R	2030,2031,2032,2033,2034	RS1/16SS223J
R	2035,2036,2037,2038,2039	RS1/16SS223J
R	2040,2041,2042,2043,2044	RS1/16SS223J

C	102	CKSSYB103K16
C	104	CCG1192
C	109,232	CKSRYB105K10
C	148,409,410,411,412,413	CCSSCH101J50
C	201,207,219,227	CEVW470M25

R	2045,2046	RS1/16SS223J
R	2047,2048,2049,2050,2051	RS1/10SR0R0J
R	2052	RS1/10SR0R0J
R	3001,3007,4001,4008	RS1/16SS221J
R	3004,4004	RS1/16SS560J

C	202,206,213,214	CKSRYB223K50
C	203,220,224,225,230	DCH1201
C	205,210	CKSSYB104K16
C	209	DCH1266
C	211,223	CKSSYB103K25

R	3012,4007	RS1/16SS0R0J
R	5001,5007,5024,5031,5033	RS1/10SR121J
R	5002,5008,5025,5034,5062	RS1/10SR681J
R	5021,5037,5050,5056,5081	RS1/10SR220J
R	5052,5125,5153	RS1/16SS331J

C	215,221	CCG1236
C	216,408	CKSSYB104K10
C	414,415,421,423,425,427	CCSSCH101J50
C	417,418,419,420,448,452	CKSSYB103K16
C	428,429,430,431,432,433	CCSSCH101J50

R	5058,5126,5159	RS1/16SS223J
---	----------------	--------------

