


EXPLODED VIEW (UNIT)

Block No.M1MM

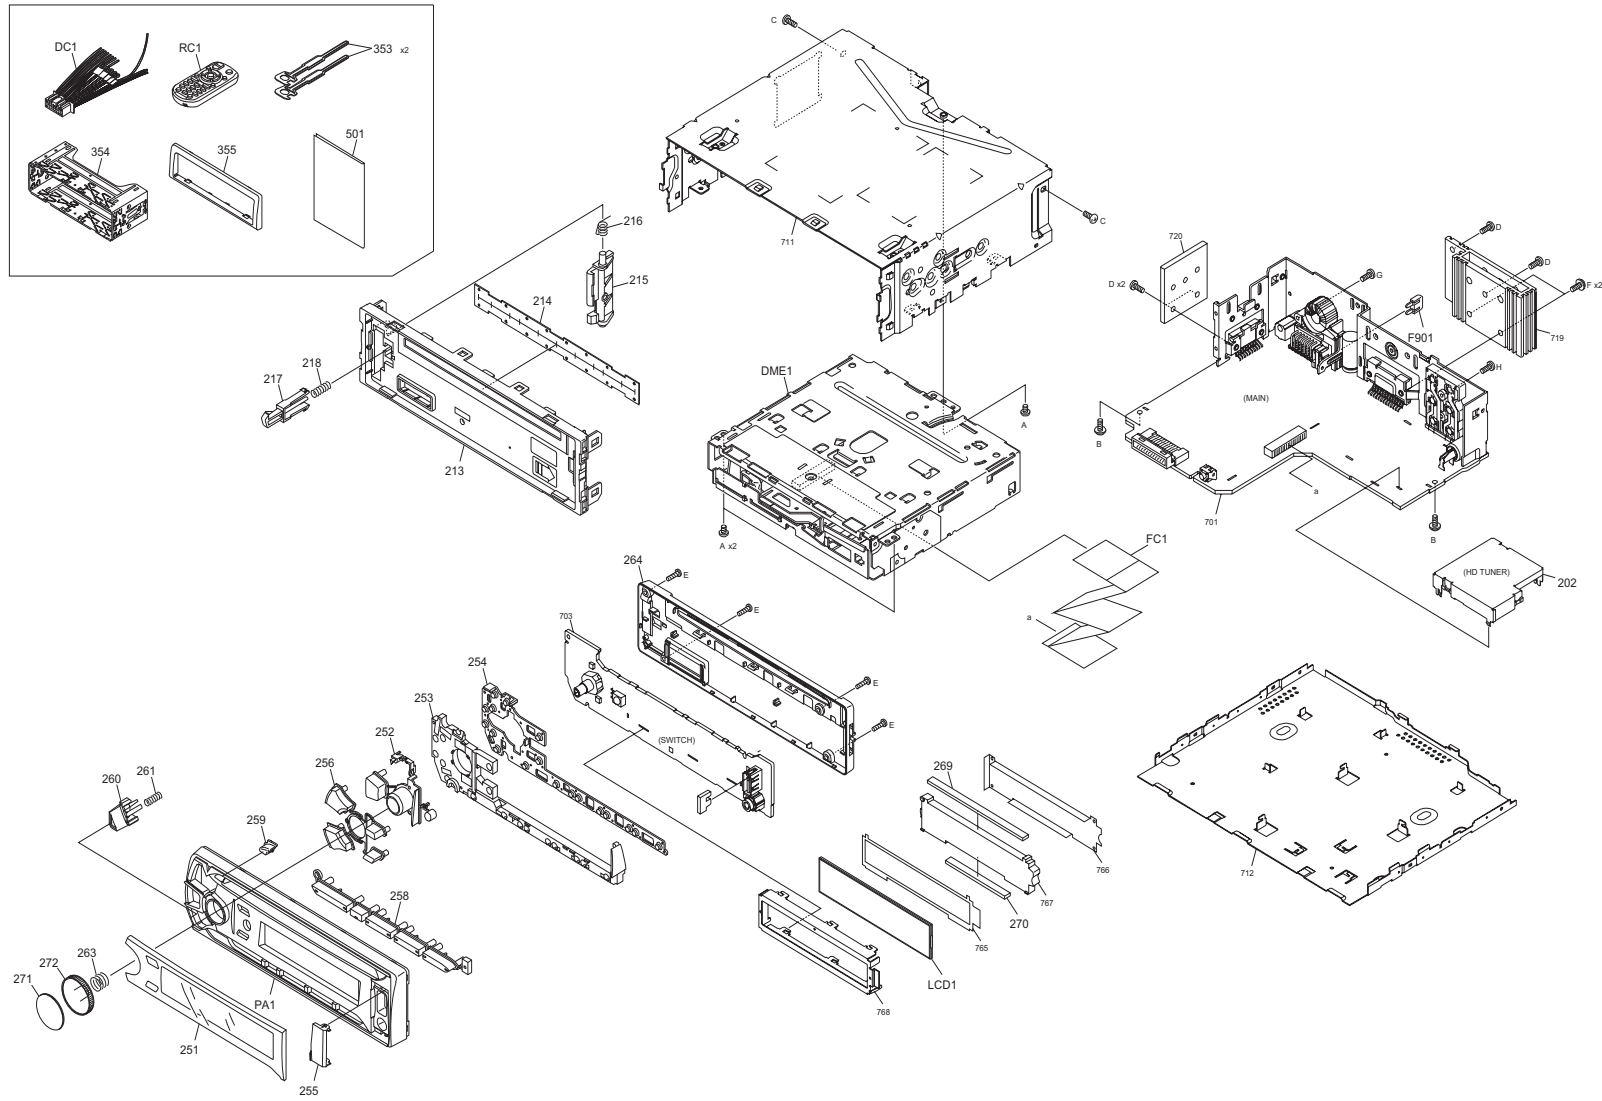

MODEL	MARK
KDC-HD262U	

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
EXPLODED VIEW (UNIT) <M1MM>						
△	DC1	QAM1623-002	DC CORD		1	
	DME1	FC2-2A00NXN	CD MECHANISM		1	
	DME1	or X92-6820-01	CD MECHANISM		1	
△	F901	FZB10BT-100	BLADE FUSE		1	
	FC1	E3F-0048-00	FLAT CABLE		1	
	LCD1	B3H-0007-00	LCD		1	
	PA1	A6D-0010-00	PANEL		1	
	RC1	QAL1303-004	REMOCON		1	
	A	QYSDST2604ZA	TAP SCREW	M2.6 x 4mm	3	
	B	GE40377-002A	SPECIAL SCREW		2	
	C	QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	2	
	D	QYSDST2610ZA	TAP SCREW	M2.6 x 10mm	4	
	E	QYSDSF2008ZA	TAP SCREW	M2 x 8mm	4	
	F	GE40377-005A	SPECIAL SCREW		2	
	G	QYSDSG3008ZA	TAP SCREW	M3 x 8mm	1	
	H	QYSDSF2608ZA	TAP SCREW	M2.6 x 8mm	1	
	202	XJM-0120-11	HD TUNER PWB ASSY		1	
	213	A2C-0003-10	SUB PANEL		1	
	214	GE40630-003A	BLIND		1	
	215	GE35609-001A	LOCK LEVER		1	
	216	GE40514-004A	TORSION SPRING		1	
	217	GE35611-001A	RELEASE LEVER		1	
	218	GE30999-014A	COMP.SPRING		1	
	251	B1A-0009-00	FRONT GLASS		1	
	252	B1B-0008-04	LENS		1	
	253	B1K-0010-00	LIGHTING BOARD		1	
	254	E2K-0009-00	CONDUCT RUBBER		1	
	255	F0G-0010-00	COVER		1	
	256	K2F-0009-00	PUSH KNOB		1	
	258	K2F-0010-00	PUSH KNOB		1	
	259	K2F-0011-00	PUSH KNOB		1	
	260	K2K-0098-00	KNOB		1	
	261	GE30999-013A	COMP.SPRING		1	
	263	GE40127-005A	KNOB SPRING		1	
	264	A4G-0007-00	REAR COVER		1	
	269	E2K-0015-00	CONDUCT RUBBER		1	
	270	E2K-0016-00	CONDUCT RUBBER		1	
	271	K28-0564-03	KEY TOP		1	
	272	K2K-0105-00	KNOB		1	
	353	GE40685-001A	HOOK		2	
	354	GE20362-002A	MOUNTING SLEEVE		1	
	355	B0H-0003-00	ESCUTCHEON		1	
	501	B5A-0143-00	INST.MANUAL	ENG FRE SPA	1	

EXPLODED VIEW (CD MECHANISM: FC2-2A00NXN)


Block No.MBMM

The differences between X92-6820-01 and FC2-2A00NXN,
please refer to SECTION 2 "How to identify the CD mechanism ASSY".

Grease

★ W01-1738-08

● W01-2067-08

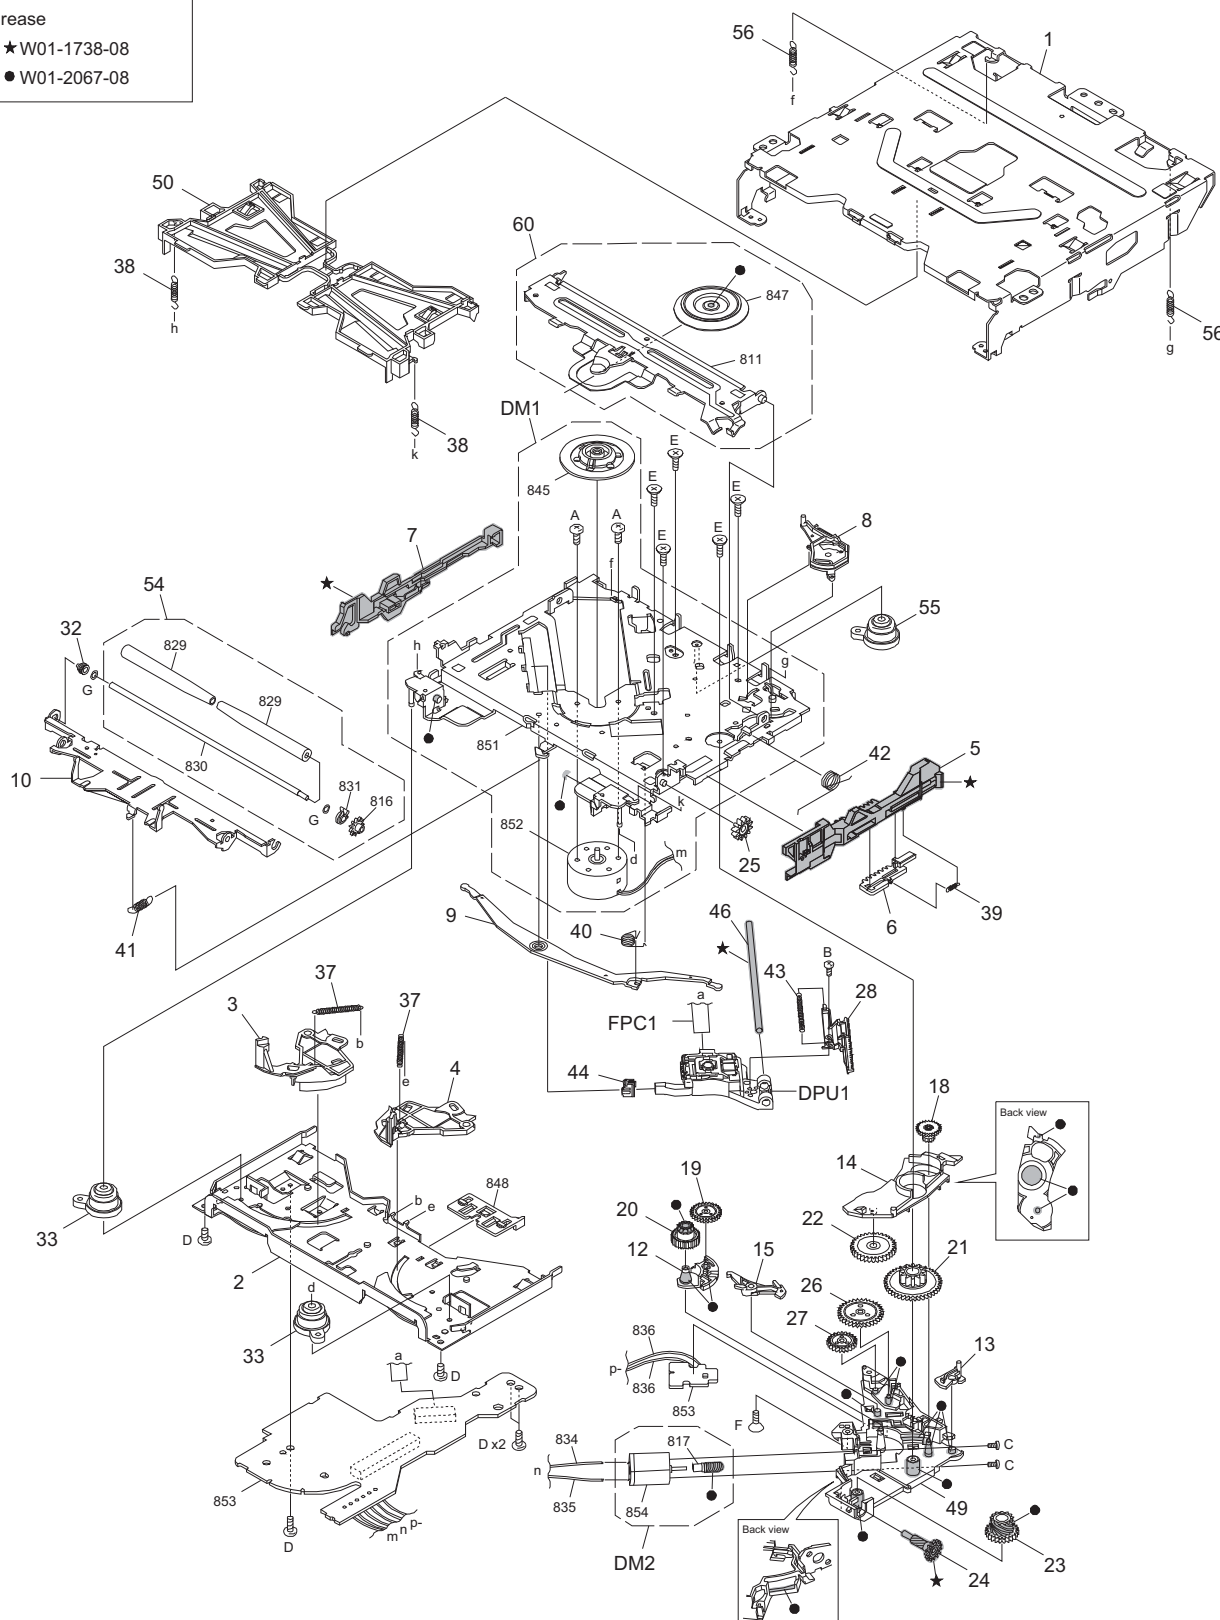

Parts with the exploded numbers larger than 800 are not supplied.

No.WA159

created date:2015-01-15

MODEL	MARK
KDC-HD262U	

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
EXPLODED VIEW (CD MECHANISM: FC2-2A00NXN) <MBMM>						
	DM1	CM-FC2-MD	MD CHASSIS ASSY		1	
	DM2	CM-FC2-M	LOADING MOTOR ASSY		1	
△	DPU1	QAL1521-001	PICK UP		1	
	FPC1	QAL1465-001	FPC		1	
	A	LV45568-001A	MINI SCREW		2	
	B	QYSPSGT1745ZA	TAP SCREW	M1.7 x 4.5mm	1	
	C	QYSPSPT2025MA	SCREW	M2 x 2.5mm	2	
	D	VKZ4539-054	MINI SCREW		5	
	E	LV45818-001A	G.HOLDER SCREW		5	
	F	LV45815-001A	M. SHAFT SCREW		1	
	G	LV45816-001A	ROLLER WASHER		2	
	1	LV11877-003A	OUTER CHASSIS		1	
	2	LV11878-002A	LOWER CHASSIS		1	
	3	LV3A174-001A	DISC ARM L		1	
	4	LV3A175-001A	DISC ARM R		1	
	5	LV23057-001A	SLIDER R		1	
	6	LV3A178-001A	TRIGGER SLIDER		1	
	7	LV23058-001A	SLIDER L		1	
	8	LV3A179-002A	TRIGGER ARM		1	
	9	LV3A173-001A	JOINT LEVER		1	
	10	LV23055-002A	ROLLER LEVER		1	
	12	LV3A181-001A	TRANSFER ARM		1	
	13	LV45797-002A	SL LOCK CAM		1	
	14	LV3A182-003A	SL LOCK ARM		1	
	15	LV3A183-001A	PICK LOCK ARM		1	
	18	LV3A187-002A	HELICAL GEAR 1		1	
	19	LV3A188-001A	TRANSFER GEAR		1	
	20	LV3A189-001A	LOAD GEAR H		1	
	21	LV3A190-001A	DRIVE GEAR		1	
	22	LV3A191-001A	JOINT GEAR		1	
	23	LV3A192-001A	WORM GEAR 2		1	
	24	LV3A193-001A	HELICAL GEAR 2		1	
	25	LV3A194-001A	LOAD GEAR V		1	
	26	LV3A195-001A	PICK GEAR 1		1	
	27	LV3A196-001A	PICK GEAR 2		1	
	28	LV3A197-001A	RACK GEAR		1	
	32	LV45796-001A	R.RETAINER L		1	
	33	D39-0403-05	DAMPER		2	
	37	LV45808-001A	DISC ARM SPRING		2	
	38	LV45809-001A	FLOAT SPRING(F)		2	
	39	LV45810-001A	TRIGGER SPRING		1	
	40	LV45811-001A	LOAD SPRING		1	
	41	LV45812-001A	ROLLER SPRING		1	
	42	LV45813-001A	CLAMP SPRING		1	
	43	LV45814-001A	PICK SPRING		1	
	44	LV36813-201A	SUB GUIDE CAP		1	
	46	LV44555-001A	MAIN SHAFT		1	
	49	LV11881-002A	GEAR HOLDER		1	
	50	LV11880-003A	DISC GUIDE		1	
	54	CM-FC2-R	ROLLER ASSY		1	
	55	D39-0404-05	DAMPER		1	
	56	LV45835-001A	FLOAT SPRING(R)		2	
	60	LV3A271-001A	CL BASE ASSY		1	

EXPLODED VIEW (CD MECHANISM: X92-6820-01)


Block No.MCMM

The differences between X92-6820-01 and FC2-2A00NXN,
please refer to SECTION 2 "How to identify the CD mechanism ASSY".

Grease

★ W01-1738-08

● W01-2067-08

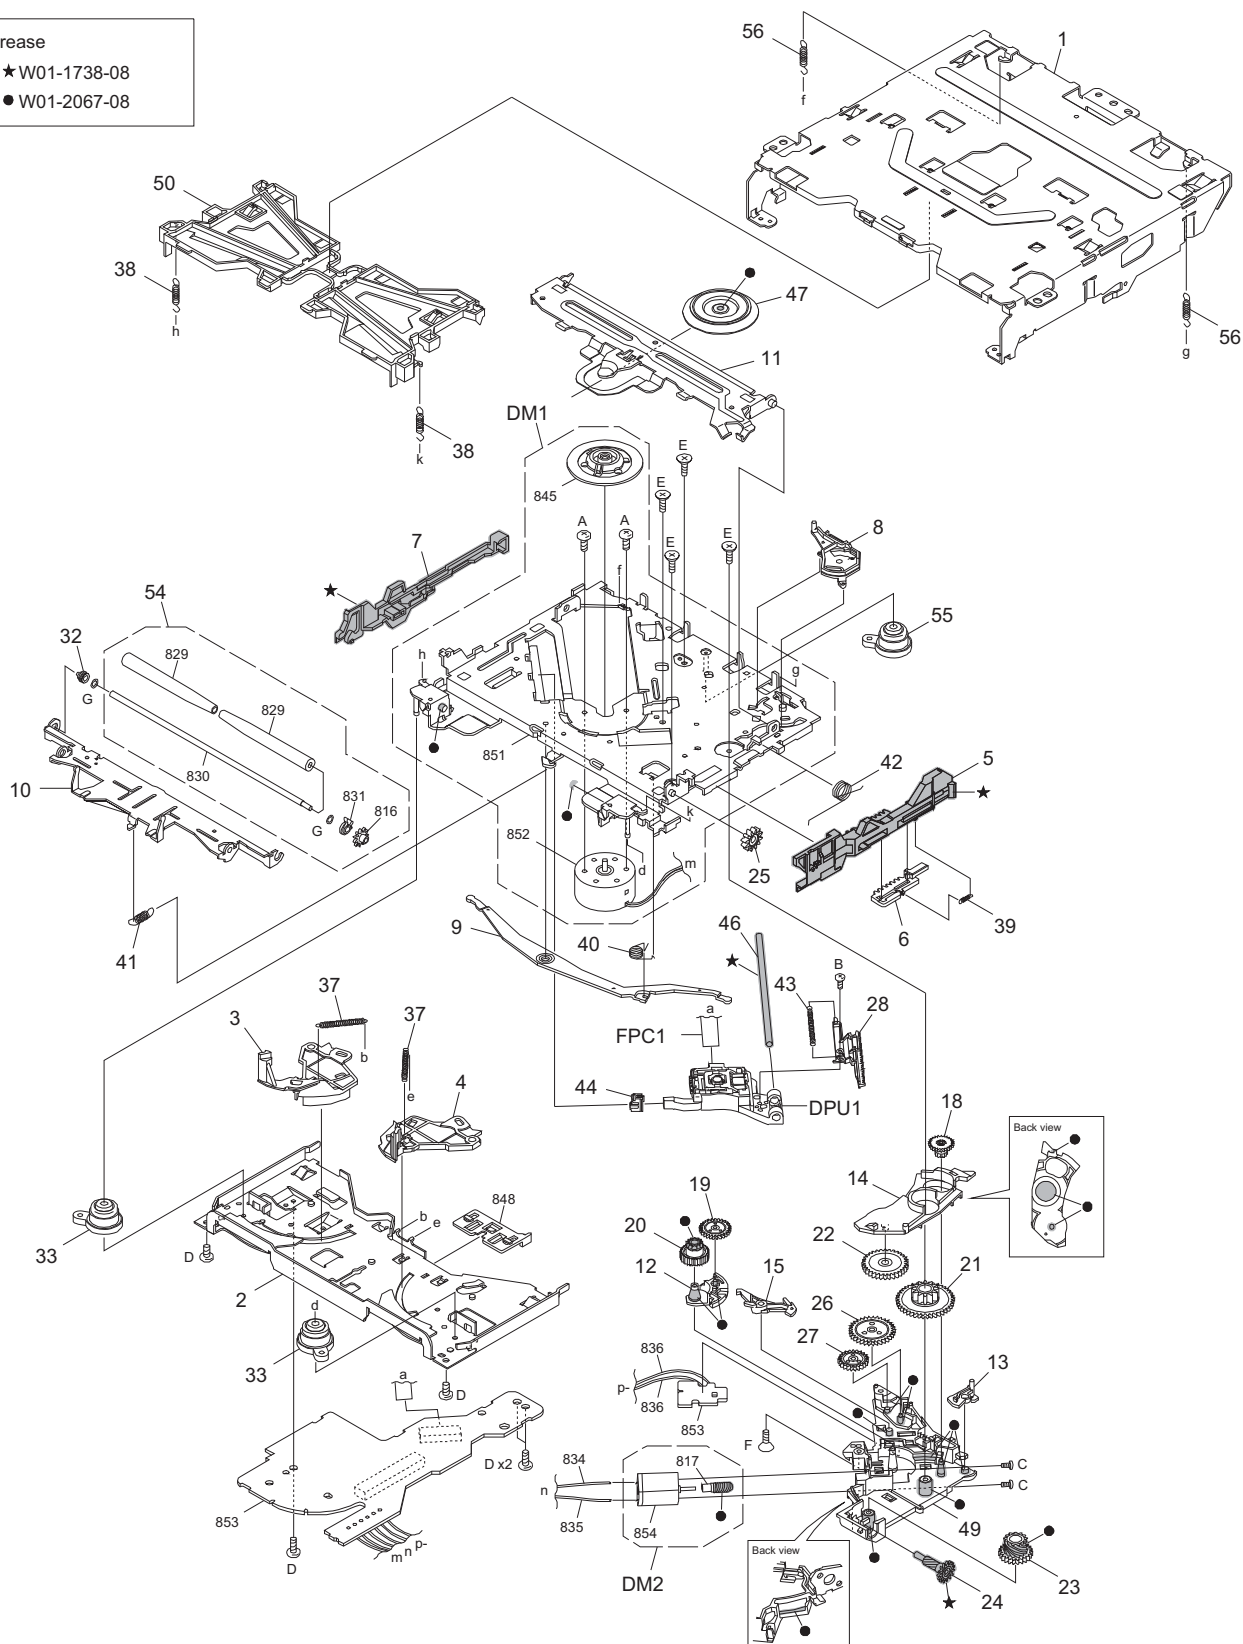

Parts with the exploded numbers larger than 800 are not supplied.

MODEL						MARK
KDC-HD262U						
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
EXPLODED VIEW (CD MECHANISM: X92-6820-01) <MCMM>						
	DM1	CM-FC2-MD	MD CHASSIS ASSY		1	
	DM2	CM-FC2-M	LOADING MOTOR ASSY		1	
△	DPU1	QAL1521-001	PICK UP		1	
	FPC1	QAL1465-001	FPC		1	
	A	LV45568-001A	MINI SCREW		2	
	B	QYSPSGT1745ZA	TAP SCREW	M1.7 x 4.5mm	1	
	C	QYSPSPT2025MA	SCREW	M2 x 2.5mm	2	
	D	N09-6108-15	TAPTITE SCREW		5	
	E	N09-6738-15	TAPTITE SCREW		4	
	F	N09-6921-05	TAPTITE SCREW		1	
	G	N19-2356-04	FLAT WASHER		2	
	1	A10-5625-21	OUTER CHASSIS		1	
	2	A10-5626-01	LOWER CHASSIS		1	
	3	D10-7174-03	DISC ARM L		1	
	4	D10-7175-03	DISC ARM R		1	
	5	D10-7177-02	SLIDER R		1	
	6	D10-7178-03	TRIGGER SLIDER		1	
	7	D10-7179-02	SLIDER L		1	
	8	D10-7180-03	TRIGGER ARM		1	
	9	D10-7181-13	JOINT LEVER		1	
	10	D10-7182-12	ROLLER LEVER		1	
	11	D10-7183-02	CLAMP ARM		1	
	12	D10-7184-03	TRANSFER ARM		1	
	13	D10-7185-04	SL LOCK CAM		1	
	14	D10-7186-03	SL LOCK ARM		1	
	15	D10-7187-13	PICK LOCK ARM		1	
	18	D13-3104-04	HELICAL GEAR 1		1	
	19	D13-3105-04	TRANSFER GEAR		1	
	20	D13-3106-04	LOAD GEAR H		1	
	21	D13-3107-04	DRIVE GEAR		1	
	22	D13-3108-04	JOINT GEAR		1	
	23	D13-3109-04	WORM GEAR 2		1	
	24	D13-3110-04	HELICAL GEAR 2		1	
	25	D13-3111-04	LOAD GEAR V		1	
	26	D13-3112-04	PICK GEAR 1		1	
	27	D13-3113-04	PICK GEAR 2		1	
	28	D13-3114-03	RACK GEAR		1	
	32	D23-0974-14	R.RETAINER L		1	
	33	D39-0403-05	DAMPER F		2	
	37	G01-4810-04	DISC ARM SPRING		2	
	38	G01-4829-04	FLOAT SPRING(F)		2	
	39	G01-4813-04	TRIGGER SPRING		1	
	40	G01-4814-04	LOAD SPRING		1	
	41	G01-4815-04	ROLLER SPRING		1	
	42	G01-4816-04	CLAMP SPRING		1	
	43	G01-4817-04	PICK SPRING		1	
	44	LV36813-501A	SUB GUIDE CAP		1	
	46	LV44555-001A	MAIN SHAFT		1	
	47	J11-0692-03	CLAMPER		1	
	49	J19-7360-21	GEAR HOLDER		1	
	50	J90-1209-21	DISC GUIDE		1	
	54	CM-FC2-R	ROLLER ASSY		1	
	55	D39-0404-05	DAMPER R		1	
	56	G01-4812-04	FLOAT SPRING(R)		2	

MODEL	MARK
KDC-HD262U	

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
MAIN PWB ASSY (XJ1-0510-10) <01>						
	IC161	TDA7720B-X	IC		1	
△	IC301	JCV8034	IC		1	
	IC411	MFI337S3959-X	IC		1	
△	IC540	MN6627553APA	IC		1	
△	IC701	R5S726A0D216FP	IC		1	
△	IC821	W3F-0066-00	IC		1	
	IC831	BU4228F-W	IC		1	
	IC841	BR24T02FJ-W-X	IC		1	
	IC851	BU1CTD3WG-W	IC		1	
	IC860	MP9942GJ	ANALOG IC		1	
	IC890	NCP380HSNAJAA-X	IC		1	
△	IC901	LV5685PV-H	ANALOG IC		1	
	IC941	BU33TD3WG-W	IC		1	
	Q250	LTC043TEB-X	DIGI TRANSISTOR		1	
	Q270	LTA024EEB-X	DIGI TRANSISTOR		1	
	Q271	LSAR523UBFS8	TRANSISTOR		1	
	Q272	LTC024EEB-X	DIGI TRANSISTOR		1	
	Q273	LTA024EEB-X	DIGI TRANSISTOR		1	
	Q320	LTC043TEB-X	DIGI TRANSISTOR		1	
	Q330	LTC043TEB-X	DIGI TRANSISTOR		1	
	Q340	LTC043TEB-X	DIGI TRANSISTOR		1	
	Q350	LTC043TEB-X	DIGI TRANSISTOR		1	
	Q540	2SA2188/E-X	TRANSISTOR		1	
	Q701	LTA014YEB-X	DIGI TRANSISTOR		1	
	Q960	RSQ030P03-W	MOS FET		1	
	Q961	LTC044EUBFS8	DIGI TRANSISTOR		1	
	D100	RSB6.8SM-X	BP Z DIODE		1	
	D101	RSB6.8SM-X	BP Z DIODE		1	
	D270	BAW56-TP-X	SI DIODE		1	
	D271	BAW56-TP-X	SI DIODE		1	
	D273	DA2J101	DIODE		1	
	D370	BAW56-TP-X	SI DIODE		1	
	D390	MBRX130	SCHOTTKY DIODE		1	
	D391	MBRX130	SCHOTTKY DIODE		1	
	D400	RB521SM-30-X	SB DIODE		1	
	D401	DZ2J051M	ZENER DIODE		1	
	D601	F0K-0014-00	SURGE ABSORBER		1	
	D861	DB22306	SCHOTTKY DIODE		1	
	D902	SK34A-L-X	SB DIODE		1	
	D903	SK34A-L-X	SB DIODE		1	
△	D990	1N5401-BPC04	SI DIODE		1	
	C100	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C101	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C102	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C103	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C104	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C105	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C163	CD04AV1V4R7M	E CAPACITOR	4.7uF 35V M	1	
	C164	CD04AV1V4R7M	E CAPACITOR	4.7uF 35V M	1	
	C169	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C170	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C171	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C172	CD04AS1C220M	E CAPACITOR	22uF 16V M	1	
	C173	CD04AV1C100M	E CAPACITOR	10uF 16V M	1	
	C177	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C251	CD04AV1C100M	E CAPACITOR	10uF 16V M	1	
	C304	QE20982-476Z	E CAPACITOR	47uF	1	
	C311	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C312	CK730AV1C105K	C CAPACITOR	1uF 16V K	1	
	C313	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C316	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	
	C317	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	
	C318	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	
	C319	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	
	C321	CD04AV1C100M	E CAPACITOR	10uF 16V M	1	
	C331	CD04AV1C100M	E CAPACITOR	10uF 16V M	1	
	C341	CD04AV1C100M	E CAPACITOR	10uF 16V M	1	
	C351	CD04AV1C100M	E CAPACITOR	10uF 16V M	1	
	C370	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C380	CK73FBB1H224K	C CAPACITOR	0.22uF 50V K	1	
	C390	CK73FBB1H224K	C CAPACITOR	0.22uF 50V K	1	
	C410	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C510	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C540	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C541	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C544	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	
	C545	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	
	C546	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	
	C547	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	
	C548	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C549	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C550	CK73GBB1C154K	C CAPACITOR	0.15uF 16V K	1	
	C552	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	
	C553	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C555	CK73GBB1H223K	C CAPACITOR	0.022uF 50V K	1	
	C556	CK73GBB1H332K	C CAPACITOR	3300pF 50V K	1	
	C557	CK73GBB1A334K	C CAPACITOR	0.33uF 10V K	1	
	C558	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C559	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C560	CK73GBB1H681K	C CAPACITOR	680pF 50V K	1	
	C561	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	

MODEL					MARK	
KDC-HD262U						
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C562	CK73GBB1H153K	C CAPACITOR	0.015uF 50V K	1	
	C563	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C564	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C565	CK73GBB1E823K	C CAPACITOR	0.082uF 25V K	1	
	C567	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C568	CK73GBB1A334K	C CAPACITOR	0.33uF 10V K	1	
	C570	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C571	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C572	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C573	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C574	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C576	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C577	CC73GCH1H100D	C CAPACITOR	10pF 50V D	1	
	C578	CC73GCH1H120J	C CAPACITOR	12pF 50V J	1	
	C579	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C583	CK73GBB1H821K	C CAPACITOR	820pF 50V K	1	
	C584	CK73GBB1H821K	C CAPACITOR	820pF 50V K	1	
	C588	CK73GBB1H681K	C CAPACITOR	680pF 50V K	1	
	C589	CK73GBB1H681K	C CAPACITOR	680pF 50V K	1	
	C600	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C601	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C602	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C603	CC73GCH1H050C	C CAPACITOR	5pF 50V C	1	
	C606	CC73GCH1H060D	C CAPACITOR	6pF 50V D	1	
	C700	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C701	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C702	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C703	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C704	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C705	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C706	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C707	CC73GCH1H090D	C CAPACITOR	9pF 50V D	1	
	C708	CC73GCH1H090D	C CAPACITOR	9pF 50V D	1	
	C709	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C710	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C711	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C712	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C713	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C716	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C717	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C718	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C722	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	
	C723	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	
	C724	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	
	C736	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	
	C820	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C821	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C830	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	
	C831	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C832	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C840	CK73GBB1C473K	C CAPACITOR	0.047uF 16V K	1	
	C850	CK73GBB1C474K	C CAPACITOR	0.47uF 16V K	1	
	C851	CK73GBB1C474K	C CAPACITOR	0.47uF 16V K	1	
	C852	CD04AS0J101M	E CAPACITOR	100uF 6.3V M	1	
	C860	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C861	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C863	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1	
	C864	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1	
	C865	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C867	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C868	QE20850-157Z	E CAPACITOR	150uF	1	
	C869	CC73GCH1H150J	C CAPACITOR	15pF 50V J	1	
	C870	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C871	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C872	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C890	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C891	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C904	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C905	CD04AR1C471M	E CAPACITOR	470uF 16V M	1	
	C907	CD04AS0J101M	E CAPACITOR	100uF 6.3V M	1	
	C908	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C909	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C911	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C912	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C914	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C915	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C940	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C941	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C942	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C990	CD04EU1C222M2	E CAPACITOR	2200uF 16V M	1	
	C1000	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C1001	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C1003	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C1004	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C1005	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C1007	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C1021	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C1034	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C1039	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C1041	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C1042	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C1044	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	

MODEL	MARK
KDC-HD262U	

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C1049	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C1050	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	
	C1051	CC73GCH1H030C	C CAPACITOR	3pF 50V C	1	
	C1077	CC73GCH1H030C	C CAPACITOR	3pF 50V C	1	
	C1078	CC73GCH1H030C	C CAPACITOR	3pF 50V C	1	
	C1092	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C1094	CC73GCH1H020C	C CAPACITOR	2pF 50V C	1	
	C1096	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C1103	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C1104	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C1110	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C1233	CC73GCH1H020C	C CAPACITOR	2pF 50V C	1	
	C1241	CC73GCH1H070D	C CAPACITOR	7pF 50V D	1	
	C1242	CC73GCH1H070D	C CAPACITOR	7pF 50V D	1	
	C1243	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C1246	CC73GCH1H080D	C CAPACITOR	8pF 50V D	1	
	C1252	CC73GCH1H020C	C CAPACITOR	2pF 50V C	1	
	C1253	CC73GCH1H020C	C CAPACITOR	2pF 50V C	1	
	R100	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	
	R103	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R104	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R164	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R168	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R169	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R170	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R171	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	
	R250	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	
	R251	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	
	R252	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	
	R253	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R270	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	
	R271	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	
	R273	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	
	R302	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
	R303	RK73EB2E5R1J	MG RESISTOR	5.1Ω 1/4W J	1	
	R304	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R307	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R320	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	
	R321	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	
	R323	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	
	R330	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	
	R331	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	
	R333	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	
	R340	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	
	R341	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	
	R342	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R343	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	
	R350	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	
	R351	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	
	R353	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	
	R370	RK73GB2A683J	MG RESISTOR	68kΩ 1/10W J	1	
	R371	RK73GB2A123J	MG RESISTOR	12kΩ 1/10W J	1	
	R372	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	
	R390	RK73EB2E472J	MG RESISTOR	4.7kΩ 1/4W J	1	
	R400	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	
	R402	RK73GB2A225J	MG RESISTOR	2.2MΩ 1/10W J	1	
	R410	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R411	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R412	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R413	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R414	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R541	RK73GB2A562J	MG RESISTOR	5.6kΩ 1/10W J	1	
	R542	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	
	R543	RK73GB2A562J	MG RESISTOR	5.6kΩ 1/10W J	1	
	R544	RK73GB2A183J	MG RESISTOR	18kΩ 1/10W J	1	
	R546	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	
	R548	RK73GB2A123J	MG RESISTOR	12kΩ 1/10W J	1	
	R550	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
	R551	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
	R554	RK73GB2A225J	MG RESISTOR	2.2MΩ 1/10W J	1	
	R556	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R557	RK73EB2E4R7J	MG RESISTOR	4.7Ω 1/4W J	1	
	R558	RK73GB2A821J	MG RESISTOR	820Ω 1/10W J	1	
	R559	RK73GB2A272J	MG RESISTOR	2.7kΩ 1/10W J	1	
	R562	RK73EB2E823J	MG RESISTOR	82kΩ 1/4W J	1	
	R565	RK73GB2A121J	MG RESISTOR	120Ω 1/10W J	1	
	R567	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R569	RK73EB2E102J	MG RESISTOR	1kΩ 1/4W J	1	
	R570	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R571	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	
	R572	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	
	R573	RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	1	
	R579	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
	R580	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
	R587	RK73GB2A5R1J	MG RESISTOR	5.1Ω 1/10W J	1	
	R589	RK73GB2A821J	MG RESISTOR	820Ω 1/10W J	1	
	R590	RK73GB2A821J	MG RESISTOR	820Ω 1/10W J	1	
	R600	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R602	RK73GB2A2R0J	MG RESISTOR	2Ω 1/10W J	1	
	R650	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R651	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R652	RK73GB2A391J	MG RESISTOR	390Ω 1/10W J	1	
	R653	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	

MODEL					MARK
KDC-HD262U					
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY Local
R654		RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1
R661		RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1
R662		RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1
R701		RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1
R702		RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1
R703		RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1
R704		RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1
R705		RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1
R707		RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1
R708		RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1
R709		RK73GB2A332J	MG RESISTOR	3.3kΩ 1/10W J	1
R711		RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1
R712		RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1
R713		RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1
R714		RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1
R715		RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1
R716		RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1
R717		RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1
R719		RK73GB2A911J	MG RESISTOR	910Ω 1/10W J	1
R720		RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1
R721		RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1
R722		RK73GB2A911J	MG RESISTOR	910Ω 1/10W J	1
R723		RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1
R724		RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	1
R725		RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1
R726		RK73GB2A220J	MG RESISTOR	22Ω 1/10W J	1
R727		RK73GB2A153J	MG RESISTOR	15kΩ 1/10W J	1
R728		RK73GB2A220J	MG RESISTOR	22Ω 1/10W J	1
R729		RK73GB2A153J	MG RESISTOR	15kΩ 1/10W J	1
R730		RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1
R731		RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1
R733		RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1
R735		RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1
R739		RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1
R740		RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1
R741		RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1
R742		RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1
R743		RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1
R744		RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1
R745		RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1
R746		RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1
R747		RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1
R748		RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1
R749		RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1
R750		RK73GB2A121J	MG RESISTOR	120Ω 1/10W J	1
R751		RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1
R752		RK73GB2A121J	MG RESISTOR	120Ω 1/10W J	1
R753		RK73EB2E910J	MG RESISTOR	91Ω 1/4W J	1
R754		RK73GB2A121J	MG RESISTOR	120Ω 1/10W J	1
R755		RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1
R756		RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1
R757		RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1
R758		RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1
R759		RK73EB2E471J	MG RESISTOR	470Ω 1/4W J	1
R760		RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1
R761		RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1
R762		RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1
R763		RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1
R764		RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1
R768		RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1
R769		RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1
R775		RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1
R776		RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1
R820		RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1
R821		RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1
R822		RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1
R830		RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1
R840		RK73GB2A271J	MG RESISTOR	270Ω 1/10W J	1
R841		RK73GB2A271J	MG RESISTOR	270Ω 1/10W J	1
R861		RK73GB2A200J	MG RESISTOR	20Ω 1/10W J	1
R863		RK73GB2A393J	MG RESISTOR	39kΩ 1/10W J	1
R865		RK73GH2A683D	MG RESISTOR	68kΩ 1/10W D	1
R866		RK73GH2A183D	MG RESISTOR	18kΩ 1/10W D	1
R867		RK73GH2A393D	MG RESISTOR	39kΩ 1/10W D	1
R868		RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1
R890		RK73GH2A203D	MG RESISTOR	20kΩ 1/10W D	1
R892		RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1
R901		RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1
R902		RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1
R903		RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1
R904		RK73EB2E682J	MG RESISTOR	6.8kΩ 1/4W J	1
R905		RK73EB2E682J	MG RESISTOR	6.8kΩ 1/4W J	1
R907		RK73EB2E473J	MG RESISTOR	47kΩ 1/4W J	1
R908		RK73EB2E473J	MG RESISTOR	47kΩ 1/4W J	1
R933		RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1
R940		RK73EB2E1R0J	MG RESISTOR	1Ω 1/4W J	1
R960		RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1
R961		RK73GB2A151J	MG RESISTOR	150Ω 1/10W J	1
R962		RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1
R1003		RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1
R1034		RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1
R1043		RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1

MODEL	MARK
KDC-HD262U	

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R1044	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R1045	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R1051	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R1053	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R1055	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R1057	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R1062	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R1063	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R1064	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R1065	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R1066	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R1070	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	
	R1073	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R1075	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R1078	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R1080	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R1081	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R1087	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	
	R1229	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R1230	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	
	R1231	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R1236	RK73GB2A910J	MG RESISTOR	91Ω 1/10W J	1	
	R1237	RK73GB2A910J	MG RESISTOR	91Ω 1/10W J	1	
	R1241	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R1243	RK73GH2A100D	MG RESISTOR	10Ω 1/10W D	1	
	R1245	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R1246	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R1700	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R1701	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R1820	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	RA540	RK74GB1J471J	NET RESISTOR	470Ω 1/16W J	1	
	RA701	RK74GB1J221J	NET RESISTOR	220Ω 1/16W J	1	
	L540	NQR0713-001X	FERRITE BEADS		1	
	L574	NQR0713-001X	FERRITE BEADS		1	
	L600	LB73G0AM-004	CHIP FERRITE		1	
	L601	LR73Z0AD4R7M	CHIP INDUCTOR	4.7uH	1	
	L602	LB73G0BA-005	CHIP FERRITE		1	
	L700	NQR0713-001X	FERRITE BEADS		1	
	L701	NQR0714-001X	FERRITE BEADS		1	
	L703	LB73G0BA-005	CHIP FERRITE		1	
	L704	LB73G0BA-005	CHIP FERRITE		1	
	L705	LB73G0BA-005	CHIP FERRITE		1	
	L709	NQR0713-001X	FERRITE BEADS		1	
	L710	NQR0713-001X	FERRITE BEADS		1	
	L711	NQR0713-001X	FERRITE BEADS		1	
	L777	NQR0713-001X	FERRITE BEADS		1	
	L778	NQR0713-001X	FERRITE BEADS		1	
	L820	NQR0713-001X	FERRITE BEADS		1	
	L821	NQR0713-001X	FERRITE BEADS		1	
	L822	NQR0713-001X	FERRITE BEADS		1	
	L823	NQR0713-001X	FERRITE BEADS		1	
	L824	NQR0713-001X	FERRITE BEADS		1	
	L825	LB73G0CA-002	CHIP FERRITE		1	
	L826	NQR0269-030X	FERRITE BEADS		1	
	L827	NQR0714-001X	FERRITE BEADS		1	
	L850	LR73Z0AD4R7M	CHIP INDUCTOR	4.7uH	1	
	L860	NQLL6EM-100X	INDUCTOR	10uH M	1	
	L861	NQLH65M-4R7X	INDUCTOR	4.7uH M	1	
	L960	LB73G0AM-004	CHIP FERRITE		1	
	L990	QQR1927-001	CHOKE COIL		1	
	L1000	NQR0713-001X	FERRITE BEADS		1	
	L1005	NQR0713-001X	FERRITE BEADS		1	
	L1006	NQR0713-001X	FERRITE BEADS		1	
	L1007	NQR0713-001X	FERRITE BEADS		1	
	CN502	QGF1040F1-24	FFC/FPC CONNE	FFC/FPC (1-24)	1	
	CN701	QGZ2006J1-20	DETACHABLE CONN	(1-20)	1	
	CN990	QNZ0607-001	CAR CONNECTOR		1	
	J321	QNN0866-001	PIN JACK		1	
	J601	QNB0356-001	ANT TERMINAL		1	
	S830	QSW0648-001Z	TACT SWITCH		1	
	X540	NAX1224-001X	CRYSTAL		1	
	X701	NAX1243-001X	CRYSTAL		1	
SWITCH PWB ASSY (XJ6-0230-10) <03>						
	IC1	BU97530KV-M-X	IC		1	
	IC90	SIR8630B6T	IR DETECT UNIT		1	
	Q1	LSCR523UBFS8	TRANSISTOR		1	
	Q51	LSCR523EBFS8	TRANSISTOR		1	
	Q52	LSCR523EBFS8	TRANSISTOR		1	
	Q53	LSCR523EBFS8	TRANSISTOR		1	
	D1	DZ2J056M	ZENER DIODE		1	
	D2	MBRX130	SCHOTTKY DIODE		1	
	D20	SML-D12V8WT	LED		1	
	D21	NESM026DT-W	LED		1	
	D22	NESM026DT-W	LED		1	
	D23	NESM026DT-W	LED		1	
	D24	NESM026DT-W	LED		1	
	D40	NESM026DT-W	LED		1	
	D80	DZ2J051M	ZENER DIODE		1	
	D81	DZ2J051M	ZENER DIODE		1	
	C1	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C5	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C6	CK73EXR1C106K	C CAPACITOR	10uF 16V K	1	
	C9	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	

MODEL	MARK
KDC-HD262U	

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C60	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C61	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C80	CC73GCH1H270J	C CAPACITOR	27pF 50V J	1	
	C81	CC73GCH1H270J	C CAPACITOR	27pF 50V J	1	
	C82	CK73EXR1C106K	C CAPACITOR	10uF 16V K	1	
	C83	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C84	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C85	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C86	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	
	C90	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	R1	RK73EB2E101J	MG RESISTOR	100Ω 1/4W J	1	
	R3	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R4	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R5	RK73FB2B331J	MG RESISTOR	330Ω 1/8W J	1	
	R6	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	
	R22	RK73GB2A122J	MG RESISTOR	1.2kΩ 1/10W J	1	
	R23	RK73FB2B911J	MG RESISTOR	910Ω 1/8W J	1	
	R24	RK73FB2B911J	MG RESISTOR	910Ω 1/8W J	1	
	R26	RK73GB2A122J	MG RESISTOR	1.2kΩ 1/10W J	1	
	R27	RK73FB2B911J	MG RESISTOR	910Ω 1/8W J	1	
	R28	RK73FB2B911J	MG RESISTOR	910Ω 1/8W J	1	
	R30	RK73GB2A122J	MG RESISTOR	1.2kΩ 1/10W J	1	
	R31	RK73FB2B911J	MG RESISTOR	910Ω 1/8W J	1	
	R32	RK73FB2B911J	MG RESISTOR	910Ω 1/8W J	1	
	R34	RK73GB2A122J	MG RESISTOR	1.2kΩ 1/10W J	1	
	R35	RK73FB2B911J	MG RESISTOR	910Ω 1/8W J	1	
	R36	RK73FB2B911J	MG RESISTOR	910Ω 1/8W J	1	
	R44	RK73GB2A122J	MG RESISTOR	1.2kΩ 1/10W J	1	
	R45	RK73GB2A122J	MG RESISTOR	1.2kΩ 1/10W J	1	
	R46	RK73GB2A122J	MG RESISTOR	1.2kΩ 1/10W J	1	
	R47	RK73GB2A122J	MG RESISTOR	1.2kΩ 1/10W J	1	
	R48	RK73GB2A821J	MG RESISTOR	820Ω 1/10W J	1	
	R51	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R52	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R53	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R60	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	1	
	R61	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	1	
	R62	RK73FB2B4R7J	MG RESISTOR	4.7Ω 1/8W J	1	
	R70	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
	R80	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	
	R1007	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	RA1	RK74GB1J101J	NET RESISTOR	100Ω 1/16W J	1	
	RA2	RK74GB1J101J	NET RESISTOR	100Ω 1/16W J	1	
	RA3	RK74GB1J101J	NET RESISTOR	100Ω 1/16W J	1	
	CN1	QGZ2006K1-20X	DETACHABLE CONN	(1-20)	1	
	FL80	NQR0704-001X	CHOKE COIL		1	
	J60	QNS0320-001	3.5 JACK		1	
	J80	QNZ1076-001	USB CONNECTOR		1	
	S20	T9K-0007-00	ROTARY ENCODER		1	
HD TUNER PWB ASSY (XJM-0120-11) <02>						
	IC1	SI4763-A42-GM	MOS IC		1	
	IC2	SI4613-A10-GM	MOS IC		1	
	IC3	W3F-0022-00	ROM IC		1	
	IC4	XC6213B182N-G	MOS IC		1	
	C2	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	
	C3	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	
	C4	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	
	C5	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	
	C6	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C7	CK73GBB1H222K	C CAPACITOR	2200pF 50V K	1	
	C8	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C9	CC73GCH1H390J	C CAPACITOR	39pF 50V J	1	
	C10	CC73GCH1H270J	C CAPACITOR	27pF 50V J	1	
△	C15	CC73GCH1H010C	C CAPACITOR	1pF 50V C	1	
	C16	CC73GCH1H050C	C CAPACITOR	5pF 50V C	1	
	C18	CK73GBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C19	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	
	C20	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C21	CK73GBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C22	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C25	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	
	C26	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	
	C27	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C28	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C29	CC73HCH1H060D	C CAPACITOR	6pF 50V D	1	
	C30	CC73HCH1H060D	C CAPACITOR	6pF 50V D	1	
	C32	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C33	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C40	CC73GCH1H020C	C CAPACITOR	2pF 50V C	1	
	C101	CC73GCH1H220J	C CAPACITOR	22pF 50V J	1	
	C102	CC73GCH1H220J	C CAPACITOR	22pF 50V J	1	
	C103	CC73GCH1H220J	C CAPACITOR	22pF 50V J	1	
	C120	CC73GCH1H020C	C CAPACITOR	2pF 50V C	1	
	C121	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C122	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C123	CC73HCH1H180J	C CAPACITOR	18pF 50V J	1	
	C124	CC73HCH1H180J	C CAPACITOR	18pF 50V J	1	
	C125	CC73HCH1H180J	C CAPACITOR	18pF 50V J	1	
	C127	CK73GBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C128	CC73GCH1H020C	C CAPACITOR	2pF 50V C	1	
	C129	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	

MODEL	MARK
KDC-HD262U	

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C131	CK73HCH1H180J	C CAPACITOR	18pF 50V J	1	
	C143	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	
	C144	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	
	C146	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	
	R1	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R3	RK73GB2A240J	MG RESISTOR	24Ω 1/10W J	1	
	R4	RK73GB2A474J	MG RESISTOR	470kΩ 1/10W J	1	
	R5	RK73GB2A474J	MG RESISTOR	470kΩ 1/10W J	1	
	R10	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R11	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R12	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R14	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	
	R16	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R17	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R18	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R20	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R26	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R29	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R30	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R31	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R39	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	
	R40	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R41	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R42	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R43	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R44	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R51	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R52	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R53	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R54	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R103	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R104	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R105	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R107	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R108	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R109	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R110	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R111	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R112	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R114	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R115	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	
	R116	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	
	R121	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	1	
	R122	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	1	
	R123	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	1	
	R124	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	1	
	R127	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	1	
	R129	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R140	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R141	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R142	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R143	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R144	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R145	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	
	R155	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	1	
	R166	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	1	
	L1	LK73G0BER15K	M.CHIP INDUCTOR		1	
	L2	LK73G0BE82NK	M.CHIP INDUCTOR		1	
	L3	LK73G0BER12K	M.CHIP INDUCTOR		1	
	L4	LK73G0BER82K	M.CHIP INDUCTOR		1	
	L5	LK73G0BE1R8K	M.CHIP INDUCTOR		1	
	L8	LK73G0BER39K	M.CHIP INDUCTOR		1	
	L10	L1K-0001-00	BALUN TRANS		1	
	L14	LK73G0BE100K	M.CHIP INDUCTOR		1	
	L21	NQR0592-004X	FERRITE BEADS		1	
	L22	NQR0592-004X	FERRITE BEADS		1	
	L101	NQR0713-001X	FERRITE BEADS		1	
	CN1	EA110AD-2017B	W TO B CONNE		1	
	CN2	EA110AD-2003B	W TO B CONNE		1	
	X1	L7J-0021-00	QUARTZ CRYSTAL		1	
CD MECHA PWB ASSY (LVA20106-01A) <04>						
	IC1	BD8266EFV-M-X	IC		1	
	C26	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C54	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C55	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	R18	RK73GB2A822J	MG RESISTOR	8.2kΩ 1/10W J	1	
	R21	RK73GB2A822J	MG RESISTOR	8.2kΩ 1/10W J	1	
	R24	RK73GB2A272J	MG RESISTOR	2.7kΩ 1/10W J	1	
	R27	RK73GB2A562J	MG RESISTOR	5.6kΩ 1/10W J	1	
	R28	RK73GB2A114J	MG RESISTOR	110kΩ 1/10W J	1	
	R29	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R30	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R36	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R37	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R38	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R40	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R42	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R47	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R48	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R50	RK73GB2A131J	MG RESISTOR	130Ω 1/10W J	1	
	CN1	QGF1044F2-24X	FFC/FPC CONNE	FFC/FPC (1-24)	1	
	CN2	QGF0522F6-15W	FFC/FPC CONNE	FFC/FPC (1-15)	1	

MODEL					MARK	
KDC-HD262U						
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	SW1	NSW0291-001X	DETECT SWITCH		1	
	SW2	NSW0291-001X	DETECT SWITCH		1	
	SW3	NSW0313-001X	DETECT SWITCH		1	
CD MECHA PWB ASSY (X32-6680-00) <05>						
	IC1	BD8266EFV-M-X	IC		1	
	C26	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C54	CK73GB1H104K	C CAPACITOR	0.1uF 50V K	1	
	C55	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	R18	RK73GB2A822J	MG RESISTOR	8.2kΩ 1/10W J	1	
	R21	RK73GB2A822J	MG RESISTOR	8.2kΩ 1/10W J	1	
	R24	RK73GB2A272J	MG RESISTOR	2.7kΩ 1/10W J	1	
	R27	RK73GB2A562J	MG RESISTOR	5.6kΩ 1/10W J	1	
	R28	RK73GB2A114J	MG RESISTOR	110kΩ 1/10W J	1	
	R29	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R30	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R36	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R37	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R38	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R40	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R42	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R47	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R48	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R50	RK73GB2A131J	MG RESISTOR	130Ω 1/10W J	1	
	CN1	QGF1044F2-24X	FFC/FPC CONNE	FFC/FPC (1-24)	1	
	CN2	E41-3488-05	F.C.CONNECTOR		1	
	S1	S6J-0001-00	PUSH SWITCH		1	
	S2	S6J-0001-00	PUSH SWITCH		1	
	S3	S6J-0002-00	PUSH SWITCH		1	