


■ EXPLODED VIEW • PARTS LIST:


DCP Section

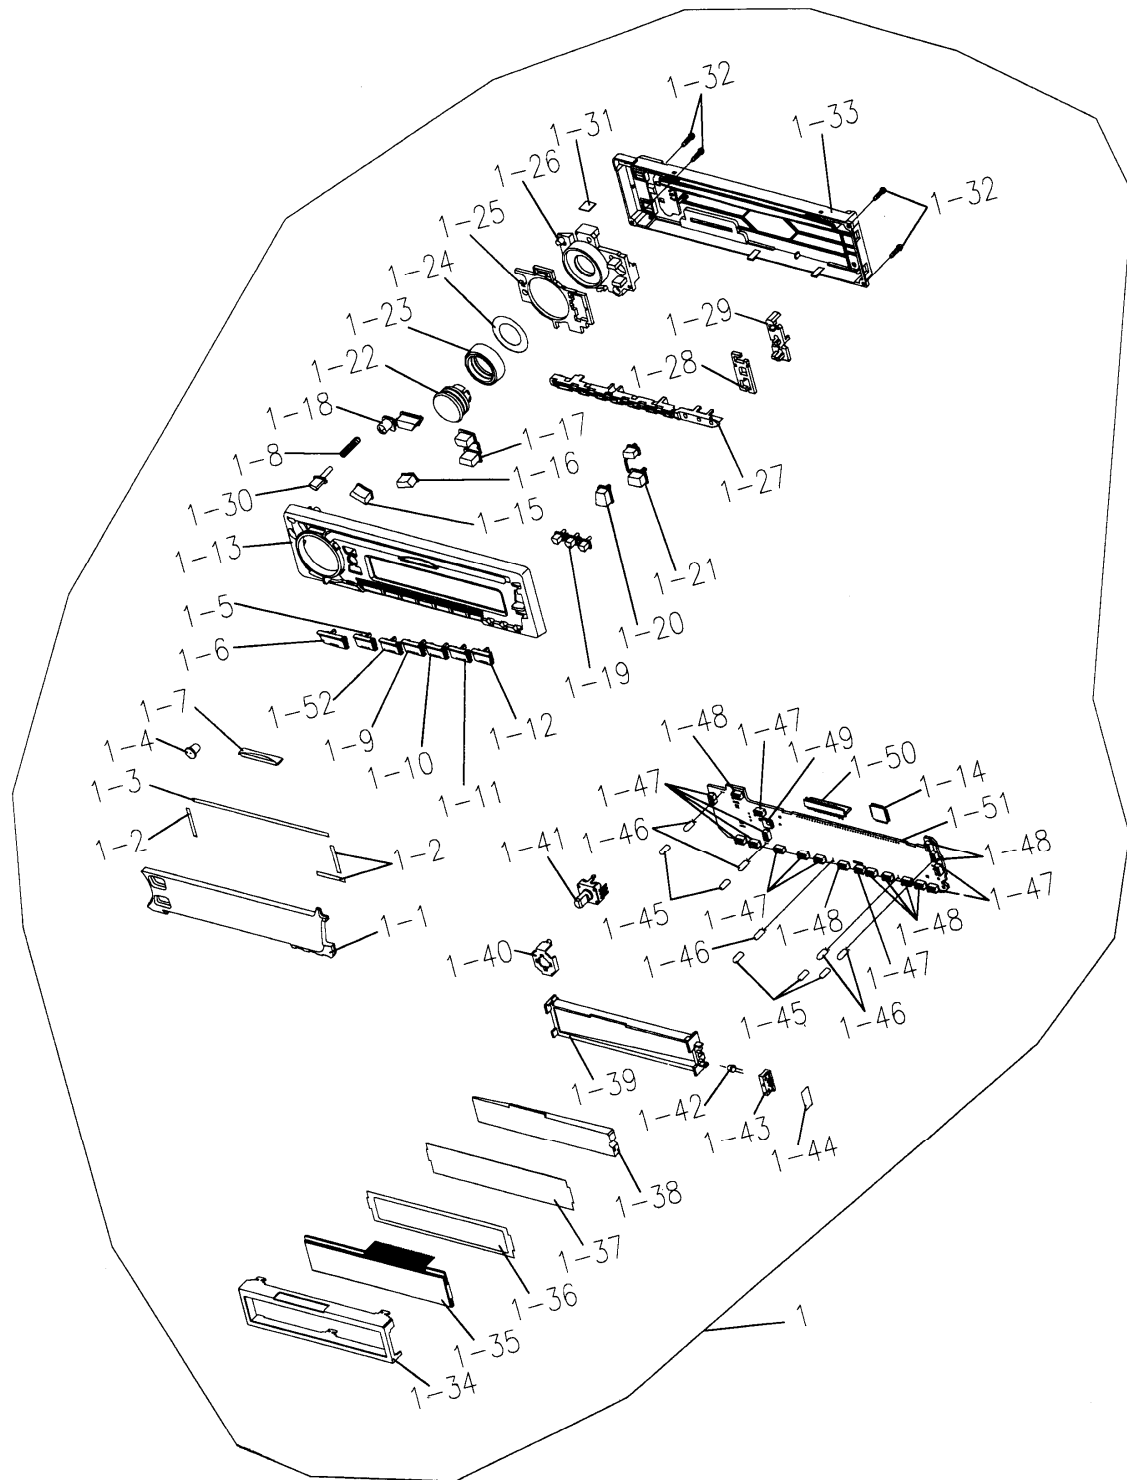

NO.	PARTS NO.	DESCRIPTION	Q'TY
1	DCP-344-600	DCP ASSY(PE-2393B)	1
	DCP-345-600	DCP ASSY(PE-2394B)	1
1-1	373-0953-00	DIAL-CVR(PE-2393B/K)	1
	373-0953-03	DIAL-CVR(PE-2394B)	1
1-2	347-6509-00	DOUBLE FACE	3
1-3	347-6505-00	DOUBLE FACE	1
1-4	335-5828-00	IR-FILTER	1
1-5	382-6130-00	BUTTON(PE-2393B/K)	1
	382-6030-01	BUTTON(PE-2394B)	1
1-6	382-6129-00	BUTTON(PE-2393B/K)	1
	382-6129-01	BUTTON(PE-2394B)	1
1-7	335-5921-00	ILLUMI PLATE	1
1-8	750-6699-00	SPRING	1
1-9	382-6132-00	BUTTON(PE-2393B/K)	1
	382-6132-01	BUTTON(PE-2394B)	1
1-10	382-6133-00	BUTTON(PE-2393B/K)	1
	382-6133-01	BUTTON(PE-2394B)	1
1-11	382-6134-00	BUTTON(PE-2393B/K)	1
	382-6134-01	BUTTON(PE-2394B)	1
1-12	382-6135-00	BUTTON(PE-2393B/K)	1
	382-6135-01	BUTTON(PE-2394B)	1
1-13	370-5938-00	ESCUTCHEON(PE-2393B/K)	1
	370-5938-02	ESCUTCHEON(PE-2394B)	1
1-14	051-6013-00	IC	1
1-15	382-6127-00	BUTTON(PE-2393B/K)	1
	382-6127-01	BUTTON(PE-2394B)	1
1-16	382-6126-00	BUTTON(PE-2393B/K)	1
	382-6126-01	BUTTON(PE-2394B)	1
1-17	382-6122-00	BUTTON(PE-2393B/K)	1
	382-6122-01	BUTTON(PE-2394B)	1
1-18	382-6128-00	BUTTON(PE-2393B/K)	1
	382-6128-01	BUTTON(PE-2394B)	1
1-19	382-6137-00	BUTTON	1
1-20	382-6124-00	BUTTON(PE-2393B/K)	1
	382-6124-02	BUTTON(PE-2394B)	1
1-21	382-6125-00	BUTTON(PE-2393B/K)	1
	382-6125-02	BUTTON(PE-2394B)	1

NO.	PARTS NO.	DESCRIPTION	Q'TY
1-22	380-5512-00	KNOB(PE-2393B/K)	1
	380-5512-01	KNOB(PE-2394B)	1
1-23	345-8553-00	RUBBER PART	1
1-24	347-6506-00	SHADE	1
1-25	345-8617-00	SPONGE	1
1-26	335-6518-00	ILLUMI PLATE	1
1-27	335-6517-00	ILLUMI PLATE	1
1-28	345-8616-00	SPONGE	1
1-29	335-6516-00	ILLUMI PLATE	1
1-30	382-6139-00	BUTTON	1
1-31	347-6525-00	SHADE	1
1-32	778-2006-00	T-SCREW	4
1-33	335-6199-04	REAR-CVR	1
1-34	331-2808-00	LCD-CVR	1
1-35	379-1196-41	INDICATOR(LCD)	1
1-36	347-6167-00	SHADE	1
1-37	347-6166-00	FILM	1
1-38	335-6212-00	LCD ILLUMI	1
1-39	335-6208-00	LCD HOLDER	1
1-40	331-3133-00	JOG-SW HOLDER	1
1-41	016-9900-81	VR W/SHAFT	1
1-42	001-7046-00	DIODE	1
1-43	335-6216-00	LED HOLDER	1
1-44	347-6510-00	SHADE	1
1-45	345-4441-37	LAMP CAP	5
1-46	017-0444-00	PILOT LAMP(14V 50mA)	5
1-47	013-6305-50	TACT SWITCH	11
1-48	013-6001-50	SWITCH	8
1-49	060-4008-00	IR-RECEIVER	1
1-50	076-0615-00	PLUG	1
1-51	039-1892-00	SW-PWB (WITHOUT COMPONENT)	1
1-52	382-6131-00	BUTTON(PE-2393B/K)	1
	382-6131-01	BUTTON(PE-2394B)	1

Main Section

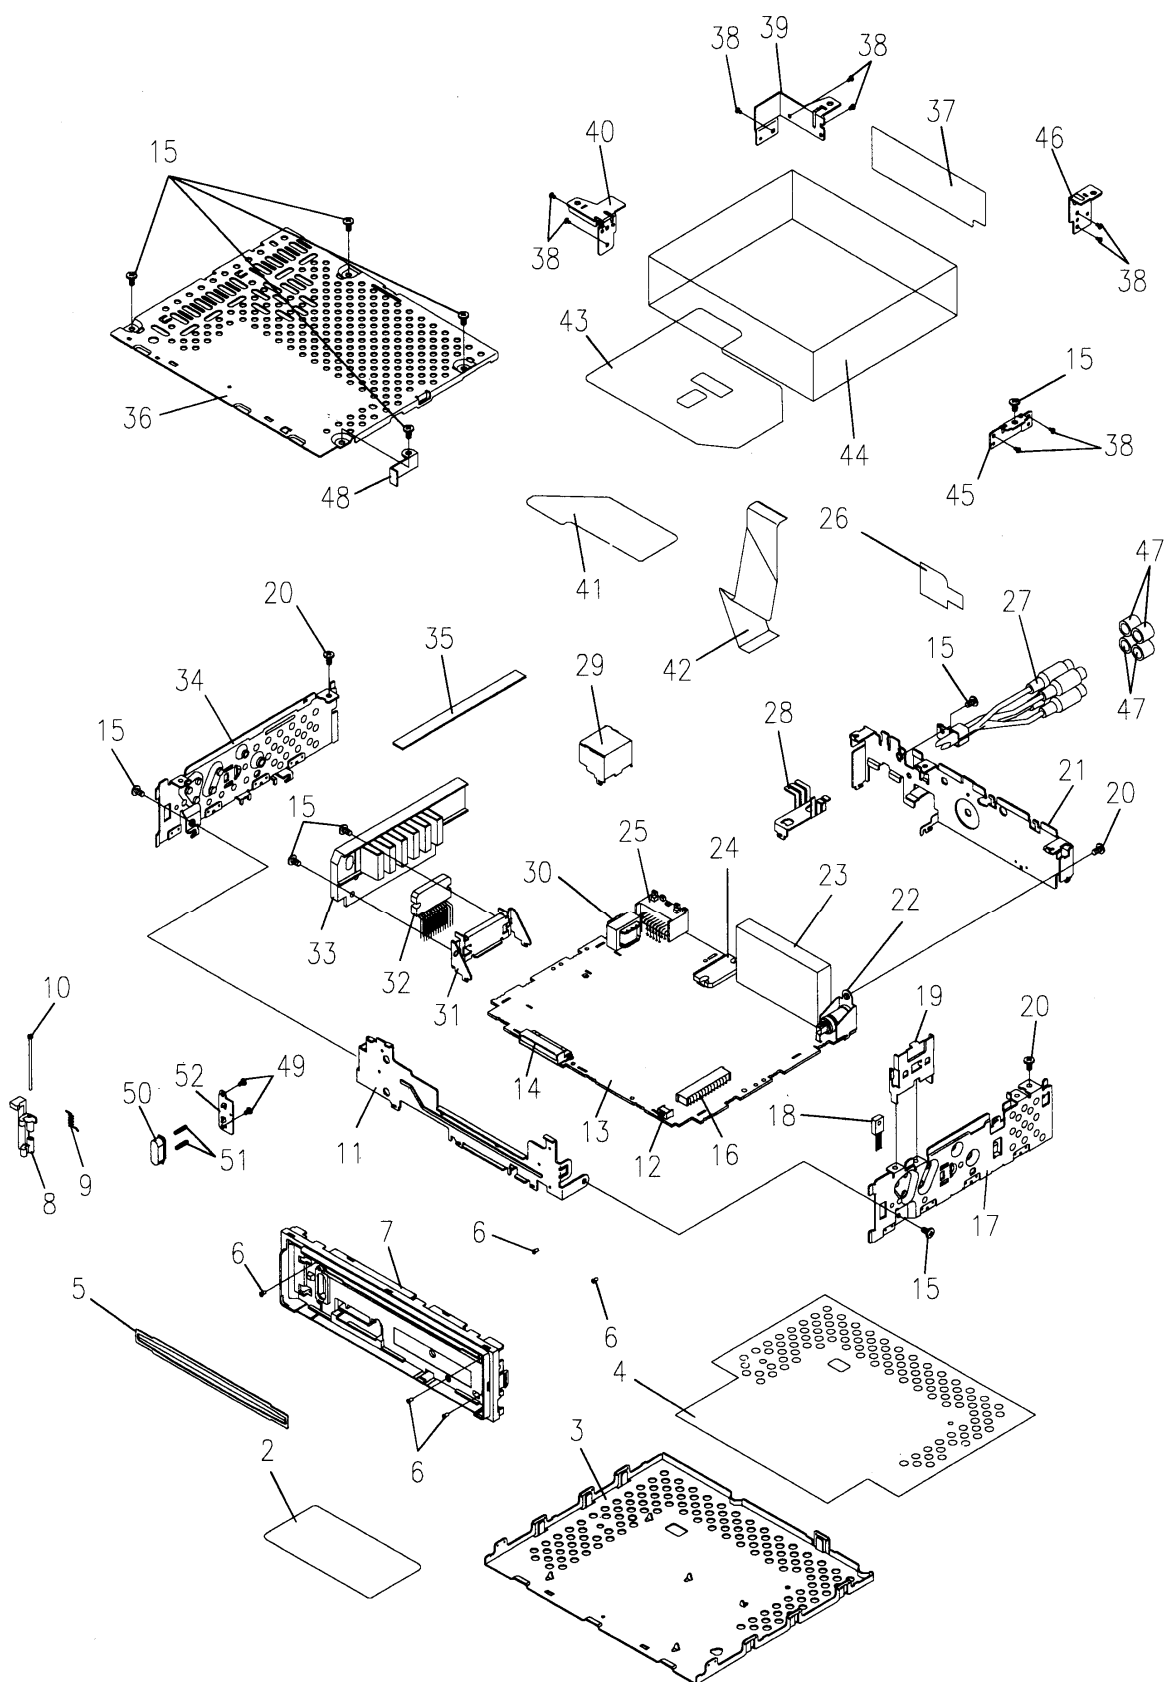

NO.	PARTS NO.	DESCRIPTION	Q'TY	NO.	PARTS NO.	DESCRIPTION	Q'TY
2	286-9520-00	SETPLATE(PE-2393B)	1	26	347-3701-00	FILM	1
	286-9521-00	SETPLATE(PE-2394B)	1	27	855-5428-50	RCA PIN CORD	1
	286-9522-00	SETPLATE(PE-2393K)	1	28	313-1772-00	HEAT SINK	1
3	304-0460-01	LOWER-CVR	1	29	331-2820-00	SHIELD CASE	1
4	347-5918-00	INSULATOR	1	30	009-9006-60	CHOKE	1
5	346-0097-00	LEATHER SHEET	1	31	331-2255-20	IC-HOLDER	1
6	780-2004-01	SCREW	5	32	051-2031-11	IC	1
7	370-5791-03	INNER-ES	1	33	313-1744-20	HEAT SINK	1
8	335-5915-01	HOOK	1	34	305-0274-01	SIDE-CVR	1
9	750-3219-00	SPRING	1	35	345-8511-00	RUBBER SHEET	1
10	341-1627-00	SHAFT	1	36	303-0472-00	UPPER-CVR	1
11	309-0721-01	FRONT PLATE	1	37	347-5215-00	INSULATOR	1
12	013-6100-00	SWITCH	1	38	716-0717-00	STEEL SCREW	9
13	039-1613-03	MAIN-PWB (WITHOUT COMPONENT)	1	39	331-2493-00	CD-SUB-BRKT	1
14	074-1217-00	OUTLET SOCKET	1	40	331-2491-00	CD-SUB-BRKT	1
15	731-3006-80	TAPTIGHT	10	41	347-5416-00	INSULATOR	1
16	074-1186-26	OUTLET SOCKET	1	42	816-2391-00	FLAT CABLE	1
17	305-0275-00	SIDE-CVR	1	43	347-5916-02	INSULATOR	1
18	103-2012-00	TRANSISTOR	1	44	929-0092-82	CD-MECH-MODULE	1
19	313-1651-21	HEAT SINK	1	45	331-2492-00	CD-SUB-BRKT	1
20	714-3006-81	MACHINE SCREW	3	46	331-2494-00	CD-SUB-BRKT	1
21	307-0626-01	REAR-CVR	1	47	345-3799-20	RUBBER PART	4
22	092-4000-50	ANT-RECEPT	1	48	331-2744-00	STOPPER	1
23	880-2087G	TUNER	1	49	716-0778-00	WAVE SCREW	2
24	051-3261-00	IC	1	50	382-4078-00	BUTTON	1
25	074-1214-00	OUTLET SOCKET	1	51	750-3173-00	SPRING	2
				52	331-2594-00	HOOK PLATE	1

■ ELECTRICAL PARTS LIST

Main PWB section (B2)

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
IC 301	051-3261-00	BA4906	L 102	010-2230-14	2.2 μ H	C 408	178-1022-78	50V 1000PF
IC 501	051-5016-00	TDA7404	L 103	010-2230-31	56 μ H	C 501	178-1042-78	25V 0.1 μ F
IC 601	051-2031-11	LA4743B	L 501	010-2285-57		C 502	178-1042-78	25V 0.1 μ F
IC 801	052-1914-20	uPD178016AGC	L 502	010-2285-57		C 503	183-1053-62	50V 1 μ F
Q 102	102-2712-51	2SC2712GL	L 503	010-2285-57		C 504	183-1053-62	50V 1 μ F
Q 103	102-2712-51	2SC2712GL	L 504	010-2285-57		C 509	183-4763-32	16V 47 μ F
Q 108	125-2004-03	RN1403	L 505	010-2285-57		C 510	183-1063-52	35V 10 μ F
Q 301	102-2712-00	2SC2712	L 601	009-9006-60	CHOKE	C 511	183-1063-52	35V 10 μ F
Q 303	125-2004-02	RN1402	L 801	010-2230-38	220 μ H	C 512	183-1063-52	35V 10 μ F
Q 304	102-2712-00	2SC2712	X 801	061-1064-00	4.5MHz	C 513	183-1063-52	35V 10 μ F
Q 305	101-1237-00	2SB1237	C 101	176-2201-00	50V 22PF	C 514	183-1063-52	35V 10 μ F
Q 306	125-0002-02	RN2402	C 102	178-1032-78	25V 0.01 μ F	C 515	178-1032-78	25V 0.01 μ F
Q 307	125-0002-02	RN2402	C 103	178-1032-78	25V 0.01 μ F	C 516	178-1022-78	50V 1000PF
Q 308	101-1243-00	2SB1243	C 104	178-2232-78	25V 0.022 μ F	C 519	178-1022-78	50V 1000PF
Q 309	125-2004-02	RN1402	C 105	183-1073-22	10V 100 μ F	C 601	172-2231-10	50V 0.022 μ F
Q 310	103-1858-00	2SD1858	C 106	183-1073-22	10V 100 μ F	C 602	042-447-00	16V 2200 μ F
Q 401	103-1858-00	2SD1858	C 107	183-1073-22	10V 100 μ F	C 603	183-3343-62	50V 0.33 μ F
Q 402	125-0002-06	RN2406	C 108	176-1011-00	50V 100PF	C 604	183-2263-32	16V 22 μ F
Q 403	125-2004-06	RN1406	C 109	176-1011-00	50V 100PF	C 605	183-4763-32	16V 47 μ F
Q 404	125-2004-06	RN1406	C 110	178-2232-78	25V 0.022 μ F	C 606	182-4746-63	50-0.47NP
Q 405	100-1048-00	2SA1048	C 111	176-1011-00	50V 100PF	C 607	182-4746-63	50-0.47NP
Q 406	103-2012-00	2SD2012	C 112	176-3311-00	50V 330PF	C 608	182-4746-63	50-0.47NP
Q 407	103-1858-00	2SD1858	C 113	178-1022-78	50V 1000PF	C 609	182-4746-63	50-0.47NP
Q 408	125-2004-02	RN1402	C 114	183-1053-62	50V 1 μ F	C 611	172-1041-10	50V 0.1 μ F
Q 501	125-4001-00	XN1504	C 117	178-2732-78	25V 0.027 μ F	C 612	172-1041-10	50V 0.1 μ F
Q 502	125-4001-00	XN1504	C 118	178-2732-78	25V 0.027 μ F	C 613	172-1041-10	50V 0.1 μ F
Q 601	125-0002-02	RN2402	C 122	042-9002-01	50V 3.3 μ F(LN)	C 614	172-1041-10	50V 0.1 μ F
Q 901	100-1162-00	2SA1162	C 123	178-1032-78	25V 0.01 μ F	C 615	173-1021-11	50V 1000PF
D 301	001-0376-41	MTZ7.5JB	C 125	178-4722-78	25V 4700PF	C 702	178-1022-78	50V 1000PF
D 302	001-0376-26	MTZ4.7JB	C 126	178-6822-78	50V 6800PF	C 801	176-2201-00	50V 22PF
D 303	001-0466-01	S5688G	C 127	178-1032-78	25V 0.01 μ F	C 802	176-2201-00	50V 22PF
D 305	001-0330-00	1SS119	C 128	178-1032-78	25V 0.01 μ F	C 803	178-4732-78	25V 0.047 μ F
D 306	001-0330-00	1SS119	C 129	176-2201-00	50V 22PF	C 804	178-4732-78	25V 0.047 μ F
D 307	001-0466-01	S5688G	C 130	178-1032-78	25V 0.01 μ F	C 805	178-1032-78	25V 0.01 μ F
D 309	001-0330-00	1SS119	C 131	176-1011-00	50V 100PF	C 806	182-4763-33	16V 47 μ F
D 310	001-0376-47	MTZ9.1JB	C 132	176-1011-00	50V 100PF	C 807	183-1073-12	6.3V 100 μ F
D 311	001-0330-00	1SS119	C 133	178-1022-78	50V 1000PF	C 808	178-1032-78	25V 0.01 μ F
D 401	001-0376-32	MTZ5.6JB	C 135	176-2096-00	50V 2PF	C 809	178-1032-78	25V 0.01 μ F
D 402	001-0376-47	MTZ9.1JB	C 302	172-1031-10	50V 0.01 μ F	C 810	178-1042-78	25V 0.1 μ F
D 403	001-0516-00	MA111	C 303	172-1031-10	50V 0.01 μ F	C 811	178-4732-78	25V 0.047 μ F
D 601	001-0592-00	RM4Z	C 305	183-1063-52	35V 10 μ F	C 812	178-1022-78	50V 1000PF
D 602	001-0466-01	S5688G	C 308	183-1063-52	35V 10 μ F	C 813	178-1022-78	50V 1000PF
D 603	001-0466-01	S5688G	C 309	178-1032-78	25V 0.01 μ F	C 814	178-1022-78	50V 1000PF
D 604	001-0466-01	S5688G	C 310	178-1032-78	25V 0.01 μ F	R 101	117-2221-10	1/10W 2.2K Ω
D 605	001-0466-01	S5688G	C 311	178-1032-78	25V 0.01 μ F	R 103	117-2221-10	1/10W 2.2K Ω
D 606	001-0466-01	S5688G	C 312	183-1063-32	16V 10 μ F	R 105	117-1021-10	1/10W 1K Ω
D 607	001-0466-01	S5688G	C 401	183-1073-22	10V 100 μ F	R 106	117-1231-10	1/10W 12K Ω
D 608	001-0466-01	S5688G	C 402	183-1063-52	35V 10 μ F	R 111	117-4721-10	1/10W 4.7K Ω
D 609	001-0466-01	S5688G	C 403	183-1073-22	10V 100 μ F	R 115	117-1021-10	1/10W 1K Ω
D 610	001-0516-00	MA111	C 404	183-1063-52	35V 10 μ F	R 116	117-1021-10	1/10W 1K Ω
D 901	001-0330-00	1SS119	C 405	176-6811-00	50V 680PF	R 120	117-5631-10	1/10W 56K Ω
L 101	010-4007-00	AMT COIL	C 406	176-6811-00	50V 680PF	R 121	117-4741-10	1/10W 470K Ω

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R 122	117-1011-10	1/10W 100 Ω	R 502	117-4721-10	1/10W 4.7K Ω	R 706	117-4721-10	1/10W 4.7K Ω
R 301	117-4731-10	1/10W 47K Ω	R 503	117-1021-10	1/10W 1K Ω	R 711	117-4731-10	1/10W 47K Ω
R 302	117-2231-10	1/10W 22K Ω	R 504	117-1021-10	1/10W 1K Ω	R 803	117-1031-10	1/10W 10K Ω
R 303	117-2231-10	1/10W 22K Ω	R 505	117-1031-10	1/10W 10K Ω	R 810	117-2231-10	1/10W 22K Ω
R 304	117-4721-10	1/10W 4.7K Ω	R 506	117-1031-10	1/10W 10K Ω	R 812	117-2221-10	1/10W 2.2K Ω
R 305	117-2231-10	1/10W 22K Ω	R 507	117-3311-10	1/10W 330 Ω	R 813	117-2221-10	1/10W 2.2K Ω
R 307	117-4721-10	1/10W 4.7K Ω	R 508	117-3311-10	1/10W 330 Ω	R 818	111-4731-91	1/4WSS 47K Ω
R 308	111-3321-91	1/4WSS 3.3k Ω	R 509	117-1021-10	1/10W 1K Ω	R 819	117-1041-10	1/10W 100K Ω
R 309	117-1031-10	1/10W 10K Ω	R 510	117-1021-10	1/10W 1K Ω	R 820	117-1041-10	1/10W 100K Ω
R 310	111-5611-81	1/2WS 560 Ω	R 511	117-1031-10	1/10W 10K Ω	R 821	111-1031-91	1/4WSS 10K Ω
R 311	117-1031-10	1/10W 10K Ω	R 512	117-1031-10	1/10W 10K Ω	R 822	111-1031-91	1/4WSS 10K Ω
R 312	117-1031-10	1/10W 10K Ω	R 513	117-3311-10	1/10W 330 Ω	R 823	111-1031-91	1/4WSS 10K Ω
R 313	117-4721-10	1/10W 4.7K Ω	R 514	117-3311-10	1/10W 330 Ω	R 825	117-1031-10	1/10W 10K Ω
R 314	111-4711-91	1/4WSS 470 Ω	R 515	111-4721-91	1/4WSS 4.7K Ω	R 826	117-1031-10	1/10W 10K Ω
R 318	117-1031-10	1/10W 10K Ω	R 516	111-4721-91	1/4WSS 4.7K Ω	R 827	111-2231-91	1/4WSS 22K Ω
R 402	117-1041-10	1/10W 100K Ω	R 517	111-4721-91	1/4WSS 4.7K Ω	R 830	117-1031-10	1/10W 10K Ω
R 403	117-4731-10	1/10W 47K Ω	R 518	111-4721-91	1/4WSS 4.7K Ω	R 831	117-4731-10	1/10W 47K Ω
R 404	111-1041-91	1/4WSS 100K Ω	R 524	111-1031-91	1/4WSS 10K Ω	R 832	117-4731-10	1/10W 47K Ω
R 405	117-1041-10	1/10W 100K Ω	R 602	117-1031-10	1/10W 10K Ω	R 901	117-1031-10	1/10W 10K Ω
R 406	111-4711-91	1/4WSS 470 Ω	R 604	117-1231-10	1/10W 12K Ω	R 902	117-4721-10	1/10W 4.7K Ω
R 407	111-2291-91	1/4WSS 2.2 Ω	R 605	117-4721-10	1/10W 4.7K Ω	R 903	117-4731-10	1/10W 47K Ω
R 408	111-2291-91	1/4WSS 2.2 Ω	R 606	111-4721-91	1/4WSS 4.7K Ω	SUP101	060-0122-20	DSP-414N
R 409	111-2211-91	1/4WSS 220 Ω	R 607	111-4721-91	1/4WSS 4.7K Ω	CN 106	074-1186-26	OUTLET SOCKET
R 410	111-2211-91	1/4WSS 220 Ω	R 608	117-4721-10	1/10W 4.7K Ω	CN 102	074-1214-00	OUTLET SOCKET
R 411	111-1221-91	1/4WSS 1.2K Ω	R 609	117-4721-10	1/10W 4.7K Ω	CN 101	074-1217-00	OUTLET SOCKET
R 412	117-4721-10	1/10W 4.7K Ω	R 701	117-4721-10	1/10W 4.7K Ω	SW 301	013-6100-00	SKHILLB(RESET)
R 413	117-1041-10	1/10W 100K Ω	R 702	117-4721-10	1/10W 4.7K Ω			
R 501	117-4721-10	1/10W 4.7K Ω	R 704	117-4721-10	1/10W 4.7K Ω			


Switch PWB section (B1)

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
IC 101	051-6013-00	LC75854W	R 108	119-1241-10	1/10W 120K Ω	S 105	013-6001-50	SKQCAB
Q 101	100-1162-00	2SA1162	R 109	119-1011-10	1/10W 100 Ω	S 106	013-6001-50	SKQCAB
D 101	001-0529-29	MA8051M	R 110	119-1011-10	1/10W 100 Ω	S 107	013-6305-00	SKQMAH
D 102	001-0529-14	MA8030L	R 111	119-2731-10	1/10W 27K Ω	S 108	013-6305-00	SKQMAH
D 103	001-0529-41	MA8075M	R 112	032-0092-80	1/10W 300 Ω 1%	S 109	013-6001-50	SKQCAB
D 104	001-7046-00	NSPW310BS	R 113	032-0092-80	1/10W 300 Ω 1%	S 110	013-6001-50	SKQCAB
C 101	168-4732-78	16V 0.047	R 114	119-1021-10	1/10W 1K Ω	S 111	013-6305-00	SKQMAH
C 102	168-4732-78	16V 0.047	R 115	119-1011-10	1/10W 100 Ω	S 112	013-6001-50	SKQCAB
C 103	168-1022-55	50V 1000P	CN 107	076-0615-00	PLUG	S 113	013-6305-00	SKQMAH
C 104	042-0416-51	6.3V 10 μ F(TAN)	PL 101	017-0444-00	14V 50mA	S 114	013-6001-50	SKQCAB
C 105	042-0416-51	6.3V 10 μ F(TAN)	PL 102	017-0444-00	14V 50mA	S 115	013-6305-00	SKQMAH
R 101	119-2221-10	1/10W 2.2K Ω	PL 103	017-0444-00	14V 50mA	S 116	013-6305-00	SKQMAH
R 102	119-2221-10	1/10W 2.2K Ω	PL 104	017-0444-00	14V 50mA	S 117	013-6305-00	SKQMAH
R 103	119-2221-10	1/10W 2.2K Ω	PL 105	017-0444-00	14V 50mA	S 118	016-9900-81	SIM-026MT
R 104	119-4731-10	1/10W 47K Ω	S 101	013-6001-50	SKQCAB	S 119	013-6001-50	SKQCAB
R 105	119-1031-10	1/10W 10K Ω	S 102	013-6305-00	SKQMAH	S 120	013-6305-00	SKQMAH
R 106	119-3311-10	1/10W 330 Ω	S 103	013-6305-00	SKQMAH	IR 101	060-4008-00	RS-171
R 107	119-3921-10	1/10W 3.9K Ω	S 104	013-6305-00	SKQMAH			

■ EXPLODED VIEW:

CD mechanism section 929-0092-82(BB-CD)

Drive unit section

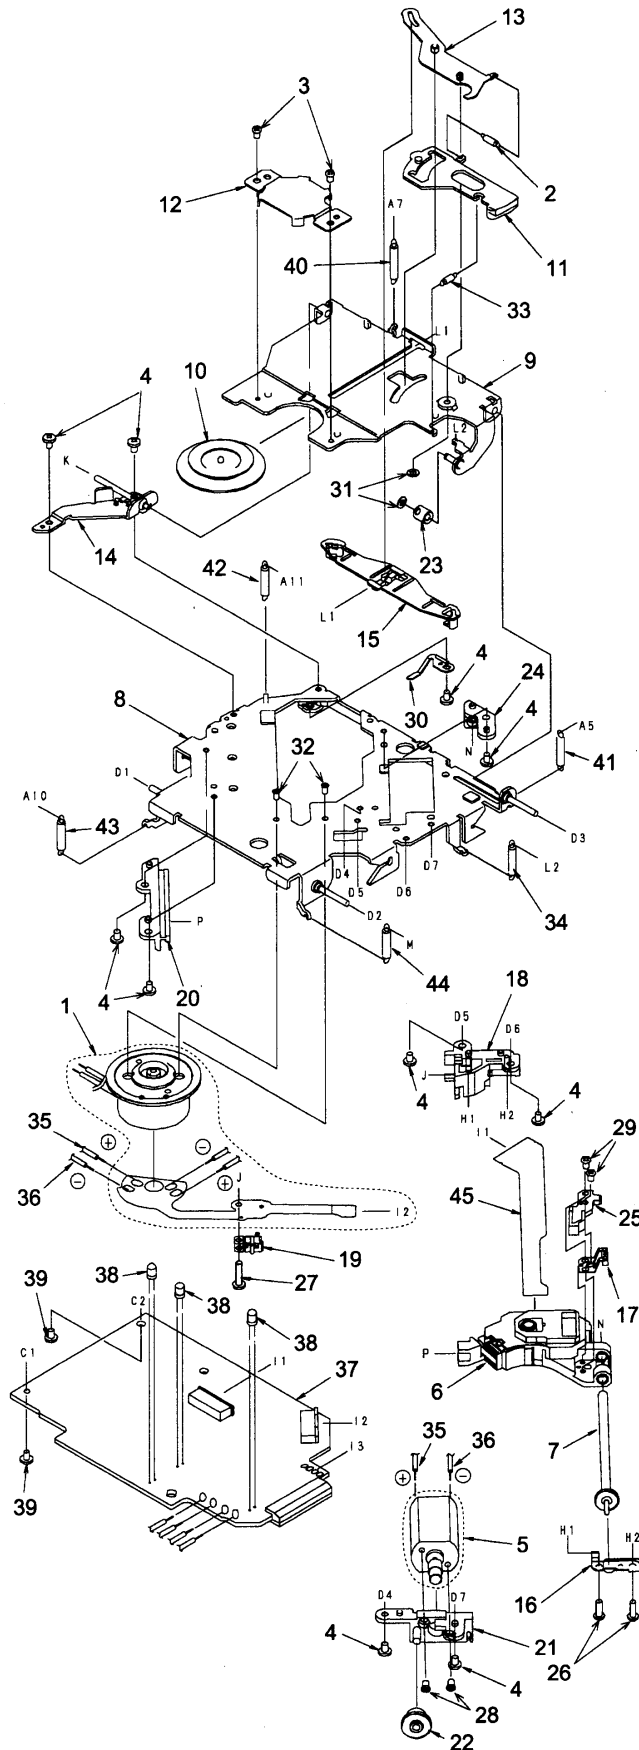

■ PARTS LIST:

CD mechanism section 929-0092-82(BB-CD)


Note) Several different parts of the same reference number are alternative parts.

One of those parts is used in the set.

Drive unit section

NO.	PARTS NO.	DESCRIPTION	Q'TY	NO.	PARTS NO.	DESCRIPTION	Q'TY
1	SMA-151-100	MOTOR ASSY (SPINDLE)	1	25	621-0375-00	SH-BASE	1
2	750-3098-00	L-LINK SPRING	1	26	716-0675-00	SCREW (M2x 5.5)	2
3	716-1468-00	SCREW (M2x 2.5)	2	27	716-1555-00	WAVE SCREW (φ 2x 8)	1
4	716-2003-81	SCREW (M2x 3)	10	28	732-2004-11	SEMS SCREW (M2x 4)	2
5	SMA-146-100	MOTOR ASSY (SLED)	1	29	739-1735-17	PRECISION SCREW (M1.7x 3.5)	2
6	969-0008-00	PICK UP UNIT	1	30	620-0690-01	RATTLE PLATE	1
7	HBS-432-100	LS-GEAR ASSY	1	31	746-0761-00	WASHER	2
8	966-0447-07	DR-PLATE-ASSY	1	32	716-1733-00	SCREW (M1.7x 2.3)	2
9	966-0449-04	CLAMP-LINK-ASSY	1	33	750-3099-00	ES-SPRING	1
10	621-0205-02	CLAMPER RING	1	34	750-3097-03	CLAMPER SPRING	1
11	621-0251-03	LOCK LINK	1	35	816-2373-00	LEAD WIRE (WHT)	1
12	620-0198-03	CLAMPER PLATE	1	36	816-2372-00	LEAD WIRE (BLU)	1
13	966-0314-01	STOP LINK-ASSY	1	37	039-1732-01	CD PWB (WITHOUT COMPONENT)	1
14	966-0448-01	SIDE PLATE-ASSY	1	38	001-0563-00	LED	3
15	621-0252-03	DISC STOPPER	1	39	716-1670-00	SCREW (M2x 4)	2
16	620-0491-03	SPRING PLATE	1	40	750-3202-00	CENTER SPRING-B	1
17	966-0454-00	SCREW H-RACK-ASSY	1	41	750-3096-01	DR-SPRING R	1
18	621-0358-02	LS-HOLDER-F	1	42	750-3164-00	DR-SPRING LR	1
19	013-7100-00	SWITCH (LIMIT)	1	43	750-3188-00	DR-SPRING F-B	1
20	621-0357-03	PICK UP GUIDE	1	44	750-3201-00	DR-SPRING F-R	1
21	621-0253-02	MOTOR HOLDER	1	45	039-1587-00	FPC (WITHOUT COMPONENT)	1
22	621-0255-02	SECOND GEAR	1				
23	622-1073-02	CLAMPER ROLLER	1				
24	621-0359-02	LS-HOLDER-R	1				

MECH chassis section

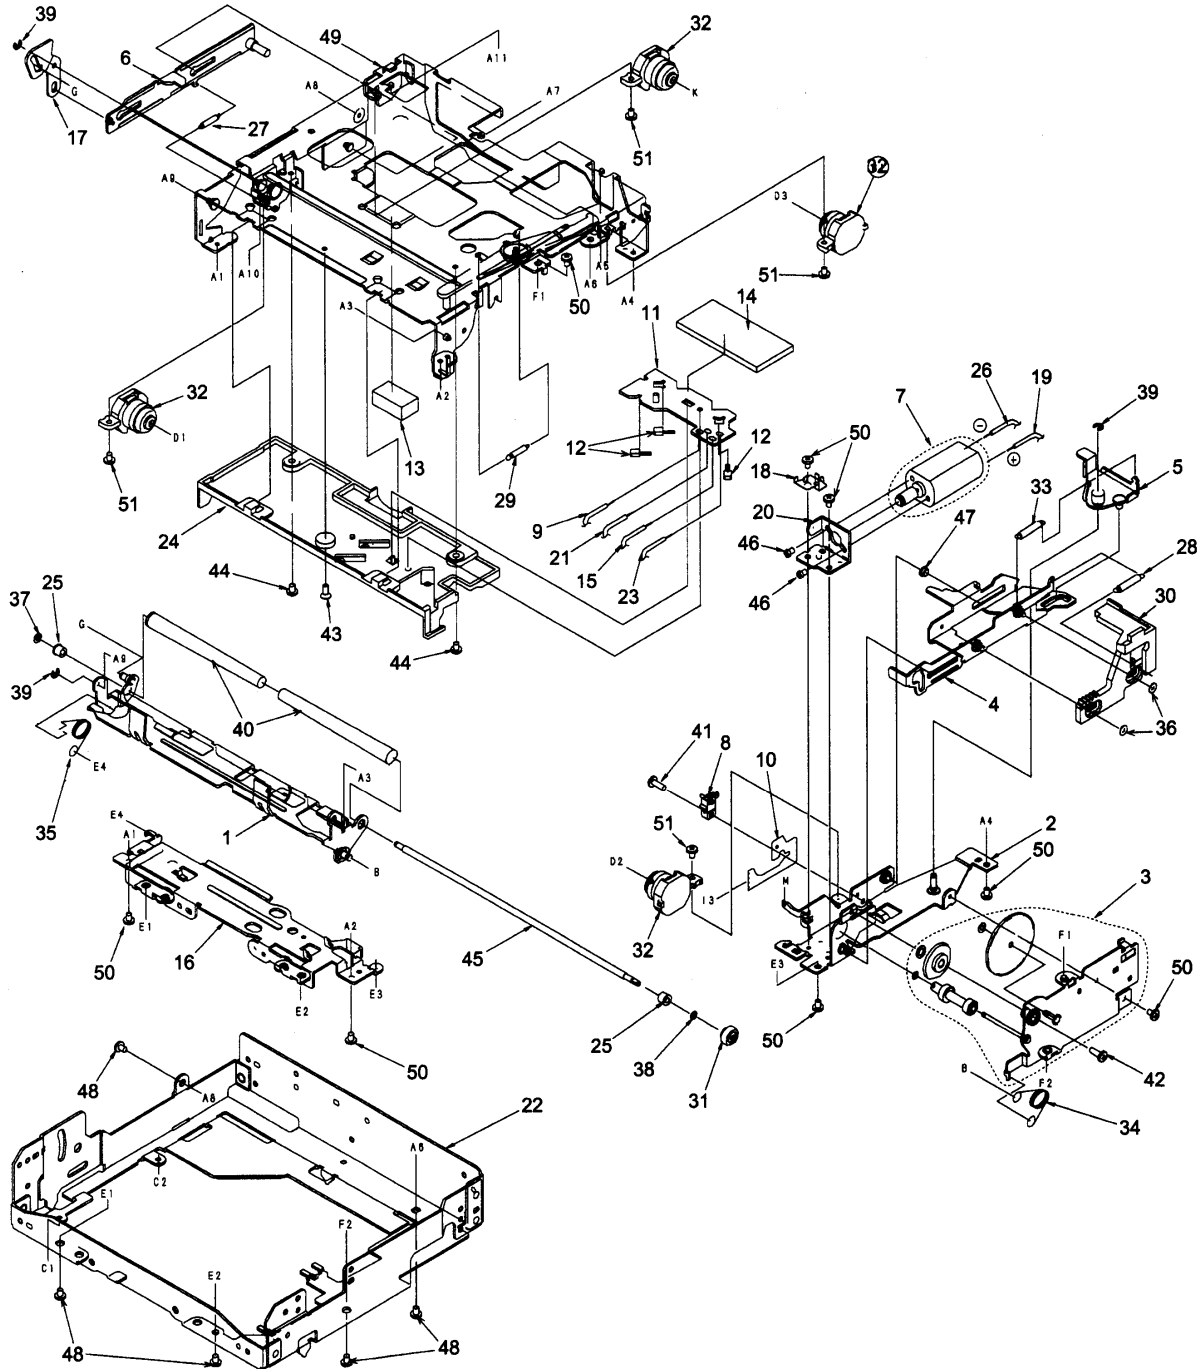

MECH chassis section

NO.	PARTS NO.	DESCRIPTION	Q'TY	NO.	PARTS NO.	DESCRIPTION	Q'TY
1	966-0309-05	L-DISC-G-ASSY	1	26	800-4904-60	VINYL-COAT-WIRE (BLK)	1
2	966-0310-06	SHIFT-P-CH-ASSY	1	27	750-3189-00	SIDE-L-SPRING	1
3	HBS-430-100	GEAR PLATE ASSY	1	28	750-3098-00	L-LINK SPRING	1
4	966-0312-06	SHIFT-PLATE-ASSY	1	29	750-3094-00	S-ARM SPRING	1
5	966-0358-01	DRIVE-L-PLATE-ASSY	1	30	621-0248-07	RACK GEAR	1
6	966-0359-03	SIDE-L-PLATE-ASSY	1	31	621-0249-02	ROLLER GEAR	1
7	SMA-147-100	MOTOR ASSY (LOADING)	1	32	629-0074-00	DAMPER	4
8	013-3879-01	CHUCKING SWITCH	1	33	750-3092-03	SHIFT SPRING	1
9	804-4910-60	VINYL-COAT-WIRE (YEL)	1	34	750-3091-03	LOADING-SPRING-R	1
10	039-0586-01	CHUCKING SWITCH PWB (WITHOUT COMPONENT)	1	35	750-3090-02	LOADING-SPRING-L	1
11	039-0588-01	SENSOR PWB (WITHOUT COMPONENT)	1	36	746-0877-02	WASHER	2
12	060-0252-01	PHOTO-TR	3	37	746-0762-00	WASHER	1
13	345-7513-01	CLAMPER SHEET	1	38	746-0712-03	WASHER	1
14	345-7514-00	SENSOR PWB SHEET	1	39	743-1500-10	E-RING	3
15	802-4910-60	VINYL-COAT-WIRE (RED)	1	40	621-0258-03	LOADING ROLLER	2
16	620-0485-04	FRONT PLATE	1	41	716-1742-00	SCREW (M2x 5)	1
17	620-0488-01	S-L-LINK PLATE	1	42	716-1704-00	SCREW (M2x 7)	1
18	620-0489-02	MOTOR PLATE	1	43	716-1677-00	SCREW (M2x 5)	1
19	802-4904-60	VINYL-COAT-WIRE (RED)	1	44	716-1507-00	SCREW (M2x 3)	2
20	620-0492-01	MOTOR BRACKET	1	45	622-1072-05	ROLLER SHAFT	1
21	801-4910-60	VINYL-COAT-WIRE (BRN)	1	46	716-1468-00	SCREW (M2x 2.5)	2
22	620-0773-01	CD-MECH-BRKT	1	47	622-1219-01	SHIFT ROLLER	1
23	800-4910-60	VINYL-COAT-WIRE (BLK)	1	48	714-2603-81	SCREW (M2.6x 3)	5
24	621-0402-01	U-DISC GUIDE-F	1	49	966-0308-11	CHASSIS ASSY	1
25	621-0243-02	ROLLER SLEEVE	2	50	714-2003-81	SCREW (M2x 3)	8
				51	716-1670-00	SCREW (M2x 4)	4

■ ELECTRICAL PARTS LIST :

CD mechanism section (B3)

Note) Several different parts of the same reference number are alternative parts.

One of those parts is used in the set.

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	163-1073-10	6.3V 100 μ F	C36	176-6801-00	68pF CH	R8	117-1041-10	1/10W 100K Ω
C3	178-1042-78	0.1 μ F	C37	176-2201-00	22pF CH	R9	117-1031-10	1/10W 10K Ω
C4	178-2222-78	2200pF	C38	178-1042-78	0.1 μ F	R10	117-4731-10	1/10W 47K Ω
C5	178-1042-78	0.1 μ F	C39	163-4763-05	4V 47 μ F	R12	117-4741-10	1/10W 470K Ω
C6	178-1042-78	0.1 μ F	C44	178-2242-78	0.22 μ F	R13	117-3331-10	1/10W 33K Ω
C7	178-1042-78	0.1 μ F	C45	178-2242-78	0.22 μ F	R14	117-3321-10	1/10W 3.3K Ω
C8	176-1501-00	15pF CH	C46	163-4763-10	6.3V 47 μ F	R15	117-1031-10	1/10W 10K Ω
C9	176-1501-00	15pF CH	C47	178-8222-78	8200pF	R16	117-3321-10	1/10W 3.3K Ω
C10	176-1201-00	12pF CH	C48	178-1042-78	0.1 μ F	R17	117-3321-10	1/10W 3.3K Ω
C11	178-1042-78	0.1 μ F	C50	163-1073-10	6.3V 100 μ F	R18	117-3321-10	1/10W 3.3K Ω
C13	178-1042-78	0.1 μ F	C51	178-1042-78	0.1 μ F	R19	117-3321-10	1/10W 3.3K Ω
C14	178-1042-78	0.1 μ F	C52	178-2232-78	0.022 μ F	R20	117-3321-10	1/10W 3.3K Ω
C15	178-1042-78	0.1 μ F	C54	176-2201-00	22pF CH	R21	117-2221-10	1/10W 2.2K Ω
C16	178-1042-78	0.1 μ F	C61	178-1042-78	0.1 μ F	R22	117-8211-10	1/10W 820K Ω
C17	163-1073-31	16V 100 μ F	C63	178-1042-78	0.1 μ F	R23	117-9131-10	1/10W 91K Ω
C18	176-4701-00	47pF CH	C64	178-1042-78	0.1 μ F	R24	117-1041-10	1/10W 100K Ω
C19	178-1532-78	0.015 μ F	C65	178-1042-78	0.1 μ F	R25	117-1041-10	1/10W 100K Ω
C20	178-1032-78	0.01 μ F	D4	001-0516-00	MA111	R26	117-1841-10	1/10W 180K Ω
C21	178-2722-78	2700pF	IC1	051-5704-00	TA2096FN	R27	117-1841-10	1/10W 180K Ω
C22	178-4722-78	4700pF	IC2	051-6342-00	TC9462F	R28	117-2211-10	1/10W 220 Ω
C23	178-1042-78	0.1 μ F	IC3	051-6045-08	BA5984FP	R29	117-2201-10	1/10W 22 Ω
C24	178-1042-78	0.1 μ F	J1	074-1138-66	16P	R30	117-1041-10	1/10W 100K Ω
C25	178-1042-78	0.1 μ F	J2	074-1138-06	6P	R31	117-1041-10	1/10W 100K Ω
C26	178-4712-78	470pF	L1	010-2155-93	10 μ H	R32	117-1041-10	1/10W 100K Ω
C27	178-4712-78	470pF	L3	010-2199-74	10 μ H J	R33	117-1041-10	1/10W 100K Ω
C28	178-4732-78	0.047 μ F	Q1	101-1188-50	2SB1188PQR	R34	117-1041-10	1/10W 100K Ω
C29	178-4732-78	0.047 μ F	R1	117-2211-10	1/10W 220 Ω	R35	117-2241-10	1/10W 220K Ω
C30	178-4732-78	0.047 μ F	R2	117-2211-10	1/10W 220 Ω	R36	117-1041-10	1/10W 100K Ω
C31	178-4732-78	0.047 μ F	R3	117-5611-10	1/10W 560 Ω	R37	117-1041-10	1/10W 100K Ω
C32	163-4763-05	4V 47 μ F	R4	117-5611-10	1/10W 560 Ω	R38	117-8231-10	1/10W 82K Ω
C33	163-4763-05	4V 47 μ F	R5	117-4711-10	1/10W 470 Ω	R39	117-1841-10	1/10W 180K Ω
C34	176-1801-00	18pF CH	R6	117-3311-10	1/10W 330 Ω	X1	061-3500-90	16.920MHz
C35	176-6097-00	6pF CH	R7	117-4721-10	1/10W 4.7K Ω			

Sensor PWB section (B4)

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
Q101	060-0252-01	PT4850F	Q102	060-0252-01	PT4850F	Q103	060-0252-01	PT4850F

Chuckling SW PWB section (B5)

REF No.	PART No.	DESCRIPTION
S2	013-3879-01	SPPB12

Limit SW PWB (Motor assy/SMA-151-100) section (B6)

REF No.	PART No.	DESCRIPTION
S1	013-7100-00	SPPB11