

This exploded view diagram illustrates the components of the HP DesignJet 500C printer, arranged in the order they are assembled. The components are labeled as follows:

- DC1**: Power cord with a multi-pin connector.
- DC2**: Another power cord variant with a different connector.
- RC1**: A handheld remote control device.
- 351**: A small rectangular control panel or keypad.
- 353**: A small electronic component, possibly a sensor or switch.
- 355 x2**: Two long, thin, flexible strips, likely for the printer's output tray.
- 357**: A long, narrow rectangular component, possibly a paper support or guide.
- 358**: The main printer body or chassis, showing internal components like the paper path and rollers.
- 359**: A rectangular component, possibly a cover or a paper support.
- 360**: A cable with a connector, likely for a paper sensor or a service interface.
- 361**: A small component, possibly a paper sensor or a switch.
- 501**: A large rectangular panel, likely the front or side cover.
- 602**: Another large rectangular panel, likely the back or top cover.



MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-BT23	K2	KDC-BT275U	K0	KDC-BT33	K7	KDC-BT350U	K1
KDC-BT375U	K6	KDC-BT430U	E1	KDC-BT530U	E2	KDC-BT530U	M1
KDC-BT630U	M2	KDC-MP375BT	K3	KDC-X303	K4	KMR-D375BT	K5

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
EXPLODED VIEW (UNIT) <M1MM>						
	MAB1	CB-XJ1238K00N	MAIN PWB ASSY	XJ1-238K-00	1	K2,K0,K1
	MAB1	CB-XJ1238K04N	MAIN PWB ASSY	XJ1-238K-04	1	K7,K6
	MAB1	CB-XJ1238E01N	MAIN PWB ASSY	XJ1-238E-01	1	E1
	MAB1	CB-XJ1238E02N	MAIN PWB ASSY	XJ1-238E-02	1	E2
	MAB1	CB-XJ1238M01N	MAIN PWB ASSY	XJ1-238M-01	1	M1
	MAB1	CB-XJ1238M02N	MAIN PWB ASSY	XJ1-238M-02	1	M2
	MAB1	CB-XJ1238K01N	MAIN PWB ASSY	XJ1-238K-01	1	K3
	MAB1	CB-XJ1238K02N	MAIN PWB ASSY	XJ1-238K-02	1	K4
	MAB1	CB-XJ1238K03N	MAIN PWB ASSY	XJ1-238K-03	1	K5
△	DC1	E3A-0324-00	DC CORD		1	K2,K0,K7,K1,K6,M1,M2,K3,K4,K5
△	DC2	E3A-0320-00	DC CORD		1	E1,E2
	DME1	XJJ-0410-00	CD MECHANISM ASSY		1	
△	F901	FZB10BT-100	BLADE FUSE		1	
	FC1	E3G-0112-00	FFC WIRE		1	
	LCD1	B3H-0034-00	LCD		1	K2,K0,K1,E1,M1,K3
	LCD1	B3H-0102-00	LCD		1	K7,K6,E2,M2,K4
	LCD1	B3H-0107-00	LCD		1	K5
	PA1	A6D-0122-00	PANEL ASSY		1	K2
	PA1	A6D-0122-01	PANEL ASSY		1	K0
	PA1	A6D-0122-0P	PANEL ASSY		1	K7
	PA1	A6D-0122-02	PANEL ASSY		1	K1
	PA1	A6D-0122-03	PANEL ASSY		1	K6
	PA1	A6D-0122-0A	PANEL ASSY		1	E1
	PA1	A6D-0122-0B	PANEL ASSY		1	E2
	PA1	A6D-0122-0H	PANEL ASSY		1	M1
	PA1	A6D-0122-0J	PANEL ASSY		1	M2
	PA1	A6D-0122-04	PANEL ASSY		1	K3
	PA1	A6D-0122-05	PANEL ASSY		1	K4
	PA1	A6D-0122-06	PANEL ASSY		1	K5
	RC1	A7A-0019-00	REMOTE CTL(IR)		1	M2,K3
A		QYSDST2604ZA	TAP SCREW	M2.6 x 4mm	3	
B		LV41200-004A	SPECIAL SCREW		3	
D		QYSDST2608ZA	TAP SCREW	M2.6 x 8mm	1	
E		QYSDSF2008ZA	TAP SCREW	M2 x 8mm	3	
F		QYSDST2610ZA	TAP SCREW	M2.6 x 10mm	2	
G		QYSPSG3008ZA	TAP SCREW	R.BRK-CHOK COIL	1	
H		QYSDSF2608ZA	TAP SCREW	R.BRK-PIN JACK	1	
J		QYSDST2606ZA	TAP SCREW	OE WIRE	1	K3,K5
K		QYSDST2606ZA	TAP SCREW	R.PANEL + Sxi	1	K7,K6,K4,K5
213		A2C-0067-02	SUB PANEL		1	
214		F1K-0050-00	BLIND PLATE		1	
215		D1A-0023-00	LEVER		1	
216		G0A-0027-00	EXTEN.SPRING		1	
217		D1A-0022-00	LEVER		1	
229		E3A-0442-00	CORD W.CON.	MARINE CABLE	1	K5
230		E3A-0553-00	CORD W.CON.	OE LEARNING	1	K3
260		K2K-0388-00	KNOB		1	
261		GE30999-013A	COMP.SPRING		1	
262		K2K-0101-00	KNOB		1	K2,K0,K1
262		K2K-0165-02	KNOB BASE		1	K7,K6,K3,K4,K5
262		K2K-0215-02	KNOB BASE		1	E1,M1
262		K2K-0215-01	KNOB BASE		1	E2,M2
263		GE40127-005A	KNOB SPRING		1	
264		E2K-0069-00	CONDUCT RUBBER		1	
266		A4G-0095-00	REAR COVER		1	
271		QNZ1117-001	RUBBER CONNE		1	K2,K0,K1,E1,M1,K3
271		E2K-0029-00	CONDUCT RUBBER		1	K7,K6,E2,M2,K4,K5
351		GE40531-001A	SCREW SET		1	M1,M2,K3,K4,K5
353		QYSPSF2008ZA	TAP SCREW	M2 x 8mm	1	K2,K0,K7,K1,K6,M1,M2,K3,K4
355		GE40685-001A	HOOK		2	
357		B0H-0014-00	ESCUTCHEON		1	K2,K0,K7,K1,K6,E1,M1,K3
357		B0H-0013-00	ESCUTCHEON		1	E2,M2,K4
357		B0H-0013-01	ESCUTCHEON		1	K5
358		GE20362-002A	MOUNTING SLEEVE		1	
359		GE40521-001A	CARRYING CASE		1	M1,M2
360		QAN0126-001	MICROPHONE		1	
361		QAM1419-001	CAR CABLE		1	K3
501		B5A-2598-00	INST.MANUAL	ENG PER THA ARA	1	M1,M2
702		-----	SWITCH PWB ASSY	NO SERVICE PART	1	K2,K0,K1
702		-----	SWITCH PWB ASSY	NO SERVICE PART	1	K7,K6,M2,K4
702		-----	SWITCH PWB ASSY	NO SERVICE PART	1	E1
702		-----	SWITCH PWB ASSY	NO SERVICE PART	1	E2
702		-----	SWITCH PWB ASSY	NO SERVICE PART	1	M1
702		-----	SWITCH PWB ASSY	NO SERVICE PART	1	K3
702		-----	SWITCH PWB ASSY	NO SERVICE PART	1	K5
711		-----	TOP COVER	NO SERVICE PART	1	K2,K0,K7,K1,K6,M1,M2,K3,K4,K5
711		-----	TOP COVER	NO SERVICE PART	1	E1,E2
712		-----	BOTTOM PLATE	NO SERVICE PART	1	
718		-----	HEAT SINK	NO SERVICE PART	1	
719		-----	COOL SHEET	NO SERVICE PART	1	
751		-----	PANEL	NO SERVICE PART	1	K2,K0,K1,E1,M1,K3
751		-----	PANEL	NO SERVICE PART	1	K7,K6
751		-----	PANEL	NO SERVICE PART	1	E2,M2,K4
751		-----	PANEL	NO SERVICE PART	1	K5
752		-----	FRONT GLASS	NO SERVICE PART	1	K2
752		-----	FRONT GLASS	NO SERVICE PART	1	K0

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-BT23	K2	KDC-BT275U	K0	KDC-BT33	K7	KDC-BT350U	K1
KDC-BT375U	K6	KDC-BT430U	E1	KDC-BT530U	E2	KDC-BT530U	M1
KDC-BT630U	M2	KDC-MP375BT	K3	KDC-X303	K4	KMR-D375BT	K5

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	752	-----	FRONT GLASS	NO SERVICE PART	1	K7
	752	-----	FRONT GLASS	NO SERVICE PART	1	K1
	752	-----	FRONT GLASS	NO SERVICE PART	1	K6
	752	-----	FRONT GLASS	NO SERVICE PART	1	E1
	752	-----	FRONT GLASS	NO SERVICE PART	1	E2
	752	-----	FRONT GLASS	NO SERVICE PART	1	M1
	752	-----	FRONT GLASS	NO SERVICE PART	1	M2
	752	-----	FRONT GLASS	NO SERVICE PART	1	K3
	752	-----	FRONT GLASS	NO SERVICE PART	1	K4
	752	-----	FRONT GLASS	NO SERVICE PART	1	K5
	753	-----	COVER	NO SERVICE PART	1	
	754	-----	PUSH KNOB	NO SERVICE PART	1	
	755	-----	KNOB ASSY	NO SERVICE PART	1	
	756	-----	PUSH KNOB	NO SERVICE PART	1	
	757	-----	PUSH KNOB	NO SERVICE PART	1	
	758	-----	LIGHTING BOARD	NO SERVICE PART	1	
	759	-----	TAP SCREW	NO SERVICE PART	1	
	765	-----	LIGHTING BOARD	NO SERVICE PART	1	
	767	-----	LCD CASE	NO SERVICE PART	1	K2,K0,K1,E1,M1,K3
	767	-----	LCD CASE	NO SERVICE PART	1	K7,K6,E2,M2,K4,K5
	768	-----	OPTI.DIFFUSER	NO SERVICE PART	1	K2,K0,K1,E1,M1,K3
	768	-----	OPTI.DIFFUSER	NO SERVICE PART	1	K7,K6,E2,M2,K4
	768	-----	OPTI.DIFFUSER	NO SERVICE PART	1	K5
	769	-----	LIGHTING BOARD	NO SERVICE PART	1	K2,K0,K1,E1,M1,K3
	769	-----	LIGHTING BOARD	NO SERVICE PART	1	K7,K6,E2,M2,K4,K5
	770	-----	REF.SHEET	NO SERVICE PART	1	K2,K0,K1,E1,M1,K3
	770	-----	REF.SHEET	NO SERVICE PART	1	K7,K6,E2,M2,K4,K5
	802	-----	GUIDE BOOK	NO SERVICE PART ENG FRE	1	K2,K0,K7,K1,K6,K3,K4
				SPA		,K5
	802	-----	GUIDE BOOK	NO SERVICE PART ENG ITA	1	E1,E2
				RUS UKR FRE GER DUT SPA		
				POR		


EXPLODED VIEW (CD MECHANISM: XJJ-0410-00)

Block No.MBMM

Grease

★W01-1738-08

●W01-2067-08

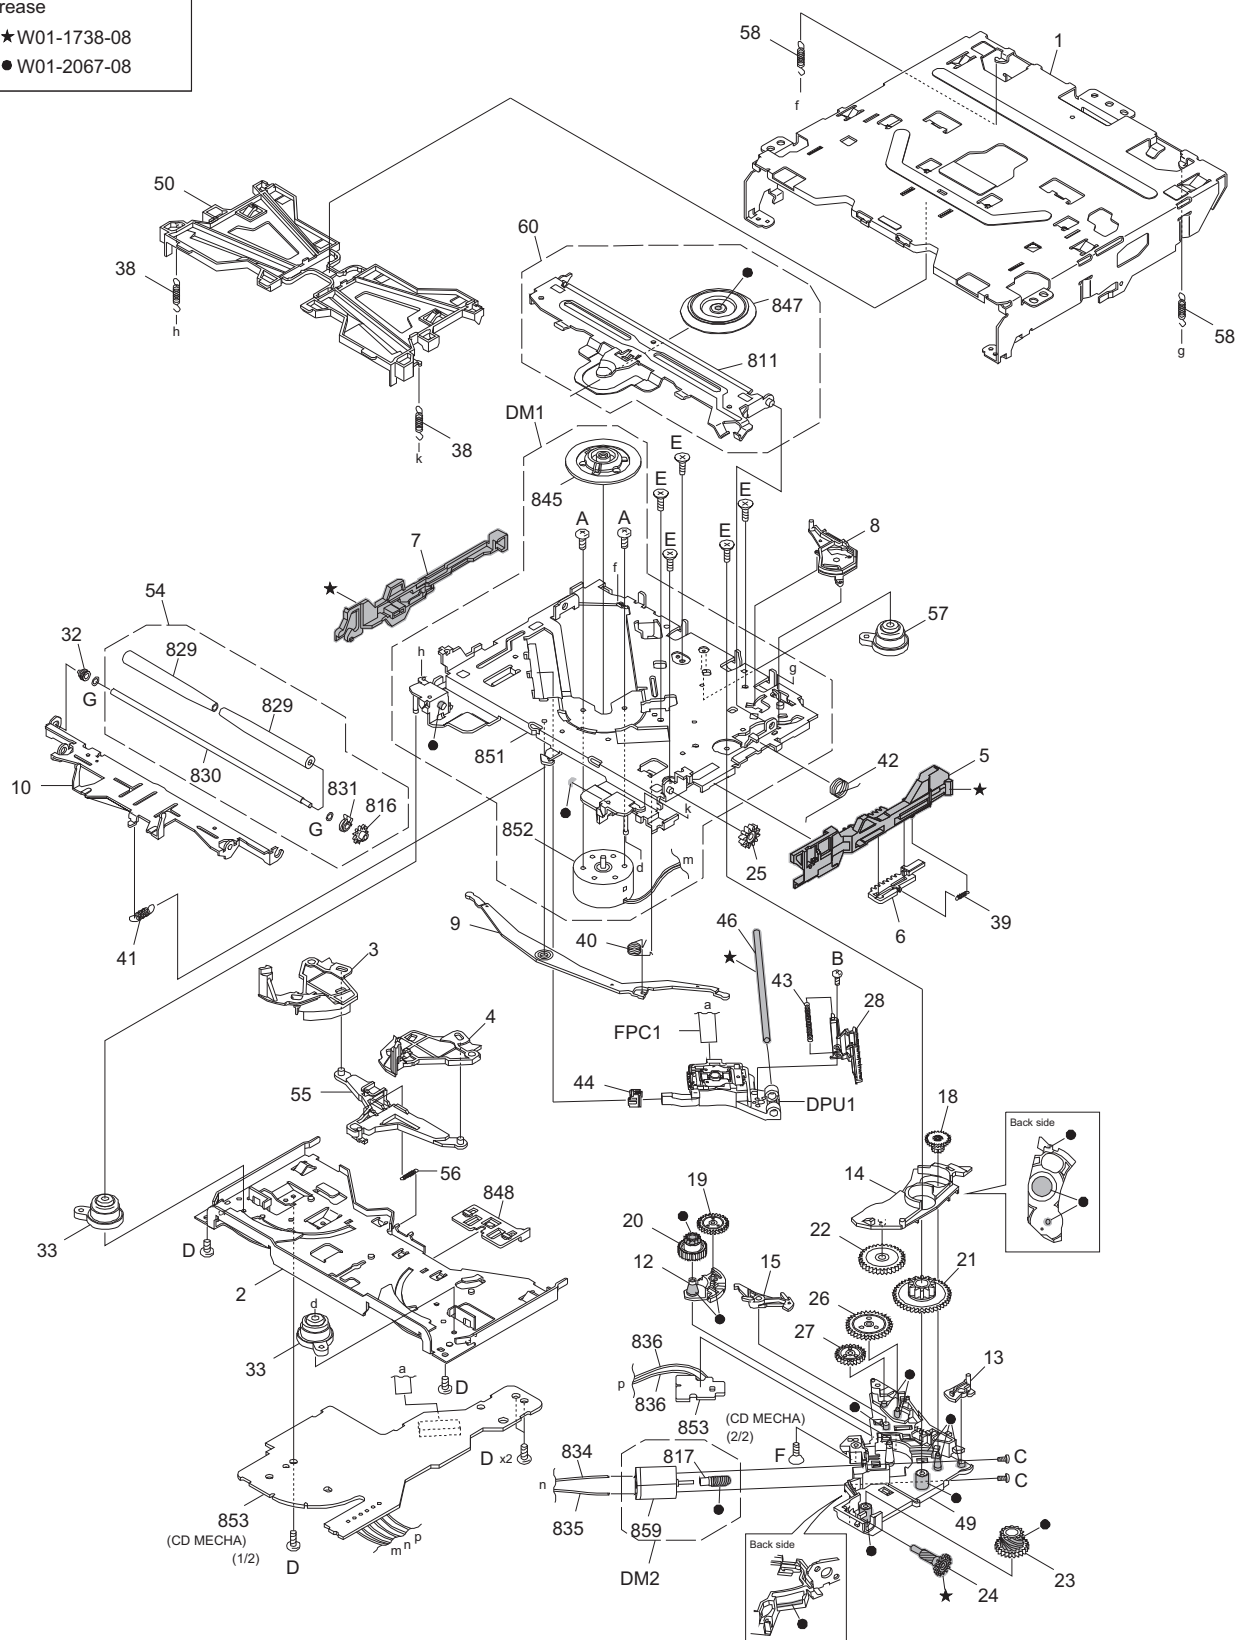

Parts with the exploded numbers larger than 800 are not supplied.

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-BT23	K2	KDC-BT275U	K0	KDC-BT33	K7	KDC-BT350U	K1
KDC-BT375U	K6	KDC-BT430U	E1	KDC-BT530U	E2	KDC-BT530U	M1
KDC-BT630U	M2	KDC-MP375BT	K3	KDC-X303	K4	KMR-D375BT	K5

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
------	------------	-----------	------------	-------------	-----	-------

EXPLODED VIEW (CD MECHANISM: XJJ-0410-00) <MBMM>

DM1	CM-FC2-MD	MD CHASSIS ASSY		1
DM2	CM-FC2-M	LOADING MOTOR ASSY		1
DPU1	T2F-0002-00	CD OPT PICKUP		1
FPC1	QAL1465-001	FPC		1
A	LV45568-001A	MINI SCREW		2
B	QYSPSGT1745ZA	TAP SCREW	M1.7 x 4.5mm	1
C	QYSPSPT2025MA	SCREW	M2 x 2.5mm	2
D	VKZ4539-054	MINI SCREW		5
E	LV45818-001A	G.HOLDER SCREW		5
F	LV45815-001A	M. SHAFT SCREW		1
G	LV45816-001A	ROLLER WASHER		2
1	LV11877-003A	OUTER CHASSIS		1
2	LV11878-004A	LOWER CHASSIS		1
3	LV3A174-002A	DISC ARM L		1
4	LV3A175-001A	DISC ARM R		1
5	LV23057-001A	SLIDER R		1
6	LV3A178-001A	TRIGGER SLIDER		1
7	LV23058-001A	SLIDER L		1
8	LV3A179-002A	TRIGGER ARM		1
9	LV3A173-001A	JOINT LEVER		1
10	LV23055-003A	ROLLER LEVER		1
12	LV3A181-002A	TRANSFER ARM		1
13	LV45797-002A	SL LOCK CAM		1
14	LV3A182-003A	SL LOCK ARM		1
15	LV3A183-001A	PICK LOCK ARM		1
18	LV3A187-002A	HELICAL GEAR 1		1
19	LV3A188-001A	TRANSFER GEAR		1
20	LV3A189-001A	LOAD GEAR H		1
21	LV3A190-001A	DRIVE GEAR		1
22	LV3A191-001A	JOINT GEAR		1
23	LV3A192-001A	WORM GEAR 2		1
24	LV3A193-001A	HELICAL GEAR 2		1
25	LV3A194-001A	LOAD GEAR V		1
26	LV3A195-001A	PICK GEAR 1		1
27	LV3A196-001A	PICK GEAR 2		1
28	LV3A197-001A	RACK GEAR		1
32	LV45796-001A	R.RETAINER L		1
33	D3K-0002-00	DAMPER		2
38	LV45809-001A	FLOAT SPRING(F)		2
39	LV45810-001A	TRIGGER SPRING		1
40	LV45811-001A	LOAD SPRING		1
41	LV45812-001A	ROLLER SPRING		1
42	LV45813-002A	CLAMP SPRING		1
43	LV45814-001A	PICK SPRING		1
44	LV36813-201A	SUB GUIDE CAP		1
46	LV44555-001A	MAIN SHAFT		1
49	LV11881-002A	GEAR HOLDER		1
50	LV11880-004A	DISC GUIDE		1
54	CM-FC2-R	ROLLER ASSY		1
55	D10-7176-03	ARM		1
56	G01-4809-04	EXTEN.SPRING		1
57	D3K-0003-00	DAMPER		1
58	LV45835-001A	FLOAT SPRING(R)		2
60	LV3A271-002A	CL BASE ASSY		1
811	-----	CLAMP ARM	NO SERVICE PART	1
816	-----	ROLLER GEAR	NO SERVICE PART	1
817	-----	WORM GEAR 1	NO SERVICE PART	1
829	-----	ROLLER	NO SERVICE PART	2
830	-----	ROLLER SHAFT	NO SERVICE PART	1
831	-----	R.RETAINER R	NO SERVICE PART	1
834	-----	SIN TWIST WIRE	NO SERVICE PART	1
835	-----	SIN TWIST WIRE	NO SERVICE PART	1
836	-----	SIN TWIST WIRE	NO SERVICE PART	2
845	-----	HC TURN TABLE	NO SERVICE PART	1
847	-----	CLAMPER	NO SERVICE PART	1
848	-----	WIRE HOLDER	NO SERVICE PART	1
851	-----	MD CHASSIS ASSY	NO SERVICE PART	1
852	-----	SPINDLE MOTOR	NO SERVICE PART	1
853	-----	CD MECHA PWB ASSY	NO SERVICE PART	1
859	-----	MOTOR	NO SERVICE PART	1

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-BT23	K2	KDC-BT275U	K0	KDC-BT33	K7	KDC-BT350U	K1
KDC-BT375U	K6	KDC-BT430U	E1	KDC-BT530U	E2	KDC-BT530U	M1
KDC-BT630U	M2	KDC-MP375BT	K3	KDC-X303	K4	KMR-D375BT	K5

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
MAIN PWB ASSY (XJ1-238x-0x) <XJ1>						
		IC161	BD37069FV-M	ANALOG IC	1	
		IC162	NJM11100F1	ANALOG IC	1	
		IC164	NJM11100F1	ANALOG IC	1	M2,K5
		IC165	NJW4190R-A	ANALOG IC	1	K4
		IC220	NJM8065V	ANALOG IC	1	
△		IC301	JCV8034	ANALOG IC	1	
		IC411	MFI337S395901	MCU IC	1	K2,K0,K7,K1,K6,E2,M2,K3,K4,K5
		IC470	TC7SH08FUJC	MOS IC	1	K7,K6,K4,K5
		IC481	SN65HVD3082ED	MOS IC	1	K5
		IC482	TC7SH08FUJC	MOS IC	1	
		IC540	MP9943AGQ	ANALOG IC	1	
△		IC601	TEF6657HN-X	IC	1	
△		IC701	STA1080	MPU IC	1	BGA
		IC702	TC7SH08FUJC	MOS IC	1	
△		IC821	W3F-0408-00	ROM IC	1	K2,K0,K1,K3
△		IC821	W3F-0409-00	ROM IC	1	K7,K6,E1,E2,M1,M2,K4,K5
△		IC822	W25Q16JVSSIM	ROM IC	1	
		IC831	IC-PST8428U	MOS IC	1	
		IC841	IC-PST8428U	MOS IC	1	
		IC890	TPS2553DDBV	MOS IC	1	
△		IC901	BD49105RFS-M	ANALOG IC	1	
		IC1901	M12L1218A6B2S	DRAM IC	1	
		Q220	KTC4075P/Y/	TRANSISTOR	1	
		Q240	IMX9	DUAL TRANSISTOR	1	
		Q270	KRA303E-P	DIGI TRANSISTOR	1	
		Q271	KTA2014P/Y/	TRANSISTOR	1	
		Q272	KRC403E-P	DIGI TRANSISTOR	1	
		Q273	KRA303E-P	DIGI TRANSISTOR	1	
		Q274	KRC403E-P	DIGI TRANSISTOR	1	
		Q300	IMX9	DUAL TRANSISTOR	1	K7,K6,E2,M2,K3,K4,K5
		Q310	IMX9	DUAL TRANSISTOR	1	K7,K6,E2,M2,K3,K4,K5
		Q470	KRC402E-P	DIGI TRANSISTOR	1	K7,K6,K4,K5
		Q471	KRC410E-P	DIGI TRANSISTOR	1	K7,K6,K4,K5
		Q480	KTC4075P/Y/	TRANSISTOR	1	K5
		Q481	KTC4075P/Y/	TRANSISTOR	1	K5
		Q482	KTC4075P/Y/	TRANSISTOR	1	K5
		Q483	KTA2014P/Y/	TRANSISTOR	1	K5
		Q484	RQ5L015SP	FET	1	K5
		Q485	KRC401-P	TRANSISTOR	1	K5
		Q486	KRC406P	DIGI TRANSISTOR	1	K5
		Q500	KRC401-P	TRANSISTOR	1	
		Q780	RE1C002ZP	FET	1	K3
		Q781	RE1C002ZP	FET	1	K3
		Q782	KRC407E-P	DIGI TRANSISTOR	1	K3
		Q903	KRC407E-P	DIGI TRANSISTOR	1	
		Q904	RE1C002ZP	FET	1	
		Q920	KRA307E-P	TRANSISTOR	1	
		D220	UDZV6.8B	ZENER DIODE	1	
		D221	UDZV6.8B	ZENER DIODE	1	
		D222	UDZV5.6B	ZENER DIODE	1	
		D271	BAW56-TP	DIODE ARRAY	1	
		D273	1SS355VM	DIODE	1	
		D370	BAW56-TP	DIODE ARRAY	1	
		D390	SM5818PL	SCHOTTKY DIODE	1	
		D391	MBR0530	DIODE	1	
		D400	RB521SM-30	DIODE	1	
		D401	UDZV5.1B	ZENER DIODE	1	
		D471	RSB6.8SM	ZENER DIODE	1	K7,K6,K4,K5
		D472	RSB6.8SM	ZENER DIODE	1	K7,K6,K4,K5
		D473	RSB6.8SM	ZENER DIODE	1	K7,K6,K4,K5
		D474	RSB6.8SM	ZENER DIODE	1	K7,K6,K4,K5
		D475	RSB6.8SM	ZENER DIODE	1	K7,K6,K4,K5
		D476	RSB6.8SM	ZENER DIODE	1	K7,K6,K4,K5
		D480	UDZV6.2B	ZENER DIODE	1	K5
		D481	UDZV6.2B	ZENER DIODE	1	K5
		D482	UDZV5.1B	ZENER DIODE	1	K5
		D540	SMD24PL	SCHOTTKY DIODE	1	
		D783	DAN202UM	DIODE	1	K3
		D902	SK34A-L	SCHOTTKY DIODE	1	
		D903	SK34A-L	SCHOTTKY DIODE	1	
		D904	GN1J	DIODE	1	
		D905	GN1J	DIODE	1	
		D906	SK34A-L	SCHOTTKY DIODE	1	
		D907	SK34A-L	SCHOTTKY DIODE	1	
		D908	SK34A-L	SCHOTTKY DIODE	1	
△		D991	S3DB	RECTIFIER DIODE	1	
		C101	CK73HXR1H102K	C CAPACITOR	1	1000pF 50V K
		C102	CK73HXR1H102K	C CAPACITOR	1	1000pF 50V K
		C103	CK73FXR1C475K	C CAPACITOR	1	4.7uF 16V K
		C104	CK73FXR1C106K	C CAPACITOR	1	10uF 16V K
		C105	CK73FXR1C475K	C CAPACITOR	1	4.7uF 16V K
		C106	CK73HXR1A105K	C CAPACITOR	1	1uF 10V K
		C161	CE32BJ1V4R7M	E CAPACITOR	1	4.7uF 35V M
		C162	CE32BJ1V4R7M	E CAPACITOR	1	4.7uF 35V M
		C163	CE32BJ1V4R7M	E CAPACITOR	1	4.7uF 35V M
		C164	CE32BJ1V4R7M	E CAPACITOR	1	4.7uF 35V M
		C165	CE32BJ1V4R7M	E CAPACITOR	1	4.7uF 35V M
		C166	CE32BJ1V4R7M	E CAPACITOR	1	4.7uF 35V M

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-BT23	K2	KDC-BT275U	K0	KDC-BT33	K7	KDC-BT350U	K1
KDC-BT375U	K6	KDC-BT430U	E1	KDC-BT530U	E2	KDC-BT530U	M1
KDC-BT630U	M2	KDC-MP375BT	K3	KDC-X303	K4	KMR-D375BT	K5

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C167	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C168	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C169	CE32BY1C470M	E CAPACITOR	47uF 16V M	1	
	C170	CE32CL1C100M	E CAPACITOR	10uF 16V M	1	
	C171	CE32CL1E330M	E CAPACITOR	33uF 25V M	1	M2,K5
	C171	CE32BM1E470M	E CAPACITOR	47uF 25V M	1	K4
	C175	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C176	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	
	C177	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	
	C181	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K4
	C183	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	K4
	C187	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K4
	C188	CK73GXR1E105K	C CAPACITOR	1uF 25V K	1	K4
	C189	CK73HXR1C104K	C CAPACITOR	0.1uF 16V K	1	M2,K5
	C190	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	M2,K5
	C191	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	M2,K5
	C192	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	M2,K5
	C222	CK73HXR1C333K	C CAPACITOR	0.033uF 16V K	1	
	C223	CK73HXR1C333K	C CAPACITOR	0.033uF 16V K	1	
	C224	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C225	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C226	CC73HCH1H220J	C CAPACITOR	22pF 50V J	1	
	C227	CK73HXR1H471K	C CAPACITOR	470pF 50V K	1	
	C228	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C229	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C230	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C231	CK73HXR1H471K	C CAPACITOR	470pF 50V K	1	
	C234	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C235	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C236	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C237	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C252	CK73EXR1C475K	C CAPACITOR	4.7uF 16V G	1	
	C262	CK73EXR1C475K	C CAPACITOR	4.7uF 16V G	1	K2,K0,K1,E1,E2,M1,K3
	C273	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C304	CE32CL1E330M	E CAPACITOR	33uF 25V M	1	
	C311	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C312	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C316	CK73GXR1C224K	C CAPACITOR	0.22uF 16V K	1	
	C317	CK73GXR1C224K	C CAPACITOR	0.22uF 16V K	1	
	C318	CK73GXR1C224K	C CAPACITOR	0.22uF 16V K	1	
	C319	CK73GXR1C224K	C CAPACITOR	0.22uF 16V K	1	
	C322	CK73EXR1C475K	C CAPACITOR	4.7uF 16V G	1	K7,K6,E2,M2,K3,K4,K5
	C324	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C332	CK73EXR1C475K	C CAPACITOR	4.7uF 16V G	1	K7,K6,E2,M2,K3,K4,K5
	C342	CK73EXR1C475K	C CAPACITOR	4.7uF 16V G	1	K7,K6,M2,K4,K5
	C352	CK73EXR1C475K	C CAPACITOR	4.7uF 16V G	1	K7,K6,M2,K4,K5
	C370	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C391	CK73FBB1H224K	C CAPACITOR	0.22uF 50V K	1	
	C410	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K2,K0,K7,K1,K6,E2,M2,K3,K4,K5
	C411	CK73HXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C472	CK73HXR1E104K	C CAPACITOR	0.1uF 25V K	1	K7,K6,K4,K5
	C473	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K7,K6,K4,K5
	C474	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	1	K7,K6,K4,K5
	C475	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	1	K7,K6,K4,K5
	C480	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	K5
	C481	CK73HXR1C104K	C CAPACITOR	0.1uF 16V K	1	K5
	C482	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	K5
	C483	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K5
	C484	CK73HXR1H102K	C CAPACITOR	1000pF 50V K	1	K5
	C485	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	K5
	C486	CK73HXR1H682K	C CAPACITOR	6800pF 50V K	1	K5
	C487	CK73HXR1H471K	C CAPACITOR	470pF 50V K	1	K5
	C540	CE32CC1A151M	E CAPACITOR	150uF 10V M	1	
	C541	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	
	C542	CK73HXR1E104K	C CAPACITOR	0.1uF 25V K	1	
	C543	CK73HXR1E104K	C CAPACITOR	0.1uF 25V K	1	
	C544	CK73HXR1H471K	C CAPACITOR	470pF 50V K	1	
	C545	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C547	CK73HXR1C104K	C CAPACITOR	0.1uF 16V K	1	
	C548	CK73HXR1A224K	C CAPACITOR	0.22uF 10V K	1	
	C549	CK73HXR1A224K	C CAPACITOR	0.22uF 10V K	1	
	C550	CC73HCH1H150J	C CAPACITOR	15pF 50V J	1	
	C601	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C602	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C603	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C604	CK73GBB1H152K	C CAPACITOR	1500pF 50V K	1	
	C605	CK73HXR1H102K	C CAPACITOR	1000pF 50V K	1	
	C606	CC73HCH1H090D	C CAPACITOR	9pF 50V D	1	
	C607	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	
	C608	CK73HXR1H102K	C CAPACITOR	1000pF 50V K	1	
	C609	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C610	CC73HCH1H120J	C CAPACITOR	12pF 50V J	1	
	C611	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	
	C612	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C614	CC73HCH1H220J	C CAPACITOR	22pF 50V J	1	
	C615	CC73HCH1H330J	C CAPACITOR	33pF 50V J	1	
	C616	CK73HXR1H102K	C CAPACITOR	1000pF 50V K	1	
	C617	CK73HXR1A224K	C CAPACITOR	0.22uF 10V K	1	
	C618	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C619	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C620	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-BT23	K2	KDC-BT275U	K0	KDC-BT33	K7	KDC-BT350U	K1
KDC-BT375U	K6	KDC-BT430U	E1	KDC-BT530U	E2	KDC-BT530U	M1
KDC-BT630U	M2	KDC-MP375BT	K3	KDC-X303	K4	KMR-D375BT	K5
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
	C621	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1		
	C624	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	1		
	C680	CK73GXR0J225K	C CAPACITOR	2.2uF 6.3V K	1		
	C702	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1		
	C703	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1		
	C704	CC73HCH1H150J	C CAPACITOR	15pF 50V J	1		
	C705	CC73HCH1H150J	C CAPACITOR	15pF 50V J	1		
	C706	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1		
	C707	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1		
	C708	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1		
	C709	CC73HCH1H100D	C CAPACITOR	10pF 50V D	1		
	C710	CK73HXR1H222K	C CAPACITOR	2200pF 50V K	1		
	C711	CC73HCH1H100D	C CAPACITOR	10pF 50V D	1		
	C713	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1		
	C714	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1		
	C715	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1		
	C716	CK73HXR1H472K	C CAPACITOR	4700pF 50V K	1		
	C717	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1		
	C718	CC73HCH1H470J	C CAPACITOR	47pF 50V J	1		
	C719	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1		
	C720	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1		
	C721	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1		
	C722	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1		
	C723	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1		
	C724	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1		
	C725	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1		
	C726	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1		
	C727	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1		
	C728	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1		
	C729	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1		
	C730	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1		
	C731	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1		
	C732	CK73HXR1E153K	C CAPACITOR	0.015uF 25V K	1		
	C733	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1		
	C735	CK73HXR1H472K	C CAPACITOR	4700pF 50V K	1		
	C736	CC73HCH1H070D	C CAPACITOR	7pF 50V D	1		
	C737	CC73HCH1H080D	C CAPACITOR	8pF 50V D	1		
	C738	CK73HXR1H472K	C CAPACITOR	4700pF 50V K	1		
	C740	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1		
	C741	CC73HCH1H100D	C CAPACITOR	10pF 50V D	1		
	C742	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1		
	C743	CK73HXR1C104K	C CAPACITOR	0.1uF 16V K	1		
	C744	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1		
	C745	CK73HXR1H471K	C CAPACITOR	470pF 50V K	1		
	C750	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1		
	C756	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1		
	C760	CK73HXR1H471K	C CAPACITOR	470pF 50V K	1		
	C761	CK73HXR1H471K	C CAPACITOR	470pF 50V K	1		
	C780	CK73HXR1H102K	C CAPACITOR	1000pF 50V K	1	K3	
	C781	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	K3	
	C782	CK73HXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C820	CK73HXR1H472K	C CAPACITOR	4700pF 50V K	1		
	C821	CK73HXR1H471K	C CAPACITOR	470pF 50V K	1		
	C822	CK73HXR1H472K	C CAPACITOR	4700pF 50V K	1		
	C824	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1		
	C830	CK73HXR1H471K	C CAPACITOR	470pF 50V K	1		
	C831	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1		
	C832	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1		
	C841	CK73HXR1A334K	C CAPACITOR	0.33uF 10V K	1		
	C842	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1		
	C843	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1		
	C890	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1		
	C891	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1		
	C892	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1		
	C902	CC73HCH1H391J	C CAPACITOR	390pF 50V J	1		
	C903	CK73HXR1H471K	C CAPACITOR	470pF 50V K	1		
	C904	CC73HCH1H271J	C CAPACITOR	270pF 50V J	1		
	C905	CK73GXR1A475K	C CAPACITOR	4.7uF 10V K	1		
	C906	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1		
	C907	CE32CC1A151M	E CAPACITOR	150uF 10V M	1		
	C911	CK73FXR1E105K	C CAPACITOR	1uF 25V K	1		
	C912	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1		
	C913	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1		
	C914	CK73FXR1C475K	C CAPACITOR	4.7uF 16V K	1		
	C915	CK73FXR1C475K	C CAPACITOR	4.7uF 16V K	1		
	C916	CE32BZ1C221M	E CAPACITOR	220uF 16V M	1		
	C917	CK73GXR1H105K	C CAPACITOR	1uF 50V K	1		
	C918	CC73HCH1H391J	C CAPACITOR	390pF 50V J	1		
	C919	CD040CZ1C222M	E CAPACITOR	2200uF 16V M	1		
	C935	CK73FXR1C475K	C CAPACITOR	4.7uF 16V K	1		
	C942	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1		
	C943	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1		
	C944	CE32CC1A151M	E CAPACITOR	150uF 10V M	1		
	C945	CC73HCH1H561J	C CAPACITOR	560pF 50V J	1		
	C946	CK73GXR1H105K	C CAPACITOR	1uF 50V K	1		
	C947	CK73FXR1E475K	C CAPACITOR	4.7uF 25V K	1		
	C948	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1		
	C949	CK73HXR1H102K	C CAPACITOR	1000pF 50V K	1		
	C950	CK73GXR1A475K	C CAPACITOR	4.7uF 10V K	1		
	C952	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1		
	C954	CK73HXR1H471K	C CAPACITOR	470pF 50V K	1		

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-BT23	K2	KDC-BT275U	K0	KDC-BT33	K7	KDC-BT350U	K1
KDC-BT375U	K6	KDC-BT430U	E1	KDC-BT530U	E2	KDC-BT530U	M1
KDC-BT630U	M2	KDC-MP375BT	K3	KDC-X303	K4	KMR-D375BT	K5
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
	C990	CD040CZ1C222M	E CAPACITOR	2200uF 16V M	1		
	C993	CK73HXR1H471K	C CAPACITOR	470pF 50V K	1		
	C1020	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1		
	C1301	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1		
	C1305	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1		
	C1306	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1		
	C1600	CK73HXR1E153K	C CAPACITOR	0.015uF 25V K	1		
	C1602	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1		
	C1603	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1		
	C1902	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1		
	C1903	CK73HXR1H471K	C CAPACITOR	470pF 50V K	1		
	C1904	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1		
	C1905	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1		
	C1906	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1		
	C1907	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1		
	C1908	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1		
	C1909	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1		
	C1910	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1		
	C1911	CK73HXR1H472K	C CAPACITOR	4700pF 50V K	1		
	C2000	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1		
	C2008	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1		
	C2010	CK73HXR1H471K	C CAPACITOR	470pF 50V K	1		
	C2023	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1		
	C2025	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1		
	C2026	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1		
	C2027	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1		
	C2029	CC73HCH1H050C	C CAPACITOR	5pF 50V C	1		
	C2030	CC73HCH1H050C	C CAPACITOR	5pF 50V C	1		
	C2031	CK73HXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C2035	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1		
	C2037	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1		
	C2038	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1		
	C2041	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1		
	C2050	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1		
	C2051	CK73GXR1C104K	C CAPACITOR	0.1uF 16V K	1		
	C2052	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1		
	C2080	CC73HCH1H050C	C CAPACITOR	5pF 50V C	1		
	C2084	CK73HXR1C104K	C CAPACITOR	0.1uF 16V K	1		
	C2117	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1		
	C9000	CK73HXR1H472K	C CAPACITOR	4700pF 50V K	1		
	C9003	CK73HXR1H471K	C CAPACITOR	470pF 50V K	1		
	C9015	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1		K7,K6,K4,K5
	C9020	CK73HXR1C104K	C CAPACITOR	0.1uF 16V K	1		
	C9021	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1		
	C9022	CK73HXR1H472K	C CAPACITOR	4700pF 50V K	1		
	C9024	CK73HXR1H102K	C CAPACITOR	1000pF 50V K	1		K5
	C9025	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1		
	C9026	CK73HXR1C104K	C CAPACITOR	0.1uF 16V K	1		
	C9027	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1		
	C9030	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1		
	C9033	CK73HXR1H102K	C CAPACITOR	1000pF 50V K	1		
	C9036	CK73HXR1H471K	C CAPACITOR	470pF 50V K	1		
	C9037	CK73HXR1H472K	C CAPACITOR	4700pF 50V K	1		
	C9038	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1		
	C9039	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1		
	C9045	CK73HXR1H471K	C CAPACITOR	470pF 50V K	1		
	C9049	CK73HXR1H472K	C CAPACITOR	4700pF 50V K	1		
	C9050	CK73HXR1H472K	C CAPACITOR	4700pF 50V K	1		
	C9053	CK73HXR1H102K	C CAPACITOR	1000pF 50V K	1		
	C9054	CK73HXR1H471K	C CAPACITOR	470pF 50V K	1		
	C9085	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1		
	C9086	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1		
	C9087	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1		
	C9099	CK73HXR1H471K	C CAPACITOR	470pF 50V K	1		
	C9100	CK73HXR1H472K	C CAPACITOR	4700pF 50V K	1		
	C9101	CK73HXR1H104K	C CAPACITOR	0.1uF 50V K	1		
	C9103	CC73HCH1H220J	C CAPACITOR	22pF 50V J	1		
	C9112	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1		
	C9117	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1		
	C9118	CK73FXR1A106K	C CAPACITOR	10uF 10V K	1		
	C9120	CK73HXR1H471K	C CAPACITOR	470pF 50V K	1		
	C9518	CK73HXR1H471K	C CAPACITOR	470pF 50V K	1		
	C9527	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1		
	R100	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1		
	R101	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1		
	R103	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1		
	R104	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1		
	R118	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1		
	R119	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1		
	R120	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1		
	R145	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1		
	R146	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1		
	R147	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1		
	R148	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1		
	R149	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1		
	R150	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1		
	R160	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1		M2,K5
	R161	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1		M2,K4,K5
	R162	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R165	RK73HH1J152D	MG RESISTOR	1.5kΩ 1/16W D	1		
	R166	RK73HH1J822D	MG RESISTOR	8.2kΩ 1/16W D	1		

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-BT23	K2	KDC-BT275U	K0	KDC-BT33	K7	KDC-BT350U	K1
KDC-BT375U	K6	KDC-BT430U	E1	KDC-BT530U	E2	KDC-BT530U	M1
KDC-BT630U	M2	KDC-MP375BT	K3	KDC-X303	K4	KMR-D375BT	K5
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
	R173	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R175	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K2,K0,K7,K1,K6,E1,E2,M1,K3,K4	
	R176	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K4	
	R177	RK73HB1J562J	MG RESISTOR	5.6kΩ 1/16W J	1	K4	
	R178	RK73HB1J752J	MG RESISTOR	7.5kΩ 1/16W J	1	K4	
	R179	RK73HH1J102D	MG RESISTOR	1kΩ 1/16W D	1	K4	
	R180	RK73HH1J153D	MG RESISTOR	15kΩ 1/16W D	1	K4	
	R181	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K4	
	R182	RK73HH1J752D	MG RESISTOR	7.5kΩ 1/16W D	1	M2,K5	
	R183	RK73HH1J132D	MG RESISTOR	1.3kΩ 1/16W D	1	M2,K5	
	R188	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K2,K0,K7,K1,K6,E1,E2,M1,M2,K3,K5	
	R220	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R221	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R222	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1		
	R223	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	1		
	R224	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1		
	R225	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1		
	R226	RK73HB1J122J	MG RESISTOR	1.2kΩ 1/16W J	1		
	R227	RK73HB1J124J	MG RESISTOR	120kΩ 1/16W J	1		
	R229	RK73HB1J122J	MG RESISTOR	1.2kΩ 1/16W J	1		
	R230	RK73HB1J124J	MG RESISTOR	120kΩ 1/16W J	1		
	R231	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1		
	R232	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1		
	R233	RK73HB1J681J	MG RESISTOR	680Ω 1/16W J	1		
	R234	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1		
	R237	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1		
	R238	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1		
	R250	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1		
	R251	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1		
	R252	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1		
	R253	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K7,K6,M2,K4,K5	
	R254	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1		
	R260	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	K2,K0,K1,E1,E2,M1,K3	
	R261	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K2,K0,K1,E1,E2,M1,K3	
	R262	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	K2,K0,K1,E1,E2,M1,K3	
	R264	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K2,K0,K1,E1,E2,M1,K3	
	R270	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1		
	R271	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1		
	R272	RK73HB1J303J	MG RESISTOR	30kΩ 1/16W J	1		
	R273	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1		
	R274	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	1		
	R302	RK73HB1J432J	MG RESISTOR	4.3kΩ 1/16W J	1		
	R303	RK73EB2E160J	MG RESISTOR	16Ω 1/4W J	1		
	R304	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1		
	R305	RK73EB2E1R0J	MG RESISTOR	1Ω 1/4W J	1		
	R316	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1		
	R317	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1		
	R318	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1		
	R319	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1		
	R320	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	K7,K6,E2,M2,K3,K4,K5	
	R321	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K7,K6,E2,M2,K3,K4,K5	
	R322	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K7,K6,E2,M2,K3,K4,K5	
	R323	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	K7,K6,E2,M2,K3,K4,K5	
	R330	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	K7,K6,E2,M2,K3,K4,K5	
	R331	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K7,K6,E2,M2,K3,K4,K5	
	R332	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K7,K6,E2,M2,K3,K4,K5	
	R333	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	K7,K6,E2,M2,K3,K4,K5	
	R340	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	K7,K6,M2,K4,K5	
	R341	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K7,K6,M2,K4,K5	
	R342	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K7,K6,M2,K4,K5	
	R343	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	K7,K6,M2,K4,K5	
	R350	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	K7,K6,M2,K4,K5	
	R351	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K7,K6,M2,K4,K5	
	R352	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K7,K6,M2,K4,K5	
	R353	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	K7,K6,M2,K4,K5	
	R370	RK73GB2A683J	MG RESISTOR	68kΩ 1/10W J	1		
	R371	RK73GB2A123J	MG RESISTOR	12kΩ 1/10W J	1		
	R372	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1		
	R373	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1		
	R390	RK73EB2E472J	MG RESISTOR	4.7kΩ 1/4W J	1		
	R400	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1		
	R410	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K2,K0,K7,K1,K6,E2,M2,K3,K4,K5	
	R411	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K2,K0,K7,K1,K6,E2,M2,K3,K4,K5	
	R412	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K2,K0,K7,K1,K6,E2,M2,K3,K4,K5	
	R413	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K2,K0,K7,K1,K6,E2,M2,K3,K4,K5	
	R414	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K2,K0,K7,K1,K6,E2,M2,K3,K4,K5	
	R471	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K7,K6,K4,K5	
	R472	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K7,K6,K4,K5	
	R473	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K7,K6,K4,K5	
	R474	RK73FB2B221J	MG RESISTOR	220Ω 1/8W J	1	K7,K6,K4,K5	
	R475	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K7,K6,K4,K5	
	R476	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K7,K6,K4,K5	
	R477	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K7,K6,K4,K5	
	R480	RK73GB2A334J	MG RESISTOR	330kΩ 1/10W J	1	K5	
	R481	RK73EB2E3R3J	MG RESISTOR	3.3Ω 1/4W J	1	K5	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-BT23	K2	KDC-BT275U	K0	KDC-BT33	K7	KDC-BT350U	K1
KDC-BT375U	K6	KDC-BT430U	E1	KDC-BT530U	E2	KDC-BT530U	M1
KDC-BT630U	M2	KDC-MP375BT	K3	KDC-X303	K4	KMR-D375BT	K5
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
	R482	RK73EB2E3R3J	MG RESISTOR	3.3Ω 1/4W J	1	K5	
	R483	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K5	
	R484	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K5	
	R485	RK73GB2A153J	MG RESISTOR	15kΩ 1/10W J	1	K5	
	R486	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	K5	
	R487	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K5	
	R488	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	K5	
	R489	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	K5	
	R490	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J	1	K5	
	R491	RK73EB2E101J	MG RESISTOR	100Ω 1/4W J	1	K5	
	R492	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K5	
	R493	RK73EB2E101J	MG RESISTOR	100Ω 1/4W J	1	K5	
	R494	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	1	K5	
	R495	RK73EB2E100J	MG RESISTOR	10Ω 1/4W J	1	K5	
	R496	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K5	
	R498	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K5	
	R541	RK73HB1J512J	MG RESISTOR	5.1kΩ 1/16W J	1		
	R542	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1		
	R543	RK73EB2E200J	MG RESISTOR	20Ω 1/4W J	1		
	R544	RK73HB1J393J	MG RESISTOR	39kΩ 1/16W J	1		
	R545	RK73HH1J183D	MG RESISTOR	18kΩ 1/16W D	1		
	R546	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D	1		
	R548	RK73HH1J683D	MG RESISTOR	68kΩ 1/16W D	1		
	R549	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1		
	R600	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1		
	R602	RK73GB2A820J	MG RESISTOR	82Ω 1/10W J	1		
	R603	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1		
	R604	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1		
	R605	RK73HB1J4R7J	MG RESISTOR	4.7Ω 1/16W J	1		
	R606	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R607	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R682	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R683	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1		
	R684	RK73HB1J392J	MG RESISTOR	3.9kΩ 1/16W J	1		
	R685	RK73HB1J392J	MG RESISTOR	3.9kΩ 1/16W J	1		
	R702	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1		
	R703	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R704	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1		
	R705	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R706	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	1		
	R707	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R709	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1		
	R710	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1		
	R711	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1		
	R712	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1		
	R713	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R714	RK73HB1J274J	MG RESISTOR	270kΩ 1/16W J	1		
	R715	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R718	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1		
	R721	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R722	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R723	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R725	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R730	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1		
	R731	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R733	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1		
	R734	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R735	RK73HB1J273J	MG RESISTOR	27kΩ 1/16W J	1		
	R737	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R738	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1		
	R739	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1		
	R740	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1		
	R741	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1		
	R742	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R743	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1		
	R744	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R746	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1		
	R748	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R750	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R753	RK73HB1J273J	MG RESISTOR	27kΩ 1/16W J	1		
	R755	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1		
	R756	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R760	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1		
	R761	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1		
	R762	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1		
	R763	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K5	
	R766	RK73HB1J561J	MG RESISTOR	560Ω 1/16W J	1		
	R768	RK73HB1J393J	MG RESISTOR	39kΩ 1/16W J	1	E1,E2	
	R768	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	M1,M2	
	R769	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K2,K0,K7,K1,K6,K3,K4,K5	
	R769	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	1	E1,E2	
	R769	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	M1,M2	
	R770	RK73HB1J273J	MG RESISTOR	27kΩ 1/16W J	1	K7,K6	
	R770	RK73HB1J393J	MG RESISTOR	39kΩ 1/16W J	1	K3	
	R770	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K4	
	R770	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	K5	
	R771	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K2,K0,K1,E1,E2,M1,M2	
	R771	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K7,K6	
	R771	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	1	K3	
	R771	RK73HB1J273J	MG RESISTOR	27kΩ 1/16W J	1	K4	
	R771	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	K5	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-BT23	K2	KDC-BT275U	K0	KDC-BT33	K7	KDC-BT350U	K1
KDC-BT375U	K6	KDC-BT430U	E1	KDC-BT530U	E2	KDC-BT530U	M1
KDC-BT630U	M2	KDC-MP375BT	K3	KDC-X303	K4	KMR-D375BT	K5
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
	R772	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R775	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	1	K3	
	R776	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	1	K3	
	R777	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R778	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R779	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K3	
	R781	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K3	
	R782	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1		
	R783	RK73HH1J472D	MG RESISTOR	4.7kΩ 1/16W D	1	K3	
	R784	RK73HH1J472D	MG RESISTOR	4.7kΩ 1/16W D	1	K3	
	R785	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1		
	R786	RK73GB2A681J	MG RESISTOR	680Ω 1/10W J	1	K3	
	R788	RK73HH1J823D	MG RESISTOR	82kΩ 1/16W D	1		
	R789	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D	1		
	R790	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1		
	R791	RK73GB2A681J	MG RESISTOR	680Ω 1/10W J	1	K3	
	R792	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1		
	R793	RK73HB1J273J	MG RESISTOR	27kΩ 1/16W J	1		
	R794	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R795	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R796	RK73HH1J302D	MG RESISTOR	3kΩ 1/16W D	1		
	R797	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1		
	R798	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1		
	R799	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1		
	R800	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1		
	R801	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1		
	R802	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	K2,K0,K1,E1,E2,K5	
	R803	RK73HB1J225J	MG RESISTOR	2.2MΩ 1/16W J	1	K7,K6,M1,M2,K3,K4	
	R804	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1		
	R805	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1		
	R806	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1		
	R808	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1		
	R809	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1		
	R811	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R813	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1		
	R814	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1		
	R815	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1		
	R819	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1		
	R820	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1		
	R823	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1		
	R824	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1		
	R827	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1		
	R828	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1		
	R829	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1		
	R830	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R831	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1		
	R833	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1		
	R834	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1		
	R835	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1		
	R836	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1		
	R837	RK73HB1J511J	MG RESISTOR	510Ω 1/16W J	1	K3	
	R838	RK73HB1J511J	MG RESISTOR	510Ω 1/16W J	1	K3	
	R839	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K3	
	R840	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K3	
	R841	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K3	
	R842	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K3	
	R843	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	K3	
	R844	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	1		
	R845	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1		
	R846	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1		
	R870	RK73HB1J562J	MG RESISTOR	5.6kΩ 1/16W J	1		
	R889	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	1		
	R891	RK73HH1J153D	MG RESISTOR	15kΩ 1/16W D	1		
	R893	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1		
	R903	RK73HH1J394D	MG RESISTOR	390kΩ 1/16W D	1	K2,K0,K7,K1,K6,E1,E2,M1,K3	
	R903	RK73HH1J474D	MG RESISTOR	470kΩ 1/16W D	1	M2,K5	
	R903	RK73HH1J334D	MG RESISTOR	330kΩ 1/16W D	1	K4	
	R904	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	1	K2,K0,K7,K1,K6,E1,E2,M1,K3	
	R904	RK73HH1J563D	MG RESISTOR	56kΩ 1/16W D	1	M2,K5	
	R904	RK73HH1J473D	MG RESISTOR	47kΩ 1/16W D	1	K4	
	R905	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R908	RK73HH1J154D	MG RESISTOR	150kΩ 1/16W D	1		
	R909	RK73HH1J473D	MG RESISTOR	47kΩ 1/16W D	1		
	R910	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1		
	R911	RK73HB1J683J	MG RESISTOR	68kΩ 1/16W J	1		
	R912	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R913	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1		
	R917	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D	1		
	R920	RK73HH1J124D	MG RESISTOR	120kΩ 1/16W D	1		
	R921	RK73HH1J153D	MG RESISTOR	15kΩ 1/16W D	1		
	R922	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1		
	R923	RK73HH1J564D	MG RESISTOR	560kΩ 1/16W D	1		
	R924	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1		
	R925	RK73HH1J184D	MG RESISTOR	180kΩ 1/16W D	1		
	R927	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1		
	R928	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1		
	R929	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1		
	R933	RK73HH1J684D	MG RESISTOR	680kΩ 1/16W D	1		
	R934	RK73HH1J563D	MG RESISTOR	56kΩ 1/16W D	1		

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-BT23	K2	KDC-BT275U	K0	KDC-BT33	K7	KDC-BT350U	K1
KDC-BT375U	K6	KDC-BT430U	E1	KDC-BT530U	E2	KDC-BT530U	M1
KDC-BT630U	M2	KDC-MP375BT	K3	KDC-X303	K4	KMR-D375BT	K5

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R939	RK73HH1J433D	MG RESISTOR	43kΩ 1/16W D	1	
	R940	RK73HH1J123D	MG RESISTOR	12kΩ 1/16W D	1	
	R941	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D	1	
	R946	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R947	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R949	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R950	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R951	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R952	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R954	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
	R955	RK73EB2E184J	MG RESISTOR	180kΩ 1/4W J	1	
	R980	RK73EB2E682J	MG RESISTOR	6.8kΩ 1/4W J	1	
	R981	RK73EB2E682J	MG RESISTOR	6.8kΩ 1/4W J	1	
	R982	RK73EB2E473J	MG RESISTOR	47kΩ 1/4W J	1	
	R984	RK73EB2E473J	MG RESISTOR	47kΩ 1/4W J	1	
	R993	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R1070	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R1300	RK73HB1J562J	MG RESISTOR	5.6kΩ 1/16W J	1	
	R1302	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R1303	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R1900	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1901	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1902	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1903	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1904	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1905	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1906	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1907	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1908	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1909	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1910	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1911	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1912	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1913	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1914	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1915	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1920	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R1921	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1922	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1923	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1924	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1925	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1926	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1927	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1928	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1929	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1930	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1931	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1932	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R1933	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1934	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1935	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1936	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1937	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1938	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1939	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1940	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1941	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1942	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1943	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1944	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R2002	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2003	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R2004	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R2006	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2007	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R2008	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2010	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R2011	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R2012	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R2013	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2014	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R2016	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R2017	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R2018	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R2019	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R2021	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R2023	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2024	RK73HH1J100D	MG RESISTOR	10Ω 1/16W D	1	
	R2026	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R2029	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2033	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R2034	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R7571	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R7581	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R7641	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R7651	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R9001	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R9005	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R9011	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R9019	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R9029	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	

K7,K6,K4,K5
K5

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-BT23	K2	KDC-BT275U	K0	KDC-BT33	K7	KDC-BT350U	K1
KDC-BT375U	K6	KDC-BT430U	E1	KDC-BT530U	E2	KDC-BT530U	M1
KDC-BT630U	M2	KDC-MP375BT	K3	KDC-X303	K4	KMR-D375BT	K5

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R9030	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R9031	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R9710	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R9711	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R9712	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R9713	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	RA470	RK74GB1J100J	NET RESISTOR	10Ω 1/16W J	1	K7,K6,K4,K5
	L165	LR73Z0AD100M	CHIP INDUCTOR	10uH	1	K4
	L411	LR73Z0AD4R7M	CHIP INDUCTOR	4.7uH	1	
	L540	LK73Z0CA4R7M	M.CHIP INDUCTOR		1	
	L541	LR79Z0JM100M	CHIP INDUCTOR		1	
	L600	LR73Z0AD1R0M	CHIP INDUCTOR	1uH	1	
	L601	LK73G0BE4R7K	M.CHIP INDUCTOR	4.7uF	1	
	L602	LK73H0BUR47K	M.CHIP INDUCTOR		1	
	L603	LK73H0BUR10K	M.CHIP INDUCTOR		1	
	L604	LK73H0BU1R0K	M.CHIP INDUCTOR		1	
	L605	LK73H0BUR22K	M.CHIP INDUCTOR		1	
	L606	LK73H0BUR12K	M.CHIP INDUCTOR		1	
	L607	LK73H0BUR15K	M.CHIP INDUCTOR		1	
	L691	LR73Z0AD1R0M	CHIP INDUCTOR	1uH	1	
	L701	LR73Z0AD4R7M	CHIP INDUCTOR	4.7uH	1	
	L702	LB73H0AY-004	CHIP FERRITE		1	
	L706	LB73H0AY-004	CHIP FERRITE		1	K7,K6,K4,K5
	L707	LB73H0AY-004	CHIP FERRITE		1	K7,K6,K4,K5
	L708	LB73H0CT-002	CHIP FERRITE		1	
	L709	LB73H0AY-004	CHIP FERRITE		1	
	L821	LB73G0ED-002	CHIP FERRITE		1	
	L830	LB73G0ED-002	CHIP FERRITE		1	
	L901	LR79Z0JM330M	CHIP INDUCTOR		1	
	L902	LR79Z0JM330M	CHIP INDUCTOR		1	
	L903	LK73Z0CA4R7M	M.CHIP INDUCTOR		1	
	L990	L3D-0043-00	CHOKE COIL		1	
	L2006	RK73HH1J470D	MG RESISTOR	47Ω 1/16W D	1	
	L9002	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	A1303	W0C-0167-00	CIRCUIT MODULE		1	
	CN481	EA710AP-2006A	W TO B CONNE		1	K5
	CN701	QGZ2006J1-20	DETACHABLE CONN	(1-20)	1	
	CN702	EA710AQ-1503A	W TO B CONNE	3P	1	K3
	CN990	E5J-0139-00	R.RECEPTACLE		1	
	CN3000	EC720AE-1026B	FFC FPC CONNE		1	
	E2	QZW0010-001	STYLE PIN		1	K3,K5
△	F321	F53-0513-08	PATTERN FUSE	4A	1	
△	F322	F53-0513-08	PATTERN FUSE	4A	1	
△	F540	FZA10BH-2R5	FUSE (CC)		1	
	J220	E1B-0013-00	3.5D PHONE JACK		1	
	J321	E6D-0014-00	PIN JACK		1	K2,K0,K1,E1,M1
	J321	E6D-0016-00	PIN JACK		1	K7,K6,M2,K4,K5
	J321	E6D-0015-00	PIN JACK		1	E2,K3
	J470	QNZ0907-001	CIR CONNECTOR		1	K7,K6,K4,K5
	J600	E6J-0017-00	JACK OTHERS		1	
	K2005	LR73Z0AD4R7M	CHIP INDUCTOR	4.7uH	1	
	S830	S7A-0031-00	TACTILE PUSH SW		1	
	VA360	SDV1005E18//0	VARIATOR		1	
	VA480	NAF0029-002X	ESD SUPPRESSOR		1	K5
	VA602	F0K-0265-00	SURGE ABSORBER		1	
	VA701	F0K-0282-00	SURGE ABSORBER		1	
	VA702	F0K-0282-00	SURGE ABSORBER		1	
	VA703	F0K-0282-00	SURGE ABSORBER		1	
	VA704	F0K-0282-00	SURGE ABSORBER		1	
	VA705	F0K-0282-00	SURGE ABSORBER		1	
	VA706	F0K-0282-00	SURGE ABSORBER		1	
	VA707	F0K-0282-00	SURGE ABSORBER		1	
	VA709	F0K-0282-00	SURGE ABSORBER		1	
	VA710	F0K-0282-00	SURGE ABSORBER		1	
	VA711	F0K-0282-00	SURGE ABSORBER		1	
	VA780	F0K-0282-00	SURGE ABSORBER		1	K3
	VA781	F0K-0282-00	SURGE ABSORBER		1	K3
	VA905	F0K-0282-00	SURGE ABSORBER		1	
	VA906	F0K-0282-00	SURGE ABSORBER		1	
	VA907	F0K-0282-00	SURGE ABSORBER		1	
	X600	L7J-0014-00	QUARTZ CRYSTAL		1	
	X701	L7J-0138-00	QUARTZ CRYSTAL		1	
	X702	L7J-0123-00	QUARTZ CRYSTAL		1	
SWITCH PWB ASSY (XJ6-133x-0x) <XJ6>						
	IC1	BU97520AKV-M	MOS IC		1	K2,K0,K1,E1,M1,K3
	IC90	SIRD630B6T	IR DETECT UNIT		1	M1,K3
	Q1	LSCR523UBFS8	TRANSISTOR		1	K2,K0,K1,E1,M1,K3
	Q51	LSCR523EBFS8	TRANSISTOR		1	K2,K0,K1,E1,M1,K3
	Q52	LSCR523UBFS8	TRANSISTOR		1	K2,K0,K1,E1,M1,K3
	Q90	LTA014EEBFS8	DIGI TRANSISTOR		1	M1,K3
	Q91	LTC014EEBFS8	DIGI TRANSISTOR		1	M1,K3
	D1	UDZV5.6B	ZENER DIODE		1	K2,K0,K1,E1,M1,K3
	D2	SM5818PL	SCHOTTKY DIODE		1	K2,K0,K1,E1,M1,K3
	D20	SML-D12V8WT	LED		1	K2,K0,K1,E1,M1,K3
	D21	LBTTSDS2T2251	LED		1	K2,K0,K1,K3
	D21	LRT67DU1V211	LED		1	E1,M1
	D22	LBTTSDS2T2251	LED		1	K2,K0,K1,K3
	D22	LRT67DU1V211	LED		1	E1,M1
	D23	LBTTSDS2T2251	LED		1	K2,K0,K1,K3
	D23	LRT67DU1V211	LED		1	E1,M1
	D25	QSMR-C13SBCMN	LED		1	K2,K0,K1,K3

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-BT23	K2	KDC-BT275U	K0	KDC-BT33	K7	KDC-BT350U	K1
KDC-BT375U	K6	KDC-BT430U	E1	KDC-BT530U	E2	KDC-BT530U	M1
KDC-BT630U	M2	KDC-MP375BT	K3	KDC-X303	K4	KMR-D375BT	K5
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
	D25	SML-D12V8WT	LED		1	E1,M1	
	D26	QSMR-C13SBCM	LED		1	K2,K0,K1,K3	
	D26	SML-D12V8WT	LED		1	E1,M1	
	D46	NHSW157B	LED		1	K2,K0,K1,E1,M1,K3	
	D48	NHSW157B	LED		1	K2,K0,K1,E1,M1,K3	
	D80	RSB6.8SM	ZENER DIODE		1	K2,K0,K1,E1,M1,K3	
	D81	RSB6.8SM	ZENER DIODE		1	K2,K0,K1,E1,M1,K3	
	C1	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	K2,K0,K1,E1,M1,K3	
	C4	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	K2,K0,K1,E1,M1,K3	
	C5	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	K2,K0,K1,E1,M1,K3	
	C6	CK73EXR1C106K	C CAPACITOR	10uF 16V K	1	K2,K0,K1,E1,M1,K3	
	C7	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	K2,K0,K1,E1,M1,K3	
	C60	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	K2,K0,K1,E1,M1,K3	
	C61	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	K2,K0,K1,E1,M1,K3	
	C80	CC73GCH1H270J	C CAPACITOR	27pF 50V J	1	K2,K0,K1,E1,M1,K3	
	C81	CC73GCH1H270J	C CAPACITOR	27pF 50V J	1	K2,K0,K1,E1,M1,K3	
	C82	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	K2,K0,K1,E1,M1,K3	
	C83	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	K2,K0,K1,E1,M1,K3	
	C84	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	K2,K0,K1,E1,M1,K3	
	C85	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	K2,K0,K1,E1,M1,K3	
	C86	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	K2,K0,K1,E1,M1,K3	
	C91	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	M1,K3	
	R1	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K2,K0,K1,E1,M1,K3	
	R3	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	K2,K0,K1,E1,M1,K3	
	R5	RK73EB2E331J	MG RESISTOR	330Ω 1/4W J	1	K2,K0,K1,E1,M1,K3	
	R6	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	K2,K0,K1,E1,M1,K3	
	R21	RK73GB2A152J	MG RESISTOR	1.5kΩ 1/10W J	1	K2,K0,K1,E1,M1,K3	
	R22	RK73EB2E681J	MG RESISTOR	680Ω 1/4W J	1	K2,K0,K1,K3	
	R22	RK73EB2E821J	MG RESISTOR	820Ω 1/4W J	1	E1,M1	
	R23	RK73EB2E391J	MG RESISTOR	390Ω 1/4W J	1	K2,K0,K1,K3	
	R23	RK73EB2E471J	MG RESISTOR	470Ω 1/4W J	1	E1,M1	
	R24	RK73FB2B122J	MG RESISTOR	1.2kΩ 1/8W J	1	K2,K0,K1,E1,M1,K3	
	R25	RK73FB2B911J	MG RESISTOR	910Ω 1/8W J	1	K2,K0,K1,K3	
	R25	RK73FB2B102J	MG RESISTOR	1kΩ 1/8W J	1	E1,M1	
	R48	RK73FB2B331J	MG RESISTOR	330Ω 1/8W J	1	K2,K0,K1,E1,M1,K3	
	R50	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	K2,K0,K1,E1,M1,K3	
	R51	RK73GB2A682J	MG RESISTOR	6.8kΩ 1/10W J	1	K2,K0,K1,E1,M1,K3	
	R60	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	1	K2,K0,K1,E1,M1,K3	
	R61	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	1	K2,K0,K1,E1,M1,K3	
	R62	RK73FB2B4R7J	MG RESISTOR	4.7Ω 1/8W J	1	K2,K0,K1,E1,M1,K3	
	R80	RK73EB2E221J	MG RESISTOR	220Ω 1/4W J	1	K2,K0,K1,E1,M1,K3	
	RA1	RK74GB1J101J	NET RESISTOR	100Ω 1/16W J	1	K2,K0,K1,E1,M1,K3	
	RA2	RK74GB1J101J	NET RESISTOR	100Ω 1/16W J	1	K2,K0,K1,E1,M1,K3	
	RA3	RK74GB1J101J	NET RESISTOR	100Ω 1/16W J	1	K2,K0,K1,E1,M1,K3	
	CN2	QGZ2006K1-20X	DETACHABLE CONN	(1-20)	1	K2,K0,K1,E1,M1,K3	
	FL80	L7K-0030-00	FILTER		1	K2,K0,K1,E1,M1,K3	
	J60	QNS0320-001	3.5 JACK		1	K2,K0,K1,E1,M1,K3	
	J80	E5J-0185-00	USB TERMINAL		1	K2,K0,K1,E1,M1,K3	
	S20	T9K-0007-00	ROTARY ENCODER		1	K2,K0,K1,E1,M1,K3	
SWITCH PWB ASSY (XJ6-134x-0x) <XJ6>							
	IC1	BU97550KV-M	MOS IC		1	K7,K6,E2,M2,K4,K5	
	IC3	AS431AN-G1	ANALOG IC		1	K7,K6,E2,M2,K4,K5	
	IC90	SIRD630B6T	IR DETECT UNIT		1	K7,K6,M2,K4	
	Q50	LSCR523EBFS8	TRANSISTOR		1	K7,K6,E2,M2,K4,K5	
	Q51	LSCR523EBFS8	TRANSISTOR		1	K7,K6,E2,M2,K4,K5	
	Q52	LSCR523EBFS8	TRANSISTOR		1	K7,K6,E2,M2,K4,K5	
	Q53	LSCR523EBFS8	TRANSISTOR		1	K7,K6,E2,M2,K4,K5	
	Q54	LSCR523EBFS8	TRANSISTOR		1	K7,K6,E2,M2,K4,K5	
	Q55	LSCR523EBFS8	TRANSISTOR		1	K7,K6,E2,M2,K4,K5	
	Q57	LSCR523EBFS8	TRANSISTOR		1	K7,K6,E2,M2,K4,K5	
	Q58	LSCR523EBFS8	TRANSISTOR		1	K7,K6,E2,M2,K4,K5	
	Q90	LTA014EEBFS8	DIGI TRANSISTOR		1	K7,K6,M2,K4	
	Q91	LTC014EEBFS8	DIGI TRANSISTOR		1	K7,K6,M2,K4	
	D2	SM5818PL	SCHOTTKY DIODE		1	K7,K6,E2,M2,K4,K5	
	D3	SM5818PL	SCHOTTKY DIODE		1	K7,K6,E2,M2,K4,K5	
	D12	SML-D12V8WT	LED		1	K7,K6,E2,M2,K4,K5	
	D13	SML-D12V8WT	LED		1	K7,K6,E2,M2,K4,K5	
	D20	SML-D12V8WT	LED		1	K7,K6,E2,M2,K4,K5	
	D21	LRTBGVTG-U//0	LED		1	K7,K6,E2,M2,K4,K5	
	D22	LRTBGVTG-U//0	LED		1	K7,K6,E2,M2,K4,K5	
	D23	LRTBGVTG-U//0	LED		1	K7,K6,E2,M2,K4,K5	
	D25	LRTBGVTG-U//0	LED		1	K7,K6,E2,M2,K4,K5	
	D49	LRTBGVTG-U//0	LED		1	K7,K6,E2,M2,K4,K5	
	D80	RSB6.8SM	ZENER DIODE		1	K7,K6,E2,M2,K4,K5	
	D81	RSB6.8SM	ZENER DIODE		1	K7,K6,E2,M2,K4,K5	
	C1	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	K7,K6,E2,M2,K4,K5	
	C5	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	K7,K6,E2,M2,K4,K5	
	C6	CK73EXR1C106K	C CAPACITOR	10uF 16V K	1	K7,K6,E2,M2,K4,K5	
	C7	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	K7,K6,E2,M2,K4,K5	
	C60	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	K7,K6,E2,M2,K4,K5	
	C61	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	K7,K6,E2,M2,K4,K5	
	C80	CC73GCH1H270J	C CAPACITOR	27pF 50V J	1	K7,K6,E2,M2,K4,K5	
	C81	CC73GCH1H270J	C CAPACITOR	27pF 50V J	1	K7,K6,E2,M2,K4,K5	
	C82	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	K7,K6,E2,M2,K4,K5	
	C83	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	K7,K6,E2,M2,K4,K5	
	C84	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	K7,K6,E2,M2,K4,K5	
	C85	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	K7,K6,E2,M2,K4,K5	
	C86	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	K7,K6,E2,M2,K4,K5	
	C91	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	K7,K6,M2,K4	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-BT23	K2	KDC-BT275U	K0	KDC-BT33	K7	KDC-BT350U	K1
KDC-BT375U	K6	KDC-BT430U	E1	KDC-BT530U	E2	KDC-BT530U	M1
KDC-BT630U	M2	KDC-MP375BT	K3	KDC-X303	K4	KMR-D375BT	K5

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R1	RK73GH2A473D	MG RESISTOR	47kΩ 1/10W D	1	K7,K6,E2,M2,K4,K5
	R2	RK73GH2A473D	MG RESISTOR	47kΩ 1/10W D	1	K7,K6,E2,M2,K4,K5
	R3	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	K7,K6,E2,M2,K4,K5
	R4	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K7,K6,E2,M2,K4,K5
	R6	RK73EB2E151J	MG RESISTOR	150Ω 1/4W J	1	K7,K6,E2,M2,K4,K5
	R8	RK73FB2B473J	MG RESISTOR	47kΩ 1/8W J	1	K7,K6,E2,M2,K4,K5
	R10	RK73GB2A152J	MG RESISTOR	1.5kΩ 1/10W J	1	K7,K6,E2,M2,K4,K5
	R12	RK73GB2A152J	MG RESISTOR	1.5kΩ 1/10W J	1	K7,K6,E2,M2,K4,K5
	R13	RK73GB2A152J	MG RESISTOR	1.5kΩ 1/10W J	1	K7,K6,E2,M2,K4,K5
	R14	RK73GB2A124J	MG RESISTOR	120kΩ 1/10W J	1	K7,K6,E2,M2,K4,K5
	R21	RK73EB2E471J	MG RESISTOR	470Ω 1/4W J	1	K7,K6,E2,M2,K4,K5
	R22	RK73EB2E181J	MG RESISTOR	180Ω 1/4W J	1	K7,K6,E2,M2,K4,K5
	R23	RK73EB2E221J	MG RESISTOR	220Ω 1/4W J	1	K7,K6,E2,M2,K4,K5
	R25	RK73FB2B182J	MG RESISTOR	1.8kΩ 1/8W J	1	K7,K6,E2,M2,K4,K5
	R26	RK73FB2B102J	MG RESISTOR	1kΩ 1/8W J	1	K7,K6,E2,M2,K4,K5
	R27	RK73FB2B102J	MG RESISTOR	1kΩ 1/8W J	1	K7,K6,E2,M2,K4,K5
	R33	RK73EB2E681J	MG RESISTOR	680Ω 1/4W J	1	K7,K6,E2,M2,K4
	R33	RK73EB2E561J	MG RESISTOR	560Ω 1/4W J	1	K5
	R34	RK73EB2E561J	MG RESISTOR	560Ω 1/4W J	1	K7,K6,E2,M2,K4
	R34	RK73EB2E471J	MG RESISTOR	470Ω 1/4W J	1	K5
	R35	RK73EB2E561J	MG RESISTOR	560Ω 1/4W J	1	K7,K6,E2,M2,K4
	R35	RK73EB2E471J	MG RESISTOR	470Ω 1/4W J	1	K5
	R57	RK73GB2A682J	MG RESISTOR	6.8kΩ 1/10W J	1	K7,K6,E2,M2,K4,K5
	R60	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	1	K7,K6,E2,M2,K4,K5
	R61	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	1	K7,K6,E2,M2,K4,K5
	R62	RK73FB2B4R7J	MG RESISTOR	4.7Ω 1/8W J	1	K7,K6,E2,M2,K4,K5
	R80	RK73EB2E221J	MG RESISTOR	220Ω 1/4W J	1	K7,K6,E2,M2,K4,K5
	RA1	RK74GB1J101J	NET RESISTOR	100Ω 1/16W J	1	K7,K6,E2,M2,K4,K5
	RA2	RK74GB1J101J	NET RESISTOR	100Ω 1/16W J	1	K7,K6,E2,M2,K4,K5
	RA3	RK74GB1J101J	NET RESISTOR	100Ω 1/16W J	1	K7,K6,E2,M2,K4,K5
	RA50	RK74GB1J682J	NET RESISTOR	6.8kΩ 1/16W J	1	K7,K6,E2,M2,K4,K5
	RA53	RK74GB1J682J	NET RESISTOR	6.8kΩ 1/16W J	1	K7,K6,E2,M2,K4,K5
	CN2	QGZ2006K1-20X	DETACHABLE CONN	(1-20)	1	K7,K6,E2,M2,K4,K5
	FL80	L7K-0030-00	FILTER		1	K7,K6,E2,M2,K4,K5
	J60	QNS0320-001	3.5 JACK		1	K7,K6,E2,M2,K4,K5
	J80	E5J-0185-00	USB TERMINAL		1	K7,K6,E2,M2,K4,K5
	S20	T9K-0007-00	ROTARY ENCODER		1	K7,K6,E2,M2,K4,K5

CD MECHA PWB ASSY (XJD-0030-00) <XJJ>

IC1	MN6627553APA	ANALOG IC		1
IC2	BD8266EFV-M	ANALOG IC		1
Q1	2SA2188/E-X	TRANSISTOR		1
C1	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1
C3	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1
C4	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1
C7	CK73HXR1A334K	C CAPACITOR	0.33uF 10V K	1
C8	CC73HCH1H102J	C CAPACITOR	1000pF 50V J	1
C9	CK73HXR1A823K	C CAPACITOR	0.082uF 10V K	1
C10	CC73HCH1H102J	C CAPACITOR	1000pF 50V J	1
C11	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1
C12	CK73HXR1E153K	C CAPACITOR	0.015uF 25V K	1
C13	CC73HCH1H681J	C CAPACITOR	680pF 50V J	1
C14	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1
C15	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1
C16	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1
C17	CK73HXR1A334K	C CAPACITOR	0.33uF 10V K	1
C18	CK73HXR1H332K	C CAPACITOR	3300pF 50V K	1
C19	CK73HXR1E223K	C CAPACITOR	0.022uF 25V K	1
C20	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1
C21	CK73HXR1A334K	C CAPACITOR	0.33uF 10V K	1
C26	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1
C27	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1
C28	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1
C50	CK73HXR1H682K	C CAPACITOR	6800pF 50V K	1
C51	CK73HXR1H682K	C CAPACITOR	6800pF 50V K	1
C52	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1
C53	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1
C55	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1
C60	CC73HCH1H102J	C CAPACITOR	1000pF 50V J	1
C61	CC73HCH1H102J	C CAPACITOR	1000pF 50V J	1
C62	CK73GXR0J106M	C CAPACITOR	10uF 6.3V M	1
C82	CC73HCH1H471J	C CAPACITOR	470pF 50V J	1
C83	CC73HCH1H120J	C CAPACITOR	12pF 50V J	1
C84	CC73HCH1H120J	C CAPACITOR	12pF 50V J	1
C85	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1
C244	CK73HXR1A154K	C CAPACITOR	0.15uF 10V K	1
R3	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1
R4	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1
R7	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1
R8	RK73HB1J821J	MG RESISTOR	820Ω 1/16W J	1
R9	RK73HB1J823J	MG RESISTOR	82kΩ 1/16W J	1
R10	RK73FB2B4R7J	MG RESISTOR	4.7Ω 1/8W J	1
R11	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1
R12	RK73HB1J225J	MG RESISTOR	2.2MΩ 1/16W J	1
R17	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1
R18	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	1
R20	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1
R21	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	1
R23	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J	1
R24	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-BT23	K2	KDC-BT275U	K0	KDC-BT33	K7	KDC-BT350U	K1
KDC-BT375U	K6	KDC-BT430U	E1	KDC-BT530U	E2	KDC-BT530U	M1
KDC-BT630U	M2	KDC-MP375BT	K3	KDC-X303	K4	KMR-D375BT	K5

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R26	RK73HB1J223J	MG RESISTOR	22k Ω 1/16W J	1	
	R28	RK73HB1J114J	MG RESISTOR	110k Ω 1/16W J	1	
	R31	RK73HB1J821J	MG RESISTOR	820 Ω 1/16W J	1	
	R32	RK73HB1J821J	MG RESISTOR	820 Ω 1/16W J	1	
	R33	RK73HB1J131J	MG RESISTOR	130 Ω 1/16W J	1	
	R37	RK73HB1J103J	MG RESISTOR	10k Ω 1/16W J	1	
	R44	RK73HB1J101J	MG RESISTOR	100 Ω 1/16W J	1	
	R47	RK73HB1J101J	MG RESISTOR	100 Ω 1/16W J	1	
	R305	RK73HB1J101J	MG RESISTOR	100 Ω 1/16W J	1	
	RA1	RK74HB1J562J	NET RESISTOR	5.6k Ω 1/16W J	1	
	RA2	RK74HB1J101J	NET RESISTOR	100 Ω 1/16W J	1	
	L1	LB73G0EA-002	CHIP FERRITE		1	
	L2	LB73H0AY-004	CHIP FERRITE		1	
	L3	LB73H0AY-004	CHIP FERRITE		1	
	CN1	EC720AE-1026B	FFC FPC CONNE		1	
	CN2	EC720AK-0515A	FFC FPC CONNE		1	
	S1	NSW0291-001X	DETECT SWITCH		1	
	S2	NSW0291-001X	DETECT SWITCH		1	
	S3	S6J-0002-00	PUSH SWITCH		1	
	X1	L7J-0005-00	QUARTZ CRYSTAL		1	