

NO.	PART NO.	DESCRIPTION	Q'TY
1	940-8439-40	ESCUTCHEON-ASSY	1
2	-----	SW-PWB-ASSY(3089D7-77)	1
2-1	-----	SW-PWB(397600-039)	1
2-2	013-6201-53	SWITCH	13
2-3	013-6202-52	TACT SWITCH	4
2-4	001-7109-90	DIODE	30
2-5	016-7000-00	ROTARY ENCODER	1
2-6	075-0390-00	JACK	1
2-7	335-8209-00	LCD HOLDER	1
2-8	379-1428-32	INDICATOR	1
2-9	331-4048-00	LCD-CVR	1
2-10	345-5877-00	PROTECTOR	1
2-11	074-3014-68	OUTLET SOCKET	1
3	-----	MAIN-PWB-ASSY(3089D7-75)	1
3-1	-----	MAIN-PWB(333800-039)	1
3-2	073-0768-90	TERMINAL	4
3-3	076-3011-68	PLUG	1
3-4	331-4040-00	REAR PLATE	1
3-5	092-2210-01	ANT-RECEPT	1
3-6	716-0878-50	SPECIAL SCREW	1
3-7	-	(SOCKET A12) *NA	-
3-8	051-2067-00	IC	1
3-9	074-4009-20	OUTLET SOCKET	1
3-10	778-3006-00	TAP-SCREW	2
3-11	074-2503-76	OUTLET SOCKET	1
3-12	331-3835-00	TR HOLDER	1
3-13	-	(SOCKET TH08) *NA	-
3-14	-	(SOCKET TH08) *NA	-
3-15	-----	BLOCK-ASSY T/P(1921PU-80)	1
3-16	345-5805-51	GASKET	1
4	382-8702-01	PUTTON(PWR)	1
5	335-7528-00	BUTTON TRIM	1
6	380-5722-00	KNOB	1
7	716-0778-51	SPECIAL SCREW	10
8	929-5041-80	CD-MECH-MODULE	1
9	331-4038-00	MECH-BRKT	1
10	816-4022-50	FLAT WIRE	1
11	347-7400-00	WIRE SUPPORT	1
12	331-4039-01	ES-PLATE	1
13	311-1992-00	LOWER CASE	1
14	310-1915-00	UPPER CASE	1
15	313-1950-40	HEAT SINK	1
16	276-0153-13	SETPLATE	1
17	716-0878-50	SPECIAL SCREW	4
18	714-2606-8B	MACHINE SCREW	14
19	714-2603-8H	MACHINE SCREW	4
20	735-2614-1B	D-SEMS SCREW	2
21	345-5802-00	CUSHION RUBBER	1
22	-	(SUB HEAT SINK) *NA	-
23	714-2606-8B	MACHINE SCREW	1
24	-	(GASKET) *NA	-

ELECTRICAL PARTS LIST

MAIN PWB(B1) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
ANT101	092-2210-01	ANT-RECEPT	C314	178-1242-78	0.12uF	C439	168-1042-78	16V 0.1uF K
BL101	-----	TUNER(1921PU-80)	C315	178-1242-78	0.12uF	C442	168-1022-55	1000pF K
C104	168-2222-55	2200pF K	C317	178-1242-78	0.12uF	C443	168-1022-55	1000pF K
C108	166-1511-50	150pF CH	C318	178-1242-78	0.12uF	C447	168-1052-78	16V 1uF K
C121	166-1201-50	12pF CH	C320	188-2263-18	6.3V 22uF	C448	168-1052-78	16V 1uF K
C122	166-1007-50	10pF CH	C321	178-4742-78	0.47uF	C449	168-1052-78	16V 1uF K
C123	168-1042-78	16V 0.1uF K	C322	168-1222-55	1200pF K	C450	168-1052-78	16V 1uF K
C126	188-1073-28	10V 100uF	C323	168-1222-55	1200pF K	C453	178-2742-78	0.27uF
C127	166-2201-50	22pF CH	C324	178-4742-78	0.47uF	CCT201	050-0145-52	1/16W 1k ohm x4
C128	043-0277-81	22000pF	C325	168-1052-78	16V 1uF K	CCT202	050-0145-52	1/16W 1k ohm x4
C129	168-1042-78	16V 0.1uF K	C326	168-1052-78	16V 1uF K	CCT203	050-0145-52	1/16W 1k ohm x4
C130	188-1073-28	10V 100uF	C327	178-1842-78	0.18uF	CCT204	050-0145-52	1/16W 1k ohm x4
C131	168-1022-55	1000pF K	C328	178-1842-78	0.18uF	CCT205	050-0145-52	1/16W 1k ohm x4
C132	166-2201-50	22pF CH	C329	178-1842-78	0.18uF	CCT206	050-0145-52	1/16W 1k ohm x4
C133	168-1042-78	16V 0.1uF K	C330	178-1842-78	0.18uF	CCT207	050-0145-52	1/16W 1k ohm x4
C134	042-1458-93	50V 2.2uF	C331	168-8212-55	820pF K	CCT208	050-0145-52	1/16W 1k ohm x4
C135	168-8212-55	820pF K	C332	168-8212-55	820pF K	CCT209	050-0145-52	1/16W 1k ohm x4
C136	166-2201-50	22pF CH	C333	168-8212-55	820pF K	CCT211	050-0145-52	1/16W 1k ohm x4
C137	168-4712-55	470pF K	C334	168-8212-55	820pF K	CCT212	050-0145-52	1/16W 1k ohm x4
C138	187-4763-37	16V 47uF	C335	188-1063-38	16V 10uF	D401	001-0529-48	MA8091-H
C139	166-1011-50	100pF CH	C336	188-1063-38	16V 10uF	D402	001-0516-90	MA111
C141	166-1011-50	100pF CH	C337	168-1832-55	0.018uF K	D403	001-2412-90	RR264M-400
C142	168-1042-78	16V 0.1uF K	C342	166-2201-50	22pF CH	D404	001-0516-90	MA111
C143	188-1073-28	10V 100uF	C343	166-2201-50	22pF CH	D405	001-0504-31	HZS6 A2L
C144	168-1052-78	16V 1uF K	C344	166-2201-50	22pF CH	D406	001-0504-45	HZS9 B1L
C147	168-1022-55	1000pF K	C345	166-2201-50	22pF CH	D407	001-2015-00	RL253
C148	178-1042-78	0.1uF	C346	166-2201-50	22pF CH	D408	001-0529-48	MA8091-H
C149	166-1011-50	100pF CH	C347	166-2201-50	22pF CH	D409	001-0529-34	MA8062-L
C150	188-3363-28	10V 33uF	C348	043-0548-50	10V 2.2uF	D410	001-0580-90	1SS352
C151	168-3932-78	0.039uF K	C349	043-0548-50	10V 2.2uF	D411	001-4320-50	EDZC6.8B
C152	168-1042-78	16V 0.1uF K	C350	043-0548-50	10V 2.2uF	D412	001-4320-50	EDZC6.8B
C153	168-3932-78	0.039uF K	C351	043-0548-50	10V 2.2uF	IC103	051-4618-90	HA12181FP-EL-E
C154	188-3353-68	50V 3.3uF	C352	168-1052-78	16V 1uF K	IC201	052-1189-20	LC723663-9D70-E (MASK-MICOM)
C155	168-2245-79	0.22uF Z	C353	168-1052-78	16V 1uF K	IC301	051-3034-90	NJM4558V
C156	168-3332-78	0.033uF K	C354	168-1052-78	16V 1uF K	IC302	051-5029-00	LC75412EH
C157	168-1032-55	0.01uF K	C355	168-1052-78	16V 1uF K	IC303	051-3020-90	NJM4565V
C158	168-6832-78	0.068uF K	C401	188-4763-38	16V 47uF	IC401	051-3341-90	BD3931FP
C159	168-2222-55	2200pF K	C403	042-6000-91	10V 33uF	IC402	051-2067-00	TB2946HQ
C160	168-3332-78	0.033uF K	C404	168-1032-55	0.01uF K	J201	074-2503-76	26P
C161	168-4722-55	4700pF K	C405	168-1042-78	16V 0.1uF K	J202	076-3011-68	18P
C162	168-3332-78	0.033uF K	C406	168-2232-55	0.022uF K	J401	074-4009-20	20P
C163	178-2255-79	2.2uF	C407	168-1042-78	16V 0.1uF K	L104	010-2003-04	30uH
C164	168-3332-78	0.033uF K	C408	042-1452-82	16V 100uF	L105	010-3407-75	120uH J
C165	178-2255-79	2.2uF	C409	043-0574-90	25V 1.0uF	L201	010-6009-64	22uH J
C166	168-5632-78	16V 0.056uF K	C410	168-1052-78	16V 1uF K	L402	010-8048-00	240uH
C167	168-2232-55	0.022uF K	C411	168-4722-55	4700pF K	Q105	192-4116-51	2SC4116 G,L
C168	168-1022-55	1000pF K	C412	188-1063-38	16V 10uF	Q106	192-4116-51	2SC4116 G,L
C169	168-8212-55	820pF K	C413	168-1532-55	0.015uF K	Q108	190-1162-00	2SA1162
C170	166-1007-50	10pF CH	C414	168-1532-55	0.015uF K	Q109	190-1162-00	2SA1162
C171	166-1007-50	10pF CH	C415	168-1532-55	0.015uF K	Q205	125-0002-92	RN2402
C172	166-1007-50	10pF CH	C416	168-1532-55	0.015uF K	Q401	192-5886-00	2SC5886
C202	168-4732-78	0.047uF K	C417	188-1063-68	50V 10uF	Q402	191-1197-50	2SB1197K Q,R
C203	168-1022-55	1000pF K	C418	166-1011-50	100pF CH	Q403	125-2026-91	UNR5211G
C204	165-3363-45	25V 33uF	C419	188-1063-38	16V 10uF	Q404	125-0020-94	UNR511M
C205	168-1022-55	1000pF K	C420	168-1052-78	16V 1uF K	Q405	125-2026-91	UNR5211G
C206	166-1011-50	100pF CH	C421	042-1334-72	16V 10uF	Q406	191-1240-00	2SB1240
C207	166-1011-50	100pF CH	C422	172-1041-11	0.1uF	Q407	125-2026-95	UNR521NG
C208	166-1011-50	100pF CH	C423	189-3383-32	16V 3300uF	Q408	193-1858-00	2SD1858
C209	166-1011-50	100pF CH	C425	168-6822-55	6800pF K	Q409	125-9015-92	RN4902
C212	166-2201-50	22pF CH	C426	168-6822-55	6800pF K	Q410	103-2012-00	2SD2012
C213	168-1042-78	16V 0.1uF K	C427	168-6822-55	6800pF K	Q411	125-2026-94	UNR521MG
C215	168-1042-78	16V 0.1uF K	C428	168-6822-55	6800pF K	Q412	192-5886-00	2SC5886
C216	187-1073-27	10V 100uF	C429	168-1042-78	16V 0.1uF K	Q414	193-1306-00	2SD1306
C218	168-1052-78	16V 1uF K	C430	168-6822-55	6800pF K	Q415	192-2712-00	2SC2712
C219	168-1042-78	16V 0.1uF K	C431	168-6822-55	6800pF K	Q416	192-2712-00	2SC2712
C220	166-1007-50	10pF CH	C432	168-6822-55	6800pF K	R106	119-0000-05	1/10W 0 ohm JW
C221	168-4712-55	470pF K	C433	168-6822-55	6800pF K	R120	119-4741-15	1/10W 470k ohm
C223	168-2242-58	0.22uF K	C435	168-1042-78	16V 0.1uF K	R121	119-2221-15	1/10W 2.2k ohm
C309	189-2273-29	10V 220uF	C436	168-1042-78	16V 0.1uF K	R122	119-2221-15	1/10W 2.2k ohm
C310	188-1063-38	16V 10uF	C437	188-1063-38	16V 10uF	R123	119-2721-15	1/10W 2.7k ohm
C312	188-4763-38	16V 47uF	C438	168-1042-78	16V 0.1uF K			


REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R124	119-1021-15	1/10W 1k ohm	R235	119-1031-15	1/10W 10k ohm	R408	119-2221-15	1/10W 2.2k ohm
R125	119-8201-15	1/10W 82 ohm	R236	119-1041-15	1/10W 100k ohm	R409	119-2221-15	1/10W 2.2k ohm
R126	119-1021-15	1/10W 1k ohm	R237	119-4731-15	1/10W 47k ohm	R410	119-2221-15	1/10W 2.2k ohm
R127	119-1021-15	1/10W 1k ohm	R238	119-4731-15	1/10W 47k ohm	R411	119-2221-15	1/10W 2.2k ohm
R130	119-0000-05	1/10W 0 ohm JW	R240	119-2231-15	1/10W 22k ohm	R412	116-1091-15	1/4W 1 ohm
R132	119-1001-15	1/10W 10 ohm	R241	119-0000-05	1/10W 0 ohm JW	R413	116-1221-15	1/4W 1.2k ohm
R133	119-1001-15	1/10W 10 ohm	R242	119-3341-15	1/10W 330k ohm	R414	119-1031-15	1/10W 10k ohm
R134	119-1501-15	1/10W 15 ohm	R243	119-4731-15	1/10W 47k ohm	R415	119-0000-05	1/10W 0 ohm JW
R135	119-1041-15	1/10W 100k ohm	R302	119-4731-15	1/10W 47k ohm	R417	116-2211-15	1/4W 220 ohm
R136	119-4731-15	1/10W 47k ohm	R304	119-4731-15	1/10W 47k ohm	R418	119-1041-15	1/10W 100k ohm
R137	119-2731-15	1/10W 27k ohm	R318	119-0000-05	1/10W 0 ohm JW	R419	119-4721-15	1/10W 4.7k ohm
R138	119-1231-15	1/10W 12k ohm	R321	119-4731-15	1/10W 47k ohm	R420	116-3911-15	1/4W 390 ohm
R139	119-1021-15	1/10W 1k ohm	R322	119-4731-15	1/10W 47k ohm	R421	116-3911-15	1/4W 390 ohm
R140	119-1021-15	1/10W 1k ohm	R323	119-0000-05	1/10W 0 ohm JW	R422	119-1041-15	1/10W 100k ohm
R141	119-1841-15	1/10W 180k ohm	R326	119-0000-05	1/10W 0 ohm JW	R423	116-1521-15	1/4W 1.5k ohm
R142	119-2221-15	1/10W 2.2k ohm	R327	119-0000-05	1/10W 0 ohm JW	R424	116-1521-15	1/4W 1.5k ohm
R143	119-1031-15	1/10W 10k ohm	R328	119-0000-05	1/10W 0 ohm JW	R428	119-4721-15	1/10W 4.7k ohm
R144	119-5621-15	1/10W 5.6k ohm	R329	119-0000-05	1/10W 0 ohm JW	R429	119-1031-15	1/10W 10k ohm
R146	119-1031-15	1/10W 10k ohm	R332	119-0000-05	1/10W 0 ohm JW	R430	116-8221-15	1/4W 8.2k ohm
R147	119-2221-15	1/10W 2.2k ohm	R333	119-3931-15	1/10W 39k ohm	R431	119-4721-15	1/10W 4.7k ohm
R148	119-1021-15	1/10W 1k ohm	R334	119-1821-15	1/10W 1.8k ohm	R432	119-5611-15	1/10W 560 ohm
R149	119-6821-15	1/10W 6.8k ohm	R335	119-1821-15	1/10W 1.8k ohm	R433	116-4791-15	1/4W 4.7 ohm
R150	119-1031-15	1/10W 10k ohm	R336	119-3931-15	1/10W 39k ohm	R434	116-4791-15	1/4W 4.7 ohm
R152	119-0000-05	1/10W 0 ohm JW	R337	119-4721-15	1/10W 4.7k ohm	R435	168-4742-78	0.47uF K
R201	119-1021-15	1/10W 1k ohm	R338	119-4721-15	1/10W 4.7k ohm	R436	032-0208-51	1/4W 15k ohm
R202	119-1021-15	1/10W 1k ohm	R339	119-4721-15	1/10W 4.7k ohm	R437	119-0000-05	1/10W 0 ohm JW
R203	119-1031-15	1/10W 10k ohm	R340	119-4721-15	1/10W 4.7k ohm	R439	119-4741-15	1/10W 470k ohm
R206	119-1031-15	1/10W 10k ohm	R343	032-0140-51	1/10W 15k ohm F	R440	119-4741-15	1/10W 470k ohm
R207	119-4731-15	1/10W 47k ohm	R344	032-0140-51	1/10W 15k ohm F	R445	119-0000-05	1/10W 0 ohm JW
R208	119-4711-15	1/10W 470 ohm	R345	032-0140-51	1/10W 15k ohm F	R447	119-1031-15	1/10W 10k ohm
R209	119-4711-15	1/10W 470 ohm	R346	032-0140-51	1/10W 15k ohm F	R448	119-1031-15	1/10W 10k ohm
R210	119-4731-15	1/10W 47k ohm	R347	032-0140-50	1/10W 10k ohm F	R449	119-1031-15	1/10W 10k ohm
R211	119-1031-15	1/10W 10k ohm	R348	032-0140-50	1/10W 10k ohm F	R450	119-1031-15	1/10W 10k ohm
R212	119-1031-15	1/10W 10k ohm	R349	032-0140-50	1/10W 10k ohm F	R466	119-0000-05	1/10W 0 ohm JW
R213	119-1031-15	1/10W 10k ohm	R350	032-0140-50	1/10W 10k ohm F	SUP102	060-0122-91	DSP-141N-S00B
R214	119-4731-15	1/10W 47k ohm	R351	119-1031-15	1/10W 10k ohm	TC201	004-1580-10	30pF GRN
R215	119-4731-15	1/10W 47k ohm	R352	119-1031-15	1/10W 10k ohm	TH401	002-0229-90	PTH8L05B
R217	119-1031-15	1/10W 10k ohm	R353	119-0000-05	1/10W 0 ohm JW	TM101	073-0768-90	TERMINAL
R218	119-1031-15	1/10W 10k ohm	R354	119-0000-05	1/10W 0 ohm JW	TM102	073-0768-90	TERMINAL
R219	119-4731-15	1/10W 47k ohm	R355	119-0000-05	1/10W 0 ohm JW	TM401	073-0768-90	TERMINAL
R220	119-2231-15	1/10W 22k ohm	R401	116-4711-15	1/4W 470 ohm	TM402	073-0768-90	TERMINAL
R222	119-1031-15	1/10W 10k ohm	R402	116-1821-15	1/4W 1.8k ohm	VR102	012-6018-56	VR 10k ohm
R223	119-1041-15	1/10W 100k ohm	R403	119-2231-15	1/10W 22k ohm	X201	061-1053-00	4.5MHz
R224	119-1031-15	1/10W 10k ohm	R404	119-3331-15	1/10W 33k ohm	PWB	039-3338-00	PWB(WITHOUT COMPONENTS)
R226	119-4731-15	1/10W 47k ohm	R405	119-1231-15	1/10W 12k ohm			
R228	119-1031-15	1/10W 10k ohm	R406	119-3321-15	1/10W 3.3k ohm			
R231	119-1031-15	1/10W 10k ohm	R407	119-1021-15	1/10W 1k ohm			

SW PWB(B2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C601	043-0540-00	6.3V 10uF	D638	001-7109-90	SML-311DTT86 ORG	R621	116-1521-15	1/4W 1.5k ohm
C602	166-1011-50	100pF CH	D639	001-7109-90	SML-311DTT86 ORG	R622	116-1221-15	1/4W 1.2k ohm
C603	168-1042-78	16V 0.1uF K	D640	001-7109-90	SML-311DTT86 ORG	R623	116-1521-15	1/4W 1.5k ohm
C604	168-1042-78	16V 0.1uF K	D641	001-7109-90	SML-311DTT86 ORG	R625	116-1821-15	1/4W 1.8k ohm
C605	168-1042-78	16V 0.1uF K	D642	001-7109-90	SML-311DTT86 ORG	R626	116-2221-15	1/4W 2.2k ohm
C606	168-1022-55	1000pF K	D643	001-7109-90	SML-311DTT86 ORG	R627	116-1521-15	1/4W 1.5k ohm
C607	168-1052-78	16V 1uF K	D644	001-7109-90	SML-311DTT86 ORG	R628	116-1221-15	1/4W 1.2k ohm
C608	168-1042-78	16V 0.1uF K	D645	001-7109-90	SML-311DTT86 ORG	R629	116-1521-15	1/4W 1.5k ohm
C609	168-1052-78	16V 1uF K	D646	001-7109-90	SML-311DTT86 ORG	R630	119-3931-15	1/10W 39k ohm
C610	043-0540-00	6.3V 10uF	D649	001-9210-50	AVR-M1608C270MTA	R632	116-1221-15	1/4W 1.2k ohm
C611	043-0540-00	6.3V 10uF			AD	R633	116-8211-15	1/4W 820 ohm
CCT601	050-0145-52	1/16W 1k ohm x4	D650	001-9210-50	AVR-M1608C270MTA	S601	013-6201-53	SKPMAPE010
CCT602	050-0145-52	1/16W 1k ohm x4			AD	S602	013-6201-53	SKPMAPE010
CCT603	050-0145-52	1/16W 1k ohm x4	D651	001-9210-50	AVR-M1608C270MTA	S603	013-6202-52	SKPMBJE010
D617	001-7109-90	SML-311DTT86 ORG			AD	S604	013-6201-53	SKPMAPE010
D618	001-7109-90	SML-311DTT86 ORG	D652	001-4320-50	EDZC6.8B	S605	013-6201-53	SKPMAPE010
D619	001-7109-90	SML-311DTT86 ORG	IC601	051-6095-10	LC75857E-E	S606	013-6202-52	SKPMBJE010
D620	001-7109-90	SML-311DTT86 ORG	J601	074-3014-68	18P	S607	013-6202-52	SKPMBJE010
D621	001-7109-90	SML-311DTT86 ORG	J602	075-0390-00	JACK	S608	013-6201-53	SKPMAPE010
D622	001-7109-90	SML-311DTT86 ORG	L100	010-3105-62	1k ohm/100MHz	S609	013-6201-53	SKPMAPE010
D623	001-7109-90	SML-311DTT86 ORG	L101	010-3105-62	1k ohm/100MHz	S610	013-6202-52	SKPMBJE010
D624	001-7109-90	SML-311DTT86 ORG	L102	010-3105-62	1k ohm/100MHz	S611	013-6201-53	SKPMAPE010
D625	001-7109-90	SML-311DTT86 ORG	L103	010-3105-62	1k ohm/100MHz	S612	013-6201-53	SKPMAPE010
D626	001-7109-90	SML-311DTT86 ORG	R609	119-1521-15	1/10W 1.5k ohm	S613	013-6201-53	SKPMAPE010
D627	001-7109-90	SML-311DTT86 ORG	R610	119-1521-15	1/10W 1.5k ohm	S614	013-6201-53	SKPMAPE010
D628	001-7109-90	SML-311DTT86 ORG	R611	119-1521-15	1/10W 1.5k ohm	S615	013-6201-53	SKPMAPE010
D629	001-7109-90	SML-311DTT86 ORG	R612	116-1521-15	1/4W 1.5k ohm	S616	016-7000-00	ROTARY ENCODER
D630	001-7109-90	SML-311DTT86 ORG	R613	116-1521-15	1/4W 1.5k ohm	S617	013-6201-53	SKPMAPE010
D631	001-7109-90	SML-311DTT86 ORG	R614	116-1521-15	1/4W 1.5k ohm	S618	013-6201-53	SKPMAPE010
D632	001-7109-90	SML-311DTT86 ORG	R615	116-1521-15	1/4W 1.5k ohm	TM601	073-0778-90	TERMINAL
D633	001-7109-90	SML-311DTT86 ORG	R616	116-1521-15	1/4W 1.5k ohm	TM602	073-0778-90	TERMINAL
D634	001-7109-90	SML-311DTT86 ORG	R617	116-1821-15	1/4W 1.8k ohm	TM603	073-0778-90	TERMINAL
D635	001-7109-90	SML-311DTT86 ORG	R618	116-2021-15	1/4W 2k ohm	PWB	039-3976-00	PWB(WITHOUT COMPONENTS)
D636	001-7109-90	SML-311DTT86 ORG	R619	116-2021-15	1/4W 2k ohm			
D637	001-7109-90	SML-311DTT86 ORG	R620	116-1521-15	1/4W 1.5k ohm			

EXPLODED VIEW / PARTS LIST

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	966-1722-21	SH-RACK-ASSY	1	42	621-1748-20	POWER GEAR A	1
2	969-0075-31	PICKUP-ASSY	1	43	621-1749-20	POWER GEAR B	1
3	-----	SENS-PWB-ASSY(5037AH-95)	1	44	621-1750-20	POWER GEAR C	1
4	-----	MAIN-PWB-ASSY(5041AH-97)	1	45	621-1751-20	POWER GEAR D	1
5	-----	DC-MOTOR*SPIN(152730-020)	1	46	621-1752-20	DISC STOPPER	1
6	-----	DC-MOTOR*POW(152803-020)	1	47	621-1753-20	CLAMPER RING	1
7	345-5476-20	CUSHION RUBBER	1	48	621-1754-21	GEAR BASE	1
8	620-1023-23	CLAMPER PLATE	1	49	622-1570-21	DAMPER PIN	3
9	620-1026-21	SPRING PLATE	1	50	622-1571-21	ROLLER SHAFT	1
10	620-1596-23	CLAMPER LINK	1	51	624-3059-00	LEAD SCREW	1
11	620-1862-20	UPPER CHASSIS	1	52	629-0086-20	DAMPER F	2
12	620-1866-20	DRIVE PLATE	1	53	629-0087-20	DAMPER R	1
13	620-1752-20	SENSOR ARM	1	54	714-2003-8B	MACHIN SCREW	2
14	620-1753-20	ID-LOCK PLATE	1	55	716-1507-01	SCREW	3
15	620-1868-20	LOWER CHASSIS	1	56	716-1670-01	SPECIAL SCREW	4
16	-----	MO-GEAR*POW(060721-621)	1	57	716-1733-01	SCREW	2
17	621-0608-21	SECOND GEAR	1	58	716-3469-01	SPECIAL SCREW	2
18	621-0609-21	BASE GEAR	1	59	716-3473-01	SPECIAL SCREW	1
19	621-0610-21	IDLE GEAR A	1	60	716-3551-00	SPECIAL SCREW	2
20	621-0611-21	IDLE GEAR B	1	61	750-6797-20	ROLLER SPRING L	1
21	621-0612-22	ROLLER GEAR A	1	62	750-6798-20	ROLLER SPRING R	1
22	621-0620-20	THREAD GEAR A	1	63	750-7865-20	SHIFT SPRING	1
23	621-0621-20	THREAD GEAR B	1	64	750-7866-20	RACK SPRING	1
24	621-0623-24	LS-HOLDER	1	65	750-7867-20	CLAMPER SPRING	1
25	621-0624-22	GUIDE RAIL	1	66	750-7868-20	ID-LOCK SPRING	1
26	-----	TURN TABLE(063820-621)	1	67	750-7869-20	SENSOR SPRING	1
27	621-0711-21	LOADING ROLLER	2	68	750-7870-20	DR-SPRING F	2
28	621-0718-21	ROLLER GUIDE	1	69	750-7871-20	DR-SPRING RA	1
29	621-0719-20	ROLLER GEAR	1	70	750-7872-20	DR-SPRING RB	1
30	621-0720-20	ROLLER GEAR C	1	71	750-7873-20	DR-SPRING C	1
31	621-0721-20	ROLLER GEAR D	1	72	780-2025-00	SCREW	3
32	621-0728-20	STOPPER LINK	1	73	781-1730-00	SCREW	1
33	621-1719-22	IDLE CASE	1	74	803-4906-60	VINYL-COAT-WIRE	1
34	621-1726-21	ROLLER SLEEVE	2	75	816-4065-50	FLAT WIRE	1
35	621-1729-21	SH-BASE	1	76	816-2590-00	SPECIAL LEAD	1
36	621-1742-20	UPPER GUIDE	1	77	816-2591-00	SPECIAL LEAD	1
37	621-1743-20	SHIFT LEVER	1	78	816-2592-00	SPECIAL LEAD	1
38	621-1744-20	RACK	1	79	816-2593-00	SPECIAL LEAD	1
39	621-1745-20	LOCK ARM L	1	80	SMA-182-200	SPINDLE-MOTOR-ASSY	1
40	621-1746-20	LOCK ARM R	1	81	SMA-183-200	POWER-MOTOR-ASSY	1
41	621-1747-20	GEAR COVER	1				

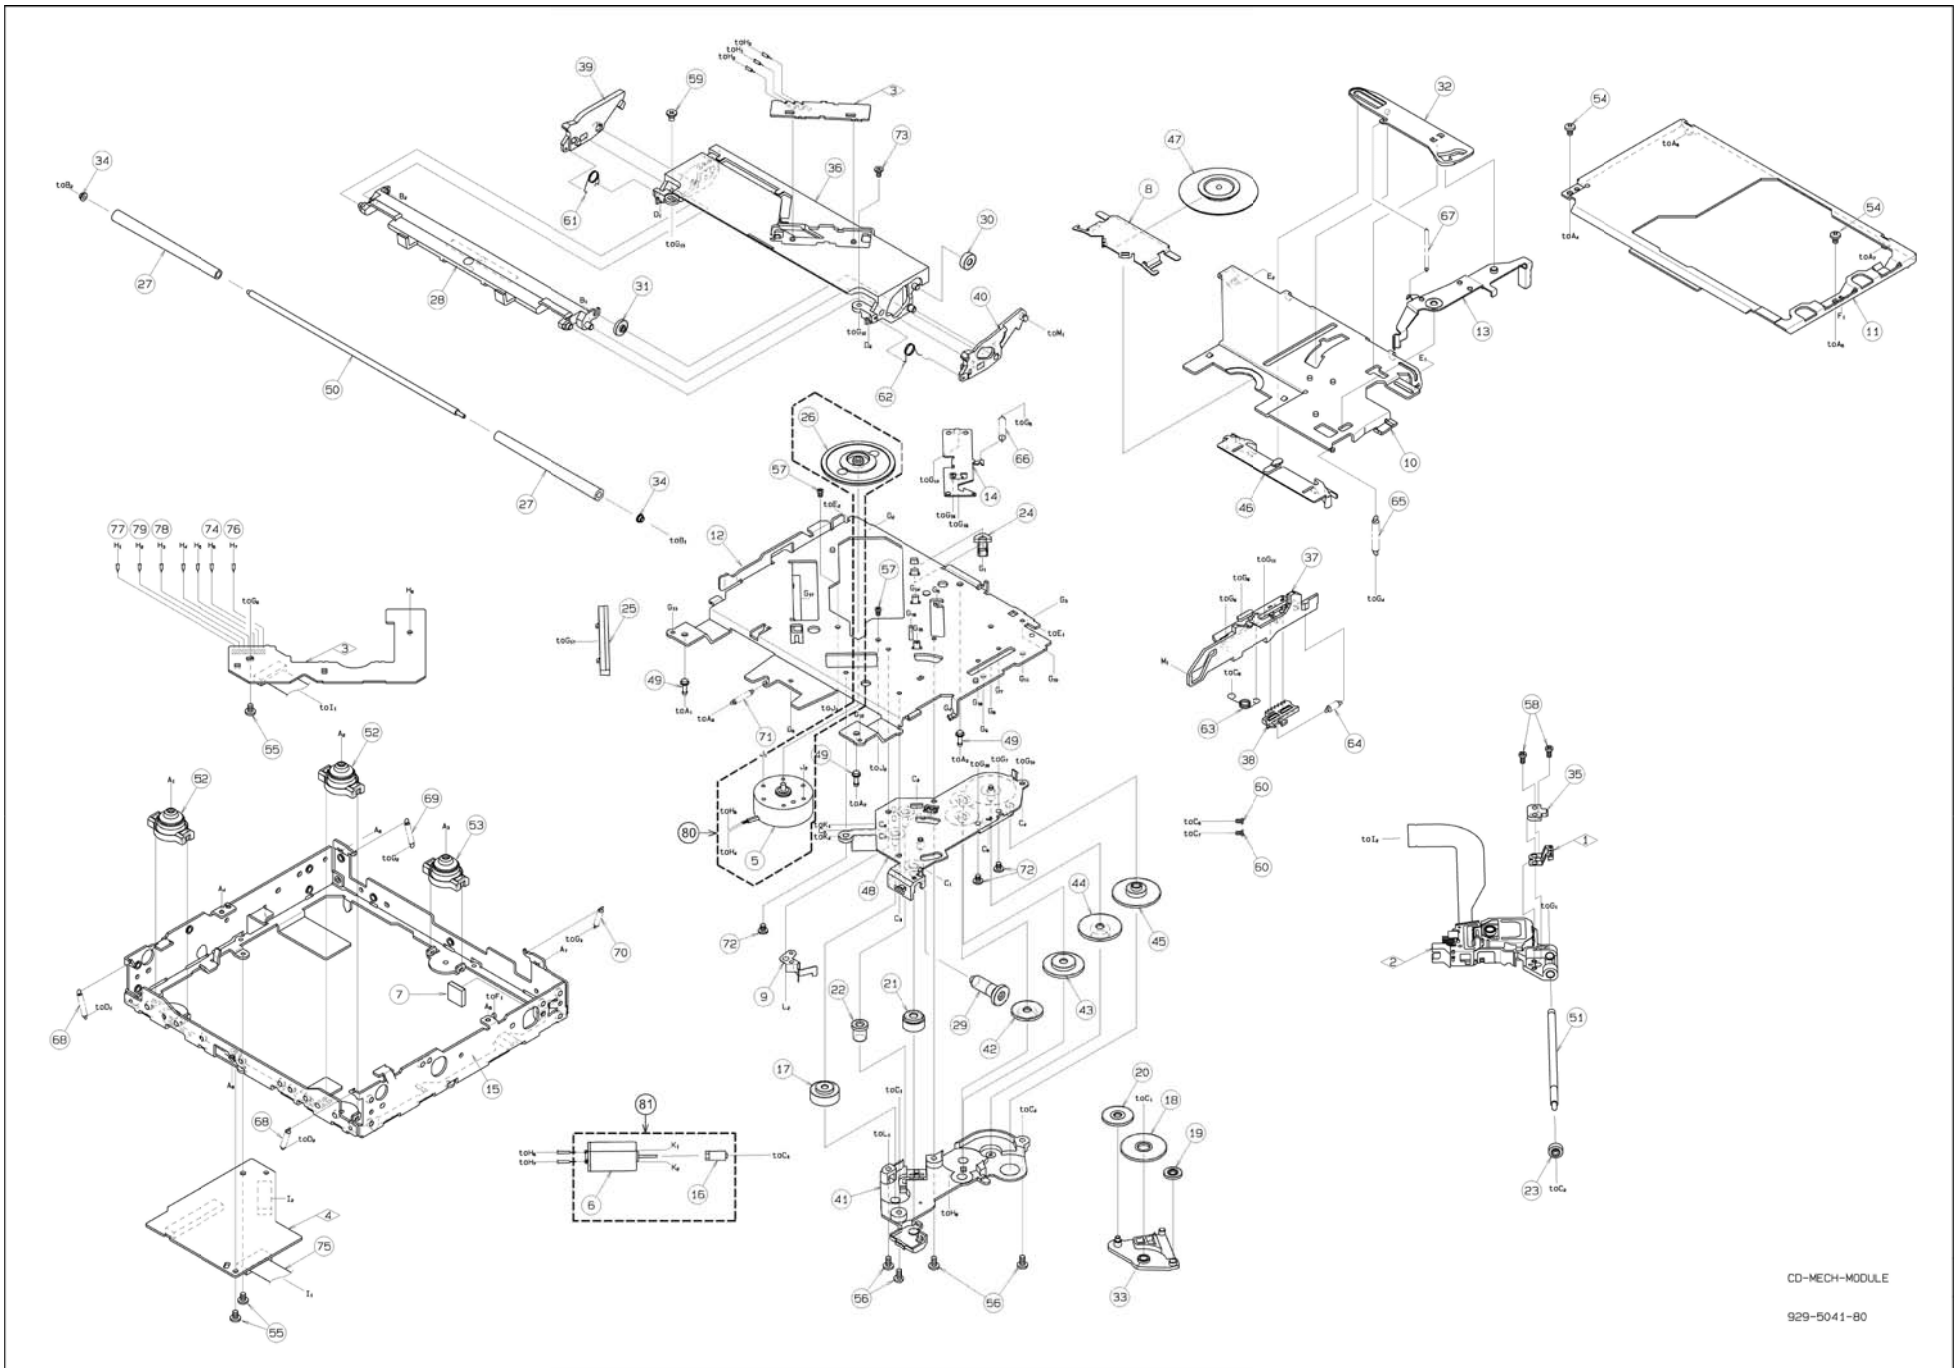

CD-MECH-MODULE

929-5041-80

ELECTRICAL PARTS LIST

MAIN PWB(B1) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	168-1042-78	16V 0.1uF	C33	046-1532-78	0.015uF B	J301	074-2504-10	SOCKET (10P)
C3	165-2273-05	4V 220uF	C34	168-1042-78	16V 0.1uF	Q1	190-2060-00	2SA2060
C4	168-1042-78	16V 0.1uF	C35	046-6812-58	680pF B	Q2	190-2060-00	2SA2060
C5	165-1073-35	16V 100	C36	168-1042-78	16V 0.1uF	R1	117-6811-15	1/8W 680 ohm
C6	165-1073-35	16V 100	C37	168-1042-78	16V 0.1uF	R2	117-1001-15	1/8W 10ohm
C7	168-1042-78	16V 0.1uF	C38	046-1522-58	1500pF B	R9	033-2211-15	1/10W 220 ohm
C9	168-1052-78	16V 1uF	C39	046-4722-58	4700pF B	R11	033-1051-15	1/10W 1M ohm
C10	042-0560-85	6.3V 100uF	C40	046-1032-78	0.01uF B	R12	119-2221-15	1/10W 2.2k ohm
C11	046-4712-58	470pF B	C41	046-1532-78	0.015uF B	R13	033-2211-15	1/10W 220 ohm
C12	168-1052-78	16V 1uF	C42	045-1011-50	100pF	R14	033-2211-15	1/10W 220 ohm
C13	046-4712-58	470pF B	C43	168-1042-78	16V 0.1uF	R16	033-2231-15	1/10W 22k ohm
C15	168-1042-78	16V 0.1uF	C47	045-4701-50	47pF CH	R17	033-3921-15	1/10W 3.9k ohm
C16	168-4732-78	0.047uF K	C48	168-1042-78	16V 0.1uF	R18	033-3341-15	1/10W 330k ohm
C17	168-4732-78	0.047uF K	C49	168-1042-78	16V 0.1uF	R19	033-5621-15	1/10W 5.6k ohm
C18	168-1042-78	16V 0.1uF	C51	046-5622-58	5600pF B	R21	033-2231-15	1/10W 22k ohm
C19	168-1042-78	16V 0.1uF	C53	045-1201-50	12pF CH	R22	119-4731-15	1/10W 47k ohm
C21	046-6822-58	6800pF B	C54	045-1201-50	12pF CH	R28	033-2031-15	1/10W 20k ohm
C22	046-3332-78	0.033uF B	C60	043-0603-90	16V 10uF	R29	033-3331-15	1/10W 33k ohm
C24	168-1052-78	16V 1uF	C61	043-0603-90	16V 10uF	R32	119-1001-15	1/10W 10 ohm
C25	168-1042-78	16V 0.1uF	C62	043-0603-90	16V 10uF	R33	033-1031-15	1/10W 10k ohm
C26	168-1042-78	16V 0.1uF	C64	043-0603-90	16V 10uF	R34	033-1541-15	1/10W 150k ohm
C27	168-1042-78	16V 0.1uF	CCT2	050-0140-63	1/32W 47k ohm x4J	R35	033-1231-15	1/10W 12k ohm
C28	168-1042-78	16V 0.1uF	D1	001-0367-91	1SS226TE85L	R36	033-1831-15	1/10W 18k ohm
C29	168-1042-78	16V 0.1uF	IC1	051-6101-90	BD8226EFV	TM1	073-0792-90	TERMINAL
C30	045-6801-50	68pF CH	IC2	051-6399-00	TC94A15F	X2	061-3534-90	16.92MHz
C31	168-1042-78	16V 0.1uF	J101	074-2505-26	SOCKET (26P)	PWB	039-3323-21	PWB(WITHOUT COMPONENTS)
C32	168-1042-78	16V 0.1uF	J201	074-2215-65	SOCKET (15P)			

SENSOR PWB(B2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D1	001-7058-90	AN1105W-RR	Q1	060-4015-91	PS1192HB-32-TR	S2	013-7413-50	LIMIT
D2	001-7058-90	AN1105W-RR	Q2	060-4015-91	PS1192HB-32-TR	PWB	039-2675-20	PWB(WITHOUT COMPONENTS)
J1	074-2504-10	10P	S1	013-7414-50	CHUCKING			