9. EXPLODED VIEWS AND PARTS LIST

NOTES: ● *Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.*
● *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
● *Screws adjacent to ▼ mark on product are used for disassembly.*
● *For the applying amount of lubricants or glue, follow the instructions in this manual. (In the case of no amount instructions, apply as you think it appropriate.)*

9.1 PACKING SECTION

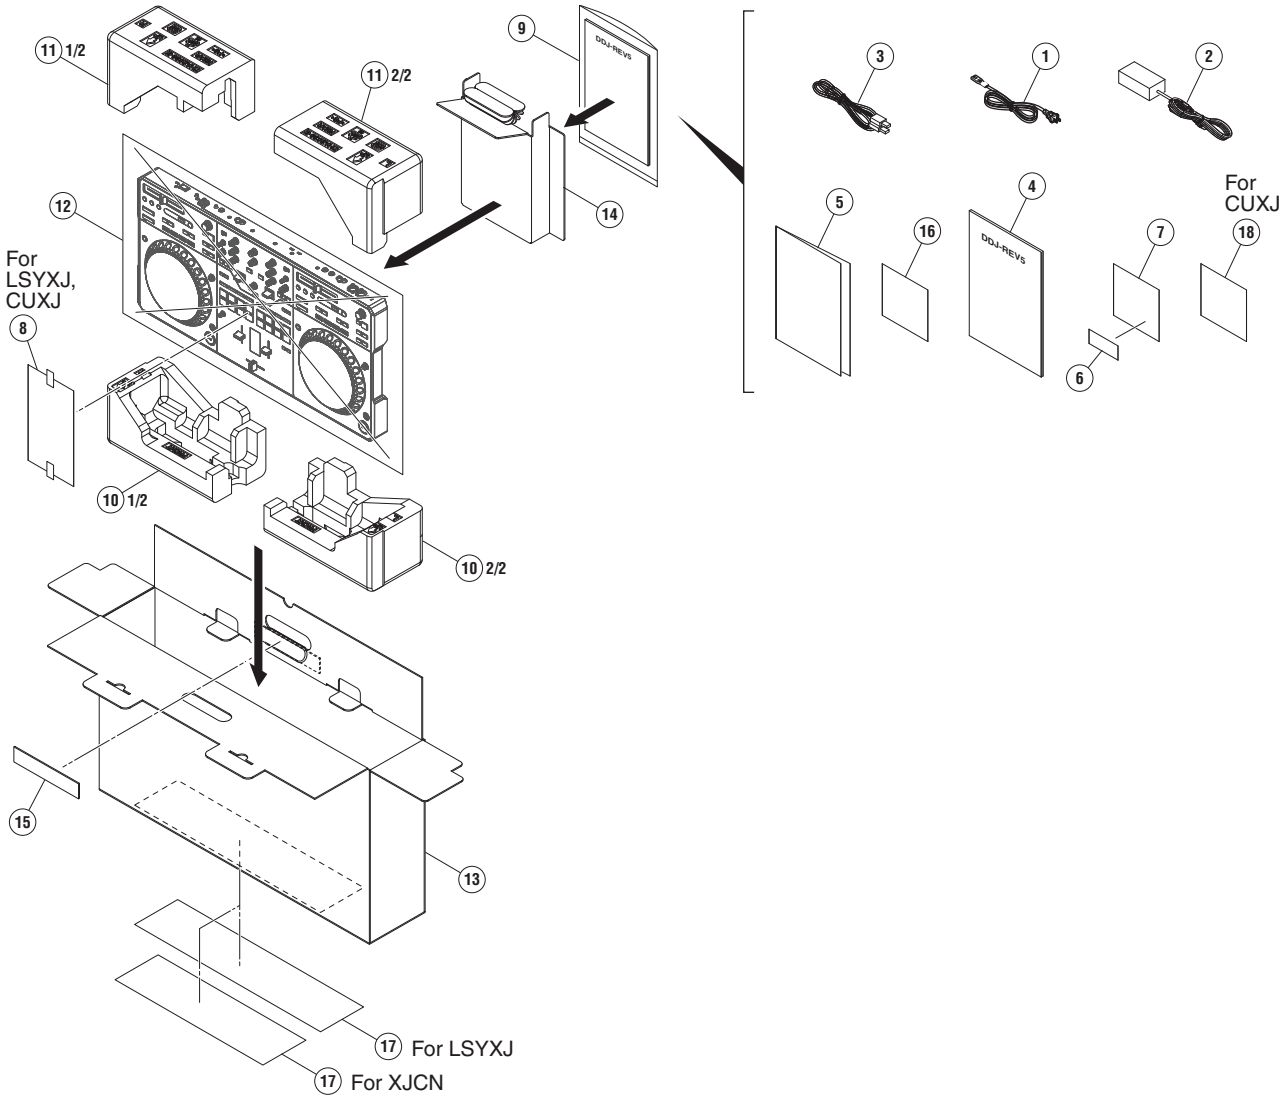

(1) PACKING SECTION PARTS LIST

Mark	No.	Description	Part No.
⚠	1	Power cord	See Contrast table (2)
⚠	2	AC adapter	DWR1603 or DWR1612 or DWR1613
	3	USB cable	DDE1158
	4	Quick Start Guide	See Contrast table (2)
	5	Precautions for Use	See Contrast table (2)
NSP	6	Serato DJ Pro Pitch 'n Time DJ voucher	• • • • •
NSP	7	Leaflet	DRM1434
NSP	8	Leaflet	See Contrast table (2)
NSP	9	Poly Bag	DHL1207
	10	Packing Pad	DHA2038
	11	Packing Pad	DHA2039
	12	Mirror Mat (1200*1000)	DHL1169
	13	Packing Case	DHG3898
	14	Packing Board	DHC1117
	15	Plate	DHC1122
NSP	16	Warranty	See Contrast table (2)
	17	Label	See Contrast table (2)
NSP	18	Leaflet	See Contrast table (2)

(2) CONTRAST TABLE

DDJ-REV5/LSYXJ, CUXJ and XJCN are constructed the same except for the following:

Mark	No.	Symbol and Description	DDJ-REV5/LSYXJ	DDJ-REV5/CUXJ	DDJ-REV5/XJCN
⚠	1	Power cord	ADG1154	XDG3052	ADG7079
	4	Quick Start Guide	DRH1756	DRH1756	DRH1757
	5	Precautions for Use	DRH1758	DRH1758	DRH1760
NSP	8	Leaflet	DRH1781	DRH1781	Not used
NSP	16	Warranty	DRY1274	Not used	Not used
	17	Label	DRW3081	Not used	DRW3083
NSP	18	Leaflet	Not used	DRH1782	Not used

9.2 EXTERIOR SECTION

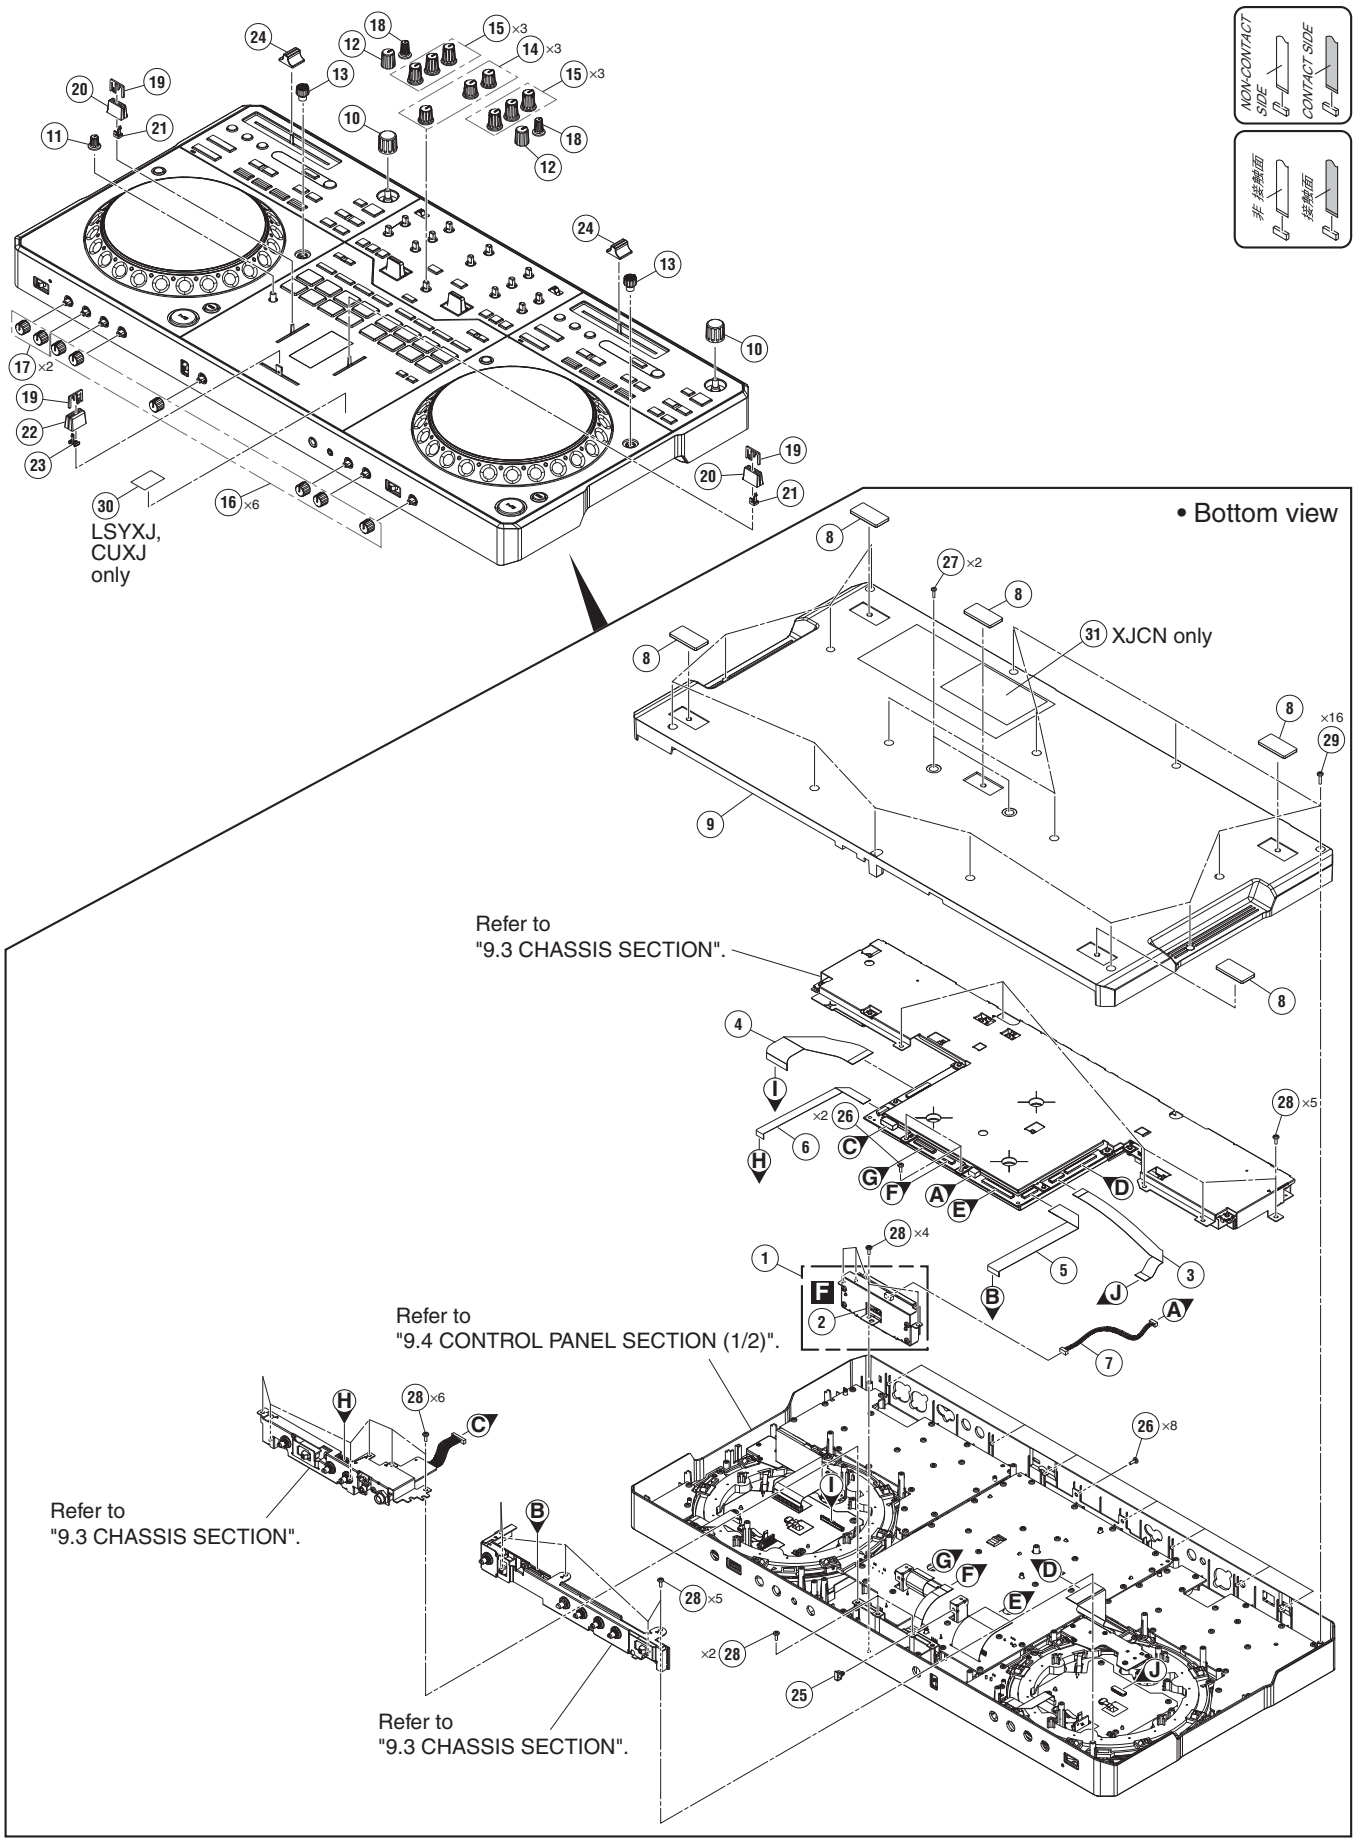

(1) EXTERIOR SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	1..Cross Fader Service Assy	DEA1156
NSP	2	2..CRFD Assy	DWX4892
	3	FFC	DDD2157
	4	FFC	DDD2158
	5	FFC	DDD2161
	6	FFC	DDD2162
	7	Connector Assy	PF03PP-B12
	8	Sheet/Leg	DEC3534
⚠	9	Chassis	DNK7148
	10	Dial Knob	DAA1246
	11	Rotary Knob S (Black)	DAA1262
	12	Knob	DAA1366
	13	Knob	DAA1406
	14	Knob	DAA1432
	15	Knob	DAA1433
	16	Knob	DAA1467
	17	Knob	DAA1468
	18	Knob	DAA1477
	19	Slider Knob 2	DAC2685
	20	Knob	DAC3540
	21	Stopper/SLD	DNK6009
	22	Knob	DAC3437
	23	Stopper	DNK6440
	24	Knob	DNK6629
	25	Locking Mini Clamp	DEC2439
	26	Screw	BBZ30P080FTB
	27	Screw	BPZ26P100FTB
	28	Screw	BPZ30P080FTC
	29	Screw	BPZ30P120FTB
NSP	30	Label	See Contrast table (2)
NSP	31	Label	See Contrast table (2)

(2) CONTRAST TABLE

DDJ-REV5/LSYXJ, CUXJ and XJCN are constructed the same except for the following:

Mark	No.	Symbol and Description	DDJ-REV5/LSYXJ	DDJ-REV5/CUXJ	DDJ-REV5/XJCN
NSP	30	Label	DRW3080	DRW3080	Not used
NSP	31	Label	Not used	Not used	DRW3060

9.3 CHASSIS SECTION

• FRT2 Section

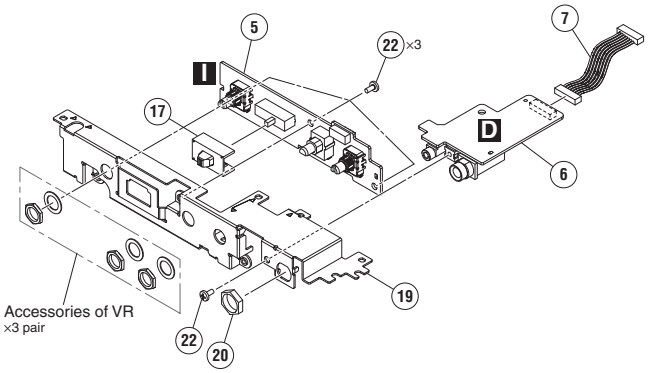

• FRT1 Section

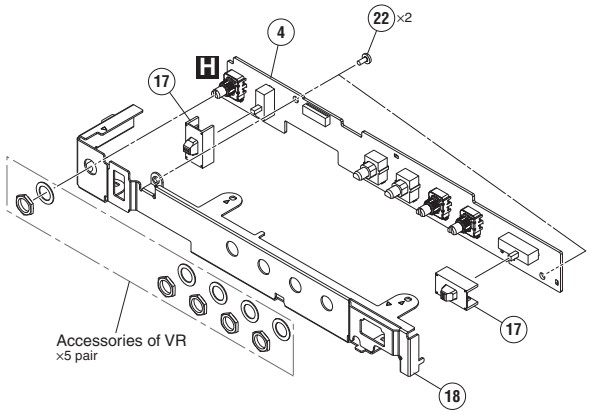

• Chassis Section

• Bottom view

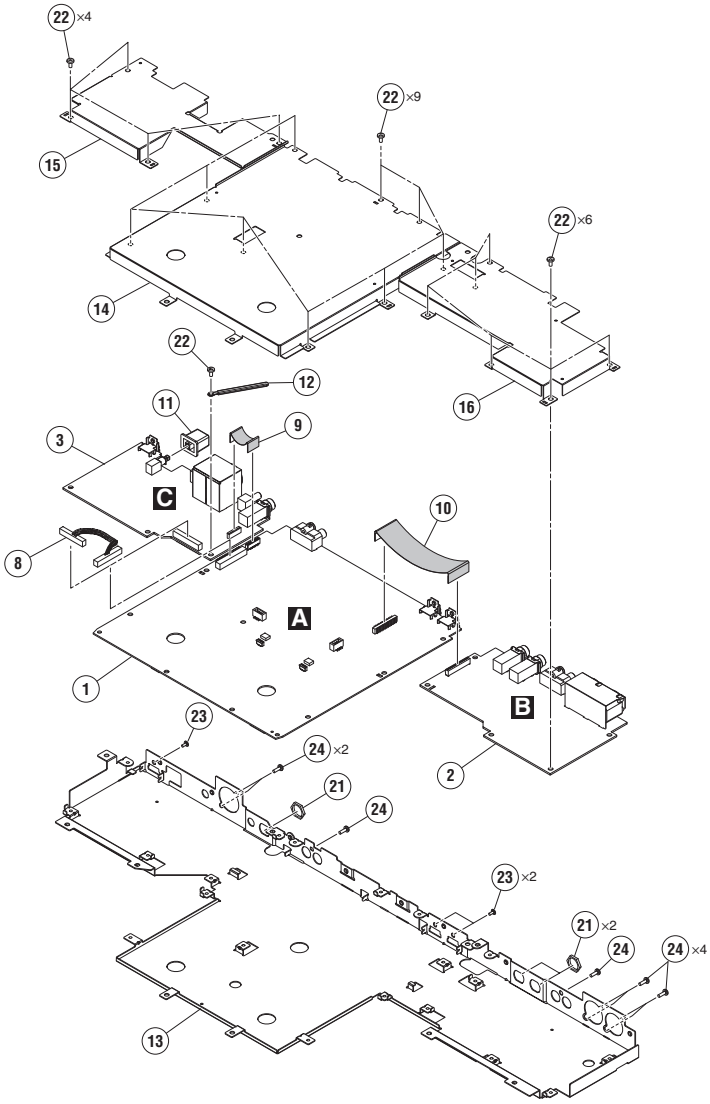



CHASSIS SECTION PARTS LIST

Mark No.	Description	Part No.
1	MAIN Assy	DWX4871
2	AOUT Assy	DWX4880
3	DCMC Assy	DWX4881
4	FRT1 Assy	DWX4882
5	FRT2 Assy	DWX4883
6	HPJK Assy	DWX4890
7	Parallel Jumper	PF07HH-B05A
8	Parallel Jumper	PF15HH-D07A
9	FFC	DDD2036
10	FFC	DDD2166
11	Power Knob	DAC2306
12	Cord Clamper	DEX1025
13	Stay	DNH3604
14	Shield Plate	DNH3609
15	Shield Plate	DNH3610
16	Shield Plate	DNH3611
17	Cap/Mic	DAC2773
18	Stay	DNH3607
19	Stay	DNH3608
20	Nut	DBN1028
21	Nut	NKX2FTC
22	Screw	BBZ30P060FTC
23	Screw (M3*5)	DBA1340
24	Screw	PPZ30P080FTB

9.4 CONTROL PANEL SECTION (1/2)

• Bottom view

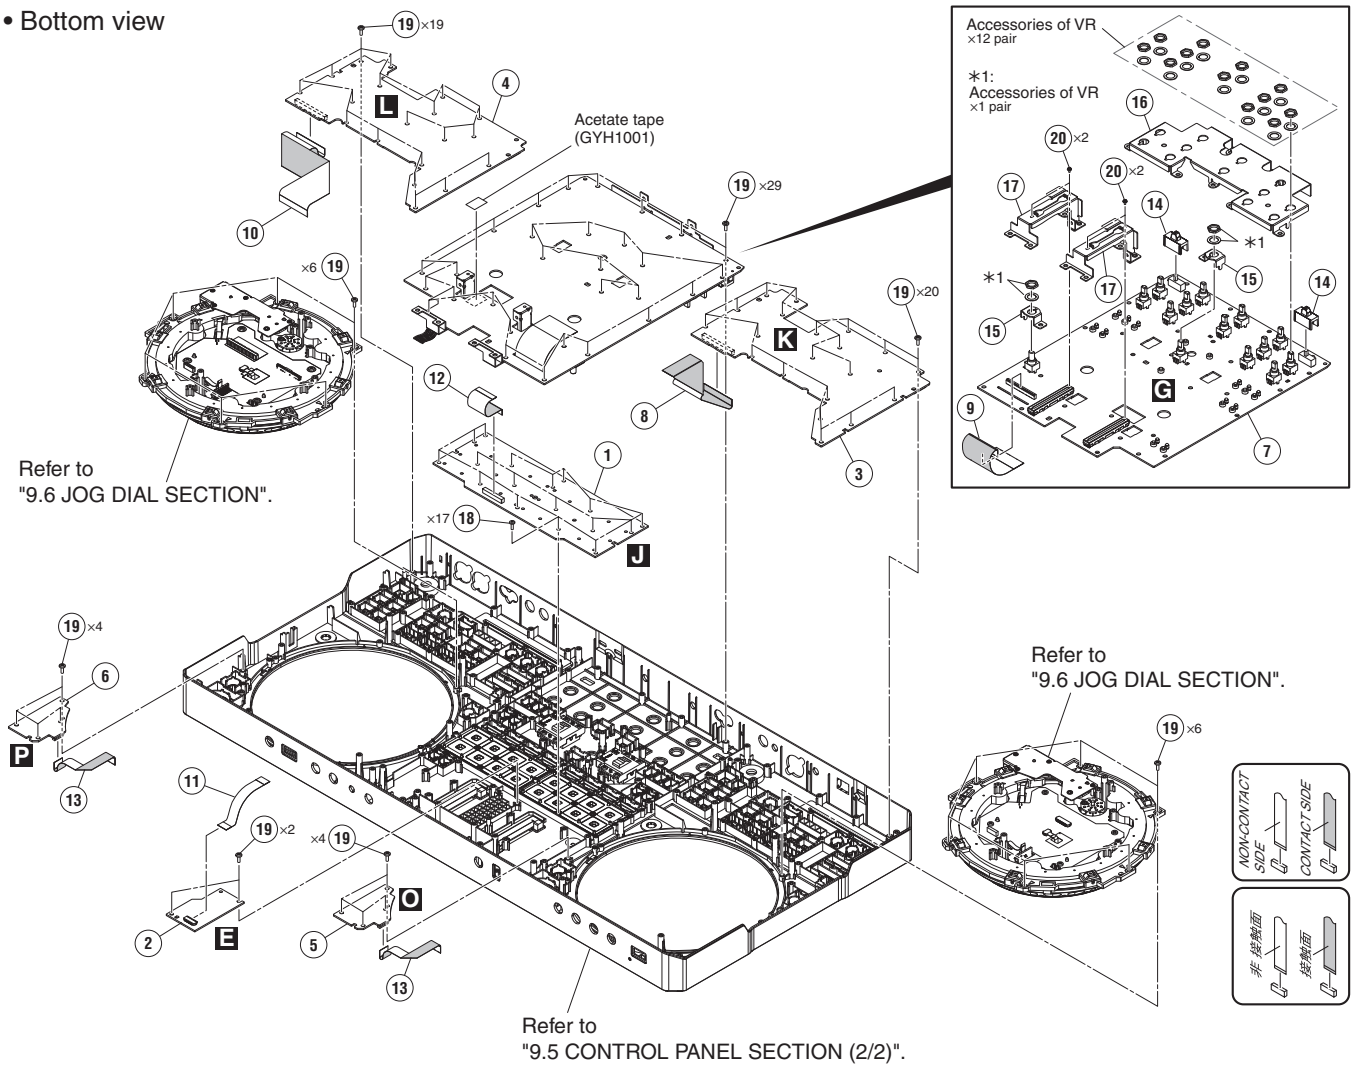

CONTROL PANEL SECTION (1/2) PARTS LIST

Mark	No.	Description	Part No.
	1	PADB Assy	DWX4872
	2	LVLM Assy	DWX4873
	3	DCK1 Assy	DWX4886
	4	DCK2 Assy	DWX4887
	5	PLY1 Assy	DWX4888
	6	PLY2 Assy	DWX4889
	7	MIXB Assy	DWX4891
	8	FFC	DDD2155
	9	FFC	DDD2156
	10	FFC	DDD2159
	11	FFC	DDD2160
	12	FFC	DDD2165
	13	FFC	DDD2163
	14	SW Cap	DAC2753
	15	Stay	DNF2039
	16	Stay	DNH3605
	17	Stay	DNH3606
	18	Screw	BPZ26P080FTC
	19	Screw	BPZ30P080FTC
	20	Screw	PMH20P040FTC

9.5 CONTROL PANEL SECTION (2/2)

• Bottom view

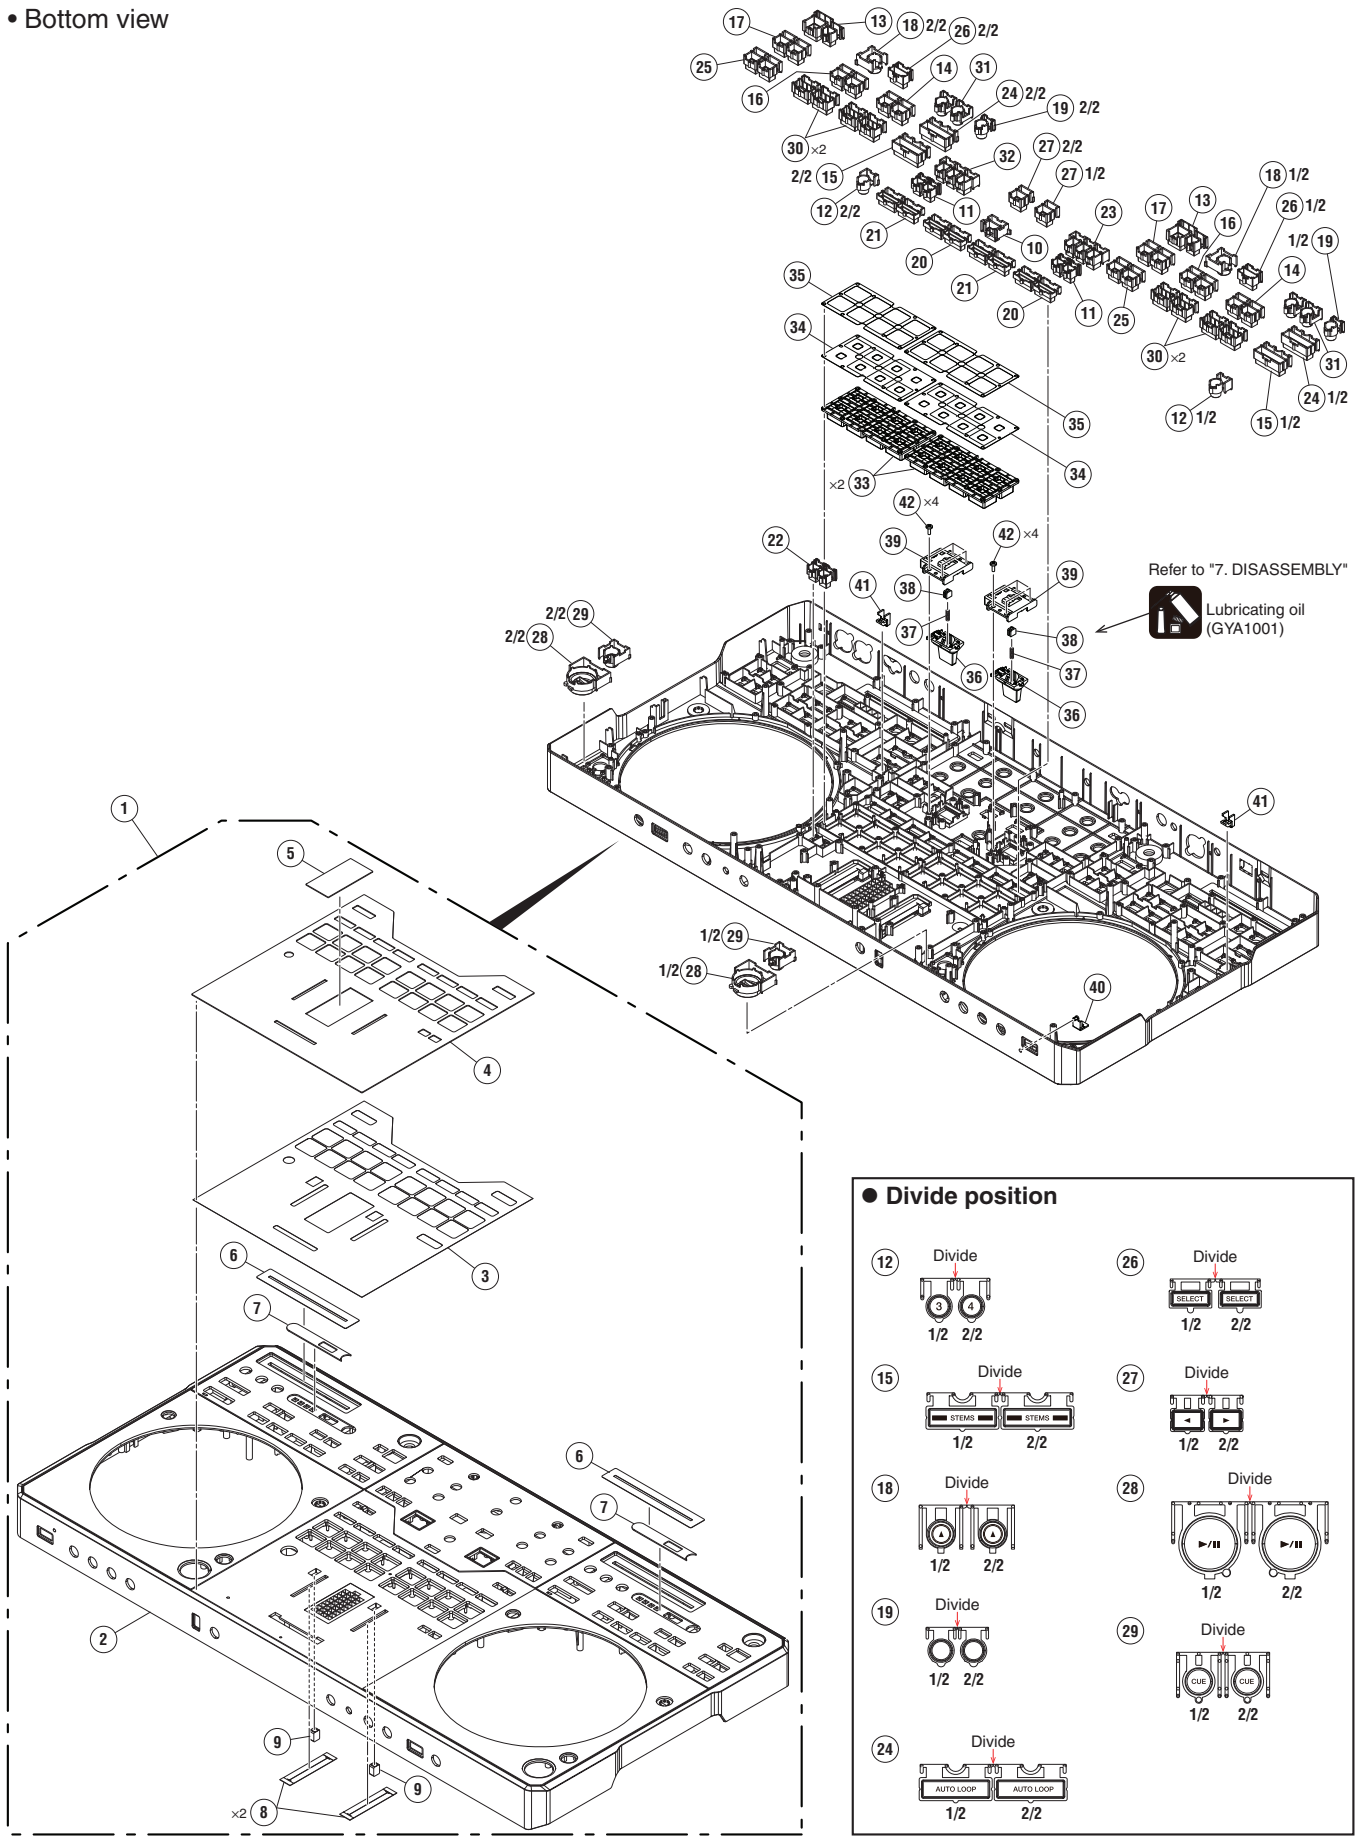

CONTROL PANEL SECTION (2/2) PARTS LIST

Mark	No.	Description	Part No.
	1	1..DDJ-REV5 Panel Service Assy	DEA1155
	2	2..Control Panel	DNK7147
	3	2..DS Tape	DEH1141
	4	2..Panel	DAH3435
	5	2..Plate	DAH3300
	6	2..Sheet	DAH3423
	7	2..Window	DAH3419
	8	2..Sheet	DEC3795
	9	2..Gasket	DEC4129
	10	Button	DAC3206
	11	Button	DAC3366
	12	Button	DAC3569
	13	Button	DAC3607
	14	Button	DAC3733
	15	Button	DAC3702
	16	Button	DAC3735
	17	Button	DAC3736
	18	Button	DAC3695
	19	Button	DAC3605
	20	Button	DAC3697
	21	Button	DAC3698
	22	Button	DAC3699
	23	Button	DAC3701
	24	Button	DAC3734
	25	Button	DAC3703
	26	Button	DAC3704
	27	Button	DAC3706
	28	Button	DAC3707
	29	Button	DAC3708
	30	Button	DAC3709
	31	Button	DAC3710
	32	Button	DAC3711
	33	Pad	DEB2098
	34	Sheet	DEC4103
	35	Spacer	DEC4105
	36	Lever	DAC3700
	37	Lever Spring	DBH1702
	38	Lever Cap	DNK5344
	39	Base	DNK7153
	40	Lens	DNK7029
	41	Lens	DNK7149
	42	Screw	BPZ30P080FTC

9.6 JOG DIAL SECTION

Refer to "7. DISASSEMBLY"

Lubricating oil



• Bottom view

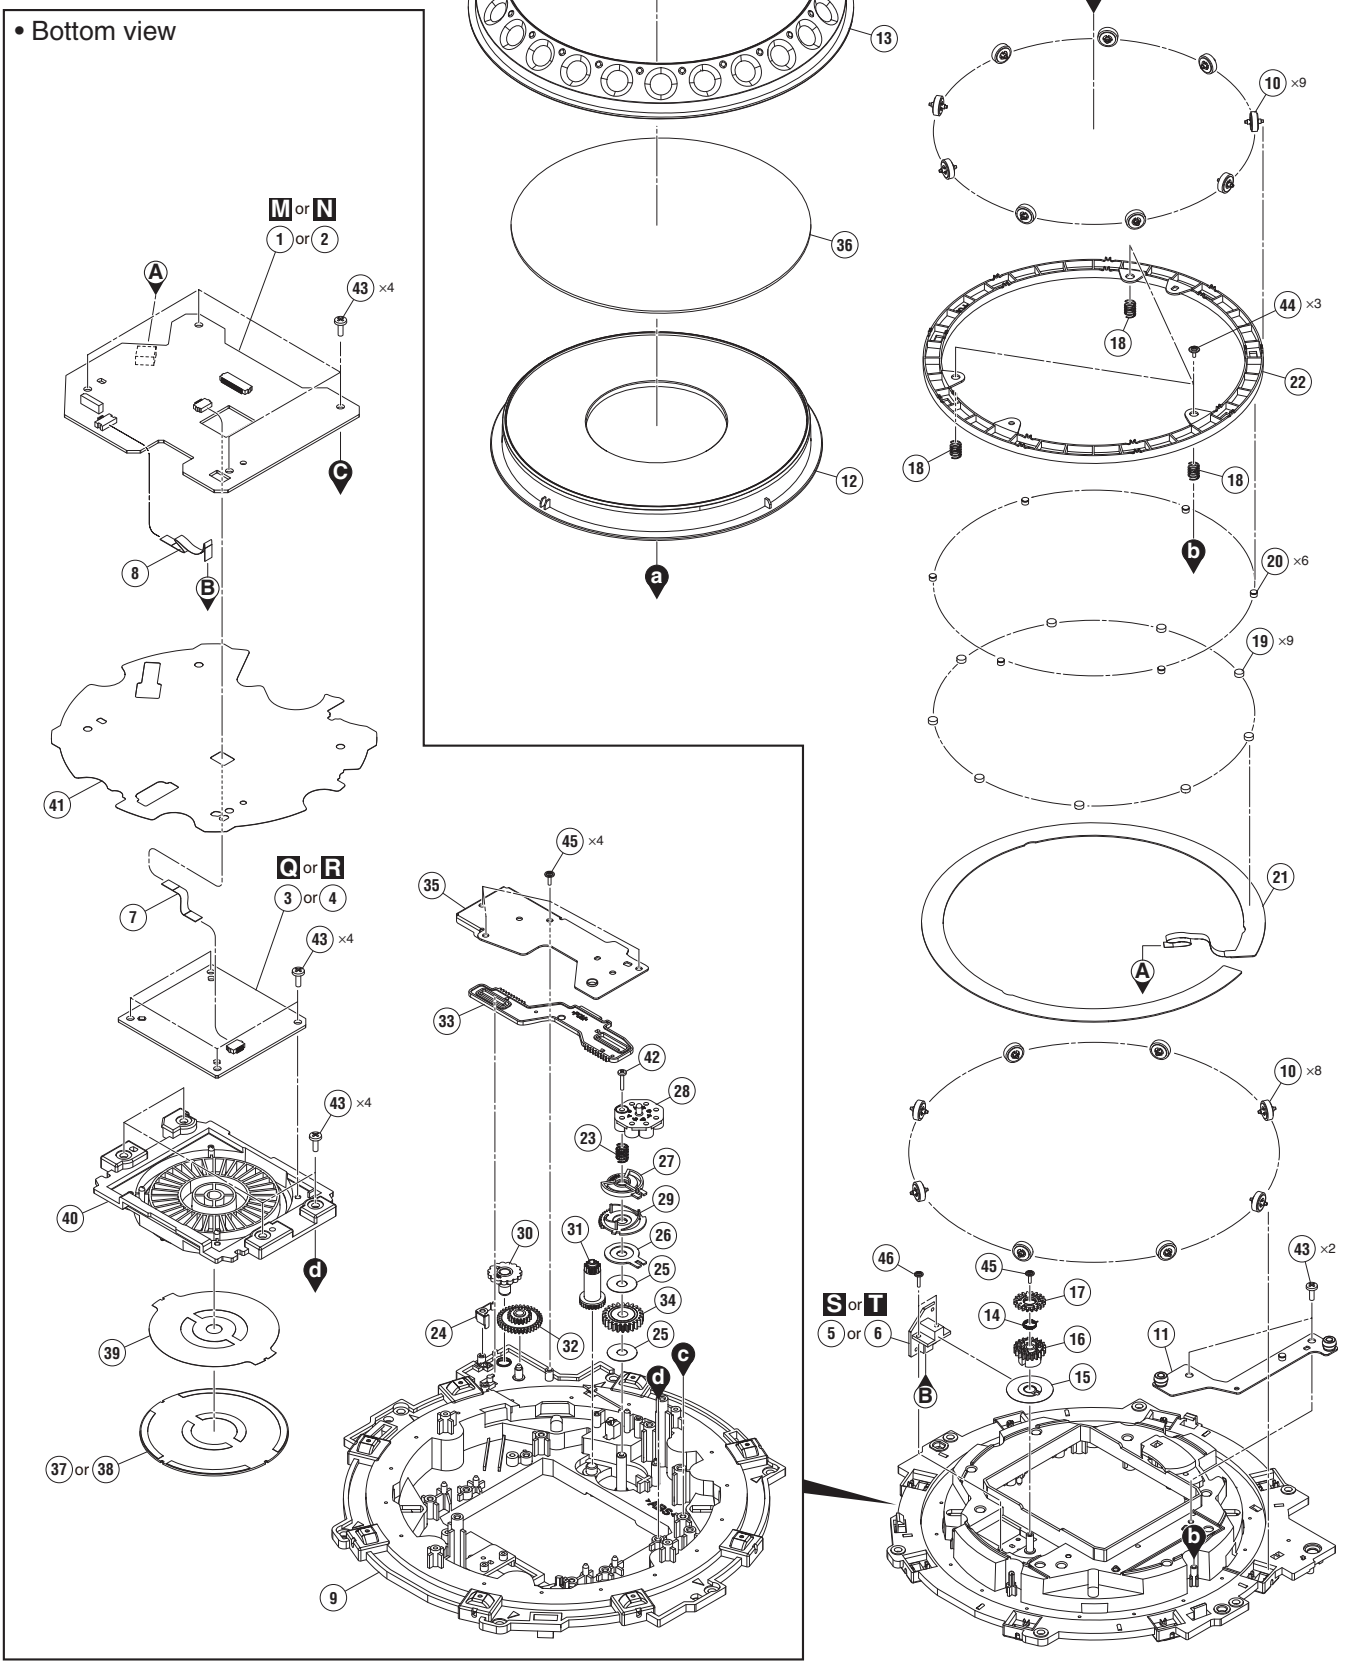

JOG DIAL SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	JGB1 Assy	DWX4874
	2	JGB2 Assy	DWX4875
	3	JLED1 Assy	DWX4876
	4	JLED2 Assy	DWX4877
	5	JOG1 Assy	DWX4884
	6	JOG2 Assy	DWX4885
	7	FFC	DDD2164
	8	FFC	DDD1843
	9	Holder	DNK6925
	10	Roller	DXB2178
	11	Stay Assy/Jog	DXB2133
	12	Jog Dial	DNK7150
	13	Jog Dial	DNK7151
	14	Encoder Spring	DBH1710
	15	Plate	DEC3700
	16	Gear/A	DNK6143
	17	Gear/B	DNK6144
	18	SW Spring	DBH1681
	19	SW Cushion Hh48/2	DEC2538
	20	Cushion	DEC4140
	21	Sheet SW	DSX1078
	22	SW Ring	DNK5233
	23	Coil Spring/LD	DBH1798
	24	Leaf Spring/ADJ	DBK1376
	25	Washer	DEC3137
	26	Smoother	DNK5237
	27	Comp Plate	DNK5243
	28	Adjust Plate	DNK5300
	29	Cam Plate	DNK5301
	30	Dial Gear	DNK5302
	31	Link Gear A	DNK5303
	32	Link Gear B	DNK5304
	33	Plate	DNK6748
	34	Gear/LD	DNK6145
	35	Plate	DNH3345
	36	Window	DAH3420
	37	Sheet (For Left Deck)	DEC4100
	38	Sheet (For Right Deck)	DEC4101
	39	Sheet	DEC4102
	40	Holder	DNK7152
	41	Barrier	DEC4108
	42	Screw	BPZ20P100FTC
	43	Screw	BPZ30P080FTC
	44	Screw (FE)	DBA1265
	45	Screw	IPZ20P060FTC
	46	Screw	IPZ20P080FTC

12. PCB PARTS LIST

NOTES: ● *Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.*
● *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
● *When ordering resistors, first convert resistance values into code form as shown in the following examples.*

Ex.1 When there are 2 effective digits (any digit apart from 0), such as 560 ohm and 47 k ohm (tolerance is shown by J = 5%, and K = 10%).

560 Ω	→	*56 × 10^1*	→	*561* ····· *RD1/4PU 5 6 1 J*
47 kΩ	→	*47 × 10^3*	→	*473* ····· *RD1/4PU 4 7 3 J*
0.5 Ω	→	*R50*		····· *RN2H R 5 0 K*
1 Ω	→	*1R0*		····· *RS1P 1 R 0 K*

Ex.2 When there are 3 effective digits (such as in high precision metal film resistors).

5.62 kΩ	→	*562 × 10^1*	→	*5621* ····· *RN1/4PC 5 6 2 1 F*

LIST OF ASSEMBLIES

Mark	No.	Description	Part No.
	1	MAIN ASSY	DWX4871
NSP	1	PDJG ASSY	DWM2867
	2	PADB ASSY	DWX4872
	2	LVLM ASSY	DWX4873
	2	JGB1 ASSY	DWX4874
	2	JGB2 ASSY	DWX4875
	2	JLED1 ASSY	DWX4876
	2	JLED2 ASSY	DWX4877
NSP	1	JACK ASSY	DWM2868
	2	AOUT ASSY	DWX4880
	2	DCMC ASSY	DWX4881
	2	FRT1 ASSY	DWX4882
	2	FRT2 ASSY	DWX4883
	2	JOG1 ASSY	DWX4884
	2	JOG2 ASSY	DWX4885
NSP	1	PNLD ASSY	DWM2869
	2	DCK1 ASSY	DWX4886
	2	DCK2 ASSY	DWX4887
	2	PLY1 ASSY	DWX4888
	2	PLY2 ASSY	DWX4889
	2	HPJK ASSY	DWX4890
	2	MIXB ASSY	DWX4891
	1	Cross Fader Service Assy	DEA1156
NSP	2	CRFD ASSY	DWX4892

A MAIN ASSY

SEMICONDUCTORS

Mark	No.	Description	Part No.
⚠	IC	401	BD9328EFJ
⚠	IC	402	BD00IC0WEFJ
⚠	IC	403,404	NJM2392M
⚠	IC	405,406	NJM2831F33
⚠	IC	407	NJM2831F05
⚠	IC	408	UA78M05IKVURG3
	IC	409	BD2226G
⚠	IC	701,702	BD9851EFV
⚠	IC	703	NJM78M15DL1A
⚠	IC	704	LM337KVUG3
	IC	1201,1202	S-80930CNMC-G80
NSP	IC	1203,1601	MIMXRT1062DVJ6B@V
	IC	1402	DYW2337*
	*Part number of the initial firmware equipped		
	IC	1802	DYW2338*
	*Part number of the initial firmware equipped		
	IC	2003-2006	TC7SH08FUS2
	IC	2007	TC74VHC08FK
	IC	2008	74VHC4051AFT
	IC	2201	NJM4565MD
	IC	2202,2203	PCM1803ADB
	IC	2401	PCM1789PWR@V
	IC	2402,2403,2602,2804	NE5532AD
	IC	2601,2802	PCM1753DBQ
	IC	2603,2604	NJM4580MD
	Q	103,1003,1401	RT3T22M
	Q	403	2SA1576A
	Q	404,1203	LTC024EEB
	Q	701	RSQ035P03
	Q	702,707,708,1205	RTQ040P02
	Q	703,704	RTQ045N03
	Q	705,706	LTC014EEB
	Q	1001,1004,1005,1008	LSAR523UB
	Q	1002	HN1C01FUS1
	Q	1006	RT3N22M
	Q	1007,1211,1605	MMBTSC1623YW
	Q	1009	HN1A01FUS1
	Q	1010,2806,2808	LSAR523UB
	Q	1011	LTC014YEB
	Q	1012,1601	KTX101U
	Q	1013,1014,2805,2807	LSCR523UB
	Q	1204,1602	MMBTSA1576QW
	Q	1209,1210,1606,1607	INC2002AC1
	Q	2201,2202,2803,2804	INC2002AC1
	Q	2203	LTA024EEB
	Q	2801,2802	2SK209
	Q	2809,2811	2SCR573D3
	Q	2810,2812	2SAR573D3
	D	401,402	RB551VM-30
	D	403,408,409,710	RB501VM-40
	D	701-703,705	LMBR140F
	D	706,707,1001-1005	1SS355L@V
	D	711	RB501VM-40
	D	1007	RB160M-30
	D	1008,1011-1014,1016	1SS355L@V
	D	1015	MMBD202CCW
	D	1202,2801-2804	1SS355L@V

Mark	No.	Description	Part No.
	D	1203-1205,1602-1604	EZAEG2N50A
	D	2201-2204	RB548W

MISCELLANEOUS

	L	101-103 SMD FERRITE BEADS	CTF1823
	L	108-110 SMD FERRITE BEADS	CTF1823
	L	401,403,405 POWER INDUCTOR (0.22 uH)	ATH7053
	L	402 SMD SPL INDUCTOR (33 uH)	DTH1231
	L	404,407 SMD FERRITE BEADS	CTF1823
	L	406 POWER INDUCTOR (0.22 uH)	ATH7053
	L	701-703,705 POWER INDUCTOR (22 uH)	ATH7011
	L	1201,1601 SMD FERRITE BEADS	CTF1823
	L	1202,1602 POWER INDUCTOR (4.7 uH)	ATH7047
	L	1205,1605 COIL	ATH7015
	L	1401-1404,1801,1803 INDUCTOR	CTF1778
NSP	JA	1201,1601 USB JACK	DKN1694
	JA	2201 RCA JACK	DKB1125
	X	1201,1601 CRYSTAL RESONATOR (24 MHz)	DSS1241
NSP	X	2001 OSCILLATOR (24.576 MHz)	DSS1236
	CN	101,104 FFC/FPC CONNECTOR	DKN1718
	CN	102 FFC/FPC CONNECTOR	CKS6643
	CN	103 FFC/FPC CONNECTOR	DKN1715
	CN	105 CONNECTOR	HWW-SL1520-J1@V
NSP	CN	106 CONNECTOR	CKS3854
	CN	107 CONNECTOR	HWW-SR0320-J1@V
	CN	108 FFC/FPC CONNECTOR	CKS6649
	CN	109 FFC/FPC CONNECTOR	CKS6645
	CN	110 FFC/FPC CONNECTOR	S100-SSA-25-T2@V
	CN	111 CONNECTOR	HWW-SR0720-J1@V
	CN	112 10P CONNECTOR	VKN1302
	CN	113 FFC/FPC CONNECTOR	CKS6646
		9001,9002 SUPPORT	DNH3537
	VA	2201-2203 VARISTORS	EZJZ1V270RM

RESISTORS

	R	101,103,106,108	RC0402JR-070RL@V
	R	109	RC0603JR-071K8L@V
	R	402-404	RC0805JR-071R5L@V
	R	406,424	RC0603JR-07270RL@V
	R	408,754,756,1213	RC0402JR-07100KL@V
	R	409	RC0603JR-0722RL@V
	R	410,2205,2206,2217	RC0402DR-0747KL@V
	R	411,427	RC0402DR-0715KL@V
	R	414	RC0402DR-0727KL@V
	R	415,1043,1044,1615	RC0402DR-0710KL@V
	R	416,1007,1015,1024	RC0402JR-0722KL@V
	R	419	RC0402DR-0718KL@V
	R	420	RC0402DR-073K3L@V
	R	421,423	RS1/8SQ2R0J
	R	428	RC0402DR-073KL@V
	R	429,723,724	RC0603JR-074K7L@V
	R	431,435,729,732	RC0402JR-0710KL@V
	R	437,1021,1022,1037	RC0402JR-0747KL@V
	R	439-441,443	RS1/4SA2R0J
	R	442,2011,2023,2024	RC0402JR-0722RL@V
	R	701,705,719,2609	RC0603DR-0715KL@V
	R	702,706,713,718	RC0603DR-0710KL@V
	R	703,707,730,733	RC0603DR-0730KL@V
	R	704,708,736,746	RC0603DR-0768KL@V
	R	709	RC0603DR-0751KL@V
	R	710	RC0603DR-07180KL@V
	R	711	RC0603DR-075K6L@V
	R	712	RC0603JR-0712KL@V
	R	721,722,728,734	RC0603JR-0710RL@V
	R	731,737	RC0603JR-071ML@V
	R	735,743	RC0603DR-076K2L@V
	R	740,747	RC0603DR-0710KL@V
	R	741	RC0603DR-07150KL@V
	R	744	RC0603DR-0720KL@V
	R	748	RC0603DR-0762KL@V
	R	749	RC0603DR-0712KL@V
	R	750	RC0603DR-073KL@V
	R	752,753,1001,1002	RC0402JR-0710KL@V
	R	755	RC0402JR-0756KL@V
	R	758,759	RC0603DR-07620RL@V
	R	760	RC0603DR-0775RL@V
	R	761	RC0603DR-07120RL@V
	R	1003,1010,1025,1030	RC0402JR-0712KL@V
	R	1004,1011,1014,1036	RC0402JR-0733KL@V
	R	1005	RC0402DR-0733KL@V
	R	1006	RC0402DR-076K8L@V
	R	1008,1009,1035	RC0402JR-0710KL@V
	R	1013,1217,1613	RC0402JR-071KL@V
	R	1018,1023,1422,1811	RC0402JR-073K3L@V
	R	1019,1027	RC0402JR-072K7L@V
	R	1020,1028	RC0402JR-07470RL@V
	R	1026	RC0402JR-072K2L@V
	R	1029,1050,1211,1233	RC0402JR-0722KL@V
	R	1031,1032,2407	RC0402JR-07220KL@V
	R	1033,1039,1042,1891	RC0402JR-070RL@V
	R	1034	RC0402JR-0716KL@V
	R	1038,1054,1229,1625	RC0402JR-0747KL@V
	R	1040,1041,1232,1628	RC0603JR-070RL@V
	R	1045-1047,1212,1215	RC0402JR-0710KL@V
	R	1048	RC0402JR-0782KL@V
	R	1051,1205,1207,1417	RC0402JR-07100RL@V
	R	1053	RC0402JR-0733KL@V
	R	1201,1203,1231,1435	RC0402JR-074K7L@V
	R	1206,1604	RC0402JR-072M2L@V
	R	1214,1610,2007,2019	RC0402JR-0710RL@V
	R	1216,1222,1224,1225	RC0402JR-0710KL@V
	R	1218,1614	RC0402JR-073K9L@V
	R	1226,1227,1622,1623	RC0402JR-075K1L@V
	R	1228,1230,1420,1449	RC0402JR-0710KL@V
	R	1401,1440,1820,1823	RAB4CQ101J
	R	1402-1405,1409-1411	RC0402JR-0722KL@V
	R	1407,1412-1414,1426	RC0402JR-0756RL@V
	R	1419,1423,1425,1438	RC0402JR-07100RL@V
	R	1427,1428,1430,1433	RAB4CQ560J
	R	1429,1836,1837,1858	RAB4CQ221J
	R	1431,1432,1436,1437	RC0402JR-07220RL@V
	R	1439,1447,1450,1453	RC0402JR-0722KL@V
	R	1442,1443,1452,1456	RC0402JR-07220RL@V
	R	1444-1446,1448,1451	RC0402JR-07100RL@V
	R	1454,1458,1460	RC0402JR-0756RL@V
	R	1455,1487-1489,1494	RC0402JR-0722KL@V
	R	1457,1461-1463,1533	RC0402JR-07220RL@V
	R	1459,1464,1468,1471	RC0402JR-07100RL@V
	R	1467,1818,2002,2219	RC0402JR-07100KL@V
	R	1473-1475,1481,1483	RC0402JR-07100RL@V

Mark	No.	Description	Part No.
R	1486,1565,1567,1602		RC0402JR-0710KL@V
R	1493,1518,1826,1873		RAB4CQ560J
R	1507,1531,1617,1631		RC0402JR-0722KL@V
R	1512-1514,1517,1522		RC0402JR-0756RL@V
R	1516,1530,2012,2013		RC0402JR-0782RL@V
R	1527,1537,1538,1541		RC0402JR-0756RL@V
R	1535,1536,1539,1540		RC0402JR-07220RL@V
R	1542,1546-1548,1551		RC0402JR-07220RL@V
R	1549,1554,1558-1560		RC0402JR-0756RL@V
R	1552,1555,1561,1563		RC0402JR-07220RL@V
R	1553		RAB4CQ223J
R	1564,1824,1825,1827		RC0402JR-0756RL@V
R	1570,1603,1607,1896		RC0402JR-07100RL@V
R	1609,1611,1612,1618		RC0402JR-0710KL@V
R	1616		RC0402DR-0710KL@V
R	1620,1621,1624,1626		RC0402JR-0710KL@V
R	1627,1832,1897,1931		RC0402JR-074K7L@V
R	1632,1801-1808,1831		RC0402JR-0722KL@V
R	1809,1868,1870,1872		RC0402JR-0710KL@V
R	1828,1835,1838,1839		RC0402JR-0756RL@V
R	1829,1830,1833,1834		RC0402JR-07220RL@V
R	1841,1845,1846		RC0402JR-07220RL@V
R	1842-1844,1847,1851		RC0402JR-0756RL@V
R	1848-1850,1852,1854		RC0402JR-07220RL@V
R	1853,1857,1859		RC0402JR-0756RL@V
R	1855,1904,2603		RC0402JR-07220RL@V
R	1856,1862-1866,1933		RC0402JR-0722KL@V
R	1880-1882,1893		RC0402JR-0756RL@V
R	1885		RAB4CQ560J
R	1888		RAB4CQ221J
R	1892,2003,2004,2009		RC0402JR-070RL@V
R	1901-1903,1910,1913		RC0402JR-0756RL@V
R	1916,1918,1919,1922		RC0402JR-0756RL@V
R	1923,1932,2215,2216		RC0402JR-0710KL@V
R	1928-1930,2854-2857		RC0402JR-0756RL@V
R	2008		RT0402DRD0710RL@V
R	2010,2014,2015,2406		RC0402JR-070RL@V
R	2016-2018		RC0402JR-0747RL@V
R	2020		RT0402DRD0722RL@V
R	2021,2022,2025,2026		RC0402JR-07100RL@V
R	2028		RC0402JR-0722RL@V
R	2201,2202,2405		RC0402JR-07100RL@V
R	2203,2204		RC0402JR-07120RL@V
R	2209-2212		RC0603DR-072K2L@V
R	2213,2214,2220,2221		RC0402DR-073K6L@V
R	2218		RC0402DR-0747KL@V
R	2222,2223		RC0402DR-07220RL@V
R	2224,2225,2836-2839		RC0402DR-071K8L@V
R	2226,2227,2232,2233		RC0603JR-070RL@V
R	2238,2240,2408,2604		RC0402JR-0710KL@V
R	2242,2243		RAB4CQ470J
R	2401-2403,2425,2434		RC0603JR-070RL@V
R	2409-2416		RC0603DR-074K7L@V
R	2417-2424		RT0603DRD0710KL@V
R	2426-2433,2816,2817		RC0603DR-073K3L@V
R	2435,2444,2601,2602		RC0603JR-070RL@V
R	2436-2443,2621-2624		RC0603DR-071K5L@V
R	2605,2606		RC0603JR-0747KL@V
R	2607,2608		RC0603DR-074K3L@V
R	2610		RC0603DR-0715KL@V
R	2611,2612		RC0603DR-072K7L@V
R	2613-2616,2625-2628		RC0603DR-0711KL@V
R	2617-2620,2629-2632		RC0603DR-0736KL@V
R	2633-2636		RC0603DR-071K5L@V
R	2804,2811,2812,2850		RC0402JR-070RL@V
R	2806,2807,2858		RC0603JR-070RL@V
R	2813		RC0402JR-0710KL@V
R	2818,2819		RC0603DR-0711KL@V
R	2820,2821		RC0603DR-072K4L@V
R	2822,2823		RC0402JR-071ML@V
R	2824,2825		RC0402JR-0718KL@V
R	2826,2827		RC0805JR-07100RL@V
R	2828-2831		RC0603JR-073K3L@V
R	2832-2835		RC0402DR-071KL@V
R	2840-2847		RC0805JR-0722RL@V
R	2851		RC0402JR-070RL@V
	Other Resistors		RS1/16SS###J

CAPACITORS

C	101,102,105,106		0402B102K500CT
C	103,104,107,109		0402B104K160CT
C	108,115,123,125		0402B102K500CT
C	110,113,117,124		0402B104K160CT
C	114,140,488,791		0402B103K250CT
C	116,401,405,415		0805X106K160CT
C	118,1243,1269,1272		0603X106K6R3CT
C	126,128,138		0402B104K160CT
C	129,130,440,441		0402N101J500CT
C	131,771,772,1262		0805X106K100CT
C	132,133,137,149		0402N102J500CT
C	134,135,152,153		0402B104K250CT
C	139,142,416,418		0402B103K160CT
C	144-147,151,157		0402B104K160CT
C	150,439,442,446		0402N102J500CT
C	156,173,176,177		0402B102K500CT
C	160,162,169,175		0402B104K160CT
C	178,180,406,407		0402B104K160CT
C	179,404,408,414		0402B102K500CT
C	403,2803 (47 uF/35 V)		DCH1385
C	409,410,412,419		0402B104K160CT
C	411,427		0402N121J500CT
C	417,433,434,715		0805X106K160CT
C	420,429,449,451		0402B103K160CT
C	422,423,430,465 (100 uF/16 V)		DCH1387
C	424,431,2212-2215		0402N221J500CT
C	425,2602,2616,2617		VGV476M6R3ANC01K
C	426,432,435,436		0402B104K160CT
C	437,444,472,475		0402B102K500CT
C	438,702		0603X334K160CT
C	443,469,490,787		0402N101J500CT
C	445,1219 (0.01 uF)		ACE7097
C	447,461,464,484		0402N102J500CT
C	448 (0.47 uF)		ACE7114
C	450		0603X475K100CT
C	453,460,462,474		0402B104K160CT
C	454,455,486,788 (1 uF)		ACE7129
C	456 (100 uF/16 V)		DCH1365
C	457		0603X225K100CT
C	463,492,1002,1005		0402B103K160CT

Mark	No.	Description	Part No.
	C	466,487,1287,1672 (1000 pF)	ACE7120
	C	473,476,1003 (470 uF/10 V)	DCH1394
	C	477,479,480,483	0402B104K160CT
A	C	478,481,482,491	0402B102K500CT
	C	485,786,790,1214 (0.1 uF)	ACE7100
	C	489,496,713,726	0402B104K160CT
	C	493 (0.047 uF)	DCE1027
	C	494,495,761-764	0402B102K500CT
	C	498	0402N331J500CT
	C	502,705,756,1012	0402B472K500CT
	C	701	0603X474K160CT
	C	704,720,722,731	0603B105K100CT
	C	709,738,749,1276	0402B103K500CT
	C	710,1813,1814	0402B332K500CT
B	C	712,714,723,730	0805X226M160CT
	C	716,721,728,2414	0805X106K160CT
	C	717	0402N681J500CT
	C	718,724,798,799	0603N102J500CT
	C	719,2618,2619	0402N561J500CT
	C	725,727,740,2808	0603X105K250CT
	C	729,741,759,2225	0402B104K250CT
	C	733	0603B105K100CT
	C	734,743,754,755	0805X106K250CT
	C	737,746	0402B682K500CT
C	C	739,750,783,784	0402N102J500CT
	C	744,753,779,780	VGV476M025ANE01K
	C	747	0603X475K160CT
	C	751,752,760,1001	0402B104K160CT
	C	757	0805B105K250CT
	C	758,767,768,1221	0402X105K100CT
	C	765,766	0402X105K250CT
	C	781	0805B334K500CT
	C	785,2240,2267,2402	DCH1381
	C	789,794,800-802	0402N102J500CT
	C	792,1266,1279	0402N101J500CT
D	C	793,2403,2420 (1 uF)	ACE7129
	C	795,797 (100 uF/35 V)	DCH1366
	C	796,1205,1212,1231	0402B103K250CT
	C	1004,2424,2846,2847 (220 uF/16 V)	DCH1391
	C	1008,1011,1217,1233	0402B103K160CT
	C	1201,1203,1204,1210	0402B104K160CT
	C	1202,1206,1209,1218	0603X475K6R3CT
	C	1207,1208,1226,1234	0402N102J500CT
	C	1211,1222,1259,1261	0402B104K160CT
	C	1213	0603B473K160CT
E	C	1215,1216,1251,1615	0805X226K6R3CT
	C	1224,1227,1245,1246	0603X475K6R3CT
	C	1225,1228,1230,1232	0402B224K160CT
	C	1229,1235,1614,1623	0402N8R0C500CT
	C	1236-1239,1241,1242	0402B224K160CT
	C	1240,1248,1271,1401	0402B103K160CT
	C	1244,1247,1252,1255	0402B224K160CT
	C	1249,1250,1257,1278	0402N102J500CT
	C	1256,1621,1625,1626	0402B224K160CT
	C	1258,1603,1605,1609	0603X475K6R3CT
	C	1260,1268,1277	0402B102K500CT
F	C	1263,1618,1658,2031	0402X105K100CT
	C	1267,1270,1274,1430	0402B104K160CT
	C	1275,1664	0603X105K500CT
	C	1280-1282,1284-1286	0402N102J500CT

Mark	No.	Description	Part No.
	C	1288,1407,1432,1665	0402B103K500CT
	C	1404-1406,1408-1412	0402B102K500CT
	C	1414,1418-1429,1434	0402B102K500CT
	C	1415-1417,1433,1435	0402N101J500CT
	C	1436-1445,1653,1666	0402B102K500CT
	C	1604,1611,1629,1643	0402N102J500CT
	C	1606,1607,1612,1620	0402B104K160CT
	C	1608,1627,2221,2222	0402B103K250CT
	C	1610,1613,1645,1652	0402B103K160CT
	C	1616,1649	0805X226K6R3CT
	C	1617,1622,1624,1639	0603X475K6R3CT
	C	1628,1630-1638,1642	0402B224K160CT
	C	1640,1657	0603X475K6R3CT
	C	1641	0603X106K6R3CT
	C	1644,1651,1661,1667	0402N102J500CT
	C	1648,1650	0402B224K160CT
	C	1654,1655,1659,1663	0402B104K160CT
	C	1656	0805X106K100CT
	C	1660,1801,1802	0402N101J500CT
	C	1668,2277,2404,2415 (0.1 uF)	ACE7100
	C	1669,2003,2009-2012	0402B103K160CT
	C	1670,2008,2014-2017	0402N102J500CT
	C	1671,2001 (100 uF/16 V)	DCH1387
	C	1673	0603B103K500CT
	C	1676,2454,2455 (0.01 uF)	ACE7113
	C	1803,1804,1806-1812	0402B102K500CT
	C	1805,1819	0402B103K500CT
	C	1815-1818,1820,1821	0402B102K500CT
	C	1822,1824,2002	0402B104K160CT
	C	1823,1825-1827,1829	0402B102K500CT
	C	1830-1833,2013,2025	0402N101J500CT
	C	1834,1835	0402B102K500CT
	C	2004-2007,2018,2019	0402B104K160CT
	C	2020,2029,2246,2249	0402B103K160CT
	C	2021,2022,2027,2040	0402N102J500CT
	C	2023,2024,2026,2028	0402N471J500CT
	C	2030,2033,2247,2248	0402B104K160CT
	C	2032,2034-2036,2229	0402N471J500CT
	C	2201	0603N102J500CT
	C	2202	0603B104K500CT
	C	2223,2228	VGV476M025ANE01K
	C	2227,2604,2811,2835	0402B104K250CT
	C	2230,2235,2236	0402N471J500CT
	C	2231,2232,2237,2238	VGV106M016ANB01K
	C	2239,2254,2256,2258	0402N102J500CT
	C	2241,2243,2244,2252	VGV106M016ANB01K
	C	2242	0603B105K160CT
	C	2250,2251,2255,2257	0402B104K160CT
	C	2253,2269	VGV106M016ANB01K
	C	2259,2260,2263,2266	0402B103K160CT
	C	2261,2264,2413,2615	0402B104K160CT
	C	2262,2271-2275,2278	0402N102J500CT
	C	2265,2268	0402X105K100CT
	C	2270,2406,2419,2442	0402N101J500CT
	C	2401 (10 uF/25 V)	DCH1368
	C	2405,2407,2422,2636	0402B103K160CT
	C	2408-2410,2453,2606	0402N102J500CT
	C	2411,2450	0402N100J500CT
	C	2421	0402X105K160CT

Mark	No.	Description	Part No.
	C	2423 (10 uF/25 V)	DCH1381
	C	2426 (0.1 uF)	ACE7100
	C	2427-2430	0603N221J500CT
	C	2433-2440	0603N101J500CT
	C	2441,2444 (220 uF/25 V)	DCH1369
	C	2443,2447,2448,2451	0402N101J500CT
	C	2449 (3.3 uF)	DCE1029
	C	2601,2603,2627-2630	0402N330J500CT
	C	2605,2622,2623,2626	0603B104K250CT
	C	2607,2610,2635,2801	0402N102J500CT
	C	2614,2821	0805X106K160CT
	C	2620,2621	0402N820J500CT
	C	2631,2632	0603B104K250CT
	C	2633,2634,2831,2832	0402N330J500CT
	C	2804,2833,2834,2848	0402N101J500CT
	C	2805,2813,2814,2819	0402N102J500CT
	C	2807,2809,2812	0402B103K160CT
	C	2810,2822,2829,2830	0402B104K160CT
	C	2820	0402N102J500CT
	C	2823,2824	VGV476M6R3ANC01K
	C	2825,2826	0402N391J500CT
	C	2827,2828	0402N680J500CT
	C	2836	0402B104K250CT
	C	2837-2840	0402B104K160CT
	C	2849	0402N101J500CT
	C	2850,2851	0402B103K250CT
	C	2862 (1000pF)	ACE7120

JACK ASSY
Consists of
AOUT ASSY
DCMC ASSY
FRT1 ASSY
FRT2 ASSY
JOG1 ASSY
JOG2 ASSY

B C H I S T

JACK ASSY

SEMICONDUCTORS

	IC	5001	NE5532AD
	IC	5002,5003	NJM4580DD
	IC	5201,5202	NJM4580MD
	Q	5001,5002,5005-5008	INC2002AC1
	Q	5013-5020	INC2002AC1
	Q	5201	RT3N22M
	Q	5202	LTC024EEB
	Q	5203	PJS6403
	Q	5205,5207	RSQ035P03
	Q	5209,5210,5504	MMBTSC1623YW
	Q	5211,5212,5217,5218	SIL04P06Y
	Q	5213-5216	2SK209
	Q	5501,5502,5601	MMDT5212W
	Q	5503	ISA1602AM1
	D	5201,5212,5213	UDZV27
	D	5206-5208,5210,5501	1SS355L@V
	D	5502,5601	1SS355L@V
	D	5503	LTL17KRN8D@V

Mark	No.	Description	Part No.

MISCELLANEOUS

	JA	5001,5002 CANON CONNECTOR	DKB1093
	JA	5003 RCA JACK	DKB1125
	JA	5004,5005,5203 6.5 DIA JACK	DKN1669
NSP	JA	5201 USB JACK	DKN1694
	JA	5202 XLR SOCKET	DKB1124
	S	5201 PUSH SW	ASG1102
	S	5501,5601 SLIDE SWITCH	DSH1058
	S	5502 SLIDE SWITCH	DSH1066
	CN	5001 25P CONNECTOR	VKN1256
	CN	5201 CONNECTOR	HWW-L1520-J1@V
NSP	CN	5202 CONNECTOR	CKS3854
	CN	5501 16P CONNECTOR	VKN1276
	CN	5601 10P CONNECTOR	VKN1853
	CN	5701,5801 4P CONNECTOR	VKN1264
		9801 MIC SHIELD	DNF1849
		9802 SHIELD CASE	DNF2088
		9803-9805 PHONE SHIELD	DNF1875
		9806 CANON SHIELD	DNF1789
		9807 SUPPORT	DNH3537
⚠	P	5201 PROTECTO (3.000 A)	DEK1103
	PC	5701,5801 PHOTO INTERRUPTER	KE-2N18-15
	VA	5001-5013,5015 VARISTORS	EZJZ1V270RM
	VA	5203-5208 VARISTORS	EZJZ1V270RM

RESISTORS

	R	5006-5009	RC0603DR-073K6L@V
	R	5010-5017	RT0603DRD075K6L@V
	R	5018-5021	RC0603DR-072K7L@V
	R	5022-5029	RT0603DRD076K8L@V
	R	5030,5031,5094,5095	RC0603DR-071K5L@V
	R	5032-5035 (0.75 ohm)	DCN1200
	R	5036,5037,5050-5053	RC0603JR-076K8L@V
	R	5038-5041	RC0603DR-072K2L@V
	R	5042-5045,5054,5055	RC0603JR-07100KL@V
	R	5056,5059,5060	RC0603JR-0733RL@V
	R	5063-5067,5080,5083	RC0603JR-0733RL@V
	R	5068-5071	RC0603DR-0722KL@V
	R	5072-5075,5507	RC0603JR-0747KL@V
	R	5076-5079,5081,5082	RC0603JR-074K7L@V
	R	5084,5087-5091	RC0603JR-0733RL@V
	R	5085,5086,5502	RC0603JR-074K7L@V
	R	5201,5203	RC0402JR-075K1L@V
	R	5202,5701,5702,5801	RC0603JR-07100RL@V
	R	5204,5206,5208,5216	RC0402JR-0747KL@V
	R	5205,5207,5209,5218	RC0402JR-070RL@V
	R	5210-5212,5215,5219	RC0402JR-07100KL@V
	R	5213	RC0402JR-0715KL@V
	R	5214	RC0402JR-0710KL@V
	R	5217	RC0402JR-0747KL@V
	R	5220-5223	RT0603DRD07100RL@V
	R	5224,5225,5228,5229	RT0603DRD07220RL@V
	R	5226,5227,5233,5247	RT0603DRD073K3L@V
	R	5230-5232,5246	RC0603DR-073K3L@V
	R	5234,5237,5239,5241	RT0603DRD071K5L@V
	R	5235,5238,5243,5245	RT0603DRD074K7L@V
	R	5236,5240	RC0603DR-07820RL@V
	R	5242,5244	RC0402JR-07150RL@V
	R	5250,5251	RC0603JR-070RL@V
	R	5252,5253	RC0603DR-071K5L@V

Mark	No.	Description	Part No.
	R	5254,5255	RC0603DR-078K2L@V
	R	5258-5260	RC0402JR-0722KL@V
	R	5501	RC0603JR-0715KL@V
	R	5503	RC0603JR-0722KL@V
	R	5504	RC0603JR-071KL@V
	R	5506	RC0603JR-072K2L@V
	R	5509,5510,5601,5602	RC0603JR-07220KL@V
	R	5703,5803	RC0603JR-0782RL@V
	R	5802	RC0603JR-07100RL@V
	VR	5201,5202 POTENTIOMETER	DCS1111
	VR	5501,5502,5505,5601 ROTARY VR	DCS1121
	VR	5503,5504 VARIABLE RESISTOR	ACS7026
	VR	5602 VARIABLE RESISTOR	ACS7026
	VR	5603 ROTARY VR	DCS1121

CAPACITORS

	C	5003,5004,5033,5034	0603N101J500CT
	C	5005,5006,5232,5233	0603N102J500CT
	C	5007,5008,5069,5071	0603B103K500CT
	C	5010,5011,5241,5243 (0.1 uF)	ACE7100
	C	5017,5018,5247,5317 (1 uF)	ACE7129
	C	5035,5037,5042,5046	0402B103K250CT
	C	5038,5054 (100 uF/25 V)	DCH1357
	C	5039-5041,5043,5044	0603N101J500CT
	C	5047,5048,5050,5290	0603N101J500CT
	C	5049,5052,5291,5293	0402B103K250CT
	C	5057,5058,5075-5078	VGV107M016ANE01K
	C	5059-5062 (220 uF/25 V)	DCH1358
	C	5063-5068,5079-5082 (1000 pF)	ACE7099
	C	5073,5083,5209	0603B103K500CT
	C	5203,5212,5244,5264	0402B103K500CT
	C	5205,5211,5234,5253	0402N102J500CT
	C	5207,5216,5238,5239	CC0402KRX7R9BB104
	C	5210,5229-5231,5242	0402N101J500CT
	C	5213-5215,5267,5702	0603B103K500CT
	C	5217 (1000 pF)	ACE7120
	C	5218,5240,5260,5342 (0.01 uF)	ACE7113
	C	5219-5221,5249	0603B474K250CT
	C	5222 (0.33 uF)	ACE7128
	C	5235,5236	0603B103K160CT
	C	5237,5323	0402B103K160CT
	C	5245 (100 uF)	CCH1565
	C	5246 (100 uF/16 V)	DCH1387
	C	5248 (470 uF/10 V)	DCH1361
	C	5251,5263,5311,5312	0402N101J500CT
	C	5252	0402N100J500CT
	C	5254,5322,5341	0402N102J500CT
	C	5256 (100 uF/16 V)	DCH1365
	C	5261,5262,5343 (0.1 uF)	ACE7100
	C	5266,5270,5277-5284	0603N102J500CT
	C	5269,5271	0603B104K500CT
	C	5285,5287,5309,5310	0402N471J500CT
	C	5286,5295	0402N821J500CT
	C	5288,5296	0603N821J500CT
	C	5292,5294	0402N331J500CT
	C	5297,5298,5313,5314	0603B104K250CT
	C	5299,5306	VRV106M016ANC01K
	C	5307,5308	VGV476M025ANE01K
	C	5315,5316	0603N102J500CT
	C	5320,5321,5347	0402N101J500CT
	C	5501-5505,5601-5603	0603B104K250CT
	C	5506,5508,5605	0402B102K500CT
	C	5507,5509,5604	0402B104K160CT
	C	5701,5801	0603X105K100CT
	C	5703,5802,5803	0603B103K500CT

PNLD ASSY
Consists of
DCK1 ASSY
DCK2 ASSY
PLY1 ASSY
HPJK ASSY

D K L O P

PNLD ASSY

SEMICONDUCTORS

	Q	6001,6003,6005,6007	MMDT5212W
	Q	6002,6004,6006,6008	ISA1602AM1
	Q	6009,6011,6013,6015	MMDT5212W
	Q	6010,6012,6014,6016	ISA1602AM1
	Q	6017-6022,6217-6222	MMBTSC1623YW
	Q	6023-6028,6201,6203	MMDT5212W
	Q	6202,6204,6206,6208	ISA1602AM1
	Q	6205,6207,6209,6211	MMDT5212W
	Q	6210,6212,6214,6216	ISA1602AM1
	Q	6213,6215,6223-6228	MMDT5212W
	Q	6601,6602	INC2002AC1
	D	6001,6003,6007,6013	LTL17KRN8D@V
	D	6002,6010,6012,6014	LTL17KYRN5D-P@V
	D	6004,6006,6009,6016	1SS355L@V
	D	6005,6008,6011,6017	LTL17KTBP5D@V
	D	6015,6019,6028,6030	LTL17KRN8D@V
	D	6018,6021,6025,6027	1SS355L@V
	D	6020,6022,6026,6029	LTL17KTBP5D@V
	D	6023,6202,6210,6212	LTL17KYRN5D-P@V
	D	6024,6225	LTW-1GHCW4-P(A)@V
	D	6031,6036,6037,6042	LTL17KRN8D@V
	D	6032,6034,6039-6041	LTL17KTBP5D@V
	D	6033,6035,6038	1SS355L@V
	D	6043-6063,6204,6206	1SS355L@V
	D	6201,6203,6207,6213	LTL17KRN8D@V
	D	6205,6208,6211,6217	LTL17KTBP5D@V
	D	6209,6216,6218,6221	1SS355L@V
	D	6214,6224,6403,6503	LTL17KYRN5D-P@V
	D	6215,6219,6223,6229	LTL17KRN8D@V
	D	6220,6222,6227,6230	LTL17KTBP5D@V
	D	6226,6228,6234,6236	1SS355L@V
	D	6231,6232,6237,6238	LTL17KRN8D@V
	D	6233,6235,6240-6242	LTL17KTBP5D@V
	D	6239,6243-6264,6402	1SS355L@V
	D	6401,6501	LTL17KTGP4J-P@V
	D	6404,6502,6504	1SS355L@V
	D	6601-6604	DF2B18FU

MISCELLANEOUS

	L	6001,6201 SMD FERRITE BEADS	CTF1823
	JA	6601 STEREO MINI JACK	XKN3017
	JA	6602 6.5 DIA JACK	DKN1669
	KN	6601 SCREW PLATE	VNE1948

Mark	No.	Description	Part No.
	S	6001-6004,6006-6010 TACT SWITCH	DSG1079
	S	6005,6011,6016 TACTILE SWITCH	DSG1157
	S	6012-6015,6017-6021 TACT SWITCH	DSG1079
	S	6022,6204,6210 TACTILE SWITCH	DSG1157
	S	6023,6223 ROTARY ENCODER	DSX1133
	S	6201-6203,6205-6209 TACT SWITCH	DSG1079
	S	6211-6215,6217-6221 TACT SWITCH	DSG1079
	S	6216,6222,6401 TACTILE SWITCH	DSG1157
	S	6402,6501,6502 TACTILE SWITCH	DSG1157
	CN	6001,6201 FFC/FPC CONNECTOR	DKN1709
	CN	6401,6501 10P CONNECTOR	VKN1241
	CN	6601 CONNECTOR	HWW-R0720-J1@V
	VA	6002,6003,6202,6203 VARISTORS	EZJZ1V270RM
	VA	6601,6602 VARISTORS	EZJZ1V270RM

RESISTORS

	R	6001,6025,6045,6062	RC0603JR-0712KL@V
	R	6002,6017,6026,6041	RC0603JR-0722KL@V
	R	6003,6018,6027,6042	RC0603JR-074K7L@V
	R	6004,6028,6065,6067	RC0603JR-07820RL@V
	R	6005,6019,6023,6205	RC0603JR-07470RL@V
	R	6006,6030,6070,6206	RC0603JR-07680RL@V
	R	6007,6020,6031,6043	RC0603JR-071K2L@V
	R	6008,6032,6051,6069	RC0603JR-07750RL@V
	R	6009,6033,6209,6233	RC0603JR-07560RL@V
	R	6016,6216	RC0603JR-071K3L@V
	R	6029,6048,6229,6249	RC0603JR-07330RL@V
	R	6040,6240	RC0603JR-072K7L@V
	R	6046,6058,6063,6078	RC0603JR-0722KL@V
	R	6047,6056,6059,6064	RC0603JR-074K7L@V
	R	6049,6250	RC0603JR-071K5L@V
	R	6050,6060,6066,6068	RC0603JR-071K2L@V
	R	6077,6079,6203,6218	RC0603JR-074K7L@V
	R	6080,6085,6204,6228	RC0603JR-07820RL@V
	R	6081,6207,6220,6231	RC0603JR-071K2L@V
	R	6084,6088-6092,6101	RC0603JR-072K2L@V
	R	6086,6093-6097,6288	RC0603JR-0747KL@V
	R	6098,6300,6607,6608	RC0603JR-070RL@V
	R	6099,6100,6301,6302	RC0603JR-07100RL@V
	R	6102,6286,6290-6294	RC0603JR-072K2L@V
	R	6201,6225,6245,6264	RC0603JR-0712KL@V
	R	6202,6217,6226,6241	RC0603JR-0722KL@V
	R	6208,6232,6252,6271	RC0603JR-07750RL@V
	R	6219,6223	RC0603JR-07470RL@V
	R	6227,6242,6247,6261	RC0603JR-074K7L@V
	R	6230,6272	RC0603JR-07680RL@V
	R	6243,6251,6262,6268	RC0603JR-071K2L@V
	R	6246,6260,6265,6280	RC0603JR-0722KL@V
	R	6248,6267,6269,6282	RC0603JR-07820RL@V
	R	6258	RC0603JR-073K3L@V
	R	6266,6279,6281,6603	RC0603JR-074K7L@V
	R	6270,6283	RC0603JR-071K2L@V
	R	6287	RC0603JR-07820RL@V
	R	6295-6299	RC0603JR-0747KL@V
	R	6303,6304	RC0603JR-072K2L@V
	R	6601,6602	RC0805JR-071R5L@V
	R	6604	RC0603JR-074K7L@V
	R	6605,6606	RC0603JR-071KL@V
	VR	6001,6201 SLIDE VR	DCV1033

Mark	No.	Description	Part No.

CAPACITORS

	C	6001,6004,6007,6201	0603B102K500CT
	C	6002,6006,6202,6206	KS7107M016A5E07K
	C	6003,6005,6008,6010	0603B104K250CT
	C	6009,6209	KS7476M6R3A5B07K
	C	6011-6013,6211-6213	0603B103K500CT
	C	6203,6205,6208,6210	0603B104K250CT
	C	6204,6207	0603B102K500CT
	C	6601,6602	KRN477M6R3A5H1CK
	C	6603-6606	0603B223K500CT
	C	6607,6609	0603B103K500CT

PDJG ASSY
Consists of
PADB ASSY
LVLM ASSY
JGB1 ASSY
JGB2 ASSY
JLED1 ASSY
JLED2 ASSY

E J M N Q R

PDJG ASSY

SEMICONDUCTORS

	IC	3001,3002	BU4551BF
	IC	3801,4001	74VHCT126AFT
	IC	4201-4205,4301-4305	74VHC595FT
	Q	3201,3203,3205,3207	MMDT5212W
	Q	3202,3204,3206,3208	2SB1689
	Q	3210-3217,3409-3416	MMDT521MW
	Q	3218,3401,3403,3405	MMDT5212W
	Q	3402,3404,3406,3408	2SB1689
	Q	3407,3417,3701,3703	MMDT5212W
	Q	3702,3704,3706,3708	2SAR502UB
	Q	3705,3707,3801,3803	MMDT5212W
	Q	3709-3718,3805,4005	MMBTSC1623YW
	Q	3802,3804,4002,4004	ISA1602AM1
	Q	4001,4003	MMDT5212W
	Q	4201,4202,4301,4302	MMBTSC1623YW
	D	3201,3205,3213,3217	DEL1077
	D	3202,3204,3206-3209	1SS355L@V
	D	3203,3215,3225,3237	FC-F1608BAK5
	D	3210,3222,3233,3243	FC-1608SXK630D08
	D	3211,3212,3214,3216	1SS355L@V
	D	3218-3221,3223,3224	1SS355L@V
	D	3226,3228,3230-3232	1SS355L@V
	D	3227,3229,3239,3241	DEL1077
	D	3234-3236,3238,3240	1SS355L@V
	D	3242,3244-3252,3402	1SS355L@V
	D	3401,3405,3413,3417	DEL1077
	D	3403,3415,3425,3437	FC-F1608BAK5
	D	3404,3406-3409,3411	1SS355L@V
	D	3410,3422,3433,3443	FC-1608SXK630D08
	D	3412,3414,3416	1SS355L@V
	D	3418-3421,3423,3424	1SS355L@V
	D	3426,3428,3430-3432	1SS355L@V
	D	3427,3429,3439,3441	DEL1077
	D	3434-3436,3438,3440	1SS355L@V
	D	3442,3444-3452	1SS355L@V

Mark	No.	Description	Part No.
	D	3701,3710,3719,3728	FC-1608SXK630D08
	D	3702-3705,3711-3714	FC-1608YXK585F08
	D	3706-3709,3715-3718	SML-D12M8W(NP)
	D	3720-3723,3730-3733	FC-1608YXK585F08
	D	3724-3727,3734-3737	SML-D12M8W(NP)
	D	3729,4201-4237	FC-1608SXK630D08
	D	4238,4338	NHSW146A-A21460
	D	4301-4336,4339	FC-1608SXK630D08

MISCELLANEOUS

	L	3001,3801 SMD FERRITE BEADS	CTF1823
	L	3802,4001 SMD FERRITE BEADS	CTF1823
	L	3803-3806,4003-4006 INDUCTOR	CTF1778
	L	4002 SMD FERRITE BEADS	CTF1823
	L	4201,4301 CHIP SOLID INDUCTOR	XTL3010
	S	3201-3204,3401-3404 PUSH SWITCH	CSG1155
	CN	3001 FFC/FPC CONNECTOR	DKP3953
	CN	3701 FFC/FPC CONNECTOR	CKS6649
	CN	3801 FFC/FPC CONNECTOR	CKS6643
	CN	3802,4002 FFC/FPC CONNECTOR	CKS6625
	CN	3803,4003 CONNECTOR	CKS1072
	CN	3804,4004 FFC/FPC CONNECTOR	CKS6635
	CN	3805,4005 CONNECTOR	CKS3851
	CN	4001 FFC/FPC CONNECTOR	CKS6543
	CN	4006 FFC/FPC CONNECTOR	S100-SSA-40-T2@V
	CN	4201,4301 FFC/FPC CONNECTOR	CKS6635

RESISTORS

	R	3201,3202,3204-3206	RC0603JR-07750RL@V
	R	3203,3207,3224,3228	RC0603JR-07270RL@V
	R	3208,3222,3223	RC0603JR-07750RL@V
	R	3209,3211-3213,3230	RC0603JR-071K5L@V
	R	3210,3232,3253,3272	RC0402JR-071KL@V
	R	3214,3237,3256,3276	RC0402JR-0710KL@V
	R	3215,3238,3257,3277	RC0402JR-0756KL@V
	R	3216,3219,3236,3240	RC0603JR-07560RL@V
	R	3217,3218,3220,3221	RC0603JR-071K8L@V
	R	3225-3227,3229,3243	RC0603JR-07750RL@V
	R	3231,3233,3234,3251	RC0603JR-071K5L@V
	R	3235,3239,3241,3242	RC0603JR-071K8L@V
	R	3244,3246,3247,3249	RC0603JR-07750RL@V
	R	3245,3248,3264,3269	RC0603JR-07270RL@V
	R	3250,3265-3268,3270	RC0603JR-07750RL@V
	R	3252,3254,3255	RC0603JR-071K5L@V
	R	3258,3261,3278,3281	RC0603JR-07560RL@V
	R	3259,3260,3262,3263	RC0603JR-071K8L@V
	R	3271,3401,3402	RC0603JR-07750RL@V
	R	3273-3275,3279,3409	RC0603JR-071K5L@V
	R	3280,3282-3284,3417	RC0603JR-071K8L@V
	R	3285-3292,3485-3492	RC0402JR-073K3L@V
	R	3403,3407,3424,3428	RC0603JR-07270RL@V
	R	3404-3406,3408,3422	RC0603JR-07750RL@V
	R	3410,3432,3453,3472	RC0402JR-071KL@V
	R	3411-3413,3430,3431	RC0603JR-071K5L@V
	R	3414,3437,3456,3476	RC0402JR-0710KL@V
	R	3415,3438,3457,3477	RC0402JR-0756KL@V
	R	3416,3419,3436,3440	RC0603JR-07560RL@V
	R	3418,3420,3421,3435	RC0603JR-071K8L@V
	R	3423,3425-3427,3429	RC0603JR-07750RL@V
	R	3433,3434,3451,3452	RC0603JR-071K5L@V
	R	3439,3441,3442,3459	RC0603JR-071K8L@V

Mark	No.	Description	Part No.
	R	3443,3444,3446,3447	RC0603JR-07750RL@V
	R	3445,3448,3464,3469	RC0603JR-07270RL@V
	R	3449,3450,3465-3468	RC0603JR-07750RL@V
	R	3454,3455,3473-3475	RC0603JR-071K5L@V
	R	3458,3461,3478,3481	RC0603JR-07560RL@V
	R	3460,3462,3463,3480	RC0603JR-071K8L@V
	R	3470,3471	RC0603JR-07750RL@V
	R	3479	RC0603JR-071K5L@V
	R	3482-3484	RC0603JR-071K8L@V
	R	3701,3704,3707,3710	RC0603JR-07470RL@V
	R	3702,3706,3709,3712	RC0402JR-0756KL@V
	R	3703,3705,3708,3711	RC0402JR-0710KL@V
	R	3713,3714	RC0603JR-07270RL@V
	R	3715-3718	RC0603JR-07390RL@V
	R	3719-3726	RC0603JR-07120RL@V
	R	3727-3736,4242,4243	RC0402JR-072K2L@V
	R	3737-3746,4247,4250	RC0402JR-0747KL@V
	R	3809-3812,3827-3830	RC0402JR-07100RL@V
	R	3813,3818,4013,4018	RC0603JR-075K6L@V
	R	3814,3819,4014,4019	RC0603JR-0722KL@V
	R	3815,3820,4015,4021	RC0603JR-074K7L@V
	R	3816,3817,4023,4024	RC0603JR-07560RL@V
	R	3821,4016	RC0603JR-07240RL@V
	R	3823,4020	RC0603JR-072K2L@V
	R	3824,4022	RC0603JR-0747KL@V
	R	4006,4007,4011,4012	RC0402JR-07100RL@V
	R	4025,4047-4049	RC0402JR-07100RL@V
	R	4201-4236,4301-4336	RC0603JR-07150RL@V
	R	4237,4337	RC0402JR-0710KL@V
	R	4238-4241,4338-4341	RC0402JR-07100RL@V
	R	4246,4345	RC0402JR-07620RL@V
	R	4249,4346	RC0603JR-07200RL@V
	R	4342,4344	RC0402JR-072K2L@V
	R	4343,4348	RC0402JR-0747KL@V

CAPACITORS

	C	3001,3006,3201,3401	0402B102K500CT
	C	3002,3007,3011,3012	0402B104K160CT
	C	3003,3009,3010	0402B103K160CT
	C	3005	DCH1365
	C	3008	0603X106K6R3CT
	C	3202,3402,3704,3809	0402B104K160CT
	C	3203-3210,3403-3410	0402B103K160CT
	C	3701,3702,3801,3803	0402B102K500CT
	C	3703	0805X226M100CT
	C	3705,3802,3804,3806	0402B103K160CT
	C	3805,3808,4001,4003	0402B102K500CT
	C	3807,4002,4004,4006	0402B103K160CT
	C	3810,4012	0805X106K160CT
	C	4005,4008,4010,4201	0402B102K500CT
	C	4007,4009	0402B103K160CT
	C	4011,4202,4208,4210	0402B104K160CT
	C	4203-4206,4303-4306	0402N221J500CT
	C	4207,4209,4211,4213	0402B102K500CT
	C	4212,4214,4220,4223	0402B104K160CT
	C	4215-4218,4221,4222	0402B102K500CT
	C	4219,4320	0805X106K100CT
	C	4301,4307,4309,4311	0402B102K500CT
	C	4302,4308,4310,4312	0402B104K160CT
	C	4313,4315-4318,4321	0402B102K500CT

Mark	No.	Description	Part No.
C	4314,4319,4323		0402B104K160CT
C	4322		0402B102K500CT

G MIXB ASSY

SEMICONDUCTORS

IC	7001,7003		TC74HC4051AF
IC	7002		NJM2903M
Q	7001,7003,7005,7007		MMDT5212W
Q	7002,7004,7006,7008		ISA1602AM1
Q	7009-7011		MMBTSC1623YW
Q	7012-7015		RT1P241M-11
Q	7016-7020		MMDT5212W
Q	7021		RT1P431M
D	7001,7002,7004,7005		LTL17KTBP5D@V
D	7003,7006,7007,7010		LTL17KRN8D@V
D	7008,7011		LTL17KTBP5D@V
D	7009,7012		LTL17KYRN5D-P@V
D	7013-7045		1SS355L@V

MISCELLANEOUS

S	7001-7004,7006-7008	TACT SWITCH	DSG1079
S	7005,7009	SLIDE SWITCH	DSH1066
S	7010-7017	TACT SWITCH	DSG1079
CN	7001	FFC/FPC CONNECTOR	DKN1709
PC	7001-7004	PHOTO INTERRUPTER	GP1S094HCZ0F

RESISTORS

R	7001,7013		RC0603JR-078K2L@V
R	7002,7014,7026,7038		RC0603JR-0722KL@V
R	7003,7015,7027,7039		RC0603JR-074K7L@V
R	7004,7005,7016,7017		RC0603JR-071K2L@V
R	7006,7018,7028,7040		RC0603JR-073KL@V
R	7025,7037		RC0603JR-075K1L@V
R	7029,7041		RC0603JR-071K2L@V
R	7030,7042		RC0603JR-07910RL@V
R	7049-7051		RC0603JR-072K2L@V
R	7052-7056,7059,7060		RC0603JR-0747KL@V
R	7057,7058,7061,7062		RC0603JR-07110RL@V
R	7063,7067,7069,7071		RC0603JR-07220KL@V
R	7065		RC0603JR-0722KL@V
R	7066		RC0603JR-071KL@V
R	7068		RC0603JR-071ML@V
R	7070		RC0603JR-0710KL@V
VR	7001,7004-7006,7009	ROTARY VR	DCS1116
VR	7002,7003,7007,7010	ROTARY VR	DCS1117
VR	7008,7011	SLIDE VR	DCV1035
VR	7012-7015	ROTARY VR	DCS1116
VR	7016	ROTARY VR	DCS1117

CAPACITORS

C	7001-7004,7008,7009		0603B104K250CT
C	7005-7007,7010		0603B471K500CT
C	7011-7015,7022		0603B104K250CT
C	7016-7019,7031,7032		0603B471K500CT
C	7024-7030,7033,7034		0603B104K250CT
C	7035,7036,7041,7042		0603B471K500CT
C	7037-7040,7044,7045		0603B104K250CT
C	7048		0603X106K6R3CT
C	7049,7052		KS7107M016A5E07K
C	7050,7051,7053		0603B104K250CT

Mark	No.	Description	Part No.

F CRFD ASSY

SEMICONDUCTORS

IC	9901,9902		EQ-730L
IC	9903		NJM12904V

MISCELLANEOUS

CN	9901	CONNECTOR	HWW-SL0320-J1@V
	9951,9952	HOLDER	DNK6449
VA	9901,9902	VARISTORS	EZJZ1V270RM

RESISTORS

R	9901,9902,9904		RC0603JR-0710KL@V
R	9903		RC0603JR-0722KL@V
R	9905		RC0603DR-0751KL@V
R	9906		RC0603DR-0715KL@V
R	9907		RC0603DR-072KL@V
R	9908		RC0603JR-07300RL@V

CAPACITORS

C	9901-9903		0603B104K250CT