


EXPLODED VIEW • PART LIST

Main Section/DCP Section

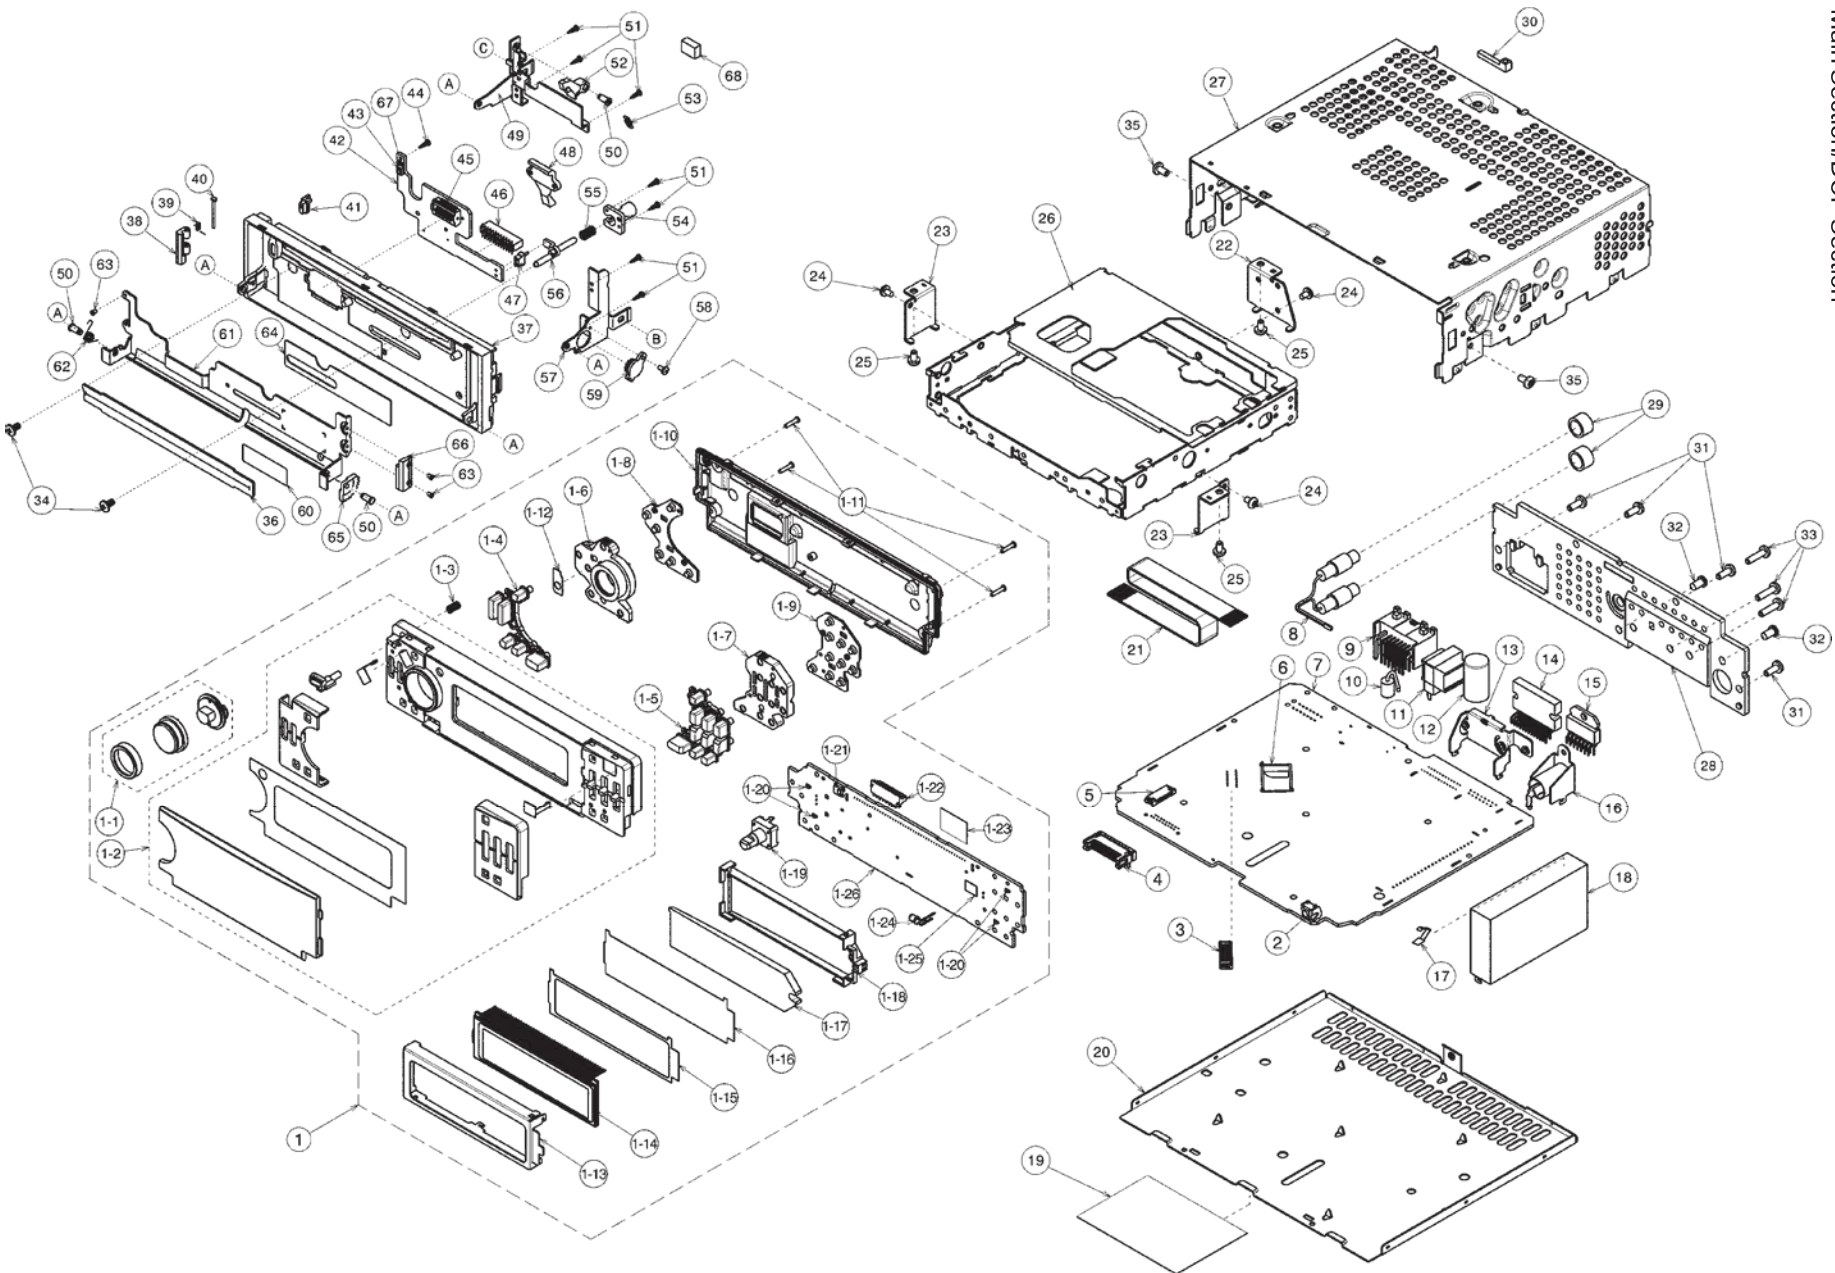


NO.	PART NO.	DESCRIPTION	Q'TY
1	DCP-504-600	DCP-ES-ASSY (PE-2739B-A)	1
	DCP-506-800	DCP-ES-ASSY (PE-2739K-A)	1
1-1	947-0577-00	VOL-KNOB-ASSY	1
1-2	947-0573-00	ESC-SUB-ASSY (PE-2739B-A)	1
	947-0574-00	ESC-SUB-ASSY (PE-2739K-A)	1
1-3	750-6791-00	SPRING	1
1-4	382-7372-00	BUTTON ASSY-L	1
1-5	382-7373-00	BUTTON ASSY-R	1
1-6	335-7495-00	ILLUMI LEFT	1
1-7	335-7496-00	ILLUMI RIGHT	1
1-8	345-5528-00	RUBBER SWITCH-L	1
1-9	345-5529-00	RUBBER SWITCH-R	1
1-10	335-7560-00	REAL COVER	1
1-11	716-0872-12	SP SCREW (M1.7x6)	4
1-12	291-0116-00	STICKER	1
1-13	331-3998-00	LCD COVER	1
1-14	379-1316-41	INDICATOR (LCD)	1
1-15	347-7461-00	FILM	1
1-16	347-7463-00	SHADE	1
1-17	335-7498-00	LCD ILLUMI	1
1-18	335-7500-00	LCD HOLDER	1
1-19	016-9900-93	VR W/SHAFT	1
1-20	001-7083-90	CHIP LED	4
1-21	060-4017-90	IR RECEIVER	1
1-22	076-0616-00	PLUG	1
1-23	051-6013-50	IC	1
1-24	001-7046-00	DIODE	1
1-25	347-7026-00	BLACK MAT	1
1-26	-----	SWITCH PWB	1
2	013-6103-00	TACT SWITCH	1
3	074-1143-15	FPC CONNECTOR	1
4	076-0648-18	OUTLET SOCKET	1
5	074-1138-60	FFC CONNECTOR	1
6	335-7501-00	FPC PROTECTOR	1
7	-----	MAIN PWB	1
8	855-5516-60	RCA PIN CORD	1
9	074-1214-00	OUTLET SOCKET	1
10	001-0592-61	DIODE	1
11	009-9006-60	CHOKE	1
12	042-1545-00	E-CAP	1
13	331-3996-00	IC HOLDER	1
14	051-2057-00	IC	1
15	051-3349-00	IC	1
16	092-4000-51	ANT-RECEPT	1
17	331-1861-21	EARTH PLATE	1
18	880-2090R	TUNER	1
19	286-6552-00	SETPLATE (PE-2739B-A)	1
	286-6553-00	SETPLATE (PE-2739K-A)	1
20	311-1848-03	LOWER CASE	1

NO.	PART NO.	DESCRIPTION	Q'TY
21	816-4006-60	FLAT CABLE	1
22	331-3366-02	MECH BRKT	1
23	331-3607-02	MECH BRKT	2
24	714-2604-81	MC SCREW (M2.6x4)	3
25	731-3005-81	TAPTIGHT (M3x5)	3
26	929-0850-80	CD MECHA MODULE	1
27	310-1810-00	UPPER CASE	1
28	313-1934-00	HEAT SINK	1
29	345-3799-OL	RUBBER PART	2
30	335-0833-01	CABLE TIE	1
31	731-3008-80	TAPTIGHT (M3x8)	4
32	714-3006-81	MC SCREW (M3x8)	2
33	731-3012-80	TAPTIGHT (M3x12)	3
34	714-2606-87	MC SCREW (M2.6x6)	2
35	731-3006-80	TAPTIGHT (M3x6)	2
36	346-0173-00	LEATHER SHEET	1
37	370-6142-00	INNER-ES	1
38	335-7373-00	HOOK DCP	1
39	750-3454-00	SPRING	1
40	341-1764-00	SHAFT	1
41	382-7255-00	BUTTON	1
42	-----	DCP PWB	1
43	013-6312-50	TACT SWITCH	1
44	716-1764-01	PAD SCREW (M1.7x5)	1
45	074-1220-00	OUTLET SOCKET	1
46	074-1279-68	OUTLET SOCKET	1
47	013-7201-50	DETECTOR SWITCH	1
48	335-7368-00	ILLUMI PLATE	1
49	331-3925-00	ARM-L	1
50	716-3546-01	DECORATIVE SCREW	3
51	716-1764-00	PAD SCREW (M1.7x5)	7
52	335-7369-01	HOOK LOCK	1
53	750-3341-00	SPRING	1
54	335-7371-00	HOOK SLEEVE	1
55	750-6783-00	SPRING	1
56	335-7370-00	DETECTOR HOOK	1
57	331-3926-00	ARM-R	1
58	780-2004-01	SCREW (M2x4)	1
59	613-0730-00	GEAR DAMPER	1
60	291-0092-00	STICKER	1
61	331-3924-00	DCP-HOLDER	1
62	750-6793-01	SPRING	1
63	738-1722-17	PRECISION SCREW (M1.7x2.2)	3
64	290-8458-00	LABEL	1
65	613-0757-00	FAN GEAR	1
66	335-7505-00	HOOK	1
67	001-7062-90	DIODE	1
68	345-5547-00	RUBBER	1

EXPLODED VIEW • PARTS LIST

CD mechanism section 929-0850-80

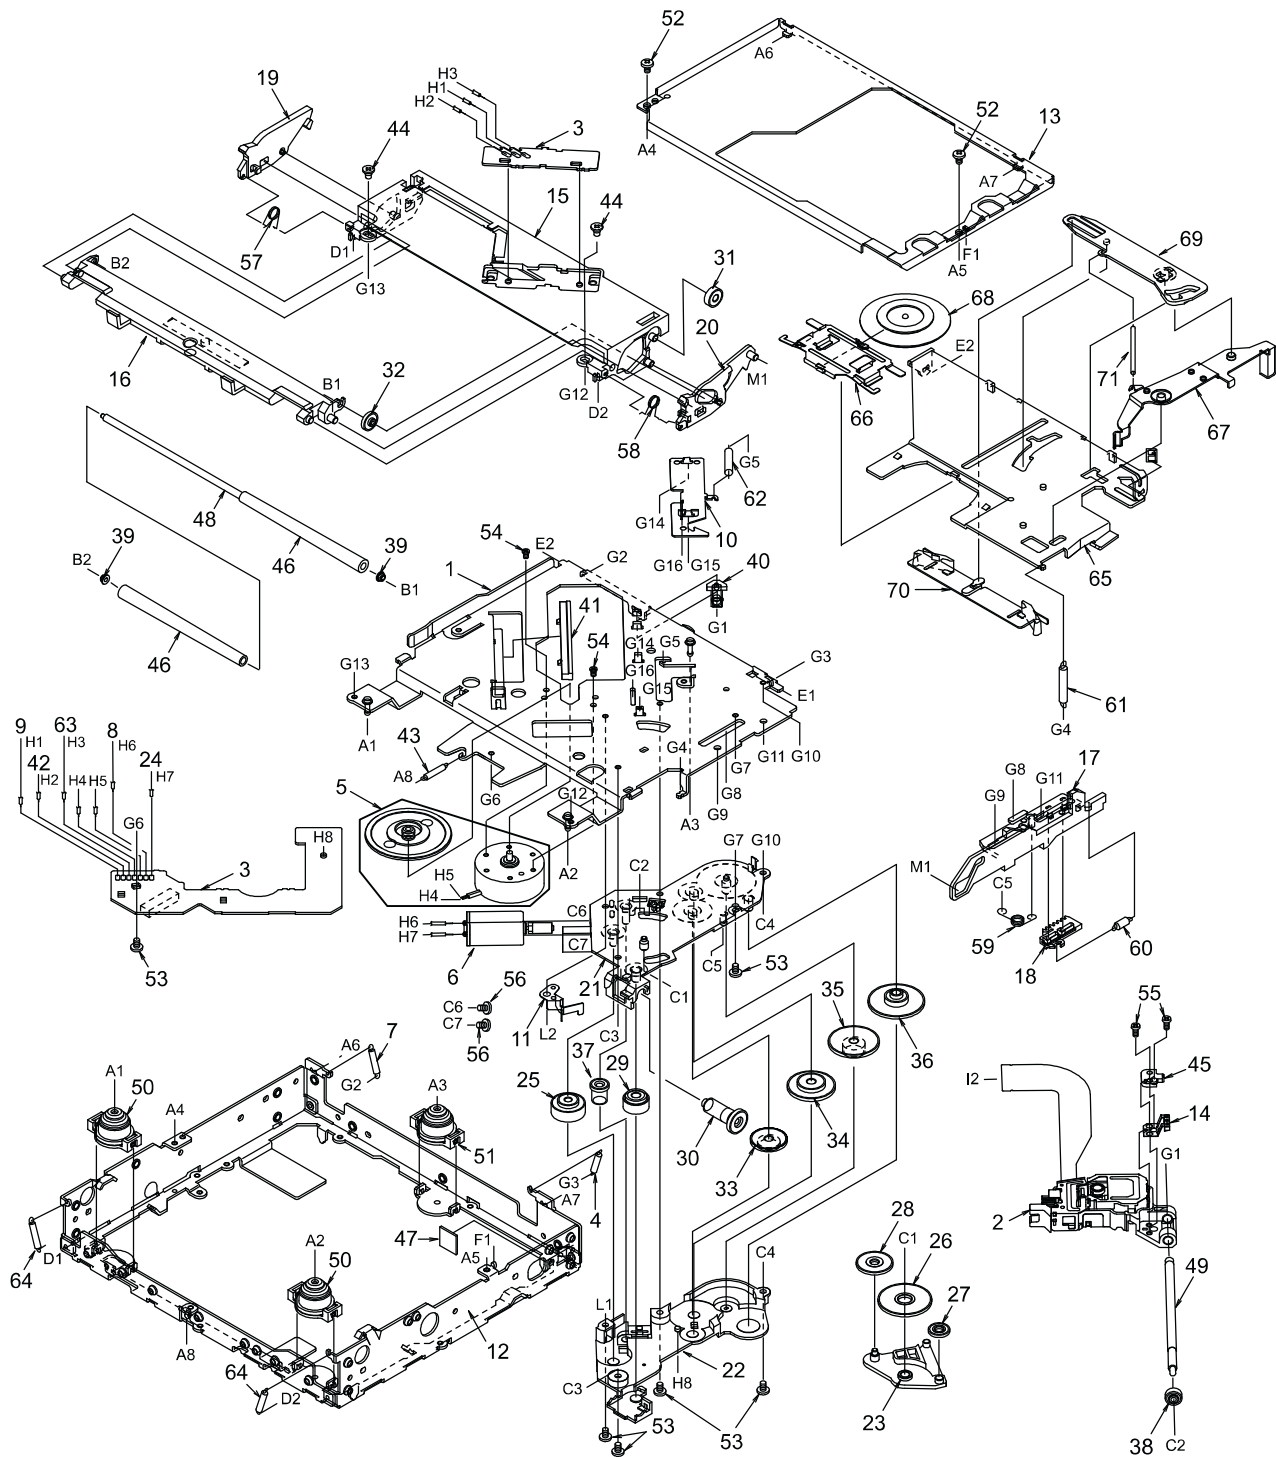

NO.	PART NO.	DESCRIPTION	Q'TY
1	966-1729-20	DRIVE PLATE ASSY	1
2	969-0065-31	PICK UP UNIT	1
3	-----	LED PWB	1
4	750-3474-20	DR-SPRING RB	1
5	SMA-182-100	MOTOR ASSY (SPINDLE)	1
6	SMA-183-100	MOTOR ASSY (SLED)	1
7	750-3473-20	DR-SPRING RA	1
8	803-4906-60	VINYL COAT WIRE (ORG)	1
9	816-2591-00	LEAD WIRE (YEL)	1
10	620-1738-20	ID-LOCK PLATE	1
11	620-1739-20	SPRING PLATE	1
12	620-1748-20	LOWER CHASSIS	1
13	620-1740-21	UPPER CHASSIS	1
14	966-1730-20	SH-RACK-ASSY	1
15	621-0598-27	UPPER GUIDE	1
16	621-0718-21	ROLLER GUIDE	1
17	621-0600-26	SHIFT LEVER	1
18	621-1735-20	RACK	1
19	621-0602-22	LOCK ARM (L)	1
20	621-0603-25	LOCK ARM (R)	1
21	621-0724-21	GEAR BASE	1
22	621-0605-22	GEAR COVER	1
23	621-0723-20	IDLE CASE	1
24	816-2590-00	VINYL COAT WIRE (GRN)	1
25	621-0608-21	SECOND GEAR	1
26	621-0609-20	BASE GEAR	1
27	621-0610-20	IDLE GEAR A	1
28	621-0611-20	IDLE GEAR B	1
29	621-0612-21	ROLLER GEAR A	1
30	621-0719-20	ROLLER GEAR B	1
31	621-0720-20	ROLLER GEAR C	1
32	621-0721-20	ROLLER GEAR D	1
33	621-0616-20	POWER GEAR A	1
34	621-0617-20	POWER GEAR B	1
35	621-0618-20	POWER GEAR C	1
36	621-0619-20	POWER GEAR D	1

NO.	PART NO.	DESCRIPTION	Q'TY
37	621-0620-20	THREAD GEAR A	1
38	621-0621-20	THREAD GEAR B	1
39	621-0622-21	ROLLER SLEEVE	2
40	621-0623-23	LS-HOLDER	1
41	621-0624-22	GUIDE RAIL	1
42	816-2593-00	LEAD WIRE (PUR)	1
43	750-3475-21	DR-SPRING C	1
44	716-3473-00	SCREW (M2x3)	2
45	621-0709-20	SH-BASE	1
46	621-0711-20	LOADING ROLLER	2
47	345-5476-20	CUSHION RUBBER	1
48	622-1571-21	ROLLER SHAFT	1
49	624-0018-01	LEAD SCREW	1
50	629-0081-21	DAMPER F	2
51	629-0082-21	DAMPER R	1
52	714-2003-81	MACHINE SCREW (M2x3)	2
53	716-1507-00	SCREW (M2x3)	7
54	716-1733-00	SCREW (M1.7x2.3)	2
55	716-3469-00	SCREW (M1.7x4)	2
56	716-3551-00	SCREW (M1.4x2.5)	2
57	750-3465-21	ROLLER SPRING (L)	1
58	750-3466-20	ROLLER SPRING (R)	1
59	750-3467-21	SHIFT SPRING	1
60	750-3468-20	RACK SPRING	1
61	750-3469-20	CLAMPER SPRING	1
62	750-3470-20	ID-LOCK SPRING	1
63	816-2592-00	LEAD WIRE (BLU)	1
64	750-3472-21	DR-SPRING F	2
65	620-1736-21	CLAMPER LINK	1
66	620-1742-20	CLAMPER PLATE	1
67	620-1737-20	SENSOR ARM	1
68	621-0708-20	CLAMPER RING	1
69	621-0626-21	STOPPER LINK	1
70	621-0627-21	DISC STOPPER	1
71	750-3471-20	SENSOR SPRING	1

ELECTRICAL PARTS LIST

Main PWB (B1) Section

Note:- Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.
Remarks:- #: For PE-2739B-A only *: For PE-2739K-A only

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
ANT101	092-4000-51	ANT RECEPT	C514	168-2722-55	25V 2700pF	C724	187-1073-15	6.3V 100uF
BL101	880-2090R	TUNER	C515	168-2722-55	25V 2700pF	C725	187-2273-15	6.3V 220uF
C101	166-2201-50	25V 22pF	C517	187-2263-35	16V 22uF	C726	168-1042-78	50V 0.1uF
C102	166-2201-50	25V 22pF	C518	187-2253-65	50V 2.2uF	C727	178-1052-78	50V 1uF
C103	168-1032-55	25V 0.01uF	C519	168-1042-78	50V 0.1uF	C728	168-3332-55	25V 0.033uF
C104	168-1032-55	25V 0.01uF	C520	168-1042-78	50V 0.1uF	C729	168-6822-55	25V 6800pF
C105	168-1032-55	25V 0.01uF	C521	168-1042-78	50V 0.1uF	C730	168-1042-78	50V 0.1uF
C106	168-1042-78	50V 0.1uF	C522	168-1042-78	50V 0.1uF	C731	168-1042-78	50V 0.1uF
C107	168-1032-55	25V 0.01uF	C523	166-1011-50	25V 100pF	C732	168-4732-55	25V 0.047uF
C108	168-6822-55	25V 6800pF	C524	166-1011-50	25V 100pF	C733	168-4732-55	25V 0.047uF
C110	168-1022-55	25V 1000pF	C525	166-1011-50	25V 100pF	C734	166-4711-50	25V 470pF
C111	187-1053-65	50V 1uF	C526	166-1011-50	25V 100pF	C735	166-4711-50	25V 470pF
C113	168-1532-55	25V 0.015uF	C532	187-1063-35	16V 10uF	C736	187-2263-35	16V 22uF
C115	187-1073-25	10V 100uF	C533	166-4711-50	25V 470pF	C738	168-1042-78	50V 0.1uF
C116	187-4763-35	16V 47uF	C534	187-1063-35	16V 10uF	C739	187-1073-25	10V 100uF
C117	187-1073-25	10V 100uF	C535	166-4711-50	25V 470pF	C740	168-1042-78	50V 0.1uF
C118	168-1032-55	25V 0.01uF	C538	187-1073-35	16V 100uF	C741	168-1042-78	50V 0.1uF
C119	168-2732-55	25V 0.027uF	C539	168-1042-78	50V 0.1uF	C742	168-1042-78	50V 0.1uF
C120	168-2732-55	25V 0.027uF	C601	178-4742-78	50V 0.47uF	C743	168-1042-78	50V 0.1uF
C121	168-2732-55	25V 0.022uF	C602	178-4742-78	50V 0.47uF	C744	168-5622-55	25V 5600pF
C125	168-1032-55	25V 0.01uF	C603	178-4742-78	50V 0.47uF	C745	168-1042-78	50V 0.1uF
C126	187-3353-65	50V 3.3uF	C604	178-4742-78	50V 0.47uF	C746	178-1052-78	50V 1uF
C127	187-4763-35	16V 47uF	C611	166-4711-50	25V 470pF	C747	168-2232-55	25V 0.022uF
C128	168-1022-55	25V 1000pF	C612	166-4711-50	25V 470pF	C748	168-2232-55	25V 0.022uF
C129	168-1042-78	50V 0.1uF	C613	166-4711-50	25V 470pF	C749	168-1022-55	25V 1000pF
C130	166-1011-50	25V 100pF	C614	166-4711-50	25V 470pF	C901	042-1545-00	16V 2200uF
C131	168-1042-78	50V 0.1uF	C615	166-4711-50	25V 470pF	C902	172-1041-15	25V 0.1uF
C132	168-1042-78	25V 0.1uF	C616	166-4711-50	25V 470pF	C903	187-1053-65	50V 1uF
C201	178-1042-78	50V 0.1uF	C617	166-4711-50	25V 470pF	C904	168-1042-78	50V 0.1uF
C202	042-1598-90	10V 470uF	C618	166-4711-50	25V 470pF	C905	042-1598-90	10V 470uF
C203	166-1011-50	25V 100pF	C620	187-2263-35	16V 10uF	C906	168-1042-78	50V 0.1uF
C204	166-1011-50	25V 100pF	C621	178-1052-78	50V 1uF	C907	187-1073-35	16V 100uF
C205	166-1011-50	25V 100pF	C622	187-3343-65	50V 0.33uF	C908	168-1042-78	50V 0.1uF
C206	166-3311-50	25V 330pF	C701	168-1042-78	50V 0.1uF	C909	042-1598-90	10V 470uF
C207	166-2201-50	25V 22pF	C702	168-1042-78	50V 0.1uF	C910	168-1042-78	50V 0.1uF
C208	166-2201-50	25V 22pF	C703	166-4701-50	25V 47pF	C911	187-4763-35	16V 47uF
C209	178-1042-78	50V 0.1uF	C704	168-1042-78	50V 0.1uF	C912	168-1022-55	25V 1000pF
C210	178-1042-78	50V 0.1uF	C705	168-1532-55	25V 0.015uF	C913	168-1032-55	25V 0.01uF
C211	168-1032-55	25V 0.01uF	C706	168-1032-55	25V 0.01uF	C914	187-1063-35	16V 10uF
C214	168-1022-55	25V 1000pF	C707	168-4722-55	25V 4700pF	CCT701	050-0148-51	47K
C215	168-1042-78	50V 0.1uF	C708	168-1522-55	25V 1500pF	D202	001-7062-90	DIODE
C216	166-1011-50	25V 100pF	C709	168-1042-78	50V 0.1uF	D203	001-0529-26	MA8047M
C315	166-1011-50	25V 100pF	C710	168-1042-78	50V 0.1uF	D204	001-4902-91	HZM6.8MFA
C501	187-2253-65	50V 2.2uF	C711	168-1532-55	25V 0.015uF	D207	001-1310-00	KDS160
C502	187-2253-65	50V 2.2uF	C712	168-1042-78	50V 0.1uF	D609	001-1310-00	KDS160
C503	187-2253-65	50V 2.2uF	C713	168-1042-78	50V 0.1uF	D701	001-1313-00	KDS226
C504	187-2253-65	50V 2.2uF	C714	166-6810-50	25V 680pF	D901	001-0592-61	1N5404
C505	168-1522-55	25V 1500pF	C715	166-6801-50	25V 68pF	D903	001-2003-91	1AJ-4
C506	166-1011-50	25V 100pF	C716	168-1042-78	50V 0.1uF	D904	001-2003-91	1AJ-4
C507	168-1522-55	25V 1500pF	C717	178-1052-78	50V 1uF	D906	001-1310-00	KDS160
C508	166-1011-50	25V 100pF	C720	178-1052-78	50V 1uF	D907	001-1310-00	KDS160
C511	178-4742-78	50V 0.47uF	C721	187-1073-15	50V 100 6.3V	D909	001-0330-90	1SS119
C512	178-4742-78	50V 0.47uF	C722	178-1052-78	50V 1uF	D910	001-1310-00	KDS160
C513	187-2253-65	50V 2.2-uF	C723	168-1042-78	50V 0.1uF	D911	001-2003-91	1AJ-4

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
IC201	052-1947-00	uPD178078GF-582-3-BA	R116	119-0000-05	1/16W 0 ohm	R512	119-3900-15	1/16W 39 ohm
IC501	051-5033-90	PT2311	R119	119-1021-15	1/16W 1K ohm	R513	119-5621-15	1/16W 5.6K ohm
IC601	051-2057-00	TB2906HQ	R120	119-1021-15	1/16W 1K ohm	R514	119-5621-15	1/16W 5.6K ohm
IC701	051-6399-00	TC94A15F	R123	119-3311-15	1/16W 330 ohm	R529	119-1031-15	1/16W 10K ohm
IC702	051-6071-08	BA5825FP	R201	119-0000-05	1/16W 0 ohm	R530	119-3311-15	1/16W 330 ohm
IC901	051-3349-00	HA13166	R202	119-0000-05	1/16W 0 ohm	R531	119-5621-15	1/16W 5.6K ohm
J201	076-0648-18	OUTLET SOCKET	R203	119-0000-05	1/16W 0 ohm	R533	119-1031-15	1/16W 10K ohm
J701	074-1143-15	FPC CONNECTOR	R204	119-0000-05	1/16W 0 ohm	R534	119-3311-15	1/16W 330 ohm
J702	074-1138-60	FFC CONNECTOR	R205	119-1031-15	1/16W 10K ohm	R535	119-5621-15	1/16W 5.6K ohm
J901	074-1214-00	OUTLET SOCKET	R206	119-0000-05	1/16W 0 ohm	R601	119-2221-15	1/16W 2.2K ohm
JW1	060-0108-90	JUMPER	R207	119-0000-05	1/16W 0 ohm	R602	119-2221-15	1/16W 2.2K ohm
JW2	060-0108-90	JUMPER	R208	119-1031-15	1/16W 10K ohm	R603	119-2221-15	1/16W 2.2K ohm
JW3	117-0000-05	JUMPER	R210	119-0000-05	1/16W 0 ohm	R604	119-2221-15	1/16W 2.2K ohm
L101	010-2003-04	30uH (variable)	R211	119-1021-15	1/16W 1K ohm	R605	119-1031-15	1/16W 10K ohm
L103	010-2230-69	5.6uH	R212	119-0000-05	1/16W 0 ohm	R606	119-4731-15	1/16W 47K ohm
L201	010-2330-88	220uH	R213	119-1021-15	1/16W 1K ohm	R607	119-1031-15	1/16W 10K ohm
L601	010-3001-63	5.6uH	R214	119-2221-15	1/16W 2.2K ohm	R608	119-4721-15	1/16W 4.7K ohm
L602	010-3001-63	5.6uH	R215	119-2221-15	1/16W 2.2K ohm	R701	119-5621-15	1/16W 5.6K ohm
L603	010-3001-63	5.6uH	R216	119-2231-15	1/16W 22K ohm	R702	119-4731-15	1/16W 47K ohm
L604	010-3001-63	5.6uH	R218	119-0000-05	1/16W 0 ohm	R703	119-3341-15	1/16W 330K ohm
L701	010-2285-57	1K ohm/100MHz	R219	119-1031-15	1/16W 10K ohm	R704	119-2231-15	1/16W 22K ohm
L702	117-0000-05	1/4W 0 ohm	R220	119-1031-15	1/16W 10K ohm	R705	119-2231-15	1/16W 22K ohm
L704	010-2285-57	1K ohm/100MHz	R221	119-1031-15	1/16W 10K ohm	R706	119-2211-15	1/16W 220 ohm
Q101	125-2199-93	KRC103S	R222	119-1031-15	1/16W 10K ohm	R707	119-1001-15	1/16W 10 ohm
Q102	125-0199-93	KRA103S	R223	119-4731-15	1/16W 47K ohm	R708	119-6811-15	1/16W 680 ohm
Q103	125-0199-98	KRA118S	R224	119-4731-15	1/16W 47K ohm	R709	032-0162-50	1/16W 0.51 ohm
Q105	125-4010-90	KTC3875GR	R225	119-1041-15	1/16W 100K ohm	R710	119-1831-15	1/16W 18K ohm
Q106	125-4010-90	KTC3875GR	R226	119-1041-15	1/16W 100K ohm	R711	119-6821-15	1/16W 6.8K ohm
Q109	125-4011-90	KTD863YAT	R227	119-4731-15	1/16W 47K ohm	R712	119-1531-15	1/16W 15K ohm
Q201	125-4010-90	KTC3875GR	R228	119-0000-05	1/16W 0 ohm	R713	119-4731-15	1/16W 47K ohm
Q202	125-0199-92	KRA102S	R229	119-5631-15	1/16W 56K ohm	R714	119-2731-15	1/16W 27K ohm
Q203	125-4010-90	KTC3875GR	R230	119-1031-15	1/16W 10K ohm*	R715	119-2731-15	1/16W 27K ohm
Q204	125-0199-92	KRA102S	R231	119-1031-15	1/16W 10K ohm#	R716	119-2731-15	1/16W 27K ohm
Q205	125-0199-92	KRA102S	R232	119-1031-15	1/16W 10K ohm	R717	119-8231-15	1/16W 82K ohm
Q501	125-4010-90	KTC3875GR	R233	119-2711-15	1/16W 270 ohm	R718	119-8231-15	1/16W 82K ohm
Q502	125-4010-90	KTC3875GR	R235	119-4731-15	1/16W 47K ohm	R719	119-2731-15	1/16W 27K ohm
Q503	125-0199-92	KRA102S	R236	119-4721-15	1/16W 4.7K ohm	R720	119-1001-15	1/16W 10 ohm
Q701	125-3011-90	KTA1663	R237	119-4731-15	1/16W 47K ohm	R721	119-1051-15	1/16W 1M ohm
Q702	125-3011-90	KTA1663	R238	119-1841-15	1/16W 180K ohm	R722	119-6811-15	1/16W 680 ohm
Q901	125-2199-93	KRC103S	R239	119-2711-15	1/16W 270 ohm	R723	119-2211-15	1/16W 220 ohm
Q902	125-0199-92	KRA102S	R241	119-1031-15	1/16W 10K ohm	R724	119-2211-15	1/16W 220 ohm
Q903	125-0199-92	KRA102S	R242	119-4721-15	1/16W 4.7K ohm	R725	119-1041-15	1/16W 100K ohm
Q904	125-0199-92	KRA102S	R243	119-2231-15	1/16W 22K ohm	R726	119-1021-15	1/16W 1K ohm
Q905	125-0199-92	KRA102S	R244	119-0000-05	1/16W 0 ohm	R901	116-2231-98	1/4W 22K ohm
Q906	125-4011-90	KTD863YAT	R246	119-4731-15	1/16W 47K ohm	R902	119-1231-15	1/16W 12K ohm
Q909	125-2199-93	KRC103S	R247	119-1031-15	1/16W 10K ohm	R903	119-5631-15	1/16W 56K ohm
Q910	125-3005-90	KTA1273	R248	119-1031-15	1/16W 10K ohm	R904	119-1011-15	1/16W 100 ohm
Q911	125-4010-90	KTC3875GR	R249	119-1041-15	1/16W 100K ohm	R907	116-2221-98	1/4W 2.2K ohm
R101	119-1011-15	1/16W 100 ohm	R501	119-1031-15	1/16W 10K ohm	R908	119-1031-15	1/16W 10K ohm
R103	119-4741-15	1/16W 470K ohm	R502	119-1031-15	1/16W 10K ohm	R909	111-2231-98	1/4W 22K ohm
R104	119-1021-15	1/16W 1K ohm	R505	119-1821-15	1/16W 1.8K ohm	R910	119-4731-15	1/16W 47K ohm
R105	119-0000-05	1/16W 0 ohm	R506	119-2731-15	1/16W 27K ohm	S201	013-6103-00	RESET SW
R106	119-1831-15	1/16W 18K ohm	R507	119-1821-15	1/16W 1.8K ohm	SUP101	060-0122-20	060-0122-20
R110	119-2221-15	1/16W 2.2K ohm	R508	119-2731-15	1/16W 27K ohm	T901	009-9006-60	009-9006-60
R112	119-2221-15	1/16W 2.2K ohm	R509	119-3900-15	1/16W 39 ohm	X201	061-1064-00	4.5MHz
R115	119-4721-15	1/16W 4.7K ohm	R510	119-3900-15	1/16W 39 ohm	X701	060-1535-90	16.934M
			R511	119-3900-15	1/16W 39 ohm	PWB	039-2610-00	PWB (WITHOUT COMPONENT)

Switch PWB (B2) Section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	168-1022-55	50V 1000P	LCD1	379-1316-41	LCD-INDICATOR
C2	168-4732-55	50V 0.047uF	R3	116-3311-15	1/4W 330K ohm
C3	168-4732-55	50V 0.047uF	R4	116-3311-15	1/4W 330K ohm
C4	168-4732-55	50V 0.047uF	R5	119-2221-15	1/16W 2.2K ohm
C5	178-1052-78	25V 1uF	R6	119-2221-15	1/16W 2.2K ohm
C6	178-1052-78	25V 1uF	R7	119-2221-15	1/16W 2.2K ohm
D1	001-7083-90	LED	R8	119-3921-15	1/16W 2.2K ohm
D2	001-7083-90	LED	R9	119-1241-15	1/16W 120K ohm
D3	001-7083-90	LED	R10	119-1021-15	1/16W 1K ohm
D4	001-7083-90	LED	R11	119-1011-15	1/16W 100K ohm
D5	001-0529-53	MA8110M	R12	119-3311-15	1/16W 1K ohm
D6	001-0529-53	MA8110M	R13	119-3311-15	1/16W 1K ohm
D7	001-4902-91	HZM6.8MFA	R14	119-1021-15	1/16W 1K ohm
D8	001-0529-41	MA8075M	R15	119-6811-15	1/16W 680K ohm
D9	001-0746-00	LED	R16	119-6811-15	1/16W 680K ohm
D10	001-0529-29	MA8051M	R17	119-4731-15	1/16W 47K ohm
IC1	051-6013-50	PT6554LQ	VR1	016-9900-93	KNOB
IR1	060-4017-90	IR RECEIVER	PWB	039-2611-00	PWB (WITHOUT COMPONENT)
J101	076-0616-00	PLUG			

DCP PWB (B3) Section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D801	001-7062-90	LED	J701	074-1279-68	OUTLET SOCKET
R621	119-1521-15	1/16W 2.2K ohm	J703	074-1220-00	OUTLET SOCKET
S800	013-7201-50	DETECTOR SWITCH	PWB	039-2694-00	PWB (WITHOUT COMPONENT)
S801	013-6312-50	TACT SWITCH			

LED PWB (B4) Section : CD mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D1	001-7058-90	AN1105W-RR	S1	013-7414-50	CHUCKING
D2	001-7058-90	AN1105W-RR	S2	013-7413-50	LIMIT
J1	074-1138-60	10P	PWB	039-1944-21	PWB (WITHOUT COMPONENT)
Q1	060-4015-90	PS1192H			
Q2	060-4015-90	PS1192H			