



EXPLODED VIEW / PARTS LIST

Escutcheon section

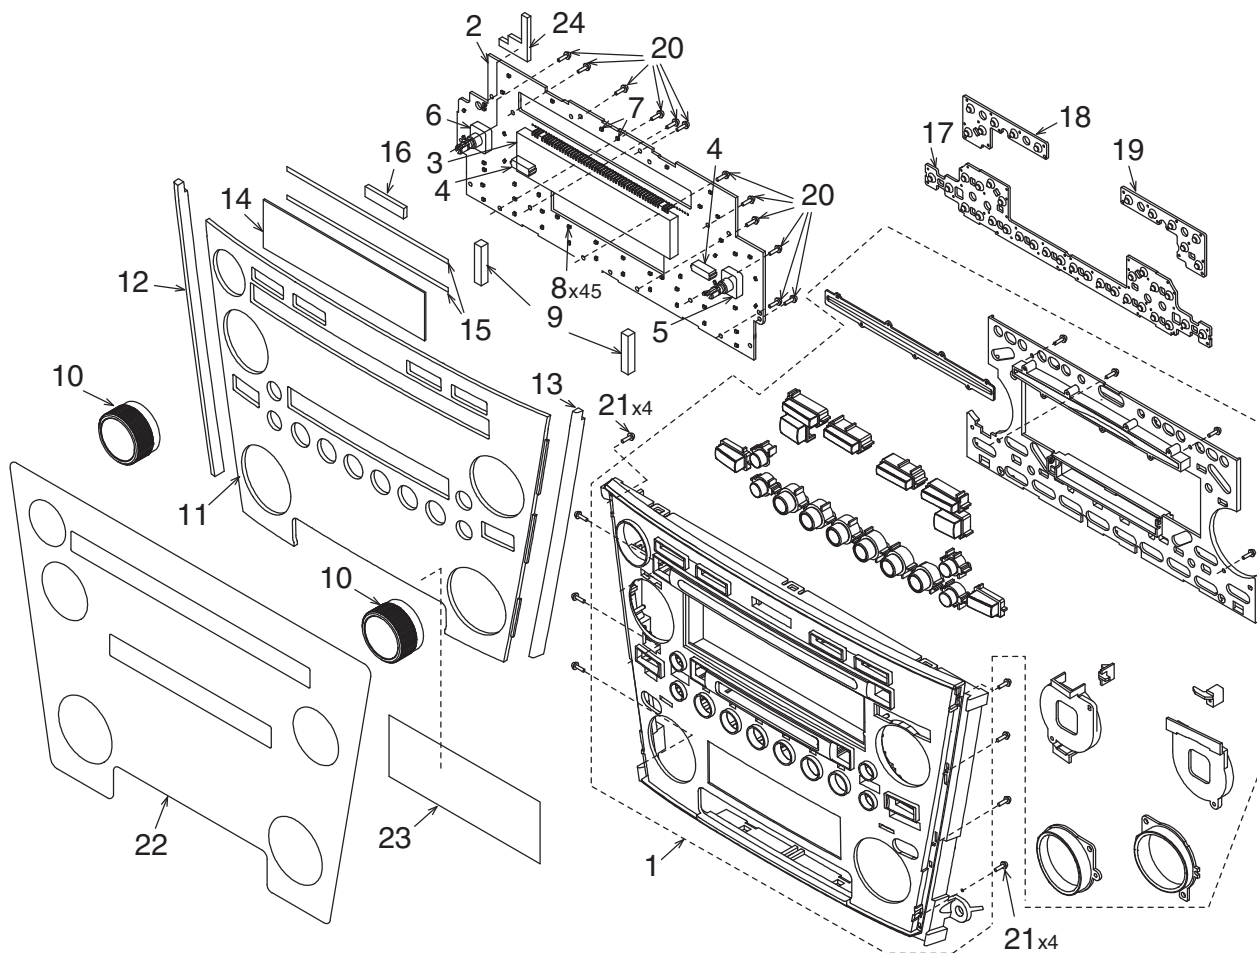

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	940-8126-12	ESCUTCHEON-ASSY	1	13	383-0742-00	SIDE TRIM(R)	1
2	-----	SWITCH PWB	1	14	335-7881-01	VFD COVER	1
3	379-4059-20	VFD	1	15	347-8018-00	DOUBLE FACE	2
4	074-3013-64	OUTLET SOCKET (14P)	2	16	345-5299-00	RUBBER SHEET	1
5	016-0025-08	VR W/SHAFT	1	17	345-5996-00	RUBBER SW A	1
6	016-0025-07	VR W/SHAFT	1	18	345-5997-00	RUBBER SW B	1
7	001-7040-93	DIODE	2	19	345-5998-00	RUBBER SW C	1
8	001-7048-91	DIODE	45	20	716-0778-52	SCREW(M2x6)	12
9	345-5995-00	SPACER	2	21	716-0872-51	SCREW(M1.7x6)	8
10	380-5679-01	KNOB(ASSY)	2	22	347-8017-10	PROTECTOR	1
11	373-1100-01	DIAL-CVR	1	23	347-8079-00	PROTECT SHEET	1
12	383-0741-00	SIDE TRIM(L)	1	24	345-6007-00	CUSHION	1

Main section

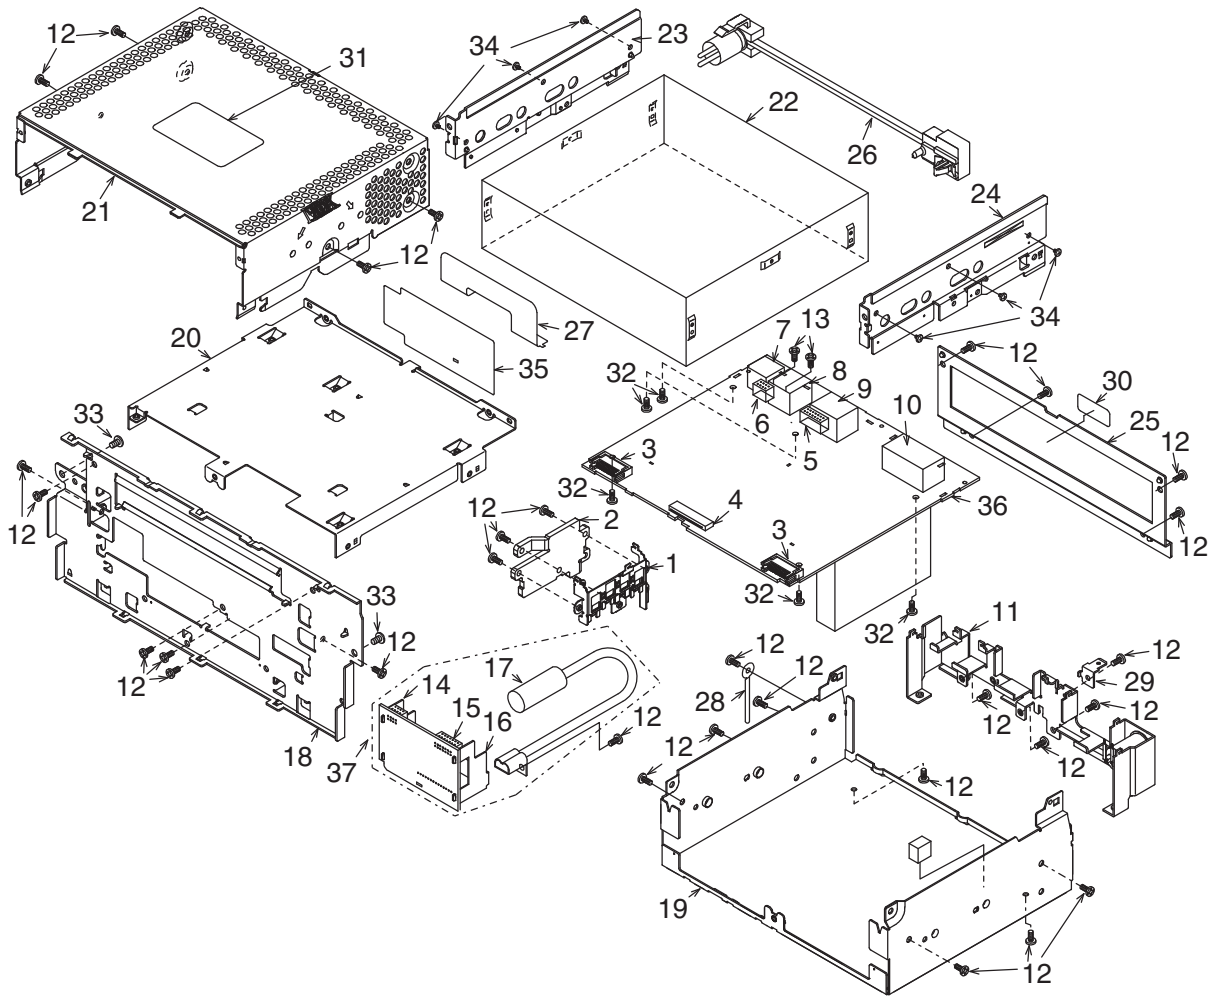

NO.	PART NO.	DESCRIPTION	Q'TY
1	331-4126-00	TR HOLDER	1
2	313-1966-00	SUB HEAT SINK	1
3	076-0648-14	PLUG (14P)	2
4	074-1228-69	OUTLET SOCKET (19P)	1
5	076-0368-14	PLUG (14P)	1
6	076-0368-08	PLUG (8P)	1
7	074-1194-00	OUTLET SOCKET (13P)	1
8	074-1302-08	OUTLET SOCKET (8P)	1
9	074-0895-20	OUTLET SOCKET (20P)	1
10	074-1010-10	OUTLET SOCKET (14P)	1
11	307-0721-10	REAR PLATE(W/ANT JACK)	1
12	714-2606-8B	MACHINE SCREW(M2.6x6)	30
13	778-3006-00	TAP-SCREW(M3x6)	2
14	074-0898-08	OUTLET SOCKET (8P)	1
15	074-0898-14	OUTLET SOCKET (14P)	1
16	331-4210-00	PWB HOLDER	1
17	855-0587-00	MULTI POLE CORD	1
18	309-0824-01	ES PLATE	1
19	311-1923-01	LOWER CASE	1

NO.	PART NO.	DESCRIPTION	Q'TY
20	331-4208-00	MID CASE	1
21	310-1826-20	UPPER CASE	1
22	929-0371-83	CD-CHANG-MODULE	1
23	331-4091-10	6CD BRKT(L)	1
24	331-4092-10	6CD BRKT(R)	1
25	331-4209-01	REAR CVR	1
26	093-2057-00	ANT-JUMPER	1
27	039-2883-00	FPC PWB (WITHOUT COMPONENT)	1
28	321-0811-00	CLAMP	1
29	331-3579-00	EARTH PLATE	1
30	290-8338-05	LABEL	1
31	286-9064-19	SETPLATE	1
32	716-0878-50	SCREW(M2.6x5)	5
33	716-1553-50	SCREW	2
34	716-3552-00	SCREW(M2.3x0.4)	6
35	347-8015-00	PROTECTOR	1
36	-----	MAIN PWB	1
37	-----	SUB PWB	1

ELECTRICAL PARTS LIST

Main PWB (B1) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
BL101	941-0215-73	TUNER	C304	168-1042-78	16V 0.1uF	C414	042-1659-87	50V 2.2uF
C101	166-8201-50	82pF CH	C305	168-6832-78	0.068uF K	C421	163-1063-35	16V 10uF
C104	168-2232-55	0.022uF K	C306	168-8222-55	8200pF K	C422	163-1063-35	16V 10uF
C105	168-1042-78	16V 0.1uF	C307	163-1063-35	16V 10uF	C423	163-1073-35	16V 100uF
C106	168-2232-55	0.022uF K	C308	168-1042-78	16V 0.1uF	C424	168-1042-78	16V 0.1uF
C108	168-2232-55	0.022uF K	C309	163-1063-35	16V 10uF	C425	163-2253-65	50V 2.2uF
C109	168-4745-79	0.47uF Z	C310	042-0592-58	16V 10uF	C426	163-2253-65	50V 2.2uF
C110	188-1073-27	10V 100uF	C311	168-1042-78	16V 0.1uF	C427	163-1053-65	50V 1uF
C111	168-1042-78	16V 0.1uF	C312	163-1053-65	50V 1uF	C428	163-1053-65	50V 1uF
C112	188-1073-27	10V 100uF	C313	168-1042-78	16V 0.1uF	C429	168-2222-55	2200pF K
C113	168-1042-78	16V 0.1uF	C314	042-0592-58	16V 10uF	C430	168-2222-55	2200pF K
C114	168-1032-55	0.01uF K	C315	178-2255-79	2.2uF	C431	178-1052-78	1uF
C115	168-1042-78	16V 0.1uF	C316	178-2255-79	2.2uF	C432	178-1052-78	1uF
C117	163-1063-35	16V 10uF	C317	178-2255-79	2.2uF	C433	178-1052-78	1uF
C118	168-3322-55	3300pF K	C318	178-2255-79	2.2uF	C434	178-1052-78	1uF
C119	163-4743-65	50V 0.47uF	C319	166-2211-50	220pF CH	C435	178-1052-78	1uF
C120	168-1032-55	0.01uF K	C320	166-2211-50	220pF CH	C436	178-1052-78	1uF
C121	168-1032-55	0.01uF K	C321	166-1011-50	100pF CH	C437	178-3342-78	0.33uF
C122	168-4732-78	0.047uF K	C322	166-1011-50	100pF CH	C438	178-3342-78	0.33uF
C124	163-1073-35	16V 100uF	C323	166-1011-50	100pF CH	C439	163-1063-35	16V 10uF
C127	178-1052-78	1uF	C324	166-1011-50	100pF CH	C440	163-1063-35	16V 10uF
C128	168-1042-78	16V 0.1uF	C329	168-1042-78	16V 0.1uF	C441	163-1073-35	16V 100uF
C129	168-1032-55	0.01uF K	C330	163-1073-35	16V 100uF	C442	168-1042-78	16V 0.1uF
C130	168-1022-55	1000pF K	C331	163-2263-15	6.3V 22uF	C443	163-1073-35	16V 100uF
C131	168-1022-55	1000pF K	C332	166-1007-50	10pF CH	C444	168-1042-78	16V 0.1uF
C133	188-4763-37	16V 47uF	C334	163-4763-15	6.3V 47uF	C445	163-1073-35	16V 100uF
C134	166-1501-50	15pF CH	C335	168-1042-78	16V 0.1uF	C446	168-1042-78	16V 0.1uF
C135	168-1022-55	1000pF K	C336	168-1042-78	16V 0.1uF	C447	163-4763-15	6.3V 47uF
C136	042-1458-90	50V 1uF LN	C337	163-4763-15	6.3V 47uF	C448	166-1007-50	10pF CH
C137	166-1501-50	15pF CH	C339	178-3342-78	0.33uF	C449	163-4763-15	6.3V 47uF
C138	166-1011-50	100pF CH	C350	042-1659-67	16V 100uF	C450	168-1042-78	16V 0.1uF
C139	166-1011-50	100pF CH	C351	042-1659-67	16V 100uF	C451	168-4712-55	470pF K
C140	166-1011-50	100pF CH	C352	042-1659-67	16V 100uF	C452	178-2255-79	2.2uF
C141	166-1011-50	100pF CH	C353	042-1659-67	16V 100uF	C453	178-2255-79	2.2uF
C142	168-2232-55	0.022uF K	C354	166-2201-50	22pF CH	C454	178-2255-79	2.2uF
C143	188-4763-37	16V 47uF	C355	166-2201-50	22pF CH	C455	168-1042-78	16V 0.1uF
C144	168-1022-55	1000pF K	C356	166-1007-50	10pF CH	C456	168-4712-55	470pF K
C145	168-1022-55	1000pF K	C357	166-1007-50	10pF CH	C457	178-2255-79	2.2uF
C146	178-1052-78	1uF	C358	166-2201-50	22pF CH	C458	178-2255-79	2.2uF
C150	163-3363-25	10V 33uF	C359	166-2201-50	22pF CH	C459	178-2255-79	2.2uF
C151	168-1042-78	16V 0.1uF	C361	166-1007-50	10pF CH	C460	166-1007-50	10pF CH
C152	168-2245-79	0.22uF Z	C362	163-1073-35	16V 100uF	C461	166-1811-50	180pF CH
C153	168-2222-55	2200pF K	C363	168-1042-78	16V 0.1uF	C462	166-1811-50	180pF CH
C154	168-3332-78	0.033uF K	C365	166-2201-50	22pF CH	C463	166-1007-50	10pF CH
C155	163-1053-65	50V 1uF	C366	166-2201-50	22pF CH	C464	166-1007-50	10pF CH
C156	168-1022-55	1000pF K	C367	166-1007-50	10pF CH	C465	166-1811-50	180pF CH
C157	168-1032-55	0.01uF K	C368	166-1007-50	10pF CH	C466	166-1811-50	180pF CH
C158	168-3332-78	0.033uF K	C369	166-2201-50	22pF CH	C467	166-1007-50	10pF CH
C159	168-3332-78	0.033uF K	C370	166-2201-50	22pF CH	C468	166-1007-50	10pF CH
C160	168-3932-78	0.039uF K	C373	163-1043-65	50V 0.1uF	C469	168-1022-55	1000pF K
C161	168-3932-78	0.039uF K	C374	163-1043-65	50V 0.1uF	C470	168-1022-55	1000pF K
C162	178-1052-78	1uF	C375	166-1811-50	180pF CH	C471	166-1811-50	180pF CH
C163	163-3353-65	50V 3.3uF	C376	166-1811-50	180pF CH	C472	166-1811-50	180pF CH
C164	168-3332-78	0.033uF K	C377	163-2263-15	6.3V 22uF	C473	166-1007-50	10pF CH
C165	168-6832-78	0.068uF K	C378	163-1073-35	16V 100uF	C474	166-1007-50	10pF CH
C166	168-3332-78	0.033uF K	C380	168-1042-38	50V 0.1uF	C475	166-1811-50	180pF CH
C167	168-3332-78	0.033uF K	C401	168-2732-55	16V 0.027uF K	C476	166-1811-50	180pF CH
C206	168-2232-55	0.022uF K	C402	168-2732-55	16V 0.027uF K	C477	166-1007-50	10pF CH
C207	188-4763-17	6.3V 47uF	C403	168-4732-78	0.047uF K	C478	166-1007-50	10pF CH
C208	168-1042-78	16V 0.1uF	C404	168-4732-78	0.047uF K	C479	168-1022-55	1000pF K
C209	168-1042-78	16V 0.1uF	C407	178-1052-78	1uF	C480	168-1022-55	1000pF K
C210	189-2273-29	10V 220uF	C408	178-1052-78	1uF	C481	166-1811-50	180pF CH
C212	168-1042-38	50V 0.1uF	C409	178-1052-78	1uF	C482	166-1811-50	180pF CH
C219	163-4763-35	16V 47uF	C410	178-1052-78	1uF	C483	166-1007-50	10pF CH
C301	166-2201-50	22pF CH	C411	042-1659-87	50V 2.2uF	C484	166-1007-50	10pF CH
C302	166-2201-50	22pF CH	C412	042-1659-87	50V 2.2uF	C485	166-1811-50	180pF CH
C303	163-1063-35	16V 10uF	C413	042-1659-87	50V 2.2uF	C486	166-1811-50	180pF CH

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C487	166-1007-50	10pF CH	D102	001-9003-90	HVU187TR	J703	074-1302-08	8P
C488	166-1007-50	10pF CH	D103	001-0516-90	MA111	J704	074-1010-10	14P
C489	168-1022-55	1000pF K	D104	001-0516-90	MA111	L101	010-2003-04	30uH(Variable)
C490	168-1022-55	1000pF K	D301	001-0516-90	MA111	L102	010-6009-76	22uH J
C491	166-1007-50	10pF CH	D302	001-1304-90	DAN202U	L103	010-2198-53	5.6uH
C492	166-1007-50	10pF CH	D501	001-0516-90	MA111	L104	010-2198-53	5.6uH
C493	166-1007-50	10pF CH	D502	001-0466-90	S5688B	L105	010-2312-52	0.27uH
C494	166-1007-50	10pF CH	D503	001-4301-25	HZU4.7B1	L107	010-6009-76	22uH J
C495	166-1007-50	10pF CH	D504	001-0504-36	HZS7A1L	L150	010-3407-75	120uH J
C496	166-1007-50	10pF CH	D601	001-0504-87	HZS333L	L301	010-3407-66	22uH J
C501	168-1032-55	0.01uF K	D602	001-0466-90	S5688B	L302	010-2285-58	1k ohm/100MHz
C502	168-1032-55	0.01uF K	D603	001-0466-90	S5688B	L303	010-2285-58	1k ohm/100MHz
C503	168-1042-78	16V 0.1uF	D604	001-0466-90	S5688B	L401	010-6009-76	22uH J
C504	188-1073-27	10V 100uF	D605	001-4301-39	HZU 6.8B3	L501	010-6009-76	22uH J
C505	168-1032-55	0.01uF K	D606	001-4301-42	HZU7.5B3	L502	010-3407-66	22uH J
C506	042-0559-00	5.5V 0.1F	D607	001-4301-18	HZU 3.6B1	L503	010-3407-66	22uH J
C507	163-1073-35	16V 100uF	D608	001-0347-69	MA4180M	L701	010-8028-00	COIL
C508	168-1042-78	16V 0.1uF	D609	001-0516-90	MA111	P401	076-0368-14	14P
C510	163-1063-35	16V 10uF	D701	001-4301-32	HZU 5.6B2	P402	076-0368-08	8P
C511	168-1032-55	0.01uF K	D702	001-4301-32	HZU 5.6B2	P501	076-0648-14	14P
C512	166-2201-50	22pF CH	D703	001-4301-32	HZU 5.6B2	P502	076-0648-14	14P
C513	166-2201-50	22pF CH	D704	001-4301-32	HZU 5.6B2	P503	076-0478-58	8P
C514	168-1042-78	16V 0.1uF	D705	001-0347-69	MA4180M	Q101	192-4116-00	2SC4116
C515	168-1032-55	0.01uF K	D706	001-0347-69	MA4180M	Q102	192-4116-00	2SC4116
C516	168-1042-78	16V 0.1uF	D707	001-0347-69	MA4180M	Q103	125-2027-91	DTC114EUA
C517	168-1022-55	1000pF K	D709	001-0466-90	S5688B	Q104	125-2027-91	DTC114EUA
C518	163-1053-65	50V 1uF	D710	001-2015-00	RL253	Q105	198-0208-00	2SK208
C519	168-1022-55	1000pF K	D712	001-0466-90	S5688B	Q106	190-1298-00	2SA1298
C521	168-1032-55	0.01uF K	D713	001-0466-90	S5688B	Q107	190-1298-00	2SA1298
C601	168-1042-38	50V 0.1uF	D715	001-0466-90	S5688B	Q108	125-0021-91	DTA114EUA
C602	189-1073-59	35V 100uF	D716	001-4301-68	HZU18B1	Q109	190-1298-00	2SA1298
C603	163-1063-65	50V 10uF	D717	001-4301-68	HZU18B1	Q111	192-4116-00	2SC4116
C604	189-4773-62	50V 470uF	IC101	051-4617-90	LA1061M-TE-L	Q112	192-4116-00	2SC4116
C605	189-4773-39	16V 470uF	IC102	051-3020-90	NJM4565V	Q113	192-4116-00	2SC4116
C606	168-1042-38	50V 0.1uF	IC103	051-6201-90	LC72146M	Q201	193-0601-00	2SD601A
C607	189-4773-39	16V 470uF	IC150	051-4618-90	HA12181FP-EL-E	Q202	192-4116-00	2SC4116
C608	168-1042-38	50V 0.1uF	IC201	051-3367-90	NJU7780U1-33-TE2	Q203	125-2027-91	DTC114EUA
C609	168-1042-38	50V 0.1uF	IC202	051-3334-00	NJM2396F09	Q204	125-0021-91	DTA114EUA
C610	168-1042-38	50V 0.1uF	IC301	051-6395-08	DIR1703/2K	Q205	125-2027-91	DTC114EUA
C611	168-1042-38	50V 0.1uF	IC302	051-6728-90	PCM1793DBR	Q206	198-3018-00	2SK3018
C612	168-1042-38	50V 0.1uF	IC303	051-3042-90	OPA2134UA	Q207	198-3018-00	2SK3018
C613	168-2232-55	0.022uF K	IC304	051-3042-90	OPA2134UA	Q208	125-0021-91	DTA114EUA
C614	168-2232-55	0.022uF K	IC305	051-3042-90	OPA2134UA	Q209	125-2027-91	DTC114EUA
C615	189-2273-39	16V 220uF	IC306	051-3367-90	NJU7780U1-33-TE2	Q350	125-2027-91	DTC114EUA
C616	168-1042-78	16V 0.1uF	IC307	051-3374-90	NJM2386DL3-05-TE1	Q351	190-1736-00	2SA1736
C617	042-1334-75	16V 47uF	IC350	051-3013-90	M5203AFP	Q352	192-4116-00	2SC4116
C618	163-1063-35	16V 10uF	IC351	051-3013-90	M5203AFP	Q353	125-2027-91	DTC114EUA
C619	163-1063-35	16V 10uF	IC352	051-0853-90	M5201FP	Q501	125-2027-91	DTC114EUA
C620	189-2273-39	16V 220uF	IC353	051-3369-00	NJM2388F84	Q502	190-1736-00	2SA1736
C621	188-4763-37	16V 47uF	IC401	051-5042-91	CL7639V11	Q503	125-2027-91	DTC114EUA
C703	168-1042-78	16V 0.1uF	IC402	051-5840-90	CL7688E10	Q504	192-4116-00	2SC4116
C704	172-1041-15	0.1uF	IC403	051-5840-90	CL7688E10	Q505	192-4116-00	2SC4116
C705	188-1053-68	50V 1uF	IC404	051-3010-90	NJM4580E	Q506	193-2118-50	2SD2118F5 R,S
C706	172-1041-15	0.1uF	IC405	051-3042-90	OPA2134UA	Q601	193-2118-00	2SD2118F5 Q,R,S
C707	042-1640-01	16V 4700uF	IC406	051-3042-90	OPA2134UA	Q602	190-1428-00	2SA1428
C709	168-1042-78	16V 0.1uF	IC407	051-3042-90	OPA2134UA	Q603	192-3668-00	2SC3668
C710	166-1011-50	100pF CH	IC408	051-3042-90	OPA2134UA	Q604	190-1428-00	2SA1428
C711	168-1032-55	0.01uF K	IC409	051-3042-90	OPA2134UA	Q605	192-3668-00	2SC3668
C712	188-1063-38	16V 10uF	IC410	051-3042-90	OPA2134UA	Q606	190-1428-00	2SA1428
CCT501	050-0140-54	1/32W 1k ohm x4J	IC501	052-3203-00	M30624MGP-D75GP	Q607	192-3668-00	2SC3668
CCT502	050-0140-54	1/32W 1k ohm x4J	IC503	051-6605-08	uPD72042BGT-E1	Q608	103-2012-00	D2012
CCT503	050-0140-54	1/32W 1k ohm x4J	IC504	051-9400-29	BR93L46F-W	Q609	193-2118-00	2SD2118F5 Q,R,S
CCT504	050-0140-54	1/32W 1k ohm x4J	IC505	051-6600-58	HA12187FP	Q611	103-1684-00	D1684
CCT505	050-0140-54	1/32W 1k ohm x4J	IC506	051-0869-58	NJM2103M	Q612	190-1162-00	2SA1162
CCT507	050-0140-54	1/32W 1k ohm x4J	IC601	051-0172-08	TC4011BF	Q613	125-2027-91	DTC114EUA
CCT508	050-0140-54	1/32W 1k ohm x4J	J201	074-1228-69	19P	Q614	125-2027-91	DTC114EUA
CCT509	050-0140-54	1/32W 1k ohm x4J	J701	074-0895-20	20P	Q701	190-1162-00	2SA1162
D101	001-9003-90	HVU187TR	J702	074-1194-00	13P	Q702	125-2027-91	DTC114EUA

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
Q703	192-4116-00	2SC4116	R160	119-4731-15	1/10W 47k ohm	R371	119-4731-15	1/10W 47k ohm
Q704	190-1162-00	2SA1162	R161	119-4731-15	1/10W 47k ohm	R372	119-4731-15	1/10W 47k ohm
Q705	125-2027-91	DTC114EUA	R162	119-1031-15	1/10W 10k ohm	R373	119-4731-15	1/10W 47k ohm
Q706	192-4116-00	2SC4116	R163	119-1031-15	1/10W 10k ohm	R374	119-1021-15	1/10W 1k ohm
Q709	192-4116-00	2SC4116	R164	119-4731-15	1/10W 47k ohm	R375	119-8211-15	1/10W 820 ohm
Q710	190-1162-00	2SA1162	R165	119-2231-15	1/10W 22k ohm	R376	119-3321-15	1/10W 3.3k ohm
Q711	125-2027-91	DTC114EUA	R203	119-1021-15	1/10W 1k ohm	R377	119-1031-15	1/10W 10k ohm
Q712	192-4116-00	2SC4116	R204	119-3331-15	1/10W 33k ohm	R378	119-1031-15	1/10W 10k ohm
Q713	192-4116-00	2SC4116	R205	119-4731-15	1/10W 47k ohm	R379	116-2221-15	1/4W 2.2k ohm
Q716	190-1736-00	2SA1736	R206	119-4731-15	1/10W 47k ohm	R380	116-1021-15	1/4W 1k ohm
Q717	192-4116-00	2SC4116	R207	119-1041-15	1/10W 100k ohm	R381	116-1021-15	1/4W 1k ohm
Q719	192-4116-00	2SC4116	R208	119-3331-15	1/10W 33k ohm	R382	119-4731-15	1/10W 47k ohm
Q720	190-1048-00	2SA1048	R209	119-0000-05	1/10W 0 ohm JW	R383	119-3331-15	1/10W 33k ohm
Q721	192-2873-00	2SC2873	R210	119-4721-15	1/10W 4.7k ohm	R384	119-3331-15	1/10W 33k ohm
Q722	190-1736-00	2SA1736	R211	119-3331-15	1/10W 33k ohm	R385	119-4731-15	1/10W 47k ohm
Q723	192-4116-00	2SC4116	R212	119-4721-15	1/10W 4.7k ohm	R401	119-1021-15	1/10W 1k ohm
R101	119-0000-05	1/10W 0 ohm JW	R301	119-0000-05	1/10W 0 ohm JW	R402	119-1021-15	1/10W 1k ohm
R103	119-2221-15	1/10W 2.2k ohm	R303	119-1021-15	1/10W 1k ohm	R403	119-1021-15	1/10W 1k ohm
R104	119-1041-15	1/10W 100k ohm	R305	119-0000-05	1/10W 0 ohm JW	R404	119-1021-15	1/10W 1k ohm
R105	119-2221-15	1/10W 2.2k ohm	R306	119-1051-15	1/10W 1M ohm	R407	119-1021-15	1/10W 1k ohm
R106	119-3311-15	1/10W 330 ohm	R307	119-1221-15	1/10W 1.2k ohm	R408	119-1021-15	1/10W 1k ohm
R107	119-2221-15	1/10W 2.2k ohm	R309	119-0000-05	1/10W 0 ohm JW	R409	119-1021-15	1/10W 1k ohm
R108	119-2231-15	1/10W 22k ohm	R310	119-0000-05	1/10W 0 ohm JW	R410	119-1021-15	1/10W 1k ohm
R109	119-5121-15	1/10W 5.1k ohm	R311	119-1031-15	1/10W 10k ohm	R411	119-5631-15	1/10W 56k ohm
R111	116-1001-15	1/4W 10 ohm	R312	119-0000-05	1/10W 0 ohm JW	R412	119-5631-15	1/10W 56k ohm
R112	119-1041-15	1/10W 100k ohm	R316	119-0000-05	1/10W 0 ohm JW	R413	119-5631-15	1/10W 56k ohm
R113	119-1041-15	1/10W 100k ohm	R318	119-2201-15	1/10W 22 ohm	R414	119-5631-15	1/10W 56k ohm
R114	119-4741-15	1/10W 470k ohm	R319	119-2201-15	1/10W 22 ohm	R417	119-1031-15	1/10W 10k ohm
R115	119-5641-15	1/10W 560k ohm	R320	119-2201-15	1/10W 22 ohm	R418	119-1031-15	1/10W 10k ohm
R116	119-3341-15	1/10W 330k ohm	R321	119-1811-15	1/10W 180 ohm	R419	119-6811-15	1/10W 680 ohm
R117	119-5631-15	1/10W 56k ohm	R322	032-0140-54	1/10W 22k ohm F	R420	119-6811-15	1/10W 680 ohm
R118	119-1021-15	1/10W 1k ohm	R323	032-0140-54	1/10W 22k ohm F	R421	119-1051-15	1/10W 1M ohm
R119	119-1021-15	1/10W 1k ohm	R324	032-0140-54	1/10W 22k ohm F	R422	119-1051-15	1/10W 1M ohm
R120	119-1031-15	1/10W 10k ohm	R325	032-0140-54	1/10W 22k ohm F	R423	119-6811-15	1/10W 680 ohm
R121	119-4741-15	1/10W 470k ohm	R326	032-0140-54	1/10W 22k ohm F	R424	119-6811-15	1/10W 680 ohm
R122	119-1011-15	1/10W 100 ohm	R327	032-0140-54	1/10W 22k ohm F	R425	119-1031-15	1/10W 10k ohm
R123	119-1021-15	1/10W 1k ohm	R328	032-0140-54	1/10W 22k ohm F	R426	119-1031-15	1/10W 10k ohm
R124	119-2231-15	1/10W 22k ohm	R329	032-0140-54	1/10W 22k ohm F	R427	119-1231-15	1/10W 12k ohm
R125	119-4731-15	1/10W 47k ohm	R330	032-0140-54	1/10W 22k ohm F	R428	119-2241-15	1/10W 220k ohm
R126	119-1031-15	1/10W 10k ohm	R331	032-0140-54	1/10W 22k ohm F	R429	119-1021-15	1/10W 1k ohm
R127	119-1031-15	1/10W 10k ohm	R332	032-0140-54	1/10W 22k ohm F	R430	119-1231-15	1/10W 12k ohm
R128	119-2231-15	1/10W 22k ohm	R333	032-0140-54	1/10W 22k ohm F	R431	119-2241-15	1/10W 220k ohm
R129	119-4711-15	1/10W 470 ohm	R334	119-1021-15	1/10W 1k ohm	R432	119-1021-15	1/10W 1k ohm
R130	119-4721-15	1/10W 4.7k ohm	R335	119-4731-15	1/10W 47k ohm	R433	119-1031-15	1/10W 10k ohm
R131	119-3321-15	1/10W 3.3k ohm	R336	119-4731-15	1/10W 47k ohm	R434	119-1031-15	1/10W 10k ohm
R132	119-2221-15	1/10W 2.2k ohm	R337	119-1021-15	1/10W 1k ohm	R435	119-3321-15	1/10W 3.3k ohm
R133	119-1021-15	1/10W 1k ohm	R338	119-1021-15	1/10W 1k ohm	R436	119-1021-15	1/10W 1k ohm
R135	119-5631-15	1/10W 56k ohm	R339	119-1021-15	1/10W 1k ohm	R437	119-3321-15	1/10W 3.3k ohm
R136	119-4731-15	1/10W 47k ohm	R340	119-4731-15	1/10W 47k ohm	R438	119-1021-15	1/10W 1k ohm
R138	119-2221-15	1/10W 2.2k ohm	R350	032-0140-50	1/10W 10k ohm F	R439	119-5621-15	1/10W 5.6k ohm
R139	119-1031-15	1/10W 10k ohm	R351	032-0140-50	1/10W 10k ohm F	R440	119-5621-15	1/10W 5.6k ohm
R140	119-1031-15	1/10W 10k ohm	R352	032-0140-50	1/10W 10k ohm F	R441	119-4731-15	1/10W 47k ohm
R141	119-2221-15	1/10W 2.2k ohm	R353	119-1531-15	1/10W 15k ohm	R442	119-4731-15	1/10W 47k ohm
R142	119-2221-15	1/10W 2.2k ohm	R354	119-1531-15	1/10W 15k ohm	R443	119-1021-15	1/10W 1k ohm
R143	119-1031-15	1/10W 10k ohm	R355	119-1531-15	1/10W 15k ohm	R444	119-1021-15	1/10W 1k ohm
R144	119-4731-15	1/10W 47k ohm	R356	032-0140-50	1/10W 10k ohm F	R445	119-1021-15	1/10W 1k ohm
R145	119-1821-15	1/10W 1.8k ohm	R357	119-1531-15	1/10W 15k ohm	R446	119-1021-15	1/10W 1k ohm
R146	119-3921-15	1/10W 3.9k ohm	R358	119-1531-15	1/10W 15k ohm	R447	119-3321-15	1/10W 3.3k ohm
R147	119-1521-15	1/10W 1.5k ohm	R359	032-0140-50	1/10W 10k ohm F	R448	119-1021-15	1/10W 1k ohm
R148	119-0000-05	1/10W 0 ohm JW	R360	032-0140-50	1/10W 10k ohm F	R449	119-3321-15	1/10W 3.3k ohm
R150	119-1041-15	1/10W 100k ohm	R361	032-0140-50	1/10W 10k ohm F	R450	119-1021-15	1/10W 1k ohm
R151	119-4731-15	1/10W 47k ohm	R362	032-0140-50	1/10W 10k ohm F	R451	119-6821-15	1/10W 6.8k ohm
R152	119-1231-15	1/10W 12k ohm	R363	119-1531-15	1/10W 15k ohm	R452	119-6821-15	1/10W 6.8k ohm
R153	119-2731-15	1/10W 27k ohm	R364	119-1531-15	1/10W 15k ohm	R453	119-4731-15	1/10W 47k ohm
R154	119-1841-15	1/10W 180k ohm	R365	119-1531-15	1/10W 15k ohm	R454	119-4731-15	1/10W 47k ohm
R155	119-5621-15	1/10W 5.6k ohm	R366	119-4731-15	1/10W 47k ohm	R455	119-1021-15	1/10W 1k ohm
R156	119-1821-15	1/10W 1.8k ohm	R369	119-5631-15	1/10W 56k ohm	R456	119-1021-15	1/10W 1k ohm
R157	119-1821-15	1/10W 1.8k ohm	R370	119-5631-15	1/10W 56k ohm	R457	119-1021-15	1/10W 1k ohm

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R458	119-1021-15	1/10W 1k ohm	R546	119-4731-15	1/10W 47k ohm	R729	111-1211-94	1/4W 120 ohm
R459	119-3321-15	1/10W 3.3k ohm	R547	119-2231-15	1/10W 22k ohm	R730	119-2231-15	1/10W 22k ohm
R460	119-1021-15	1/10W 1k ohm	R548	119-2231-15	1/10W 22k ohm	R731	119-2231-15	1/10W 22k ohm
R461	119-3321-15	1/10W 3.3k ohm	R549	119-1031-15	1/10W 10k ohm	R732	111-1211-94	1/4W 120 ohm
R462	119-1021-15	1/10W 1k ohm	R550	119-1021-15	1/10W 1k ohm	R733	111-6801-94	1/4W 68 ohm
R463	119-6821-15	1/10W 6.8k ohm	R551	119-6821-15	1/10W 6.8k ohm	R734	119-4731-15	1/10W 47k ohm
R464	119-6821-15	1/10W 6.8k ohm	R601	111-2221-94	1/4W 2.2k ohm	R735	119-1031-15	1/10W 10k ohm
R465	119-4731-15	1/10W 47k ohm	R602	119-5631-15	1/10W 56k ohm	R736	119-4731-15	1/10W 47k ohm
R466	119-4731-15	1/10W 47k ohm	R603	111-2721-88	1/2W 2.7k ohm	R738	111-5621-94	1/4W 5.6k ohm
R467	119-1021-15	1/10W 1k ohm	R604	111-1521-94	1/4W 1.5k ohm	R748	119-3321-15	1/10W 3.3k ohm
R468	119-1021-15	1/10W 1k ohm	R605	111-1521-94	1/4W 1.5k ohm	R749	117-1031-15	1/8W 10k ohm
R469	116-2291-15	1/4W 2.2 ohm	R606	111-1521-94	1/4W 1.5k ohm	R750	116-2221-15	1/4W 2.2k ohm
R501	119-4731-15	1/10W 47k ohm	R607	119-1231-15	1/10W 12k ohm	R751	119-1031-15	1/10W 10k ohm
R509	119-4721-15	1/10W 4.7k ohm	R608	119-1231-15	1/10W 12k ohm	R752	116-2221-15	1/4W 2.2k ohm
R511	119-4721-15	1/10W 4.7k ohm	R609	119-4731-15	1/10W 47k ohm	R753	119-1021-15	1/10W 1k ohm
R512	119-4721-15	1/10W 4.7k ohm	R610	119-4731-15	1/10W 47k ohm	R757	119-4731-15	1/10W 47k ohm
R513	119-1041-15	1/10W 100k ohm	R611	116-1021-15	1/4W 1k ohm	R758	119-2231-15	1/10W 22k ohm
R514	119-4731-15	1/10W 47k ohm	R612	116-1021-15	1/4W 1k ohm	R759	119-3331-15	1/10W 33k ohm
R516	119-4731-15	1/10W 47k ohm	R613	119-4711-15	1/10W 470 ohm	R760	119-3321-15	1/10W 3.3k ohm
R517	119-4731-15	1/10W 47k ohm	R614	116-5621-15	1/4W 5.6k ohm	R761	119-2221-15	1/10W 2.2k ohm
R518	119-4721-15	1/10W 4.7k ohm	R615	119-1031-15	1/10W 10k ohm	R762	119-1031-15	1/10W 10k ohm
R519	119-4721-15	1/10W 4.7k ohm	R701	119-2231-15	1/10W 22k ohm	R763	111-4721-94	1/4W 4.7k ohm
R520	119-4721-15	1/10W 4.7k ohm	R702	119-2231-15	1/10W 22k ohm	R765	111-1031-94	1/4W 10k ohm
R521	119-4721-15	1/10W 4.7k ohm	R703	119-1041-15	1/10W 100k ohm	R766	119-1031-15	1/10W 10k ohm
R522	119-4721-15	1/10W 4.7k ohm	R704	119-1021-15	1/10W 1k ohm	R767	116-2221-15	1/4W 2.2k ohm
R523	032-0140-24	1/10W 82 ohm F	R705	119-1021-15	1/10W 1k ohm	R768	119-1031-15	1/10W 10k ohm
R524	032-0140-11	1/10W 300 ohm F	R706	119-4731-15	1/10W 47k ohm	R769	116-2221-15	1/4W 2.2k ohm
R525	119-1031-15	1/10W 10k ohm	R707	119-4731-15	1/10W 47k ohm	R770	119-0000-05	1/10W 0 ohm JW
R526	119-1031-15	1/10W 10k ohm	R708	119-4731-15	1/10W 47k ohm	SUP101	060-0122-91	SURGE-PROTECTOR
R527	119-1031-15	1/10W 10k ohm	R709	119-1021-15	1/10W 1k ohm	TP201	073-0710-00	TERMINAL
R528	119-1041-15	1/10W 100k ohm	R710	119-2231-15	1/10W 22k ohm	TH802	002-0318-01	1206L035YRT
R529	119-1041-15	1/10W 100k ohm	R711	119-2231-15	1/10W 22k ohm	TM101	073-0762-90	TERMINAL
R530	119-1021-15	1/10W 1k ohm	R712	119-1021-15	1/10W 1k ohm	TM201	073-0762-90	TERMINAL
R531	119-1031-15	1/10W 10k ohm	R713	119-1041-15	1/10W 100k ohm	TM501	073-0762-90	TERMINAL
R532	116-1001-15	1/4W 10 ohm	R714	119-4731-15	1/10W 47k ohm	TM701	073-0762-90	TERMINAL
R534	119-0000-05	1/10W 0 ohm JW	R715	119-4731-15	1/10W 47k ohm	TM702	073-0762-90	TERMINAL
R535	119-4721-15	1/10W 4.7k ohm	R716	119-1021-15	1/10W 1k ohm	VR101	012-6004-59	47k ohm B VR
R536	119-4721-15	1/10W 4.7k ohm	R719	119-1021-15	1/10W 1k ohm	VR102	012-6004-59	47k ohm B VR
R537	119-4731-15	1/10W 47k ohm	R720	119-4731-15	1/10W 47k ohm	Z500	073-0785-90	TERMINAL
R538	119-4731-15	1/10W 47k ohm	R721	119-4731-15	1/10W 47k ohm	X121	061-1066-00	7.2MHZ
R539	119-6831-15	1/10W 68k ohm	R722	119-4731-15	1/10W 47k ohm	X301	061-3051-00	16.92MHZ
R540	119-3341-15	1/10W 330k ohm	R723	119-1021-15	1/10W 1k ohm	X401	060-1550-90	4.023MHz
R541	032-0140-22	1/10W 68k ohm F	R724	119-2231-15	1/10W 22k ohm	X402	060-1550-90	4.023MHz
R542	032-0140-00	1/10W 56k ohm F	R725	119-2231-15	1/10W 22k ohm	X501	060-1533-90	10MHz
R543	119-4731-15	1/10W 47k ohm	R726	111-1811-94	1/4W 180 ohm	X502	061-3039-00	6.29MHZ
R544	119-5621-15	1/10W 5.6k ohm	R727	111-1811-94	1/4W 180 ohm	PWB	039-2874-01	PWB(WITHOUT COMPONENT)
R545	119-1021-15	1/10W 1k ohm	R728	111-1211-94	1/4W 120 ohm			

Sub PWB(B2) section


REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C801	042-1659-67	16V 10uF	D801	001-4305-32	UDZSTE-17 18B	R805	111-1001-98	1/4W 10 ohm
C802	042-1659-67	16V 10uF	D802	001-4305-32	UDZSTE-17 18B	R806	111-1001-98	1/4W 10 ohm
C803	042-1659-67	16V 10uF	D803	001-4305-32	UDZSTE-17 18B	R807	111-1001-98	1/4W 10 ohm
C804	042-1659-67	16V 10uF	D804	001-4305-32	UDZSTE-17 18B	R808	111-1001-98	1/4W 10 ohm
C807	042-1659-71	16V 100uF	D805	001-4305-32	UDZSTE-17 18B	R809	111-1001-98	1/4W 10 ohm
C808	042-1659-71	16V 100uF	D806	001-4305-32	UDZSTE-17 18B	R810	111-1001-98	1/4W 10 ohm
C809	042-1659-71	16V 100uF	D807	001-4305-32	UDZSTE-17 18B	R811	111-1001-98	1/4W 10 ohm
C810	042-1659-71	16V 100uF	D808	001-4305-32	UDZSTE-17 18B	R812	111-1001-98	1/4W 10 ohm
C811	042-1659-71	16V 100uF	D809	001-4305-32	UDZSTE-17 18B	R813	111-1001-98	1/4W 10 ohm
C812	042-1659-71	16V 100uF	D810	001-4305-32	UDZSTE-17 18B	R814	111-1001-98	1/4W 10 ohm
C813	042-1659-71	16V 100uF	D811	001-4305-32	UDZSTE-17 18B	R815	111-1001-98	1/4W 10 ohm
C814	042-1659-71	16V 100uF	D812	001-4305-32	UDZSTE-17 18B	R816	111-1001-98	1/4W 10 ohm
C815	042-1659-71	16V 100uF	D813	001-0466-90	S5688B	PWB	039-2875-00	PWB(WITHOUT COMPONENT)
C816	042-1659-71	16V 100uF	D814	001-0466-90	S5688B			
C817	042-1659-71	16V 100uF	J801	074-0898-08	8P			
C818	042-1659-71	16V 100uF	J802	074-0898-14	14P			

Switch PWB(B3) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	043-0328-90	50V 0.1uF	D50	001-7048-91	RFR1112H-22C,D	R26	119-2031-15	1/10W 20kohm
C2	168-1022-55	1000pF	D51	001-7048-91	RFR1112H-22C,D	R27	119-2031-15	1/10W 20kohm
C3	168-1042-78	16V 0.1uF	D52	001-7048-91	RFR1112H-22C,D	R28	119-2031-15	1/10W 20kohm
C4	168-1042-78	16V 0.1uF	D53	001-7048-91	RFR1112H-22C,D	R29	119-4321-15	1/10W 4.3kohm
C5	168-1042-78	16V 0.1uF	D54	001-7048-91	RFR1112H-22C,D	R30	119-5621-15	1/10W 5.6kohm
C6	168-1022-55	1000pF	D55	001-7048-91	RFR1112H-22C,D	R31	119-3021-15	1/10W 3kohm
C7	043-0328-90	50V 0.1uF	D56	001-7048-91	RFR1112H-22C,D	R32	119-2221-15	1/10W 2.2kohm
C8	178-1052-78	10V 1uF	D57	001-7048-91	RFR1112H-22C,D	R33	119-3321-15	1/10W 3.3kohm
C9	178-2242-78	0.22uF	D58	001-7048-91	RFR1112H-22C,D	R34	119-2721-15	1/10W 2.7kohm
D1	001-2403-90	M1F60	D59	001-7048-91	RFR1112H-22C,D	R35	119-3321-15	1/10W 3.3kohm
D2	001-2403-90	M1F60	D60	001-7048-91	RFR1112H-22C,D	R36	119-3621-15	1/10W 3.6kohm
D3	001-2403-90	M1F60	D61	001-7048-91	RFR1112H-22C,D	R37	119-3321-15	1/10W 3.3kohm
D7	001-0516-90	MA111	FL1	379-4059-20	VFD	R38	119-3621-15	1/10W 3.6kohm
D9	001-2601-90	MA728	IC1	051-6642-08	LC75700T	R39	119-3321-15	1/10W 3.3kohm
D10	001-2403-90	M1F60	IC2	051-6024-00	LC75833W	R40	119-2721-15	1/10W 2.7kohm
D11	001-7040-93	NSCB100A	IC3	051-6059-10	ML9203-06GA	R41	119-3321-15	1/10W 3.3kohm
D12	001-7040-93	NSCB100A	J1	074-3013-64	14P	R42	119-2721-15	1/10W 2.7kohm
D17	001-7048-91	RFR1112H-22C,D	J2	074-3013-64	14P	R43	119-1031-15	1/10W 10kohm
D18	001-7048-91	RFR1112H-22C,D	L1	010-3407-66	22uH	R44	119-2221-15	1/10W 2.2kohm
D19	001-7048-91	RFR1112H-22C,D	L2	010-3407-66	22uH	R45	119-2221-15	1/10W 2.2kohm
D20	001-7048-91	RFR1112H-22C,D	L3	010-3407-66	22uH	R46	119-1221-15	1/10W 1.2kohm
D21	001-7048-91	RFR1112H-22C,D	Q1	125-2027-91	DTC114EUA	R47	119-1221-15	1/10W 1.2kohm
D22	001-7048-91	RFR1112H-22C,D	Q2	192-2873-00	2SC2873	R48	119-1031-15	1/10W 10kohm
D23	001-7048-91	RFR1112H-22C,D	Q3	192-4116-00	2SC4116	R49	119-4721-15	1/10W 4.7kohm
D24	001-7048-91	RFR1112H-22C,D	Q4	192-4116-00	2SC4116	R50	119-1221-15	1/10W 1.2kohm
D25	001-7048-91	RFR1112H-22C,D	Q5	192-4116-00	2SC4116	R51	119-1221-15	1/10W 1.2kohm
D26	001-7048-91	RFR1112H-22C,D	Q6	192-4116-00	2SC4116	R52	119-1031-15	1/10W 10kohm
D27	001-7048-91	RFR1112H-22C,D	Q7	192-4116-00	2SC4116	R53	119-4721-15	1/10W 4.7kohm
D28	001-7048-91	RFR1112H-22C,D	Q8	192-4116-00	2SC4116	R54	119-1221-15	1/10W 1.2kohm
D29	001-7048-91	RFR1112H-22C,D	R1	119-1031-15	1/10W 10kohm	R55	119-1221-15	1/10W 1.2kohm
D30	001-7048-91	RFR1112H-22C,D	R2	119-1021-15	1/10W 1kohm	R56	119-1031-15	1/10W 10kohm
D31	001-7048-91	RFR1112H-22C,D	R3	119-3931-15	1/10W 39kohm	R57	119-4721-15	1/10W 4.7kohm
D32	001-7048-91	RFR1112H-22C,D	R4	119-3931-15	1/10W 39kohm	R58	119-1221-15	1/10W 1.2kohm
D33	001-7048-91	RFR1112H-22C,D	R5	119-1531-15	1/10W 15kohm	R59	119-1221-15	1/10W 1.2kohm
D34	001-7048-91	RFR1112H-22C,D	R6	119-1531-15	1/10W 15kohm	R60	119-1031-15	1/10W 10kohm
D35	001-7048-91	RFR1112H-22C,D	R11	119-3021-15	1/10W 3kohm	R61	119-4721-15	1/10W 4.7kohm
D36	001-7048-91	RFR1112H-22C,D	R12	119-2221-15	1/10W 2.2kohm	R62	119-1221-15	1/10W 1.2kohm
D37	001-7048-91	RFR1112H-22C,D	R13	119-3921-15	1/10W 3.9kohm	R63	119-1221-15	1/10W 1.2kohm
D38	001-7048-91	RFR1112H-22C,D	R14	119-3621-15	1/10W 3.6kohm	R64	119-1031-15	1/10W 10kohm
D39	001-7048-91	RFR1112H-22C,D	R15	119-3021-15	1/10W 3kohm	R65	119-4721-15	1/10W 4.7kohm
D40	001-7048-91	RFR1112H-22C,D	R16	119-3021-15	1/10W 3kohm	R66	119-1221-15	1/10W 1.2kohm
D41	001-7048-91	RFR1112H-22C,D	R17	119-3921-15	1/10W 3.9kohm	R67	119-1221-15	1/10W 1.2kohm
D42	001-7048-91	RFR1112H-22C,D	R18	119-3621-15	1/10W 3.6kohm	R68	119-1031-15	1/10W 10kohm
D43	001-7048-91	RFR1112H-22C,D	R19	119-2031-15	1/10W 20kohm	R69	119-4721-15	1/10W 4.7kohm
D44	001-7048-91	RFR1112H-22C,D	R20	119-2031-15	1/10W 20kohm	TM2	073-0778-90	TERMINAL
D45	001-7048-91	RFR1112H-22C,D	R21	119-2031-15	1/10W 20kohm	VR1	016-0025-08	VR W/SHAFT
D46	001-7048-91	RFR1112H-22C,D	R22	119-2031-15	1/10W 20kohm	VR2	016-0025-07	VR W/SHAFT
D47	001-7048-91	RFR1112H-22C,D	R23	119-4321-15	1/10W 4.3kohm	X1	060-1550-90	4.023MHz
D48	001-7048-91	RFR1112H-22C,D	R24	119-5621-15	1/10W 5.6kohm	PWB	039-2876-00	PWB(WITHOUT COMPONENT)
D49	001-7048-91	RFR1112H-22C,D	R25	119-2031-15	1/10W 20kohm			

EXPLODED VIEW / PARTS LIST

Main section

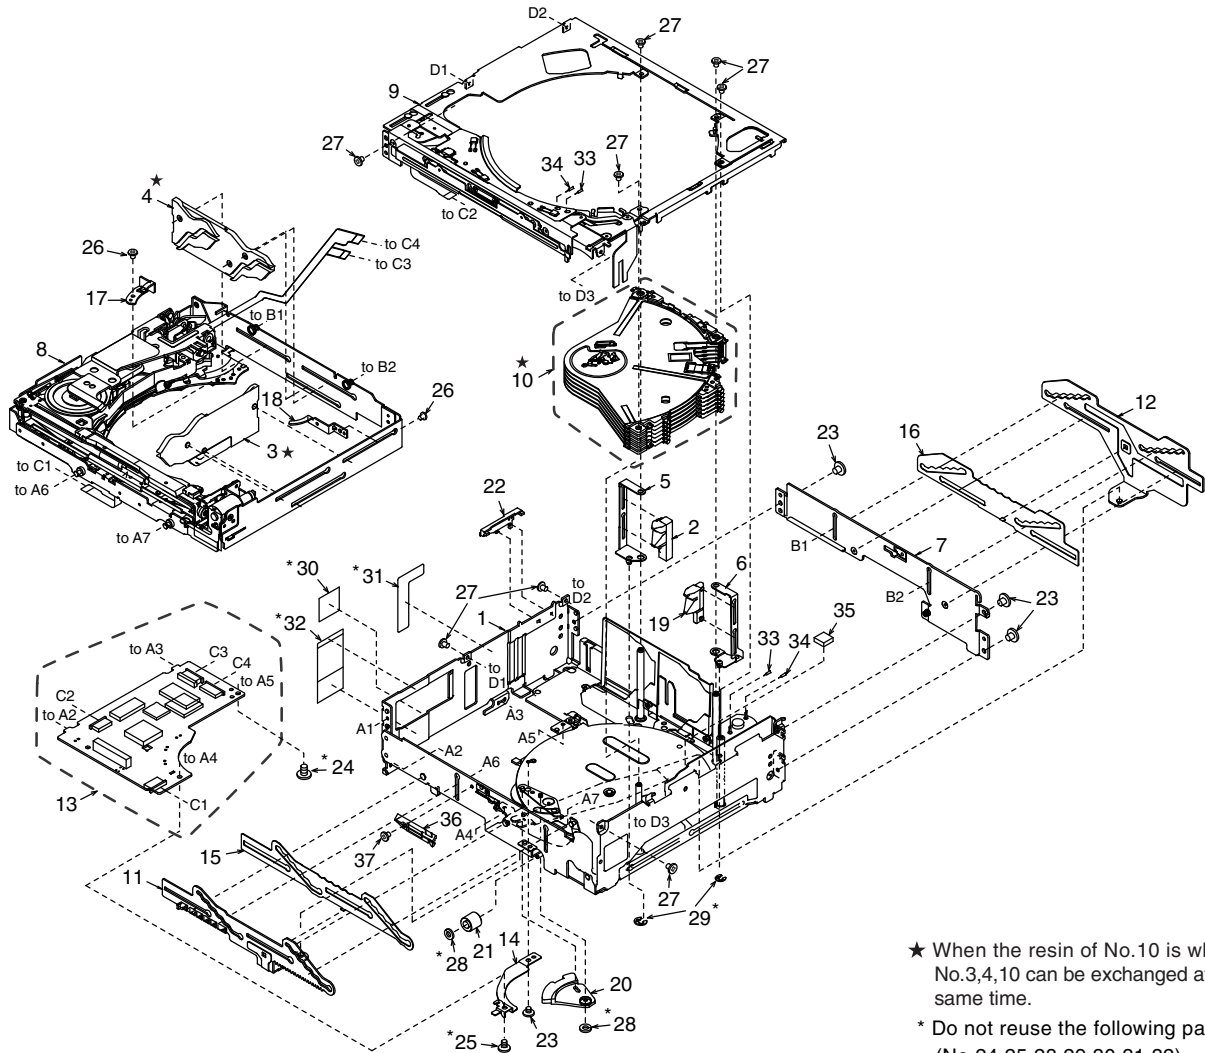


★ When the resin of No.10 is white,
No.3,4,10 can be exchanged at the
same time.

* Do not reuse the following parts.
(No.24,25,28,29,30,31,32)

NO.	PART NO.	DESCRIPTION	Q'TY
1	966-1756-28	LOWER UNIT ASSY	1
2	966-0667-21	DISC STP-ASSY L	1
3	HBS-586-100	DH-SEL-ASSY S	1
4	HBS-587-100	DH-SEL-ASSY R	1
5	966-0670-22	DS-SP-ASSY L	1
6	966-1760-21	DS-SP-ASSY R	1
7	966-0672-21	REAR-P-ASSY	1
8	966-1753-91	N-DRIVE-CH UNIT	1
9	966-1764-21	UPPER UNIT ASSY	1
10	HBS-566-200	DISC HOLDER UNIT	1
11	966-1771-21	SLIDE-P-ASSY F	1
12	966-0709-21	SLIDE-P-ASSY	1
13	HBS-564-100	CD-PWB-ASSY	1
14	620-1640-20	SW-H-PLATE	1
15	620-1778-20	GAP PLATE F	1
16	620-1662-21	GAP PLATE R	1
17	620-1685-21	DS-PLATE L	1
18	620-1686-20	DS-PLATE R	1
19	621-1760-21	DISC STOPPER R	1

NO.	PART NO.	DESCRIPTION	Q'TY
20	621-1636-24	SW LINK	1
21	621-1765-20	UD-GEAR-D	1
22	621-1715-20	FPC-STOPPER	1
23	716-1850-01	SCREW(M2.0x2.0)	4
24	716-1850-02	SCREW(M2.0x2.0)	1
25	716-1851-02	SCREW(M2.0x3.0)	1
26	716-3450-00	SCREW(M1.7x2.0)	2
27	716-3451-01	SCREW(M1.7x2.5)	8
28	746-0761-00	WASHER(phi1.6)	2
29	744-0045-01	C-RING	2
30	347-7271-00	FPC SHEET	1
31	347-7275-00	PROTECT SHEET	1
32	347-7276-00	FPC-SHEET C	1
33	800-4921-60	VINYL-COAT-WIRE	1
34	802-4921-60	VINYL-COAT-WIRE	1
35	345-5824-00	RUBBER PART	1
36	621-1763-20	LOADING GUIDE B	1
37	716-1859-01	IT SCREW(M1.7 x 2)	1


Lower unit assy section

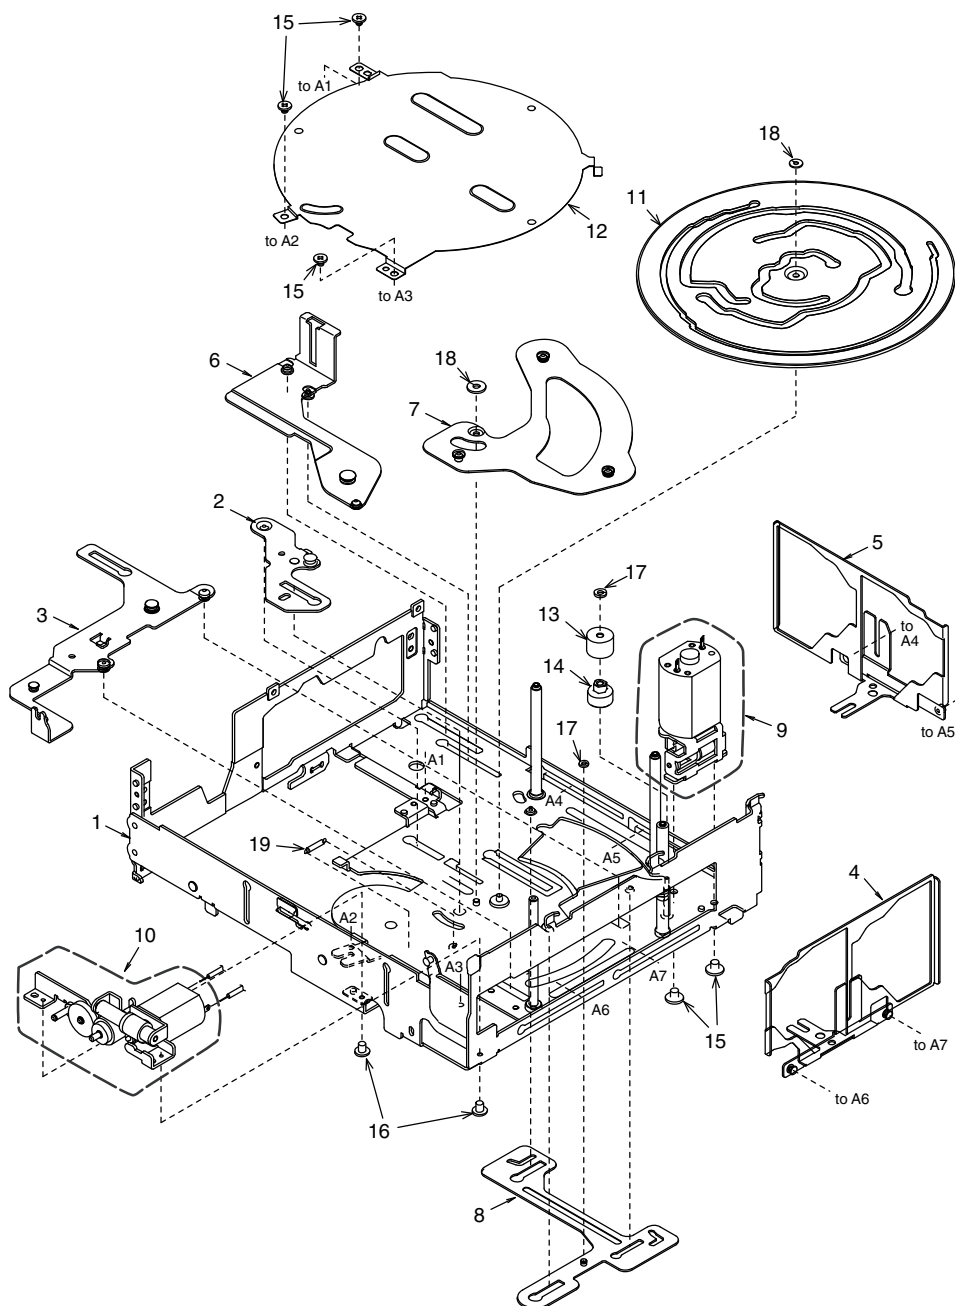

NO.	PART NO.	DESCRIPTION	Q'TY
1	966-1757-25	LOWER-C-ASSY	1
2	966-0658-22	DH-SP-ASSY A	1
3	966-1758-20	DS-SP-ASSY A	1
4	966-0660-22	DH-SP-ASSY S	1
5	966-0661-22	DH-SP-ASSY R	1
6	966-0677-23	D-SHT PL-B-ASSY	1
7	966-0659-22	DH-SP-ASSY B	1
8	966-1759-20	DS-SP-ASSY B	1
9	HBS-546-100	M-MTR SUB ASSY	1
10	HBS-568-100	UD-MOTOR-ASSY	1

NO.	PART NO.	DESCRIPTION	Q'TY
11	620-1771-22	CAM GEAR	1
12	620-1624-24	GEAR COVER	1
13	621-0732-21	M-GEAR B	1
14	621-0733-20	M-GEAR C	1
15	716-1850-01	SCREW(M2.0x2.0)	3
16	716-3451-01	SCREW(M1.7x2.5)	2
17	746-0761-00	WASHER	2
18	746-0768-00	WASHER	2
19	750-6756-00	SW-L-SPRING	1


N-Drive-CH unit section

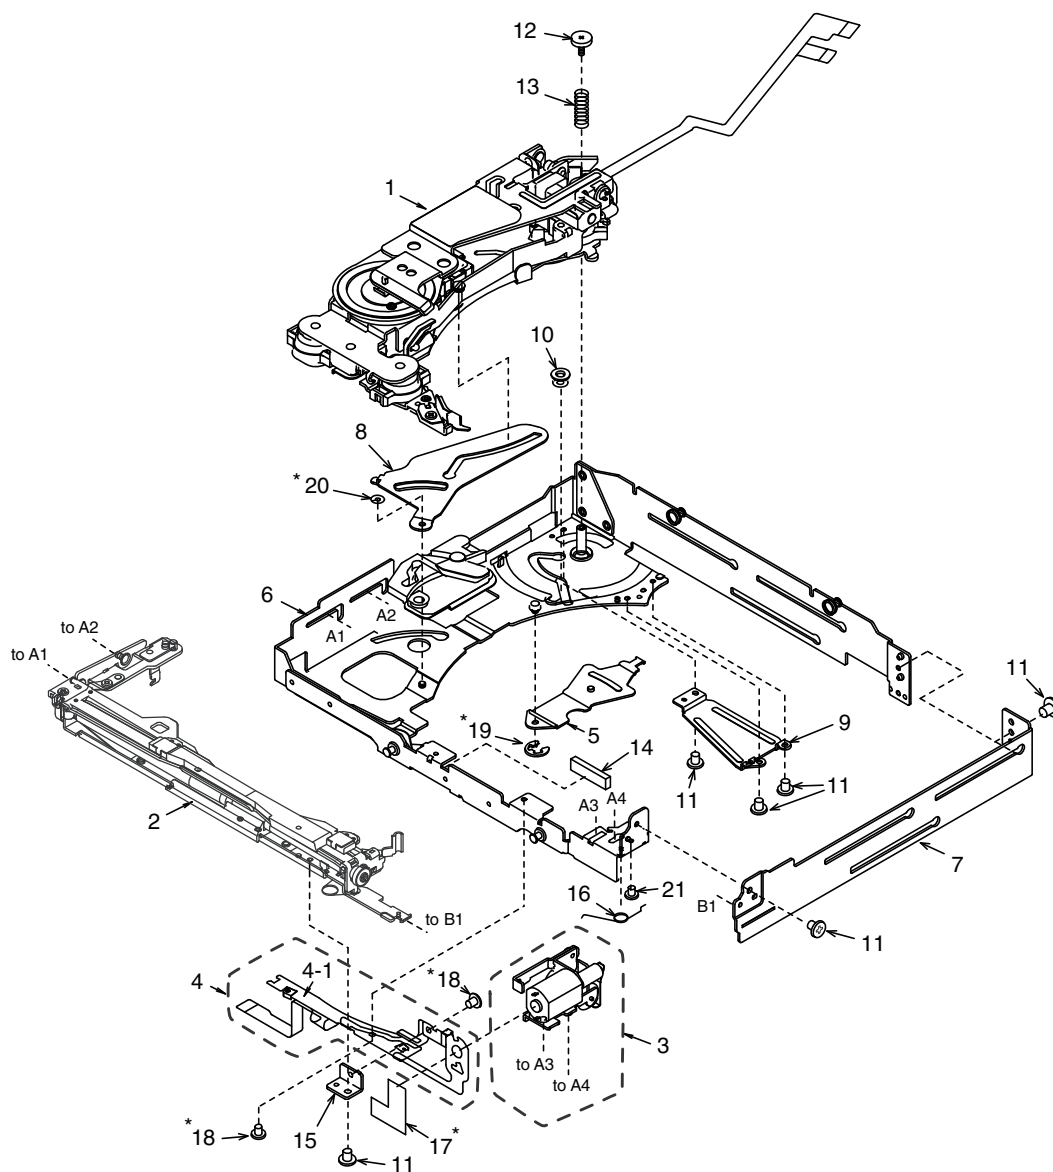

* Do not reuse the following parts.
(No.17,18,19,20)

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-565-100	N-DRIVE UNIT	1	11	716-3450-00	SCREW(M1.7x2.0)	6
2	HBS-567-100	LOADING-U-ASSY	1	12	716-3459-01	SCREW(M1.7x2.0)	1
3	HBS-556-100	LO-MOTOR-S-ASSY	1	13	750-6761-20	DRIVE SPRING A	1
4	HBS-552-100	L-SENSOR-S-ASSY	1	14	345-5868-00	RUBBER PART	1
4-1	-----	SENSOR-L-FPC	1	15	620-1651-20	S-PWB-PLATE	1
5	966-0676-20	D-SHT LK-A-ASSY	1	16	750-6754-20	LO-ES-SPRING B	1
6	966-1755-00	DRIVE-CH A ASSY	1	17	345-5424-01	SEN-FPC GUIDE	1
7	620-1681-01	DRIVE CHASSIS B	1	18	716-1859-01	SCREW(M1.7x2.0)	2
8	620-1672-21	DR-SUPPORT-PL	1	19	744-0039-00	E-RING	1
9	620-1680-20	D-SHIFT COVER	1	20	746-0870-00	WASHER	1
10	622-1743-20	D-SHIFT ROLLER B	1	21	716-3538-00	SCREW(M1.7x2.0)	1

Upper unit assy section

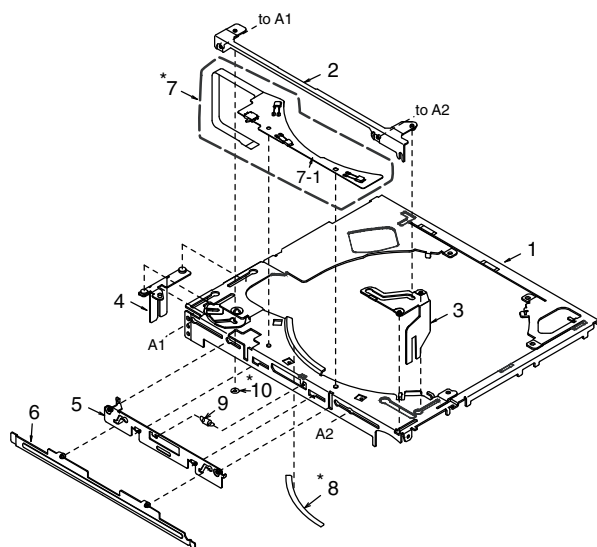



* Do not reuse the following parts.
(No.7,8,10)

NO.	PART NO.	DESCRIPTION	Q'TY
1	966-1761-21	UPPER-CHA-ASSY	1
2	966-1765-20	LO-SHIFT A ASSY	1
3	966-0700-22	LO-SHIFT B ASSY	1
4	966-0701-21	LO-SHIFT ASSY	1
5	966-1766-20	SHUTTER-PL-ASSY	1
6	966-1763-20	SHUTTER ASSY	1
7	HBS-553-100	U-SENSOR-S-ASSY	1
7-1	-----	SENSOR-U-FPC	1
8	347-7272-00	RATTLE SHEET	1
9	750-6755-21	SHUTTER SPRING	1
10	746-0870-00	WASHER	1

[Grease Point]

* Grease: SANKOL FG-87HSR

	Put grease on the surface	
	Put grease on the reverse side	
	Put grease on the both sides	
	Put grease on the edge	

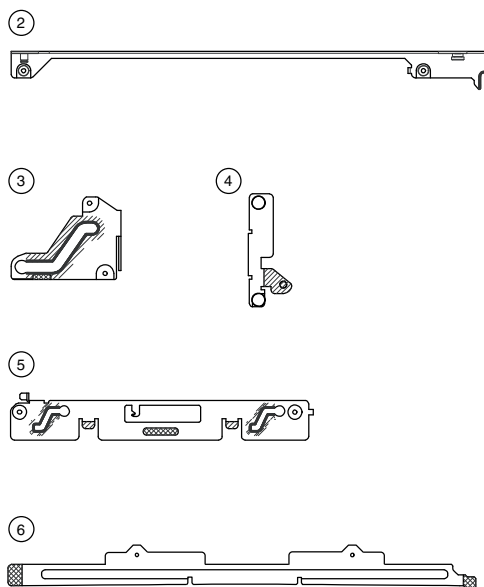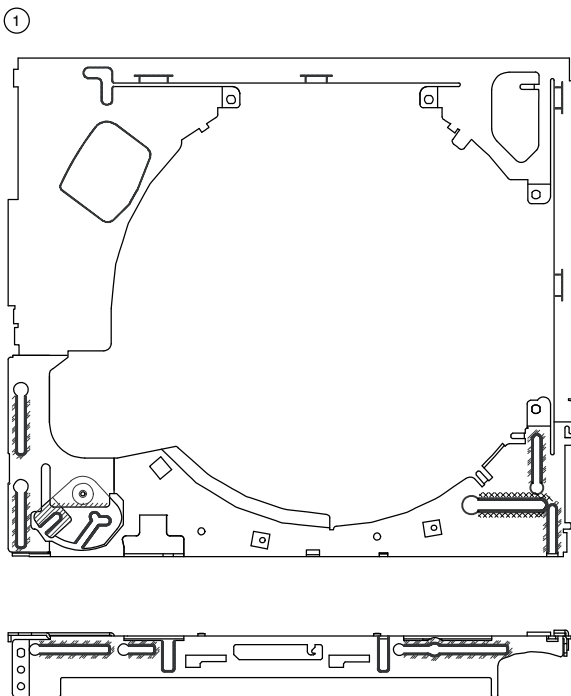

ELECTRICAL PARTS LIST

CD PWB(BM1) section

Note)Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	042-0672-00	25V 47uF TA	C74	168-1042-78	16V 0.1uF Z	R18	119-2231-15	1/10W 22k ohm
C2	166-1011-50	100pF CH	C75	168-2222-55	2200pF K	R19	119-2231-15	1/10W 22k ohm
C3	168-1042-78	16V 0.1uF	C81	166-1007-50	10pF CH	R20	119-4721-15	1/10W 4.7k ohm
C4	178-1052-78	1uF	C82	166-1007-50	10pF CH	R21	119-4731-15	1/10W 47k ohm
C5	042-0671-01	10V 47uF TA	C83	178-1052-78	1uF	R22	119-4731-15	1/10W 47k ohm
C6	168-1042-78	16V 0.1uF	C85	178-1052-78	1uF	R23	119-4731-15	1/10W 47k ohm
C7	168-1032-55	0.01uF K	C86	166-1201-50	12pF CH	R24	050-0145-58	1/16W 2.2k ohm x4
C8	168-1042-78	16V 0.1uF	C87	042-1702-90	6.3V 100uF	R25	119-4721-15	1/10W 4.7k ohm
C9	178-1052-78	1uF	C91	168-1032-55	0.01uF K	R26	119-4721-15	1/10W 4.7k ohm
C10	168-1042-78	16V 0.1uF	CCT1	050-0145-59	1/16W 22 ohm x4	R27	117-7511-15	1/8W 750 ohm
C11	168-1042-78	16V 0.1uF	CCT2	050-0145-54	1/16W 47k ohm x4	R28	116-3391-15	1/4W 3.3 ohm
C12	178-1052-78	1uF	CCT3	050-0145-54	1/16W 47k ohm x4	R29	032-0145-73	1/2W 6.8 ohm
C13	178-1052-78	1uF	CCT4	050-0145-55	1/16W 10k ohm x4	R30	119-1041-15	1/10W 100k ohm
C14	042-0671-01	10V 47uF TA	D1	001-4301-14	HZU 3.0B1	R31	119-6811-15	1/10W 680 ohm
C15	168-1032-55	0.01uF K	D1	001-0529-14	MA8030-L	R32	119-1041-15	1/10W 100k ohm
C20	178-1052-78	1uF	D2	001-0367-91	1SS226	R33	119-6811-15	1/10W 680 ohm
C21	168-1042-78	16V 0.1uF	D3	001-4301-16	HZU 3.3B1	R34	119-1041-15	1/10W 100k ohm
C22	178-1052-78	1uF	D3	001-0529-16	MA8033-L	R35	117-5611-15	1/8W 560 ohm
C23	168-1042-78	16V 0.1uF	D4	001-4301-18	HZU 3.6B1	R36	119-1041-15	1/10W 100k ohm
C24	042-0671-01	10V 47uF TA	D4	001-0529-18	MA8036-L	R37	119-1041-15	1/10W 100k ohm
C25	168-1042-78	16V 0.1uF	IC1	051-6399-00	TC94A15F	R38	119-3321-15	1/10W 3.3k ohm
C26	168-1042-78	16V 0.1uF	IC2	052-5070-10	TMP91CY22IFG-6HE2	R39	119-1051-15	1/10W 1M ohm
C27	168-4732-78	0.047uF K	IC3	051-6711-20	TC94A34FG-004	R40	119-0000-05	1/10W 0 ohm JW
C28	166-4701-50	47pF CH	IC4	051-6060-08	BD7961FM-E2	R41	119-1041-15	1/10W 100k ohm
C29	168-4732-78	0.047uF K	IC5	051-5452-90	BD5235G-TR	R42	119-5621-15	1/10W 5.6k ohm
C30	166-4711-50	470pF CH	IC6	051-9318-10	GLT4160L04P-60TC	R43	119-4731-15	1/10W 47k ohm
C31	168-1532-55	0.015uF K	IC6	051-9318-00	MSM51V17400J	R44	119-2231-15	1/10W 22k ohm
C32	166-4711-50	470pF CH	IC8	051-9402-78	BR93L56RFVM-W	R45	119-8231-15	1/10W 82k ohm
C33	168-1042-78	16V 0.1uF	IC9	051-6072-08	BD7931FE2	R46	119-3341-15	1/10W 330k ohm
C34	168-6822-55	6800pF K	IC10	051-5833-00	GP1S093HCZ	R48	119-2231-15	1/10W 22k ohm
C35	168-1032-55	0.01uF K	IC11	051-3364-90	NJU7771F15	R49	116-1001-15	1/4W 10 ohm
C38	168-3332-78	0.033uF K	IC12	051-3364-90	NJU7771F15	R50	119-1011-15	1/10W 100 ohm
C39	168-4722-55	4700pF K	J1	074-1237-69	19PIN	R51	119-6811-15	1/10W 680 ohm
C40	168-1042-78	16V 0.1uF	J2	074-1201-65	15P	R52	117-7511-15	1/8W 750 ohm
C42	168-1042-78	16V 0.1uF	J3	074-1138-56	6P	R53	116-5611-15	1/4W 560 ohm
C43	168-1532-55	0.015uF K	J4	074-1100-61	SOCKET 11P	R54	119-1041-15	1/10W 100k ohm
C44	168-1042-78	16V 0.1uF	J5	074-1201-61	11P SOCKET	R55	119-1041-15	1/10W 100k ohm
C45	168-1522-55	1500pF K	Q1	060-0252-01	PT4850F	R56	119-1041-15	1/10W 100k ohm
C46	168-1042-78	16V 0.1uF	Q2	125-0021-91	DTA114EUA	R57	119-1041-15	1/10W 100k ohm
C47	166-6811-50	680pF	Q3	198-3018-00	2SK3018	R58	119-1041-15	1/10W 100k ohm
C48	166-6801-50	68pF CH	Q6	131-1188-50	2SB1188PQR	R59	116-1511-15	1/4W 150 ohm
C49	178-1052-78	1uF	Q7	125-2027-91	DTC114EUA	R60	119-4731-15	1/10W 47k ohm
C50	042-0671-01	10V 47uF TA	Q8	131-1427-00	2SB1427	R61	119-4731-15	1/10W 47k ohm
C51	042-0671-01	10V 47uF TA	Q9	131-1188-50	2SB1188PQR	R62	119-1051-15	1/10W 1M ohm
C52	178-1052-78	1uF	Q10	125-2027-91	DTC114EUA	R64	032-0140-53	1/10W 2.2k ohm F
C53	168-1042-78	16V 0.1uF	Q11	125-0021-91	DTA114EUA	R65	119-2211-15	1/10W 220 ohm
C54	178-1052-78	1uF	Q12	125-2027-91	DTC114EUA	R66	032-0140-62	1/10W 1k ohm F
C55	178-1052-78	1uF	Q20	131-1427-00	2SB1427	R71	119-1011-15	1/10W 100 ohm
C56	042-0671-01	10V 47uF TA	R1	119-4731-15	1/10W 47k ohm	R72	119-1011-15	1/10W 100 ohm
C57	168-1042-78	16V 0.1uF	R2	119-2211-15	1/10W 220 ohm	R73	119-1011-15	1/10W 100 ohm
C59	168-1042-78	16V 0.1uF	R3	119-2211-15	1/10W 220 ohm	R77	119-0000-05	1/10W 0 ohm JW
C60	178-1052-78	1uF	R4	119-1041-15	1/10W 100k ohm	R82	119-1011-15	1/10W 100 ohm
C61	168-1032-55	0.01uF K	R5	119-4731-15	1/10W 47k ohm	R83	119-1031-15	1/10W 10k ohm
C62	168-1042-78	16V 0.1uF	R6	119-2211-15	1/10W 220 ohm	R85	119-1021-15	1/10W 1k ohm
C63	168-1042-78	16V 0.1uF	R7	119-2211-15	1/10W 220 ohm	R86	119-2231-15	1/10W 22k ohm
C64	168-1042-78	16V 0.1uF	R8	119-2211-15	1/10W 220 ohm	S1	013-7416-50	SW SPVL110200
C65	168-1042-78	16V 0.1uF	R10	032-0140-16	1/10W 180k ohm F	S2	013-7416-50	SW SPVL110200
C66	168-1042-78	16V 0.1uF	R11	032-0140-96	1/10W 120k ohm F	S3	013-7416-50	SW SPVL110200
C67	168-1042-78	16V 0.1uF	R12	119-2231-15	1/10W 22k ohm	S4	013-7415-50	SPVG110400
C68	168-1042-78	16V 0.1uF	R13	119-4711-15	1/10W 470 ohm	X1	061-3534-90	16.92MHz
C70	168-1042-78	16V 0.1uF	R14	119-2221-15	1/10W 2.2k ohm	X3	060-1545-90	20MHz
C71	168-1042-78	16V 0.1uF	R15	119-1031-15	1/10W 10k ohm	PWB	039-2747-21	PWB(WITHOUT COMPONENTS)
C72	168-1042-78	16V 0.1uF	R16	119-0000-05	1/10W 0 ohm JW			
C73	178-1052-78	1uF	R17	119-4731-15	1/10W 47k ohm			

Sensor-L-PFC(BM2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
PT1	060-0252-01	PT14850F	PT3	051-5833-00	GP1S093HCZ	PWB	039-2467-21	PWB(WITHOUT COMPONENTS)
PT2	060-0252-01	PT14850F						

Sensor-U-PFC(BM3) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
LED1	001-7077-00	GL4804	LED3	001-7077-00	GL4804	PWB	039-2466-20	PWB(WITHOUT COMPONENTS)
LED2	001-7077-00	GL4804	S5	013-7417-50	ABC1122P161			