


EXPLODED VIEW (UNIT)

Block No.M1MM

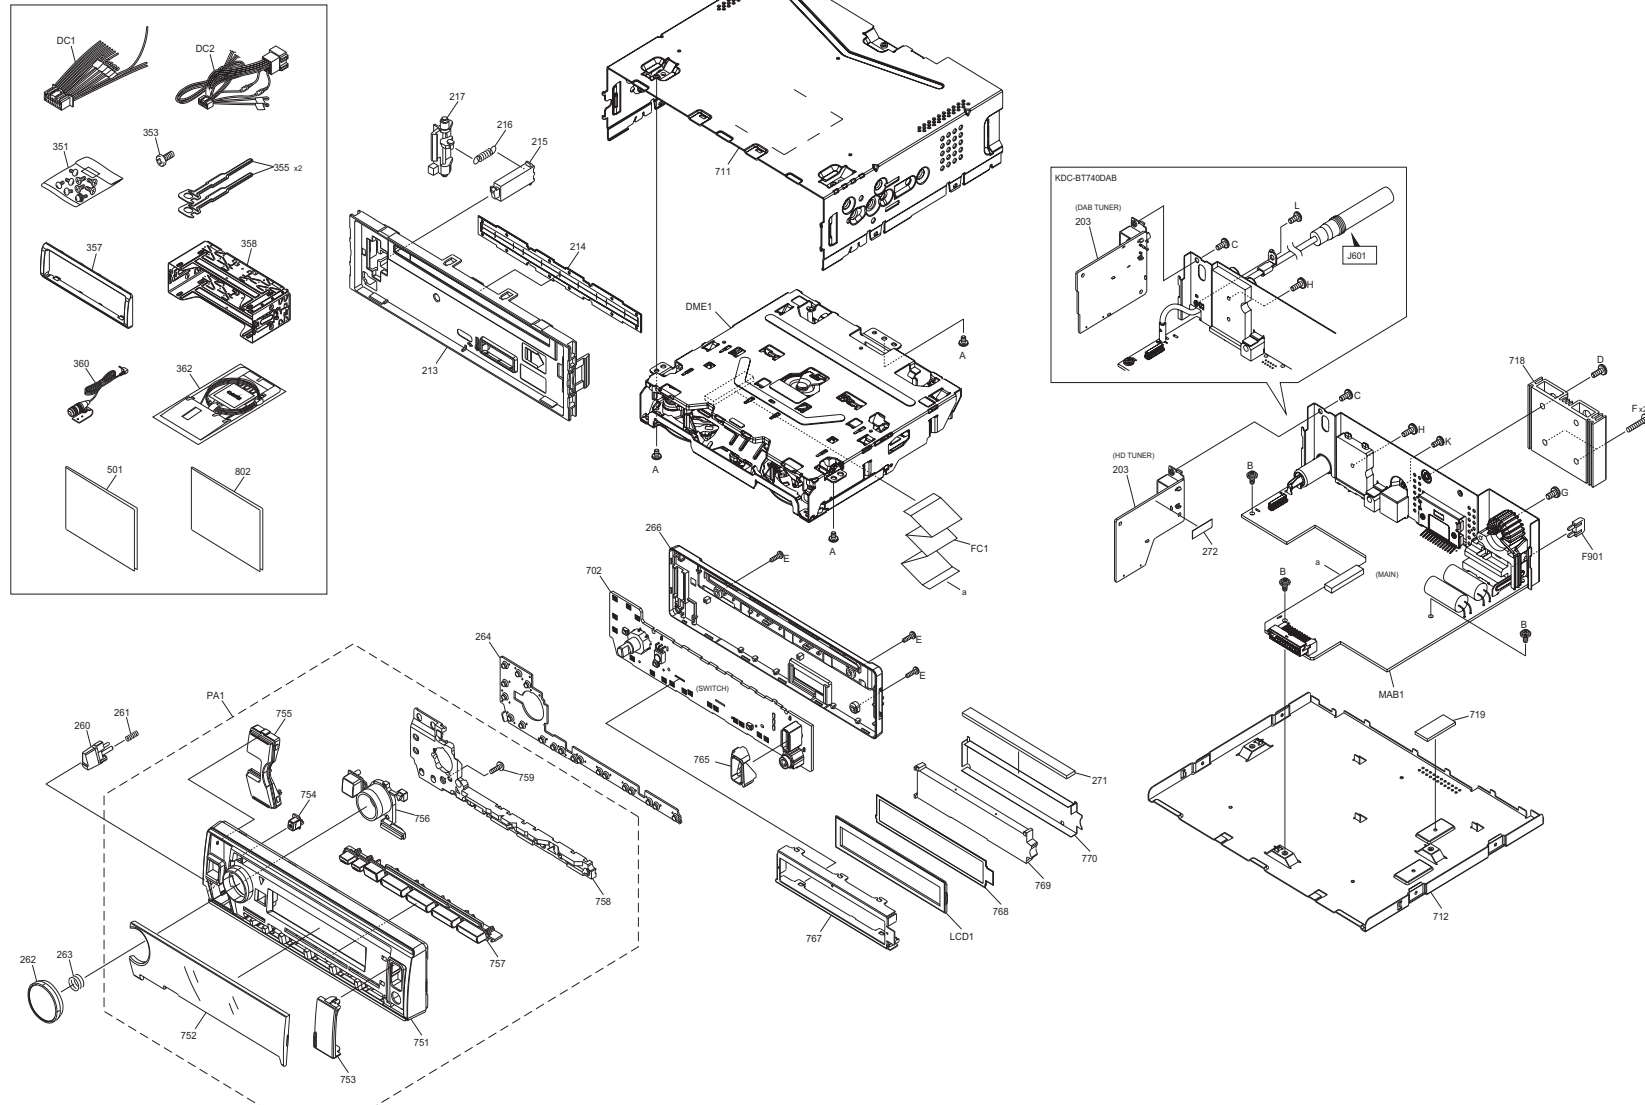

Parts with the exploded numbers larger than 700 are not supplied.

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-BT740DAB	E1	KDC-BT740DAB	X1	KDC-BT778HD	K1	KDC-X704	K0

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
EXPLODED VIEW (UNIT) <M1MM>						
△	DC1	E3A-0324-00	DC CORD		1	X1,K1,K0
△	DC2	E3A-0320-00	DC CORD		1	E1
	MAB1	CB-XJ1282E01N	MAIN PWB	XJ1-282E-01	1	E1
	MAB1	CB-XJ1282X01N	MAIN PWB	XJ1-282X-01	1	X1
	MAB1	CB-XJ1282K01N	MAIN PWB	XJ1-282K-01	1	K1
	MAB1	CB-XJ1282K00N	MAIN PWB	XJ1-282K-00	1	K0
	DME1	XJJ-070W-00	CD MECHANISM		1	
△	F901	FZB10BT-100	BLADE FUSE		1	
	FC1	E3G-0112-00	FFC WIRE		1	
	LCD1	B3H-0102-00	LCD		1	
	PA1	A6D-0157-02	PANEL ASSY		1	E1
	PA1	A6D-0157-03	PANEL ASSY		1	X1
	PA1	A6D-0122-0Z	PANEL ASSY		1	K1
	PA1	A6D-0122-0Y	PANEL ASSY		1	K0
	A	QYSDST2604ZA	TAP SCREW	M2.6 x 4.0mm	3	
	B	LV41200-004A	SPECIAL SCREW		3	
	C	QYSDST2606ZA	TAP SCREW	M2.6 x 6.0mm	1	
	D	QYSDST2608ZA	TAP SCREW	M2.6 x 8.0mm	1	
	E	QYSDSF2008ZA	TAP SCREW	M2.0 x 8.0mm	3	
	F	QYSDST2610ZA	TAP SCREW	M2.6 x 10.0mm	2	
	G	QYSPSG3008ZA	TAP SCREW	M3.0 x 8.0mm	1	
	H	QYSDSF2608ZA	TAP SCREW	M2.6 x 8.0mm	1	
	K	QYSDST2606ZA	TAP SCREW	M2.6 x 6.0mm	1	K1,K0
	L	QYSDST2606ZA	TAP SCREW	M2.6 x 6.0mm	1	E1,X1
	203	XJH-200K-00	HD TUNER	XJM-028K-00	1	K1,K0
	203	XJH-201E-00	DAB TUNER	XJM-029E-00	1	E1,X1
	213	A2C-0067-05	SUB PANEL		1	
	214	F1K-0050-00	BLIND PLATE		1	
	215	D1A-0023-00	LEVER		1	
	216	G0A-0027-00	EXTEN.SPRING		1	
	217	D1A-0022-00	LEVER		1	
	260	K2K-0388-00	KNOB		1	
	261	GE30999-013A	COMP. SPRING		1	
	262	K2K-0215-01	KNOB BASE		1	
	263	GE40127-005A	KNOB SPRING		1	
	264	E2K-0069-00	CONDUCT RUBBER		1	
	266	A4G-0095-00	REAR COVER		1	
	271	E2K-0029-00	CONDUCT RUBBER		1	
	272	F1C-0133-01	SHIELDING SHEET		1	K1,K0
	351	GE40531-001A	SCREW SET		1	K1,K0
	353	QYSPSF2008ZA	TAP SCREW	M2.0 x 8.0mm	1	K1,K0
	355	GE40685-001A	HOOK		2	
	357	B0H-0013-06	ESCUTCHEON		1	E1,X1,K0
	357	B0H-0014-00	ESCUTCHEON		1	K1
	358	GE20362-002A	MOUNTING SLEEVE		1	
	360	T9B-0073-00	MICROPHONE		1	
	362	T9A-0056-00	ANTENNA ASSY		1	E1,X1
	501	B5A-3138-00	INST.MANUAL		1	X1
	702	-----	SWITCH PWB	NO SERVICE PART	1	E1,X1
	702	-----	SWITCH PWB	NO SERVICE PART	1	K1,K0
	711	-----	TOP COVER	NO SERVICE PART	1	E1
	711	-----	TOP COVER	NO SERVICE PART	1	X1,K1,K0
	712	-----	BOTTOM PLATE	NO SERVICE PART	1	
	718	-----	HEAT SINK	NO SERVICE PART	1	
	719	-----	COOL SHEET	NO SERVICE PART	1	
	751	-----	PANEL	NO SERVICE PART	1	E1,X1,K0
	751	-----	PANEL	NO SERVICE PART	1	K1
	752	-----	FRONT GLASS	NO SERVICE PART	1	E1
	752	-----	FRONT GLASS	NO SERVICE PART	1	X1
	752	-----	FRONT GLASS	NO SERVICE PART	1	K1
	752	-----	FRONT GLASS	NO SERVICE PART	1	K0
	753	-----	COVER	NO SERVICE PART	1	
	754	-----	PUSH KNOB	NO SERVICE PART	1	
	755	-----	KNOB ASSY	NO SERVICE PART	1	E1
	755	-----	KNOB ASSY	NO SERVICE PART	1	X1,K1,K0
	756	-----	PUSH KNOB	NO SERVICE PART	1	
	757	-----	PUSH KNOB	NO SERVICE PART	1	
	758	-----	LIGHTING BOARD	NO SERVICE PART	1	
	759	-----	TAP SCREW	NO SERVICE PART	1	
	765	-----	LIGHTING BOARD	NO SERVICE PART	1	
	767	-----	LCD CASE	NO SERVICE PART	1	
	768	-----	OPTI.DIFFUSER	NO SERVICE PART	1	
	769	-----	LIGHTING BOARD	NO SERVICE PART	1	
	770	-----	REF.SHEET	NO SERVICE PART	1	
	802	-----	SUB-INST.MANUAL	NO SERVICE PART	1	E1
	802	-----	SUB-INST.MANUAL	NO SERVICE PART	1	K1,K0


EXPLODED VIEW (CD MECHANISM: XJJ-070W-00/FC2-3B00NXN)

Block No.MBMM

Grease

★W01-1738-08

●W01-2067-08

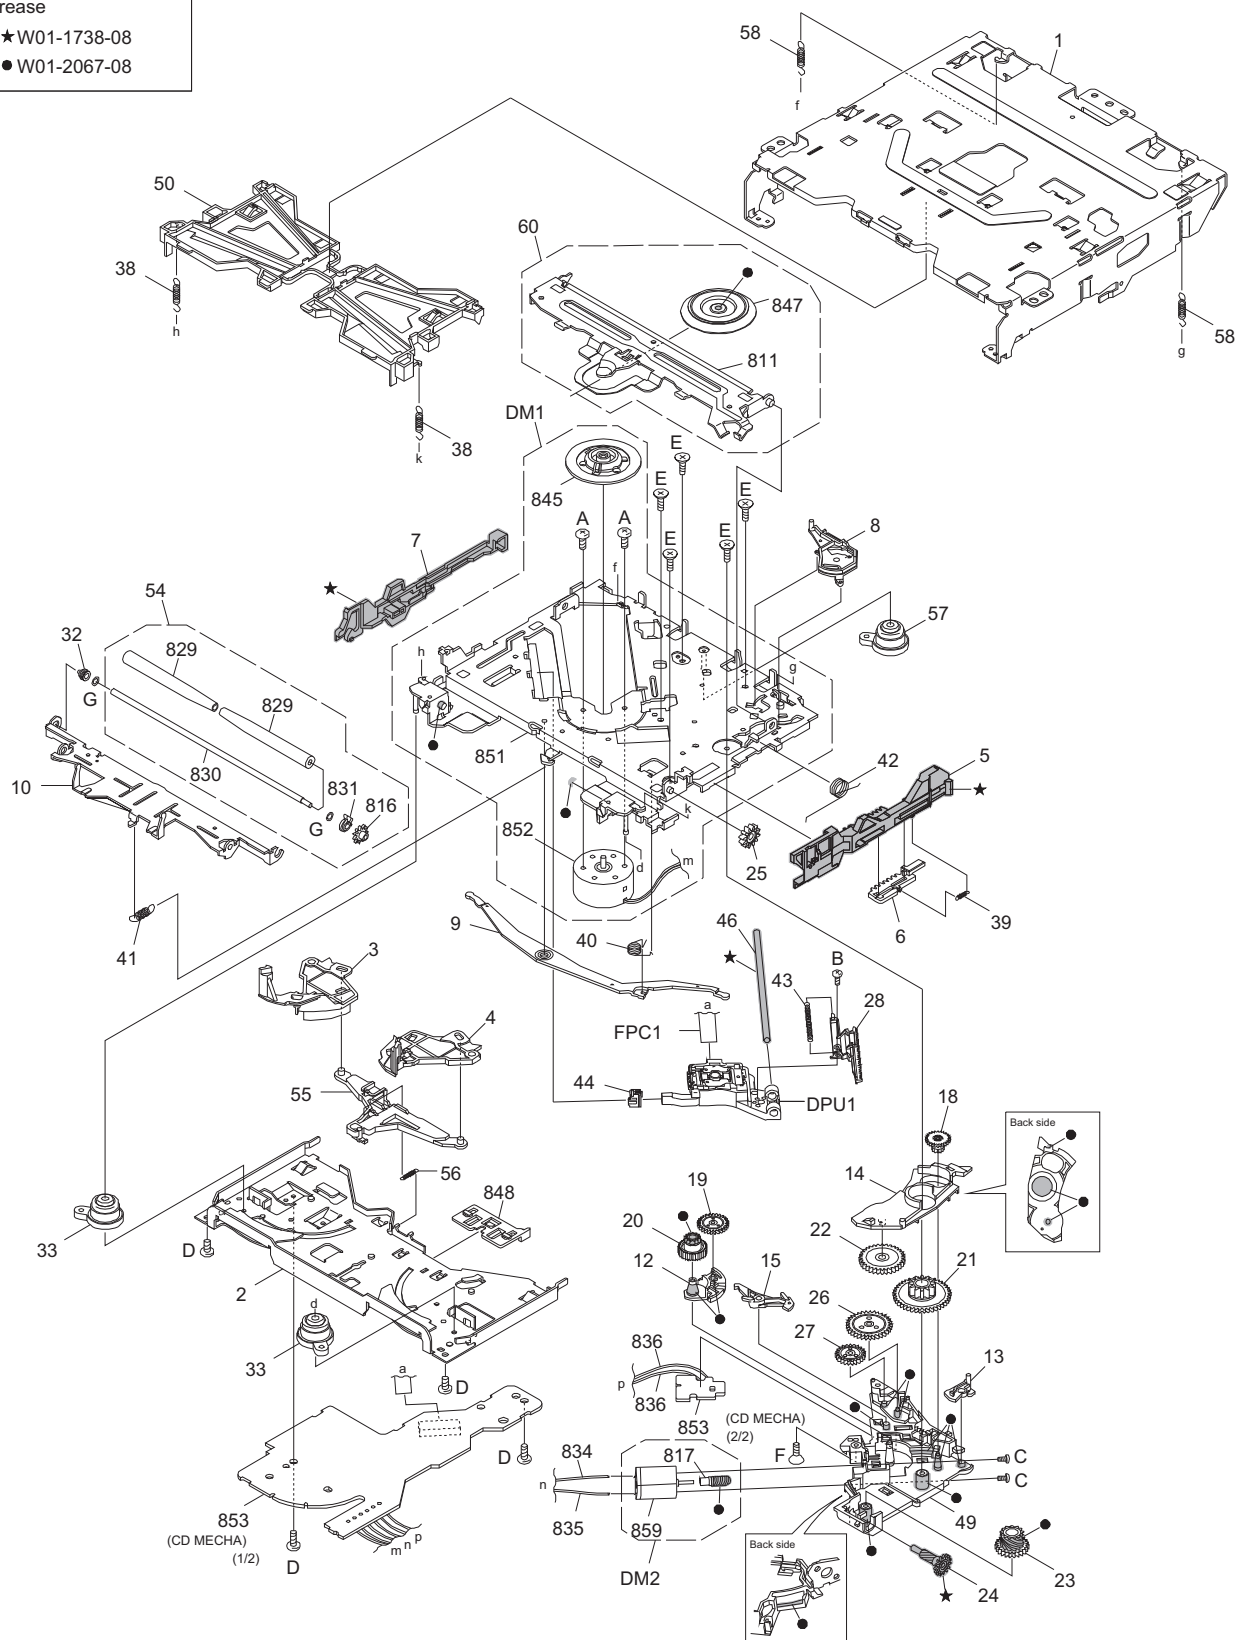

Parts with the exploded numbers larger than 800 are not supplied.

No.WA420

created date:2019-10-24

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-BT740DAB	E1	KDC-BT740DAB	X1	KDC-BT778HD	K1	KDC-X704	K0

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
EXPLODED VIEW (CD MECHANISM: XJJ-070W-00) <MBMM>						
	DM1	CM-FC2-MD	MD CHASSIS ASSY		1	
	DM2	CM-FC2-M	LOAD MOTOR ASSY		1	
	DPU1	T2F-0002-00	CD OPT PICKUP		1	
	FPC1	QAL1465-001	FPC		1	
	A	LV45568-001A	MINI SCREW		2	
	B	QYSPSGT1745ZA	TAP SCREW	M1.7 x 4.5mm	1	
	C	QYSPSPT2025MA	SCREW	M2.0 x 2.5mm	2	
	D	VKZ4539-054	MINI SCREW		4	
	E	LV45818-001A	G.HOLDER SCREW		5	
	F	LV45815-001A	M. SHAFT SCREW		1	
	G	LV45816-001A	ROLLER WASHER		2	
	1	LV11877-003A	OUTER CHASSIS		1	
	2	LV11878-006A	LOWER CHASSIS		1	
	3	LV3A174-002A	DISC ARM L		1	
	4	LV3A175-001A	DISC ARM R		1	
	5	LV23057-001A	SLIDER R		1	
	6	LV3A178-001A	TRIGGER SLIDER		1	
	7	LV23058-001A	SLIDER L		1	
	8	LV3A179-002A	TRIGGER ARM		1	
	9	LV3A173-001A	JOINT LEVER		1	
	10	LV23055-003A	ROLLER LEVER		1	
	12	LV3A181-002A	TRANSFER ARM		1	
	13	LV45797-002A	SL LOCK CAM		1	
	14	LV3A182-003A	SL LOCK ARM		1	
	15	LV3A183-001A	PICK LOCK ARM		1	
	18	LV3A187-002A	HELICAL GEAR 1		1	
	19	LV3A188-001A	TRANSFER GEAR		1	
	20	LV3A189-001A	LOAD GEAR H		1	
	21	LV3A190-001A	DRIVE GEAR		1	
	22	LV3A191-001A	JOINT GEAR		1	
	23	LV3A192-001A	WORM GEAR 2		1	
	24	LV3A193-001A	HELICAL GEAR 2		1	
	25	LV3A194-001A	LOAD GEAR V		1	
	26	LV3A195-001A	PICK GEAR 1		1	
	27	LV3A196-001A	PICK GEAR 2		1	
	28	LV3A197-001A	RACK GEAR		1	
	32	LV45796-001A	R.RETAINER L		1	
	33	D3K-0002-00	DAMPER		2	
	38	LV45809-001A	FLOAT SPRING(F)		2	
	39	LV45810-001A	TRIGGER SPRING		1	
	40	LV45811-001A	LOAD SPRING		1	
	41	LV45812-001A	ROLLER SPRING		1	
	42	LV45813-002A	CLAMP SPRING		1	
	43	LV45814-001A	PICK SPRING		1	
	44	LV36813-302A	SUB GUIDE CAP		1	
	46	D2B-0037-00	SHAFT		1	
	49	LV11881-002A	GEAR HOLDER		1	
	50	LV11880-004A	DISC GUIDE		1	
	54	CM-FC2-R	ROLLER ASSY		1	
	55	D1A-0100-00	ARM		1	
	56	G0A-0138-00	EXTEN.SPRING		1	
	57	D3K-0003-00	DAMPER		1	
	58	LV45835-001A	FLOAT SPRING(R)		2	
	60	LV3A271-002A	CL BASE ASSY		1	
	811	-----	CLAMP ARM	NO SERVICE PART	1	
	816	-----	ROLLER GEAR	NO SERVICE PART	1	
	817	-----	WORM GEAR 1	NO SERVICE PART	1	
	829	-----	ROLLER	NO SERVICE PART	2	
	830	-----	ROLLER SHAFT	NO SERVICE PART	1	
	831	-----	R.RETAINER R	NO SERVICE PART	1	
	834	-----	SIN TWIST WIRE	NO SERVICE PART	1	
	835	-----	SIN TWIST WIRE	NO SERVICE PART	1	
	836	-----	SIN TWIST WIRE	NO SERVICE PART	2	
	845	-----	HC TURN TABLE	NO SERVICE PART	1	
	847	-----	CLAMPER	NO SERVICE PART	1	
	848	-----	WIRE HOLDER	NO SERVICE PART	1	
	851	-----	MD CHASSIS ASSY	NO SERVICE PART	1	
	852	-----	SPINDLE MOTOR	NO SERVICE PART	1	
	853	-----	CD MECHA PWB	NO SERVICE PART	1	
	859	-----	MOTOR	NO SERVICE PART	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-BT740DAB	E1	KDC-BT740DAB	X1	KDC-BT778HD	K1	KDC-X704	K0

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
MAIN PWB ASSY (XJ1-282x-0x) <XJ1>						
	IC161	BD37069FV-M	ANALOG IC	BGA	1	K1,K0
	IC162	NJM111100F1	ANALOG IC		1	
	IC165	NJW4190R-A	ANALOG IC		1	
	IC220	NJM8065V	ANALOG IC		1	
	IC301	JCV8034	ANALOG IC		1	K1,K0
	IC411	MFI343S00177	MCU IC		1	
	IC470	TC7SH08FUJC	MOS IC		1	
	IC540	MP9943AGQ	ANALOG IC		1	
	IC701	STA1080	MPU IC		1	E1,X1
	IC702	TC7SH08FUJC	MOS IC		1	
	IC821	W3F-0528-00	ROM IC		1	
	IC821	W3F-0527-00	ROM IC		1	
	IC822	W25Q16JVSSIM	ROM IC		1	K1,K0
	IC831	IC-PST8428U	MOS IC		1	
	IC841	IC-PST8428U	MOS IC		1	
	IC890	TPS25221DBV	MOS IC		1	
	IC901	BD49105RFS-M	ANALOG IC		1	E1,X1
	IC1901	M12L2511A6BIS	DRAM IC		1	
	Q220	LSCR523UBFS8	TRANSISTOR		1	
	Q240	IMX9	DUAL TRANSISTOR		1	
	Q270	LTA024EEBFS8	DIGI TRANSISTOR		1	K1,K0
	Q271	LSAR523UBFS8	TRANSISTOR		1	
	Q272	LTC024EEBFS8	DIGI TRANSISTOR		1	
	Q273	LTA024EEBFS8	DIGI TRANSISTOR		1	
	Q274	LTC024EEBFS8	DIGI TRANSISTOR		1	K1,K0
	Q300	IMX9	DUAL TRANSISTOR		1	
	Q310	IMX9	DUAL TRANSISTOR		1	
	Q470	LTC014EEBFS8	DIGI TRANSISTOR		1	
	Q471	LTC043TEBFS8	DIGI TRANSISTOR		1	E1,X1
	Q500	LTC043EUBFS8	DIGI TRANSISTOR		1	
	Q901	LTC014YEBFS8	DIGI TRANSISTOR		1	
	Q902	RE1C002ZP	FET		1	
	Q903	LTC014YEBFS8	DIGI TRANSISTOR		1	K1,K0
	Q903	KRC407E-P	DIGI TRANSISTOR		1	
	Q904	RE1C002ZP	FET		1	
	Q920	LTA014YEBFS8	DIGI TRANSISTOR		1	K1,K0
	Q960	RQ6E030AT	FET		1	
	Q961	KRC404P	DIGI TRANSISTOR		1	
	D220	UDZV6.8B	ZENER DIODE		1	
	D221	UDZV6.8B	ZENER DIODE		1	
	D222	UDZV5.6B	ZENER DIODE		1	K1,K0
	D271	BAW56-TP	DIODE ARRAY		1	
	D273	1SS355VM	DIODE		1	
	D370	BAW56-TP	DIODE ARRAY		1	
	D390	SM5818PL	SCHOTTKY DIODE		1	K1,K0
	D391	MBR0530	DIODE		1	
	D400	RB521SM-30	DIODE		1	
	D401	UDZV5.1B	ZENER DIODE		1	
	D471	RSB6.8SM	ZENER DIODE		1	K1,K0
	D472	RSB6.8SM	ZENER DIODE		1	
	D473	RSB6.8SM	ZENER DIODE		1	
	D474	RSB6.8SM	ZENER DIODE		1	
	D475	RSB6.8SM	ZENER DIODE		1	K1,K0
	D476	RSB6.8SM	ZENER DIODE		1	
	D540	SMD24PL	SCHOTTKY DIODE		1	
	D902	SK34A-L	SCHOTTKY DIODE		1	
	D903	SK34A-L	SCHOTTKY DIODE		1	E1,X1
	D904	GS1J-LTP	DIODE		1	
	D905	GS1J-LTP	DIODE		1	
	D906	SK34A-L	SCHOTTKY DIODE		1	
	D907	SK34A-L	SCHOTTKY DIODE		1	K1,K0
	D908	SK34A-L	SCHOTTKY DIODE		1	
	D911	UDZV16B	ZENER DIODE		1	
	D991	GN3XB	DIODE		1	
	C101	CK73JXR1H332K	C CAPACITOR	3300pF 50V K	1	K1,K0
	C102	CK73JXR1H332K	C CAPACITOR	3300pF 50V K	1	
	C103	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C104	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C105	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1	K1,K0
	C106	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C161	CE32BJ1V4R7M	E CAPACITOR	4.7uF 35V M	1	
	C162	CE32BJ1V4R7M	E CAPACITOR	4.7uF 35V M	1	
	C163	CE32BJ1V4R7M	E CAPACITOR	4.7uF 35V M	1	K1,K0
	C164	CE32BJ1V4R7M	E CAPACITOR	4.7uF 35V M	1	
	C165	CE32BJ1V4R7M	E CAPACITOR	4.7uF 35V M	1	
	C166	CE32BJ1V4R7M	E CAPACITOR	4.7uF 35V M	1	
	C167	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1	K1,K0
	C168	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C169	CE32BY1C470M	E CAPACITOR	47uF 16V M	1	
	C170	CE32CL1C100M	E CAPACITOR	10uF 16V M	1	
	C171	CE32BM1E470M	E CAPACITOR	47uF 25V M	1	K1,K0
	C175	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C177	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	
	C181	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C183	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	K1,K0
	C187	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	
	C188	CK73GXR1E105K	C CAPACITOR	1uF 25V K	1	
	C221	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C222	CK73JXR0J333K	C CAPACITOR	0.033uF 6.3V K	1	K1,K0
	C223	CK73JXR0J333K	C CAPACITOR	0.033uF 6.3V K	1	
	C224	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-BT740DAB	E1	KDC-BT740DAB	X1	KDC-BT778HD	K1	KDC-X704	K0

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C225	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C226	CC73JCH1H220J	C CAPACITOR	22pF 50V J	1	
	C227	CC73JCH1H151J	C CAPACITOR	150pF 50V J	1	
	C228	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C229	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C230	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C231	CC73JCH1H151J	C CAPACITOR	150pF 50V J	1	
	C234	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C235	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C236	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C252	CK73EXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C262	CK73EXR1C475K	C CAPACITOR	4.7uF 16V K	1	E1,X1
	C273	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C304	CE32CL1E330M	E CAPACITOR	33uF 25V M	1	
	C311	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C312	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C316	CK73GXR1C224K	C CAPACITOR	0.22uF 16V K	1	
	C317	CK73GXR1C224K	C CAPACITOR	0.22uF 16V K	1	
	C318	CK73GXR1C224K	C CAPACITOR	0.22uF 16V K	1	
	C319	CK73GXR1C224K	C CAPACITOR	0.22uF 16V K	1	
	C322	CK73EXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C324	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	
	C332	CK73EXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C342	CK73EXR1C475K	C CAPACITOR	4.7uF 16V K	1	K1,K0
	C352	CK73EXR1C475K	C CAPACITOR	4.7uF 16V K	1	K1,K0
	C370	CK73HXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C391	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	
	C410	CK73JXR0J224K	C CAPACITOR	0.22uF 6.3V K	1	
	C411	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C472	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	K1,K0
	C473	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K1,K0
	C474	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	1	K1,K0
	C475	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	1	K1,K0
	C540	CE32CC1A151M	E CAPACITOR	150uF 10V M	1	
	C542	CK73JXR1C224K	C CAPACITOR	0.22uF 16V K	1	
	C543	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	
	C544	CK73JXR1H471K	C CAPACITOR	470pF 50V K	1	
	C545	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C547	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C548	CK73HXR0J224K	C CAPACITOR	0.22uF 6.3V K	1	
	C549	CK73HXR0J224K	C CAPACITOR	0.22uF 6.3V K	1	
	C550	CC73JCH1H150J	C CAPACITOR	15pF 50V J	1	
	C601	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	K1,K0
	C625	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C626	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C627	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C628	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C680	CK73GXR0J225K	C CAPACITOR	2.2uF 6.3V K	1	
	C701	CK73JXR1H471K	C CAPACITOR	470pF 50V K	1	
	C702	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	
	C703	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C704	CC73JCH1H180J	C CAPACITOR	18pF 50V J	1	
	C705	CC73JCH1H180J	C CAPACITOR	18pF 50V J	1	
	C706	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	
	C707	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C708	CC73JCH1H101J	C CAPACITOR	100pF 50V J	1	
	C710	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	
	C711	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	
	C713	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C714	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C715	CC73JCH1H101J	C CAPACITOR	100pF 50V J	1	
	C716	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C717	CK73JXR1H471K	C CAPACITOR	470pF 50V K	1	
	C718	CC73JCH1H470J	C CAPACITOR	47pF 50V J	1	
	C719	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C720	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C721	CC73JCH1H101J	C CAPACITOR	100pF 50V J	1	
	C722	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	
	C723	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C724	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C725	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	
	C726	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C727	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	
	C728	CC73JCH1H101J	C CAPACITOR	100pF 50V J	1	
	C729	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C730	CC73JCH1H101J	C CAPACITOR	100pF 50V J	1	
	C731	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C733	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C735	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C736	CC73JCH1H070D	C CAPACITOR	7pF 50V D	1	
	C737	CC73JCH1H080D	C CAPACITOR	8pF 50V D	1	
	C738	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C740	CC73JCH1H101J	C CAPACITOR	100pF 50V J	1	
	C741	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	
	C742	CC73JCH1H101J	C CAPACITOR	100pF 50V J	1	
	C745	CK73JXR1H471K	C CAPACITOR	470pF 50V K	1	
	C746	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C750	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C756	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C760	CK73JXR1H471K	C CAPACITOR	470pF 50V K	1	
	C820	CK73JXR0J224K	C CAPACITOR	0.22uF 6.3V K	1	
	C821	CK73JXR1H471K	C CAPACITOR	470pF 50V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-BT740DAB	E1	KDC-BT740DAB	X1	KDC-BT778HD	K1	KDC-X704	K0

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C824	CK73JXR0J224K	C CAPACITOR	0.22uF 6.3V K	1	
	C830	CK73JXR1H471K	C CAPACITOR	470pF 50V K	1	
	C831	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C832	CK73JXR0J224K	C CAPACITOR	0.22uF 6.3V K	1	
	C841	CK73HXR1A334K	C CAPACITOR	0.33uF 10V K	1	
	C842	CK73JXR0J224K	C CAPACITOR	0.22uF 6.3V K	1	
	C843	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C890	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C891	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	
	C902	CC73JCH1E391J	C CAPACITOR	390pF 25V J	1	
	C903	CK73JXR1H471K	C CAPACITOR	470pF 50V K	1	
	C904	CC73JCH1E271J	C CAPACITOR	270pF 25V J	1	
	C905	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C906	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	
	C907	CE32CC1A151M	E CAPACITOR	150uF 10V M	1	
	C911	CK73GXR1E105K	C CAPACITOR	1uF 25V K	1	
	C912	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C913	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C914	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C915	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C916	CE32BY1C221M	E CAPACITOR	220uF 16V M	1	
	C917	CK73GXR1E105K	C CAPACITOR	1uF 25V K	1	
	C918	CC73JCH1E391J	C CAPACITOR	390pF 25V J	1	
	C919	CD040CZ1C222M	E CAPACITOR	2200uF 16V M	1	
	C935	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C943	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C944	CE32CC1A151M	E CAPACITOR	150uF 10V M	1	
	C945	CC73JCH1E561J	C CAPACITOR	560pF 25V J	1	
	C946	CK73GXR1E105K	C CAPACITOR	1uF 25V K	1	
	C947	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C948	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C949	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	
	C950	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C952	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	
	C954	CK73JXR1H471K	C CAPACITOR	470pF 50V K	1	
	C960	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	
	C990	CD040CZ1C222M	E CAPACITOR	2200uF 16V M	1	
	C993	CK73JXR1H471K	C CAPACITOR	470pF 50V K	1	
	C1020	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1034	CK73JXR0J224K	C CAPACITOR	0.22uF 6.3V K	1	
	C1301	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C1305	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	
	C1306	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1902	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1903	CK73JXR1H471K	C CAPACITOR	470pF 50V K	1	
	C1904	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1905	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1906	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C1907	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1908	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1909	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1910	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C2002	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C2008	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C2009	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	
	C2010	CK73JXR1H471K	C CAPACITOR	470pF 50V K	1	
	C2025	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C2027	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	
	C2037	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C2040	CK73JXR1H471K	C CAPACITOR	470pF 50V K	1	
	C2041	CC73JCH1H101J	C CAPACITOR	100pF 50V J	1	
	C2048	CK73HXR0J474K	C CAPACITOR	0.47uF 6.3V K	1	
	C2075	CK73JXR1H471K	C CAPACITOR	470pF 50V K	1	
	C2084	CK73HXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C2117	CC73JCH1H101J	C CAPACITOR	100pF 50V J	1	
	C9001	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C9003	CK73JXR1H471K	C CAPACITOR	470pF 50V K	1	K1,K0
	C9015	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C9020	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	E1
	C9021	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	E1
	C9022	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C9023	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	E1
	C9026	CK73JXR1H471K	C CAPACITOR	470pF 50V K	1	
	C9027	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C9028	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	E1
	C9030	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C9033	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	
	C9037	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C9038	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	
	C9039	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	
	C9040	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	E1
	C9043	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	K1,K0
	C9045	CK73JXR1H471K	C CAPACITOR	470pF 50V K	1	
	C9047	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C9048	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C9049	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C9050	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C9060	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	E1
	C9061	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	E1
	C9062	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	E1
	C9064	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	E1
	C9067	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	E1
	C9085	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-BT740DAB	E1	KDC-BT740DAB	X1	KDC-BT778HD	K1	KDC-X704	K0

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C9086	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C9087	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C9095	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	K1,K0
	C9101	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	
	C9103	CC73JCH1H220J	C CAPACITOR	22pF 50V J	1	
	C9120	CK73JXR1H471K	C CAPACITOR	470pF 50V K	1	
	C9130	CK73JXR1H471K	C CAPACITOR	470pF 50V K	1	
	C9131	CK73JXR1H471K	C CAPACITOR	470pF 50V K	1	
	C9132	CK73JXR1H471K	C CAPACITOR	470pF 50V K	1	
	C9201	CC73JCH1H050C	C CAPACITOR	5pF 50V C	1	
	C9202	CC73JCH1H050C	C CAPACITOR	5pF 50V C	1	
	C9203	CC73JCH1H050C	C CAPACITOR	5pF 50V C	1	
	C9204	CC73JCH1H070D	C CAPACITOR	7pF 50V D	1	
	C9205	CC73JCH1H070D	C CAPACITOR	7pF 50V D	1	
	C9518	CK73JXR1H471K	C CAPACITOR	470pF 50V K	1	
	C9525	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C9526	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C9527	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C9530	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	K1,K0
	C9531	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	K1,K0
	C9532	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	E1,X1
	C9533	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	E1,X1
	R100	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R101	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R103	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R104	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R118	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R119	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R120	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R145	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R146	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R147	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R148	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R149	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R150	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R161	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K1,K0
	R162	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R165	RK73HH1J152D	MG RESISTOR	1.5kΩ 1/16W D	1	
	R166	RK73HH1J822D	MG RESISTOR	8.2kΩ 1/16W D	1	
	R173	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R175	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R176	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K1,K0
	R177	RK73HB1J562J	MG RESISTOR	5.6kΩ 1/16W J	1	K1,K0
	R178	RK73HB1J752J	MG RESISTOR	7.5kΩ 1/16W J	1	K1,K0
	R179	RK73HH1J102D	MG RESISTOR	1kΩ 1/16W D	1	K1,K0
	R180	RK73HH1J153D	MG RESISTOR	15kΩ 1/16W D	1	K1,K0
	R181	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K1,K0
	R188	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	E1,X1
	R220	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R221	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R222	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R223	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	1	
	R224	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R225	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	
	R226	RK73HB1J122J	MG RESISTOR	1.2kΩ 1/16W J	1	
	R227	RK73HB1J124J	MG RESISTOR	120kΩ 1/16W J	1	
	R229	RK73HB1J122J	MG RESISTOR	1.2kΩ 1/16W J	1	
	R230	RK73HB1J124J	MG RESISTOR	120kΩ 1/16W J	1	
	R231	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R232	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	
	R233	RK73HB1J681J	MG RESISTOR	680Ω 1/16W J	1	
	R234	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R235	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R236	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R237	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R238	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R250	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R251	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R252	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	
	R253	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K1,K0
	R254	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R260	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	E1,X1
	R261	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	E1,X1
	R262	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	E1,X1
	R264	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	E1,X1
	R270	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	
	R271	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	
	R272	RK73HB1J303J	MG RESISTOR	30kΩ 1/16W J	1	
	R273	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	
	R274	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	1	
	R302	RK73HB1J432J	MG RESISTOR	4.3kΩ 1/16W J	1	
	R303	RK73EB2E160J	MG RESISTOR	16Ω 1/4W J	1	
	R304	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R305	RK73EB2E1R0J	MG RESISTOR	1.0Ω 1/4W J	1	
	R316	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R317	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R318	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R319	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R320	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R321	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R322	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R323	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-BT740DAB	E1	KDC-BT740DAB	X1	KDC-BT778HD	K1	KDC-X704	K0

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R330	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R331	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R332	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R333	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	
	R340	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	K1,K0
	R341	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K1,K0
	R342	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K1,K0
	R343	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	K1,K0
	R350	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	K1,K0
	R351	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K1,K0
	R352	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K1,K0
	R353	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	K1,K0
	R370	RK73GB2A683J	MG RESISTOR	68kΩ 1/10W J	1	
	R371	RK73GB2A123J	MG RESISTOR	12kΩ 1/10W J	1	
	R372	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R373	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R390	RK73EB2E472J	MG RESISTOR	4.7kΩ 1/4W J	1	
	R400	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R410	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R411	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R413	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R414	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R468	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	K1,K0
	R469	RK73GB2A4R7J	MG RESISTOR	4.7Ω 1/10W J	1	K1,K0
	R470	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	K1,K0
	R471	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K1,K0
	R472	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K1,K0
	R473	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K1,K0
	R474	RK73FB2B221J	MG RESISTOR	220Ω 1/8W J	1	K1,K0
	R475	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K1,K0
	R476	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K1,K0
	R477	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K1,K0
	R541	RK73HB1J512J	MG RESISTOR	5.1kΩ 1/16W J	1	
	R542	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R543	RK73EB2E200J	MG RESISTOR	20Ω 1/4W J	1	
	R544	RK73HB1J393J	MG RESISTOR	39kΩ 1/16W J	1	
	R545	RK73HH1J183D	MG RESISTOR	18kΩ 1/16W D	1	
	R546	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D	1	
	R548	RK73HH1J683D	MG RESISTOR	68kΩ 1/16W D	1	
	R549	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R601	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R611	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R682	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R683	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R684	RK73HB1J392J	MG RESISTOR	3.9kΩ 1/16W J	1	
	R685	RK73HB1J392J	MG RESISTOR	3.9kΩ 1/16W J	1	
	R692	RK73GB2A910J	MG RESISTOR	91Ω 1/10W J	1	
	R693	RK73GB2A910J	MG RESISTOR	91Ω 1/10W J	1	
	R702	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R703	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R704	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R705	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R706	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	1	
	R707	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R709	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R710	RK73HB1J682J	MG RESISTOR	6.8kΩ 1/16W J	1	
	R711	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R712	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R713	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R714	RK73HB1J274J	MG RESISTOR	270kΩ 1/16W J	1	
	R715	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R718	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R721	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R722	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R723	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R725	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R730	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R731	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R733	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R734	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R735	RK73HB1J273J	MG RESISTOR	27kΩ 1/16W J	1	
	R737	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R738	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R739	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R740	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R741	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R742	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R743	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R744	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R746	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R748	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R750	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R753	RK73HB1J273J	MG RESISTOR	27kΩ 1/16W J	1	
	R755	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R756	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R759	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R760	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R761	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R762	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R763	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R766	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R768	RK73HB1J393J	MG RESISTOR	39kΩ 1/16W J	1	E1

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-BT740DAB	E1	KDC-BT740DAB	X1	KDC-BT778HD	K1	KDC-X704	K0

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R768	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	X1
	R769	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	1	E1
	R769	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	X1
	R769	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K1,K0
	R770	RK73HB1J393J	MG RESISTOR	39kΩ 1/16W J	1	K1
	R771	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	E1,X1,K0
	R771	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	1	K1
	R772	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R777	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R778	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R782	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R785	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R788	RK73HH1J823D	MG RESISTOR	82kΩ 1/16W D	1	
	R789	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D	1	
	R790	RK73HB1J4R7J	MG RESISTOR	4.7Ω 1/16W J	1	
	R792	RK73HB1J4R7J	MG RESISTOR	4.7Ω 1/16W J	1	
	R793	RK73HB1J273J	MG RESISTOR	27kΩ 1/16W J	1	
	R794	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R795	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R796	RK73HH1J302D	MG RESISTOR	3kΩ 1/16W D	1	
	R797	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R798	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R799	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	
	R800	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R801	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R802	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	E1,X1
	R803	RK73HB1J225J	MG RESISTOR	2.2MΩ 1/16W J	1	K1,K0
	R804	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R805	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R806	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R808	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R809	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R811	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R813	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R814	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R815	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R819	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R820	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R823	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R824	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R827	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R828	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R829	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R830	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R831	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R833	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R834	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R835	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R836	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R844	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	1	
	R845	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R846	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R848	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R870	RK73HB1J562J	MG RESISTOR	5.6kΩ 1/16W J	1	
	R889	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	1	
	R891	RK73HH1J243D	MG RESISTOR	24kΩ 1/16W D	1	
	R893	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R902	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	E1,X1
	R903	RK73HH1J394D	MG RESISTOR	390kΩ 1/16W D	1	E1,X1
	R903	RK73HH1J334D	MG RESISTOR	330kΩ 1/16W D	1	K1,K0
	R904	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	1	E1,X1
	R904	RK73HH1J473D	MG RESISTOR	47kΩ 1/16W D	1	K1,K0
	R905	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R908	RK73HH1J154D	MG RESISTOR	150kΩ 1/16W D	1	
	R909	RK73HH1J473D	MG RESISTOR	47kΩ 1/16W D	1	
	R910	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R911	RK73HB1J683J	MG RESISTOR	68kΩ 1/16W J	1	
	R912	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R913	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R916	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	E1,X1
	R917	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D	1	
	R920	RK73HH1J124D	MG RESISTOR	120kΩ 1/16W D	1	
	R921	RK73HH1J153D	MG RESISTOR	15kΩ 1/16W D	1	
	R922	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R923	RK73HH1J564D	MG RESISTOR	560kΩ 1/16W D	1	
	R924	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R925	RK73HH1J184D	MG RESISTOR	180kΩ 1/16W D	1	
	R927	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	
	R928	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R929	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R933	RK73HH1J684D	MG RESISTOR	680kΩ 1/16W D	1	
	R934	RK73HH1J563D	MG RESISTOR	56kΩ 1/16W D	1	
	R939	RK73HH1J433D	MG RESISTOR	43kΩ 1/16W D	1	
	R940	RK73HH1J123D	MG RESISTOR	12kΩ 1/16W D	1	
	R941	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D	1	
	R946	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R949	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R950	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R951	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R952	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R954	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
	R955	RK73EB2E184J	MG RESISTOR	180kΩ 1/4W J	1	
	R960	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-BT740DAB	E1	KDC-BT740DAB	X1	KDC-BT778HD	K1	KDC-X704	K0

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R965	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R980	RK73EB2E682J	MG RESISTOR	6.8kΩ 1/4W J	1	
	R981	RK73EB2E682J	MG RESISTOR	6.8kΩ 1/4W J	1	
	R982	RK73EB2E473J	MG RESISTOR	47kΩ 1/4W J	1	
	R984	RK73EB2E473J	MG RESISTOR	47kΩ 1/4W J	1	
	R993	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R1034	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R1070	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R1300	RK73HB1J562J	MG RESISTOR	5.6kΩ 1/16W J	1	
	R1302	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R1303	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R1900	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1901	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1902	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1903	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1904	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1905	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1906	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1907	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1908	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1909	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1910	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1911	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1912	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1913	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1914	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1915	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1920	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R1921	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R1922	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1923	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1924	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1925	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1926	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1927	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1928	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1929	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1930	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1931	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1932	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R1933	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1934	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1935	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1936	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1937	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1938	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1939	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1940	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1941	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1942	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1943	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1944	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R2002	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2003	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R2004	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R2006	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2007	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K1,K0
	R2008	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2010	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R2011	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2012	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R2013	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2014	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R2016	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R2017	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R2018	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R2019	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R2021	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R2023	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2026	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R2029	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2033	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R2034	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R7571	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R7581	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R7641	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R7651	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R9001	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R9005	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R9011	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R9019	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R9029	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	
	R9030	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R9031	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R9201	RK73HB1J100D	MG RESISTOR	10Ω 1/16W D	1	
	R9600	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R9611	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	
	R9710	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R9711	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R9712	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R9713	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	L165	LR73Z0AD100M	CHIP INDUCTOR		1	K1,K0

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-BT740DAB	E1	KDC-BT740DAB	X1	KDC-BT778HD	K1	KDC-X704	K0

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	L411	LR73Z0AD4R7M	CHIP INDUCTOR		1	
	L540	LK73Z0CA4R7M	M.CHIP INDUCTOR		1	
	L541	LR79Z0JM100M	CHIP INDUCTOR		1	
	L610	LR73Z0AD4R7M	CHIP INDUCTOR		1	
	L701	LR73Z0AD4R7M	CHIP INDUCTOR		1	
	L702	LB73H0AY-004	CHIP FERRITE		1	
	L706	LB73H0AY-004	CHIP FERRITE		1	K1,K0
	L707	LB73H0AY-004	CHIP FERRITE		1	K1,K0
	L708	LB73H0CT-002	CHIP FERRITE		1	
	L709	LB73H0AY-004	CHIP FERRITE		1	
	L821	LB73G0ED-002	CHIP FERRITE		1	
	L830	LB73G0ED-002	CHIP FERRITE		1	
	L901	LR79Z0JM330M	CHIP INDUCTOR		1	
	L902	LR79Z0JM330M	CHIP INDUCTOR		1	
	L903	LK73Z0CA4R7M	M.CHIP INDUCTOR		1	
	L960	LR73Z0AD4R7M	CHIP INDUCTOR		1	
	L962	LR73Z0AD4R7M	CHIP INDUCTOR		1	
	L990	L3D-0043-00	CHOKE COIL		1	
	L2006	RK73HH1J470D	MG RESISTOR		1	
	L9002	RK73GB2A000J	MG RESISTOR		1	
	A1303	W0C-0414-00	CIRCUIT MODULE		1	
	CN701	E5J-0216-00	R.RECEPTACLE		1	
	CN704	EB770BH-0830A	B TO B CONNE		1	
	CN990	E5J-0139-00	R.RECEPTACLE		1	
	CN3000	EC720AE-1026B	FFC FPC CONNE		1	
△	F321	F53-0513-08	PATTERN FUSE	4A	1	
△	F322	F53-0513-08	PATTERN FUSE	4A	1	
△	F540	FZA10BH-2R5	FUSE (CC)		1	
△	F625	FZA10BF-1R0	FUSE (CC)		1	
	J220	E1B-0013-00	3.5D PHONE JACK		1	
	J321	E6D-0015-10	PIN JACK		1	E1,X1
	J321	E6D-0016-10	PIN JACK		1	K1,K0
	J470	E5G-0029-00	CYL.RECEPTACLE		1	K1,K0
	J600	E6J-0017-00	JACK OTHERS		1	K1,K0
	J601	E3A-0527-00	ANTENNA CABLE		1	E1,X1
	K2005	LR73Z0AD4R7M	CHIP INDUCTOR		1	
	S830	S7A-0031-00	TACTILE PUSH SW		1	
	VA360	SDV1005E18//0	VARIATOR		1	
	VA390	SDV1005E18//0	VARIATOR		1	
	VA601	F0K-0265-00	SURGE ABSORBER		1	
	VA701	F0K-0282-00	SURGE ABSORBER		1	
	VA702	F0K-0282-00	SURGE ABSORBER		1	
	VA703	F0K-0282-00	SURGE ABSORBER		1	
	VA704	F0K-0282-00	SURGE ABSORBER		1	
	VA705	F0K-0282-00	SURGE ABSORBER		1	
	VA706	F0K-0282-00	SURGE ABSORBER		1	
	VA707	F0K-0282-00	SURGE ABSORBER		1	
	VA709	F0K-0282-00	SURGE ABSORBER		1	
	VA710	F0K-0282-00	SURGE ABSORBER		1	
	VA711	F0K-0282-00	SURGE ABSORBER		1	
	VA714	F0K-0282-00	SURGE ABSORBER		1	
	VA716	F0K-0282-00	SURGE ABSORBER		1	E1
	VA717	F0K-0282-00	SURGE ABSORBER		1	
	VA901	SDV1005E18//0	VARIATOR		1	
	VA905	F0K-0282-00	SURGE ABSORBER		1	
	VA906	F0K-0282-00	SURGE ABSORBER		1	
	VA907	F0K-0282-00	SURGE ABSORBER		1	
	X701	L7J-0138-00	QUARTZ CRYSTAL		1	
	X702	L7J-0123-00	QUARTZ CRYSTAL		1	
SWITCH PWB ASSY (XJ6-148x-0x) <XJ6>						
	IC1	BU97550KV-M	MOS IC		1	
	IC3	AS431AN-G1	ANALOG IC		1	
	IC90	SIRD630B6T	IR DETECT UNIT		1	K1,K0
	Q50	KTC4075EP/Y/	TRANSISTOR		1	
	Q51	KTC4075EP/Y/	TRANSISTOR		1	
	Q52	KTC4075EP/Y/	TRANSISTOR		1	
	Q53	KTC4075EP/Y/	TRANSISTOR		1	
	Q54	KTC4075EP/Y/	TRANSISTOR		1	
	Q55	KTC4075EP/Y/	TRANSISTOR		1	
	Q57	KTC4075EP/Y/	TRANSISTOR		1	
	Q58	KTC4075EP/Y/	TRANSISTOR		1	
	Q90	KRA302E-P	DIGI TRANSISTOR		1	K1,K0
	Q91	KRC402E-P	DIGI TRANSISTOR		1	K1,K0
	D2	SM5818PL	SCHOTTKY DIODE		1	
	D3	SM5818PL	SCHOTTKY DIODE		1	
	D12	QSMH-C199	LED		1	
	D13	QSMH-C199	LED		1	
	D20	QSMH-C199	LED		1	
	D21	LRTBGVTG-U//0	LED		1	
	D22	LRTBGVTG-U//0	LED		1	
	D23	LRTBGVTG-U//0	LED		1	
	D25	LRTBGVTG-U//0	LED		1	
	D49	LRTBGVTG-U//0	LED		1	
	D82	F0K-0282-00	SURGE ABSORBER		1	
	C1	CK73GXR1A475K	C CAPACITOR	4.7uF 10V K	1	
	C5	CK73GXR1A475K	C CAPACITOR	4.7uF 10V K	1	
	C6	CK73EXR1C106K	C CAPACITOR	10uF 16V K	1	
	C7	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C60	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C61	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C82	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C83	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-BT740DAB	E1	KDC-BT740DAB	X1	KDC-BT778HD	K1	KDC-X704	K0

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C84	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C85	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C86	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C91	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	K1,K0
	R1	RK73GH2A473D	MG RESISTOR	47kΩ 1/10W D	1	
	R2	RK73GH2A473D	MG RESISTOR	47kΩ 1/10W D	1	
	R3	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	
	R4	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R6	RK73EB2E151J	MG RESISTOR	150Ω 1/4W J	1	
	R8	RK73FB2B473J	MG RESISTOR	47kΩ 1/8W J	1	
	R10	RK73GB2A152J	MG RESISTOR	1.5kΩ 1/10W J	1	
	R12	RK73GB2A182J	MG RESISTOR	1.8kΩ 1/10W J	1	
	R13	RK73GB2A182J	MG RESISTOR	1.8kΩ 1/10W J	1	
	R14	RK73GB2A124J	MG RESISTOR	120kΩ 1/10W J	1	
	R21	RK73EB2E471J	MG RESISTOR	470Ω 1/4W J	1	
	R22	RK73EB2E181J	MG RESISTOR	180Ω 1/4W J	1	
	R23	RK73EB2E221J	MG RESISTOR	220Ω 1/4W J	1	
	R25	RK73FB2B182J	MG RESISTOR	1.8kΩ 1/8W J	1	
	R26	RK73FB2B102J	MG RESISTOR	1kΩ 1/8W J	1	
	R27	RK73FB2B102J	MG RESISTOR	1kΩ 1/8W J	1	
	R33	RK73EB2E681J	MG RESISTOR	680Ω 1/4W J	1	
	R34	RK73EB2E561J	MG RESISTOR	560Ω 1/4W J	1	
	R35	RK73EB2E561J	MG RESISTOR	560Ω 1/4W J	1	
	R57	RK73GB2A682J	MG RESISTOR	6.8kΩ 1/10W J	1	
	R60	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	1	
	R61	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	1	
	R62	RK73FB2B4R7J	MG RESISTOR	4.7Ω 1/8W J	1	
	R80	RK73EB2E221J	MG RESISTOR	220Ω 1/4W J	1	
	RA1	RK74GB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	RA2	RK74GB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	RA3	RK74GB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	RA50	RK74GB1J682J	MG RESISTOR	6.8kΩ 1/16W J	1	
	RA53	RK74GB1J682J	MG RESISTOR	6.8kΩ 1/16W J	1	
	CN2	E5K-0007-00	R.PLUG		1	
	FL80	L7K-0038-00	FILTER		1	
	J60	E1B-0037-00	3.5D PHONE JACK		1	
	J80	E5J-0069-00	USB TERMINAL		1	
	S20	T9K-0007-00	ROTARY ENCODER		1	

HD TUNER PWB ASSY (XJM-028K-00) <XJM>

△	IC1	SI4763-A42-GM	MOS IC		1	K1,K0
△	IC2	SI4613-A10-GM	MOS IC		1	K1,K0
△	IC3	W3F-0442-00	ROM IC		1	K1,K0
	IC4	XC6213B182N-G	MOS IC		1	K1,K0
	C2	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	K1,K0
	C3	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	K1,K0
	C4	CK73GBB1H222K	C CAPACITOR	2200pF 50V K	1	K1,K0
	C5	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	K1,K0
	C6	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K1,K0
	C7	CK73HXR1C473K	C CAPACITOR	0.047uF 16V K	1	K1,K0
	C8	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	K1,K0
	C9	CC73GCH1H390J	C CAPACITOR	39pF 50V J	1	K1,K0
	C10	CC73GCH1H270J	C CAPACITOR	27pF 50V J	1	K1,K0
	C11	CC73GCH1H0R5C	C CAPACITOR	0.5pF 50V C	1	K1,K0
	C15	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	K1,K0
	C16	CC73HCH1H050C	C CAPACITOR	5pF 50V C	1	K1,K0
	C18	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K1,K0
	C19	CK73HXR1C103K	C CAPACITOR	0.01uF 16V K	1	K1,K0
	C20	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K1,K0
	C21	CK73HXR1A104K	C CAPACITOR	0.1uF 10V K	1	K1,K0
	C22	CC73HCH1H102J	C CAPACITOR	1000pF 50V J	1	K1,K0
	C25	CK73HXR1H682K	C CAPACITOR	6800pF 50V K	1	K1,K0
	C26	CK73HXR1H682K	C CAPACITOR	6800pF 50V K	1	K1,K0
	C27	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	K1,K0
	C28	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	K1,K0
	C29	CC73HCH1H060D	C CAPACITOR	6pF 50V D	1	K1,K0
	C30	CC73HCH1H060D	C CAPACITOR	6pF 50V D	1	K1,K0
	C33	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K1,K0
	C40	CC73HCH1H020C	C CAPACITOR	2pF 50V C	1	K1,K0
	C42	CC73HCH1H150J	C CAPACITOR	15pF 50V J	1	K1,K0
	C43	CC73HCH1H150J	C CAPACITOR	15pF 50V J	1	K1,K0
	C44	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	K1,K0
	C48	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	K1,K0
	C50	CC73GCH1H0R5C	C CAPACITOR	0.5pF 50V C	1	K1,K0
	C51	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	K1,K0
	C52	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	K1,K0
	C53	CC73GCH1H0R5C	C CAPACITOR	0.5pF 50V C	1	K1,K0
	C54	CC73GCH1H0R5C	C CAPACITOR	0.5pF 50V C	1	K1,K0
	C55	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	K1,K0
	C56	CC73GCH1H0R5C	C CAPACITOR	0.5pF 50V C	1	K1,K0
	C57	CK73GXR1A475K	C CAPACITOR	4.7uF 10V K	1	K1,K0
	C58	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	K1,K0
	C59	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K1,K0
	C101	CC73HCH1H220J	C CAPACITOR	22pF 50V J	1	K1,K0
	C102	CC73HCH1H220J	C CAPACITOR	22pF 50V J	1	K1,K0
	C103	CC73HCH1H220J	C CAPACITOR	22pF 50V J	1	K1,K0
	C111	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	K1,K0
	C113	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	K1,K0
	C119	CC73HCH1H150J	C CAPACITOR	15pF 50V J	1	K1,K0
	C121	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	K1,K0
	C122	CC73HCH1H102J	C CAPACITOR	1000pF 50V J	1	K1,K0
	C123	CC73HCH1H180J	C CAPACITOR	18pF 50V J	1	K1,K0
	C124	CC73HCH1H180J	C CAPACITOR	18pF 50V J	1	K1,K0

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-BT740DAB	E1	KDC-BT740DAB	X1	KDC-BT778HD	K1	KDC-X704	K0

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C125	CK73HCH1H180J	C CAPACITOR	18pF 50V J	1	K1,K0
	C127	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	K1,K0
	C128	CK73HCH1H020C	C CAPACITOR	2pF 50V C	1	K1,K0
	C129	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	K1,K0
	C131	CK73HCH1H180J	C CAPACITOR	18pF 50V J	1	K1,K0
	C143	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	K1,K0
	C144	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	K1,K0
	C146	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	K1,K0
	C9002	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	K1,K0
	C9003	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	K1,K0
	C9004	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	K1,K0
	C9005	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	K1,K0
	C9006	CC73GCH1H010C	C CAPACITOR	1pF 50V C	1	K1,K0
	C9007	CC73GCH1H010C	C CAPACITOR	1pF 50V C	1	K1,K0
	C9009	CK73HXR0J474K	C CAPACITOR	0.47uF 6.3V K	1	K1,K0
	C9010	CC73HCH1H150J	C CAPACITOR	15pF 50V J	1	K1,K0
	C9011	CC73HCH1H150J	C CAPACITOR	15pF 50V J	1	K1,K0
	C9013	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	K1,K0
	C9016	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	K1,K0
	R1	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K1,K0
	R3	RK73HB1J240J	MG RESISTOR	24Ω 1/16W J	1	K1,K0
	R4	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	1	K1,K0
	R5	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	1	K1,K0
	R10	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	K1,K0
	R11	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	K1,K0
	R12	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K1,K0
	R14	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	K1,K0
	R16	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K1,K0
	R17	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K1,K0
	R18	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K1,K0
	R20	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K1,K0
	R26	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K1,K0
	R30	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K1,K0
	R31	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K1,K0
	R39	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K1,K0
	R40	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K1,K0
	R41	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K1,K0
	R42	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K1,K0
	R43	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K1,K0
	R44	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K1,K0
	R51	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	K1,K0
	R52	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	K1,K0
	R53	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	K1,K0
	R54	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	K1,K0
	R60	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K1,K0
	R61	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K1,K0
	R62	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	K1,K0
	R103	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K1,K0
	R104	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K1,K0
	R105	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K1,K0
	R107	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	K1,K0
	R108	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	K1,K0
	R109	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K1,K0
	R110	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K1,K0
	R111	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K1,K0
	R112	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K1,K0
	R114	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	1	K1,K0
	R115	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K1,K0
	R116	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K1,K0
	R121	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K1,K0
	R122	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K1,K0
	R123	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K1,K0
	R124	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K1,K0
	R127	RK73HB1J122J	MG RESISTOR	1.2kΩ 1/16W J	1	K1,K0
	R129	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K1,K0
	R140	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K1,K0
	R141	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K1,K0
	R142	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K1,K0
	R143	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K1,K0
	R144	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K1,K0
	R145	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K1,K0
	R155	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K1,K0
	R166	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K1,K0
	R9005	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	K1,K0
	R9006	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	K1,K0
	R9007	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	K1,K0
	R9008	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K1,K0
	L1	LK73H0BUR18K	M.CHIP INDUCTOR		1	K1,K0
	L2	LK73G0BE82NK	M.CHIP INDUCTOR		1	K1,K0
	L3	LK73G0BER12K	M.CHIP INDUCTOR		1	K1,K0
	L4	LK73H0BU1R2K	M.CHIP INDUCTOR		1	K1,K0
	L5	LK73G0BE1R8K	M.CHIP INDUCTOR		1	K1,K0
	L8	LK73G0BER39K	M.CHIP INDUCTOR		1	K1,K0
	L9	LK73G0AS10NJ	M.CHIP INDUCTOR		1	K1,K0
	L10	L1K-0001-00	BALUN TRANS		1	K1,K0
	L14	LK73G0BE100K	M.CHIP INDUCTOR		1	K1,K0
	L21	LB73G0BP-001	CHIP FERRITE		1	K1,K0
	L22	LB73G0BP-001	CHIP FERRITE		1	K1,K0
	L101	LB73G0FK-001	CHIP FERRITE		1	K1,K0
	L9001	LR73Z0AD4R7M	CHIP INDUCTOR		1	K1,K0
	CN1	EB740BH-0830B	B TO B CONNE		1	K1,K0
	E1	F1B-0107-00	SHIELDING CASE		1	K1,K0

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-BT740DAB	E1	KDC-BT740DAB	X1	KDC-BT778HD	K1	KDC-X704	K0

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	X1	L7J-0021-00	QUARTZ CRYSTAL		1	K1,K0
DAB TUNER PWB ASSY (XJM-029E-00) <XJM>						
	IC1	SI4763-A42-GM	MOS IC		1	E1,X1
	IC2	MTV301CQ	MOS IC		1	E1,X1
	IC3	GL3511SB169	MOS IC		1	E1,X1
	IC4	W3F-0441-00	ROM IC		1	E1,X1
	IC5	XC6213B122N-G	MOS IC		1	E1,X1
	IC6	XC6213B182N-G	MOS IC		1	E1,X1
	IC7	XC6213B182N-G	MOS IC		1	E1,X1
	D431	UDZV3.3B	ZENER DIODE		1	E1,X1
	C1	CC73HCH1H270J	C CAPACITOR	27pF 50V J	1	E1,X1
	C2	CC73HCH1H390J	C CAPACITOR	39pF 50V J	1	E1,X1
	C3	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	E1,X1
	C4	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	E1,X1
	C5	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	1	E1,X1
	C6	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	E1,X1
	C7	CC73HCH1H050C	C CAPACITOR	5pF 50V C	1	E1,X1
	C10	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1,X1
	C13	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	E1,X1
	C14	CK73GBB1H222K	C CAPACITOR	2200pF 50V K	1	E1,X1
	C15	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	E1,X1
	C16	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	E1,X1
	C17	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	E1,X1
	C18	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	E1,X1
	C19	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	E1,X1
	C20	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	E1,X1
	C21	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	E1,X1
	C22	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	E1,X1
	C23	CK73HBB1H682K	C CAPACITOR	6800pF 50V K	1	E1,X1
	C24	CK73HBB1H682K	C CAPACITOR	6800pF 50V K	1	E1,X1
	C25	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	E1,X1
	C26	CC73HCH1H150J	C CAPACITOR	15pF 50V J	1	E1,X1
	C27	CC73HCH1H100D	C CAPACITOR	10pF 50V D	1	E1,X1
	C28	CC73HCH1H180J	C CAPACITOR	18pF 50V J	1	E1,X1
	C29	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1,X1
	C30	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1,X1
	C31	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1,X1
	C32	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1,X1
	C33	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	E1,X1
	C36	CC73HCH1H060D	C CAPACITOR	6pF 50V D	1	E1,X1
	C37	CC73HCH1H060D	C CAPACITOR	6pF 50V D	1	E1,X1
	C38	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1,X1
	C39	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	E1,X1
	C41	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1,X1
	C42	CC73HCH1H080D	C CAPACITOR	8pF 50V D	1	E1,X1
	C43	CC73HCH1H030C	C CAPACITOR	3pF 50V C	1	E1,X1
	C44	CC73HCH1H330J	C CAPACITOR	33pF 50V J	1	E1,X1
	C45	CK73HXR1H222K	C CAPACITOR	2200pF 50V K	1	E1,X1
	C46	CC73HCH1H680J	C CAPACITOR	68pF 50V J	1	E1,X1
	C47	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	E1,X1
	C48	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1,X1
	C49	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1,X1
	C50	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1,X1
	C51	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1,X1
	C52	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1,X1
	C53	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1,X1
	C54	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1,X1
	C55	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1,X1
	C56	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1,X1
	C57	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1,X1
	C58	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1,X1
	C59	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1,X1
	C60	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1,X1
	C61	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1,X1
	C62	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1,X1
	C63	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1,X1
	C64	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1,X1
	C65	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1,X1
	C66	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1,X1
	C67	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1,X1
	C68	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1,X1
	C69	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1,X1
	C70	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1,X1
	C71	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1,X1
	C72	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1,X1
	C73	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1,X1
	C74	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	E1,X1
	C75	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	E1,X1
	C76	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	E1,X1
	C77	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	E1,X1
	C78	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	1	E1,X1
	C79	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	E1,X1
	C80	CK73GXR0J225K	C CAPACITOR	2.2uF 6.3V K	1	E1,X1
	C81	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	E1,X1
	C82	CC73HCH1H100D	C CAPACITOR	10pF 50V D	1	E1,X1
	C86	CC73HCH1H100D	C CAPACITOR	10pF 50V D	1	E1,X1
	C87	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	E1,X1
	C96	CC73HCH1H221J	C CAPACITOR	220pF 50V J	1	E1,X1
	C97	CC73HCH1H100D	C CAPACITOR	10pF 50V D	1	E1,X1
	C9008	CK73HXR1H472K	C CAPACITOR	4700pF 50V K	1	E1,X1
	C9012	CK73HXR1H472K	C CAPACITOR	4700pF 50V K	1	E1,X1
	C9014	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	E1,X1

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-BT740DAB	E1	KDC-BT740DAB	X1	KDC-BT778HD	K1	KDC-X704	K0

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C9017	CK73HXR1H222K	C CAPACITOR	2200pF 50V K	1	E1,X1
	C9020	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	E1,X1
	C9021	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	E1,X1
	C9023	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	E1,X1
	C9024	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	E1,X1
	C9026	CC73HCH1H120J	C CAPACITOR	12pF 50V J	1	E1,X1
	C9027	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	E1,X1
	C9028	CC73HCH1H561J	C CAPACITOR	560pF 50V J	1	E1,X1
	C9029	CC73HCH1H561J	C CAPACITOR	560pF 50V J	1	E1,X1
	C9030	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	E1,X1
	C9031	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	E1,X1
	C9033	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	E1,X1
	C9035	CC73HCH1H0R5C	C CAPACITOR	0.5pF 50V C	1	E1,X1
	C9036	CK73HXR1H472K	C CAPACITOR	4700pF 50V K	1	E1,X1
	C9037	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	E1,X1
	C9038	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	E1,X1
	C9039	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	E1,X1
	C9040	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	E1,X1
	C9041	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	E1,X1
	C9042	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	E1,X1
△	C9043	CC73GCH1H010C	C CAPACITOR	1pF 50V C	1	E1,X1
	C9045	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	E1,X1
△	C9046	CC73GCH1H010C	C CAPACITOR	1pF 50V C	1	E1,X1
	R1	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	1	E1,X1
	R2	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	1	E1,X1
	R3	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	E1,X1
	R5	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1,X1
	R6	RK73HB1J240J	MG RESISTOR	24Ω 1/16W J	1	E1,X1
	R13	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	E1,X1
	R14	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	E1,X1
	R15	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	E1,X1
	R16	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	E1,X1
	R17	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	E1,X1
	R18	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	E1,X1
	R19	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	E1,X1
	R20	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	E1,X1
	R21	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	E1,X1
	R22	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	E1,X1
	R23	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	E1,X1
	R24	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	E1,X1
	R25	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1,X1
	R26	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1,X1
	R27	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1,X1
	R28	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1,X1
	R29	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1,X1
	R30	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1,X1
	R33	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1,X1
	R34	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1,X1
	R35	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	E1,X1
	R36	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	E1,X1
	R37	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	E1,X1
	R38	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1,X1
	R39	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	E1,X1
	R40	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	E1,X1
	R41	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	E1,X1
	R44	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1,X1
	R46	RK73HH1J433D	MG RESISTOR	43kΩ 1/16W D	1	E1,X1
	R47	RK73HH1J433D	MG RESISTOR	43kΩ 1/16W D	1	E1,X1
	R48	RK73HH1J623D	MG RESISTOR	62kΩ 1/16W D	1	E1,X1
	R49	RK73HH1J623D	MG RESISTOR	62kΩ 1/16W D	1	E1,X1
	R50	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1,X1
	R51	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1,X1
	R52	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	E1,X1
	R53	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	E1,X1
	R54	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	E1,X1
	R55	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	E1,X1
	R56	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	E1,X1
	R57	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	E1,X1
	R58	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	E1,X1
	R59	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1,X1
	R60	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1,X1
	R61	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1,X1
	R62	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1,X1
	R63	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1,X1
	R64	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1,X1
	R65	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	E1,X1
	R66	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	E1,X1
	R67	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	E1,X1
	R68	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	E1,X1
	R69	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1,X1
	R70	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1,X1
	R71	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1,X1
	R72	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1,X1
	R73	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1,X1
	R74	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1,X1
	R75	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	E1,X1
	R76	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	E1,X1
	R77	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	E1,X1
	R78	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	E1,X1
	R79	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	E1,X1
	R80	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	E1,X1
	R81	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	E1,X1

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-BT740DAB	E1	KDC-BT740DAB	X1	KDC-BT778HD	K1	KDC-X704	K0

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R82	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	E1,X1
	R83	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	E1,X1
	R84	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	E1,X1
	R88	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	E1,X1
	R89	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	E1,X1
	R90	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	E1,X1
	R91	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	E1,X1
	R92	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	E1,X1
	R93	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	E1,X1
	R95	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	E1,X1
	R96	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	E1,X1
	R97	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	E1,X1
	R98	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1,X1
	R100	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1,X1
	R102	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1,X1
	R105	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	E1,X1
	R447	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1,X1
	R448	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1,X1
	R449	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1,X1
	R450	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1,X1
	R451	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1,X1
	R457	RK73GB2A152J	MG RESISTOR	1.5kΩ 1/10W J	1	E1,X1
	R458	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	E1,X1
	R459	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	1	E1,X1
	R9004	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	E1,X1
	R9005	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1,X1
	L2	LK73G0BER12K	M.CHIP INDUCTOR		1	E1,X1
	L3	LK73G0BE82NK	M.CHIP INDUCTOR		1	E1,X1
	L4	LK73G0BER12K	M.CHIP INDUCTOR		1	E1,X1
	L5	L1K-0001-00	BALUN TRANS		1	E1,X1
	L6	LK73G0BE1R8K	M.CHIP INDUCTOR		1	E1,X1
	L7	LK73G0BER39K	M.CHIP INDUCTOR		1	E1,X1
	L8	LK73G0BE100K	M.CHIP INDUCTOR		1	E1,X1
	L10	LK73G0BF33NJ	M.CHIP INDUCTOR		1	E1,X1
	L11	LK73G0BF68NJ	M.CHIP INDUCTOR		1	E1,X1
	L12	LK73G0BFR15J	M.CHIP INDUCTOR		1	E1,X1
	L13	LK73G0BFR15J	M.CHIP INDUCTOR		1	E1,X1
	L14	LK73G0BF3N3S	M.CHIP INDUCTOR		1	E1,X1
	L15	LK73G0BF5N6S	M.CHIP INDUCTOR		1	E1,X1
	L16	LK73G0BF10NJ	M.CHIP INDUCTOR		1	E1,X1
	L17	LK73G0BF10NJ	M.CHIP INDUCTOR		1	E1,X1
	L18	LK73G0BF82NJ	M.CHIP INDUCTOR		1	E1,X1
	L20	LK73G0BFR22J	M.CHIP INDUCTOR		1	E1,X1
	L21	LK73G0BFR22J	M.CHIP INDUCTOR		1	E1,X1
	L22	LB73G0FK-001	CHIP FERRITE		1	E1,X1
	L23	LB73G0BP-001	CHIP FERRITE		1	E1,X1
	L24	LB73G0BP-001	CHIP FERRITE		1	E1,X1
	L26	LB73G0BP-001	CHIP FERRITE		1	E1,X1
	L29	LB73H0CG-001	CHIP FERRITE		1	E1,X1
	L30	LB73H0CG-001	CHIP FERRITE		1	E1,X1
	L31	LB73G0AM-004	CHIP FERRITE		1	E1,X1
	L32	LR73Z0AD4R7M	CHIP INDUCTOR		1	E1,X1
	L33	LB73H0AY-004	CHIP FERRITE		1	E1,X1
	L34	LB73H0AY-004	CHIP FERRITE		1	E1,X1
	L35	LB73H0AY-004	CHIP FERRITE		1	E1,X1
	CN1	EB740BH-0830B	B TO B CONNE		1	E1,X1
	E1	F1B-0106-00	SHIELDING CASE		1	E1,X1
	J1	QNB0353-001	ANT TERMINAL		1	E1,X1
	TH1	FSMD035-R	P THERMISTOR		1	E1,X1
	VA1	F0K-0014-00	SURGE ABSORBER		1	E1,X1
	X1	L7J-0028-00	QUARTZ CRYSTAL		1	E1,X1
	X2	L7J-0027-00	QUARTZ CRYSTAL		1	E1,X1

CD MECHA PWB ASSY (XJD-018W-00) <XJD>

IC1	MN6627553APA	ANALOG IC		1	
IC2	BD8266EFV-M	ANALOG IC		1	
Q1	2SB1197K/QR/	TRANSISTOR		1	
C1	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
C3	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
C4	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
C7	CK73HXR1A334K	C CAPACITOR	0.33uF 10V K	1	
C8	CC73JCH1E102J	C CAPACITOR	1000pF 25V J	1	
C9	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
C10	CC73JCH1E102J	C CAPACITOR	1000pF 25V J	1	
C11	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
C12	CK73JXR1A153K	C CAPACITOR	0.015uF 10V K	1	
C13	CC73JCH1E681J	C CAPACITOR	680pF 25V J	1	
C14	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
C15	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
C16	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	
C17	CK73HXR1A334K	C CAPACITOR	0.33uF 10V K	1	
C18	CK73JXR1H332K	C CAPACITOR	3300pF 50V K	1	
C19	CK73JXR1E223K	C CAPACITOR	0.022uF 25V K	1	
C20	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	
C21	CK73HXR1A334K	C CAPACITOR	0.33uF 10V K	1	
C26	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	
C27	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
C28	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
C50	CK73JXR1H682K	C CAPACITOR	6800pF 50V K	1	
C51	CK73JXR1H682K	C CAPACITOR	6800pF 50V K	1	
C52	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
C53	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
C55	CK73HXR1A154K	C CAPACITOR	0.15uF 10V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-BT740DAB	E1	KDC-BT740DAB	X1	KDC-BT778HD	K1	KDC-X704	K0

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C60	CC73JCH1E102J	C CAPACITOR	1000pF 25V J	1	
	C61	CC73JCH1E102J	C CAPACITOR	1000pF 25V J	1	
	C62	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	
	C82	CC73JCH1E681J	C CAPACITOR	680pF 25V J	1	
	C83	CC73JCH1H120J	C CAPACITOR	12pF 50V J	1	
	C84	CC73JCH1H120J	C CAPACITOR	12pF 50V J	1	
	C85	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	
	C244	CK73HXR1A154K	C CAPACITOR	0.15uF 10V K	1	
	R3	RK73HB1J821J	MG RESISTOR	820Ω 1/16W J	1	
	R4	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	
	R7	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	
	R8	RK73HB1J821J	MG RESISTOR	820Ω 1/16W J	1	
	R9	RK73HB1J823J	MG RESISTOR	82kΩ 1/16W J	1	
	R10	RK73FB2B4R7J	MG RESISTOR	4.7Ω 1/8W J	1	
	R11	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	1	
	R12	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	
	R17	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	
	R18	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	1	
	R20	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R21	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	1	
	R23	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J	1	
	R24	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	
	R26	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R28	RK73HB1J114J	MG RESISTOR	110kΩ 1/16W J	1	
	R31	RK73HB1J821J	MG RESISTOR	820Ω 1/16W J	1	
	R32	RK73HB1J821J	MG RESISTOR	820Ω 1/16W J	1	
	R33	RK73HB1J131J	MG RESISTOR	130Ω 1/16W J	1	
	R37	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R44	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R47	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R48	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R49	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R50	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R51	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R52	RK73HB1J562J	MG RESISTOR	5.6kΩ 1/16W J	1	
	R53	RK73HB1J562J	MG RESISTOR	5.6kΩ 1/16W J	1	
	R54	RK73HB1J562J	MG RESISTOR	5.6kΩ 1/16W J	1	
	R305	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	L1	LB73G0EA-002	CHIP FERRITE		1	
	L2	LB73H0AY-004	CHIP FERRITE		1	
	L3	LB73H0AY-004	CHIP FERRITE		1	
	CN1	EC720AE-1026B	FFC FPC CONNE		1	
	CN2	EC720AK-0515A	FFC FPC CONNE		1	
	S1	S6J-0001-00	PUSH SWITCH		1	
	S2	S6J-0001-00	PUSH SWITCH		1	
	S3	S6J-0002-00	PUSH SWITCH		1	
	X1	L7J-0005-00	QUARTZ CRYSTAL		1	