
EXPLODED VIEW / PARTS LIST

Main section

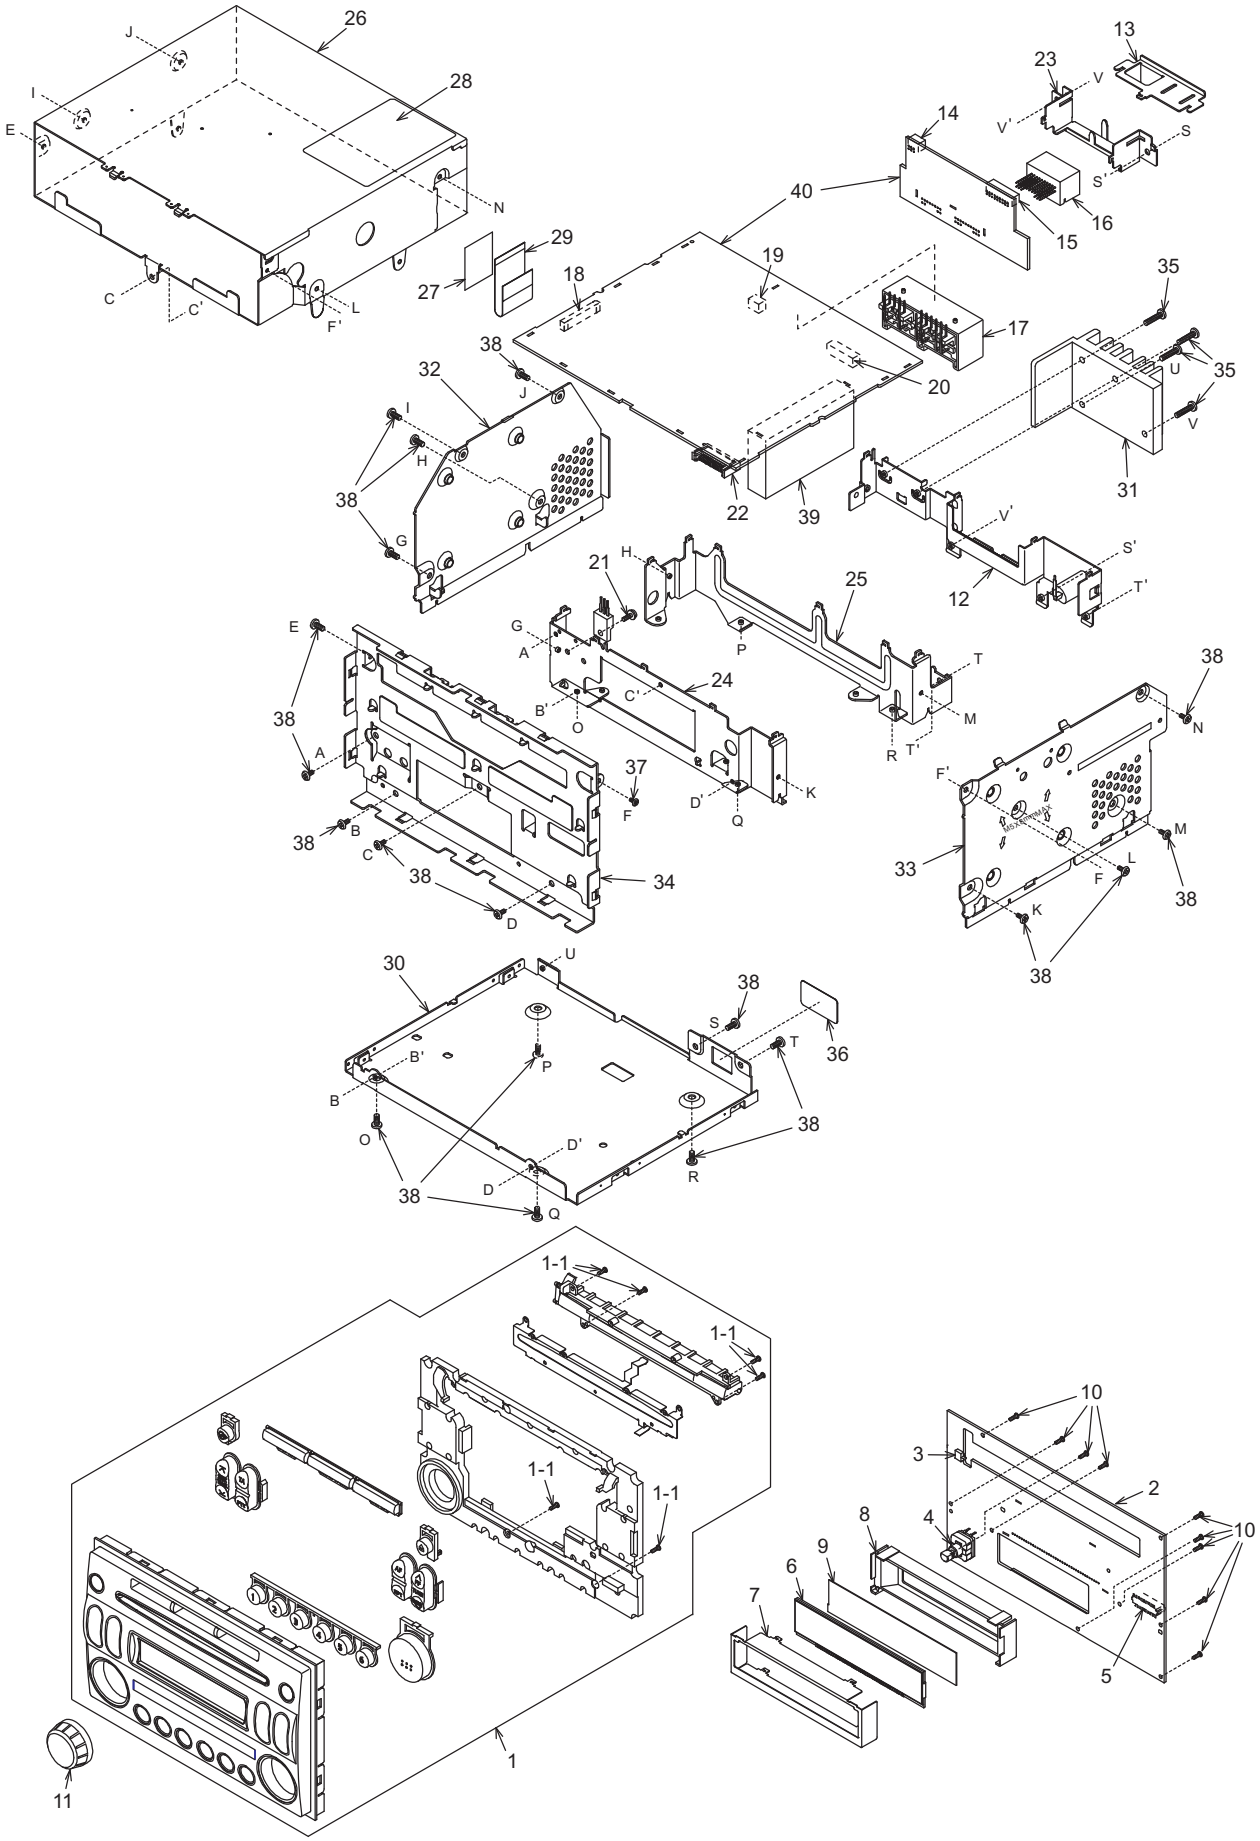


Note) Some parts depend on each model. The model name is specified in the description.

NO.	PART NO.	DESCRIPTION	Q'TY
1	940-8079-00 940-8079-10	ESCUTCHEON ASSY (PN-2649N-A) ESCUTCHEON ASSY (PN-2649N-B)	1
1-1	716-0778-00	WAVE SCREW(2 x 6)	6
2	----------	SWITCH PWB	1
3	013-7415-50	DETECTOR SWITCH	1
4	016-0013-04	VARIABLE RESISTOR	1
5	074-1279-68	OUTLET SOCKET(18P) (TO MAIN PWB)	1
6	379-1286-40	INDICATOR(LCD)	1
7	331-3684-21	LCD COVER	1
8	335-7015-01	LCD HOLDER	1
9	335-7054-01	LCD REFLECTOR	1
10	716-0778-00	WAVE SCREW(2 x 6)	9
11	380-5568-00	KNOB	1
12	331-3238-31 331-3238-11	REAR PLATE(with ANT.recept) (PN-2649N-A) REAR PLATE(with ANT.recept) (PN-2649N-B)	1
13	331-3257-21	CONNECTOR HOLDER B	1
14	074-0898-06	OUTLET SOCKET (6P) (TO MAIN PWB)	1
15	074-0898-18	OUTLET SOCKET (18P) (TO MAIN PWB)	1
16	074-1087-12	OUTLET SOCKET (A16)	1
17	074-1141-00	OUTLET SOCKET (NS06/10)	1
18	074-1192-22	OUTLET SOCKET (22P) (TO CD CHANGER)	1

NO.	PART NO.	DESCRIPTION	Q'TY
19	076-0368-06	PLUG (6P)	1
20	076-0368-18	PLUG (18P)	1
21	716-1494-00	IT SCREW (M2.6 x 6)	1
22	076-0648-18	PLUG (18P) (TO SWITCH PWB)	1
23	331-2025-21	CONNECTOR HOLDER A	1
24	331-3236-22	MECHANISM BRACKET (FR)	1
25	331-3237-21	MECHANISM BRACKET (RR)	1
26	929-0196-80	CD CHANGER MODULE	1
27	335-6788-01	MOLDED PART	1
28	286-6514-54 286-6514-55	SETPLATE(PN-2649N-A) SETPLATE(PN-2649N-B)	1
29	816-2563-10	FLAT WIRE(TO CD CHANGER)	1
30	311-1834-23	LOWER CASE	1
31	313-1933-10	HEAT SINK	1
32	331-3258-22	SIDE CASE (L)	1
33	331-3259-22	SIDE CASE (R)	1
34	331-3265-21	ESCUTCHEON PLATE	1
35	714-2612-81	MACHINE SCREW (M2.6 x 12)	4
36	347-6623-01	SPACER	1
37	714-2004-81	MACHINE SCREW (M2 x 4)	1
38	714-2605-81	MACHINE SCREW (M2.6 x 5)	19
39	880-2090Q 880-2090T	AM/FM TUNER(PN-2649N-A) AM/FM TUNER(PN-2649N-B)	1
40	----------	MAIN PWB	1


Main section : CD changer module

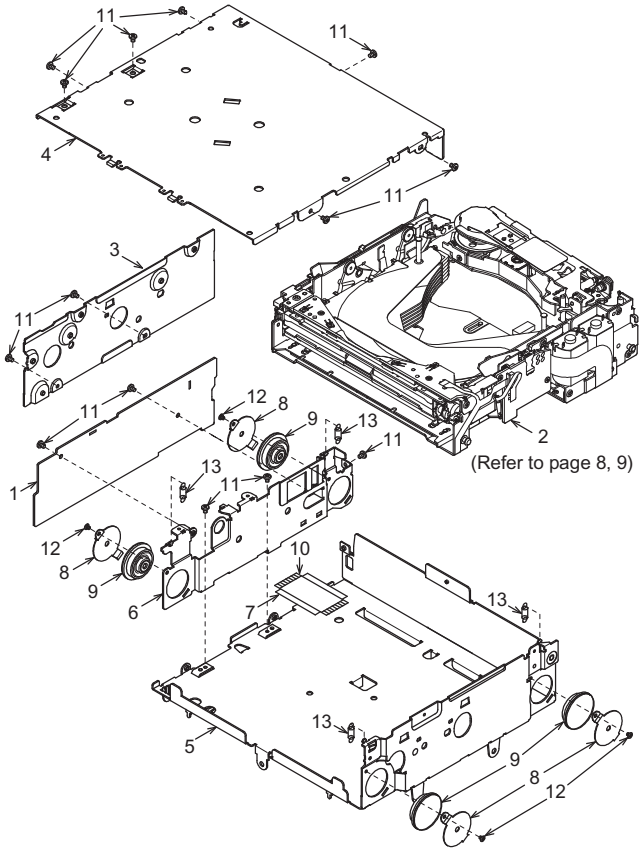


NO.	PART NO.	DESCRIPTION	Q'TY
1	----------	SIDE PWB	1
2	----------	CD CHANGER MECHANISM	1
3	305-0315-21	SIDE CVR	1
4	310-1741-23	UPPER CASE	1
5	311-1837-25	LOWER CASE	1
6	331-3266-24	PWB-HOLDER	1
7	347-6619-00	INSULATOR	1
8	620-1086-20	DAMPER-H-PLT	4
9	629-0083-01	DAMPER	4
10	039-1957-01	FPC (WITHOUT COMPONENT)	1
11	716-1716-00	SCREW (M2 x 3)	14
12	716-3450-00	SCREW (M1.7 x 2)	4
13	750-3491-00	FL-SPRING	4

CD changer mechanism section : CD changer module

* The parts list is on page 10.

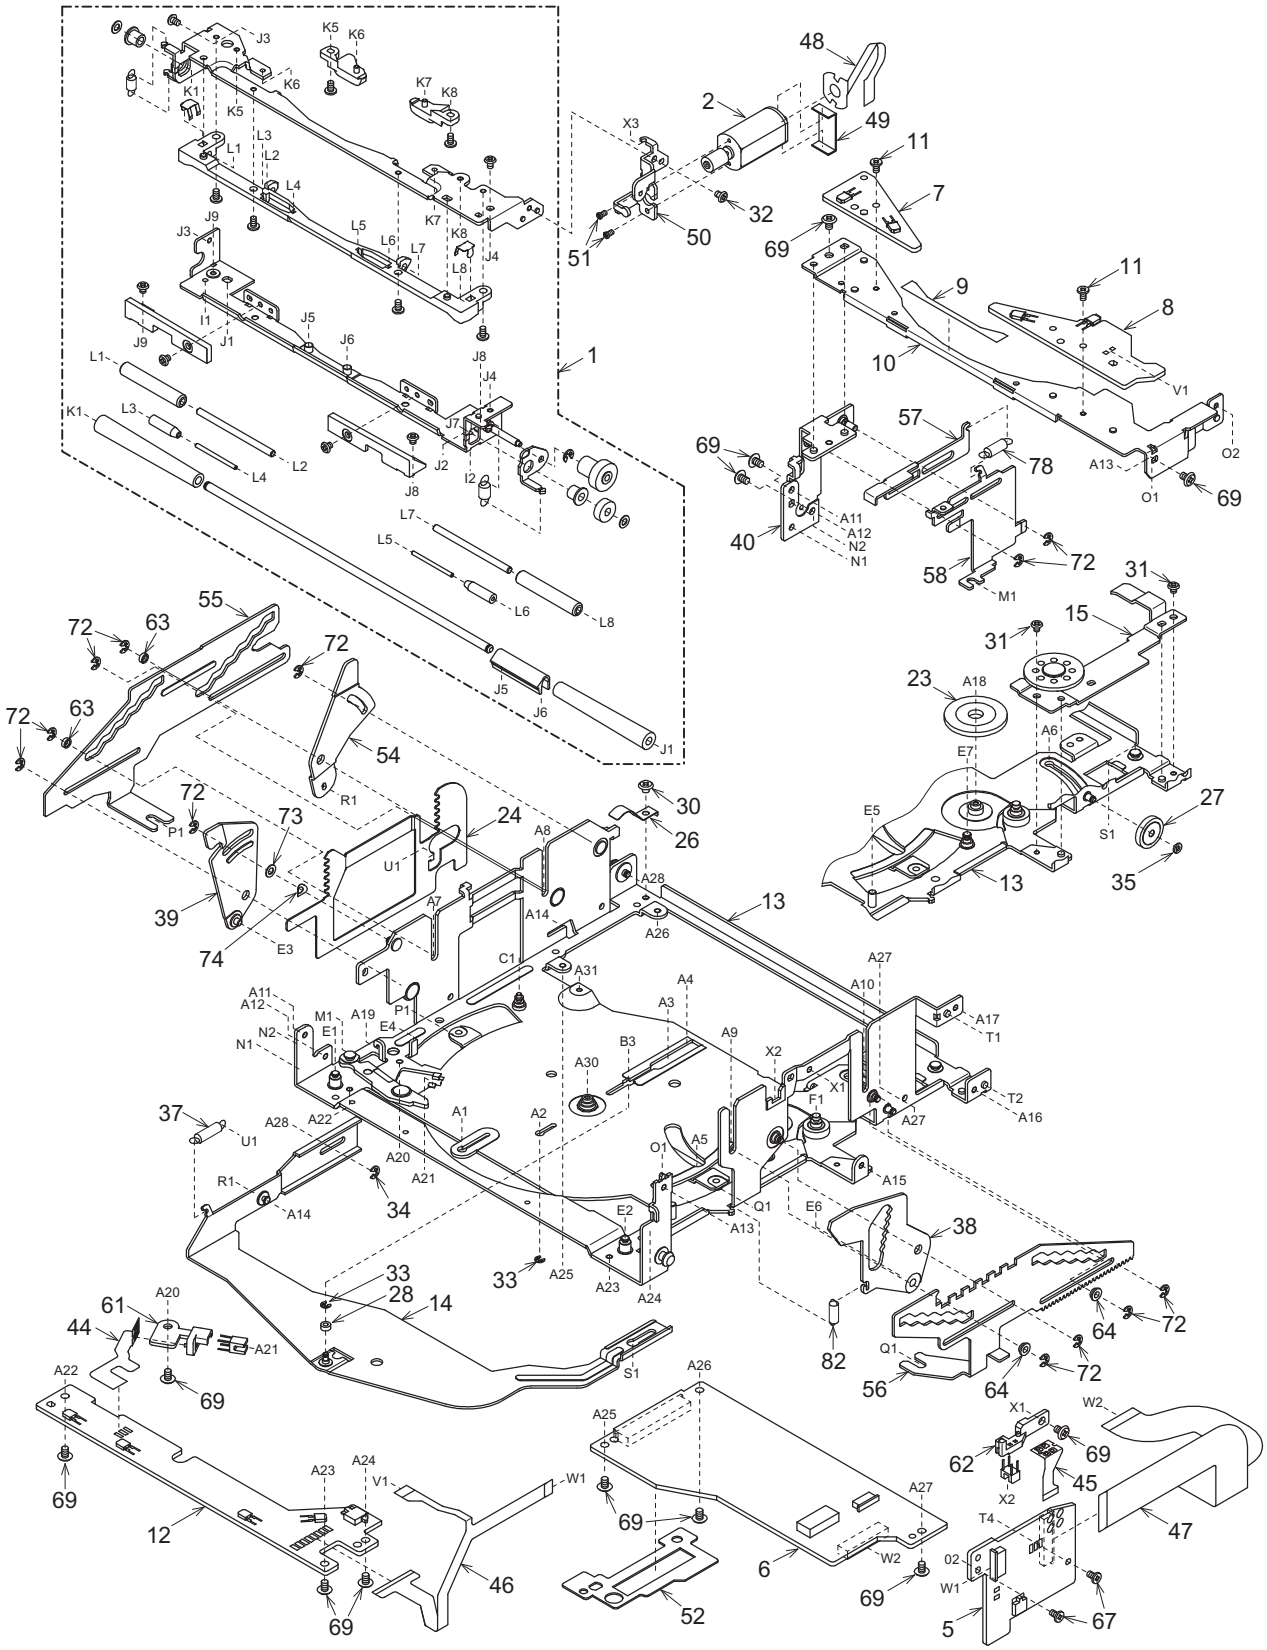


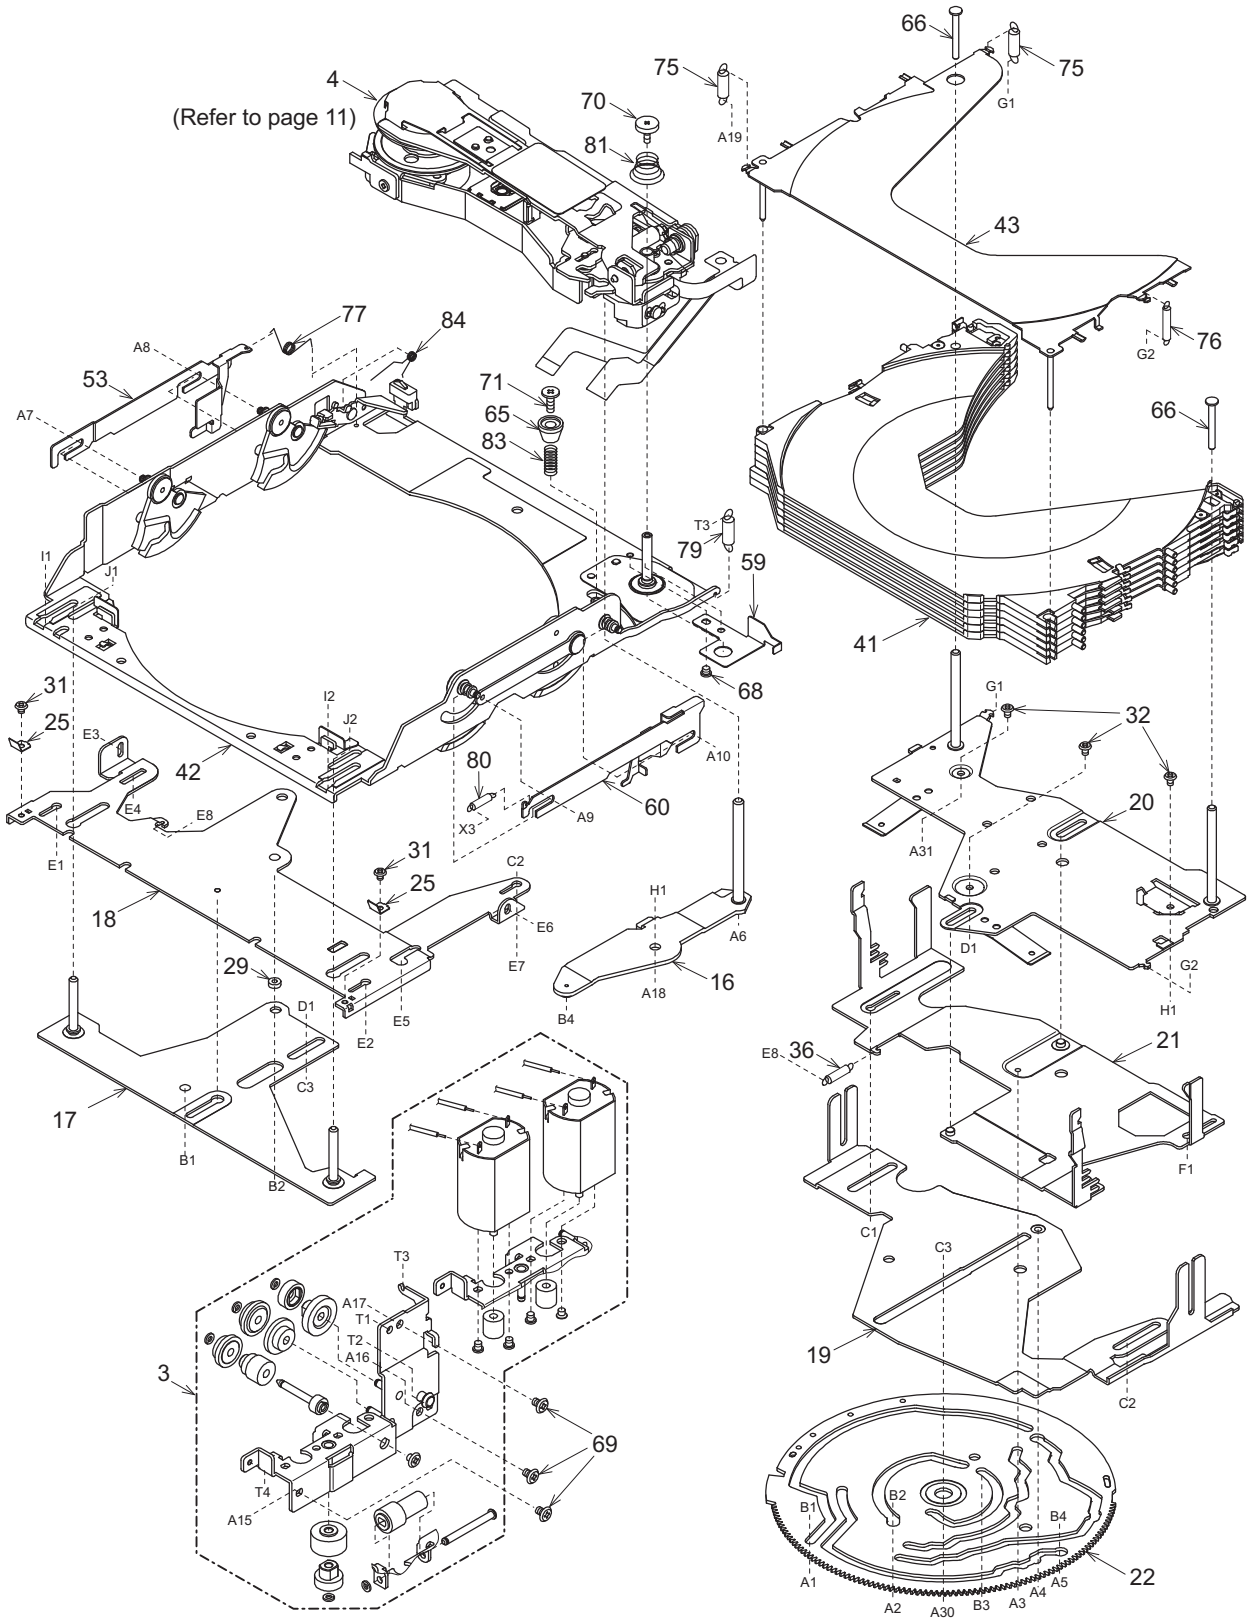
(Refer to page 11)
4
70
81
75
A19
66
75
G1
43
76
G2
66
41
77
84
A8
53
A7
71
65
83
T3
79
59
68
I1
J1
I2
J2
42
80
X3
A9
60
A10
31
25
E3
E4
E8
E1
18
31
25
C2
E6
E7
29
D1
E5
E2
C3
17
B1
B2
H1
A6
A18
16
B4
3
T3
A17
T1
T2
A16
T4
A15
69
G1
32
20
A31
D1
G2
H1
E8
36
21
F1
C1
C3
19
C2
B1
B2
B4
A1
A5
22
A2
A30
B3
A3
A4

NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-521-100	LOADING UNIT (WITHOUT MOTOR)	1
2	SMA-186-100	LOADING MOTOR-ASSY	1
3	HBS-530-100	MTR-P-SUB-ASSY	1
4	HBS-531-103	DRIVE UNIT	1
5	----------	DRIVER PWB	1
6	----------	CD-PWB	1
7	----------	LED-L-PWB	1
8	----------	LED-R-PWB	1
9	039-2011-01	LED-FPC (WITHOUT COMPONENT)	1
10	620-1577-20	FRONT-PLATE	1
11	716-1866-00	SCREW (M1.7 x 3)	2
12	----------	SENSOR PWB	1
13	966-0597-24	CHASSIS-ASSY	1
14	966-0600-23	LOCK-P-RE-ASSY	1
15	966-0601-21	M-GEAR-P-ASSY	1
16	966-0602-24	DR-LINK-ASSY	1
17	966-0603-21	MODE-P-ASSY	1
18	966-0604-24	LOCK-PF-ASSY	1
19	966-0605-20	SHIFT-P-ASSY	1
20	966-0607-26	COV-PLATE-ASSY	1
21	966-0606-23	HLC-PLATE-ASSY	1
22	620-1041-26	GEAR PLATE	1
23	620-1042-20	M-GEAR-H	1
24	620-1090-20	GAP PLATE	1
25	620-1568-20	RATTLE PLATE-F	2
26	620-1604-20	DR-PLATE-SPRING	1
27	621-0640-20	V-GEAR-G	1
28	622-1651-00	LOCK-RE-ROLLER	1
29	622-1652-00	LOCK-PF-ROLLER	1
30	716-1850-01	SCREW (M2 x 2)	1
31	716-3450-00	SCREW (M1.7 x 2)	4
32	716-3451-00	SCREW (M1.7 x 2.5)	4
33	743-1200-10	E-RING	2
34	743-1500-10	E-RING	1
35	746-0761-00	SPECIAL WASHER	1
36	750-3485-01	TENTION-SP-L	1
37	750-3497-00	GAP-P-SPRING L	1
38	966-0615-21	LOCK-L-RF-ASSY	1
39	966-0616-20	LOCK-L-LF-ASSY	1
40	966-0618-21	EJECT-B-ASSY	1
41	966-0624-27	DISC-HOL-ASSY	1
42	966-0652-22	DR-BASE-P-ASSY	1
43	HBS-535-100	TOP PLATE-ASSY	1

NO.	PART NO.	DESCRIPTION	Q'TY
44	039-2009-00	PIM-FPC (WITHOUT COMPONENT)	1
45	039-2010-00	PIV-FPC (WITHOUT COMPONENT)	1
46	039-2012-00	SENSOR-FPC (WITHOUT COMPONENT)	1
47	039-2013-02	MOS-FPC (WITHOUT COMPONENT)	1
48	039-2014-01	L-MOTOR-FPC (WITHOUT COMPONENT)	1
49	347-6657-01	LO-COVER SHEET	1
50	620-1576-20	LO-MOTOR-PLT	1
51	738-1422-11	SCREW (M1.4 x 2.2)	2
52	347-6974-21	FPC COVER	1
53	620-1056-22	HLR-PLATE-L	1
54	620-1066-20	LOCK LINK-LR	1
55	620-1067-21	SLIDE PLATE L	1
56	620-1068-22	SLIDE PLATE-R	1
57	620-1071-21	EJECT ARM	1
58	620-1072-20	EJECT PLATE	1
59	620-1083-20	FPC-PLATE	1
60	620-1580-20	HLR-PLATE-R	1
61	621-0641-21	PI-HOLDER-M	1
62	621-0656-21	PI-HOLDER-V	1
63	622-1622-20	SL-G-ROLLER	2
64	622-1623-00	SL-G-ROLLER-R	2
65	622-1648-23	DU-STP-SLEEVE	1
66	622-1650-23	COV-PLATE PIN B	2
67	716-1866-00	SCREW (M1.7 x 3)	2
68	716-1873-00	SCREW (M2 x 1.6)	1
69	716-3449-00	SCREW (M2 x 3)	15
70	716-3459-00	SCREW (M1.7 x 5)	1
71	716-3466-02	SCREW (M2 x 6)	1
72	743-1500-10	E-RING	12
73	746-0624-00	WASHER	1
74	746-0712-23	WASHER	1
75	750-3478-01	TOP-P-SP-L	2
76	750-3479-01	TOP-P-SP-R	1
77	750-3480-01	DR-LOCK-SP	1
78	750-3483-00	EJECT-A-SPRING	1
79	750-3484-01	DR-BASE-SPRING	1
80	750-3486-01	LO-TENSION-SP	1
81	750-3489-01	DRIVE-P-SPRING	1
82	750-3496-00	GAP-P-SPRING R	1
83	750-6711-01	DU-STP-SPRING	1
84	750-6712-01	DR-LOCK-SP-B	1

Drive unit section : CD changer module

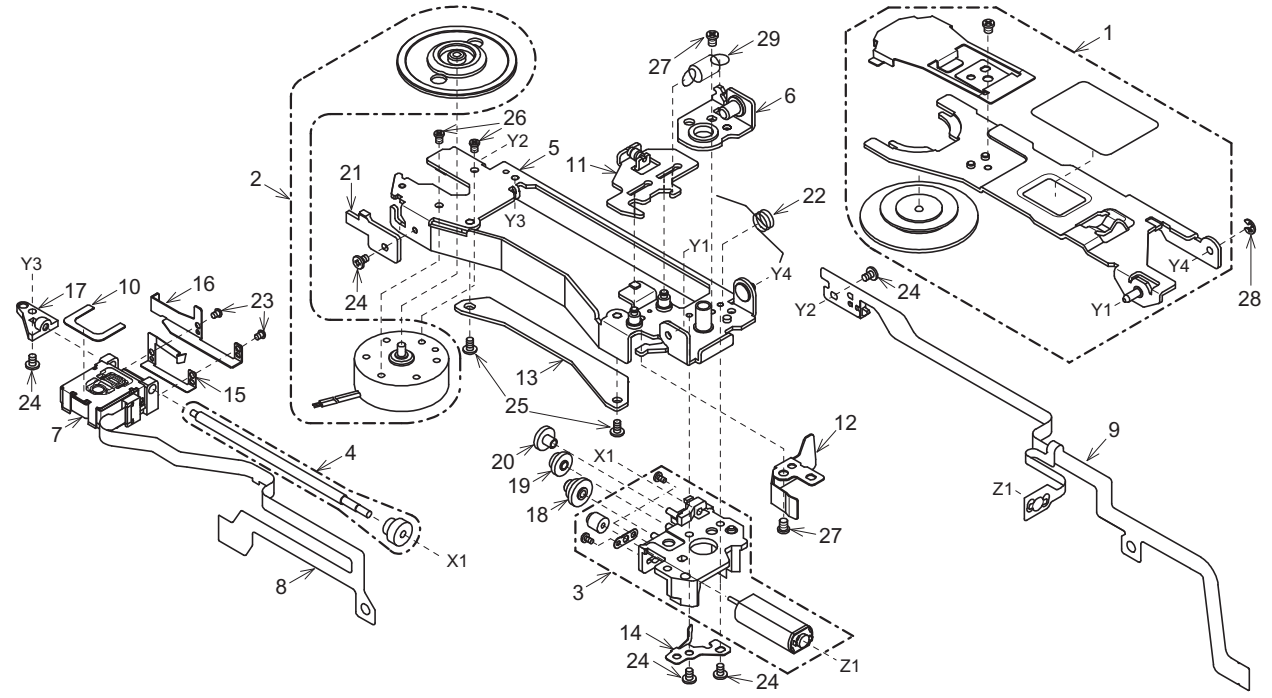

NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-532-101	CLAMP SUB-ASSY	1
2	SMA-193-100	SPINDLE MOTOR-ASSY	1
3	SMA-191-100	SLED MOTOR-ASSY	1
4	HBS-515-101	LS-ASSY	1
5	966-0649-82	DRIVE PLT-ASSY	1
6	966-0650-20	SPRING-PLT-ASSY	1
7	969-0011-01	PICK UP-ASSY	1
8	039-2015-01	P/U-FPC (WITHOUT COMPONENT)	1
9	039-2016-02	M/S-FPC (WITHOUT COMPONENT)	1
10	347-6632-00	PU-SHEET	1
11	HBS-542-101	D-SHIFT-P-ASSY	1
12	620-1078-20	PUSH PLATE	1
13	620-1080-22	PU-GUIDE-PLATE	1
14	620-1081-20	SCREW PUSH-PLT	1

NO.	PART NO.	DESCRIPTION	Q'TY
15	620-1587-83	SH-SPRING-PLT	1
16	620-1730-81	SCREW-HOL-PLT	1
17	621-0670-20	LS-HOLDER-L	1
18	621-0673-20	D-GEAR-A	1
19	621-0674-20	D-GEAR-B	1
20	621-0675-20	D-GEAR-C	1
21	621-0683-21	DU-STOPPER	1
22	750-3504-00	CLAMP-A-SPRING	1
23	716-3511-00	SCREW(1.4 x 3)	2
24	716-3470-00	SCREW(M1.7 x 3)	5
25	716-3474-00	SCREW(M1.7 x 3)	2
26	738-1720-17	PRECISION SCREW(M1.7 x 2)	2
27	738-2025-17	PRECISION SCREW(M2 x 2.5)	2
28	743-1500-10	E-RING	1
29	750-3487-00	SHIFT-P-SPRING	1

ELECTRICAL PARTS LIST

Main PWB(B1) section

Note) Some parts depend on each model. The model name is specified in the description.

REF No.	PART No.	DESCRIPTION
ANT101	331-3238-31	REAR PLATE with ANT.recept (PN-2649N-A)
ANT102	331-3238-11	REAR PLATE with ANT.recept (PN-2649N-B)
BL101	880-2090Q	TUNER PACK (PN-2649N-A)
BL101	880-2090T	TUNER PACK (PN-2649N-B)
C101	168-8222-55	8200pF K
C102	168-2232-55	0.022uF K
C103	168-1042-78	16V 0.1uF
C104	187-4763-17	6.3V47uF
C105	168-2722-55	2700pF K
C106	187-1053-67	50V1uF
C107	166-1011-50	100pF CH
C108	166-1011-50	100pF CH
C109	168-3312-55	330pF K
C110	166-1501-50	15pF CH
C111	166-1801-50	18pF CH
C113	166-1007-50	10pF CH
C114	168-1032-55	0.01uF K
C115	166-2201-50	22pF CH
C116	187-4763-17	6.3V47uF
C117	168-1022-55	1000pF K
C118	168-1042-78	16V 0.1uF
C119	168-2232-55	0.022uF K
C120	187-4763-37	16V47uF
C121	168-5612-55	560pF Z
C122	168-1032-55	0.01uF K
C123	168-1022-55	1000pF K
C124	187-4763-37	16V47uF
C125	166-4701-50	47pF CH
C126	168-3312-55	330pF K
C127	168-2232-55	0.022uF K
C128	166-5601-50	56pF CH
C129	187-2253-67	50V2.2uF
C130	168-2232-55	0.022uF K
C131	187-1073-37	16V100uF
C132	168-2232-55	0.022uF K
C133	178-1052-78	1uF
C134	187-4753-67	50V4.7uF
C135	168-6812-55	680pF K
C136	168-1042-78	16V 0.1uF
C137	168-2232-55	0.022uF K
C138	168-1032-55	0.01uF K
C139	168-2732-55	16V 0.027uF K
C140	168-2732-55	16V 0.027uF K
C141	168-2732-55	16V 0.027uF K
C142	168-1042-78	16V 0.1uF
C143	168-1042-78	16V 0.1uF
C145	168-8212-55	820pF K
C146	168-1045-56	0.1uF Z
C147	168-1032-55	0.01uF K
C148	168-1022-55	1000pF K
C150	119-0000-05	1/10W 0 ohm JW (PN-2649N-A)
C150	166-1511-50	150pF CH (PN-2649N-B)
C151	166-4701-50	47pF CH (PN-2649N-B)
C152	168-4722-55	4700pF K
C153	166-4701-50	47pF CH (PN-2649N-B)
C154	168-1022-55	1000pF K (PN-2649N-B)
C155	166-2201-50	22pF CH (PN-2649N-B)
C156	168-4732-78	0.047uF K (PN-2649N-B)
C157	168-6812-55	680pF K (PN-2649N-B)
C158	168-1032-55	0.01uF K (PN-2649N-B)
C159	168-3332-78	0.033uF K (PN-2649N-B)
C160	168-3922-55	3900pF K (PN-2649N-B)
C161	168-1032-55	0.01uF K (PN-2649N-B)
C162	168-1032-55	0.01uF K (PN-2649N-B)
C163	187-1053-67	50V1uF (PN-2649N-B)
C301	168-1042-78	16V 0.1uF
C305	042-1562-68	16V 22uF
C307	042-1562-36	50V 1uF
C312	042-1562-36	50V 1uF
C313	178-4742-78	0.47uF
C314	178-4742-78	0.47uF
C315	168-1222-55	1200pF K
C316	042-1562-36	50V 1uF
C317	042-1562-36	50V 1uF
C318	168-1222-55	1200pF K
C323	178-1842-78	0.18uF
C324	178-1842-78	0.18uF
C325	178-1842-78	0.18uF
C326	178-1842-78	0.18uF
C327	168-8212-55	820pF K
C328	168-8212-55	820pF K
C329	168-8212-55	820pF K
C330	168-8212-55	820pF K
C331	042-1562-17	16V 10uF
C332	042-1562-17	16V 10uF
C333	168-1832-55	0.018uF K
C407	168-1042-78	16V 0.1uF
C409	168-2232-55	0.022uF K
C411	168-4722-55	4700pF K
C413	166-1011-50	100pF CH
C415	166-1011-50	100pF CH
C416	166-1011-50	100pF CH
C417	166-1011-50	100pF CH
C420	188-4763-17	6.3V 47uF
C421	168-1042-78	16V 0.1uF
C422	168-1022-55	1000pF K
C423	168-1042-78	16V 0.1uF
C424	168-1032-55	0.01uF K
C427	168-1042-78	16V 0.1uF
C429	166-1011-50	100pF CH
C430	168-1032-55	0.01uF K
C501	168-1042-78	16V 0.1uF
C502	187-1073-37	16V100uF
C504	042-1548-03	16V 100uF
C505	168-1042-78	16V 0.1uF
C506	163-1073-35	16V100uF
C507	187-1073-37	16V100uF
C508	187-1073-37	16V100uF
C509	042-0423-94	10V 4.7uF
C510	168-1042-78	16V 0.1uF
C511	042-0592-58	16V 10uF
C515	163-4763-35	16V47uF
C516	168-1042-78	16V 0.1uF
C517	042-0595-62	16V 10uF
C554	187-1063-57	35V10uF
C555	168-2232-55	0.022uF K
C601	168-2232-55	0.022uF K
C602	168-2222-55	2200pF K
C603	168-2222-55	2200pF K
C604	168-2222-55	2200pF K
C605	168-2222-55	2200pF K
C606	168-2222-55	2200pF K
C607	168-2222-55	2200pF K
C608	168-2222-55	2200pF K
C609	168-2222-55	2200pF K
C610	168-2222-55	2200pF K
C611	172-1041-15	0.1uF
C612	189-3383-32	16V 3300uF
C613	188-1053-68	50V 1uF
C614	172-1041-15	0.1uF
C615	188-1063-38	16V 10uF
C743	042-1562-17	16V 10uF
C744	042-1562-15	10V 220uF
C745	166-2201-50	22pF CH
C866	168-5622-55	5600pF K
C867	168-1032-55	0.01uF K
C872	168-1032-55	0.01uF K
C877	168-1042-78	16V 0.1uF
C878	168-1042-78	16V 0.1uF
C883	042-0592-73	50V 1uF
C884	172-3931-15	0.039uF
C885	172-3931-15	0.039uF
C886	172-3931-15	0.039uF
C887	172-3931-15	0.039uF
C888	188-1063-38	16V 10uF
C890	187-1053-67	50V1uF
C894	178-1052-78	1uF
C895	178-1052-78	1uF
C896	178-1052-78	1uF
C897	178-1052-78	1uF
C898	163-4753-55	35V4.7uF
C899	163-4753-55	35V4.7uF
C1014	187-1066-37	16V10uFNP
C1015	187-1066-37	16V10uFNP
CCT1	050-0140-54	1/32W 1k ohm x4J
CCT402	050-0140-54	1/32W 1k ohm x4J
CCT403	050-0140-54	1/32W 1k ohm x4J
CCT409	050-0140-54	1/32W 1k ohm x4J
CCT411	050-0140-54	1/32W 1k ohm x4J
CCT412	050-0140-54	1/32W 1k ohm x4J
CCT413	050-0140-54	1/32W 1k ohm x4J
CCT414	050-0140-54	1/32W 1k ohm x4J
CCT416	050-0140-54	1/32W 1k ohm x4J
CCT417	050-0140-54	1/32W 1k ohm x4J
D101	001-0516-90	MA111
D102	001-0516-90	MA111
D150	001-3205-90	1SV251 (PN-2649N-B)
D151	001-3205-90	1SV251 (PN-2649N-B)
D403	001-0516-90	MA111
D406	001-0516-90	MA111
D502	001-0504-48	HZS9C2L
D503	001-0466-90	S5688B
D504	001-0466-90	S5688B
D506	001-0504-48	HZS9C2L
D552	001-0504-49	HZS9 C3L
D602	001-0347-34	MA4062L
D605	001-0466-90	S5688B
D606	001-0330-90	1SS119
D607	001-2015-00	RL253
D608	001-0466-90	S5688B
D1050	001-0466-90	S5688B
IC101	051-6201-90	LC72146M
IC102	051-4607-90	SAA6581T
IC103	051-0350-93	NJM4558M
IC104	051-4603-90	TA2083FN (PN-2649N-B)
IC302	051-5027-00	LC75412WH
IC402	051-9400-29	BR93L46F-W
IC403	051-0350-93	NJM4558M
IC404	052-3185-30	M30624MGA-586GP
IC405	051-5436-08	S-80933ANMP-DDX

REF No.	PART No.	DESCRIPTION
IC501	051-1834-00	LM2936Z-5.0
IC601	051-5418-08	S-80827ANMP-EDQ
IC707	051-0350-93	NJM4558M
IC808	051-2042-00	TA8275H
J402	074-1192-22	22P
J601	074-1141-00	NS10+6
J1001	074-1087-12	OUTLET SOCKET
L101	010-6009-88	220uH
L103	010-6009-88	220uH
L150	010-2198-65	0.1uH
		(PN-2649N-B)
L151	010-2198-53	5.6uH
		(PN-2649N-B)
L152	010-2003-04	30uH
L153	010-2312-52	0.27uH
		(PN-2649N-B)
L154	010-2046-41	560uF
		(PN-2649N-B)
L401	010-3406-66	NLV25 22uH J
L601	010-8021-00	490uH
P1	076-0648-18	18P
P201	076-0368-18	18P
P202	076-0368-06	PLUG(6P)
P1001	074-0898-18	18P
P1002	074-0898-06	OUTLET
		SOCKET(6P)
Q101	198-0669-00	2SK669
Q102	190-1162-00	2SA1162
Q103	190-1162-00	2SA1162
Q104	192-2712-50	2SC2712 Y,G,L
Q105	125-0001-91	UN2111
Q106	125-2005-91	UN2211
Q107	125-2005-91	UN2211
Q108	125-2005-91	UN2211
Q150	125-2005-91	UN2211
		(PN-2649N-B)
Q151	193-0601-00	2SD601A
		(PN-2649N-B)
Q152	193-0601-00	2SD601A
		(PN-2649N-B)
Q153	125-2005-91	UN2211
		(PN-2649N-B)
Q406	125-2005-91	UN2211
Q407	125-2005-91	UN2211
Q408	125-0006-90	UN2110
Q415	125-2005-91	UN2211
Q416	193-0601-00	2SD601A
Q417	125-2005-91	UN2211
Q418	125-0001-91	UN2111
Q502	193-2118-00	2SD2118F5 Q,R,S
Q503	193-1858-00	2SD1858
Q505	125-2005-91	UN2211
Q506	190-1048-00	2SA1048
Q507	191-1205-60	2SB1205 R,S,T
Q508	125-0001-91	UN2111
Q509	125-2005-91	UN2211
Q512	193-1858-00	2SD1858
Q513	125-2005-91	UN2211
Q514	191-1197-50	2SB1197K Q,R
Q553	103-2353-00	2SD2353
Q554	125-0001-91	UN2111
Q555	125-2005-91	UN2211
Q603	193-0601-00	2SD601A
Q607	125-2005-91	UN2211
Q608	191-0709-00	2SB709A Q,R,S
Q609	100-1359-00	2SA1359
Q701	125-2005-91	UN2211
Q804	125-4001-90	XN1504
Q805	125-4001-90	XN1504
Q806	125-0006-90	UN2110
Q807	125-0006-90	UN2110
Q808	125-9003-92	IMD3
Q1010	125-2005-91	UN2211
Q1011	125-0001-91	UN2111

REF No.	PART No.	DESCRIPTION
Q1050	125-2005-91	UN2211
Q1051	191-0709-00	2SB709A Q,R,S
Q1052	193-0601-00	2SD601A
R101	119-2221-15	1/10W 2.2k ohm
R102	119-1231-15	1/10W 12k ohm
R103	119-2711-15	1/10W 270 ohm
R104	119-1021-15	1/10W 1k ohm
R105	119-5631-15	1/10W 56k ohm
R106	119-1031-15	1/10W 10k ohm
R107	116-1201-15	1/4W 12 ohm
R108	116-3311-15	1/4W 330 ohm
R109	119-2221-15	1/10W 2.2k ohm
R110	119-1031-15	1/10W 10k ohm
R111	116-3301-15	1/4W 33 ohm
R112	116-5691-15	1/4W 5.6 ohm
R113	119-1021-15	1/10W 1k ohm
R114	119-2221-15	1/10W 2.2k ohm
R115	119-1021-15	1/10W 1k ohm
R116	119-4721-15	1/10W 4.7k ohm
R117	119-2221-15	1/10W 2.2k ohm
R118	119-1031-15	1/10W 10k ohm
R119	119-1021-15	1/10W 1k ohm
R120	119-5621-15	1/10W 5.6k ohm
R121	119-3311-15	1/10W 330 ohm
R122	119-3331-15	1/10W 33k ohm
R123	119-1041-15	1/10W 100k ohm
R124	119-2211-15	1/10W 220 ohm
R126	119-0000-05	1/10W 0 ohm JW
R127	119-1031-15	1/10W 10k ohm
R128	119-3321-15	1/10W 3.3k ohm
R130	119-0000-05	1/10W 0 ohm JW
R133	119-1021-15	1/10W 1k ohm
R134	119-4721-15	1/10W 4.7k ohm
R135	119-1021-15	1/10W 1k ohm
R136	119-1021-15	1/10W 1k ohm
R150	119-0000-05	1/10W 0 ohm JW
		(PN-2649N-A)
R151	119-0000-05	1/10W 0 ohm JW
		(PN-2649N-B)
R152	119-0000-05	1/10W 0 ohm JW
		(PN-2649N-B)
R153	119-4741-15	1/10W 470k ohm
		(PN-2649N-B)
R154	119-1031-15	1/10W 10k ohm
		(PN-2649N-B)
R155	119-1021-15	1/10W 1k ohm
		(PN-2649N-B)
R156	119-1021-15	1/10W 1k ohm
		(PN-2649N-B)
R157	119-8201-15	1/10W 82 ohm
		(PN-2649N-B)
R159	119-6841-15	1/10W 680k ohm
		(PN-2649N-B)
R160	119-6841-15	1/10W 680k ohm
		(PN-2649N-B)
R161	119-1841-15	1/10W 180k ohm
		(PN-2649N-B)
R162	119-1241-15	1/10W 120k ohm
		(PN-2649N-B)
R163	119-2231-15	1/10W 22k ohm
		(PN-2649N-B)
R164	119-1031-15	1/10W 10k ohm
		(PN-2649N-B)
R314	119-1821-15	1/10W 1.8k ohm
R315	119-1821-15	1/10W 1.8k ohm
R316	119-3931-15	1/10W 39k ohm
R317	119-3931-15	1/10W 39k ohm
R351	119-4721-15	1/10W 4.7k ohm
R352	119-4721-15	1/10W 4.7k ohm
R355	119-4721-15	1/10W 4.7k ohm
R356	119-4721-15	1/10W 4.7k ohm
R411	119-4721-15	1/10W 4.7k ohm
R413	119-3311-15	1/10W 330 ohm
R414	119-1521-15	1/10W 1.5k ohm

REF No.	PART No.	DESCRIPTION
R415	119-1021-15	1/10W 1k ohm
R417	119-1021-15	1/10W 1k ohm
R418	119-4731-15	1/10W 47k ohm
R419	119-1041-15	1/10W 100k ohm
R420	119-4721-15	1/10W 4.7k ohm
R421	119-2241-15	1/10W 220k ohm
R423	119-4731-15	1/10W 47k ohm
R425	119-2231-15	1/10W 22k ohm
R426	119-4731-15	1/10W 47k ohm
R427	119-3311-15	1/10W 330 ohm
R430	119-3311-15	1/10W 330 ohm
R431	119-4731-15	1/10W 47k ohm
R432	119-4731-15	1/10W 47k ohm
R433	119-4731-15	1/10W 47k ohm
R435	119-4731-15	1/10W 47k ohm
R436	119-2231-15	1/10W 22k ohm
R438	119-2231-15	1/10W 22k ohm
R439	032-0140-89	1/10W 47k ohm F
R440	119-4731-15	1/10W 47k ohm
R441	119-1021-15	1/10W 1k ohm
R443	119-2231-15	1/10W 22k ohm
R444	119-4731-15	1/10W 47k ohm
R446	032-0140-89	1/10W 47k ohm F
R447	119-4731-15	1/10W 47k ohm
R450	032-0140-57	1/10W 5.6k ohm F
R451	032-0140-57	1/10W 5.6k ohm F
R452	119-1031-15	1/10W 10k ohm
R453	119-4731-15	1/10W 47k ohm
R456	119-4731-15	1/10W 47k ohm
R457	119-4731-15	1/10W 47k ohm
R458	119-4731-15	1/10W 47k ohm
R459	119-4731-15	1/10W 47k ohm
R460	119-1041-15	1/10W 100k ohm
R461	119-3331-15	1/10W 33k ohm
R463	119-4731-15	1/10W 47k ohm
R466	119-6821-15	1/10W 6.8k ohm
R469	119-1031-15	1/10W 10k ohm
R470	119-1031-15	1/10W 10k ohm
R471	119-4731-15	1/10W 47k ohm
R472	119-1041-15	1/10W 100k ohm
R474	119-0000-05	1/10W 0 ohm JW
R475	119-5631-15	1/10W 56k ohm
R477	119-1031-15	1/10W 10k ohm
R478	119-1031-15	1/10W 10k ohm
R479	119-1021-15	1/10W 1k ohm
R481	119-4731-15	1/10W 47k ohm
R483	119-4731-15	1/10W 47k ohm
R485	119-4731-15	1/10W 47k ohm
R486	119-4731-15	1/10W 47k ohm
R488	119-4731-15	1/10W 47k ohm
R491	119-4731-15	1/10W 47k ohm
R493	119-4731-15	1/10W 47k ohm
R494	119-4731-15	1/10W 47k ohm
R496	119-4731-15	1/10W 47k ohm
R497	119-1021-15	1/10W 1k ohm
R498	119-1021-15	1/10W 1k ohm
R499	119-4721-15	1/10W 4.7k ohm
R502	116-3911-15	1/4W 390 ohm
R503	119-1031-15	1/10W 10k ohm
R504	116-1011-15	1/4W 100 ohm
R505	119-4721-15	1/10W 4.7k ohm
R506	119-1021-15	1/10W 1k ohm
R507	119-1031-15	1/10W 10k ohm
R508	116-7501-15	1/4W 75 ohm
R509	116-2201-15	1/4W 22 ohm
R510	116-2201-15	1/4W 22 ohm
R512	116-2211-15	1/4W 220 ohm
R514	119-1031-15	1/10W 10k ohm
R515	119-1021-15	1/10W 1k ohm
R552	111-2211-98	1/4W 220 ohm
R554	119-1041-15	1/10W 100k ohm
R601	119-4741-15	1/10W 470k ohm
R602	119-2741-15	1/10W 270k ohm
R605	119-1031-15	1/10W 10k ohm

REF No.	PART No.	DESCRIPTION
R606	119-5611-15	1/10W 560 ohm
R611	116-1221-15	1/4W 1.2k ohm
R612	119-4721-15	1/10W 4.7k ohm
R613	116-1221-15	1/4W 1.2k ohm
R614	111-5691-98	1/4W 5.6 ohm
R615	111-5691-98	1/4W 5.6 ohm
R616	116-1531-15	1/4W 15k ohm
R617	114-2291-18	1W 2.2 ohm
R624	119-0000-05	1/10W 0 ohm JW
R703	119-2221-15	1/10W 2.2k ohm
R758	119-4731-15	1/10W 47k ohm
R759	119-4731-15	1/10W 47k ohm
R875	119-1231-15	1/10W 12k ohm
R878	119-1831-15	1/10W 18k ohm
R904	119-1031-15	1/10W 10k ohm
R905	119-1031-15	1/10W 10k ohm
R906	119-1031-15	1/10W 10k ohm
R907	119-1031-15	1/10W 10k ohm
R908	119-1031-15	1/10W 10k ohm
R909	119-1031-15	1/10W 10k ohm

REF No.	PART No.	DESCRIPTION
R910	119-1031-15	1/10W 10k ohm
R912	119-0000-05	1/10W 0 ohm JW
R913	119-1031-15	1/10W 10k ohm
R914	119-1031-15	1/10W 10k ohm
R915	119-1031-15	1/10W 10k ohm
R916	119-1031-15	1/10W 10k ohm
R919	119-1031-15	1/10W 10k ohm
R920	119-1031-15	1/10W 10k ohm
R921	119-8221-15	1/10W 8.2k ohm
R922	119-8221-15	1/10W 8.2k ohm
R923	119-1231-15	1/10W 12k ohm
R924	119-1231-15	1/10W 12k ohm
R925	119-2241-15	1/10W 220k ohm
R926	119-2241-15	1/10W 220k ohm
R927	119-2241-15	1/10W 220k ohm
R928	119-2241-15	1/10W 220k ohm
R1023	119-3011-15	1/10W 300 ohm
R1027	119-4731-15	1/10W 47k ohm
R1050	119-1031-15	1/10W 10k ohm
R1051	119-2231-15	1/10W 22k ohm

REF No.	PART No.	DESCRIPTION
R1052	119-3321-15	1/10W 3.3k ohm
R1053	119-1031-15	1/10W 10k ohm
R1054	119-4731-15	1/10W 47k ohm
R1055	119-1031-15	1/10W 10k ohm
R1056	119-1241-15	1/10W 120k ohm
R1057	119-3331-15	1/10W 33k ohm
R1058	119-6801-15	1/10W 68 ohm
R1059	119-2241-15	1/10W 220k ohm
SUP101	060-0122-91	DSP-141N-S00B (PN-2649N-B)
SUP102	060-0122-91	DSP-141N-S00B
VR101	012-5203-63	470k ohm
VR150	012-5203-63	470k ohm (PN-2649N-B)
X101	061-1066-00	7.2MHz
X102	061-3013-00	4.33MHz
X401	060-1505-50	CSTCC10.0MG-TC
PWB	039-2378-21	PWB(WITHOUT COMPONENT)

Switch PWB(B2) section

REF No.	PART No.	DESCRIPTION
C1101	166-8211-50	820pF
C1102	168-4732-78	0.047uF
C1103	168-4732-78	0.047uF
C1104	168-1042-78	16V 0.1uF
C1105	042-0416-59	10V33uF
CCT1101	050-0140-53	1/32W 0 ohm x4J
D1100	001-7048-96	RAY1112H-75M
D1101	001-7048-96	RAY1112H-75M
D1102	001-7048-96	RAY1112H-75M
D1103	001-7048-96	RAY1112H-75M
D1104	001-7048-96	RAY1112H-75M
D1105	001-7048-96	RAY1112H-75M
D1106	001-7048-96	RAY1112H-75M
D1107	001-7048-96	RAY1112H-75M
D1108	001-7048-96	RAY1112H-75M
D1109	001-7048-96	RAY1112H-75M
D1110	001-7048-96	RAY1112H-75M
D1111	001-7048-96	RAY1112H-75M
D1112	001-7048-96	RAY1112H-75M
D1113	001-7048-96	RAY1112H-75M
D1145	001-0516-90	MA111
D1146	001-0516-90	MA111
D1147	001-0516-90	MA111

REF No.	PART No.	DESCRIPTION
D1148	001-0516-90	MA111
D1149	001-0516-90	MA111
IC1	051-6013-00	LC75854W
J101	074-1279-68	18P
LCD1	379-1286-40	INDICATOR(LCD)
PL1101	017-0433-88	14V40mA
PL1102	017-0433-88	14V40mA
PL1103	017-0433-88	14V40mA
PL1104	017-0433-88	14V40mA
PL1105	017-0433-88	14V40mA
PL1106	017-0433-88	14V40mA
PL1107	017-0433-88	14V40mA
PL1108	017-0433-88	14V40mA
R1101	119-6831-15	1/10W 68k ohm
R1102	119-7511-15	1/10W 750 ohm
R1103	119-7511-15	1/10W 750 ohm
R1104	119-7511-15	1/10W 750 ohm
R1105	119-7511-15	1/10W 750 ohm
R1106	119-7511-15	1/10W 750 ohm
R1107	119-7511-15	1/10W 750 ohm
R1108	119-7511-15	1/10W 750 ohm
S1101	013-6312-50	SKRP-ABE-010
S1102	013-6312-50	SKRP-ABE-010

REF No.	PART No.	DESCRIPTION
S1103	013-6312-50	SKRP-ABE-010
S1104	013-6312-50	SKRP-ABE-010
S1105	013-6312-50	SKRP-ABE-010
S1106	013-6312-50	SKRP-ABE-010
S1107	013-6312-50	SKRP-ABE-010
S1108	013-6312-50	SKRP-ABE-010
S1109	013-6312-50	SKRP-ABE-010
S1110	013-6312-50	SKRP-ABE-010
S1111	013-6312-50	SKRP-ABE-010
S1112	013-6312-50	SKRP-ABE-010
S1113	013-6312-50	SKRP-ABE-010
S1114	013-6312-50	SKRP-ABE-010
S1115	013-6312-50	SKRP-ABE-010
S1116	013-6312-50	SKRP-ABE-010
S1117	013-6312-50	SKRP-ABE-010
S1118	013-6312-50	SKRP-ABE-010
S1119	013-6312-50	SKRP-ABE-010
S1121	013-6312-50	SKRP-ABE-010
S1122	013-7415-50	SPVG110400
VR101	016-0013-04	VR
PWB	039-2380-20	PWB(WITHOUT COMPONENT)

Side PWB(B3) section : CD changer module

REF No.	PART No.	DESCRIPTION
C101	168-1045-56	0.1uF Z
C102	168-1042-78	16V 0.1uF
C104	163-1073-15	6.3V100uF
C106	163-1063-35	16V10uF
C107	163-1073-15	6.3V100uF
C108	168-1042-78	16V 0.1uF
C109	168-1042-78	16V 0.1uF
C110	168-1042-78	16V 0.1uF
C111	163-1073-35	16V100uF
C112	168-2722-55	2700pF K
C113	163-2263-35	16V22uF
C114	163-2263-35	16V22uF
C115	166-3311-50	330pF CH
C116	166-3311-50	330pF CH
C117	166-1011-50	100pF CH
C118	166-1011-50	100pF CH
C119	168-2722-55	2700pF K
C120	168-1022-55	1000pF K
C121	163-2263-35	16V22uF
C122	168-1022-55	1000pF K
C123	163-2263-35	16V22uF
C124	042-0403-55	16V 33uF
C125	042-0403-55	16V 33uF
C501	163-1063-35	16V10uF

REF No.	PART No.	DESCRIPTION
C502	168-1045-56	0.1uF Z
C503	168-4735-56	0.047uF Z
C504	168-1045-56	0.1uF Z
D100	001-0516-90	MA111
D103	001-0504-07	HZS4BLL
D104	001-0516-90	MA111
D105	001-0529-31	MA8056-L
IC501	051-9400-28	BR93LC46F-WE2
IC502	052-5047-23	M30621MCM-8C7GP
IC503	051-5418-08	S-80827ANMP-EDQ
IC504	051-1407-90	NJM4556AM
J101	074-1189-95	45P
J102	074-1191-22	22P
L101	010-3071-65	18uH
L102	010-3407-68	NLV32 33uH J
Q101	125-2004-92	RN1402
Q102	131-1188-50	2SB1188PQR
Q103	193-1758-00	2SD1758TK P,Q,R
Q104	193-1758-00	2SD1758TK P,Q,R
Q105	125-0014-92	DTA114EK
Q106	125-2004-92	RN1402
Q502	190-1162-00	2SA1162
Q503	190-1162-00	2SA1162

REF No.	PART No.	DESCRIPTION
Q504	192-2712-00	2SC2712
Q505	125-2004-92	RN1402
Q506	125-0014-92	DTA114EK
Q507	125-0002-92	RN2402
Q508	192-2712-00	2SC2712
R101	119-4711-15	1/10W 470 ohm
R102	119-2231-15	1/10W 22k ohm
R103	119-1821-15	1/10W 1.8k ohm
R104	119-1831-15	1/10W 18k ohm
R105	116-1211-15	1/4W 120 ohm
R106	119-1041-15	1/10W 100k ohm
R107	119-4731-15	1/10W 47k ohm
R108	119-1031-15	1/10W 10k ohm
R109	119-1031-15	1/10W 10k ohm
R110	119-4741-15	1/10W 470k ohm
R111	119-4741-15	1/10W 470k ohm
R112	119-2731-15	1/10W 27k ohm
R113	119-2731-15	1/10W 27k ohm
R114	119-2731-15	1/10W 27k ohm
R115	119-2731-15	1/10W 27k ohm
R116	119-5611-15	1/10W 560 ohm
R117	119-5611-15	1/10W 560 ohm
R118	119-4731-15	1/10W 47k ohm
R119	119-4731-15	1/10W 47k ohm

REF No.	PART No.	DESCRIPTION
R120	119-3941-15	1/10W 390k ohm
R121	119-1041-15	1/10W 100k ohm
R123	119-1041-15	1/10W 100k ohm
R124	119-1041-15	1/10W 100k ohm
R125	119-1041-15	1/10W 100k ohm
R126	119-2221-15	1/10W 2.2k ohm
R504	119-5621-15	1/10W 5.6k ohm
R505	119-1031-15	1/10W 10k ohm
R506	119-1041-15	1/10W 100k ohm
R507	119-0000-05	1/10W 0 ohm JW
R509	119-4731-15	1/10W 47k ohm
R510	119-1031-15	1/10W 10k ohm
R511	119-1031-15	1/10W 10k ohm
R512	050-0145-54	1/16W 47k ohm x4
R513	119-1041-15	1/10W 100k ohm

REF No.	PART No.	DESCRIPTION
R514	119-2241-15	1/10W 220k ohm
R515	119-2241-15	1/10W 220k ohm
R516	119-2241-15	1/10W 220k ohm
R517	119-1041-15	1/10W 100k ohm
R518	119-2241-15	1/10W 220k ohm
R522	119-1041-15	1/10W 100k ohm
R524	119-1041-15	1/10W 100k ohm
R526	119-4731-15	1/10W 47k ohm
R529	119-1021-15	1/10W 1k ohm
R531	119-1021-15	1/10W 1k ohm
R532	119-1021-15	1/10W 1k ohm
R533	119-1021-15	1/10W 1k ohm
R535	119-2231-15	1/10W 22k ohm
R536	119-2231-15	1/10W 22k ohm
R538	119-1031-15	1/10W 10k ohm

REF No.	PART No.	DESCRIPTION
R539	119-5631-15	1/10W 56k ohm
R541	119-1021-15	1/10W 1k ohm
R542	119-4721-15	1/10W 4.7k ohm
R543	119-1041-15	1/10W 100k ohm
R544	119-1041-15	1/10W 100k ohm
R545	119-1041-15	1/10W 100k ohm
R546	119-1021-15	1/10W 1k ohm
R547	119-1021-15	1/10W 1k ohm
R548	119-1021-15	1/10W 1k ohm
R549	119-1021-15	1/10W 1k ohm
X501	060-1505-50	10MHz
PWB	039-2433-20	PWB(WITHOUT COMPONENT)

CD PWB(B4) section : CD changer module

REF No.	PART No.	DESCRIPTION
C2	046-1022-58	1000pF
C3	168-1042-78	16V 0.1uF
C4	042-0636-54	4V 220uF
C5	168-1042-78	16V 0.1uF
C6	046-1032-78	0.01uF
C7	168-1042-78	16V 0.1uF
C8	178-4742-78	0.47uF
C9	178-2242-78	0.22uF
C10	168-1042-78	16V 0.1uF
C11	168-1042-78	16V 0.1uF
C12	168-1042-78	16V 0.1uF
C13	046-2232-78	0.022uF
C14	168-5612-55	560pF Z
C15	168-1042-78	16V 0.1uF
C16	046-2212-58	220pF
C17	046-2212-58	220pF
C18	168-1222-55	1200pF K
C19	046-3322-58	3300pF
C20	168-3932-78	0.039uF K
C21	168-3932-78	0.039uF K
C22	042-0416-52	10V 10uF M TAN
C25	178-1052-78	1uF
C26	042-0472-91	16V 47uF
C27	178-3342-78	0.33uF
C29	168-2732-55	16V 0.027uF K
C30	042-0416-58	4V 100uF M TAN
C31	042-0636-52	4V 47uF
C32	046-1022-58	1000pF
C33	046-3322-58	3300pF
C34	168-2732-55	16V 0.027uF K
C35	178-2742-78	0.27uF
C36	178-1052-78	1uF
C37	168-1042-78	16V 0.1uF
C38	042-0472-91	16V 47uF
C39	042-0636-50	6.3V 100uF

REF No.	PART No.	DESCRIPTION
C40	045-1211-50	120pF
C41	045-1011-50	100pF
C42	168-1042-78	16V 0.1uF
C43	042-0636-52	4V 47uF
C50	168-1042-78	16V 0.1uF
C51	168-1042-78	16V 0.1uF
C60	168-5612-55	560pF Z
D1	001-0367-91	1SS226
IC1	051-6365-00	MN662785TBUC
IC2	051-9318-00	MSM51V17400D-60TS-K
IC3	051-6060-08	BD7961FM-E2
IC4	051-5711-90	AN8882SB-E1
J1	074-1189-95	45P
J4	074-1138-56	6P
J5	074-1201-65	15P
J6	074-1059-76	26P
L2	010-2155-93	10uH
Q2	131-1188-00	2SB1188
Q3	131-1188-00	2SB1188
R2	033-1041-15	1/10W 100k ohm
R4	033-3311-15	1/10W 330 ohm
R5	033-1041-15	1/10W 100k ohm
R6	033-3931-15	1/10W 39k ohm
R7	033-1041-15	1/10W 100k ohm
R8	033-5611-15	1/10W 560 ohm
R9	033-5611-15	1/10W 560 ohm
R10	033-1011-15	1/10W 100 ohm
R11	033-3911-15	1/10W 390 ohm
R12	033-2221-15	1/10W 2.2k ohm
R13	033-6831-15	1/10W 68k ohm
R14	033-5621-15	1/10W 5.6k ohm
R15	033-1021-15	1/10W 1k ohm
R16	033-5631-15	1/10W 56k ohm
R17	033-1031-15	1/10W 10k ohm

REF No.	PART No.	DESCRIPTION
R18	033-1031-15	1/10W 10k ohm
R19	033-5621-15	1/10W 5.6k ohm
R20	033-6831-15	1/10W 68k ohm
R21	033-5621-15	1/10W 5.6k ohm
R22	033-1031-15	1/10W 10k ohm
R23	033-1031-15	1/10W 10k ohm
R24	033-4731-15	1/10W 47k ohm
R25	033-3931-15	1/10W 39k ohm
R26	033-6831-15	1/10W 68k ohm
R27	033-6831-15	1/10W 68k ohm
R28	033-1031-15	1/10W 10k ohm
R29	033-2201-15	1/10W 22 ohm
R31	033-8211-15	1/10W 820 ohm
R32	033-5631-15	1/10W 56k ohm
R33	033-6831-15	1/10W 68k ohm
R34	033-3331-15	1/10W 33k ohm
R35	033-6831-15	1/10W 68k ohm
R38	033-3931-15	1/10W 39k ohm
R39	033-1831-15	1/10W 18k ohm
R40	117-1001-15	1/8W 10 ohm
R41	033-6821-15	1/10W 6.8k ohm
R42	033-6821-15	1/10W 6.8k ohm
R43	033-3331-15	1/10W 33k ohm
R44	033-5631-15	1/10W 56k ohm
R45	116-4711-15	1/4W 470 ohm
R46	117-1811-15	1/8W 180 ohm
R47	116-4711-15	1/4W 470 ohm
R48	033-1031-15	1/10W 10k ohm
R49	033-1011-15	1/10W 100 ohm
R50	050-0140-74	1/32W 12k ohm x 4J
R60	033-2221-15	1/10W 2.2k ohm
TM1	073-0768-90	TERMINAL
X1	060-1527-90	33.8688MHz
PWB	039-2398-20	PWB(WITHOUT COMPONENT)

Sensor PWB(B5) section : CD changer module

REF No.	PART No.	DESCRIPTION
PT3	060-0252-01	PT4850F
PT4	060-0252-01	PT4850F

REF No.	PART No.	DESCRIPTION
PT5	060-0252-01	PT4850F
PT6	060-0252-01	PT4850F

REF No.	PART No.	DESCRIPTION
S1	013-7414-50	SPVG22
PWB	039-1956-00	PWB(WITHOUT COMPONENT)

PIM-FPC(B6) section : CD changer module

REF No.	PART No.	DESCRIPTION
IC5	051-5806-02	GPIS95

Driver PWB(B7) section : CD changer module

REF No.	PART No.	DESCRIPTION
C1	168-1045-56	0.1uF Z
C2	163-1073-35	16V100uF
D1	001-0529-29	MA8051-M
IC1	051-6044-18	BA6920FP-Y

REF No.	PART No.	DESCRIPTION
J1	074-1239-76	26P
J2	074-1100-59	9P
R1	033-1021-15	1/10W 1k ohm
R2	032-0104-59	1/4W 2.2 ohm

REF No.	PART No.	DESCRIPTION
R3	032-0104-59	1/4W 2.2 ohm
S2	013-7412-50	SPVG21
PWB	039-2242-00	PWB(WITHOUT COMPONENT)

PIV-FPC(B8) section : CD changer module

REF No.	PART No.	DESCRIPTION
IC6	051-5806-01	GPIS93

LED-L-PWB(B9) section : CD changer module

REF No.	PART No.	DESCRIPTION
LED3	001-7042-00	GL4800

REF No.	PART No.	DESCRIPTION
LED4	001-7042-00	GL4800

REF No.	PART No.	DESCRIPTION
PWB	039-1954-20	PWB(WITHOUT COMPONENT)

LED-R-PWB(B10) section : CD changer module

REF No.	PART No.	DESCRIPTION
LED5	001-7042-00	GL4800

REF No.	PART No.	DESCRIPTION
LED6	001-7042-00	GL4800

REF No.	PART No.	DESCRIPTION
PWB	039-1955-20	PWB(WITHOUT COMPONENT)

L-Motor-FPC(B11) section : CD changer module

REF No.	PART No.	DESCRIPTION
M1	SMA-186-100	LOADING

M/S-FPC(B12) section : CD changer module

REF No.	PART No.	DESCRIPTION
M2	SMA-193-100	SPINDLE

REF No.	PART No.	DESCRIPTION
M3	SMA-191-100	SLED

REF No.	PART No.	DESCRIPTION
S3	013-7414-50	SPVG22