
EXPLODED VIEW • PARTS LIST:

DCP section

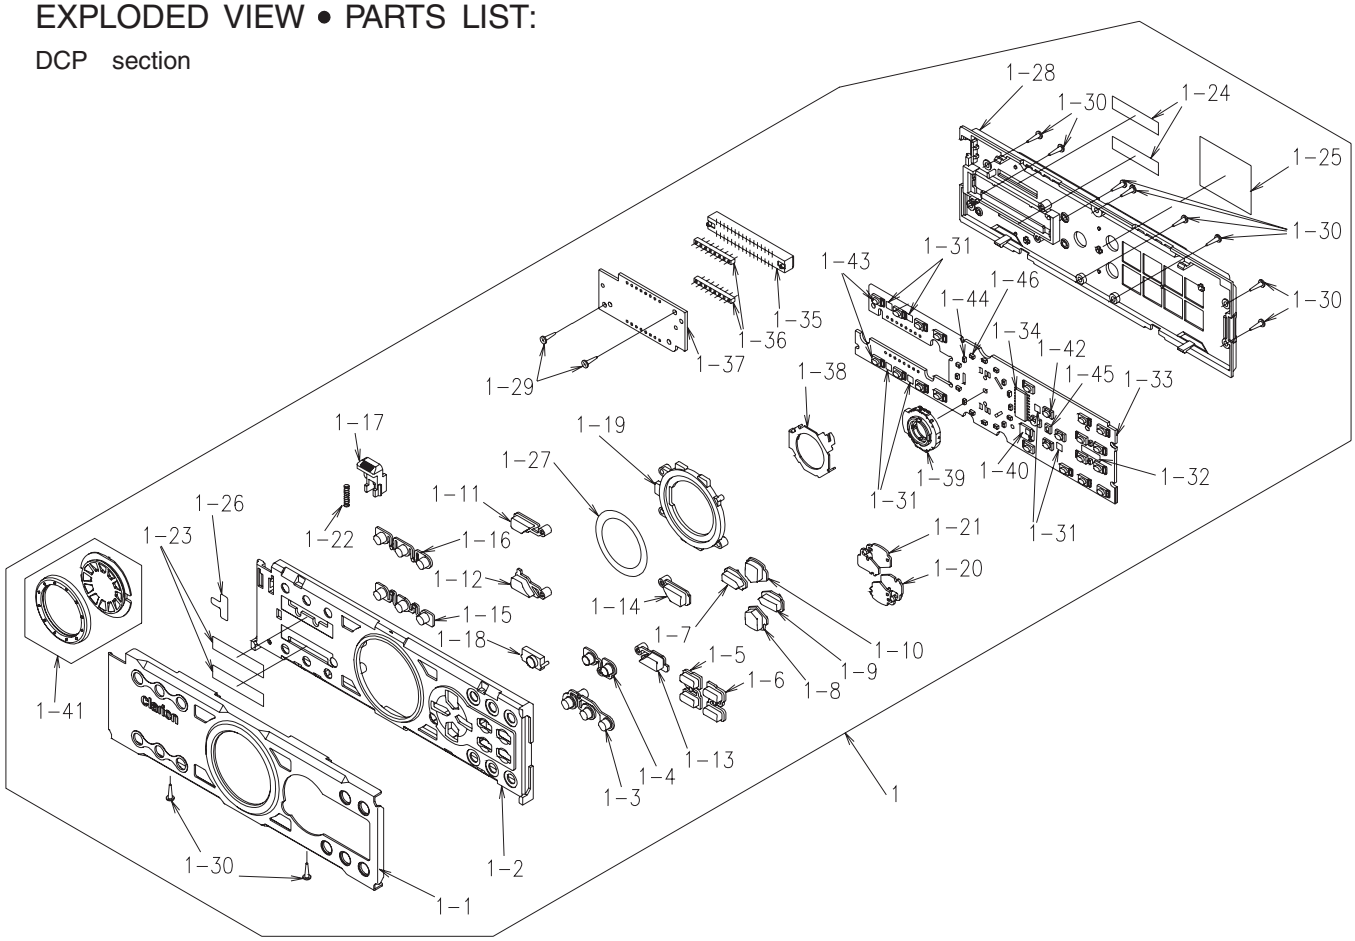


Note)Some parts depend on each model.
The model name is specified in the description.

NO.	PART NO.	DESCRIPTION	Q'TY
1	DCP-426-600	DCP ASSY(PE-2577B-A)	1
	DCP-432-800	DCP ASSY(PE-2577K-A/B)	1
1-1	371-5708-11	FACE PANEL(PE-2577B-A)	1
	371-5708-10	FACE PANEL (PE-2577K-A/B)	1
1-2	370-5990-04	ESCUTCHEON	1
1-3	382-6388-02	BUTTON(SC/RP/RD)	1
1-4	382-6387-03	BUTTON(SAT/OP)	1
1-5	382-6385-00	BUTTON(ENT/ISR)	1
1-6	382-6386-00	BUTTON(DISP/AM)	1
1-7	382-6438-00	BUTTON(LEFT)	1
1-8	382-6437-00	BUTTON(BND)	1
1-9	382-6439-00	BUTTON(RIGHT)	1
1-10	382-6383-00	BUTTON(BND)	1
1-11	382-6440-00	BUTTON(VSE)	1
1-12	382-6441-00	BUTTON(PL2)	1
1-13	382-6443-00	BUTTON(ADJ)	1
1-14	382-6442-00	BUTTON(EQ)	1
1-15	382-6382-01	BUTTON(4-6)	1
1-16	382-6381-01	BUTTON(1-3)	1
1-17	382-6389-04	BUTTON(RELEASE)	1
1-18	335-6676-00	IR FILTER	1
1-19	335-6698-00	ILLUMI PLATE	1
1-20	335-6697-00	BUTTON HOLDER	1
1-21	335-6696-00	BUTTON HOLDER	1
1-22	750-6722-00	SPRING	1


NO.	PART NO.	DESCRIPTION	Q'TY
1-23	347-6707-00	COVER FILM	2
1-24	347-6708-00	COVER FILM	2
1-25	347-6709-00	COVER FILM	1
1-26	347-6710-00	SURGE FILM	1
1-27	347-6759-00	FILM	1
1-28	335-6675-02	REAR CVR	1
1-29	716-1764-00	SCREW(M1.7x5)	2
1-30	716-0872-11	SCREW(M1.7x6)	10
1-31	345-8727-00	RUBBER PART	6
1-32	345-8744-00	RUBBER PART	1
1-33	039-2100-01	SWITCH PWB (WITHOUT COMPONENT)	1
1-34	051-6618-18	IC	1
1-35	076-0647-00	PLUG	1
1-36	076-0658-08	PLUG	2
1-37	039-2101-00	SWITCH SUB PWB (WITHOUT COMPONENT)	1
1-38	331-3322-00	JOG-SW-HOLDER	1
1-39	013-8004-50	ROTARY SW	1
1-40	060-4008-00	IR RECEIVER	1
1-41	947-0523-01	KNOB ASSY	1
1-42	013-6507-50	LUMI SWITCH	4
1-43	013-6519-50	LUMI SWITCH	19
1-44	001-7043-90	DIODE	10
1-45	001-7040-90	DIODE	1
1-46	001-7064-90	DIODE	8

Rear-Escutcheon section

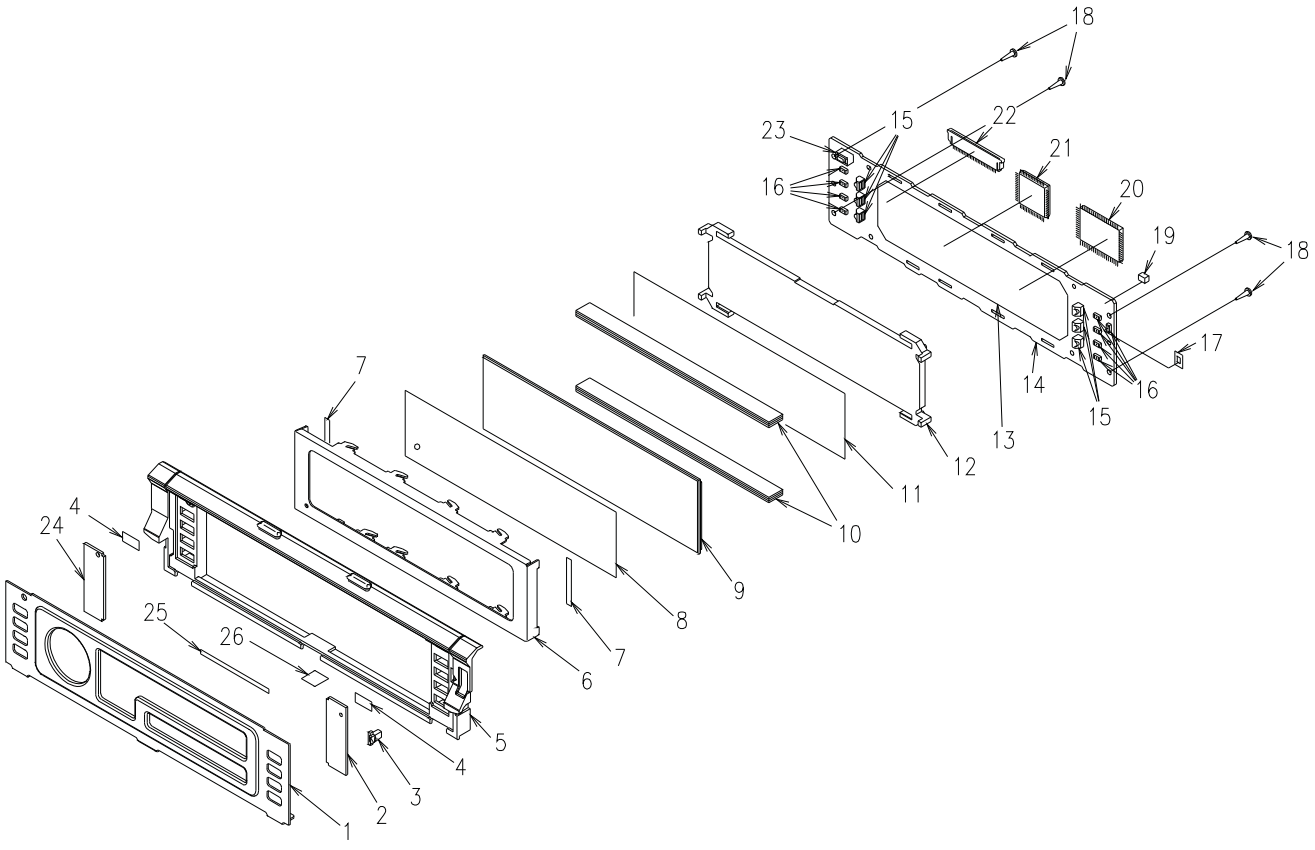

NO.	PART NO.	DESCRIPTION	Q'TY
1	371-5709-01	FACE PANEL(PE-2577B-A)	1
	371-5709-03	FACE PANEL (PE-2577K-A/B)	1
2	347-6666-00	IND-FILM(L)	1
3	335-6772-00	ILLUMI PARTS	1
4	347-5161-00	DOUBLE FACE	2
5	370-5991-04	ESCUTCHEON	1
6	331-3336-01	LCD-CVR	1
7	347-6813-00	DOUBLE FACE	2
8	347-6683-01	FILM	1
9	379-1227-51	INDICATOR	1
10	345-8715-01	RUBBER CONNECT	2
11	347-6682-00	FILM	1
12	335-6682-01	LCD HOLDER	1
13	347-6606-00	REFLECTOR	1

NO.	PART NO.	DESCRIPTION	Q'TY
14	039-2272-00	PWB (WITHOUT COMPONENT)	1
15	001-7055-90	DIODE	6
16	001-7062-90	DIODE	9
17	345-8726-00	RUBBER PART	1
18	716-0872-02	PAD SCREW(M1.7x5)	4
19	013-7411-60	DETECTOR SWITCH	1
20	051-6057-00	IC	1
21	052-7061-01	MICON	1
22	074-1195-78	OUTLET SOCKET	1
23	013-6507-50	LUMI SWITCH	1
24	347-6665-00	IND-FILM(R)	1
25	347-6501-00	DOUBLE FACE	1
26	347-6522-00	DOUBLE FACE	1

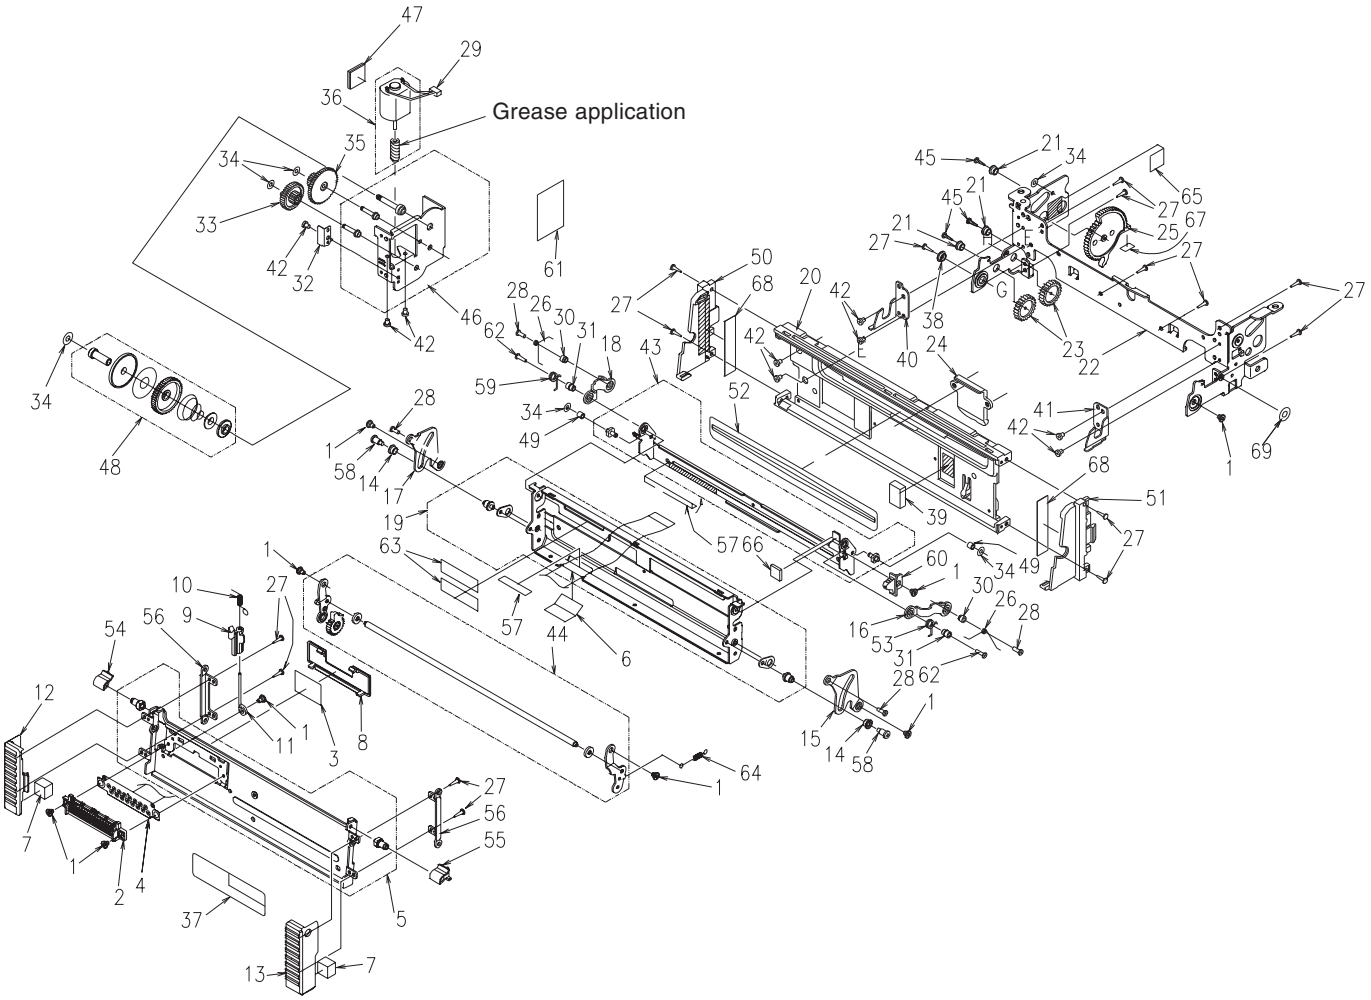

Note)Grease uses FLOIL G-31SB.

NO.	PART NO.	DESCRIPTION	Q'TY
1	716-1715-02	SCREW(M2)	9
2	074-1278-01	OUTLET SOCKET	1
3	347-6760-00	INSULATOR	1
4	039-1862-00	FPC (WITHOUT COMPONENT)	1
5	947-0525-01	DCP-HOLD-ASSY	1
6	347-6761-00	INSULATOR	1
7	345-8728-00	SPACER(CUSHION)	2
8	335-6678-00	CN-CVR	1
9	335-6683-00	HOOK	1

NO.	PART NO.	DESCRIPTION	Q'TY
10	750-6714-00	SPRING(HOOK)	1
11	341-1770-00	SHAFT(HOOK)	1
12	335-6680-02	SIDE-CVR(F-LEFT)	1
13	335-6679-02	SIDE-CVR(F-RIGHT)	1
14	341-1769-00	ROLLER(ARM)	2
15	331-3329-00	LEVER-MID(R)	1
16	331-3327-00	LEVER-UP(R)	1
17	331-3330-01	LEVER-MID(L)	1
18	331-3328-00	LEVER-UP(L)	1
19	947-0524-01	DISP-HOLDE-ASSY	1

NO.	PART NO.	DESCRIPTION	Q'TY
20	370-6005-04	ESCUTCHEON	1
21	341-1767-00	SPACER(GEAR)	3
22	309-0782-01	FRONT PLATE	1
23	613-0725-01	IDLLER-GEAR	2
24	335-6505-00	ILLUMI PLATE	1
25	613-0726-01	SW-GEAR	1
26	750-6740-00	SPRING(ARM-UP)	2
27	716-0872-02	PAD SCREW(M1.7x5)	15
28	780-2005-00	SCREW(M2x5)	4
29	854-4380-01	EX-LEAD	1
30	341-1783-00	SPACER(SCREW)	2
31	341-1784-00	SPACER(UP-ARM-P)	2
32	750-3432-00	SPRING(MOTOR)	1
33	613-0733-00	HUS-GEAR	1
34	746-0768-20	WASHER(⌀ 4.3-1.6/t0.5)	6
35	613-0717-00	INPUT-GEAR	1
36	621-0714-00	MOTOR GEAR	1
37	020-1518-00	DC-MOTOR	1
38	341-1791-00	SPACER(GEAR)	1
39	345-8729-00	CUSHION(IN-ES)	1
40	331-3401-01	LINK-HOLDER(L)	1
41	331-3400-01	LINK-HOLDER(R)	1
42	716-1468-20	SCREW(M2x2.5)	9
43	947-0528-01	INNER-BRKT ASSY	1
44	947-0519-01	LOWER-LEVER ASSY	1
45	716-1758-00	PAD SCREW(M2x5)	3

NO.	PART NO.	DESCRIPTION	Q'TY
46	946-0079-01	GEAR-BOX ASSY	1
47	347-6832-00	SPACER(MOTOR)	1
48	947-0513-02	T-LIM-GEAR ASSY	1
49	341-1788-00	ROLLER(SIDE)	2
50	335-6766-02	SIDE-CVR(L)	1
51	335-6765-02	SIDE-CVR(R)	1
52	346-0150-02	LEATHER SHEET	1
53	750-6726-00	SPRING(INNER)R	1
54	335-6807-01	FRONT COVER(L)	1
55	335-6806-01	FRONT COVER(R)	1
56	331-3480-00	SUPPORT PLATE(L-R)	2
57	347-6767-00	FILM	2
58	716-1872-01	SCREW(M2x4x1.5)	2
59	750-6727-00	SPRING(INNER)L	1
60	382-6506-02	BUTTON(EJECT)	1
61	347-6536-00	PROTECT SHEET	1
62	716-3475-00	SCREW(M2x6)	2
63	347-6768-00	SHADE	2
64	750-6732-01	SPRING	1
65	347-6215-00	SPACER FILM	1
66	347-6951-00	PROTECTOR SHEET	1
67	347-6835-00	SPACER	1
68	347-6878-00	PROTECT SHEET	2
69	746-0917-00	WASHER	1
70	291-0098-00	STICKER	1

Main section


Exploded view on next page

NO.	PART NO.	DESCRIPTION	Q'TY
1	DCP-426-600	DCP ASSY(PE-2577B-A)	1
	DCP-432-800	DCP ASSY(PE-2577K-A/B)	1
2	880-2089B	TUNER	1
3	013-7106-00	DETECTOR SWITCH	1
4	042-0576-00	DOUBLE-LAYER-C	1
5	060-0100-01	BUZZER	1
6	074-1106-12	OUTLET SOCKET	2
7	074-1194-00	OUTLET SOCKET	1
8	074-1214-00	OUTLET SOCKET	1
9	076-0312-02	PLUG	1
10	092-4000-51	ANT-RECEPT	1
11	101-0941-00	TRANSISTOR	1
12	103-2012-00	TRANSISTOR	2
13	103-2353-00	TRANSISTOR	1
14	305-0274-31	SIDE CVR(L)	1
15	305-0275-30	SIDE CVR(R)	1
16	307-0616-03	REAR CVR	1
17	313-1844-00	HEAT SINK	1
18	313-1845-00	HEAT SINK	1
19	313-1651-21	HEAT SINK	1
20	313-1853-00	HEAT SINK	1
21	331-2255-20	IC HOLDER	1
22	331-2945-00	SHIELD CVR(F)	1

NO.	PART NO.	DESCRIPTION	Q'TY
23	331-2946-01	SHIELD CVR(R)	1
24	331-2869-00	SHIELD CASE	1
25	331-3378-00	SW HOLDER	1
26	335-0833-01	LEAD HOLDER	1
27	714-3006-81	MACHINE SCREW(M1.7x5)	4
28	731-3006-80	TAPTIGHT(M3x6)	8
29	731-3008-87	TAPTIGHT(M3x8)	2
30	855-5454-50	RCA PIN CORD	1
31	855-5458-50	RCA PIN CORD	1
32	051-2038-10	IC HOLDER	1
33	039-2271-01	PWB (WITHOUT COMPONENT)	1
34	013-7206-50	DETECTOR SWITCH	1
35	074-1198-68	OUTLET SOCKET	1
36	074-1138-76	OUTLET SOCKET	1
37	074-1199-80	OUTLET SOCKET	1
38	001-7011-95	DIODE	1
38	076-0659-12	PLUG	2
40	039-2102-00	PWB (WITHOUT COMPONENT)	1
41	039-1164-00	FPC (WITHOUT COMPONENT)	1
42	331-1709-00	EARTH PLATE	1

NO.	PART NO.	DESCRIPTION	Q'TY
43	331-2744-00	STOPPER	1
44	331-2929-00	SHIELD CVR(V)	1
45	331-2930-00	SHIELD CVR(L)	1
46	331-3324-00	CD-SUB BRKT(R)	1
47	331-3417-00	CD-SUB BRKT(F)	1
48	345-3799-20	RUBBER PART	8
49	345-8513-00	SPACE	1
50	347-6215-00	SPACE-FILM	1
51	347-6245-00	FILM	1
52	347-6285-00	INSULATOR	1
53	347-6681-00	INSULATOR	1
54	347-6705-00	INSULATOR	1
55	347-6729-00	INSULATOR	1
56	714-2603-81	MACHINE SCREW	8

NO.	PART NO.	DESCRIPTION	Q'TY
57	731-3006-40	TAPTIGHT(M3x6)	1
58	816-2569-50	FLAT WIRE	1
59	929-0220-83	CD-MECHANISM	1
60	303-0472-00	UPPER CVR	1
61	304-0460-01	LOWER CVR	1
62	286-6131-00	SETPLATE(PE-2577B-A)	1
	286-9991-00	SETPLATE(PE-2577K-A)	1
	286-9992-00	SETPLATE(PE-2577K-B)	1
63	347-6821-00	SPACE FILM	2
64	345-5192-00	CUSHION	1
65	716-0872-02	PAD SCREW(M1.7x5)	2
66	----------	REAR-ES ASSY	1
67	347-6536-00	PROTECT SHEET	1
68	----------	INNER-ES ASSY	1

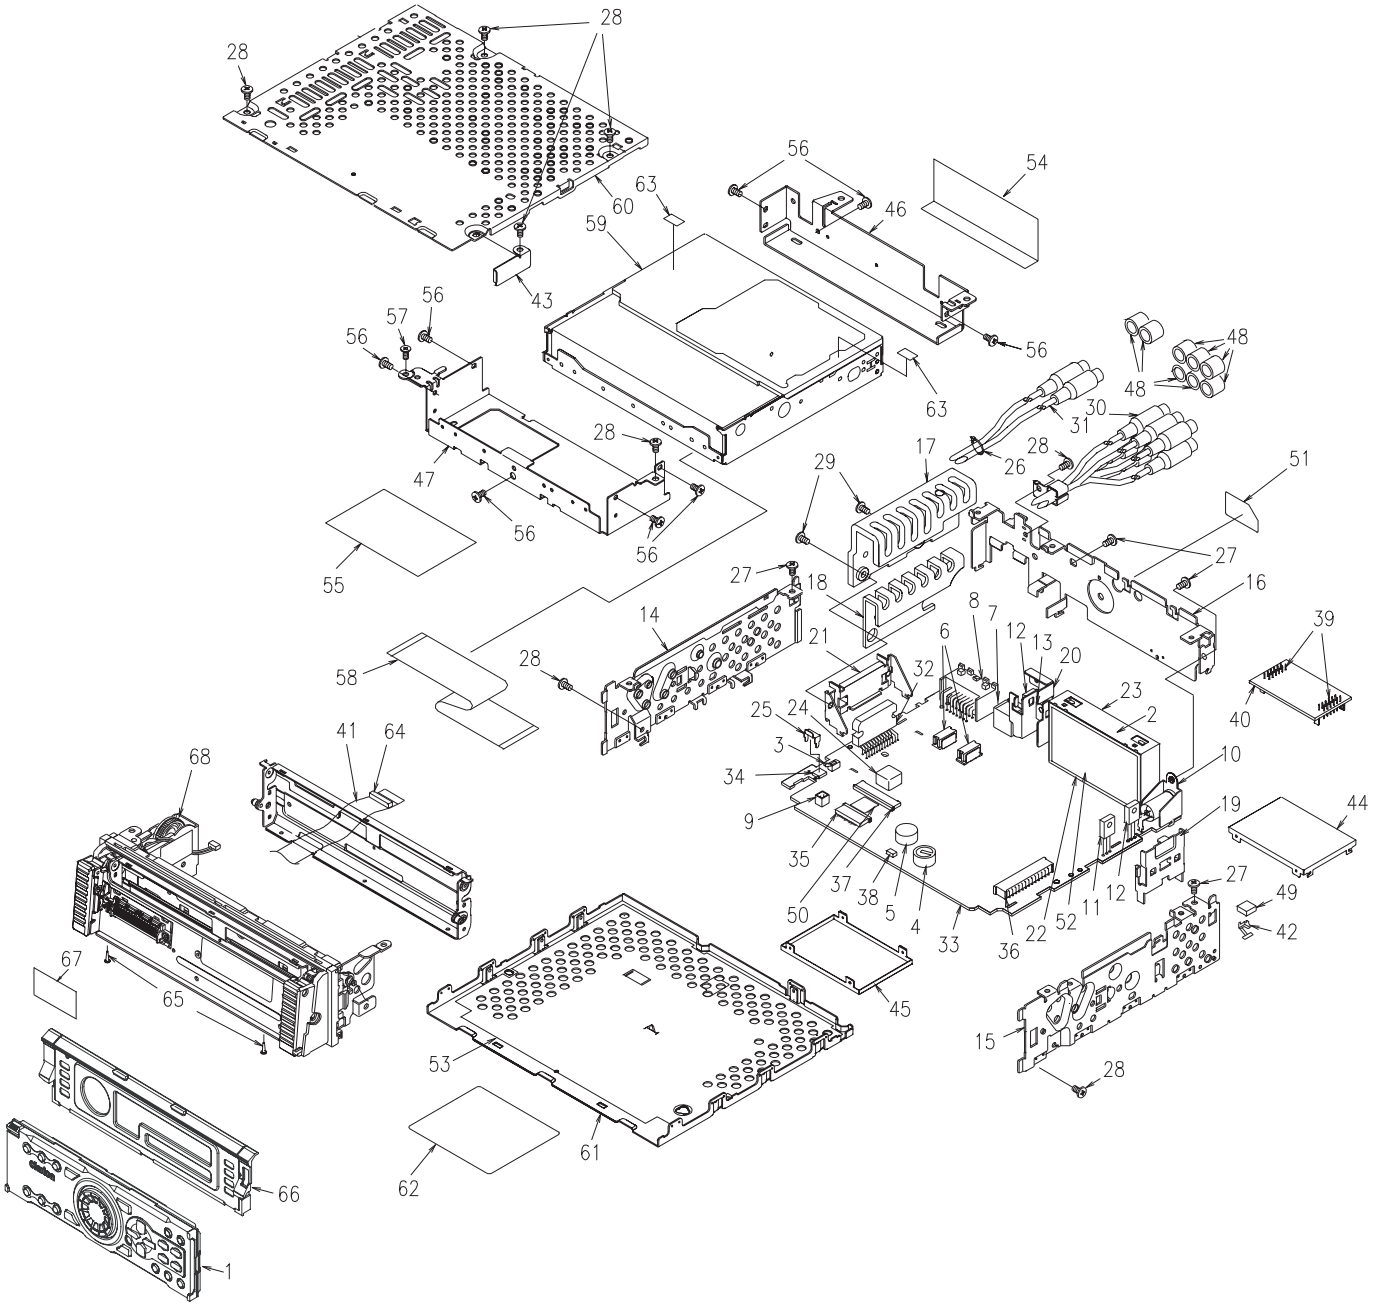

ELECTRICAL PARTS LIST:

Main PWB (B1) section

REF No.	PART No.	DESCRIPTION
ANT1	092-4000-51	ANT-RECEPT
BL1	880-2089B	AM/FM TUNER
C1	168-2232-55	25V 0.022uF
C4	163-1053-65	50V 1uF
C5	168-3332-78	25V 0.033uF
C6	168-3332-78	25V 0.033uF
C7	183-4763-37	16V 47uF
C8	168-2232-55	25V 0.022uF
C9	168-2232-55	25V 0.022uF
C10	168-6822-55	50V 6800PF
C11	042-0631-50	10V 100uF
C12	042-0631-50	10V 100uF
C16	168-1042-78	25V 0.1uF
C18	163-1053-65	50V 1uF
C20	163-4763-15	6.3V 47uF
C21	168-2232-55	25V 0.022uF
C22	166-1011-50	50V 100PF
C23	166-1011-50	50V 100PF
C24	166-3311-50	50V 330PF
C25	166-1501-50	50V 15PF
C26	166-1501-50	50V 15PF
C27	166-1011-50	50V 100PF
C28	168-1032-55	50V 0.01uF
C29	168-2232-55	25V 0.022uF
C30	168-1022-55	50V 1000PF
C55	166-2201-50	50V 22PF
C66	166-2201-50	50V 22PF
C67	168-1032-55	50V 0.01uF
C68	168-2232-55	25V 0.022uF
C102	178-1052-78	25V 1uF
C103	178-1052-78	25V 1uF
C104	178-1052-78	25V 1uF
C105	178-1052-78	25V 1uF
C106	042-0560-84	16V 47uF
C107	042-0560-63	16V 22uF
C108	172-2231-15	50V 0.022uF
C109	042-0560-56	50V 3.3uF
C110	043-0296-50	0.1uF
C111	043-0296-50	0.1uF
C112	043-0296-50	0.1uF
C113	043-0296-50	0.1uF
C114	043-0505-50	2.2uF
C115	043-0505-50	2.2uF
C116	168-4722-55	50V 4700PF
C117	166-1011-50	50V 100PF
C118	043-0505-50	2.2uF
C119	043-0505-50	2.2uF
C126	178-1052-78	25V 1uF
C127	178-1052-78	25V 1uF
C128	178-1052-78	25V 1uF
C129	178-1052-78	25V 1uF
C210	042-0423-92	6.3V 4.7uF
C211	163-2263-35	16V 22uF
C212	168-4732-78	25V 0.047uF
C213	163-2263-35	16V 22uF
C214	042-0545-00	16V 2200uF
C216	042-0563-71	16V 100uF
C217	182-1073-35	16V 100uF
C220	042-0631-50	10V 100uF
C221	163-1063-35	16V 10uF
C222	184-4763-41	25V 47uF
C223	168-2232-55	25V 0.022uF
C224	172-4731-15	50V 0.047uF
C230	042-0631-50	10V 100uF

REF No.	PART No.	DESCRIPTION
C241	163-1063-35	16V 10uF
C242	168-1032-55	50V 0.01uF
C243	183-1073-27	10V 100uF
C244	183-1073-17	6.3V 100uF
C245	168-1042-78	25V 0.1uF
C247	168-1032-55	50V 0.01uF
C250	042-0505-81	10V 22uF
C251	168-1042-78	25V 0.1uF
C252	042-0452-81	10V 220uF
C253	166-2211-50	50V 220PF
C254	168-1042-78	25V 0.1uF
C256	042-0505-81	10V 22uF
C257	168-2232-55	25V 0.022uF
C258	042-0416-52	10V 10uF
C259	042-0505-80	25V 1uF
C260	166-1011-50	50V 100PF
C261	166-1011-50	50V 100PF
C301	163-1053-65	50V 1uF
C302	163-1053-65	50V 1uF
C303	166-1201-50	50V 12PF
C304	166-1201-50	50V 12PF
C305	166-1201-50	50V 12PF
C306	166-1201-50	50V 12PF
C307	163-1063-35	16V 10uF
C308	163-2263-35	16V 22uF
C309	163-1063-35	16V 10uF
C311	043-0264-63	0.01uF
C312	043-0264-63	0.01uF
C313	166-1201-50	50V 12PF
C314	166-1201-50	50V 12PF
C315	163-1063-35	16V 10uF
C316	163-1063-35	16V 10uF
C317	163-1063-35	16V 10uF
C318	163-1063-35	16V 10uF
C319	163-1063-35	16V 10uF
C320	163-1063-35	16V 10uF
C321	168-4732-78	25V 0.047uF
C326	163-1063-35	16V 10uF
C327	163-1063-35	16V 10uF
C328	163-1063-35	16V 10uF
C329	163-1063-35	16V 10uF
C330	163-1063-35	16V 10uF
C331	163-1063-35	16V 10uF
C332	163-1063-35	16V 10uF
C333	163-1063-35	16V 10uF
C334	163-1063-35	16V 10uF
C335	163-1063-35	16V 10uF
C401	166-1021-50	50V 1000PF
C402	166-1021-50	50V 1000PF
C403	042-0416-52	10V 10uF
C404	168-1042-78	25V 0.1uF
C405	042-0416-52	10V 10uF
C406	042-0416-52	10V 10uF
C407	042-0416-52	10V 10uF
C408	168-1042-78	25V 0.1uF
C409	168-1042-78	25V 0.1uF
C412	042-0416-52	10V 10uF
C413	042-0416-52	10V 10uF
C416	168-1042-78	25V 0.1uF
C417	042-0416-52	10V 10uF
C418	168-1042-78	25V 0.1uF
C419	168-1042-78	25V 0.1uF
C420	042-0416-52	10V 10uF
C423	168-1042-78	25V 0.1uF

REF No.	PART No.	DESCRIPTION
C424	168-1042-78	25V 0.1uF
C427	168-1042-78	25V 0.1uF
C428	168-1042-78	25V 0.1uF
C429	042-0416-52	10V 10uF
C431	042-0416-52	10V 10uF
C433	168-1042-78	25V 0.1uF
C434	168-1042-78	25V 0.1uF
C435	168-1042-78	25V 0.1uF
C436	042-0416-52	10V 10uF
C440	168-1022-55	50V 1000PF
C441	168-1042-78	25V 0.1uF
C442	042-0416-52	10V 10uF
C450	163-1063-35	16V 10uF
C451	163-1063-35	16V 10uF
C452	163-1063-35	16V 10uF
C453	163-1063-35	16V 10uF
C454	163-1063-35	16V 10uF
C455	163-1063-35	16V 10uF
C456	163-2263-15	6.3V 22uF
C457	163-2263-15	6.3V 22uF
C458	163-2263-15	6.3V 22uF
C459	163-2263-15	6.3V 22uF
C460	163-2263-15	6.3V 22uF
C461	163-2263-15	6.3V 22uF
C462	166-2201-50	50V 22PF
C463	166-2201-50	50V 22PF
C464	166-2201-50	50V 22PF
C465	166-2201-50	50V 22PF
C466	166-2201-50	50V 22PF
C467	166-2201-50	50V 22PF
C490	166-1201-50	50V 12PF
C491	166-1201-50	50V 12PF
C526	163-1063-35	16V 10uF
C527	163-1063-35	16V 10uF
C528	163-1063-35	16V 10uF
C529	163-1063-35	16V 10uF
C545	163-1063-35	16V 10uF
C546	163-1063-35	16V 10uF
C547	163-4763-15	6.3V 47uF
C606	168-4732-78	25V 0.047uF
C612	168-1032-55	50V 0.01uF
C613	042-0576-00	5.5V 0.1F
C614	168-1032-55	50V 0.01uF
C615	042-0577-00	6.3V 100uF
C616	163-1063-35	16V 10uF
C617	168-1022-55	50V 1000PF
C619	168-4732-78	25V 0.047uF
C620	178-2242-78	25V 0.22uF
C623	166-1011-50	50V 100PF
C627	168-1042-78	25V 0.1uF
C628	166-1011-50	50V 100PF
C629	042-0397-55	6.6V 3.3uF
CCT401	010-3042-54	BLA3216A601SG4
CCT402	010-3042-54	BLA3216A601SG4
CCT403	010-3042-54	BLA3216A601SG4
CCT404	010-3042-54	BLA3216A601SG4
CCT405	010-3042-54	BLA3216A601SG4
CCT406	010-3042-54	BLA3216A601SG4
D102	001-2403-90	MIF60
D103	001-2403-90	MIF60
D104	001-2403-90	MIF60
D105	001-2403-90	MIF60
D106	001-2403-90	MIF60
D107	001-2403-90	MIF60

REF No.	PART No.	DESCRIPTION
D108	001-2403-90	MIF60
D109	001-2403-90	MIF60
D110	001-0529-44	MA8082M
D200	001-2606-90	MIFS4
D202	001-0504-46	HZS9B2L
D203	001-0592-00	RM4Z
D210	001-0516-90	MA111
D210	001-0517-90	SS355
D211	001-0516-90	MA111
D211	001-0517-90	SS355
D219	001-0347-11	MA4030M
D220	001-0504-33	HZS6B2L
D221	001-0466-90	S5688B
D222	001-0466-90	S5688B
D223	001-0516-90	MA111
D223	001-0517-90	SS355
D224	001-0466-91	S5688G
D225	001-0466-91	S5688G
D226	001-0529-35	MA8062M
D228	001-0347-11	MA4030M
D230	001-0504-42	HZS7C3L
D241	001-0504-45	HZS9B1L
D501	001-0516-90	MA111
D501	001-0517-90	SS355
D502	001-0516-90	MA111
D502	001-0517-90	SS355
D503	001-0529-20	MA8039L
D603	001-0516-90	MA111
D603	001-0517-90	SS355
D610	001-0516-90	MA111
D610	001-0517-90	SS355
D651	001-7011-95	CL150FG
F200	060-8023-52	CHIP FUSE
FIL401	060-3110-90	NFM4516P13C204
FIL404	060-3110-90	NFM4516P13C204
IC1	051-6201-90	LC72146M
IC101	051-2038-10	LA47501
IC201	051-3605-90	NJM2360A
IC220	051-3201-90	AN77L06
IC230	051-1014-08	TA7291F
IC301	051-0410-38	MC14052BF2A
IC302	051-1811-90	BA3129F
IC303	051-3034-90	NJM4558V
IC304	051-0556-93	NJM2058M
IC305	051-7232-08	74VHC4066
IC401	051-6350-00	AK7716
IC402	051-9109-50	T15M256A
IC405	051-6379-08	AK4351
IC450	051-3026-90	NJM4580V
IC451	051-3026-90	NJM4580V
IC452	051-3026-90	NJM4580V
IC502	051-6600-38	CA0008AM
IC503	051-0350-93	NJM4558M
IC504	052-3375-10	M30624MGA-129GP
IC505	051-5437-08	S-80821ANMP
IC506	051-0869-58	NJM2103M
IC509	051-5017-00	TC9482F
J501	074-1106-12	12P
J502	074-1106-12	12P
J601	074-1194-00	13P CE-NET
J602	074-1138-76	26P
J603	074-1198-68	18P
J604	074-1199-80	30P
J605	076-0312-02	2P
J903	074-1214-00	16P
L1	010-2275-53	220uH
L2	010-3407-59	5.6uH
L3	010-2285-58	BLM21A102FPB

REF No.	PART No.	DESCRIPTION
L4	010-2285-58	BLM21A102FPB
L52	010-4046-00	30uH
L101	010-8024-00	CHOKE
L210	010-6003-03	270uH
L211	010-3406-66	22uH
L213	010-3406-66	22uH
L214	010-2230-76	22uH
L215	010-2285-56	BLM21B222S
L401	010-2285-56	BLM21B222S
L403	010-2285-56	BLM21B222S
L409	010-2285-58	BLM21A102FPB
L411	010-2285-58	BLM21A102FPB
L412	010-2285-58	BLM21A102FPB
L413	010-2285-58	BLM21A102FPB
L414	010-2285-58	BLM21A102FPB
L415	010-2285-56	BLM21B222S
L416	010-2285-56	BLM21B222S
L417	010-2285-56	BLM21B222S
L418	010-2285-56	BLM21B222S
L419	010-2285-56	BLM21B222S
L421	010-2285-58	BLM21A102FPB
L422	010-2285-58	BLM21A102FPB
L423	010-2285-58	BLM21A102FPB
L424	010-2285-58	BLM21A102FPB
L425	010-2285-58	BLM21A102FPB
L426	010-2285-58	BLM21A102FPB
L427	010-2285-58	BLM21A102FPB
L428	010-2285-56	BLM21B222S
L429	010-2285-56	BLM21B222S
L430	010-2285-56	BLM21B222S
L431	010-2285-56	BLM21B222S
L432	010-2285-56	BLM21B222S
L433	010-2285-56	BLM21B222S
L434	010-2285-56	BLM21B222S
L435	010-2285-56	BLM21B222S
L436	010-2285-56	BLM21B222S
L437	010-2285-56	BLM21B222S
L441	010-2285-56	BLM21B222S
L442	010-2285-56	BLM21B222S
L450	010-2285-56	BLM21B222S
L451	010-2285-56	BLM21B222S
L452	010-2285-56	BLM21B222S
L453	010-2285-56	BLM21B222S
L454	010-2285-56	BLM21B222S
L455	010-2285-56	BLM21B222S
L602	010-2323-53	2.2uH
L605	010-2198-56	2.2uH
L606	010-2198-56	2.2uH
L607	010-2198-56	2.2uH
P450	855-5424-50	RCA PIN CORD(6CH)
P451	855-5458-50	RCA PIN CORD (2CH AUX)
Q6	190-1162-00	2SA1162
Q7	190-1162-00	2SA1162
Q8	125-2004-93	RN1403
Q201	198-0241-50	2SK241
Q202	103-2353-00	2SD2353
Q210	190-1298-00	2SA1298
Q211	125-2004-96	RN1406
Q212	190-1162-00	2SA1162
Q213	192-2712-00	2SC2712
Q220	103-2012-00	2SD2012
Q221	198-0241-50	2SK241YGR
Q222	190-1298-00	2SA1298
Q223	125-2004-93	RN1403
Q224	101-0941-00	2SB941
Q225	190-1162-00	2SA1162
Q226	192-2712-00	2SC2712

REF No.	PART No.	DESCRIPTION
Q227	190-1416-00	2SA1416
Q228	125-2004-93	RN1403
Q229	190-1416-00	2SA1416
Q230	191-1237-50	2SB1237
Q232	191-1237-50	2SB1237
Q235	193-1802-60	2SD1802
Q236	125-0002-93	RN2403
Q237	125-2004-94	RN1404
Q238	190-1298-00	2SA1298
Q239	125-2004-93	RN1403
Q240	125-2004-96	RN1406
Q241	103-2012-00	2SD2012
Q242	190-1298-00	2SA1298
Q243	190-1298-00	2SA1298
Q244	125-0002-92	RN2402
Q245	125-2004-96	RN1406
Q247	125-2004-93	RN1403
Q248	125-2004-93	RN1403
Q249	125-2004-93	RN1403
Q252	125-2004-96	RN1406
Q253	125-0002-96	RN2406
Q260	125-2004-93	RN1403
Q261	125-2017-97	RN1427
Q262	125-2017-97	RN1427
Q301	193-1306-00	2SD1306
Q302	193-1306-00	2SD1306
Q303	193-1306-00	2SD1306
Q304	193-1306-00	2SD1306
Q305	125-2004-96	RN1406
Q306	125-0002-96	RN2406
Q308	125-2004-93	RN1403
Q400	192-2712-00	2SC2712
Q450	193-1306-00	2SD1306
Q451	193-1306-00	2SD1306
Q452	193-1306-00	2SD1306
Q453	193-1306-00	2SD1306
Q454	193-1306-00	2SD1306
Q455	193-1306-00	2SD1306
Q501	125-2004-96	RN1406
Q502	125-0002-96	RN2406
Q503	192-2712-00	2SC2712
Q601	125-2004-92	RN1402
Q602	125-2004-93	RN1403
Q603	190-1162-00	2SA1162
Q604	125-2004-92	RN1402
Q605	125-2004-92	RN1402
Q606	125-2004-92	RN1402
Q617	125-2004-93	RN1403
Q618	125-2004-96	RN1406
Q619	125-2004-93	RN1403
Q620	125-2004-93	RN1403
R1	119-1021-15	1/16W 1kohm
R4	119-0000-05	0ohm
R7	119-1231-15	1/16W 12kohm
R8	119-1031-15	1/16W 10kohm
R9	119-4741-15	1/16W 470kohm
R10	119-2221-15	1/16W 2.2kohm
R14	119-5631-15	1/16W 56kohm
R16	119-2221-15	1/16W 2.2kohm
R18	119-1031-15	1/16W 10kohm
R19	119-1031-15	1/16W 10kohm
R21	119-1021-15	1/16W 1kohm
R24	119-1521-15	1/16W 1.5kohm
R25	119-1521-15	1/16W 1.5kohm
R26	119-1031-15	1/16W 10kohm
R27	119-1021-15	1/16W 1kohm
R28	119-1021-15	1/16W 1kohm
R29	119-8211-15	1/16W 820ohm

REF No.	PART No.	DESCRIPTION
R30	119-1041-15	1/16W 100kohm
R32	119-2221-15	1/16W 2.2kohm
R33	119-1031-15	1/16W 10kohm
R84	119-0000-05	0ohm
R101	119-1231-15	1/16W 12kohm
R102	119-1031-15	1/16W 10kohm
R105	119-1021-15	1/16W 1kohm
R106	119-0000-05	0ohm
R108	119-2291-15	1/16W 2.2ohm
R109	119-2291-15	1/16W 2.2ohm
R110	119-2291-15	1/16W 2.2ohm
R111	119-2291-15	1/16W 2.2ohm
R112	119-2711-15	1/16W 270ohm
R113	119-2711-15	1/16W 270ohm
R114	119-4721-15	1/16W 4.7kohm
R115	119-4721-15	1/16W 4.7kohm
R116	119-4721-15	1/16W 4.7kohm
R117	119-4721-15	1/16W 4.7kohm
R207	119-1011-15	1/16W 100ohm
R210	119-1031-15	1/16W 10kohm
R211	119-4731-15	1/16W 47kohm
R212	119-1531-15	1/16W 15kohm
R213	119-1031-15	1/16W 10kohm
R214	119-4731-15	1/16W 47kohm
R215	119-2221-15	1/16W 2.2kohm
R216	119-2221-15	1/16W 2.2kohm
R217	119-1031-15	1/16W 10kohm
R218	119-1021-15	1/16W 1kohm
R220	119-1031-15	1/16W 10kohm
R221	119-3921-15	1/16W 3.9kohm
R222	119-1801-15	1/16W 18ohm
R223	119-1031-15	1/16W 10kohm
R224	116-1591-15	1/4WS 1.5kohm
R225	116-1591-15	1/4WS 1.5kohm
R226	119-4731-15	1/16W 47kohm
R227	119-3321-15	1/16W 3.3kohm
R228	119-3321-15	1/16W 3.3kohm
R229	116-1591-15	1/4WS 1.5kohm
R232	119-0000-05	0ohm
R234	119-1021-15	1/16W 1kohm
R235	116-1221-15	1/4WS 1.2kohm
R236	119-1031-15	1/16W 10kohm
R237	119-1031-15	1/16W 10kohm
R238	119-3321-15	1/16W 3.3kohm
R239	119-1221-15	1/16W 1.2kohm
R240	116-4711-15	1/4WS 470ohm
R242	116-4711-15	1/4WS 470ohm
R243	119-1031-15	1/16W 10kohm
R244	111-4700-98	1/4W 47ohm
R245	119-1031-15	1/16W 10kohm
R246	116-1591-15	1/4WS 1.5kohm
R247	119-2231-15	1/16W 22kohm
R248	119-1031-15	1/16W 10kohm
R249	116-1221-15	1/4WS 1.2kohm
R250	119-1031-15	1/16W 10kohm
R251	116-1221-15	1/4WS 1.2kohm
R252	116-1521-15	1/4WS 1.5kohm
R253	119-4711-15	1/16W 470ohm
R255	111-4700-98	1/4W 47ohm
R256	116-1221-15	1/4WS 1.2kohm
R257	116-1221-15	1/4WS 1.2kohm
R260	116-3911-15	1/4W 390ohm
R261	119-2291-15	1/16W 2.2ohm
R262	119-2291-15	1/16W 2.2ohm
R263	119-1531-15	1/16W 15kohm
R264	119-2721-15	1/16W 2.7kohm
R265	116-4711-15	1/4W 470ohm
R266	116-4711-15	1/4W 470ohm
R267	119-4731-15	1/16W 47kohm
R301	119-1831-15	1/16W 18kohm
R302	119-1831-15	1/16W 18kohm
R303	032-0140-99	1/10W(F) 39kohm
R304	032-0140-99	1/10W(F) 39kohm
R305	032-0140-80	1/10W(F) 18ohm
R306	032-0140-80	1/10W(F) 18ohm
R307	119-4731-15	1/16W 47kohm
R308	032-0140-80	1/10W(F) 18ohm
R309	032-0140-80	1/10W(F) 18ohm
R310	032-0140-89	1/10W(F) 47kohm
R311	032-0140-89	1/10W(F) 47kohm
R312	032-0140-89	1/10W(F) 47kohm
R313	032-0140-89	1/10W(F) 47kohm
R314	119-4731-15	1/16W 47kohm
R315	119-1041-15	1/16W 100kohm
R316	119-3311-15	1/16W 330ohm
R317	119-1041-15	1/16W 100kohm
R318	119-1021-15	1/16W 1kohm
R319	119-3311-15	1/16W 330ohm
R320	119-2221-15	1/16W 2.2kohm
R321	119-1021-15	1/16W 1kohm
R322	119-2231-15	1/16W 22kohm
R323	119-2231-15	1/16W 22kohm
R324	119-3311-15	1/16W 330ohm
R325	119-1021-15	1/16W 1kohm
R326	119-3311-15	1/16W 330ohm
R328	119-4731-15	1/16W 47kohm
R329	119-4731-15	1/16W 47kohm
R330	032-0140-52	1/10W(F) 33kohm
R331	032-0140-52	1/10W(F) 33kohm
R332	032-0140-89	1/10W(F) 47kohm
R334	032-0140-89	1/10W(F) 47kohm
R335	032-0140-52	1/10W(F) 33kohm
R336	032-0140-52	1/10W(F) 33kohm
R337	032-0140-89	1/10W(F) 47kohm
R338	032-0140-89	1/10W(F) 47kohm
R339	119-1021-15	1/16W 1kohm
R340	119-2731-15	1/16W 27kohm
R341	119-2731-15	1/16W 27kohm
R344	119-3331-15	1/16W 33kohm
R346	119-3331-15	1/16W 33kohm
R347	119-1031-15	1/16W 10kohm
R348	119-1031-15	1/16W 10kohm
R349	119-4331-15	1/16W 43kohm
R350	119-1031-15	1/16W 10kohm
R351	119-1031-15	1/16W 10kohm
R352	119-4331-15	1/16W 43kohm
R353	119-1041-15	1/16W 100kohm
R354	119-1041-15	1/16W 100kohm
R356	119-1041-15	1/16W 100kohm
R357	119-1041-15	1/16W 100kohm
R358	119-1041-15	1/16W 100kohm
R359	119-1041-15	1/16W 100kohm
R360	119-1041-15	1/16W 100kohm
R361	119-1041-15	1/16W 100kohm
R362	119-1011-15	1/16W 100ohm
R363	119-1011-15	1/16W 100ohm
R364	119-1011-15	1/16W 100ohm
R365	119-1011-15	1/16W 100ohm
R366	119-4731-15	1/16W 47kohm
R367	119-1031-15	1/16W 10kohm
R368	119-1031-15	1/16W 10kohm
R380	119-1041-15	1/16W 100kohm
R381	119-1041-15	1/16W 100kohm
R400	119-0000-05	0ohm
R401	119-1041-15	1/16W 100kohm
R402	119-3311-15	1/16W 330ohm
R403	119-1041-15	1/16W 100kohm
R404	119-3311-15	1/16W 330ohm
R405	119-1221-15	1/16W 1.2kohm
R406	119-1521-15	1/16W 1.5kohm
R410	117-0000-05	0ohm
R415	119-1011-15	1/16W 100ohm
R416	119-2711-15	1/16W 270ohm
R417	119-2711-15	1/16W 270ohm
R418	119-2711-15	1/16W 270ohm
R428	119-0000-05	0ohm
R434	119-3311-15	1/16W 330ohm
R435	119-3311-15	1/16W 330ohm
R441	119-8211-15	1/16W 820ohm
R442	119-8211-15	1/16W 820ohm
R443	119-8211-15	1/16W 820ohm
R444	119-8211-15	1/16W 820ohm
R445	119-8211-15	1/16W 820ohm
R450	119-1041-15	1/16W 100kohm
R451	119-1041-15	1/16W 100kohm
R453	119-1041-15	1/16W 100kohm
R455	119-1041-15	1/16W 100kohm
R456	119-1031-15	1/16W 10kohm
R457	119-1031-15	1/16W 10kohm
R458	119-1031-15	1/16W 10kohm
R459	119-1031-15	1/16W 10kohm
R460	119-1031-15	1/16W 10kohm
R461	119-1031-15	1/16W 10kohm
R462	119-4731-15	1/16W 47kohm
R463	119-8221-15	1/16W 8.2kohm
R464	119-8221-15	1/16W 8.2kohm
R465	119-4731-15	1/16W 47kohm
R466	119-8221-15	1/16W 8.2kohm
R467	119-8221-15	1/16W 8.2kohm
R468	119-2231-15	1/16W 22kohm
R469	119-2231-15	1/16W 22kohm
R470	119-2231-15	1/16W 22kohm
R471	119-2231-15	1/16W 22kohm
R472	119-2231-15	1/16W 22kohm
R473	119-2231-15	1/16W 22kohm
R474	119-3311-15	1/16W 330ohm
R475	119-3311-15	1/16W 330ohm
R476	119-3311-15	1/16W 330ohm
R477	119-3311-15	1/16W 330ohm
R478	119-3311-15	1/16W 330ohm
R479	119-3311-15	1/16W 330ohm
R480	119-1021-15	1/16W 1kohm
R481	119-1021-15	1/16W 1kohm
R482	119-1021-15	1/16W 1kohm
R490	119-3311-15	1/16W 330ohm
R495	119-1041-15	1/16W 100kohm
R496	119-1041-15	1/16W 100kohm
R531	119-0000-05	0ohm
R532	119-0000-05	0ohm
R537	119-8221-15	1/16W 8.2kohm
R538	119-1021-15	1/16W 1kohm
R540	119-2231-15	1/16W 22kohm
R551	119-2221-15	1/16W 2.2kohm
R552	119-2221-15	1/16W 2.2kohm
R553	119-2221-15	1/16W 2.2kohm
R555	119-0000-05	0ohm
R556	119-0000-05	0ohm
R558	119-0000-05	0ohm

REF No.	PART No.	DESCRIPTION
R560	119-0000-05	0ohm
R572	119-0000-05	0ohm
R573	119-0000-05	0ohm
R576	119-3311-15	1/16W 330ohm
R602	116-1221-15	1/4W 1.2kohm
R603	116-6801-15	1/4WS 68ohm
R604	119-3321-15	1/16W 3.3kohm
R605	119-3321-15	1/16W 3.3kohm
R607	119-2231-15	1/16W 22kohm
R608	119-1031-15	1/16W 10kohm
R609	119-4731-15	1/16W 47kohm
R610	119-4721-15	1/16W 4.7kohm
R625	119-1041-15	1/16W 100kohm
R626	119-1041-15	1/16W 100kohm
R627	119-4731-15	1/16W 47kohm
R628	119-4731-15	1/16W 47kohm
R630	119-0000-05	0ohm
R636	119-2421-15	1/16W 2.4kohm

REF No.	PART No.	DESCRIPTION
R637	119-1241-15	1/16W 120kohm
R638	119-4731-15	1/16W 47kohm
R639	119-4721-15	1/16W 4.7kohm
R640	119-4731-15	1/16W 47kohm
R641	119-1831-15	1/16W 18kohm
R642	119-1031-15	1/16W 10kohm
R643	119-5621-15	1/16W 5.6kohm
R644	119-1541-15	1/16W 150kohm
R645	119-8221-15	1/16W 8.2kohm
R646	119-4321-15	1/16W 4.3kohm
R647	119-1021-15	1/16W 1kohm
R648	119-1021-15	1/16W 1kohm
R649	119-4731-15	1/16W 47kohm
R660	119-4731-15	1/16W 47kohm
R661	119-4731-15	1/16W 47kohm
R677	119-1031-15	1/16W 10kohm
R679	119-1031-15	1/16W 10kohm
R680	119-1021-15	1/16W 1kohm

REF No.	PART No.	DESCRIPTION
R684	119-0000-05	0ohm
R685	119-0000-05	0ohm
R686	119-0000-05	0ohm
R687	119-0000-05	0ohm
R688	119-0000-05	0ohm
R691	119-4731-15	1/16W 47kohm
R692	119-0000-05	0ohm
R693	119-0000-05	0ohm
		(PE-2577B-A)
R694	119-0000-05	0ohm
S602	013-7106-00	TKR00120670MM
S603	013-7206-50	SPPB530701
SUP51	060-0122-91	DSP-141N-SOOB
X1	061-1066-00	7.2MHZ
X401	061-3514-90	CX-11F 22.5792MHZ
X601	060-1505-50	10MHZ
X602	060-0100-01	BUZZERCBBPA-215

Sub PWB (B2) section

REF No.	PART No.	DESCRIPTION
C500	042-0416-52	10V 10uF
C501	042-0416-52	10V 10uF
C502	042-0416-52	10V 10uF
C503	042-0416-52	10V 10uF
C504	042-0416-52	10V 10uF
C505	042-0416-52	10V 10uF
C506	042-0416-52	10V 10uF
C507	042-0416-52	10V 10uF
C508	043-0264-63	0.01uF
C509	166-2711-50	50V 270PF
C510	166-2711-50	50V 270PF
C511	043-0264-63	0.01uF
C512	043-0264-63	0.01uF
C513	166-2711-50	50V 270PF
C514	166-2711-50	50V 270PF
C515	043-0264-63	0.01uF
C518	166-2711-50	50V 270PF
C519	166-2711-50	50V 270PF
C520	166-2711-50	50V 270PF
C521	166-2711-50	50V 270PF
C522	043-0264-63	0.01uF

REF No.	PART No.	DESCRIPTION
C523	043-0264-63	0.01uF
C524	043-0264-63	0.01uF
C525	043-0264-63	0.01uF
C540	042-0416-52	10V 10uF
C541	042-0416-52	10V 10uF
C542	166-2201-50	50V 22PF
C543	166-2201-50	50V 22PF
IC507	051-3026-90	NJM4580V
IC508	051-3026-90	NJM4580V
IC510	051-3026-90	NJM4580V
P500	076-0659-12	12P
P501	076-0659-12	12P
R500	032-0140-56	1/10W(F) 12kohm
R501	032-0140-56	1/10W(F) 12kohm
R502	032-0140-80	1/10W(F) 18kohm
R503	032-0140-80	1/10W(F) 18kohm
R504	032-0140-56	1/10W(F) 12kohm
R505	032-0140-56	1/10W(F) 12kohm
R506	032-0140-56	1/10W(F) 12kohm
R507	032-0140-56	1/10W(F) 12kohm
R508	032-0140-80	1/10W(F) 18kohm

REF No.	PART No.	DESCRIPTION
R509	032-0140-80	1/10W(F) 18kohm
R510	032-0140-56	1/10W(F) 12kohm
R511	032-0140-56	1/10W(F) 12kohm
R513	032-0140-98	1/10W(F) 330ohm
R514	032-0140-98	1/10W(F) 330ohm
R515	032-0140-98	1/10W(F) 18kohm
R516	032-0140-98	1/10W(F) 330ohm
R517	032-0140-98	1/10W(F) 330ohm
R518	032-0140-98	1/10W(F) 330ohm
R519	032-0140-80	1/10W(F) 18kohm
R520	032-0140-98	1/10W(F) 330ohm
R521	032-0140-80	1/10W(F) 18kohm
R522	032-0140-98	1/10W(F) 330ohm
R523	032-0140-80	1/10W(F) 18kohm
R524	032-0140-80	1/10W(F) 18kohm
R565	119-1041-15	1/16W 100kohm
R567	119-1041-15	1/16W 100kohm
R568	119-1531-15	1/16W 15kohm
R569	119-1531-15	1/16W 15kohm
R570	119-2231-15	1/16W 22kohm
R571	119-2231-15	1/16W 22kohm

Switch PWB (B3) section

REF No.	PART No.	DESCRIPTION
C710	042-0416-52	10V 10uF TAN
C710	042-0416-51	6.3V 10uF TAN
C711	168-1042-78	16V 0.1uF
D721	001-7064-90	SR CL-170
D722	001-7043-90	FG CL-170
D723	001-7064-90	SR CL-170
D724	001-7043-90	FG CL-170
D725	001-7064-90	SR CL-170
D726	001-7043-90	FG CL-170
D727	001-7064-90	SR CL-170
D728	001-7043-90	FG CL-170
D729	001-7064-90	SR CL-170
D730	001-7043-90	FG CL-170
D731	001-7064-90	SR CL-170
D732	001-7043-90	FG CL-170
D733	001-7064-90	SR CL-170
D734	001-7043-90	FG CL-170
D735	001-7064-90	SR CL-170
D736	001-7043-90	FG CL-170

REF No.	PART No.	DESCRIPTION
D737	001-7043-90	FG CL-170
D738	001-7043-90	FG CL-170
D739	001-7040-90	NSCB100
D751	001-0516-90	MA111
D751	001-0517-90	SS355
D752	001-0516-90	MA111
D752	001-0517-90	SS355
D753	001-0516-90	MA111
D753	001-0517-90	SS355
D754	001-0516-90	MA111
D754	001-0517-90	SS355
D755	001-0516-90	MA111
D755	001-0517-90	SS355
IC703	051-6618-18	M66006FP-41A
IR701	060-4008-00	RS170
R749	119-2221-15	1/16W 2.2kohm
R750	119-2221-15	1/16W 2.2kohm
R751	119-1221-15	1/16W 1.2kohm
R752	119-1221-15	1/16W 1.2kohm

REF No.	PART No.	DESCRIPTION
R753	119-1221-15	1/16W 1.2kohm
R754	119-1221-15	1/16W 1.2kohm
R755	119-1221-15	1/16W 1.2kohm
R756	119-1221-15	1/16W 1.2kohm
R757	119-1221-15	1/16W 1.2kohm
R758	119-1221-15	1/16W 1.2kohm
R759	119-1221-15	1/16W 1.2kohm
R760	119-1221-15	1/16W 1.2kohm
R761	119-1221-15	1/16W 1.2kohm
R762	119-1221-15	1/16W 1.2kohm
R763	119-1221-15	1/16W 1.2kohm
R764	119-1221-15	1/16W 1.2kohm
R765	119-1221-15	1/16W 1.2kohm
R766	119-1221-15	1/16W 1.2kohm
R769	119-1221-15	1/16W 1.2kohm
R770	119-1221-15	1/16W 1.2kohm
R771	119-1031-15	1/16W 10kohm
R772	119-1031-15	1/16W 10kohm
R773	119-1031-15	1/16W 10kohm

REF No.	PART No.	DESCRIPTION
R774	119-1031-15	1/16W 10kohm
R775	119-1031-15	1/16W 10kohm
R776	119-1041-15	1/16W 100kohm
R777	119-1041-15	1/16W 100kohm
R778	119-1041-15	1/16W 100kohm
R779	119-1041-15	1/16W 100kohm
R780	119-1041-15	1/16W 100kohm
R782	119-1011-15	1/16W 100ohm
R783	119-1041-15	1/16W 100kohm
R784	119-2021-15	1/16W 2kohm
R789	119-1521-15	1/16W 1.5kohm
R790	119-1521-15	1/16W 1.5kohm

REF No.	PART No.	DESCRIPTION
S702	013-8004-50	SRGP300/00
S703	013-6519-50	LS9J2M-2SR/FG
S704	013-6519-50	LS9J2M-2SR/FG
S705	013-6519-50	LS9J2M-2SR/FG
S706	013-6507-50	LS8J2M-T
S707	013-6519-50	LS9J2M-2SR/FG
S708	013-6519-50	LS9J2M-2SR/FG
S709	013-6519-50	LS9J2M-2SR/FG
S710	013-6519-50	LS9J2M-2SR/FG
S711	013-6507-50	LS8J2M-T
S712	013-6519-50	LS9J2M-2SR/FG
S713	013-6519-50	LS9J2M-2SR/FG

REF No.	PART No.	DESCRIPTION
S714	013-6519-50	LS9J2M-2SR/FG
S715	013-6519-50	LS9J2M-2SR/FG
S716	013-6507-50	LS8J2M-T
S717	013-6519-50	LS9J2M-2SR/FG
S718	013-6519-50	LS9J2M-2SR/FG
S719	013-6519-50	LS9J2M-2SR/FG
S720	013-6519-50	LS9J2M-2SR/FG
S721	013-6519-50	LS9J2M-2SR/FG
S722	013-6519-50	LS9J2M-2SR/FG
S723	013-6519-50	LS9J2M-2SR/FG
S724	013-6507-50	LS8J2M-T
S725	013-6519-50	LS9J2M-2SR/FG

Switch Sub PWB (B4) section

REF No.	PART No.	DESCRIPTION
P701	076-0647-00	16P
P702	076-0658-08	8P
P703	076-0658-08	8P

LCD PWB (B5) section

REF No.	PART No.	DESCRIPTION
C701	168-1032-55	25V 0.01uF
C702	042-0416-52	10V 10uF TAN
C702	042-0416-51	6.3V 10uF TAN
C703	042-0416-50	16V 4.7uF
C704	042-0416-50	16V 4.7uF
C705	042-0416-52	10V 10uF
C705	042-0416-51	6.3V 10uF TAN
C706	168-1042-78	25V 0.1uF
C709	168-1042-78	25V 0.1uF
C712	168-1032-55	25V 0.01uF
D701	001-7062-90	RBR1111C
D702	001-7062-90	RBR1111C
D703	001-7062-90	RBR1111C
D704	001-7062-90	RBR1111C
D705	001-7062-90	RBR1111C
D706	001-7062-90	RBR1111C
D707	001-7062-90	RBR1111C
D708	001-7062-90	RBR1111C
D710	001-7055-90	NSSWS405
D711	001-7055-90	NSSWS405
D712	001-7055-90	NSSWS405
D713	001-7055-90	NSSWS405
D714	001-7055-90	NSSWS405
D715	001-7055-90	NSSWS405
D716	001-7062-90	RBR1111C

REF No.	PART No.	DESCRIPTION
IC701	052-7061-01	M30624MGA-E85GP
IC702	051-6057-00	ML9090A-01G A
P702	074-1195-78	28P
Q701	125-2004-93	RN1403
Q702	125-2004-93	RN1403
Q703	125-2004-93	RN1403
Q704	125-2004-93	RN1403
Q705	125-2004-93	RN1403
Q706	125-2004-93	RN1403
Q707	125-2004-93	RN1403
Q708	125-2004-93	RN1403
Q710	190-1162-00	2SA1162
Q711	192-2712-51	2SC2712GL
R701	116-2711-15	1/4WS 270ohm
R702	116-2711-15	1/4WS 270ohm
R703	116-2711-15	1/4WS 270ohm
R704	116-2711-15	1/4WS 270ohm
R705	116-2711-15	1/4WS 270ohm
R706	116-2711-15	1/4WS 270ohm
R707	116-2711-15	1/4WS 270ohm
R708	116-2711-15	1/4WS 270ohm
R717	032-0140-00	1/10W(F) 56kohm
R718	032-0140-53	1/10W(F) 2.2kohm
R719	032-0140-98	1/10W(F) 330ohm
R720	032-0140-98	1/10W(F) 330ohm


REF No.	PART No.	DESCRIPTION
R721	032-0140-98	1/10W(F) 330ohm
R722	032-0140-98	1/10W(F) 330ohm
R723	032-0140-98	1/10W(F) 330ohm
R724	032-0140-98	1/10W(F) 330ohm
R725	032-0140-98	1/10W(F) 330ohm
R726	032-0140-98	1/10W(F) 330ohm
R727	032-0140-98	1/10W(F) 330ohm
R728	032-0140-98	1/10W(F) 330ohm
R729	032-0140-98	1/10W(F) 330ohm
R730	032-0140-98	1/10W(F) 330ohm
R731	032-0140-98	1/10W(F) 330ohm
R732	119-1811-15	1/16W 180ohm
R733	119-1811-15	1/16W 180ohm
R734	119-1811-15	1/16W 180ohm
R735	119-1811-15	1/16W 180ohm
R736	119-1521-15	1/16W 1.5kohm
R740	119-1041-15	1/16W 100kohm
R748	119-1031-15	1/16W 10kohm
R749	119-4731-15	1/16W 47kohm
R786	119-4721-15	1/16W 4.7kohm
R787	119-4721-15	1/16W 4.7kohm
R799	116-2711-15	1/16W 270ohm
S701	013-6507-50	LS8J2M-T
S726	013-7411-60	SAC0125
X701	060-1505-50	10MHZ

Note)Several different parts of the same reference number are alternative parts.

One of those parts is used in the set.

EXPLODED VIEW:

CD mechanism section 929-0220-83

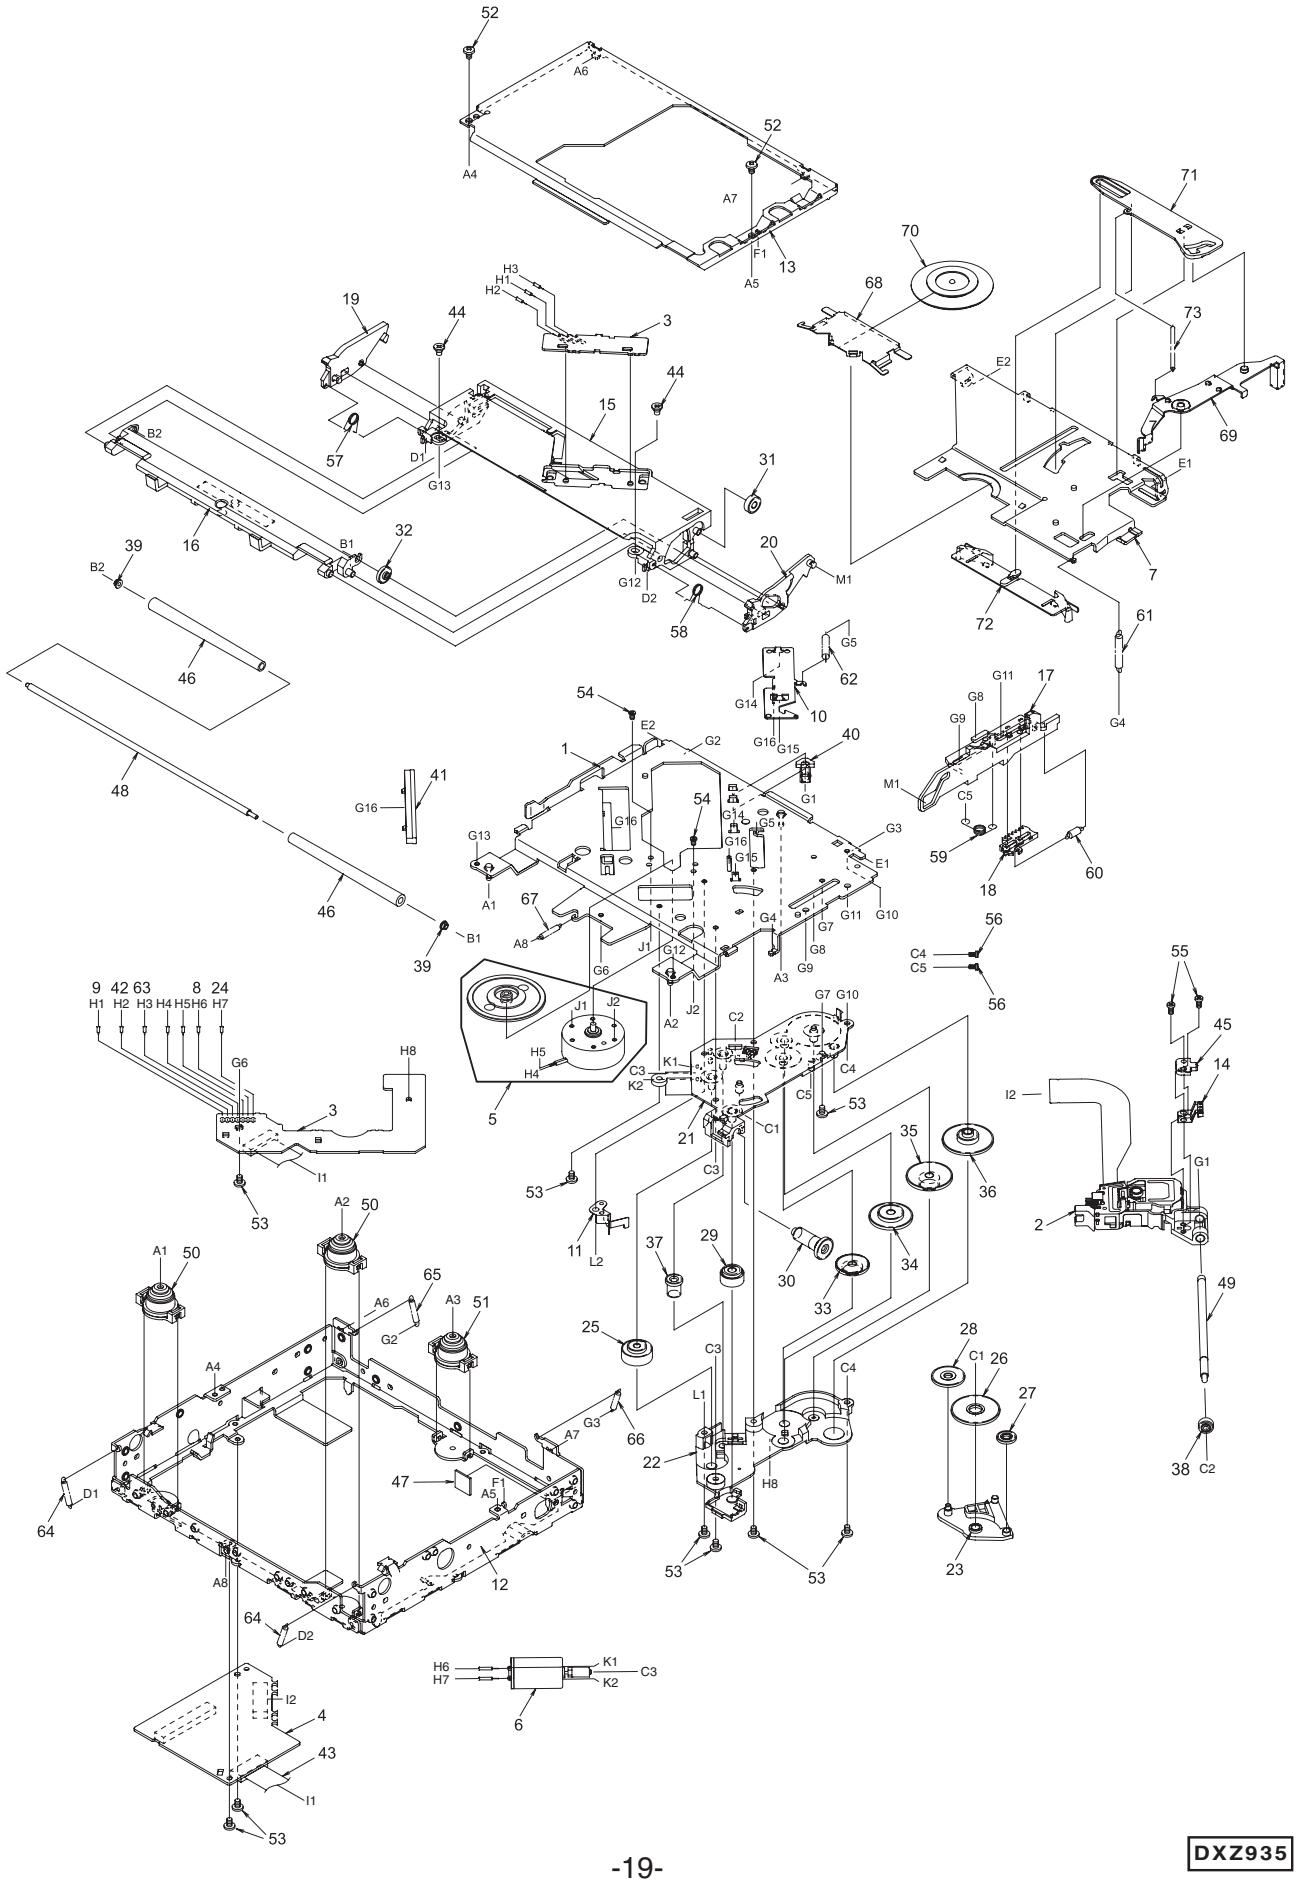

PARTS LIST:

CD mechanism section 929-0220-83

NO.	PARTS NO.	DESCRIPTION	Q'TY
1	966-0595-25	DRIVE PLATE ASSY	1
2	969-0060-30	PICK UP UNIT	1
3	039-1944-21	LED PWB (WITHOUT COMPONENT)	1
4	039-1945-20	CD PWB (WITHOUT COMPONENT)	1
5	SMA-182-100	MOTOR ASSY(SPINDLE)	1
6	SMA-183-100	MOTOR ASSY(SLED)	1
7	620-1022-25	CLAMPER LINK	1
8	803-4906-60	VINYL COAT WIRE(ORG)	1
9	816-2591-00	LEAD WIRE(YEL)	1
10	620-1025-22	ID-LOCK PLATE	1
11	620-1026-21	SPRING PLATE	1
12	620-1027-26	LOWER CHASSIS	1
13	620-1028-23	UPPER CHASSIS	1
14	966-0638-20	SH-RACK ASSY	1
15	621-0598-26	UPPER GUIDE	1
16	621-0718-20	ROLLER GUIDE	1
17	621-0600-26	SHIFT LEVER	1
18	621-0601-21	RACK	1
19	621-0602-22	LOCK ARM(L)	1
20	621-0603-25	LOCK ARM(R)	1
21	621-0724-20	GEAR BASE	1
22	621-0605-22	GEAR COVER	1
23	621-0606-21	IDLE CASE	1
24	816-2590-00	VINYL COAT WIRE(GRN)	1
25	621-0608-21	SECOND GEAR	1
26	621-0609-20	BASE GEAR	1
27	621-0610-20	IDLE GEAR A	1
28	621-0611-20	IDLE GEAR B	1
29	621-0612-21	ROLLER GEAR A	1
30	621-0613-20	ROLLER GEAR B	1
31	621-0614-20	ROLLER GEAR C	1
32	621-0615-21	ROLLER GEAR D	1
33	621-0616-20	POWER GEAR A	1
34	621-0617-20	ROWER GEAR B	1
35	621-0618-20	ROWER GEAR C	1
36	621-0619-20	POWER GEAR D	1

NO.	PARTS NO.	DESCRIPTION	Q'TY
37	621-0620-20	THREAD GEAR A	1
38	621-0621-20	THREAD GEAR B	1
39	621-0622-21	ROLLER SLEEVE	2
40	621-0623-22	LS-HOLDER	1
41	621-0624-22	GUIDE RAIL	1
42	816-2593-00	LEAD WIRE(PUR)	1
43	816-2542-01	FLAT WIRE(10P)	1
44	716-3473-00	SCREW	2
45	621-0709-20	SH-BASE	1
46	621-0629-20	LOADING ROLLER	2
47	345-8704-20	CUSHION RUBBER	1
48	622-1660-20	ROLLER SHAFT	1
49	624-0018-01	LEAD SCREW	1
50	629-0081-20	DAMPER F	2
51	629-0082-20	DAMPER R	1
52	714-2003-81	MACHINE SCREW	2
53	716-1507-00	SCREW	9
54	716-1733-00	SCREW	2
55	716-3469-00	SCREW	2
56	716-3446-00	SCREW	2
57	750-3465-21	ROLLER SPRING(L)	1
58	750-3466-20	ROLLER SPRING(R)	1
59	750-3467-21	SHIFT SPRING	1
60	750-3468-20	RACK SPRING	1
61	750-3469-20	CLAMPER SPRING	1
62	750-3470-20	ID-LOCK SPRING	1
63	816-2592-00	LEAD WIRE(BLU)	1
64	750-3472-21	DR-SPRING F	2
65	750-3473-20	DR-SPRING RA	1
66	750-3474-20	DR-SPRING RB	1
67	750-3475-21	DR-SPRING C	1
68	620-1023-23	CLAMPER PLATE	1
69	620-1024-23	SENSOR ARM	1
70	621-0708-20	CLAMPER RING	1
71	621-0626-21	STOPPER LINK	1
72	621-0627-21	DISC STOPPER	1
73	750-3471-20	SENSOR SPRING	1

ELECTRICAL PARTS LIST :

CD mechanism (B6) section 929-0220-83

REF No.	PART No.	DESCRIPTION
C 101	168-1042-78	0.1uF
C 102	045-4701-50	47pF
C 103	046-4722-58	4700pF
C 104	168-1042-78	0.1uF
C 105	046-1532-78	0.015uF
C 106	046-1032-78	0.01uF
C 107	046-1032-78	0.01uF
C 108	046-4722-58	4700pF
C 109	046-1522-58	1500pF
C 110	046-3332-78	0.033uF
C 111	168-1042-78	0.1uF
C 112	046-3332-78	0.033uF
C 113	168-1042-78	0.1uF
C 114	168-1042-78	0.1uF
C 115	046-4712-58	470pF
C 116	046-4712-58	470pF
C 117	043-0533-50	0.047uF
C 118	043-0533-50	0.047uF
C 119	045-2701-50	27pF
C 120	045-1801-50	18pF
C 121	163-1063-35	16V 10uF
C 122	178-1052-78	1uF
C 123	046-1032-78	0.01uF
C 124	163-1073-05	4V 100uF
C 125	168-1042-78	0.1uF
C 126	168-1042-78	0.1uF
C 129	178-1052-78	1uF
C 201	163-3363-05	4V 33uF
C 202	168-1042-78	0.1uF
C 203	178-1052-78	1uF
C 204	163-1073-05	4V 100uF
C 205	163-3363-05	4V 33uF
C 206	168-1042-78	0.1uF

REF No.	PART No.	DESCRIPTION
C 207	043-0533-50	0.047uF
C 208	046-6822-58	6800pF
C 209	168-1042-78	0.1uF
C 210	043-0533-50	0.047uF
C 211	168-1042-78	0.1uF
C 212	168-1042-78	0.1uF
C 213	045-5096-50	5pF
C 214	045-5601-50	56pF
C 215	043-0533-50	0.047uF
C 216	178-1052-78	1uF
C 217	045-1011-50	100pF
C 301	163-1073-35	16V 100uF
C 302	168-1042-78	0.1uF
C 303	043-0533-50	0.047uF
D 201	001-0516-90	MA111
IC 101	051-6376-00	TC94A14FA
IC 102	051-3279-90	BA033LBSG
IC 201	051-5710-90	TA2157F
IC 301	051-6049-08	BA5983FP-E2
J 101	074-1228-76	26P
J 201	074-1138-65	15P
J 301	074-1138-60	10P
L 101	010-2285-57	BLM21B102SPT
L 102	010-2285-57	BLM21B102SPT
L 103	010-2285-57	BLM21B102SPT
L 104	010-2285-57	BLM21B102SPT
L 105	010-2285-57	BLM21B102SPT
L 401	010-2155-93	10uH
Q 201	131-1188-50	2SB1188
R 102	033-5621-15	1/16W 5.6kohm
R 104	033-4731-15	1/16W 47kohm
R 105	033-1041-15	1/16W 100kohm
R 108	033-1531-15	1/16W 15kohm

REF No.	PART No.	DESCRIPTION
R 109	033-1031-15	1/16W 10kohm
R 110	033-1051-15	1/16W 1Mohm
R 111	033-3321-15	1/16W 3.3kohm
R 114	033-2211-15	1/16W 220ohm
R 115	033-2211-15	1/16W 220ohm
R 116	033-1031-15	1/16W 10kohm
R 117	033-1021-15	1/16W 1kohm
R 131	033-4711-15	1/16W 470ohm
R 132	033-2211-15	1/16W 220ohm
R 201	117-2201-15	1/10W 22ohm
R 202	117-2201-15	1/10W 22ohm
R 203	033-1041-15	1/16W 100kohm
R 204	033-1041-15	1/16W 100kohm
R 205	033-1041-15	1/16W 100kohm
R 206	033-1041-15	1/16W 100kohm
R 207	033-1041-15	1/16W 100kohm
R 208	033-8231-15	1/16W 82kohm
R 209	033-6811-15	1/16W 680ohm
R 210	033-6831-15	1/16W 68kohm
R 211	033-1831-15	1/16W 18kohm
R 212	033-2721-15	1/16W 2.7kohm
R 213	033-1011-15	1/16W 100ohm
R 214	033-1021-15	1/16W 1kohm
R 215	033-1031-15	1/16W 10kohm
R 217	033-1041-15	1/16W 100kohm
R 218	033-2211-15	1/16W 220ohm
R 301	117-6811-15	1/16W 680ohm
R 304	033-3921-15	1/16W 3.9kohm
R 305	033-3921-15	1/16W 3.9kohm
R 306	033-1041-15	1/16W 100kohm
R 307	033-2211-15	1/16W 220ohm
X 102	060-1528-90	16.934M

LED PWB (B7) section

REF No.	PART No.	DESCRIPTION
D 1	001-7058-90	AN1105W-RR
D 2	001-7058-90	AN1105W-RR
J 1	074-1138-60	10P
Q 1	060-4015-90	PS1192H
Q 2	060-4015-90	PS1192H
S 1	013-7414-50	CHUCKING
S 2	013-7413-50	LIMIT