


EXPLODED VIEW / PARTS LIST

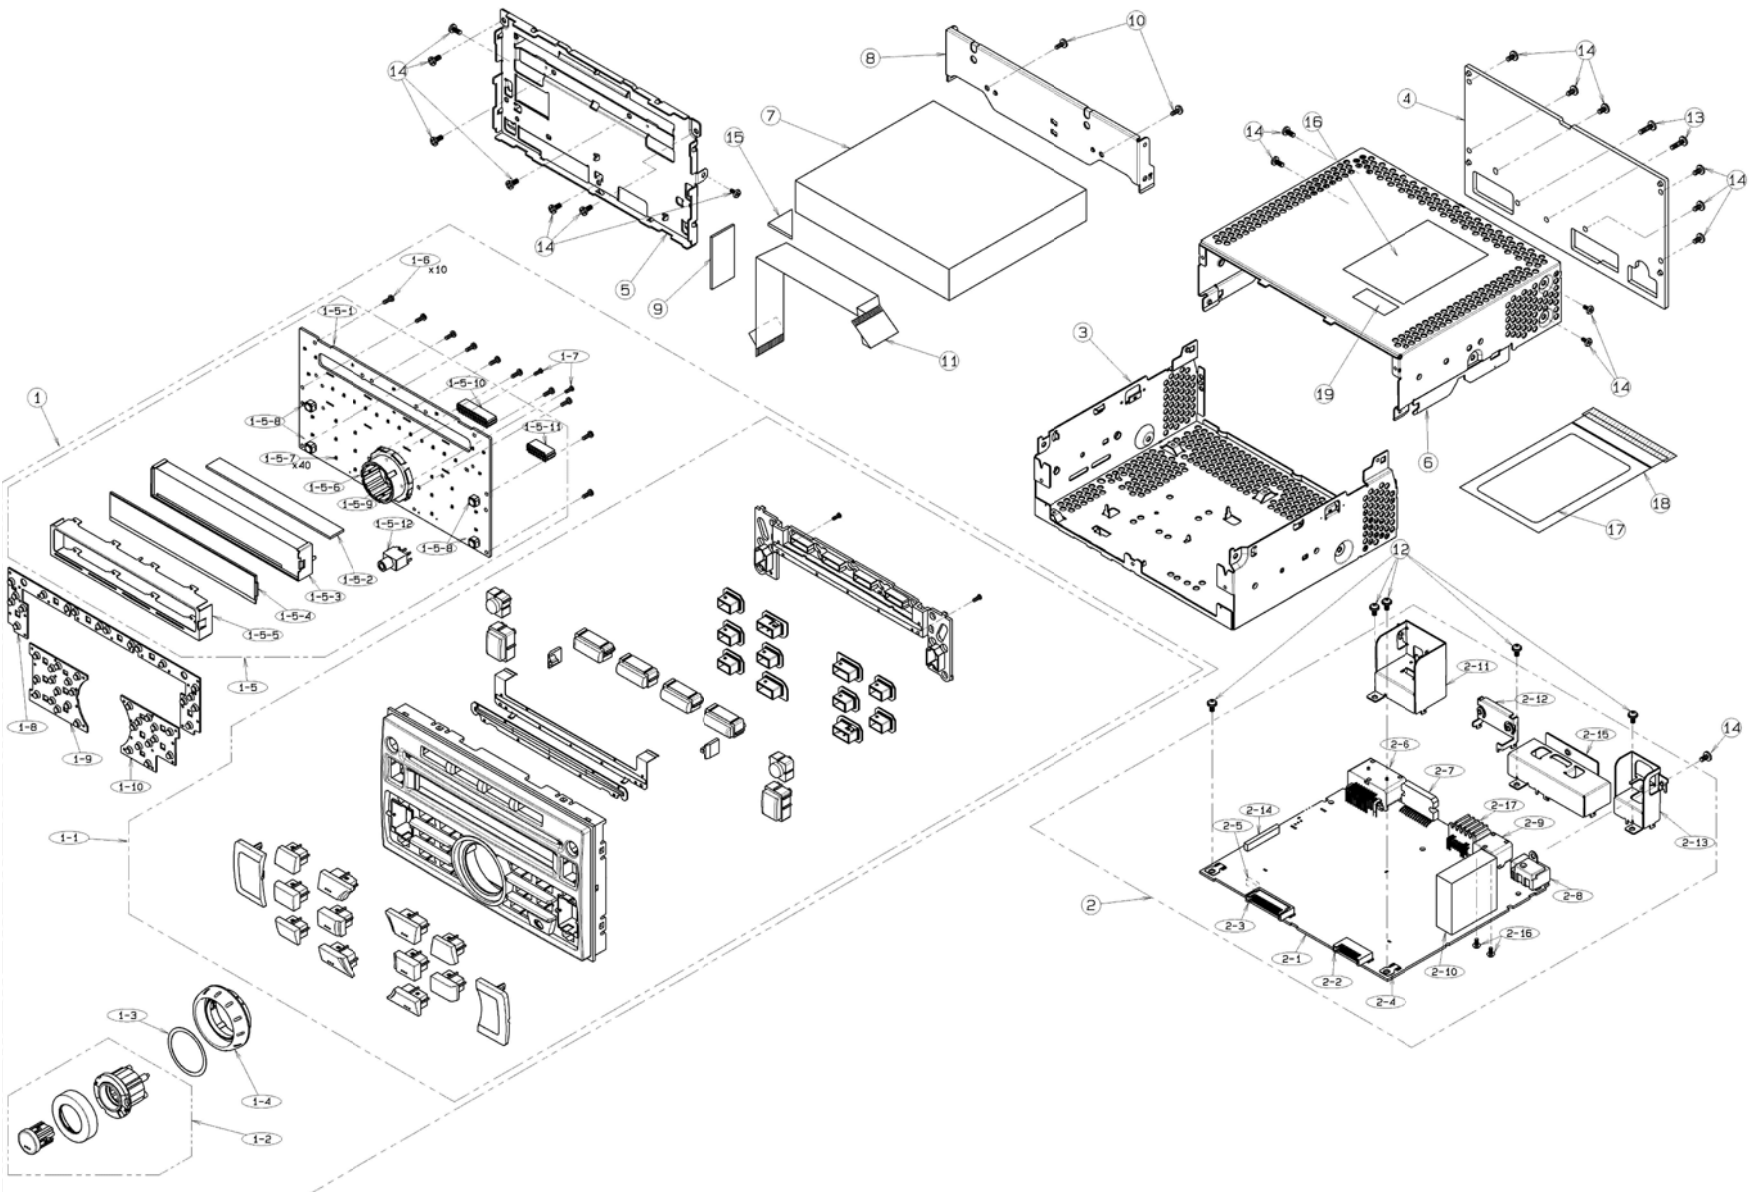

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	-----	PANEL-ASSY	1	2-6	074-4009-20	OUTLET SOCKET	1
1-1	940-8592-00	ESCUTCHEON-ASSY	1	2-7	051-2064-00	IC	1
1-2	947-0591-00	KNOB ASSY	1	2-8	092-2210-01	ANT-RECEPT	1
1-3	347-7959-00	SHADE	1	2-9	074-1302-12	OUTLET SOCKET	1
1-4	380-5655-00	KNOB	1	2-10	880-2091M	TUNER	1
1-5	-----	SW-PWB-ASSY	1	2-11	331-4679-00	SOCKET HOLDER	1
1-5-1	039-3307-00	SW PWB	1	2-12	331-4678-00	IC-HOLDER	1
1-5-2	345-6311-01	RUBBER CONNECT	1	2-13	331-4676-00	ANT-HOLDER	1
1-5-3	335-8365-00	LCD-HOLDER	1	2-14	074-2503-79	OUTLET SOCKET	1
1-5-4	379-1419-50	INDICATOR	1	2-15	331-4677-00	SHIELD CASE	1
1-5-5	331-4675-01	LCD COVER	1	2-16	778-3006-00	TAP-SCREW	2
1-5-6	016-7004-00	ROTARY SWITCH	1	2-17	-----	(OUTLET SOCKET)*UNUSED	-
1-5-7	001-7109-90	DIODE	40	3	311-1969-00	LOWER CASE	1
1-5-8	013-6202-52	TACT SWITCH	4	4	313-2052-70	HEAT SINK	1
1-5-9	013-6201-53	SWITCH	1	5	309-1885-00	ES-PLATE(1CD)	1
1-5-10	074-3033-26	OUTLET SOCKET	1	6	310-1889-00	UPPER CASE	1
1-5-11	074-3033-16	OUTLET SOCKET	1	7	929-5004-83	CD-MECH-MODULE	1
1-5-12	075-0395-01	JACK	1	8	331-4123-00	CD BRKT	1
1-6	716-0778-52	SPECIAL SCREW	10	9	347-8636-00	WIRE SUPPORT	1
1-7	716-0872-51	SPECIAL SCREW	2	10	714-2603-89	MACHINE SCREW	2
1-8	345-6310-00	RUBBER SW(UP)	1	11	816-4051-50	FLAT WIRE	1
1-9	345-6308-00	RUBBER SW(LH)	1	12	716-0878-50	SPECIAL SCREW	5
1-10	345-6309-00	RUBBER SW(RH)	1	13	735-2614-1B	D-SEMS SCREW	2
2	-----	MAIN-PWB-ASSY	1	14	714-2606-8B	MACHINE SCREW	18
2-1	-----	MAIN PWB	1	15	345-5802-00	CUSHION RUBBER	1
2-2	076-3011-66	PLUG	1	16	276-0533-26	SETPLATE	1
2-3	076-3011-76	PLUG	1	17	287-1761-00	RADIO PASS CARD	1
2-4	073-0762-90	TERMINAL	2	18	253-1261-00	POLY-BAG	1
2-5	076-6000-59	PLUG	1	19	-----	(LABEL)*UNUSED	-

ELECTRICAL PARTS LIST

MAIN PWB(B1) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
ANT101	092-2210-01	ANT-RECEPT	C212	-----	(NU)	C330	166-1011-50	100pF CH
BL101	880-2091M	TUNER	C213	-----	(NU)	C331	168-1042-78	16V 0.1uF K
C101	168-2222-55	2200pF K	C214	-----	(NU)	C332	166-1011-50	100pF CH
C102	-----	(NU)	C215	-----	(NU)	C333	168-1022-55	1000pF K
C103	-----	(NU)	C216	-----	(NU)	C334	168-1022-55	1000pF K
C104	119-0000-05	1/10W 0 ohm JW	C217	-----	(NU)	C335	163-1063-35	16V 10uF
C105	-----	(NU)	C218	-----	(NU)	C336	168-1052-78	16V 1uF K
C106	-----	(NU)	C219	-----	(NU)	C337	168-3332-78	0.033uF K
C107	-----	(NU)	C220	-----	(NU)	C338	168-1022-55	1000pF K
C108	166-1511-50	150pF CH	C221	-----	(NU)	C339	-----	(NU)
C109	-----	(NU)	C222	-----	(NU)	C340	168-1022-55	1000pF K
C110	-----	(NU)	C223	-----	(NU)	C341	166-1011-50	100pF CH
C111	-----	(NU)	C224	-----	(NU)	C342	168-1022-55	1000pF K
C112	-----	(NU)	C225	-----	(NU)	C343	168-4712-55	470pF K
C113	166-2201-50	22pF CH	C226	-----	(NU)	C344	168-1042-78	16V 0.1uF K
C114	-----	(NU)	C227	-----	(NU)	C345	168-1022-55	1000pF K
C115	-----	(NU)	C228	-----	(NU)	C347	168-3322-55	3300pF K
C116	-----	(NU)	C229	-----	(NU)	C348	168-3322-55	3300pF K
C117	168-1042-78	16V 0.1uF K	C230	-----	(NU)	C349	168-3322-55	3300pF K
C118	168-1022-55	1000pF K	C231	168-3342-58	0.33uF K	C350	168-3322-55	3300pF K
C119	168-3342-58	0.33uF K	C232	043-0554-90	25V 10uF	C351	168-3322-55	3300pF K
C120	163-4763-15	6.3V 47uF	C233	-----	(NU)	C352	168-3322-55	3300pF K
C121	163-1073-35	16V 100uF	C234	168-1052-78	16V 1uF K	C353	-----	(NU)
C122	168-1052-78	16V 1uF K	C235	-----	(NU)	C354	043-0554-90	25V 10uF
C123	168-1052-78	16V 1uF K	C237	168-2242-58	0.22uF K	C355	042-1736-90	16V 470uF M
C124	168-2222-55	2200pF K	C238	163-1063-35	16V 10uF	C356	168-4722-55	4700pF K
C125	168-5612-55	560pF Z	C239	-----	(NU)	C357	163-1073-15	6.3V 100uF
C126	168-1052-78	16V 1uF K	C240	-----	(NU)	C358	168-2222-55	2200pF K
C127	168-1022-55	1000pF K	C241	-----	(NU)	C359	043-0570-90	16V 2.2uF K
C128	168-2242-58	0.22uF K	C242	-----	(NU)	C360	043-0570-90	16V 2.2uF K
C129	168-1022-55	1000pF K	C243	-----	(NU)	C361	166-2201-50	22pF CH
C130	168-3922-55	3900pF K	C244	-----	(NU)	C362	168-2222-55	2200pF K
C131	168-3922-55	3900pF K	C250	-----	(NU)	C363	166-2201-50	22pF CH
C132	168-1022-55	1000pF K	C251	-----	(NU)	C364	166-2201-50	22pF CH
C133	168-1042-78	16V 0.1uF K	C252	-----	(NU)	C365	168-2222-55	2200pF K
C134	168-1042-78	16V 0.1uF K	C261	166-1011-50	100pF CH	C366	166-2201-50	22pF CH
C135	168-1022-55	1000pF K	C262	166-1011-50	100pF CH	C367	168-2222-55	2200pF K
C136	163-1073-35	16V 100uF	C263	166-1011-50	100pF CH	C368	166-2201-50	22pF CH
C137	168-1052-78	16V 1uF K	C264	166-1011-50	100pF CH	C369	166-2201-50	22pF CH
C138	168-1052-78	16V 1uF K	C265	166-1011-50	100pF CH	C370	043-0570-90	16V 2.2uF K
C139	168-1042-78	16V 0.1uF K	C266	166-1011-50	100pF CH	C371	043-0570-90	16V 2.2uF K
C140	166-2201-50	22pF CH	C267	166-1011-50	100pF CH	C372	043-0570-90	16V 2.2uF K
C141	166-2201-50	22pF CH	C268	166-1011-50	100pF CH	C373	043-0570-90	16V 2.2uF K
C142	166-2201-50	22pF CH	C301	163-4753-65	50V 4.7uF	C401	168-1042-78	16V 0.1uF K
C143	166-2201-50	22pF CH	C302	168-1042-78	16V 0.1uF K	C402	168-1042-78	16V 0.1uF K
C144	168-1052-78	16V 1uF K	C303	166-1811-50	180pF CH	C403	-----	(NU)
C145	-----	(NU)	C304	168-1042-78	16V 0.1uF K	C404	-----	(NU)
C146	-----	(NU)	C305	168-1042-78	16V 0.1uF K	C405	-----	(NU)
C147	-----	(NU)	C306	166-8097-50	8pF +/-0.5pF CH	C406	-----	(NU)
C148	-----	(NU)	C307	166-8097-50	8pF +/-0.5pF CH	C407	-----	(NU)
C149	-----	(NU)	C308	168-1022-55	1000pF K	C408	166-1801-50	18pF CH
C150	-----	(NU)	C309	163-4753-65	50V 4.7uF	C409	168-1042-78	16V 0.1uF K
C151	-----	(NU)	C310	168-1042-78	16V 0.1uF K	C410	163-4763-15	6.3V 47uF
C152	163-1063-35	16V 10uF	C311	163-4753-65	50V 4.7uF	C411	168-1042-78	16V 0.1uF K
C153	-----	(NU)	C312	168-1042-78	16V 0.1uF K	C412	168-1032-55	0.01uF K
C154	163-1063-35	16V 10uF	C313	168-1022-55	1000pF K	C413	-----	(NU)
C155	-----	(NU)	C314	168-1022-55	1000pF K	C414	168-1022-55	1000pF K
C156	168-1022-55	1000pF K	C315	166-1011-50	100pF CH	C415	168-1022-55	1000pF K
C157	168-1022-55	1000pF K	C316	168-1042-78	16V 0.1uF K	C416	168-1022-55	1000pF K
C158	-----	(NU)	C317	168-5622-55	5600pF K	C417	168-1022-55	1000pF K
C201	163-1073-35	16V 100uF	C318	168-5622-55	5600pF K	C418	168-1022-55	1000pF K
C202	168-2222-55	2200pF K	C319	166-1011-50	100pF CH	C419	-----	(NU)
C203	168-1042-78	16V 0.1uF K	C320	166-1011-50	100pF CH	C420	-----	(NU)
C204	163-3363-25	10V 33uF	C321	-----	(NU)	C501	168-1042-78	16V 0.1uF K
C205	-----	(NU)	C322	168-1022-55	1000pF K	C502	168-1042-78	16V 0.1uF K
C206	-----	(NU)	C323	168-1022-55	1000pF K	C503	168-1042-78	16V 0.1uF K
C207	-----	(NU)	C324	163-2273-05	4V 220uF	C504	168-1042-78	16V 0.1uF K
C208	-----	(NU)	C325	168-2222-55	2200pF K	C505	168-3342-58	0.33uF K
C209	-----	(NU)	C326	166-4711-50	470pF CH	C506	166-5611-50	560pF CH
C210	-----	(NU)	C327	163-2263-35	16V 22uF	C507	166-5611-50	560pF CH
C211	-----	(NU)	C328	163-4763-15	6.3V 47uF	C508	043-0554-90	25V 10uF

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C509	166-5611-50	560pF CH	CCT402	050-0140-54	1/32W 1k ohm x4J	IC103	051-3034-90	NJM4558V
C510	166-5611-50	560pF CH	CCT403	050-0145-52	1/16W 1k ohm x4	IC104	-----	(NU)
C511	166-2201-50	22pF CH	CCT404	050-0145-52	1/16W 1k ohm x4	IC201	-----	(NU)
C512	166-2201-50	22pF CH	D101	-----	(NU)	IC202	-----	(NU)
C513	166-2201-50	22pF CH	D102	-----	(NU)	IC203	051-3518-90	NJM2846DL3-33-TE1
C514	166-2201-50	22pF CH	D103	-----	(NU)	IC205	051-3553-90	NJM2865F3-05
C515	168-1052-78	16V 1uF K	D104	001-0580-90	1SS352	IC301	-----	SAF7730HV/N332
C516	163-1073-35	16V 100uF	D105	-----	(NU)			(670650-051)
C517	-----	(NU)	D106	001-0529-48	MA8091-H			(CENTER PAD TYP)
C518	166-5611-50	560pF CH	D107	001-0580-90	1SS352	IC302	051-3034-90	NJM4558V
C519	166-5611-50	560pF CH	D108	001-9210-50	AVR-M1608C270MTA	IC401	051-9430-90	S-24CS64A01-T8T1G
C520	168-3342-58	0.33uF K			AD	IC402	051-9430-90	S-24CS64A01-T8T1G
C521	166-5611-50	560pF CH	D109	001-4320-50	EDZC6.8B	IC403	-----	M30879FKBGP VIRG
C522	166-5611-50	560pF CH	D110	001-4320-50	EDZC6.8B			IN TYP
C523	168-1042-78	16V 0.1uF K	D111	001-4320-50	EDZC6.8B			(032300-052)
C524	168-2242-58	0.22uF K	D112	001-4320-50	EDZC6.8B			(FLASH)
C525	043-0552-90	6.3V 47uF M	D113	001-4320-50	EDZC6.8B	IC404	-----	(NU)
C526	043-0566-90	50V 2.2uF K	D114	-----	(NU)	IC405	051-5417-08	S-80927CNMC-B8M
C527	043-0604-90	25V 10uF B	D115	-----	(NU)	IC501	051-3518-90	NJM2846DL3-33-TE1
C528	-----	(NU)	D116	-----	(NU)	IC502	051-3019-90	NJM2060V
C529	168-4742-78	0.47uF K	D202	-----	(NU)	IC503	051-3551-90	NJM2878F3-33-TE1
C530	168-1042-38	50V 0.1uF K	D203	-----	(NU)	IC504	051-3396-90	NJM2386ADL3-33-TE
C531	163-1073-35	16V 100uF	D204	-----	(NU)			1
C532	168-1542-58	0.15uF K	D205	-----	(NU)	IC505	051-3517-90	LT3481EMSE#TRPB
C533	168-1542-58	0.15uF K	D206	-----	(NU)			F
C534	168-1542-58	0.15uF K	D207	-----	(NU)	IC506	051-2064-00	TB2926HQ
C535	168-1542-58	0.15uF K	D208	-----	(NU)	IC507	051-3034-90	NJM4558V
C536	168-1042-78	16V 0.1uF K	D209	-----	(NU)	IC508	051-5441-08	BD4828G-TR
C537	168-1052-78	16V 1uF K	D210	001-4313-53	HZU9B1L TRF-E	J101	074-1302-12	12P
C538	-----	(NU)	D211	-----	(NU)	J203	074-2503-79	SOCKET
C539	-----	(NU)	D212	-----	(NU)	J205	-----	(NU)
C540	042-1760-90	16V 10uF M	D213	-----	(NU)	J501	-----	(NU)
C541	178-2742-78	0.27uF	D214	-----	(NU)	J502	074-4009-20	20P
C542	168-1052-78	16V 1uF K	D215	-----	(NU)	L101	010-3104-54	600 ohm/100MHz
C543	163-4763-35	16V 47uF	D216	-----	(NU)	L102	-----	(NU)
C544	163-2273-25	10V 220uF	D217	-----	(NU)	L103	-----	(NU)
C545	168-2212-55	220pF K	D218	-----	(NU)	L104	-----	(NU)
C546	166-2201-50	22pF CH	D219	-----	(NU)	L105	010-2003-04	30uH
C547	-----	(NU)	D220	-----	(NU)	L107	010-3104-54	600 ohm/100MHz
C548	163-4763-35	16V 47uF	D221	-----	(NU)	L301	010-3104-54	600 ohm/100MHz
C549	042-1465-00	16V 3300uF	D222	-----	(NU)	L302	010-3104-54	600 ohm/100MHz
C550	172-1041-11	0.1uF	D223	-----	(NU)	L303	010-3104-54	600 ohm/100MHz
C551	163-4763-35	16V 47uF	D224	-----	(NU)	L304	010-3104-54	600 ohm/100MHz
C552	163-4763-35	16V 47uF	D225	-----	(NU)	L305	010-3104-54	600 ohm/100MHz
C553	-----	(NU)	D226	-----	(NU)	L306	010-3104-54	600 ohm/100MHz
C554	168-6822-55	6800pF K	D227	-----	(NU)	L307	010-3104-54	600 ohm/100MHz
C555	168-6822-55	6800pF K	D228	-----	(NU)	L308	010-3104-54	600 ohm/100MHz
C556	168-6822-55	6800pF K	D401	001-2630-90	1SS420-TPL3,F	L309	010-3104-54	600 ohm/100MHz
C557	168-6822-55	6800pF K	D501	001-2640-90	D1FJ4	L310	010-3104-54	600 ohm/100MHz
C558	168-6822-55	6800pF K	D502	001-0529-48	MA8091-H	L311	010-3104-54	600 ohm/100MHz
C559	168-6822-55	6800pF K	D503	-----	(NU)	L312	010-3104-54	600 ohm/100MHz
C560	168-6822-55	6800pF K	D504	001-0529-48	MA8091-H	L313	010-3104-54	600 ohm/100MHz
C561	168-6822-55	6800pF K	D505	-----	(NU)	L401	-----	(NU)
C562	168-6822-55	6800pF K	D506	001-2015-00	RL253	L402	010-3406-54	2.2uH J
C563	043-0574-90	25V 1.0uF	D507	001-0580-90	1SS352	L501	010-3104-54	600 ohm/100MHz
C564	168-1042-78	16V 0.1uF K	D508	001-0580-90	1SS352	L502	010-3414-92	2.2uH
C565	163-1063-35	16V 10uF	D509	-----	(NU)	L503	010-8050-00	240uH
C566	168-2232-55	0.022uF K	D510	001-0529-48	MA8091-H	L525	010-3104-53	220 ohm/100MHz
C567	-----	(NU)	D511	001-4320-50	EDZC6.8B	P101	076-3011-66	16P
C568	168-1522-55	1500pF K	D512	001-0580-90	1SS352	P402	076-3011-76	26P
C569	166-2201-50	22pF CH	D513	001-4320-50	EDZC6.8B	P403	076-6000-59	9P
C570	178-2242-38	0.22uF B	D514	001-4320-50	EDZC6.8B	Q101	-----	(NU)
C571	168-1542-58	0.15uF K	D515	001-0529-34	MA8062-L	Q102	-----	(NU)
C572	168-1542-58	0.15uF K	D516	001-0580-90	1SS352	Q103	-----	(NU)
C573	168-1542-58	0.15uF K	D517	001-0529-47	MA8091-M	Q105	198-3018-00	2SK3018
C574	168-1542-58	0.15uF K	D518	-----	(NU)	Q106	198-3018-00	2SK3018
C575	042-4000-90	16V 470uF	D519	-----	(NU)	Q107	192-5886-00	2SC5886
C576	-----	(NU)	D520	001-2412-90	RR264M-400	Q108	125-2027-90	DTC143EUA
C577	-----	(NU)	D521	001-2412-90	RR264M-400	Q109	190-2060-00	2SA2060
C578	-----	(NU)	D522	-----	(NU)	Q110	-----	(NU)
C580	-----	(NU)	D523	001-4320-50	EDZC6.8B	Q111	-----	(NU)
C581	-----	(NU)	IC101	051-6524-90	AK2301A-E1	Q112	-----	(NU)
C590	168-1522-55	1500pF K	IC102	051-7255-08	SN74AHC1G66HDCK	Q201	-----	(NU)
C591	-----	(NU)			R	Q202	-----	(NU)

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
Q203	-----	(NU)	R122	-----	(NU)	R211	-----	(NU)
Q204	-----	(NU)	R123	-----	(NU)	R212	-----	(NU)
Q205	-----	(NU)	R124	119-2741-15	1/10W 270k ohm	R213	-----	(NU)
Q206	-----	(NU)	R125	119-0000-05	1/10W 0 ohm JW	R214	-----	(NU)
Q207	-----	(NU)	R126	-----	(NU)	R215	-----	(NU)
Q208	-----	(NU)	R127	-----	(NU)	R216	-----	(NU)
Q209	-----	(NU)	R128	-----	(NU)	R217	-----	(NU)
Q210	-----	(NU)	R129	-----	(NU)	R218	-----	(NU)
Q211	-----	(NU)	R131	-----	(NU)	R219	-----	(NU)
Q214	193-1259-50	2SD1259DS R,Q	R132	-----	(NU)	R220	-----	(NU)
Q215	-----	(NU)	R133	-----	(NU)	R221	-----	(NU)
Q216	-----	(NU)	R134	119-3331-15	1/10W 33k ohm	R222	-----	(NU)
Q217	-----	(NU)	R135	119-1011-15	1/10W 100 ohm	R223	-----	(NU)
Q218	-----	(NU)	R136	119-3931-15	1/10W 39k ohm	R224	-----	(NU)
Q219	-----	(NU)	R137	119-3931-15	1/10W 39k ohm	R225	-----	(NU)
Q220	-----	(NU)	R138	119-1031-15	1/10W 10k ohm	R226	-----	(NU)
Q221	-----	(NU)	R139	119-1031-15	1/10W 10k ohm	R227	-----	(NU)
Q222	-----	(NU)	R140	119-1531-15	1/10W 15k ohm	R228	-----	(NU)
Q301	125-7007-90	Si5441BDC-TI-E3	R141	119-1011-15	1/10W 100 ohm	R229	-----	(NU)
Q302	125-2027-91	DTC114EUA	R142	119-3931-15	1/10W 39k ohm	R230	-----	(NU)
Q401	-----	(NU)	R143	119-1011-15	1/10W 100 ohm	R231	-----	(NU)
Q402	-----	(NU)	R144	119-4731-15	1/10W 47k ohm	R232	-----	(NU)
Q403	125-2027-91	DTC114EUA	R145	119-4731-15	1/10W 47k ohm	R233	-----	(NU)
Q404	125-0021-91	DTA114EUA	R146	116-6891-15	1/4W 6.8 ohm	R234	-----	(NU)
Q405	191-0709-00	2SB709A Q,R,S	R147	119-0000-05	1/10W 0 ohm JW	R235	-----	(NU)
Q406	192-2712-00	2SC2712	R148	119-0000-05	1/10W 0 ohm JW	R236	-----	(NU)
Q407	125-2027-91	DTC114EUA	R149	119-2231-15	1/10W 22k ohm	R237	-----	(NU)
Q408	198-3018-00	2SK3018	R150	119-3321-15	1/10W 3.3k ohm	R238	-----	(NU)
Q409	125-2027-91	DTC114EUA	R151	119-6821-15	1/10W 6.8k ohm	R239	-----	(NU)
Q410	198-3018-00	2SK3018	R152	119-3931-15	1/10W 39k ohm	R240	-----	(NU)
Q411	125-2027-91	DTC114EUA	R153	119-1021-15	1/10W 1k ohm	R241	119-4731-15	1/10W 47k ohm
Q501	-----	(NU)	R154	119-3321-15	1/10W 3.3k ohm	R242	116-2201-15	1/4W 22 ohm
Q502	-----	(NU)	R155	119-3321-15	1/10W 3.3k ohm	R243	-----	(NU)
Q503	-----	(NU)	R156	119-2231-15	1/10W 22k ohm	R244	-----	(NU)
Q504	125-2027-91	DTC114EUA	R157	119-2231-15	1/10W 22k ohm	R247	116-3911-15	1/4W 390 ohm
Q505	191-1197-50	2SB1197K Q,R	R158	119-1001-15	1/10W 10 ohm	R248	116-3911-15	1/4W 390 ohm
Q506	192-5886-00	2SC5886	R159	119-1001-15	1/10W 10 ohm	R249	119-1041-15	1/10W 100k ohm
Q508	-----	(NU)	R160	119-1031-15	1/10W 10k ohm	R250	-----	(NU)
Q509	-----	(NU)	R161	119-0000-05	1/10W 0 ohm JW	R251	-----	(NU)
Q510	-----	(NU)	R162	119-3321-15	1/10W 3.3k ohm	R252	-----	(NU)
Q511	192-5810-00	2SC5810 TE12L	R163	119-1041-15	1/10W 100k ohm	R253	-----	(NU)
Q512	125-2027-91	DTC114EUA	R164	119-2231-15	1/10W 22k ohm	R254	-----	(NU)
Q513	191-1197-50	2SB1197K Q,R	R165	119-1041-15	1/10W 100k ohm	R255	-----	(NU)
Q514	192-4116-51	2SC4116 G,L	R166	119-0000-05	1/10W 0 ohm JW	R256	-----	(NU)
Q515	191-1204-61	2SB1204 R,S,T	R167	-----	(NU)	R257	-----	(NU)
Q516	125-2027-91	DTC114EUA	R168	-----	(NU)	R259	119-1021-15	1/10W 1k ohm
Q517	191-1197-50	2SB1197K Q,R	R169	-----	(NU)	R260	119-1021-15	1/10W 1k ohm
Q518	192-4081-00	2SC4081	R170	116-1091-15	1/4W 1 ohm	R261	-----	(NU)
Q519	192-4116-00	2SC4116	R172	-----	(NU)	R262	-----	(NU)
Q520	125-2027-91	DTC114EUA	R173	116-1221-15	1/4W 1.2k ohm	R263	-----	(NU)
Q521	192-4116-51	2SC4116 G,L	R174	116-3911-15	1/4W 390 ohm	R264	-----	(NU)
Q522	-----	(NU)	R175	-----	(NU)	R265	-----	(NU)
Q523	-----	(NU)	R176	119-1031-15	1/10W 10k ohm	R266	-----	(NU)
R101	119-1031-15	1/10W 10k ohm	R177	-----	(NU)	R267	-----	(NU)
R102	119-1031-15	1/10W 10k ohm	R178	-----	(NU)	R268	-----	(NU)
R103	-----	(NU)	R179	-----	(NU)	R301	119-1031-15	1/10W 10k ohm
R104	119-1031-15	1/10W 10k ohm	R180	119-0000-05	1/10W 0 ohm JW	R302	119-1031-15	1/10W 10k ohm
R105	-----	(NU)	R181	-----	(NU)	R303	119-2201-15	1/10W 22 ohm
R106	119-4731-15	1/10W 47k ohm	R182	-----	(NU)	R304	-----	(NU)
R107	119-1031-15	1/10W 10k ohm	R183	-----	(NU)	R305	-----	(NU)
R108	119-1031-15	1/10W 10k ohm	R184	-----	(NU)	R306	-----	(NU)
R109	119-0000-05	1/10W 0 ohm JW	R185	119-0000-05	1/10W 0 ohm JW	R307	-----	(NU)
R110	119-1031-15	1/10W 10k ohm	R186	-----	(NU)	R308	119-1031-15	1/10W 10k ohm
R111	-----	(NU)	R187	119-0000-05	1/10W 0 ohm JW	R309	119-1011-15	1/10W 100 ohm
R112	-----	(NU)	R201	-----	(NU)	R310	119-1021-15	1/10W 1k ohm
R113	-----	(NU)	R202	-----	(NU)	R311	119-1031-15	1/10W 10k ohm
R114	-----	(NU)	R203	-----	(NU)	R312	119-3921-15	1/10W 3.9k ohm
R115	-----	(NU)	R204	-----	(NU)	R313	119-1031-15	1/10W 10k ohm
R116	-----	(NU)	R205	-----	(NU)	R314	119-3921-15	1/10W 3.9k ohm
R117	-----	(NU)	R206	-----	(NU)	R315	119-1031-15	1/10W 10k ohm
R118	-----	(NU)	R207	119-1021-15	1/10W 1k ohm	R316	119-0000-05	1/10W 0 ohm JW
R119	-----	(NU)	R208	119-1021-15	1/10W 1k ohm	R317	119-1031-15	1/10W 10k ohm
R120	-----	(NU)	R209	119-1021-15	1/10W 1k ohm	R318	119-1041-15	1/10W 100k ohm
R121	-----	(NU)	R210	-----	(NU)	R319	119-1041-15	1/10W 100k ohm

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R320	119-1001-15	1/10W 10 ohm	R426	119-1031-15	1/10W 10k ohm	R501	-----	(NU)
R321	119-3921-15	1/10W 3.9k ohm	R427	119-1031-15	1/10W 10k ohm	R502	119-1031-15	1/10W 10k ohm
R322	119-0000-05	1/10W 0 ohm JW	R428	119-1031-15	1/10W 10k ohm	R503	119-1031-15	1/10W 10k ohm
R323	119-1021-15	1/10W 1k ohm	R429	119-1031-15	1/10W 10k ohm	R504	119-1031-15	1/10W 10k ohm
R324	119-3921-15	1/10W 3.9k ohm	R430	119-1011-15	1/10W 100 ohm	R505	119-1031-15	1/10W 10k ohm
R325	119-0000-05	1/10W 0 ohm JW	R431	119-1011-15	1/10W 100 ohm	R506	-----	(NU)
R326	-----	(NU)	R432	119-1011-15	1/10W 100 ohm	R507	119-1031-15	1/10W 10k ohm
R327	119-1031-15	1/10W 10k ohm	R433	119-1011-15	1/10W 100 ohm	R508	119-1031-15	1/10W 10k ohm
R328	-----	(NU)	R434	119-1031-15	1/10W 10k ohm	R509	119-1031-15	1/10W 10k ohm
R329	119-1031-15	1/10W 10k ohm	R435	119-1031-15	1/10W 10k ohm	R510	119-1031-15	1/10W 10k ohm
R330	-----	(NU)	R436	-----	(NU)	R511	119-1031-15	1/10W 10k ohm
R331	119-1031-15	1/10W 10k ohm	R437	119-4731-15	1/10W 47k ohm	R512	119-1031-15	1/10W 10k ohm
R332	119-1031-15	1/10W 10k ohm	R438	-----	(NU)	R513	-----	(NU)
R333	119-1031-15	1/10W 10k ohm	R439	119-4731-15	1/10W 47k ohm	R514	119-1051-15	1/10W 1M ohm
R334	119-1031-15	1/10W 10k ohm	R440	119-4731-15	1/10W 47k ohm	R515	119-1051-15	1/10W 1M ohm
R335	119-1031-15	1/10W 10k ohm	R441	-----	(NU)	R516	119-1051-15	1/10W 1M ohm
R336	119-1031-15	1/10W 10k ohm	R442	119-4721-15	1/10W 4.7k ohm	R517	119-1051-15	1/10W 1M ohm
R337	119-1031-15	1/10W 10k ohm	R443	-----	(NU)	R518	119-1031-15	1/10W 10k ohm
R338	119-1031-15	1/10W 10k ohm	R444	119-1021-15	1/10W 1k ohm	R519	119-1031-15	1/10W 10k ohm
R339	119-1011-15	1/10W 100 ohm	R445	119-4731-15	1/10W 47k ohm	R520	119-1031-15	1/10W 10k ohm
R340	119-1011-15	1/10W 100 ohm	R446	119-4731-15	1/10W 47k ohm	R521	119-1031-15	1/10W 10k ohm
R341	119-0000-05	1/10W 0 ohm JW	R447	119-1031-15	1/10W 10k ohm	R522	119-1031-15	1/10W 10k ohm
R342	119-0000-05	1/10W 0 ohm JW	R448	119-0000-05	1/10W 0 ohm JW	R523	119-1031-15	1/10W 10k ohm
R343	119-0000-05	1/10W 0 ohm JW	R449	119-4731-15	1/10W 47k ohm	R524	119-4731-15	1/10W 47k ohm
R344	119-0000-05	1/10W 0 ohm JW	R450	119-0000-05	1/10W 0 ohm JW	R526	-----	(NU)
R345	119-0000-05	1/10W 0 ohm JW	R451	-----	(NU)	R527	032-0148-63	1/10W 130k ohm D
R346	119-0000-05	1/10W 0 ohm JW	R452	119-4731-15	1/10W 47k ohm	R528	032-0148-64	1/10W 390k ohm D
R347	119-1031-15	1/10W 10k ohm	R453	119-1031-15	1/10W 10k ohm	R529	-----	(NU)
R348	119-0000-05	1/10W 0 ohm JW	R454	119-4731-15	1/10W 47k ohm	R530	119-1031-15	1/10W 10k ohm
R349	119-4731-15	1/10W 47k ohm	R455	-----	(NU)	R531	-----	(NU)
R350	119-0000-05	1/10W 0 ohm JW	R456	119-1021-15	1/10W 1k ohm	R532	119-1031-15	1/10W 10k ohm
R351	119-1021-15	1/10W 1k ohm	R457	-----	(NU)	R533	119-1841-15	1/10W 180k ohm
R352	119-1021-15	1/10W 1k ohm	R458	119-1021-15	1/10W 1k ohm	R534	119-1031-15	1/10W 10k ohm
R353	119-1021-15	1/10W 1k ohm	R459	119-4731-15	1/10W 47k ohm	R535	116-6811-15	1/4W 680 ohm
R354	119-1021-15	1/10W 1k ohm	R460	119-4731-15	1/10W 47k ohm	R536	119-1031-15	1/10W 10k ohm
R356	119-1001-15	1/10W 10 ohm	R461	-----	(NU)	R537	032-0140-51	1/10W 15k ohm F
R357	032-0140-15	1/10W 6.8k ohm F	R462	-----	(NU)	R538	119-1021-15	1/10W 1k ohm
R358	032-0140-15	1/10W 6.8k ohm F	R463	119-4731-15	1/10W 47k ohm	R539	-----	(NU)
R360	032-0140-15	1/10W 6.8k ohm F	R464	-----	(NU)	R540	-----	(NU)
R361	032-0140-15	1/10W 6.8k ohm F	R465	-----	(NU)	R541	-----	(NU)
R362	032-0140-50	1/10W 10k ohm F	R466	119-4731-15	1/10W 47k ohm	R542	-----	(NU)
R363	032-0140-50	1/10W 10k ohm F	R467	-----	(NU)	R543	-----	(NU)
R364	032-0140-50	1/10W 10k ohm F	R468	-----	(NU)	R544	-----	(NU)
R365	032-0140-50	1/10W 10k ohm F	R469	119-1011-15	1/10W 100 ohm	R545	-----	(NU)
R366	119-1031-15	1/10W 10k ohm	R470	-----	(NU)	R546	-----	(NU)
R367	119-1031-15	1/10W 10k ohm	R471	119-1021-15	1/10W 1k ohm	R547	119-4721-15	1/10W 4.7k ohm
R368	-----	(NU)	R472	119-1011-15	1/10W 100 ohm	R548	119-4721-15	1/10W 4.7k ohm
R369	-----	(NU)	R473	-----	(NU)	R549	119-3331-15	1/10W 33k ohm
R370	-----	(NU)	R474	119-4731-15	1/10W 47k ohm	R550	-----	(NU)
R401	119-1021-15	1/10W 1k ohm	R475	119-1011-15	1/10W 100 ohm	R551	-----	(NU)
R402	119-1021-15	1/10W 1k ohm	R476	119-1011-15	1/10W 100 ohm	R552	-----	(NU)
R403	119-1021-15	1/10W 1k ohm	R477	119-4721-15	1/10W 4.7k ohm	R553	-----	(NU)
R404	119-0000-05	1/10W 0 ohm JW	R478	119-4721-15	1/10W 4.7k ohm	R554	-----	(NU)
R405	119-1021-15	1/10W 1k ohm	R479	119-1031-15	1/10W 10k ohm	R555	116-3911-15	1/4W 390 ohm
R406	119-1021-15	1/10W 1k ohm	R480	119-4731-15	1/10W 47k ohm	R556	119-1521-15	1/10W 1.5k ohm
R407	119-1021-15	1/10W 1k ohm	R481	119-2231-15	1/10W 22k ohm	R557	116-1221-15	1/4W 1.2k ohm
R408	119-1021-15	1/10W 1k ohm	R482	119-4731-15	1/10W 47k ohm	R558	119-1031-15	1/10W 10k ohm
R409	119-0000-05	1/10W 0 ohm JW	R483	119-1031-15	1/10W 10k ohm	R559	116-1221-15	1/4W 1.2k ohm
R410	119-4731-15	1/10W 47k ohm	R484	119-4731-15	1/10W 47k ohm	R560	119-1031-15	1/10W 10k ohm
R411	119-4721-15	1/10W 4.7k ohm	R485	119-4731-15	1/10W 47k ohm	R561	116-1221-15	1/4W 1.2k ohm
R412	119-4721-15	1/10W 4.7k ohm	R486	119-1041-15	1/10W 100k ohm	R562	116-1221-15	1/4W 1.2k ohm
R413	119-3311-15	1/10W 330 ohm	R487	119-1041-15	1/10W 100k ohm	R563	119-1031-15	1/10W 10k ohm
R414	119-3311-15	1/10W 330 ohm	R488	119-1241-15	1/10W 120k ohm	R564	119-4721-15	1/10W 4.7k ohm
R415	119-4731-15	1/10W 47k ohm	R489	119-3331-15	1/10W 33k ohm	R565	119-1521-15	1/10W 1.5k ohm
R416	119-4731-15	1/10W 47k ohm	R490	119-6801-15	1/10W 68 ohm	R566	119-1031-15	1/10W 10k ohm
R417	119-4731-15	1/10W 47k ohm	R491	119-2241-15	1/10W 220k ohm	R567	032-0148-50	1/10W 100k ohm D
R418	119-4711-15	1/10W 470 ohm	R492	119-4731-15	1/10W 47k ohm	R568	032-0140-16	1/10W 180k ohm F
R419	119-4711-15	1/10W 470 ohm	R493	119-4721-15	1/10W 4.7k ohm	R570	119-0000-05	1/10W 0 ohm JW
R420	119-4711-15	1/10W 470 ohm	R494	119-4721-15	1/10W 4.7k ohm	R571	119-0000-05	1/10W 0 ohm JW
R421	119-4711-15	1/10W 470 ohm	R495	119-4731-15	1/10W 47k ohm	R572	032-0208-51	1/4W 15k ohm
R422	-----	(NU)	R496	119-4721-15	1/10W 4.7k ohm	R573	119-2221-15	1/10W 2.2k ohm
R423	119-1011-15	1/10W 100 ohm	R497	119-4721-15	1/10W 4.7k ohm	R574	119-0000-05	1/10W 0 ohm JW
R424	119-1011-15	1/10W 100 ohm	R498	119-1041-15	1/10W 100k ohm	R575	116-1531-15	1/4W 15k ohm
R425	-----	(NU)	R499	119-1041-15	1/10W 100k ohm	R577	119-1031-15	1/10W 10k ohm

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R578	119-0000-05	1/10W 0 ohm JW	R588	119-3341-15	1/10W 330k ohm	TH101	002-0229-00	PTH8L05BAIR8M1B
R579	119-1031-15	1/10W 10k ohm	R589	-----	(NU)	TM101	073-0762-90	TERMINAL
R580	119-5611-15	1/10W 560 ohm	R590	-----	(NU)	TM502	073-0762-90	TERMINAL
R581	116-4791-15	1/4W 4.7 ohm	R591	-----	(NU)	TM9001	-----	(NU)
R582	116-4791-15	1/4W 4.7 ohm	R4001	119-1021-15	1/10W 1k ohm	X301	061-3537-90	41.6MHz
R583	119-2231-15	1/10W 22k ohm	R4002	119-1021-15	1/10W 1k ohm	X401	061-3567-90	8.000MHz AT-41CD2
R584	119-3321-15	1/10W 3.3k ohm	SUP102	060-0122-91	DSP-141N-S00B	PWB	039-3306-00	PWB(WITHOUT CO MPONENTS)
R586	-----	(NU)	T101	-----	(NU)			
R587	-----	(NU)	TC401	004-1580-10	30pF GRN			

SW PWB(B2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
ANT902	060-8094-50	YMA1250-S100706	D636	001-7109-90	SML-311DTT86 ORG	R604	032-0140-53	1/10W 2.2k ohm F
C601	043-0554-90	25V 10uF	D637	001-7109-90	SML-311DTT86 ORG	R605	032-0140-53	1/10W 2.2k ohm F
C602	043-0554-90	25V 10uF	D638	001-7109-90	SML-311DTT86 ORG	R606	116-1821-15	1/4W 1.8k ohm
C603	168-1042-78	16V 0.1uF K	D639	001-7109-90	SML-311DTT86 ORG	R607	119-4731-15	1/10W 47k ohm
C604	043-0554-90	25V 10uF	D640	001-7109-90	SML-311DTT86 ORG	R608	116-2221-15	1/4W 2.2k ohm
C605	168-1042-78	16V 0.1uF K	D641	001-7109-90	SML-311DTT86 ORG	R609	116-2721-15	1/4W 2.7k ohm
C606	-----	(NU)	D642	001-7109-90	SML-311DTT86 ORG	R610	-----	(NU)
C607	-----	(NU)	D643	001-7109-90	SML-311DTT86 ORG	R611	116-2221-15	1/4W 2.2k ohm
C608	-----	(NU)	D644	001-7109-90	SML-311DTT86 ORG	R612	116-2221-15	1/4W 2.2k ohm
C609	-----	(NU)	D645	001-7109-90	SML-311DTT86 ORG	R613	116-2221-15	1/4W 2.2k ohm
C610	-----	(NU)	D646	-----	(NU)	R614	116-2221-15	1/4W 2.2k ohm
C611	-----	(NU)	D647	-----	(NU)	R615	116-1021-15	1/4W 1k ohm
C901	168-1042-78	16V 0.1uF K	D648	-----	(NU)	R616	116-2221-15	1/4W 2.2k ohm
C902	166-1011-50	100pF CH	D649	-----	(NU)	R617	116-1021-15	1/4W 1k ohm
C903	168-1042-78	16V 0.1uF K	D650	-----	(NU)	R618	116-2221-15	1/4W 2.2k ohm
C904	166-1011-50	100pF CH	D651	-----	(NU)	R619	116-1021-15	1/4W 1k ohm
C905	166-1011-50	100pF CH	D652	-----	(NU)	R620	116-2221-15	1/4W 2.2k ohm
C906	042-0423-97	16V 10uF	D653	-----	(NU)	R621	116-1021-15	1/4W 1k ohm
C907	168-1042-78	16V 0.1uF K	D654	-----	(NU)	R622	116-1821-15	1/4W 1.8k ohm
C908	168-1042-78	16V 0.1uF K	D655	-----	(NU)	R623	116-1021-15	1/4W 1k ohm
C909	166-3311-50	330pF CH	D656	001-7109-90	SML-311DTT86 ORG	R624	116-1821-15	1/4W 1.8k ohm
C910	-----	(NU)	D657	-----	(NU)	R625	116-1021-15	1/4W 1k ohm
D601	001-9210-50	AVR-M1608C270MTA AD	D662	001-9210-50	AVR-M1608C270MTA AD	R626	116-1821-15	1/4W 1.8k ohm
D602	001-9210-50	AVR-M1608C270MTA AD	D663	001-9210-50	AVR-M1608C270MTA AD	R627	116-2221-15	1/4W 2.2k ohm
D603	001-9210-50	AVR-M1608C270MTA AD	D664	001-9210-50	AVR-M1608C270MTA AD	R628	116-2721-15	1/4W 2.7k ohm
D604	001-4320-50	EDZC6.8B	D665	001-9210-50	AVR-M1608C270MTA AD	R629	116-2221-15	1/4W 2.2k ohm
D605	001-7109-90	SML-311DTT86 ORG	D666	001-9210-50	AVR-M1608C270MTA AD	R630	116-2221-15	1/4W 2.2k ohm
D606	001-7109-90	SML-311DTT86 ORG	D667	001-9210-50	AVR-M1608C270MTA AD	R631	116-2221-15	1/4W 2.2k ohm
D607	001-7109-90	SML-311DTT86 ORG	D668	001-9210-50	AVR-M1608C270MTA AD	R632	116-2221-15	1/4W 2.2k ohm
D610	001-7109-90	SML-311DTT86 ORG	D669	001-9210-50	AVR-M1608C270MTA AD	R633	116-2221-15	1/4W 2.2k ohm
D611	001-7109-90	SML-311DTT86 ORG	IC601	051-6057-00	ML9090A-01GA	R634	116-2221-15	1/4W 2.2k ohm
D612	001-7109-90	SML-311DTT86 ORG	IC901	060-8095-91	UGZZ5-616B	R635	119-0000-05	1/10W 0 ohm JW
D613	001-7109-90	SML-311DTT86 ORG	J601	074-3033-26	26P	R636	116-2221-15	1/4W 2.2k ohm
D614	001-7109-90	SML-311DTT86 ORG	J602	075-0395-01	JACK	R637	119-0000-05	1/10W 0 ohm JW
D615	001-7109-90	SML-311DTT86 ORG	J901	074-3033-16	SOCKET(16P)	R638	-----	(NU)
D616	001-7109-90	SML-311DTT86 ORG	L901	010-3104-54	600 ohm/100MHz	R639	116-1821-15	1/4W 1.8k ohm
D617	001-7109-90	SML-311DTT86 ORG	L902	010-3104-54	600 ohm/100MHz	R640	119-2221-15	1/10W 2.2k ohm
D618	001-7109-90	SML-311DTT86 ORG	L903	010-3104-54	600 ohm/100MHz	R901	119-0000-05	1/10W 0 ohm JW
D619	001-7109-90	SML-311DTT86 ORG	L904	010-3104-54	600 ohm/100MHz	R902	119-0000-05	1/10W 0 ohm JW
D620	001-7109-90	SML-311DTT86 ORG	L906	010-3104-54	600 ohm/100MHz	R905	119-2711-15	1/10W 270 ohm
D621	001-7109-90	SML-311DTT86 ORG	L907	010-3104-54	600 ohm/100MHz	R909	119-1031-15	1/10W 10k ohm
D622	001-7109-90	SML-311DTT86 ORG	L909	010-3104-54	600 ohm/100MHz	R914	119-5631-15	1/10W 56k ohm
D623	001-7109-90	SML-311DTT86 ORG	L910	010-3104-54	600 ohm/100MHz	R916	119-1031-15	1/10W 10k ohm
D624	001-7109-90	SML-311DTT86 ORG	L911	010-3104-54	600 ohm/100MHz	R917	119-2711-15	1/10W 270 ohm
D625	001-7109-90	SML-311DTT86 ORG	L912	010-3104-54	600 ohm/100MHz	R918	119-1011-15	1/10W 100 ohm
D626	001-7109-90	SML-311DTT86 ORG	Q601	190-1162-00	2SA1162	R919	119-1011-15	1/10W 100 ohm
D627	001-7109-90	SML-311DTT86 ORG	Q602	192-2712-51	2SC2712 G,L	S601	016-7004-00	ROTARY SWITCH
D628	001-7109-90	SML-311DTT86 ORG	R601	032-0140-00	1/10W 56k ohm F	S602	013-6201-53	SKPMAPE010
D629	001-7109-90	SML-311DTT86 ORG	R602	119-4731-15	1/10W 47k ohm	S603	013-6202-52	SKPMBJE010
D630	001-7109-90	SML-311DTT86 ORG	R603	-----	(NU)	S604	013-6202-52	SKPMBJE010
D631	001-7109-90	SML-311DTT86 ORG				S605	013-6202-52	SKPMBJE010
D632	001-7109-90	SML-311DTT86 ORG				S606	013-6202-52	SKPMBJE010
D633	001-7109-90	SML-311DTT86 ORG				TM601	073-0778-90	TERMINAL
D634	001-7109-90	SML-311DTT86 ORG				TM602	-----	(NU)
D635	001-7109-90	SML-311DTT86 ORG				TM603	-----	(NU)
						TM604	-----	(NU)
						PWB	039-3307-00	PWB(WITHOUT CO MPONENTS)

929-5004-83



NO.	PART NO.	DESCRIPTION	Q'TY
1	-----	LED PWB	1
2	-----	CD PWB	1
3	SMA-182-100	SPINDLE MOTOR-ASSY	1
4	SMA-183-100	SLED MOTOR-ASSY	1
5	345-5476-20	CUSHION RUBBER	1
6	620-1023-23	CLAMPER PLATE	1
7	620-1026-21	SPRING PLATE	1
8	620-1596-23	CLAMPER LINK	1
9	620-1862-20	UPPER CHASSIS	1
10	620-1752-20	SENSOR ARM	1
11	620-1753-20	ID-LOCK PLATE	1
12	620-1868-20	LOWER CHASSIS	1
13	621-0608-21	SECOND GEAR	1
14	621-0609-21	BASE GEAR	1
15	621-0610-21	IDLE GEAR A	1
16	621-0611-21	IDLE GEAR B	1
17	621-0612-22	ROLLER GEAR A	1
18	621-0620-20	THREAD GEAR A	1
19	621-0621-20	THREAD GEAR B	1
20	621-0623-24	LS-HOLDER	1
21	621-0624-22	GUIDE RAIL	1
22	621-0711-21	LOADING ROLLER	2
23	621-0718-21	ROLLER GUIDE	1
24	621-0719-20	ROLLER GEAR B	1
25	621-0720-20	ROLLER GEAR C	1
26	621-0721-20	ROLLER GEAR D	1
27	621-0728-20	STOPPER LINK	1
28	621-1719-21	IDLE CASE	1
29	621-1726-21	ROLLER SLEEVE	2
30	621-1729-21	SH-BASE	1
31	621-1742-20	UPPER GUIDE	1
32	621-1743-20	SHIFT LEVER	1
33	621-1744-20	RACK	1
34	621-1745-20	LOCK ARM L	1
35	621-1746-20	LOCK ARM R	1
36	621-1747-20	GEAR COVER	1
37	621-1748-20	POWER GEAR A	1
38	621-1749-20	POWER GEAR B	1
39	621-1750-20	POWER GEAR C	1

NO.	PART NO.	DESCRIPTION	Q'TY
40	621-1751-20	POWER GEAR D	1
41	621-1752-20	DISC STOPPER	1
42	621-1753-20	CLAMPER RING	1
43	621-1754-20	GEAR BASE	1
44	622-1571-21	ROLLER SHAFT	1
45	624-3059-00	LEAD SCREW	1
46	629-0086-20	DAMPER F	2
47	629-0087-20	DAMPER R	1
48	716-1507-01	SCREW(M2x3)	3
49	716-1670-01	SCREW(M2x4)	4
50	716-1733-01	SCREW(M1.7x2.3)	2
51	716-3469-01	SCREW(1.7x4)	2
52	716-3473-01	SCREW(M2x3)	1
53	716-3551-00	SCREW(M1.4x2.5)	2
54	750-7865-20	SHIFT SPRING	1
55	750-7866-20	RACK SPRING	1
56	750-7867-20	CLAMPER SPRING	1
57	750-7868-20	ID-LOCK SPRING	1
58	750-7869-20	SENSOR SPRING	1
59	750-7870-20	DR-SPRING F	2
60	750-7871-20	DR-SPRING RA	1
61	750-7872-20	DR-SPRING RB	1
62	750-7873-20	DR-SPRING C	1
63	750-6797-20	ROLLER SPRING L	1
64	750-6798-20	ROLLER SPRING R	1
65	714-2003-8B	SCREW(M2x3)	2
66	780-2025-00	SCREW(M2x2.5)	3
67	781-1730-00	SCREW(M1.7x3)	1
68	803-4906-60	VINYL-COAT-WIRE(ORG)	1
69	816-2542-01	FLAT WIRE	1
70	816-2590-00	VINYL-COAT-WIRE(GRN)	1
71	816-2591-00	VINYL-COAT-WIRE(YEL)	1
72	816-2592-00	VINYL-COAT-WIRE(BLUE)	1
73	816-2593-00	VINYL-COAT-WIRE(PUR)	1
74	966-1722-21	SH-RACK-ASSY	1
75	-----	DRIVE-PLT-ASSY	1
76	969-0075-30	PICKUP-ASSY	1
77	-----	DAMPER PIN	3

ELECTRICAL PARTS LIST

CD PWB(B1) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	168-1042-78	16V 0.1uF	C29	046-6822-58	6800pF	R5	033-0000-05	1/10W 0 ohm
C2	163-1073-35	16V 100uF	C30	168-1042-78	16V 0.1uF	R6	033-5621-15	1/10W 5.6k ohm
C4	178-1052-78	1uF	C31	046-4712-58	470pF	R7	033-4731-15	1/10W 47k ohm
C5	042-0560-85	6.3V 100uF	C32	046-4712-58	470pF	R8	033-3341-15	1/10W 330k ohm
C6	178-1052-78	1uF	C33	168-1042-78	16V 0.1uF	R9	033-2231-15	1/10W 22k ohm
C8	178-1052-78	1uF	C34	168-4732-78	16V 0.047uF	R10	033-2231-15	1/10W 22k ohm
C10	168-1042-78	16V 0.1uF	C35	168-4732-78	16V 0.047uF	R11	033-2731-15	1/10W 27k ohm
C11	168-1042-78	16V 0.1uF	C36	045-1007-50	10pF	R12	033-4731-15	1/10W 47k ohm
C12	045-4701-50	47pF	C37	045-1007-50	10pF	R13	033-2731-15	1/10W 27k ohm
C13	046-1532-78	0.015uF	C38	168-1042-78	16V 0.1uF	R14	033-1531-15	1/10W 15k ohm
C14	168-1042-78	16V 0.1uF	C39	046-5622-58	5600pF	R15	033-2731-15	1/10W 27k ohm
C15	046-1032-78	0.01uF	C40	168-1042-78	16V 0.1uF	R16	033-8231-15	1/10W 82k ohm
C17	046-4722-58	4700pF	CCT1	050-0140-63	1/32W 47k ohm x4J	R17	033-2731-15	1/10W 27k ohm
C18	046-1522-58	1500pF	D1	001-0367-91	1SS226	R18	033-8231-15	1/10W 82k ohm
C19	168-1042-78	16V 0.1uF	IC1	051-6079-90	BA5830FP-E2	R19	033-1051-15	1/10W 1M ohm
C20	168-1042-78	16V 0.1uF	IC2	051-6399-00	TC94A15FG	R20	119-2221-15	1/10W 2.2k ohm
C21	046-6812-58	680pF	J101	074-1228-79	29P	R22	119-0000-05	1/10W 0 ohm JW
C22	168-1042-78	16V 0.1uF	J201	074-1138-65	15P	TM1	073-0768-90	TERMINAL
C23	046-1532-78	0.015uF	J301	074-1138-60	10P	X2	061-3534-90	16.92MHz
C24	168-1042-78	16V 0.1uF	Q1	131-1188-50	2SB1188PQR	PWB	039-2845-21	PWB(WITHOUT COMPONENT)
C25	045-6801-50	68pF	R1	117-6811-15	1/8W 680 ohm			
C26	168-1042-78	16V 0.1uF	R2	117-1001-15	1/8W 10 ohm			
C27	046-3332-78	0.033uF	R3	033-2211-15	1/10W 220 ohm			

LED PWB(B2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D1	001-7058-90	AN1105W-RR	Q1	060-4015-91	PS1192HB	S2	013-7413-50	LIMIT
D2	001-7058-90	AN1105W-RR	Q2	060-4015-91	PS1192HB	PWB	039-1944-21	PWB(WITHOUT COMPONENT)
J1	074-1138-60	10P	S1	013-7414-50	CHUCKING			

BLOCK DIAGRAM

