


9. EXPLODED VIEWS AND PARTS LIST

- NOTES:
- Parts marked by “NSP” are generally unavailable because they are not in our Master Spare Parts List.
 - The $\triangle$ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
 - Screws adjacent to ∇ mark on product are used for disassembly.
 - For the applying amount of lubricants or glue, follow the instructions in this manual.
(In the case of no amount instructions, apply as you think it appropriate.)

9.1 PACKING SECTION

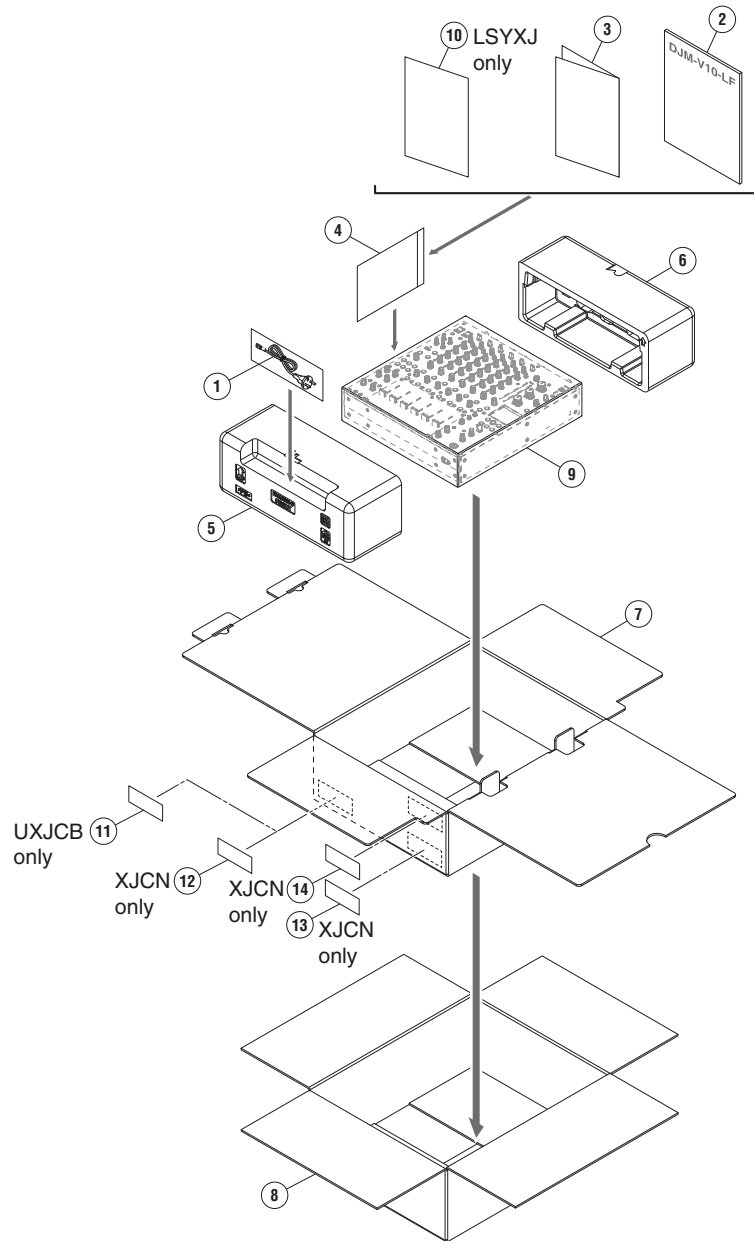

(1) PACKING SECTION PARTS LIST

<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>	<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
⚠	1 Power cord	See Contrast table (2)	11	Label	See Contrast table (2)
	2 Quick Start Guide	See Contrast table (2)	12	Label	See Contrast table (2)
	3 Precautions for Use	See Contrast table (2)	NSP 13	Label	See Contrast table (2)
NSP	4 Polyethylene Bag	AHG7117	NSP 14	Label	See Contrast table (2)
	5 Packing Pad	DHA2001			
	6 Packing Pad	DHA2002			
	7 Packing Case	DHG3788			
	8 Master Carton	See Contrast table (2)			
	9 Mirror Mat (1200*1000)	DHL1169			
NSP	10 Warranty	See Contrast table (2)			

(2) CONTRAST TABLE

DJM-V10-LF/LSYXJ, UXJCB and XJCN are constructed the same except for the following:

Mark	No.	Symbol and Description	DJM-V10-LF/LSYXJ	DJM-V10-LF/UXJCB	DJM-V10-LF/XJCN
⚠	1	Power Cord	DDG1124	DDG1123	DDG1125
	2	Quick Start Guide	DRH1605	DRH1605	DRH1606
	3	Precautions for Use	DRH1619	DRH1619	DRH1620
	8	Master Carton	DHG3789	DHG3790	DHG3792
NSP	10	Warranty	DRY1274	Not used	Not used
	11	Label	Not used	DRW2958	Not used
	12	Label	Not used	Not used	DRW2960
NSP	13	Label	Not used	Not used	DRW2961
NSP	14	Label	Not used	Not used	DRW2842


(1) EXTERIOR SECTION PARTS LIST

	<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>		<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
A	1	HPJC Assy	DWX4339		31	Knob	DAA1420
	2	RCA Plug	DKM1026		32	Panel	DAH3281
	3	Stay	DNG1123		33	Panel	DAH3282
	4	SW Packing (EF)	DEC2929	⚠	34	Panel	DNK6875
	5	Sheet	DEC3937		35	Lid	DNK6550
B	6	Sheet	DEC3940		36	Panel	DNK6887
	7	Sheet	DEC3941		37	Lid	DNK6652
	8	Sheet	DEC3942		38	Panel	DNK6876
	9	Sheet	DEC3943		39	Holder	DNK6549
	10	Sheet	DEC3944		40	Panel	DAH3304
C	11	Sheet	DEC3945		41	Packing	DEC3958
	12	Sheet	DEC3946		42	Control Panel	DNB1282
	13	Sheet	DEC3947		43	Lens	DNK4532
	14	Knob	DAA1434		44	Lens	DNK6877
	15	Knob	DAA1419		45	DS Tape	DEH1110
D	16	Plate	DNG1133		46	Lens	DNK6516
	17	Rotary Knob Low (BN)	DAA1265		47	Holder	DNK6552
	18	Knob/RSW	DAA1307	NSP	48	Label	See Contrast table (2)
	19	Knob	DAA1418	NSP	49	Name Label	See Contrast table (2)
	20	Rotary SW Knob (C)	DAA1180	NSP	50	Label	See Contrast table (2)
E	21	Knob	DAA1435		51	Nut M12	DBN1018
	22	Knob	DAA1417		52	Screw 3*8 (FE)	DBA1290
	23	Select Knob	DAA1205		53	Screw	DBA1451
	24	Slider Knob 2	DAC2685		54	Screw	BBZ30P060FTB
	25	Knob	DAC3539		55	Screw	BBZ30P060FTC
F	26	Slider Knob Stopper	DNK5888		56	Screw	BPZ220P060FTC
	27	•••••			57	Screw	BPZ30P080FNI
	28	•••••					
	29	Knob	DAA1415				
	30	Knob	DAA1416				

(2) CONTRAST TABLE

DJM-V10-LF/LSYXJ, UXJCB and XJCN are constructed the same except for the following:


Mark	No.	Symbol and Description	DJM-V10-LF/LSYXJ	DJM-V10-LF/UXJCB	DJM-V10-LF/XJCN
E	48	Label	Not used	DRW1975	Not used
	49	Name Label	DAL1368	DAL1369	DAL1371
	50	Label	DRW2995	Not used	Not used

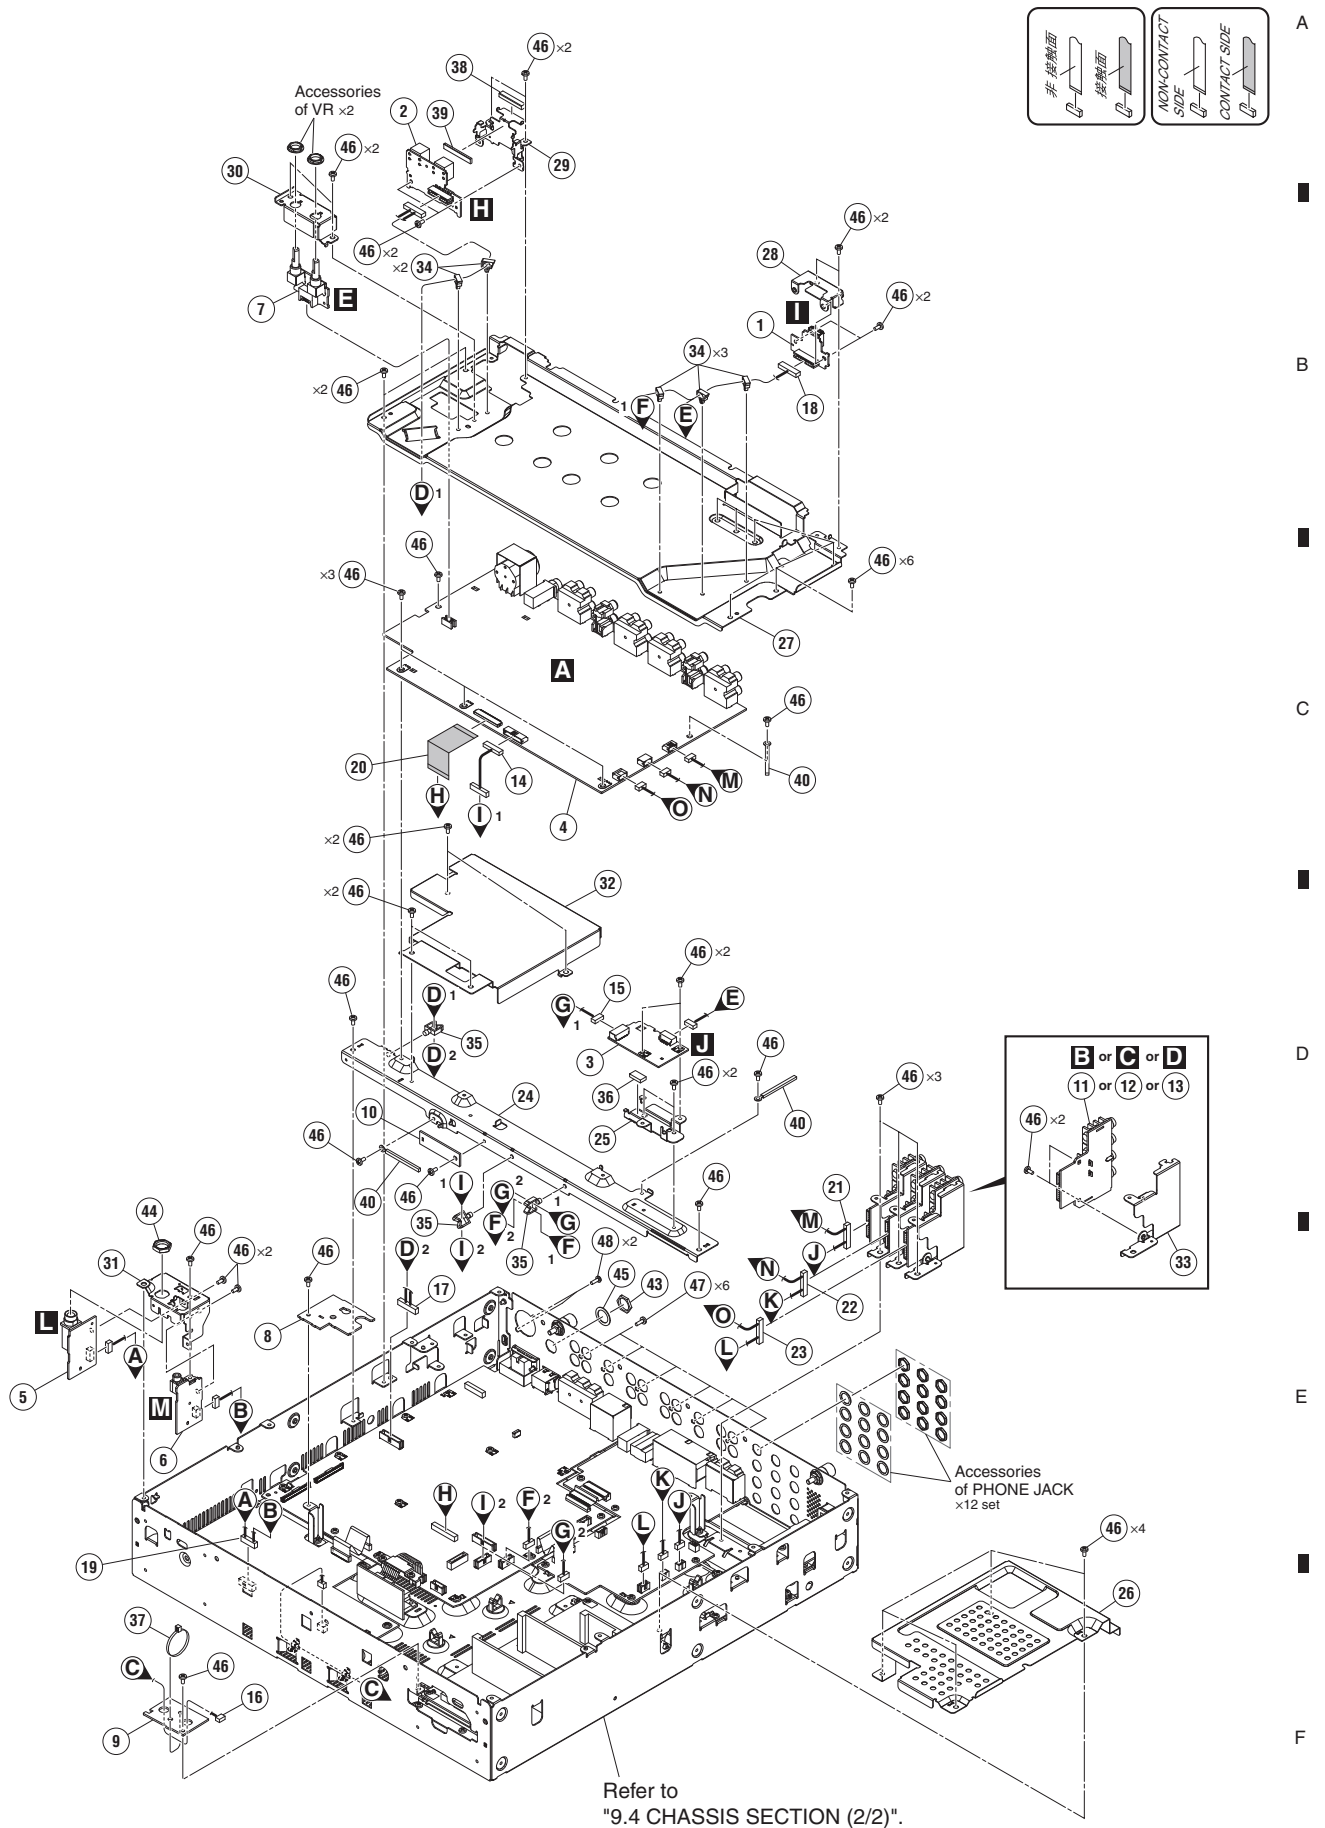

CHASSIS SECTION (1/2) PARTS LIST

<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
A	1 USBA Assy	DWX4332
	2 USBB Assy	DWX4333
	3 USBP Assy	DWX4334
	4 AIN Assy	DWX4364
	5 HPJK Assy	DWX4337
	6 HPJM Assy	DWX4338
	7 MTRM Assy	DWX4348
	8 FGP2 Assy	DWX4349
	9 CCB1 Assy	DWX4410
	10 FGP1 Assy	DWX4395
B	11 SNRT1 Assy	DWX4355
	12 SNRT2 Assy	DWX4356
	13 SNRT3 Assy	DWX4357
	14 Crimp Connector	PF10PP-D07
	15 Crimp Connector	PF06PP-S15
	16 Connector Assy	PF03PP-D30
	17 Shielded Conn-Cable	DDA1095
	18 Shielded Conn-Cable	DDA1096
	19 Shielded Conn-Cable	DDA1061
	20 FFC	DDD1956
C	21 Shielded Conn-Cable	DDA1097
	22 Shielded Conn-Cable	DDA1098
	23 Shielded Conn-Cable	DDA1099
	24 Stay	DNG1120
	25 Stay	DNF1951
	26 Cover	DNF2066
	27 Shield Plate	DNG1119
	28 Stay	DNG1125
	29 Stay	DNF2069
	30 Stay	DNF1958
	31 Stay	DNG1122
	32 Shield Plate	DNG1140
	33 Shield Case	DNG1127
	34 Locking Mini Clamp	DEC2439
	35 Holder	VEC1355
	36 Sheet	DEC3621
	37 Cable Tie	ZCA-SKB90BK
	38 EMC Gasket	DEC3637
	39 EMC Gasket	DEC3638
	40 Cord Clamper (Steel)	DEX1025
	41 •••••	
	42 •••••	
	43 Nut (M12)	NKX2FNI
	44 Nut M12	DBN1018
	45 Washer	DEC2920
F	46 Screw	BBZ30P060FTC
	47 Screw	BPZ30P080FTB
	48 Screw	PPZ30P080FTB

9.4 CHASSIS SECTION (2/2)

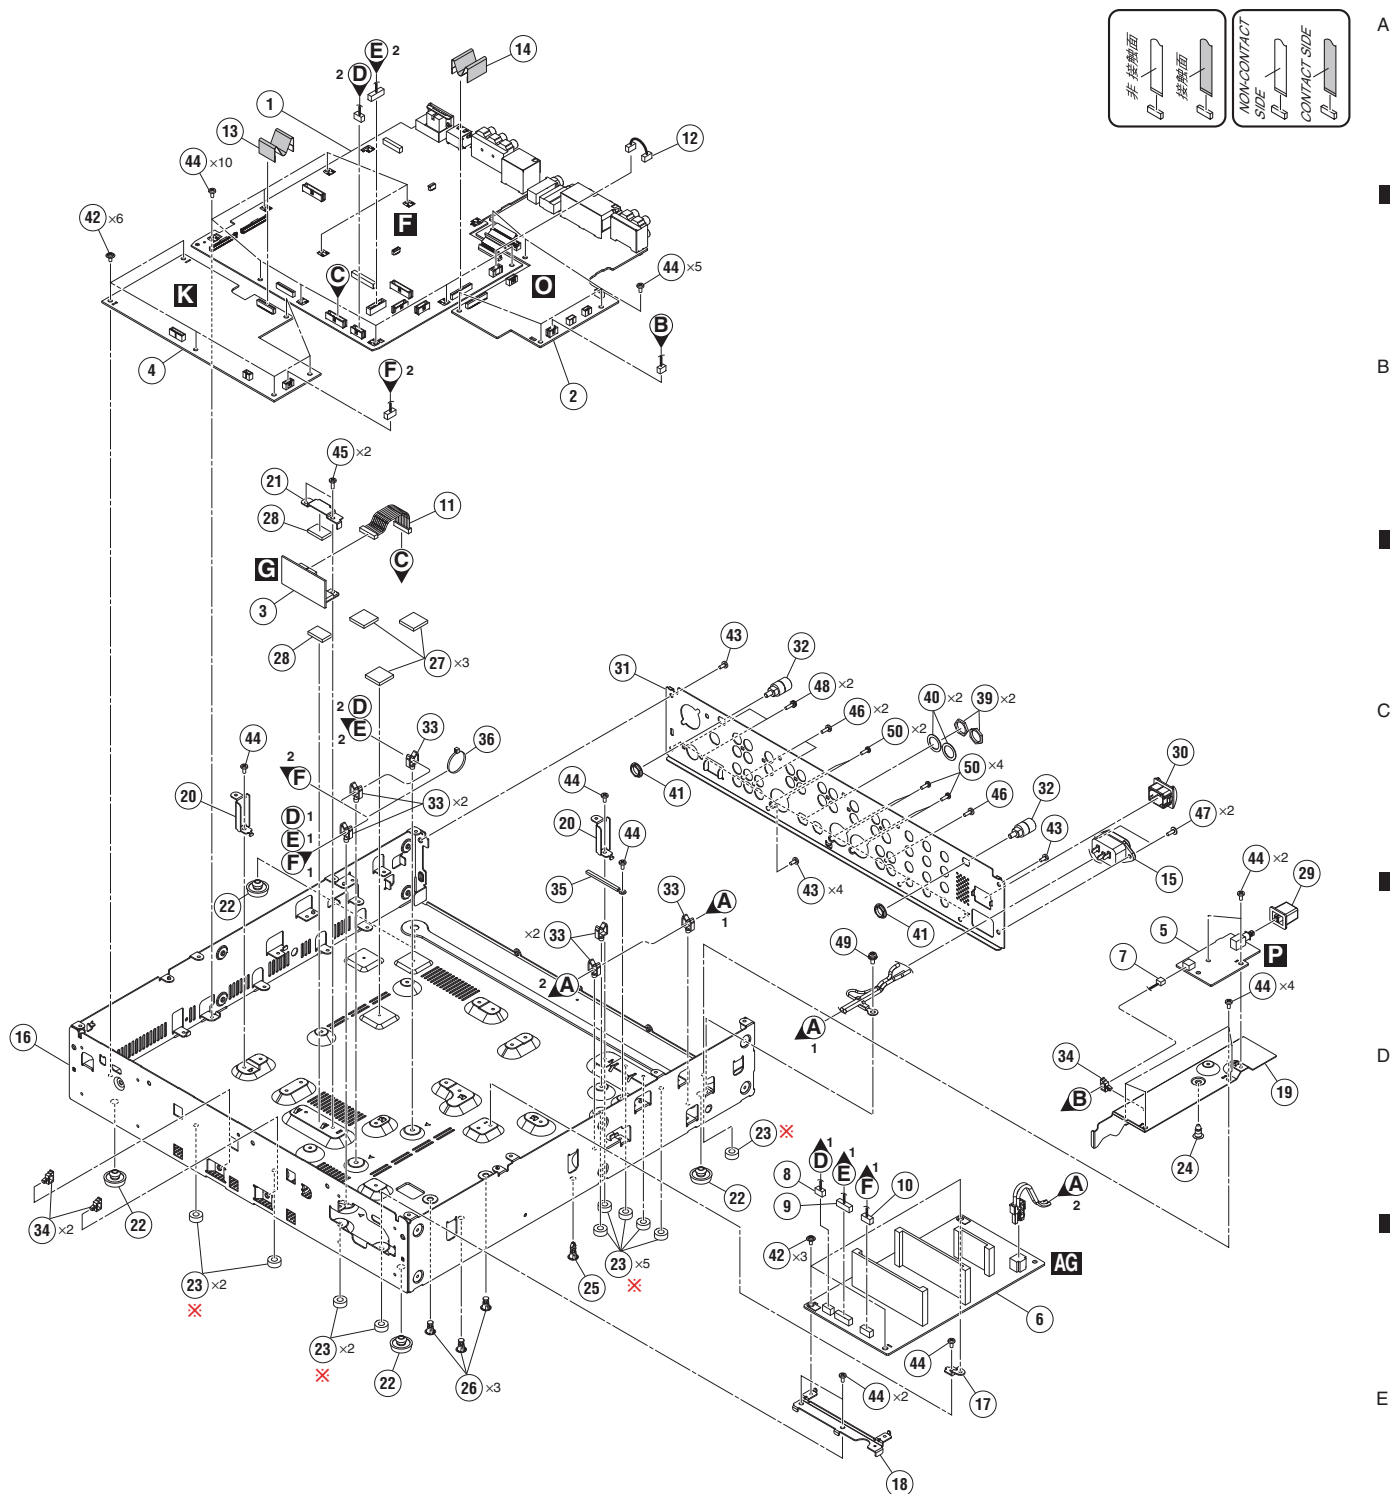


Note ✕ :
AEB7092 is nonreusable
to fix it with DS tape.

注意 ✕ :
AEB7092は両面テープで固定のため
再利用不可です。

CHASSIS SECTION (2/2) PARTS LIST

	<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>	<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
A	1	MAIN Assy	DWX4331	46	Screw	BPZ30P080FTB
	2	AOUT Assy	DWX4336	47	Screw	IBZ30P080FTB
	3	REGB Assy	DWX4366	48	Screw	PMH30P100FTB
	4	HPPW Assy	DWX4344	49	Screw	PMH40P080FTC
	5	PSWB Assy	DWX4350	50	Screw	PPZ30P080FTB
B	⚠ 6	SW POWER SUPPLY	DWR1581			
	7	Connector Assy	PF03PP4B12			
	8	Crimp Connector	PF05PP-S30			
	9	Crimp Connector	PF08PP-S30			
	10	Crimp Connector	PF04PP-S15			
B	11	Crimp Connector	PF09PP-S07			
	12	Connector Assy	PF04PP-D05			
	13	FFC	DDD1955			
	14	FFC	DDD1957			
	⚠ 15	AC Inlet	DKP3992			
NSP	16	Chassis	DNA1476			
	17	PCB Stay (FE)	VNE2489			
	18	Stay	DNG1129			
	19	Shield Case	DNG1121			
	20	Stay	DNG1126			
NSP	21	Cover	DNG1138			
	22	Foot (Rubber)	REC-434			
	23	Spacer	AEB7092			
	24	PCB Holder	PNW1706			
	25	Spacer	DEC3850			
D	26	Spacer	DEC3878			
	27	Sheet	DEC3618			
	28	Sheet	DEC3901			
	29	Power Knob	DAC2306			
	30	Power Knob Guard	DNK4534			
E	31	Rear Panel	DNC2139			
	32	Earth Terminal	DKE1019			
	33	Holder	VEC1355			
	34	Locking Mini Clamp	DEC2439			
	35	Cord Clamper (Steel)	DEX1025			
E	36	Cable Tie	ZCA-SKB90BK			
	37	•••••				
	38	•••••				
	39	Nut (M12)	NKX2FNI			
	40	Washer	DEC2920			
F	41	Flange Nut M9	DBN1008			
	42	Screw	ABZ30P060FTC			
	43	Screw	BBZ30P060FTB			
	44	Screw	BBZ30P060FTC			
	45	Screw	BBZ30P080FTB			

9.5 CONTROL PANEL SECTION (1/3)




● Channel Fader Section


Refer to "7. DISASSEMBLY"



Lubricating oil
(GEM1107)

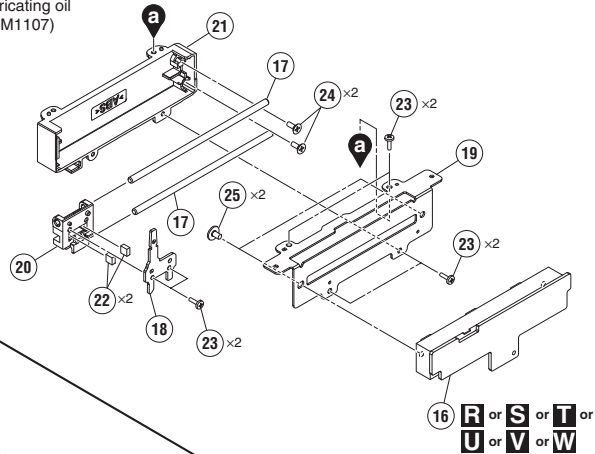

See
"● Channel Fader Section".

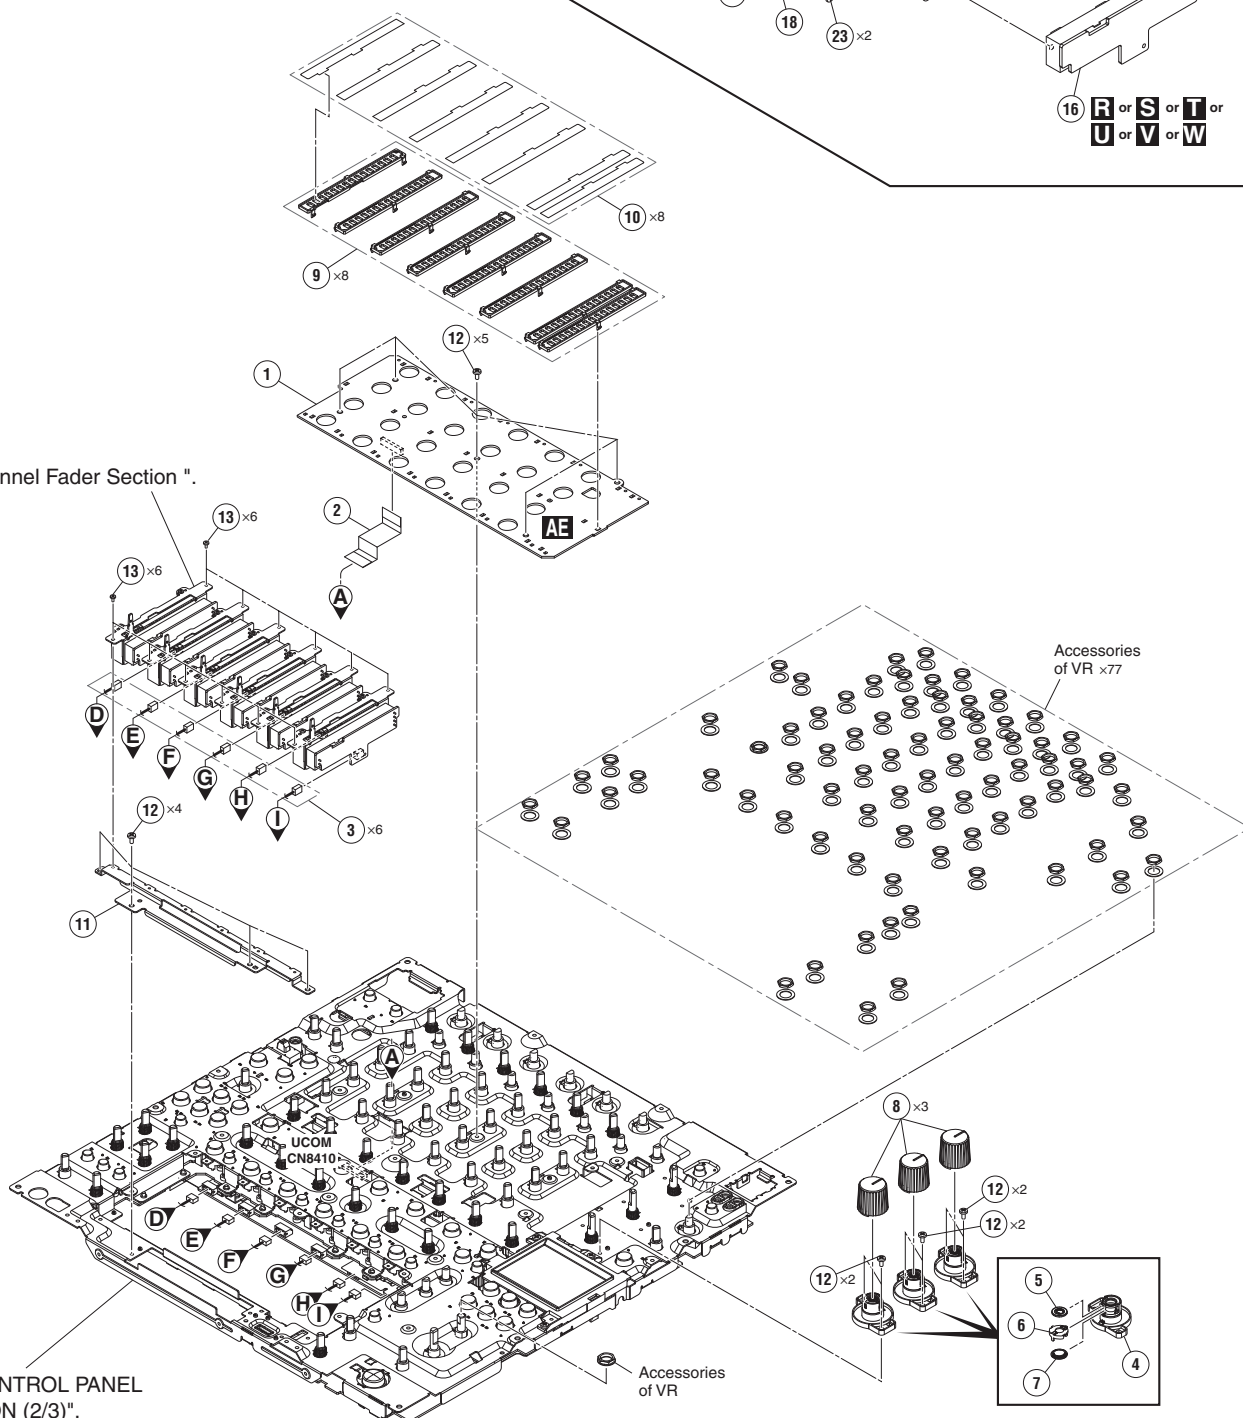

Refer to
"9.6 CONTROL PANEL
SECTION (2/3)".

CONTROL PANEL SECTION (1/3) PARTS LIST

Mark No.	Description	Part No.
A	1 LEDB Assy	DWX4342
	2 FFC	DDD1961
	3 Connector Assy	PF04PP-B12
	4 Holder	DNK6880
	5 Ring/TRQ	DNK6116
	6 Base/TRQ	DNK6068
	7 Spring/TRQ	DBH1792
	8 Knob/ELA	DAA1295
	9 Holder	DNK6878
	10 Sheet	DEC3885
B	11 Stay	DND1315
	12 Screw	BBZ30P060FTC
	13 Screw	BSZ20P040FTB
	14 •••••	
	15 •••••	
Channel Fader Section		
C	16 FADB Assy	DWX4512
	17 Shaft	DLA2280
	18 Lever	DNH3448
	19 Stay	DNG1139
	20 Slider	DNK6913
	21 Holder	DNK6916
	22 Cushion	DEC3975
	23 Screw	BPZ20P060FTC
	24 Screw	CPZ26P080FTC
	25 Screw	IMZ30P040FTC


D

E

F

9.6 CONTROL PANEL SECTION (2/3)


- Bottom view

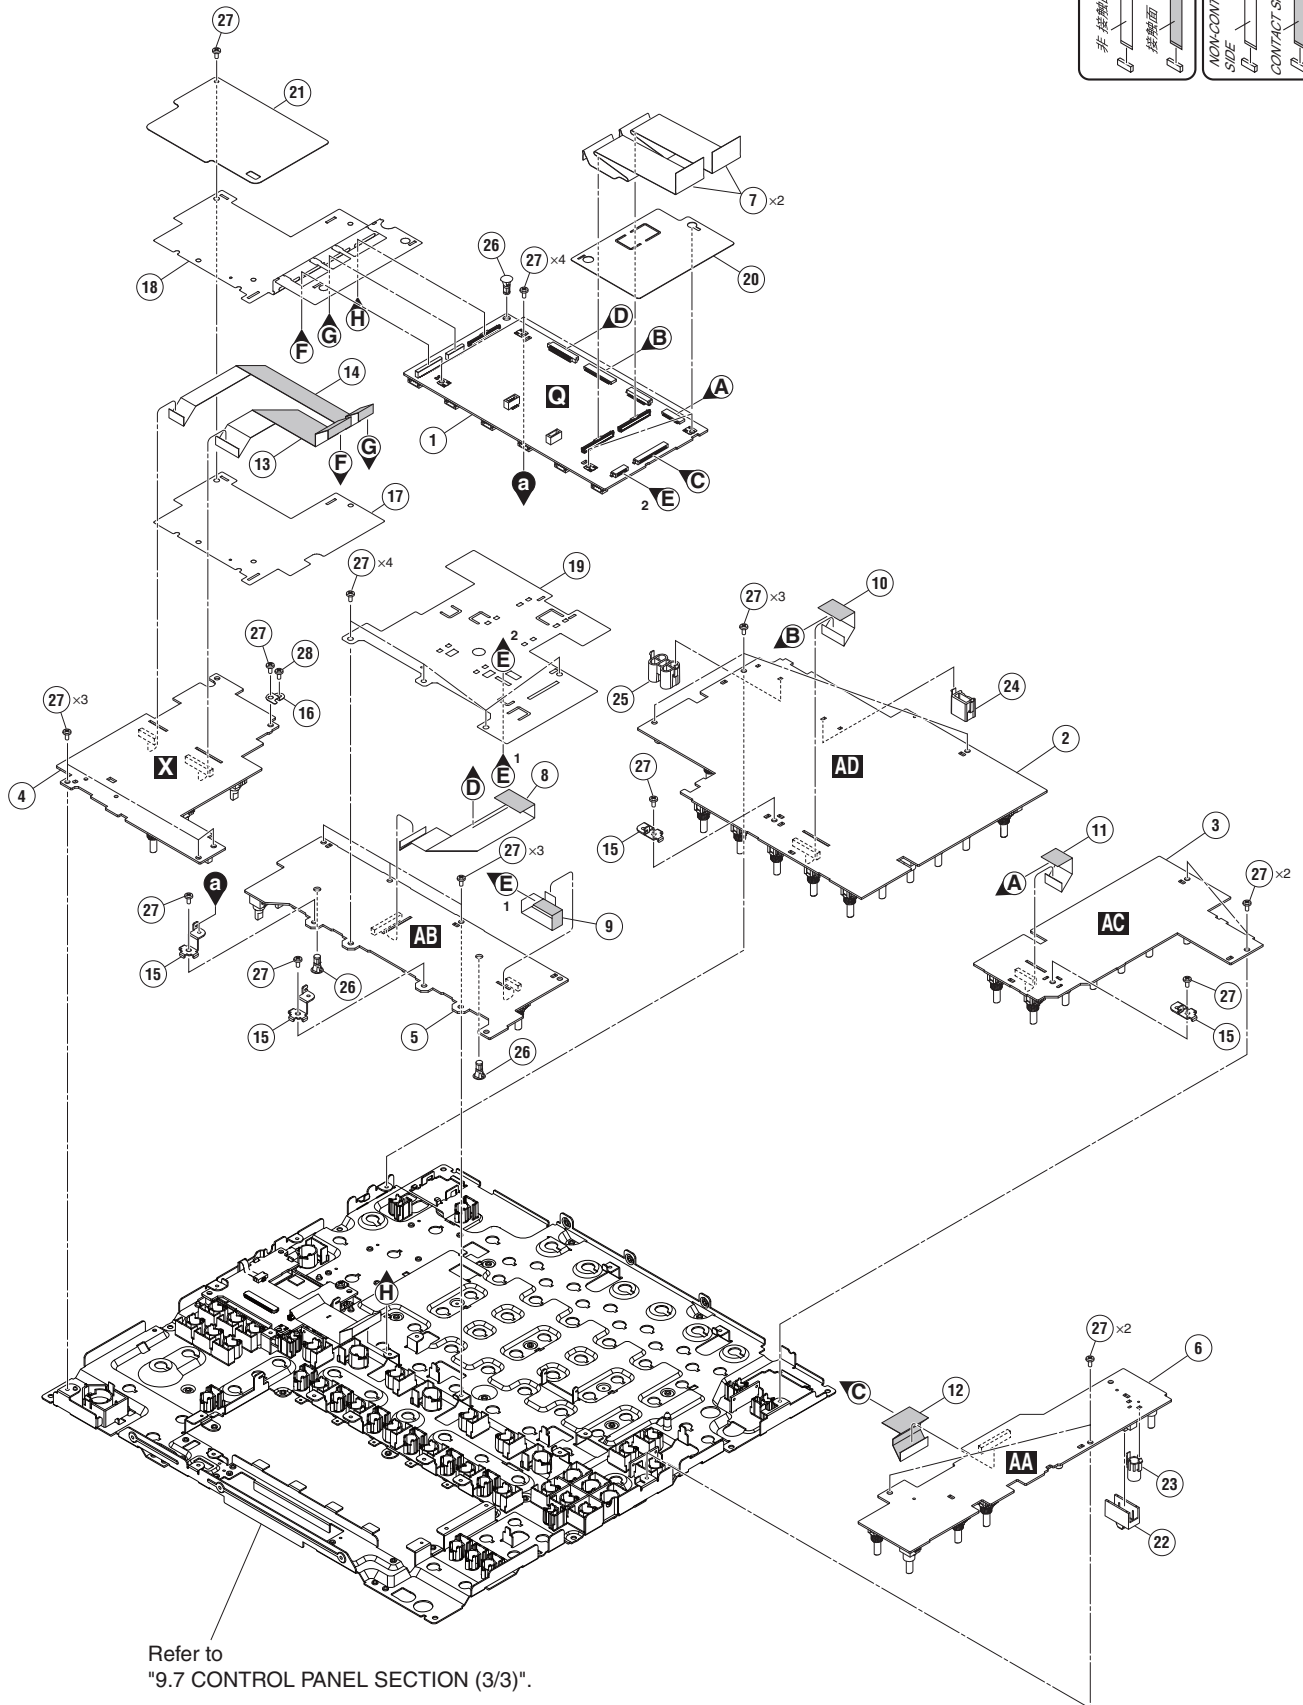

CONTROL PANEL SECTION (2/3) PARTS LIST

<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
A	1 UCOM Assy	DWX4341
	2 PNL R Assy	DWX4345
	3 PNLL Assy	DWX4346
	4 BFXB Assy	DWX4352
	5 CUEVR Assy	DWX4347
	6 SFXB Assy	DWX4351
	7 FFC	DDD1958
	8 FFC	DDD1959
	9 FFC	DDD1960
	10 FFC	DDD1962
B	11 FFC	DDD1963
	12 FFC	DDD1965
	13 FFC	DDD1966
	14 FFC	DDD1967
	15 Stay	DND1313
	16 Plate	DNG1137
	17 Barrier	DEC3860
	18 Barrier	DEC3861
	19 Barrier	DEC3862
	20 Barrier	DEC3890
C	21 Barrier	DEC3929
	22 Cap	DAC3136
	23 Holder	DNK6930
	24 Holder	DNK6511
	25 Holder	DNK6879
	26 Spacer	DEC3880
	27 Screw	BBZ30P060FTC
	28 Screw	BPZ30P100FTB

•The position of the divided parts / 分割部品の取り付け位置

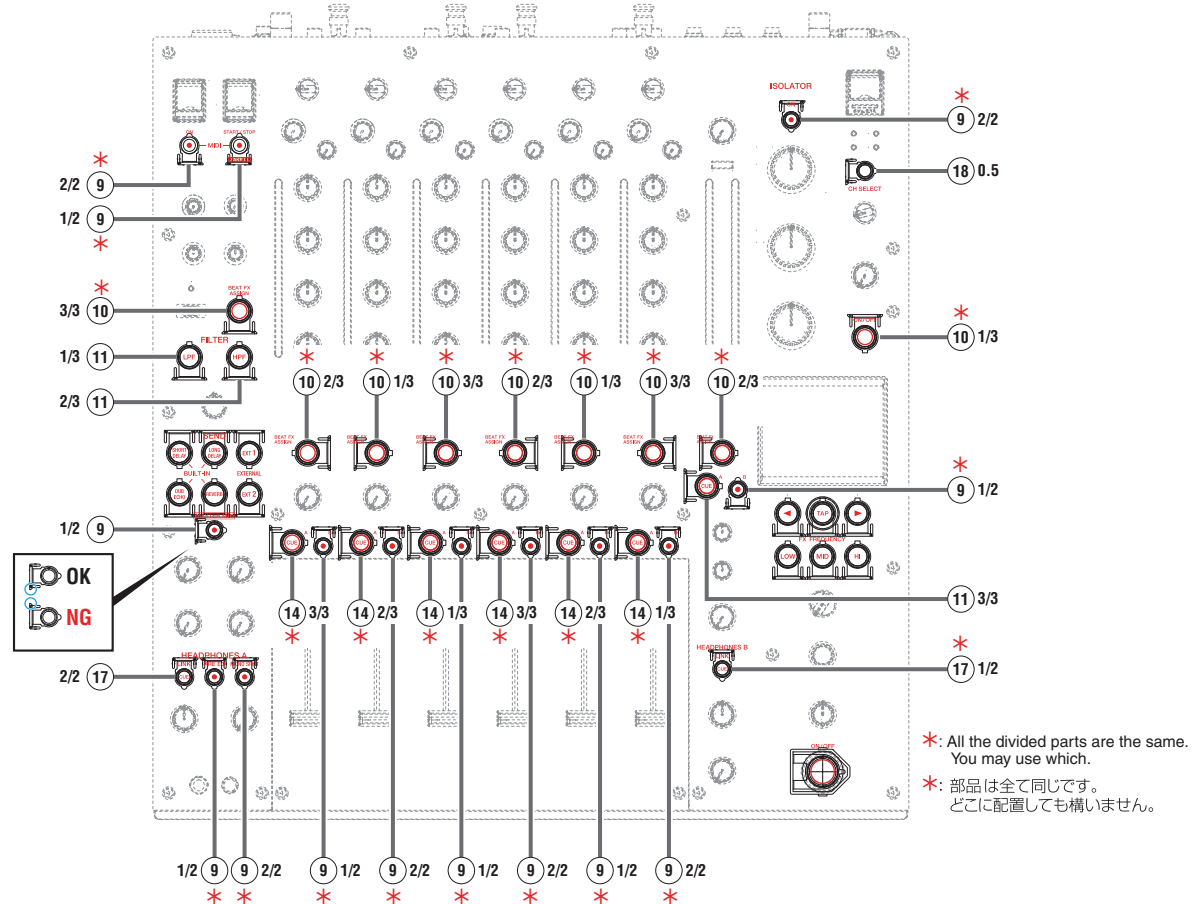

CONTROL PANEL SECTION (3/3) PARTS LIST

Mark No.	Description	Part No.	Mark No.	Description	Part No.
1	SHADE1 Assy	DWX4389	21	Screw	BBZ30P060FTC
2	SHADE2 Assy	DWX4390	22		
3	SHADE3 Assy	DWX4391	LCD Section		
4	SHADE4 Assy	DWX4392	23	LCDB Assy	DWX4343
5	SHADE5 Assy	DWX4393	24	Touch Panel	DSX1147
6	SHADE6 Assy	DWX4394	25	TFT LCD	DWX4228
7	Stay	DND1311	26	Panel	DNK6882
8	Spacer	AEC1065	27	Cushion	DEC3933
9	Button	DAC3491	28	Cushion	DEC3854
10	Button	DAC3492	29	Cushion	DEC3858
11	Button	DAC3493	30	Stay	DND1314
12	Button	DAC3494	31	Cushion	DEC3926
13	Button	DAC3495	32	Cushion	DEC3934
14	Button	DAC3496	33	Screw	BPZ30P100FTB
15	Button	DAC3497			
16	Button	DAC3498			
17	Button	DAC3499			
18	Button	DAC3500			
19	Button	DAC3501			
20	FFC	DDD1964			

12. PCB PARTS LIST

- NOTES: ● Parts marked by “NSP” are generally unavailable because they are not in our Master Spare Parts List.
 ● The Δ mark found on some component parts indicates the importance of the safety factor of the part.
 Therefore, when replacing, be sure to use parts of identical designation.

- When ordering resistors, first convert resistance values into code form as shown in the following examples.

Ex.1 When there are 2 effective digits (any digit apart from 0), such as 560 ohm and 47 k ohm (tolerance is shown by J = 5%, and K = 10%).

560 Ω — 56×10^1 — 561 RD1/APU $\boxed{5}$ $\boxed{6}$ $\boxed{J}$ J
 47 k Ω — 47×10^3 — 473 RD1/APU $\boxed{4}$ $\boxed{7}$ $\boxed{K}$ K
 0.5 Ω — R50 RN2H $\boxed{R}$ $\boxed{5}$ $\boxed{0}$ K
 1 Ω — 1R0 RSIP $\boxed{1}$ $\boxed{R}$ $\boxed{0}$ K

Ex.2 When there are 3 effective digits (such as in high precision metal film resistors).

5.62 k Ω — 562×10^1 — 5621 RN1/4PC $\boxed{5}$ $\boxed{6}$ $\boxed{2}$ $\boxed{J}$ F

Mark No. Description Part No.

LIST OF ASSEMBLIES

NSP 1..MOTHER ASSY DWM2730
 2..MAIN ASSY DWX4331
 2..USBA ASSY DWX4332
 2..USBB ASSY DWX4333
 2..USBP ASSY DWX4334

NSP 1..AINB ASSY DWM2778
 2..AIN ASSY DWX4364
 2..REGB ASSY DWX4366

NSP 1..AOUTB ASSY DWM2731
 2..AOUT ASSY DWX4336
 2..HPJK ASSY DWX4337
 2..HPJM ASSY DWX4338
 2..HPJC ASSY DWX4339

2..HPPW ASSY DWX4344
 2..MTRM ASSY DWX4348
 2..FGP2 ASSY DWX4349

NSP 1..SUB ASSY DWM2779
 2..UCOM ASSY DWX4341
 2..LEDB ASSY DWX4342
 2..LCDB ASSY DWX4343
 2..CCB1 ASSY DWX4410

1..PNLR ASSY DWX4345

NSP 1..PNL2 ASSY DWM2733
 2..PNLL ASSY DWX4346
 2..BFXB ASSY DWX4352
 2..PSWB ASSY DWX4350
 2..SNRT1 ASSY DWX4355

2..SNRT2 ASSY DWX4356
 2..SNRT3 ASSY DWX4357
 2..SHADE1 ASSY DWX4389
 2..SHADE2 ASSY DWX4390
 2..SHADE3 ASSY DWX4391

2..SHADE4 ASSY DWX4392
 2..SHADE5 ASSY DWX4393
 2..SHADE6 ASSY DWX4394

NSP 1..PNL3 ASSY DWM2780
 2..CUEVR ASSY DWX4347
 2..SFXB ASSY DWX4351
 2..FGP1 ASSY DWX4395

1..FADB ASSY DWX4512

Δ 1..SW POWER SUPPLY DWR1581

Mark No. Description Part No.

AINB ASSY

Consists of

AIN ASSY

REGB ASSY

CRFSW ASSY



AINB ASSY

SEMICONDUCTORS

IC 4001,4003-4007 TC7SH08FUS2
 IC 4002 TC7SZ08FUS2
 Δ IC 4008 MM3571A33P
 IC 4101-4107,4201-4205 LME49723MA
 IC 4108,4206,4308,4408 NJM8080RB1S1

IC 4301-4307,4401-4407 LME49723MA
 IC 4501-4505,4601-4607 LME49723MA
 IC 4506,4608 NJM8080RB1S1
 IC 4701 AK5578EN
 IC 4801 AK5574EN

IC 4901,5001,5101 NJM2068MD
 IC 4902,5002,5102 PCM1803ADB
 IC 5201,5202 NJM4580MD
 IC 5203 AK5358AET
 Δ IC 5351 NJM7805FA

Δ IC 5352 LM7915CT@V
 Δ IC 5353 NJM7815FA
 Q 4101,4102,4301,4302 HN1C01FUS1
 Q 4103,4104,4303,4304 2SK3320
 Q 4105,4305,4405,4605 LSCR523UB

Q 4401,4402,4601,4602 HN1C01FUS1
 Q 4403,4404,4603,4604 2SK3320
 Q 5201-5204 2SK209
 D 4101-4104,4201,4202 DF2B18FU
 D 4105,4305,4405,4605 1SS355L@V

D 4105,4305,4405,4605 1SS355VM
 D 4106-4109,4203-4206 RB548W
 D 4301-4304,4401-4404 DF2B18FU
 D 4306-4309,4406-4409 RB548W
 D 4501,4502,4601-4604 DF2B18FU

D 4503-4506,4606-4609 RB548W
 D 4901,4902,5001,5002 RB548W
 D 5101,5102 RB548W
 D 5201-5204,5354-5356 RB501VM-40

MISCELLANEOUS

L 5201,5202 CHIP SOLID INDUCTOR XTL3010
 JA 4101,4301,4401,4601 RCA JACK/4P DKB1112

Mark	No.	Description	Part No.	Mark	No.	Description	Part No.
A		JA 4201,4501 RCA JACK	DKB1119	R	4412,4608,4609,4612		RN1/16SE4700D
		JA 5201 XLR SOCKET	DKB1124				
		JA 5202 HEADPHONE JACK	DKN1622	R	4413,4414,4613,4614		RN1/16SE1201D
				R	4416,4418,4616,4618		RN1/16SE6800D
		KN 4001-4003 EARTH TERMINAL	AKF7002	R	4419,4420,4423,4424		RN1/16SE2201D
		RY 4101,4301,4401,4601 RELAY	DSR1023	R	4421,4422,4503,4504		RS1/10SR4702D
		CN 4001 FFC/FPC CONNECTOR	CKS6645	R	4425,4426,4625,4626		RS1/10SR7502D
		CN 4002 L-PLUG(10P)	KM200NA10L				
		CN 4003 L-PLUG(4P)	KM200NA4L	R	4427,4428,4627,4628		RS1/10SR6801D
				R	4429,4430,4629,4630		RS1/10SR7500D
B		CN 4004 PLUG(4P)	KM200NA4LR	R	4433,4434,4633,4634		RS1/10SR1201D
		CN 4005 PLUG(4P)	KM200NA4LE	R	4435,4436,4635,4636		RS1/10SR3901D
		CN 5201 CONNECTOR	CKS3561	R	4441,4442,4447,4449		RS1/10SR2201D
		CN 5351 PLUG(9P)	KM200NA9				
		1001 SHIELD CASE	DNF1947	R	4443,4444,4448,4450		RS1/10SR1500D
				R	4451,4452,4457-4460		RS1/10SR4701D
		VA 5201-5204 VARISTORS	EZJZ1V270RM	R	4501,4502,4603,4604		RS1/10SR101J
				R	4507,4508,4513,4515		RS1/10SR2201D
				R	4509,4510,4514,4516		RS1/10SR1500D
RESISTORS				R	4511,4512,4517,4518		RS1/10SR4701D
	R	4004,4005,4101,4102	RN1/16SE1000D	R	4519,4521,4653,4655		RS1/10SR1101D
	R	4103,4104,4201,4202	RS1/10SR101J	R	4520,4522,4654,4656		RS1/10SR75R0D
	R	4106,4306,4406,4606	RS1/10SR202J	R	4523-4526,4645,4646		RS1/10SR4701D
	R	4107,4175,4307,4375	RS1/10SR122J	R	4527-4530,4661-4664		RS1/10SR3001D
	R	4108,4109,4112,4308	RN1/16SE4700D				
C	R	4110,4111,4121,4122	RS1/10SR4702D	R	4531-4534,4665-4668		RS1/10SR6800D
	R	4113,4114,4313,4314	RN1/16SE1201D	R	4535-4538,4669-4672		RS1/10SR221J
	R	4116,4118,4316,4318	RN1/16SE6800D	R	4539,4540,4673,4674		RS1/16SS1002D
	R	4119,4120,4123,4124	RN1/16SE2201D	R	4601,4602		RN1/16SE1000D
	R	4125,4126,4325,4326	RS1/10SR7502D	R	4610,4611,4621,4622		RS1/10SR4702D
	R	4127,4128,4327,4328	RS1/10SR6801D	R	4619,4620,4623,4624		RN1/16SE2201D
	R	4129,4130,4329,4330	RS1/10SR7500D	R	4641,4642,4647,4649		RS1/10SR2201D
	R	4133,4134,4333,4334	RS1/10SR1201D	R	4643,4644,4648,4650		RS1/10SR1500D
	R	4135,4136,4335,4336	RS1/10SR3901D	R	4651,4652,4657-4660		RS1/10SR4701D
D	R	4141,4142,4147,4149	RS1/10SR2201D	R	4701,4801		RS1/10SR0R0J
	R	4143,4144,4148,4150	RS1/10SR1500D	R	4705,4706,4710,4713		RS1/10SR220J
	R	4145,4146,4151,4152	RS1/10SR4701D	R	4707		RAB4CQ470J
	R	4153,4155,4219,4221	RS1/10SR1101D	R	4805,4810		RS1/10SR220J
	R	4154,4156,4220,4222	RS1/10SR75R0D	R	4901,4902,5001,5002		RS1/10SR4702D
	R	4157-4160,4211,4212	RS1/10SR4701D	R	4903,4904,5003,5004		RS1/10SR3301D
	R	4161-4164,4227-4230	RS1/10SR3001D	R	4905,4906,5005,5006		RS1/10SR1801D
	R	4165-4168,4231-4234	RS1/10SR6800D	R	5101,5102		RS1/10SR4702D
E	R	4169-4172,4235-4238	RS1/10SR221J	R	5103,5104,5209-5214		RS1/10SR3301D
	R	4173,4174,4239,4240	RS1/16SS1002D	R	5105,5106,5231,5232		RS1/10SR1801D
	R	4203,4204,4310,4311	RS1/10SR4702D	R	5201-5208		RS1/10SR101J
	R	4207,4208,4213,4215	RS1/10SR2201D	R	5215,5217,5221,5222		RG1608P152D@V
	R	4209,4210,4214,4216	RS1/10SR1500D	R	5215,5217,5221,5222		RT0603DRD071K5L@V
	R	4217,4218,4223-4226	RS1/10SR4701D	R	5216,5218,5224,5226		RG1608P472D@V
	R	4301,4302,4401,4402	RN1/16SE1000D	R	5216,5218,5224,5226		RT0603DRD074K7L@V
	R	4303,4304,4403,4404	RS1/10SR101J	R	5219,5220		RS1/10SR8200D
F	R	4309,4312,4408,4409	RN1/16SE4700D	R	5227,5228		RS1/10SR3301D
	R	4319,4320,4323,4324	RN1/16SE2201D	R	5233,5234		RS1/10SR1602D
	R	4321,4322,4410,4411	RS1/10SR4702D	R	5235,5236		RS1/10SR2200D
	R	4341,4342,4347,4349	RS1/10SR2201D	R	5238		RAB4CQ103J
	R	4343,4344,4348,4350	RS1/10SR1500D	Other Resistors			RS1/16SS###J
	R	4345,4346,4351,4352	RS1/10SR4701D	CAPACITORS			
	R	4353,4355,4453,4455	RS1/10SR1101D	C	4002,4127,4128,4327(0.1 uF)		DCE1031
	R	4354,4356,4454,4456	RS1/10SR75R0D	C	4003,4005-4009,4011		CKSSYB104K16
	R	4357-4360,4445,4446	RS1/10SR4701D	C	4004,4015,4019,4024 (1 uF)		CCG1325
	R	4361-4364,4461-4464	RS1/10SR3001D	C	4010,4103,4104		CCSSCH102J50
F	R	4365-4368,4465-4468	RS1/10SR6800D	C	4012,4153,4231,4353		CEAT220M50
	R	4369-4372,4469-4472	RS1/10SR221J				
	R	4373,4374,4473,4474	RS1/16SS1002D	C	4013,4018,4909,4910		CKSSYB104K16
	R	4407,4475,4607,4675	RS1/10SR122J	C	4016,4021,4022,4123 (100 uF/25 V)		DCH1357

Mark	No.	Description	Part No.	Mark	No.	Description	Part No.
	C	4023,5352,5353 (2.2 uF)	DCG1065		C	4719,4721,4723,4725	CC0603KRX7R9BB103
	C	4101,4102,4105,4106	CCSSCH221J50		C	4719,4721,4723,4725	CKSRYB103K50
	C	4107,4108,4203,4204	CCSSCH101J50		C	4720,4722,4724,4726	CCSRCH102J50
					C	4807,4809	CKSRYB104K16
	C	4109,4110,4129,4131 (220 uF/25 V)	DCH1358				
	C	4111,4112,4311,4312	CC0603KRX7R9BB223		C	4807,4809	CC0603KRX7R7BB104
	C	4111,4112,4311,4312	CKSRYB223K50		C	4813,4908,4914,4920 (100 uF/25 V)	DCH1357
	C	4119,4120,4319,4320 (0.047 uF)	DCE1027		C	4814,4816,4818,4820	CKSRYB103K50
	C	4121,4122,4124,4125	CKSSYB103K50		C	4814,4816,4818,4820	CC0603KRX7R9BB103
					C	4815,4817,4819,4821	CCSRCH102J50
	C	4126,4137-4142,4207 (100 uF/25 V)	DCH1357				
	C	4130,4132-4136	CKSSYB103K50		C	4905,4906,5005,5006	CEANP100M35
	C	4143-4146,4201,4202	CCSSCH102J50		C	4911,5007,5011,5107	CEAT220M50
	C	4147-4151,4208,4209	CKSSYB103K50		C	4912,4913,5009,5010	CKSSYB104K16
	C	4152,4230,4352,4452	CKSSYB104K10		C	4915,5003,5004,5015	CKSSYB103K50
					C	4916,4918,5016,5018	CKSRYB103K50
	C	4154,4155,4232,4233	CFHXSQ472J16				
	C	4210,4215-4220,4323 (100 uF/25 V)	DCH1357		C	4916,4918,5016,5018	CC0603KRX7R9BB103
	C	4211-4214,4225-4229	CKSSYB103K50		C	4917,4919,5017,5019	CCSRCH102J50
	C	4221-4224,4303,4304	CCSSCH102J50		C	4921,5008,5014,5108 (100 uF/25 V)	DCH1357
	C	4301,4302,4305,4306	CCSSCH221J50		C	5012,5013,5109,5110	CKSSYB104K16
					C	5103,5104,5115,5221	CKSSYB103K50
	C	4307,4308,4407,4408	CCSSCH101J50				
	C	4309,4310,4329,4331 (220 uF/25 V)	DCH1358		C	5105,5106	CEANP100M35
	C	4321,4322,4324,4325	CKSSYB103K50		C	5111	CEAT220M50
	C	4326,4337-4342,4423 (100 uF/25 V)	DCH1357		C	5112,5113,5238,5240	CKSSYB104K16
	C	4328,4427,4428,4627 (0.1 uF)	DCE1031		C	5114 (100 uF/25 V)	DCH1357
					C	5116,5118,5243,5245	CKSRYB103K50
	C	4330,4332-4336	CKSSYB103K50				
	C	4343-4346,4403,4404	CCSSCH102J50		C	5116,5118,5243,5245	CC0603KRX7R9BB103
	C	4347-4351,4421,4422	CKSSYB103K50		C	5117,5119,5244,5246	CCSRCH102J50
	C	4354,4355,4454,4455	CFHXSQ472J16		C	5201-5204	CCSRCH222J50
	C	4401,4402,4405,4406	CCSSCH221J50		C	5209,5214,5235,5236	CEJQ100M35
					C	5210-5213	CCSSCH102J50
	C	4409,4410,4429,4431 (220 uF/25 V)	DCH1358				
	C	4411,4412,4611,4612	CC0603KRX7R9BB223		C	5215,5216	CKSSYB471K50
	C	4411,4412,4611,4612	CKSRYB223K50		C	5217,5218,5227,5228	CCSSCH821J50
	C	4419,4420,4619,4620 (0.047 uF)	DCE1027		C	5222,5225,5226,5233	CKSSYB103K50
	C	4424,4425,4430	CKSSYB103K50		C	5229,5230	CEJQNP100M35
					C	5234,5242	CKSSYB103K50
	C	4426,4437-4442,4507 (100 uF/25 V)	DCH1357				
	C	4432-4436,4447-4451	CKSSYB103K50		C	5237,5239	CEJQ470M16
	C	4443-4446,4501,4502	CCSSCH102J50		C	5241 (10 uF)	CCG1192
	C	4453,4531,4653,4907	CEAT220M50		C	5249,5250	CCSSCH101J50
	C	4503,4504,4607,4608	CCSSCH101J50		C	5251,5253,5255,5257	CCSRCH102J50
					C	5252,5254,5256,5258	CCSRCH101J50
	C	4508,4509,4511-4514	CKSSYB103K50				
	C	4510,4515-4520,4623 (100 uF/25 V)	DCH1357		C	5259,5261,5263	CCSRCH102J50
	C	4521-4524,4603,4604	CCSSCH102J50		C	5260,5262,5264	CCSRCH101J50
	C	4525-4529,4621,4622	CKSSYB103K50		C	5351,5354-5356 (1 uF)	CCG1325
	C	4530,4652	CKSSYB104K10				
	C	4532,4533,4654,4655	CFHXSQ472J16				
	C	4601,4602,4605,4606	CCSSCH221J50				
	C	4609,4610,4629,4631 (220 uF/25 V)	DCH1358				
	C	4624,4625,4630	CKSSYB103K50				
	C	4626,4637-4642,4703 (100 uF/25 V)	DCH1357				
	C	4628 (0.1 uF)	DCE1031				
	C	4632-4636,4647-4651	CKSSYB103K50				
	C	4643-4646,4705,4708	CCSSCH102J50				
	C	4701,4801,4903,4904	CKSSYB103K50				
	C	4702,4802 (4.7 uF)	ACG7114				
	C	4704,4716,4804,4811	CFHXSQ103J16				
	C	4706,4710,4711,4714	CKSRYB104K16				
	C	4706,4710,4711,4714	CC0603KRX7R7BB104				
	C	4707,4709,4712,4715 (100 uF/25 V)	DCH1357				
	C	4713,4805,4808	CCSSCH102J50				
	C	4718,4803,4806,4810 (100 uF/25 V)	DCH1357				

PNL2 ASSY
Consists of
SNRT1 ASSY
SNRT2 ASSY
SNRT3 ASSY
PSWB ASSY
BFXB ASSY
PNLL ASSY

BCDPXAC

PNL2 ASSY
SEMICONDUCTORS

	IC	7501,7502	TC74HC4051AF
	IC	7601	NJM2831F05
	Q	7501-7503,7601	2SC4154-11
	D	7501,7503,7504,7620	LTL17KSL5D-P
	D	7502,7613,7614	LTL17KRH5D-P

Mark	No.	Description	Part No.
------	-----	-------------	----------

A	D 7601-7612	1SS355VM
	D 7601-7612	1SS355L@V
	D 7616-7619	LTL17KRH5D-P
	D 7751-7754,7801-7804	DF2B18FU
	D 7851-7854	DF2B18FU

MISCELLANEOUS

JA 7751-7754 6.5 DIA JACK	DKN1682
JA 7801-7804 6.5 DIA JACK	DKN1682
JA 7851-7854 6.5 DIA JACK	DKN1682
KN 7601 EARTH TERMINAL	AKF7002
S 7501,7502,7601-7608 TACT SWITCH	DSG1079

S 7503,7504 ROTARY SWITCH	DSG1098
S 7609 ROTARY ENCODER	DSX1068
S 7610 ROTARY ENCODER	DSX1136
S 7701 PUSH SW	ASG1102
CN 7501 17P CONNECTOR	VKN1248

CN 7601 24P CONNECTOR	VKN1255
CN 7602 15P CONNECTOR	VKN1246
CN 7603 9P CONNECTOR	VKN1824
CN 7604 PLUG(6P)	KM200NA6
CN 7701 B TO W CONNECTOR	KM200NA3LY

CN 7751,7801,7851 L-PLUG(13P) 1001-1003 SHIELD CASE	KM200NA13L DNG1128
--	-----------------------

RESISTORS

R 7751,7752,7801,7802	RS1/10SR1000D
R 7851,7852	RS1/10SR1000D
VR 7501,7507,7508,7514 ROTARY VR	DCS1125
VR 7502,7509,7601 POTENTIOMETER	DCS1109
VR 7503-7506 POTENTIOMETER	DCS1065
VR 7510-7513,7602 POTENTIOMETER	DCS1065
VR 7603 ROTARY VR	DCS1125
VR 7604 POTENTIOMETER	DCS1065
Other Resistors	RS1/10SR###J

CAPACITORS

C 7504-7507,7512-7516	CKSRYB104K16
C 7504-7507,7512-7516	CC0603KRX7R7BB104
C 7508-7511,7517-7520	CCSRCH471J50
C 7521-7524,7529-7533	CKSRYB104K16
C 7521-7524,7529-7533	CC0603KRX7R7BB104

C 7525-7528,7534-7537	CCSRCH471J50
C 7538-7541,7605-7608	CKSRYB104K16
C 7538-7541,7605-7608	CC0603KRX7R7BB104
C 7603,7604,7701	CC0603KRX7R9BB103
C 7603,7604,7701	CKSRYB103K50

C 7609 (10 uF)	DCH1263
C 7610,7612,7753,7754	CCSRCH102J50
C 7611,7614	CC0603KRX7R7BB104
C 7611,7614	CKSRYB104K16
C 7613 (2.2 uF)	CCG1218

C 7615	CEJQ470M16
C 7751,7752,7801,7802	CCSRCH101J50
C 7755,7756,7805,7806	CCSRCH222J50
C 7803,7804,7853,7854	CCSRCH102J50
C 7851,7852	CCSRCH101J50

C 7855,7856	CCSRCH222J50
-------------	--------------

Mark	No.	Description	Part No.
------	-----	-------------	----------

AOUTB ASSY

Consists of
MTRM ASSY
HPPW ASSY
HPJK ASSY
HPJM ASSY
HPJC ASSY
AOUT ASSY

E K L M N O

AOUTB ASSY SEMICONDUCTORS

IC 5501,5502	OP275GPZ
IC 5601,5602,5801,5901	NJM2068MD
IC 5701,5702,6351,6352	NJM2068D
IC 6001	NJM2068MD
IC 6301	BD9851EFV

Q 5501,6351,6353,6355	LSCR523UB
Q 5502-5505,5601-5604	INC2002AC1
Q 5701-5704,5801,5802	INC2002AC1
Q 5901,5902,6001,6002	INC2002AC1
Q 6301,6302	RSQ030P03

Q 6352,6354,6356,6358	LSAR523UB
Q 6357,6367,6368	LSCR523UB
Q 6359,6361,6363,6365	KTC3209
Q 6360,6362,6364,6366	KTA1281
Q 6369,6370	LTC124EUB

Q 6371-6374	LSAR523UB
D 5501,5502,5601,5602	1SS355VM
D 5501,5502,5601,5602	1SS355L@V
D 6101-6103,6151-6153	DF2B18FU
D 6201-6203	DF2B18FU

D 6301-6303	RB162MM-40TF
D 6351-6360	1SS355VM
D 6359,6360	1SS355L@V

MISCELLANEOUS

L 6301,6302 POWER INDUCTOR	ATH7011
JA 5501,5502 CANON CONNECTOR	DKB1093
JA 5601 RCA JACK/4P	DKB1112
JA 5701 HEADPHONE JACK	DKN1622
JA 5702 HEADPHONE JACK	XKB3066

JA 6101,6201 6.5 DIA JACK	DKN1669
JA 6151,6202 STEREO MINI JACK	XKN3017
KN 6101,6151,6152 SCREW PLATE	VNE1948
KN 6201 EARTH TERMINAL	AKF7002
RY 5501,5502,6351,6352 RELAY	DSR1023

CN 5401,6301 PLUG(4P)	KM200NA4
CN 5402 19P RECEPTACLE	AKP7199
CN 5403 23P CONNECTOR	VKN1427
CN 5404,6352 PLUG(3P)	KM200NA3
CN 5405 PLUG(3P)	KM200NA3R

CN 5406 PLUG(3P)	KM200NA3E
CN 5407 PLUG(3P)	KM200NA3Y
CN 6101 L-PLUG(4P)	KM200NA4L
CN 6151,6201 L-PLUG(3P)	KM200NA3L
CN 6251 PLUG	CKS3533

CN 6351 19P CONNECTOR	VKN1423
CN 6353 PLUG(7P)	KM200NA7
1001 CANON SHIELD	DNF1789
1002 SHIELD CASE	DNG1130

Mark	No.	Description	Part No.
C	5701,5702,5811,5812 (100 uF/25 V)		DCH1357
C	5707-5710,5715-5718		CCSSCH101J50
C	5711-5714,5807,5808		CKSSYB103K50
C	5723-5726 (470 pF)		ACE7119
C	5803,5804,5903,5904		CCSSCH102J50
C	5805,5806,5905,5906		CCSSCH181J50
C	5901,5902,6001,6002		CEAT220M50
C	5907,5908,6007,6008		CKSSYB103K50
C	5909,5910,6009,6010		CEAT101M16
C	6003,6004		CCSSCH102J50
C	6005,6006		CCSSCH181J50
C	6101,6102,6151,6152		CFHXSQ103J16
C	6103,6153,6203		CCSRCH102J50
C	6104,6154,6204		CKSRYB103K50
C	6104,6154,6204		CC0603KRX7R9BB103
C	6201,6202		CFHXSQ103J16
C	6205		CKSRYB104K25
C	6301		CKSRYB474K10
C	6302		CKSRYB334K10
C	6303		CCSSCH221J50
C	6304		CKSSYB223K16
C	6306,6312,6313,6321 (10 uF)		CCG1236
C	6308		CCSSCH561J50
C	6310,6314		CKSRYB105K10
C	6316		CKSSYB682K25
C	6317 (4.7 uF)		CCG1201
C	6322,6330,6333,6334 (10 uF)		CCG1236
C	6323		CCSSCH471J50
C	6331,6332		CEAT470M25
C	6351,6352,6355,6356 (100 uF/25 V)		DCH1357
C	6353,6354,6357,6358 (220 uF/25 V)		DCH1358
C	6359-6363,6389,6390		CCSSCH101J50
C	6365-6368,6372-6379		CKSSYB103K50
C	6380-6383 (10 uF)		CCG1182
C	6385-6388 (100 uF/25 V)		DCH1357

MOTHER ASSY
Consists of
MAIN ASSY
USBB ASSY
USBA ASSY
USBP ASSY

EHUJ

DCE1031
CKSSYB104K16
DCH1358
CCSSCH101J50
CKSSYB103K50

DCH1359
CFHXSQ471J50
DCH1357
CEAT220M50
CCSSCH821J50

CCSSCH151J50
CEAT101M16
ACE7120
CCSRCH222J50

	IC 1,801-803,2001	TC7SZ08FUS2
⚠	IC 201-204	MM3542BF
⚠	IC 205,3151	MM3543BH
⚠	IC 206	BD9328EFJ
⚠	IC 207	MM3571A33P
⚠	IC 208	MM3479A25P
	IC 209	BD2226G
⚠	IC 211	NJM78M09DL1A
⚠	IC 212,213	UA78M33IKVUG3
⚠	IC 214	MM3571A12P
⚠	IC 215	NJM2831F05
	IC 216,901,902,1501	TC7SH08FUS2
⚠	IC 217	NJM2872BF33

Mark	No.	Description	Part No.
	IC 401		AM3352BZCZA100@V
NSP	IC 402		TPS65910A31A1RSL
A	IC 701		K4B1G1646I-BYMA
NSP	IC 806		DYW2235
	*Part number of the initial firmware equipped		
	IC 903		LAN8720A-CP
	IC 1001		TPS65911AA2ZRC
	IC 1101		66AK2G12ABYA100
	IC 1401		LP2996AMR
	IC 1402,1403		MT41K64M16TW107AIT
NSP	IC 1502		DYW2222
	*Part number of the initial firmware equipped		
	IC 1503,1505,1801,1802		TC7SH08FUS2
	IC 1504		H337S3959
B	IC 1506,2012,2013		TC74VHC08FK
	IC 1901		TMS320C6747DZKB4@V
	IC 1902		SN74AUC1G08DCK
	IC 2002		SI5351C-B03300GM
	IC 2003,2014,2903		TC7SZ08FUS2
	IC 2004,2005		74VHC163FT
	IC 2006,2503,2605		TC74LCX08FK
	IC 2007-2011,2601,2608		TC7SH08FUS2
	IC 2101		ES9016SD1
	IC 2102		NJM8080RB1S1
C	IC 2103,2104,2301,2302		NJM8801E
	IC 2401		AK4359AVF
	IC 2501,2502		AK4382AVT
	IC 2504,2505		NJM4580MD
	IC 2606,2607,2703,2704		AK4113VF
	IC 2609,2612,2613		TC7SH08FUS2
	IC 2610,2611,2705,2706		CS8421-CZ
	IC 2803,2804		AK4113VF
	IC 2805,2806,2902		CS8421-CZ
	IC 2904		AK4104ET
D	IC 2905		ADM3485ARZ
	IC 3152		TPS2557DRB
	Q 1		LTC014EEB
	Q 2		RTQ040P02
	Q 12,1801,2101-2103		LTC124EUB
	Q 13,2104		LSC4081UB
	Q 14,2105,2106		LSA1576UB
	Q 201		2SA1576A
	Q 202-205,207,211		LSAR523UB
	Q 206		LTC014YEB
	Q 208-210,212,3151		LSCR523UB
E	Q 213		LSAR523UB
	Q 601,901,1301,1501		LTC024EEB
	Q 1001		CSD87330Q3D
	Q 1302,1303		IMX25
	Q 1304		ISA1602AM1
	Q 1306,1307		2SB1188
	Q 1701,1901,3001,3002		LTC024EEB
	Q 3003		LTA023JEB
	Q 3004		LTC023JEB
	Q 3007		HN1C01FUS1
	Q 3008		INC2002AC1
F	Q 3009		LTC124EUB
	Q 3152		RN1903S1
	D 2,207-211,213		1SS355L@V

Mark	No.	Description	Part No.
	D 2,207-211,213		1SS355VM
	D 217-227,3001,3002		1SS355VM
	D 217-227		1SS355L@V
	D 601,1501,1701,1901		SML-D12V8W
	D 2601,2602,2701,2702		DF2B18FU
	D 2801,2802		DF2B18FU
	D 3006,3007		1SS355VM
	D 3051-3053,3101-3106		EZAEG2N50A
	D 3151		UDZV5R1
MISCELLANEOUS			
	L 201,203,204 CHOKE COIL (22 uH)		CTH1561
	L 202 COIL (47 uH)		CTH1475
	L 205,3151 SMD SPL INDUCTOR		CTH1524
	L 206 SMD SPL INDUCTOR		CTH1501
	L 401-403 SMD SPL INDUCTOR		CTH1531
	L 901,902 COIL		ATH7015
	L 903,904 CHOKE COIL		DTH1216
	L 1001 CHOKE COIL (3.6 uH)		CTH1479
	L 1002-1004 SMD SPL INDUCTOR		CTH1531
	L 1005,1006 CHIP BEADS		VTL1129
	L 1101-1110 INDUCTOR		CTF1793
	L 1301-1321 FERRITE BEAD		CTF1528
	L 1701 CHOKE COIL		DTH1219
	L 1901 CHIP SOLID INDUCTOR		QTL1013
	L 1902 SMD FERRITE BEADS		CTF1823
	F 902 EMI FILTER		DTL1106
	JA 901 RJ45 CONNECTOR		VKN2023
	JA 2601 RCA JACK		DKB1127
	JA 2901 CANON CONNECTOR		DKB1093
	JA 3001 CONNECTOR		DKN1188
	JA 3051 USB JACK		DKB1118
	JA 3101,3102 CONNECTOR		DKN1607
	KN 1 WRAPPING TERMINAL		CKF1089
	KN 3-11 WRAPPING TERMINAL		CKF1089
	KN 3051,3052 WRAPPING TERMINAL		CKF1089
	KN 3101,3102 WRAPPING TERMINAL		CKF1089
	KN 3151,3152 WRAPPING TERMINAL		CKF1089
	T 901,902 TRANSFORMER		DTX1010
	X 801,1501 CRYSTAL OSCILLATOR (24 MHz)		CWX4280
	X 901 CRYSTAL OSCILLATOR (50 MHz)		DSS1209
	X 1502 CRYSTAL OSCILLATOR (24 MHz)		CWX4280
	X 2001 CRYSTAL OSCILLATOR (24.576 MHz)		ASS7102
	CN 1,10,3051,3101 CONNECTOR		AKM1281
	CN 2 FFC/FPC CONNECTOR		DKP3953
NSP	CN 3 CONNECTOR		AKM1279
	CN 4 CONNECTOR		AKM1275
	CN 5 19P PLUG		AKM7077
	CN 6 23P CONNECTOR		VKN1427
	CN 7,9 FFC/FPC CONNECTOR		CKS6543
	CN 8,14 CONNECTOR		AKM1276
	CN 11 CONNECTOR		AKM1277
	CN 12 CONNECTOR		AKM1280
	CN 13 19P CONNECTOR		VKN1423
	CN 3151 CONNECTOR		AKM1292
	CN 3152 CONNECTOR		AKM1291
	1001 SHIELD CASE		DNK6576
	1002 SHIELD PLATE		DNH3369
	VL 2901 TRANSFORMER		DTX1016

RESISTORS

5			6			7			8		
Mark	No.	Description	Part No.	Mark	No.	Description	Part No.				
R	10,67,259,262		RS1/10SR0R0J		R	2667,2751,2752,2851	RS1/16SS2702D				
R	11,3014		RS1/4SA0R0J		R	2801,2802	RS1/16SS75R0D				
R	42,3156		RS1/8SQ0R0J		R	2831,2832,2932,3006	RS1/10SR0R0J				A
R	214,215,244,2666		RS1/16SS2702D		R	2839,2840,2907	RS1/16SS1001F				
R	216,3152		RS1/16SS3302D		R	2841,2842	RS1/16SS1003D				
R	217,218		RS1/16SS2202D								
R	219		RS1/16SS4701D		R	2845,2848,2910	RS1/16SS1802D				
R	220		RS1/16SS8201D		R	2847,2909,3155	RS1/16SS2201D				
R	221		RS1/16SS51R0D		R	2852	RS1/16SS2702D				
R	222,225,228,231		RS1/16SS2201D		R	2911	RS1/16SS1503D				
					R	2912	RS1/16SS1103D				
R	223,226		RS1/16SS1102D								
R	224,227		RS1/10SR5600D		R	2918	RS1/10SR560J				
R	229,232		RS1/10SR6801D		R	2927,2929	RS1/10SR56R0D				
R	230,233		RS1/10SR75R0D		R	3004,3005	RS1/4SA221J				B
R	234,1382,1384,2659		RS1/16SS2201D		R	3007,3105,3106	RS1/10SR0R0J				
					R	3154	RS1/16SS1000D				
R	235,702,703		RS1/16SS1001D								
R	236		RS1/16SS3301D		R	3157	RS1/10SR221J				
R	237,241,243,934		RS1/16SS1002D		R	3160	RS1/16SS1201D				
R	242,3153		RS1/16SS1202D		R	3161	RS1/16SS4302D				
R	256		RS1/16SS1502D		R	3163	RS1/10SR472J				
					R	3164	RS1/10SR331J				
R	310,933,2001,2401		RS1/10SR0R0J		Other Resistors			RS1/16SS###J			
R	407,409,2024,2609		RS1/10SR680J		CAPACITORS						
R	701,936-939		RS1/16SS49R9F		C	1,907,908,911	CKSSYB102K50				C
R	706,1406,1407,1414		RS1/16SS2400F		C	2,12,13,15	CKSSYB104K10				
R	935		RS1/16SS1501F		C	3,302,312,317 (1 uF)	CCG1325				
R	1355,1366		RAB4CQ472J		C	4,6,7,11	CCSSCH102J50				
R	1368		RAB4CQ222J		C	5 (150 uF/16 V)	DCH1356				
R	1369		RAB4CQ473J								
R	1370,1385,1386		RS1/10SR361J		C	8,41,207-212	CKSQYB104K50				
R	1371,1372		RS1/4SA101J		C	9	CEVW470M35				
R	1373		RS1/10SR104J		C	10,16,26,42	CKSSYB104K16				
R	1374		RS1/10SR332J		C	19,20,46,344	CKSSYB103K50				
R	1375		RS1/4SA391J		C	21,22,27 (1 uF)	DCE1030				
R	1376		RS1/10SR1100D								
R	1377		RS1/10SR1000D		C	23,24,1101,1103 (100 uF/25 V)	CCH2000				
					C	25,34,38,43	CCSSCH102J50				D
R	1378		RS1/10SR6800D		C	28 (270 uF/16 V)	DCH1355				
R	1379		RS1/10SR6200D		C	29,1004,1007,1011	CKSQYB105K25				
R	1381,1383		RS1/16SS3601D		C	30,33,37,300	CKSRYB104K25				
R	1418		RS1/16SS2400F								
R	1420-1443		RS1/16SS39R0D		C	31,35	CEHVAW101M25				
					C	39	CEHVAW101M16				
R	1704,1705		RS1/16SS2000F		C	44,213-218,256	CCSSCH102J50				
R	1706		RS1/16SS3001F		C	201-206 (10 uF)	CCG1236				
R	2025,2505,2506		RN1/16SE1000D		C	225-230,236-242	CKSSYB104K10				
R	2106,2107,2925		RS1/10SR102J								
R	2111,2112		RS1/10SR101J		C	231-235,3153	CC0603KRX7R9BB153				
					C	231-235,3153	CKSRYB153K50				
R	2113,2115		RS1/10SR5601D		C	243,245,3155	CCSSCH821J50				E
R	2114,2116		RS1/10SR3601D		C	244,916,1906,1907	CCSSCH471J50				
R	2120-2123,2301-2304		RS1/10SR3300D		C	246,247	CKSSYB122K50				
R	2124-2127,2305-2308		RN1/16SE1501D								
R	2410,2507,2508		RAB4CQ103J		C	248	CKSSYB332K50				
					C	261-266,293,298	CCSSCH102J50				
R	2522-2529		RS1/10SR3001D		C	267-272,286,296	CKSQYB104K50				
R	2530-2537		RS1/10SR5101D		C	273-284,308,483	CKSQYB106K6R3				
R	2538-2545		RS1/10SR1801D		C	285,295	CKSRYB474K10				
R	2601,2602,2701,2702		RS1/16SS75R0D								
R	2610,2618-2621		RS1/10SR680J		C	288,321,401,402	CKSSYB104K10				
					C	290	CKSQYB334K50				
R	2646,2647,2731,2732		RS1/10SR0R0J		C	292,311,314 (2.2 uF)	DCG1065				
R	2654,2655,2739,2740		RS1/16SS1001F		C	294,303,480,481 (4.7 uF)	CCG1212				F
R	2656,2657,2741,2742		RS1/16SS1003D		C	294,303,480,481	CC0603KRX5R5BB475				
R	2660,2663,2745,2748		RS1/16SS1802D								
R	2662,2744,2747,2844		RS1/16SS2201D		C	304	CKSQYB104K50				

Mark	No.	Description	Part No.	Mark	No.	Description	Part No.
A	C	307,350,2034,2165 (1 uF)	DCE1031	C	1178,1179,1185,1940 (1 uF)	DCH1266	
	C	310,1010 (220 uF/16 V)	CCH2090	C	1182-1184,1501,1502	CKSSYB104K10	
	C	316,347,1512,1523	CCSSCH102J50	C	1186,2101,2102,2143 (100 uF/25 V)	CCH2000	
	C	319,322-330	CKSSYB103K16	C	1188,1325,1503,1507	CKSSYB103K16	
	C	320,346,477-479 (2.2 uF)	CCG1218	C	1301	CCSSCH100D50	
	C	345,348,703-707	CKSSYB104K16	C	1401	CEHVVW470M6R3	
	C	403-409,416,417 (10 uF)	CCG1192	C	1407-1409,1422-1424	CKSSYB104K16	
	C	410,411,418,426	CKSSYB104K10	C	1411-1421,1426-1436	CKSSYB224K6R3	
B	C	412-415,419-425	CKSSYB103K16	C	1425,1462-1464,1515 (10 uF)	CCG1192	
	C	427-429,431,432	CKSSYB103K16	C	1437-1461,2125,2403	CKSSYB104K16	
	C	430,436,442,444	CKSSYB104K10	C	1506,1511,1522,1525	CKSSYB104K10	
	C	433,434,474,475 (10 uF)	CCG1192	C	1508,1516-1519,1532	CKSSYB103K16	
	C	435,437-441,443	CKSSYB103K16	C	1524	CCSRCH222J50	
	C	445-447,449-451	CKSSYB103K16	C	1528	CCSSCH470J50	
	C	448,452,454-461	CKSSYB104K10	C	1530,1539,1702,1803	CKSSYB104K10	
	C	453,466-473,476	CKSSYB103K16	C	1533,1537,1538,1908	CKSSYB103K16	
	C	463-465,701,702 (1 uF)	DCH1266	C	1703,2002,2009,2016	CCSSCH102J50	
	C	482,484,489,491 (2.2 uF)	CCG1218	C	1804,1904,1905,1941	CKSSYB104K10	
	C	485,488,492,493	CKSQYB106K6R3	C	1901,1903,2615-2618 (10 uF)	CCG1192	
	C	486,490,494,920 (4.7 uF)	CCG1212	C	1902,2103,2120 (47 uF/16 V)	CCH1961	
C	C	486,490,494,920	CC0603KRX5R5BB475	C	1910,1912,1914,1916	CKSSYB103K16	
	C	487,801,804,807	CKSSYB104K10	C	1911,1913,1915,1917	CKSSYB102K50	
	C	495 (2.2 uF)	CCG1218	C	1918,1920,1921,1923	CKSSYB103K16	
	C	496,1034,1037,1039	CKSQYB106K6R3	C	1919,1922,1924,1926	CKSSYB102K50	
	C	497,918	CEVW101M16	C	1925,1927,1929,1931	CKSSYB103K16	
	C	498	CKSRYB105K10	C	1928,1930,1932,1934	CKSSYB102K50	
	C	499-505,802,803	CKSSYB103K16	C	1933,1935-1937,1939	CKSSYB103K16	
	C	708,919,923,1002 (10 uF)	CCG1192	C	1938,2603,2604,2701	CCSSCH101J50	
D	C	709-719,1126	CKSSYB224K6R3	C	1942,2001,2003,2004	CKSSYB104K10	
	C	720,1014,1029,1033	CKSSYB104K16	C	2005-2008,2121,2402	CKSSYB103K16	
	C	805,806,809,1023	CKSSYB103K16	C	2010,2013-2015	CKSSYB104K10	
	C	808,812,901,905	CKSSYB104K10	C	2011,2012,2017-2021	CKSSYB102K50	
	C	811,902,904,915 (1 uF)	DCH1266	C	2022-2026,2030,2031	CKSSYB104K10	
	C	903,914	CCSSCH7R0D50	C	2027	CCSSCH120J50	
	C	906,909,910,913	CKSSYB104K10	C	2028,2029,2133,2134	CKSSYB102K50	
	C	912,1801,1802,1909	CKSSYB102K50	C	2104,2105,2122,2140	CFHXSQ103J16	
	C	921,922,1006,1008	CKSSYB104K10	C	2106,2115-2119,2126	CCSSCH102J50	
	C	924,925	CKSSYB223K16	C	2107,2109,2111,2113	CCSRCH102J50	
	C	926 (1 000 pF)	ACG1127	C	2108,2110,2112,2114	CKSRYB103K50	
	C	1001 (10 uF)	DCH1263	C	2123,2124,2131,2132 (1 uF)	CCG1325	
E	C	1003,1009,1025,1030	CC0603KRX5R5BB475	C	2127,2129,2130,2145	CCSSCH102J50	
	C	1003,1009,1025,1030 (4.7 uF)	CCG1212	C	2128 (10 uF/16 V)	CCH1998	
	C	1012,1013,1015,1018	CKSSYB104K10	C	2135-2138,2163,2164	CKSSYB103K50	
	C	1017,1020,1406,1410 (10 uF)	CCG1192	C	2142,2147,2150,2169	CFHXSQ103J16	
	C	1021,1022,1024,1026	CKSSYB104K10	C	2144,2311,2312 (100 uF/25 V)	CCH2000	
	C	1027,1404 (4.7 uF)	CCG1201	C	2148,2167,2170,2313	CCSSCH102J50	
	C	1028,2524-2531	CCSSCH331J50	C	2166,2329,2330 (0.1 uF)	DCE1031	
	C	1031,1032,1035,1038	CKSSYB104K10	C	2301,2302,2601,3054	CKSSYB102K50	
F	C	1036,1402,1403,1405	CKSSYB104K16	C	2303-2306,2532-2535	CKSSYB103K50	
	C	1040,1042,1113-1120	CKSSYB104K10	C	2308,2310,2315,2319	CFHXSQ103J16	
	C	1041,1044,1109,1177	CCG1379	C	2316,2317,2320,2503	CCSSCH102J50	
	C	1047,1049-1054,1110	CKSSYB103K16	C	2401,2517,3161 (100 uF/16 V)	CCH1565	
	C	1102,1104,1105	CEHVVW101M6R3	C	2404	CKSRYB104K16	
	C	1106	CC0603KRX5R5BB475	C	2405,2513,2514,3154	CKSSYB104K16	
	C	1106 (4.7 uF)	CCG1212	C	2406	CEVW100M16	
	C	1107,1108,1112,1121 (1 uF)	DCH1266	C	2407,2409,2411,2413	CCSRCH102J50	
	C	1111,1153-1160,1181	CKSSYB103K16	C	2408,2410,2412,2414	CKSRYB103K50	
	C	1122-1125,1127-1152	CKSSYB104K10	C	2501,2502,2623,2624	CKSSYB103K16	
	C	1161-1176,1180	CKSSYB104K10	C	2504,2506,2508,2510	CCSRCH102J50	
				C	2505,2507,2509,2511	CKSRYB103K50	

Mark	No.	Description	Part No.
C	2512,2602,2613		CKSSYB104K10
C	2520-2523		CCSSCH561J50
C	2605,2606,2703,2704		CKSRYB103K50
C	2614,2629,2630,2643		CCSSCH102J50
C	2619-2622,2627,2628		CKSSYB104K10
C	2631,2632,2640,2641 (10 uF)		CCG1192
C	2633,2634,2717,2718		CKSSYB103K16
C	2635-2639,2642		CKSSYB104K10
C	2644,2908,2915,2916		CCSSCH102J50
C	2702,2801,2802		CCSSCH101J50
C	2709-2712,2721,2722 (10 uF)		CCG1192
C	2713-2716,2725-2728		CKSSYB104K10
C	2723,2724,2817,2818		CKSSYB103K16
C	2729,2730,2809-2812		CCG1192
C	2803,2804,2901,2921		CKSRYB103K50
C	2813-2816,2825-2828		CKSSYB104K10
C	2821,2822,2829,2830 (10 uF)		CCG1192
C	2823,2824,2904,2910		CKSSYB103K16
C	2902,2922		CCSRCH102J50
C	2903,2907,2913,2918 (10 uF)		CCG1192
C	2905,2906,2909,2912		CKSSYB104K10
C	2917,3001,3005,3152		CKSSYB104K10
C	2919,2920		CCSSCH221J50
C	3003,3004		CCSSCH102J50
C	3052,3101,3102,3159 (10 uF)		CCG1192
C	3053,3103,3104		CKSSYB103K16
C	3105,3106,3158		CKSSYB102K50
C	3151		CKSQYX226M16
C	3160 (10 uF)		CCG1192
C	3162		DCH1362
C	3163 (0.047 uF)		DCE1027
C	3164		CCG1321

IC 8403-8405	74VHC541FT
IC 8406	DYW2223- /J
IC 8407	PST8430N
IC 8408	74LCX244FT
IC 8409	DYW2224

IC 8410	TC7SH126FUS1
IC 8701,8702	74VHC595FT
IC 8703	74VHC164FT
Q 8401,8402	LTA023JEB
Q 8403,8404,8408,8409	LTC024EEB

Q 8405,8406	LTC023JEB
Q 8407,8462	LTA024EEB
Q 8410	LSAR523UB
Q 8411	LTC043EEB
Q 8412-8422,8424,8426	LTC024EEB

Q 8423.8425.8428.8429 2SB1689

Mark	No.	Description	Part No.
Q	8427,8430,8431,8434		LTC024EEB
Q	8432,8433,8435,8437		2SB1689
Q	8436,8438,8440,8712		LTC024EEB
Q	8439,8441,8713,8715		2SB1689
Q	8442-8447,8449-8461		2SC4154-11
Q	8701-8711,8728-8731		2SC4154-11
Q	8714,8716,8718,8720		LTC024EEB
Q	8717,8719,8721,8723		2SB1689
Q	8722,8724,8726,8732		LTC024EEB
Q	8725,8727,8733,8735		2SB1689
Q	8734,8736,8738,8740		LTC024EEB
Q	8737,8739,8741,8743		2SB1689
Q	8742,8744,8746		LTC024EEB
Q	8745,8747		2SB1689
D	8701,8712,8723,8734		FC-1608SXXK630D08
D	8702-8711,8713-8722		FC-1608YXK585F08
D	8724-8733,8735-8744		FC-1608YXK585F08
D	8745,8756,8767,8768		FC-1608SXXK630D08
D	8746-8755,8757-8766		FC-1608YXK585F08
D	8769-8777,8780-8788		FC-1608YXK585F08
D	8778,8779		FC-1608SXXK630D08
D	8789,8791,8793,8795		NHSW146A-A21460
D	8790,8792,8794,8796		1SS355VM
D	8790,8792,8794,8796		1SS355L@V
D	8797,8799,8801,8803		NHSW146A-A21460
D	8798,8800,8802,8804		1SS355L@V
D	8798,8800,8802,8804		1SS355VM
D	8805,8807,8809,8811		NHSW146A-A21460
D	8806,8808,8810,8812		1SS355VM
D	8806,8808,8810,8812		1SS355L@V
D	8813,8815,8817,8819		NHSW146A-A21460
D	8814,8816,8818,8820		1SS355VM
D	8814,8816,8818,8820		1SS355L@V
D	8821,8823,8825,8827		NHSW146A-A21460

D 8822,8824,8826,8828	1SS355L@V
D 8822,8824,8826,8828	1SS355VM
D 8829,8831,8833,8835	NHSW146A-A21460
D 8830,8832,8834,8836	1SS355VM
D 8830,8832,8834,8836	1SS355L@V

D 8837,8839,8841,8843	NHSW146A-A21460
D 8838,8840,8842,8844	1SS355L@V
D 8838,8840,8842,8844	1SS355VM
D 8845,8847,8849,8851	NHSW146A-A21460
D 8846,8848,8850,8852	1SS355L@V

D 8846,8848,8850,8852	1SS355VM
D 8901-8908	1SS355VM

	L 8404,8902 CHIP BEEDS FILTER
	KN 8401 WRAPPING TERMINAL
	KN 8901-8905 WRAPPING TERMINAL
	X 8401 CRYSTAL RESONATOR (16 MHz)
NSP	CN 8401 CONNECTOR

NSP	CN 8402	CONNECTOR	CKS3865
	CN 8404,8405,8407-8409	CONNECTOR	AKM1290
	CN 8406	27P CONNECTOR	RKN1068
	CN 8410	19P CONNECTOR	VKN1311
	CN 8411	CONNECTOR	AKM1290

CN 8412 17P CONNECTOR	RKN1058
CN 8413 8415 FFC/FPC CONNECTOR	CKS6543

Mark	No.	Description	Part No.
A	CN 8414	29P CONNECTOR	VKN1321
	CN 8416,8903	FFC/FPC CONNECTOR	CKS6543
	CN 8419	10P CONNECTOR	VKN1302
NSP	CN 8420	24P CONNECTOR	VKN1316
	CN 8701	CONNECTOR	CKS3860
	CN 8901	FFC/FPC CONNECTOR	CKS6646
	CN 8902	FFC/FPC CONNECTOR	CKS6625

Mark	No.	Description	Part No.
D	8101-8119,8127,8129		1SS355VM
	8120,8123,8224,8227		LTL17KRH5D-P
	8121,8122,8124,8125		LTL17KSL5D-P
D	8126,8128,8130,8132		SLR343WBD2PT
	8131,8133,8135,8137		1SS355VM
	8131,8133,8135,8137		1SS355L@V
	8134,8136,8138,8140		SLR343WBD2PT
	8139,8141,8201-8223		1SS355L@V

RESISTORS

R	8759,8763,8767,8771	RS1/10SR121J
R	8775,8779,8783,8787	RS1/10SR121J
R	8791,8795	RS1/10SR121J
R	8799-8802	RS1/10SR151J
R	8806,8809,8812,8815	RS1/10SR152J

D	8139,8141,8201-8223	1SS355VM
D	8225,8226,8228,8229	LTL17KSL5D-P
D	8230,8233,8236,8239	LTL17KRH5D-P
D	8231,8232,8234,8235	LTL17KSL5D-P
D	8237,8238,8240,8241	LTL17KSL5D-P

R	8818,8821,8824,8827	RS1/10SR152J
R	8837,8841,8845,8849	RS1/10SR471J
R	8854,8857,8860,8863	RS1/10SR103J
R	8866,8869,8872,8875	RS1/10SR103J
R	8931-8935	RS1/10SR0R0J

D	8242	LTL17KRH5D-P
D	8243,8244	LTL17KSL5D-P

MISCELLANEOUS

S	8101-8113,8201-8221 TACT SWITCH	DSG1079
S	8114 SLIDE SWITCH	DSH1058
CN	8102 29P CONNECTOR	VKN1260
CN	8201 27P CONNECTOR	VKN1258
CN	8202 10P CONNECTOR	VKN1241

CAPACITORS

C	8402,8422,8423,8426	CKSSYB104K16
C	8403,8439,8440 (1 uF)	DCH1266
C	8404,8430,8431,8441	CCSSCH102J50
C	8424,8425,8428,8429	CEVW101M16
C	8427,8432,8435,8438	CKSSYB104K16

RESISTORS

VR	8101,8104-8106 POTENTIONETER	DCS1065
VR	8102,8103,8107-8109 ROTARY VR	DCS1125
VR	8201-8205,8207 ROTARY VR	DCS1125
VR	8206,8208 POTENTIOMETER	DCS1108
	Other Resistors	RS1/10SR###J

CAPACITORS

C	8101,8201	CEJQ470M16
C	8102-8105,8107-8110	CCSRCH471J50
C	8106,8111-8119,8206	CKSRYB104K16
C	8202-8205,8207-8210	CCSRCH471J50
C	8211-8218	CKSRYB104K16

AD

PNLR ASSY SEMICONDUCTORS

IC	7301-7304,7306	TC74HC4051AF
IC	7305	NJM2903M
Q	7301	RT1P431M
D	7301,7302,7306,7307	LTL17KSL5D-P
D	7305,7308	LTL17KRH5D-P

D	7309,7310	LTL17KSL5D-P
---	-----------	--------------

MISCELLANEOUS

S	7301-7303 TACT SWITCH	DSG1079
S	7304-7308 ROTARY SWITCH	DSG1098
CN	7301 24P CONNECTOR	VKN1255

RESISTORS

VR	7301,7307,7308,7314 ROTARY VR	DCS1125
VR	7302,7309,7316 POTENTIOMETER	DCS1109
VR	7303-7306 POTENTIONETER	DCS1065
VR	7310-7313 POTENTIONETER	DCS1065
VR	7315,7321,7322,7328 ROTARY VR	DCS1125

VR	7317-7320 POTENTIONETER	DCS1065
VR	7323,7329 POTENTIOMETER	DCS1109
VR	7324-7327,7333 POTENTIONETER	DCS1065
VR	7330-7332 ROTARY VR	DCS1146
VR	7334 ROTARY VR	DCS1125

PNL3 ASSY

Consists of
SFXB ASSY
CUEVR ASSY

AA AB PNL3 ASSY SEMICONDUCTORS

IC	8101,8201	TC74HC4051AF
D	8101-8119,8127,8129	1SS355L@V

Mark

No.

Description

Part No.

Other Resistors

RS1/10SR###J

CAPACITORS

C 7304-7307,7313-7316

C 7308-7312,7317-7320

C 7308-7312,7317-7320

C 7321-7324,7330-7333

C 7325-7329,7334-7337

CCSRCH471J50

CC0603KRX7R7BB104

CKSRYB104K16

CCSRCH471J50

CC0603KRX7R7BB104

C 7325-7329,7334-7337

C 7338-7341,7347-7350

C 7342-7346,7351-7354

C 7342-7346,7351-7354

C 7355-7358,7364-7367

CKSRYB104K16

CCSRCH471J50

CKSRYB104K16

CC0603KRX7R7BB104

CCSRCH471J50

C 7359-7363,7368-7372

C 7359-7363,7368-7372

C 7373,7375-7377

C 7374,7378-7383

C 7374,7378-7383

CKSRYB104K16

CC0603KRX7R7BB104

CCSRCH471J50

CKSRYB104K16

CC0603KRX7R7BB104

C 7384-7386

C 7387-7389

C 7387-7389

CCSRCH471J50

CC0603KRX7R7BB104

CKSRYB104K16

RSTUVW

FADB ASSY

MISCELLANEOUS

CN8071 L-PLUG(4P)

KM200NA4L

RESISTORS

VR 8071 SLIDE VR

Other Resistors

DCV1036

RS1/10SR###J

CAPACITORS

C 8071

C 8072

CCSRCH471J50

CKSRYB104K16

AG

SW POWER SUPPLY

There is no service parts.