
COMPONENTS

QY-5001B-A

1.	Main unit	----------	1
2.	GPS antenna	096-0147-00	1
3.	Power supply lead	854-6451-50	1
	(5A Fuse	120-0050-00	1)
4.	RGB cable	855-2433-02	1
5.	CeNET cable(2.5m)	855-3421-01	1
6.	Accessory bag	----------	1
6-1.	Electro-tap(for speed sensor)	060-0018-00	2
6-2.	Electro-tap	060-0305-00	1
6-3.	Mounting bracket	300-7362-03	2
6-4.	Cord holder	321-1026-01	10
6-5.	Canoe clip	335-2515-00	4
6-6.	Waterproof rubber	345-7473-00	1
6-7.	Double-sided tape for fastening the antenna	347-6369-00	1
6-8.	Inatallation bolt(M4x6)	714-4006-8B	4

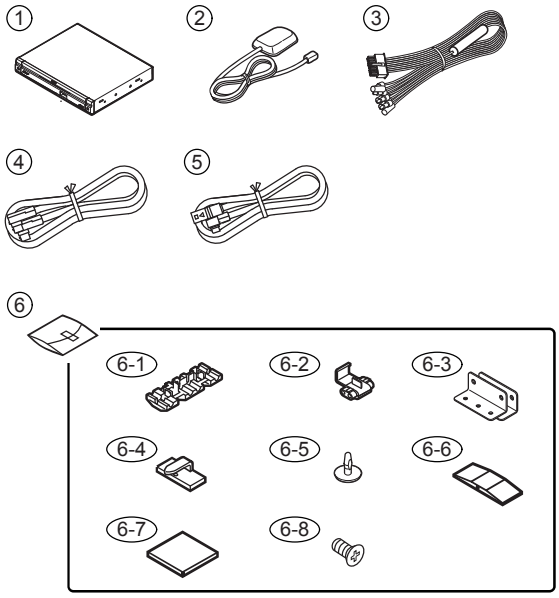


To engineers in charge of repair or inspection of our products.

Before repair or inspection, make sure to follow the instructions so that customers and Engineers in charge of repair or inspection can avoid suffering any risk or injury.

1. Use specified parts.
   The system uses parts with special safety features against fire and voltage. Use only parts with equivalent characteristics when replacing them.
   The use of unspecified parts shall be regarded as remodeling for which we shall not be liable. The onus of product liability (PL) shall not be our responsibility in cases where an accident or failure is as a result of unspecified parts being used.
2. Place the parts and wiring back in their original positions after replacement or re-wiring.
   For proper circuit construction, use of insulation tubes, bonding, gaps to PWB, etc, is involved. The wiring connection and routing to the PWB are specially planned using clamps to keep away from heated and high voltage parts. Ensure that they are placed back in their original positions after repair or inspection.
   If extended damage is caused due to negligence during repair, the legal responsibility shall be with the repairing company.
3. Check for safety after repair.
   Check that the screws, parts and wires are put back securely in their original position after repair. Ensure for safety reasons there is no possibility of secondary ploblems around the repaired spots.
   If extended damage is caused due to negligence of repair, the legal responsibility shall be with the repairing company.
4. Caution in removal and making wiring connection to the parts for the automobile.
   Disconnect the battery terminal after turning the ignition key off. If wrong wiring connections are made with the battery connected, a short circuit and/or fire may occur. If extensive damage is caused due to negligence of repair, the legal responsibility shall be with the repairing company.
5. Cautions in soldering
   Please do not spread liquid flux in soldering.
   Please do not wash the soldering point after soldering.
6. Cautions in soldering for chip capacitors
   Please solder the chip capacitors after pre-heating for replacement because they are very weak to heat.
   Please do not heat the chip capacitors with a soldering iron directly.
7. Cautions in handling for chip parts.
   Do not reuse removed chips even when no abnormality is observed in their appearance. Always replace them with new ones. (The chip parts include resistors, capacitors, diodes, transistors, etc).
   Please make an operation test after replacement.
8. Cautions in handling flexible PWB
   Before working with a soldering iron, make sure that the iron tip temperature is around 270℃. Take care not to apply the iron tip repeatedly(more than three times)to the same patterns. Also take care not to apply the tip with force.
9. Turn the unit OFF during disassembly and parts replacement. Recheck all work before you apply power to the unit.

EXPLODED VIEW/PARTS LIST

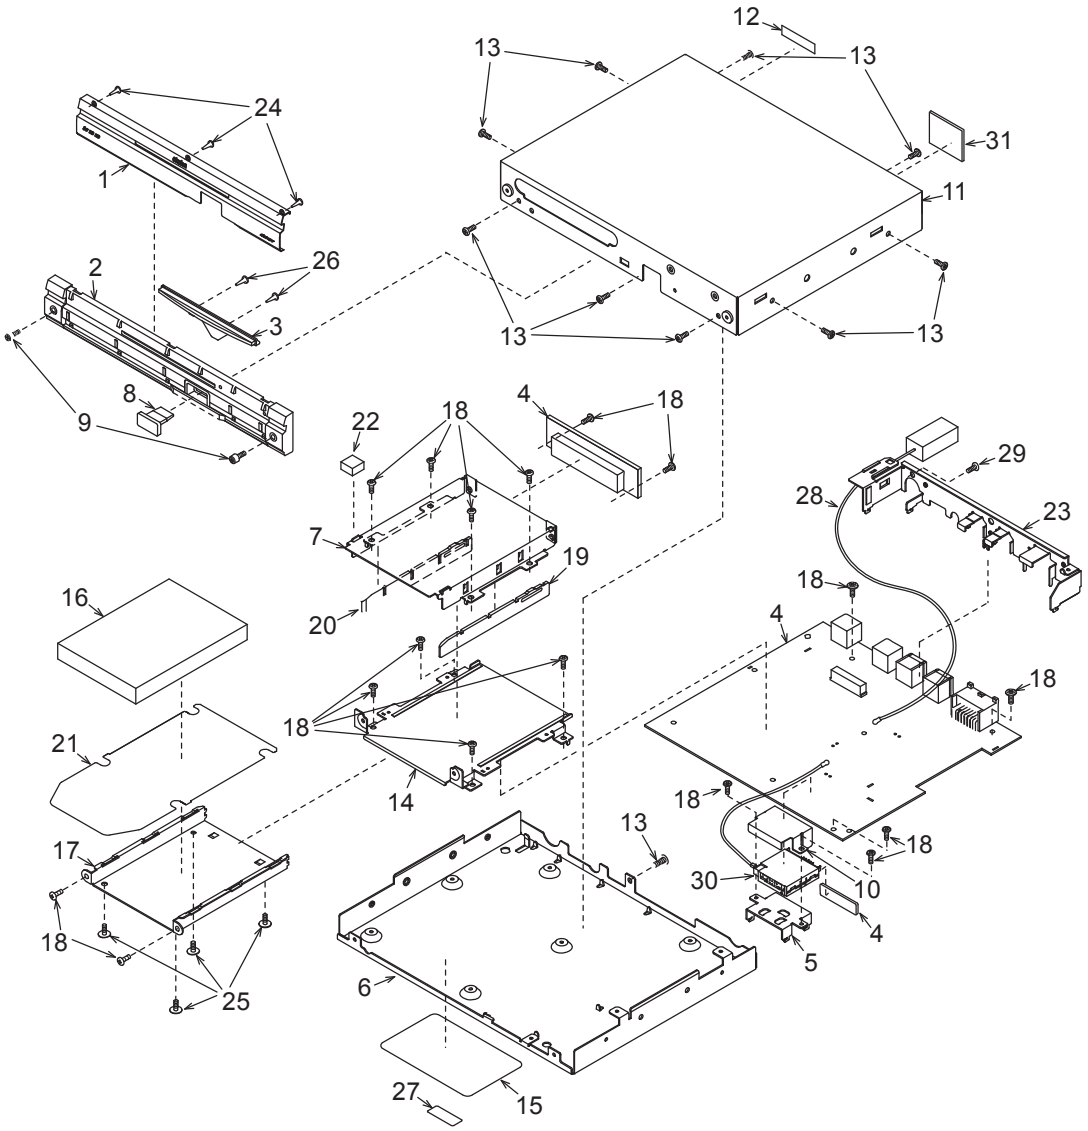

NO.	PART NO.	DESCRIPTION	Q'TY
1	372-3232-01	ALUMI FACE	1
2	370-6928-00	ESCUTCHEON	1
3	335-7799-00	ILLUMI	1
4	----------	MAIN PWB	1
5	331-4188-00	GPS-PLATE	1
6	311-1922-00	LOWER CASE	1
7	331-4192-00	HDD-HOLDER	1
8	335-7798-00	USB-CVR	1
9	780-2607-00	SCREW(M2.6x7)	2
10	331-4189-00	GPS-HOLDER	1
11	310-1830-01	UPPER CASE	1
12	347-8187-00	INSULATOR	1
13	780-2604-03	SCREW(M2.6x4)	10
14	331-4191-00	HDD-PLATE	1
15	276-0157-00	SETPLATE	1
16	----------	HARD DISC DRIVE(30GB)	1

NO.	PART NO.	DESCRIPTION	Q'TY
17	331-3660-01	HDD BRKT	1
18	716-0878-50	SCREW(M2.6x5)	17
19	335-7016-00	HDD GUIDE-R	1
20	335-7017-00	HDD GUIDE-L	1
21	347-7963-00	HDD PULL SHEET	1
22	345-8524-01	CUSION	1
23	331-4186-00	C-PLATE	1
24	716-3490-50	SCREW(M1.7x3)	3
25	716-3503-50	SCREW(M3x4)	4
26	716-0872-52	PAD SCREW(M1.7x5)	2
27	290-0103-00	COA LABEL	1
28	092-2206-01	ANT-RECEPT	1
29	714-3006-8B	MACHINE SCREW(M3x6)	1
30	060-8059-00	GPS-RECEIVER	1
31	347-8183-00	INSULATOR	1

ELECTRICAL PARTS LIST

Main PWB(B1) section

REF No.	PART No.	DESCRIPTION
ANT700	075-0380-01	JACK
ANT701	075-0380-01	JACK
BAT1000	088-0034-11	CR2032-HE4
BL700	060-8059-00	GPS-RECEIVER
C100	042-0423-20	10V 10uF
C101	046-1042-78	0.1uF
C102	046-1042-78	0.1uF
C103	046-1042-78	0.1uF
C104	178-1052-78	1uF
C105	046-1042-78	0.1uF
C106	042-1726-90	6.3V 100uF
C107	178-1052-78	1uF
C108	042-1726-90	6.3V 100uF
C109	042-1726-90	6.3V 100uF
C110	178-1052-78	1uF
C111	178-1052-78	1uF
C112	042-0423-20	10V 10uF
C113	046-1042-78	0.1uF
C114	046-1042-78	0.1uF
C115	046-1042-78	0.1uF
C116	046-1042-78	0.1uF
C117	166-1011-50	100pF CH
C118	046-1042-78	0.1uF
C119	046-1042-78	0.1uF
C120	166-1011-50	100pF CH
C121	046-1042-78	0.1uF
C122	042-1726-90	6.3V 100uF
C123	178-1052-78	1uF
C124	046-1042-78	0.1uF
C125	046-1042-78	0.1uF
C126	046-1042-78	0.1uF
C127	046-1042-78	0.1uF
C128	046-1042-78	0.1uF
C129	046-1042-78	0.1uF
C130	046-1042-78	0.1uF
C131	046-1042-78	0.1uF
C132	046-1042-78	0.1uF
C133	046-1042-78	0.1uF
C134	046-1042-78	0.1uF
C135	166-1011-50	100pF CH
C136	168-1022-55	1000pF K
C137	046-1042-78	0.1uF
C138	046-1042-78	0.1uF
C139	046-1042-78	0.1uF
C140	046-1042-78	0.1uF
C141	046-1042-78	0.1uF
C142	166-1011-50	100pF CH
C143	046-1042-78	0.1uF
C144	046-1042-78	0.1uF
C145	046-1042-78	0.1uF
C146	166-1011-50	100pF CH
C147	166-1011-50	100pF CH
C148	046-1042-78	0.1uF
C149	046-1042-78	0.1uF
C150	046-1042-78	0.1uF
C151	166-2201-50	22pF CH
C152	046-1042-78	0.1uF
C153	046-1042-78	0.1uF
C154	042-0423-20	10V 10uF
C155	046-1042-78	0.1uF
C156	046-1042-78	0.1uF
C157	046-1042-78	0.1uF
C158	046-1042-78	0.1uF
C159	046-1042-78	0.1uF
C160	166-1011-50	100pF CH
C161	046-1042-78	0.1uF
C162	046-1042-78	0.1uF
C163	046-1042-78	0.1uF
C164	046-1042-78	0.1uF
C165	046-1042-78	0.1uF
C166	166-1011-50	100pF CH
C167	046-1042-78	0.1uF
C168	046-1042-78	0.1uF
C169	046-1042-78	0.1uF
C170	046-1042-78	0.1uF
C171	046-1042-78	0.1uF
C172	046-1042-78	0.1uF
C173	046-1042-78	0.1uF
C174	046-1042-78	0.1uF
C175	046-1042-78	0.1uF
C176	046-1042-78	0.1uF
C177	046-1042-78	0.1uF
C178	046-1042-78	0.1uF
C179	046-1042-78	0.1uF
C180	046-1042-78	0.1uF
C181	046-1042-78	0.1uF
C182	046-1042-78	0.1uF
C183	046-1042-78	0.1uF
C184	166-1011-50	100pF CH
C185	166-1011-50	100pF CH
C186	166-1011-50	100pF CH
C187	042-0423-20	10V 10uF
C188	168-1022-55	1000pF K
C189	168-1045-56	0.1uF Z
C200	178-1052-78	1uF
C201	042-0423-20	10V 10uF
C202	042-0423-20	10V 10uF
C203	046-1042-78	0.1uF
C204	166-1011-50	100pF CH
C205	046-1042-78	0.1uF
C206	166-1011-50	100pF CH
C207	046-1042-78	0.1uF
C208	166-1011-50	100pF CH
C209	046-1042-78	0.1uF
C210	166-1011-50	100pF CH
C211	166-1011-50	100pF CH
C212	046-1042-78	0.1uF
C213	166-1011-50	100pF CH
C214	046-1042-78	0.1uF
C215	046-1042-78	0.1uF
C216	166-1011-50	100pF CH
C217	046-1042-78	0.1uF
C218	166-1011-50	100pF CH
C219	166-1011-50	100pF CH
C220	046-1042-78	0.1uF
C221	166-1011-50	100pF CH
C222	046-1042-78	0.1uF
C223	046-1042-78	0.1uF
C224	166-1011-50	100pF CH
C225	046-1042-78	0.1uF
C226	166-1011-50	100pF CH
C227	046-1042-78	0.1uF
C228	046-1042-78	0.1uF
C229	046-1042-78	0.1uF
C230	166-1011-50	100pF CH
C231	046-1042-78	0.1uF
C232	166-1011-50	100pF CH
C233	046-1042-78	0.1uF
C234	046-1042-78	0.1uF
C235	046-1042-78	0.1uF
C236	166-1011-50	100pF CH
C237	046-1042-78	0.1uF
C238	166-1011-50	100pF CH
C239	042-0423-20	10V 10uF
C240	042-0423-20	10V 10uF
C241	046-1042-78	0.1uF
C242	166-1011-50	100pF CH
C243	046-1042-78	0.1uF
C244	166-1011-50	100pF CH
C245	046-1042-78	0.1uF
C246	166-1011-50	100pF CH
C247	046-1042-78	0.1uF
C248	166-1011-50	100pF CH
C249	166-1011-50	100pF CH
C250	046-1042-78	0.1uF
C251	166-1011-50	100pF CH
C252	046-1042-78	0.1uF
C253	046-1042-78	0.1uF
C254	166-1011-50	100pF CH
C255	046-1042-78	0.1uF
C256	166-1011-50	100pF CH
C257	166-1011-50	100pF CH
C258	046-1042-78	0.1uF
C259	166-1011-50	100pF CH
C260	046-1042-78	0.1uF
C261	046-1042-78	0.1uF
C262	166-1011-50	100pF CH
C263	046-1042-78	0.1uF
C264	166-1011-50	100pF CH
C265	046-1042-78	0.1uF
C266	046-1042-78	0.1uF
C267	046-1042-78	0.1uF
C268	166-1011-50	100pF CH
C269	046-1042-78	0.1uF
C270	166-1011-50	100pF CH
C271	046-1042-78	0.1uF
C272	046-1042-78	0.1uF
C273	046-1042-78	0.1uF
C274	166-1011-50	100pF CH
C275	046-1042-78	0.1uF
C276	166-1011-50	100pF CH
C277	042-1726-90	6.3V 100uF
C278	046-1042-78	0.1uF
C400	042-0423-20	10V 10uF
C401	046-1042-78	0.1uF
C402	168-6832-78	0.068uF K
C403	168-6832-78	0.068uF K
C404	042-0423-20	10V 10uF
C405	168-4745-79	0.47uF Z
C406	166-1011-50	100pF CH
C407	046-1042-78	0.1uF
C408	046-1042-78	0.1uF
C409	046-1042-78	0.1uF
C410	046-1042-78	0.1uF
C411	046-1042-78	0.1uF
C412	042-0423-20	10V 10uF
C413	168-4745-79	0.47uF Z
C414	166-1011-50	100pF CH
C415	046-1042-78	0.1uF
C416	046-1042-78	0.1uF
C417	046-1042-78	0.1uF
C419	046-1042-78	0.1uF
C420	166-1011-50	100pF CH
C421	166-1011-50	100pF CH
C422	166-1011-50	100pF CH
C423	166-1011-50	100pF CH
C424	166-1011-50	100pF CH
C425	166-1011-50	100pF CH
C426	168-1022-55	1000pF K
C427	166-1011-50	100pF CH
C428	166-1011-50	100pF CH
C429	168-1022-55	1000pF K
C502	046-1042-78	0.1uF
C503	046-1042-78	0.1uF
C504	046-1042-78	0.1uF
C505	046-1042-78	0.1uF
C506	046-1042-78	0.1uF
C507	046-1042-78	0.1uF
C508	046-1042-78	0.1uF
C509	046-1042-78	0.1uF
C510	046-1042-78	0.1uF
C511	046-1042-78	0.1uF
C512	046-1042-78	0.1uF

REF No.	PART No.	DESCRIPTION
C513	046-1042-78	0.1uF
C514	046-1042-78	0.1uF
C515	046-1042-78	0.1uF
C516	046-1042-78	0.1uF
C517	046-1042-78	0.1uF
C518	046-1042-78	0.1uF
C520	042-0573-50	6.3V 47uF TAN
C521	046-1042-78	0.1uF
C522	042-0416-57	10V 47uF M TAN
C523	046-1042-78	0.1uF
C525	042-0416-57	10V 47uF M TAN
C526	046-1042-78	0.1uF
C527	166-4701-50	47pF CH
C528	046-1042-78	0.1uF
C529	168-1022-55	1000pF K
C531	166-1011-50	100pF CH
C532	166-1011-50	100pF CH
C533	166-1011-50	100pF CH
C534	166-1011-50	100pF CH
C535	166-1011-50	100pF CH
C536	166-1011-50	100pF CH
C537	166-1011-50	100pF CH
C538	166-1011-50	100pF CH
C539	166-1011-50	100pF CH
C540	166-1011-50	100pF CH
C541	166-1011-50	100pF CH
C542	166-1011-50	100pF CH
C543	166-1011-50	100pF CH
C544	166-1011-50	100pF CH
C545	166-1011-50	100pF CH
C546	166-1011-50	100pF CH
C547	166-1011-50	100pF CH
C548	166-1011-50	100pF CH
C549	166-1011-50	100pF CH
C550	166-1011-50	100pF CH
C551	166-1011-50	100pF CH
C552	166-1011-50	100pF CH
C553	166-1011-50	100pF CH
C554	042-0423-97	16V 10uF
C555	168-1045-56	0.1uF Z
C556	166-3901-50	39pF CH
C557	168-1042-78	16V 0.1uF
C558	046-1042-78	0.1uF
C559	046-1042-78	0.1uF
C560	046-1042-78	0.1uF
C561	168-2232-55	0.022uF K
C600	168-1045-56	0.1uF Z
C601	168-1045-56	0.1uF Z
C602	046-1042-78	0.1uF
C603	046-1042-78	0.1uF
C604	042-0423-20	10V 10uF
C605	046-1042-78	0.1uF
C606	046-1042-78	0.1uF
C607	042-0403-55	16V 33uF
C608	168-1045-56	0.1uF Z
C609	168-1045-56	0.1uF Z
C610	042-0403-55	16V 33uF
C611	168-1022-55	1000pF K
C700	168-1045-56	0.1uF Z
C701	168-4745-79	0.47uF Z
C702	042-0423-97	16V 10uF
C703	168-1045-56	0.1uF Z
C704	168-1045-56	0.1uF Z
C705	168-1045-56	0.1uF Z
C706	163-1063-35	16V 10uF
C707	168-1045-56	0.1uF Z
C708	168-1045-56	0.1uF Z
C709	168-1032-55	0.01uF K
C710	168-1032-55	0.01uF K
C711	163-1063-35	16V 10uF
C712	168-1032-55	0.01uF K
C713	168-1032-55	0.01uF K

REF No.	PART No.	DESCRIPTION
C715	168-1045-56	0.1uF Z
C716	168-1045-56	0.1uF Z
C717	046-1042-78	0.1uF
C718	042-0638-50	16V 68uF
C719	168-1032-55	0.01uF K
C720	166-2701-50	27pF CH
C721	166-2701-50	27pF CH
C722	166-1011-50	100pF CH
C723	166-1011-50	100pF CH
C724	163-1063-35	16V 10uF
C726	168-1022-55	1000pF K
C727	166-1011-50	100pF CH
C729	042-0638-50	16V 68uF
C800	043-0548-50	2.2uF
C801	046-1042-78	0.1uF
C802	046-1042-78	0.1uF
C803	042-0423-97	16V 10uF
C805	046-1042-78	0.1uF
C806	046-1042-78	0.1uF
C807	046-1042-78	0.1uF
C808	042-0423-20	10V 10uF
C809	042-0423-97	16V 10uF
C811	042-0423-97	16V 10uF
C812	168-4745-79	0.47uF Z
C813	046-1042-78	0.1uF
C815	163-1063-35	16V 10uF
C816	168-2222-55	2200pF K
C817	168-1045-56	0.1uF Z
C818	168-1032-55	0.01uF K
C819	042-0423-97	16V 10uF
C820	168-2212-55	220pF K
C821	043-0548-50	2.2uF
C826	043-0548-50	2.2uF
C829	166-1011-50	100pF CH
C831	166-1011-50	100pF CH
C832	168-1045-56	0.1uF Z
C833	046-1042-78	0.1uF
C834	163-1063-35	16V 10uF
C835	163-1063-35	16V 10uF
C839	163-1063-35	16V 10uF
C840	163-1063-35	16V 10uF
C841	168-2212-55	220pF K
C842	168-2212-55	220pF K
C843	168-2212-55	220pF K
C900	168-1032-55	0.01uF K
C901	046-1042-78	0.1uF
C902	168-3332-78	0.033uF K
C903	168-1032-55	0.01uF K
C904	046-1042-78	0.1uF
C905	046-1042-78	0.1uF
C906	168-3332-78	0.033uF K
C907	168-1032-55	0.01uF K
C908	046-1042-78	0.1uF
C909	168-1032-55	0.01uF K
C910	046-1042-78	0.1uF
C911	046-1042-78	0.1uF
C912	168-3332-78	0.033uF K
C914	046-1042-78	0.1uF
C915	168-1045-56	0.1uF Z
C916	046-1042-78	0.1uF
C917	168-1045-56	0.1uF Z
C918	163-1073-15	6.3V 100uF
C919	168-1045-56	0.1uF Z
C920	168-1045-56	0.1uF Z
C921	046-1042-78	0.1uF
C922	168-1022-55	1000pF K
C924	046-1042-78	0.1uF
C926	168-1032-55	0.01uF K
C927	168-1032-55	0.01uF K
C928	168-1022-55	1000pF K
C929	168-1022-55	1000pF K
C931	168-1022-55	1000pF K

REF No.	PART No.	DESCRIPTION
C932	168-1022-55	1000pF K
C1000	163-1063-35	16V 10uF
C1001	168-1045-56	0.1uF Z
C1004	168-1022-55	1000pF K
C1005	042-0423-20	10V 10uF
C1007	168-1045-56	0.1uF Z
C1008	166-1211-50	120pF CH
C1010	163-1073-35	16V 100uF
C1013	163-1063-35	16V 10uF
C1015	168-1045-56	0.1uF Z
C1016	163-1063-35	16V 10uF
C1017	168-1032-55	0.01uF K
C1018	168-1045-56	0.1uF Z
C1020	168-1022-55	1000pF K
C1021	166-1211-50	120pF CH
C1023	163-1073-35	16V 100uF
C1024	168-3322-55	3300pF K
C1025	168-3322-55	3300pF K
C1026	168-6812-55	680pF K
C1027	168-1032-55	0.01uF K
C1028	166-6801-50	68pF CH
C1029	168-1045-56	0.1uF Z
C1030	168-1045-56	0.1uF Z
C1031	168-1032-55	0.01uF K
C1032	168-6812-55	680pF K
C1033	168-3922-55	3900pF K
C1034	168-2222-55	2200pF K
C1035	168-1222-55	1200pF K
C1036	042-1726-90	6.3V 100uF
C1037	043-0548-50	2.2uF
C1038	046-1042-78	0.1uF
C1039	168-1045-56	0.1uF Z
C1040	046-1042-78	0.1uF
C1041	168-1045-56	0.1uF Z
C1042	168-1045-56	0.1uF Z
C1043	168-1045-56	0.1uF Z
C1045	166-1211-50	120pF CH
C1048	042-1726-90	6.3V 100uF
C1049	042-1726-90	6.3V 100uF
C1050	043-0548-50	2.2uF
C1051	043-0548-50	2.2uF
C1058	189-4783-31	16V 4700uF
C1059	189-4783-31	16V 4700uF
C1061	043-0566-90	50V 2.2uF K
C1062	168-1022-55	1000pF K
C1063	043-0566-90	50V 2.2uF K
C1064	043-0566-90	50V 2.2uF K
C1065	178-1052-78	1uF
C1066	168-1045-56	0.1uF Z
C1067	043-0576-90	50V 10uF
C1068	043-0576-90	50V 10uF
C1069	043-0576-90	50V 10uF
C1070	043-0576-90	50V 10uF
C1071	042-1726-90	6.3V 100uF
C1072	178-1052-78	1uF
C1073	043-0548-50	2.2uF
C1074	042-0423-97	16V 10uF
C1075	163-1073-35	16V 100uF
C1100	168-1045-56	0.1uF Z
C1101	189-1083-41	25V 1000uF
C1102	043-0540-00	6.3V 10uF
C1103	043-0540-00	6.3V 10uF
C1104	043-0540-00	6.3V 10uF
C1105	046-1042-78	0.1uF
C1106	046-1042-78	0.1uF
C1107	042-1726-90	6.3V 100uF
C1108	046-1042-78	0.1uF
C1109	046-1042-78	0.1uF
C1110	168-1045-56	0.1uF Z
C1111	042-3373-15	6.3V 330uF
C1112	042-3373-15	6.3V 330uF
C1113	042-3373-15	6.3V 330uF

REF No.	PART No.	DESCRIPTION
C1114	046-1042-78	0.1uF
C1115	046-1042-78	0.1uF
C1116	046-1042-78	0.1uF
C1117	163-1073-15	6.3V 100uF
C1118	043-0540-00	6.3V 10uF
CCT100	050-0140-57	1/32W 10k ohm x4J
CCT101	050-0140-57	1/32W 10k ohm x4J
CCT102	050-0140-57	1/32W 10k ohm x4J
CCT104	050-0140-51	1/32W 22 ohm x4J
CCT105	050-0140-51	1/32W 22 ohm x4J
CCT106	050-0140-51	1/32W 22 ohm x4J
CCT107	050-0140-51	1/32W 22 ohm x4J
CCT108	050-0140-51	1/32W 22 ohm x4J
CCT109	050-0140-51	1/32W 22 ohm x4J
CCT110	050-0140-51	1/32W 22 ohm x4J
CCT111	050-0140-51	1/32W 22 ohm x4J
CCT112	050-0140-51	1/32W 22 ohm x4J
CCT113	050-0140-51	1/32W 22 ohm x4J
CCT114	050-0140-57	1/32W 10k ohm x4J
CCT115	050-0140-57	1/32W 10k ohm x4J
CCT116	050-0140-71	1/32W 82 ohm x4J
CCT117	050-0140-71	1/32W 82 ohm x4J
CCT118	050-0140-57	1/32W 10k ohm x4J
CCT119	050-0140-56	1/32W 4.7k ohm x4J
CCT120	050-0140-56	1/32W 4.7k ohm x4J
CCT121	050-0140-53	1/32W 0 ohm x4J
CCT300	050-0140-66	1/32W 47 ohm x4J
CCT301	050-0140-66	1/32W 47 ohm x4J
CCT302	050-0140-66	1/32W 47 ohm x4J
CCT303	050-0140-66	1/32W 47 ohm x4J
CCT304	050-0140-66	1/32W 47 ohm x4J
CCT305	050-0140-66	1/32W 47 ohm x4J
CCT306	050-0140-66	1/32W 47 ohm x4J
CCT307	050-0140-66	1/32W 47 ohm x4J
CCT308	050-0140-66	1/32W 47 ohm x4J
CCT309	050-0140-66	1/32W 47 ohm x4J
CCT310	050-0140-66	1/32W 47 ohm x4J
CCT311	050-0140-66	1/32W 47 ohm x4J
CCT312	050-0140-66	1/32W 47 ohm x4J
CCT313	050-0140-66	1/32W 47 ohm x4J
CCT314	050-0140-66	1/32W 47 ohm x4J
CCT315	050-0140-66	1/32W 47 ohm x4J
CCT332	050-0140-51	1/32W 22 ohm x4J
CCT333	050-0140-51	1/32W 22 ohm x4J
CCT334	050-0140-51	1/32W 22 ohm x4J
CCT335	050-0140-51	1/32W 22 ohm x4J
CCT336	050-0140-51	1/32W 22 ohm x4J
CCT501	050-0140-71	1/32W 82 ohm x4J
CCT700	050-0140-69	1/32W 56 ohm x4J
CCT701	050-0140-69	1/32W 56 ohm x4J
CCT703	050-0140-57	1/32W 10k ohm x4J
CCT800	050-0140-59	1/32W 33 ohm x4J
CCT801	050-0140-59	1/32W 33 ohm x4J
D600	001-7078-90	NSCW505T
D701	001-0529-32	MA8056-M
D702	001-9207-50	EZJZSV171AA
D703	001-0529-32	MA8056-M
D704	001-0529-32	MA8056-M
D705	001-0529-32	MA8056-M
D706	001-0529-32	MA8056-M
D800	001-0529-27	MA8047H
D801	001-1305-90	DAN217U-T106
D802	001-1305-90	DAN217U-T106
D900	001-0517-90	1SS355
D901	001-0529-46	MA8091-L
D903	001-7038-91	CL-221FG FRE-GRN
D905	001-2630-90	1SS420-TPL3,F
D906	001-2630-90	1SS420-TPL3,F
D907	001-2630-90	1SS420-TPL3,F
D1000	001-2629-90	D1FM3-5063
D1001	001-2630-90	1SS420-TPL3,F
D1002	001-2630-90	1SS420-TPL3,F

REF No.	PART No.	DESCRIPTION
D1003	001-2630-90	1SS420-TPL3,F
D1004	001-2629-90	D1FM3-5063
D1005	001-2630-90	1SS420-TPL3,F
D1006	001-2630-90	1SS420-TPL3,F
D1007	001-2629-90	D1FM3-5063
D1008	001-2629-90	D1FM3-5063
D1100	001-4311-00	ST70-27F-7072
D1101	001-1305-90	DAN217U-T106
D1102	001-1305-90	DAN217U-T106
FIL1103	060-3114-52	LFA20-2A1
FIL1104	060-3114-52	LFA20-2A1
FIL1105	060-3114-52	LFA20-2A1
FIL1106	060-3116-53	CKD510JB1H221ST
IC100	051-7222-48	SN74AHC1G08 DCKR
IC101	051-7522-08	SN74LVC1G32 DCKR
IC102	051-7522-08	SN74LVC1G32 DCKR
IC103	----------	R8A77700ADA01 BGV
IC105	051-7522-08	SN74LVC1G32 DCKR
IC106	051-7272-08	TC7SZ125F
IC107	051-7526-08	SN74LVC1G12 6DCKR
IC200	051-9333-60	K4H561638H-UIB3
IC201	051-9333-60	K4H561638H-UIB3
IC202	051-9333-60	K4H561638H-UIB3
IC203	051-9333-60	K4H561638H-UIB3
IC400	----------	MD4832-d512-V3Q18-X-P
IC401	051-7503-78	SN74LVCHR16245 AGR
IC402	051-7520-08	SN74LVC1G04 DCKR
IC403	051-9125-70	R1LV0416CSB-7LI
IC404	051-7534-90	SN74LVC1G97 DCKR
IC405	051-7505-18	SN74ALVC08PWR
IC501	051-6834-00	XC3S50-4VQG100I-0985
IC502	051-6650-90	NB2305AT1HDR2G
IC504	051-7522-08	SN74LVC1G32 DCKR
IC505	051-7289-90	MC74HC4046ADT
IC506	051-7524-08	SN74LVC1G08 DCKR
IC507	051-7243-48	SN74AHCT1G08 DCKR
IC508	051-7243-48	SN74AHCT1G08 DCKR
IC600	051-7243-48	SN74AHCT1G08 DCKR
IC601	051-7539-90	SN74LVC3G34 DCTR
IC602	051-7503-78	SN74LVCHR16245 AGR
IC700	051-6923-08	ADCS7476AIMF
IC701	051-7222-48	SN74AHC1G08 DCKR
IC702	948-0683-02	GYRO-SENSOR
IC704	051-6921-90	TPS2041BDGNR
IC705	051-7529-90	SN74LVC541APW
IC707	051-7539-90	SN74LVC3G34 DCTR
IC800	051-6718-90	AK5357VT-E2
IC801	051-6731-90	WM8718SEDS/R
IC802	051-3054-90	HA17558ATEL
IC804	051-3054-90	HA17558ATEL
IC805	051-7255-38	TC7W66FU-TE12L
IC900	051-5408-38	R3112N211A-TR

REF No.	PART No.	DESCRIPTION
IC901	051-5408-38	R3112N211A-TR
IC902	051-7222-48	SN74AHC1G08 DCKR
IC903	051-5418-28	R3111N271A-TR-FA
IC904	051-5408-38	R3112N211A-TR
IC905	051-7202-58	SN74AHC1G32 DCKR
IC907	051-7540-90	SN74LVC2G32 DCTR
IC908	051-9400-29	BR93L46F-W
IC909	052-7086-00	M30620MCP-D16GP
IC910	051-7505-08	SN74LV08APWR
IC911	051-7222-48	SN74AHC1G08 DCKR
IC912	051-6600-58	HA12187FP
IC1000	051-3304-90	LP2954IMX
IC1001	051-3337-90	BA09CC0WFP
IC1003	051-3377-90	LM3485MM
IC1004	051-3342-90	BA05CC0WFP-004EL
IC1005	051-3380-90	TPS5120DBTRG4
IC1006	051-3356-90	BDOOKA5WFP
IC1100	051-3402-90	NJM2406F
IC1101	051-7537-90	SN74LVC1G14 DCKR
IC1102	051-5344-90	NJM2267V-TE2
IC1103	051-5344-90	NJM2267V-TE2
J701	074-1311-00	USB
J702	074-0881-07	7P
J1100	074-1194-00	13P CE-NET
J1101	074-1194-00	13P CE-NET
J1102	074-1125-08	8P
J1103	074-1231-08	8P MIN
J1200	076-0713-00	50P
L100	010-3105-58	120 ohm/100MHz
L101	010-3104-53	220 ohm/100MHz
L102	010-3104-53	220 ohm/100MHz
L103	010-3104-53	220 ohm/100MHz
L104	010-3104-54	600 ohm/100MHz
L105	010-3104-54	600 ohm/100MHz
L106	010-3104-54	600 ohm/100MHz
L107	010-3105-58	120 ohm/100MHz
L108	010-3104-54	600 ohm/100MHz
L200	010-3104-53	220 ohm/100MHz
L400	010-3104-54	600 ohm/100MHz
L401	010-3104-54	600 ohm/100MHz
L402	010-3104-54	600 ohm/100MHz
L502	010-3104-54	600 ohm/100MHz
L509	010-3104-53	220 ohm/100MHz
L510	010-3104-53	220 ohm/100MHz
L511	010-3104-53	220 ohm/100MHz
L512	010-3104-54	600 ohm/100MHz
L600	010-3104-54	600 ohm/100MHz
L601	010-3104-53	220 ohm/100MHz
L602	010-3104-53	220 ohm/100MHz
L700	010-3104-54	600 ohm/100MHz
L701	010-3104-54	600 ohm/100MHz
L702	010-3104-54	600 ohm/100MHz
L703	010-3104-53	220 ohm/100MHz
L704	010-3040-90	PLP3216S55/SLZT1
L705	010-3104-54	600 ohm/100MHz
L706	010-3105-58	120 ohm/100MHz
L707	010-3105-58	120 ohm/100MHz
L708	010-3104-54	600 ohm/100MHz
L709	010-3105-58	120 ohm/100MHz
L710	010-3104-54	600 ohm/100MHz
L801	010-3104-54	600 ohm/100MHz
L802	010-3104-54	600 ohm/100MHz
L804	010-3104-54	600 ohm/100MHz
L807	010-3105-62	1k ohm/100MHz
L808	010-3105-62	1k ohm/100MHz
L900	010-3104-54	600 ohm/100MHz

REF No.	PART No.	DESCRIPTION
L901	010-3104-54	600 ohm/100MHz
L1000	010-3104-54	600 ohm/100MHz
L1001	010-3104-50	30 ohm/100MHz
L1002	010-3104-50	30 ohm/100MHz
L1003	010-3500-92	10uH
L1004	010-3104-54	600 ohm/100MHz
L1005	010-3500-92	10uH
L1006	010-3500-92	10uH
L1007	010-3104-54	600 ohm/100MHz
L1008	010-3104-53	220 ohm/100MHz
L1010	010-3105-58	120 ohm/100MHz
L1011	010-3105-58	120 ohm/100MHz
L1100	010-3105-58	120 ohm/100MHz
L1101	010-3104-54	600 ohm/100MHz
L1102	010-3104-54	600 ohm/100MHz
L1104	010-3105-62	1k ohm/100MHz
L1105	010-3105-62	1k ohm/100MHz
L1106	010-3105-62	1k ohm/100MHz
L1107	010-3105-62	1k ohm/100MHz
L1108	010-3104-54	600 ohm/100MHz
L1109	010-3104-54	600 ohm/100MHz
L1110	010-3104-54	600 ohm/100MHz
P600	074-1323-00	9828S-50Y
P701	076-0526-07	7P
P702	076-0353-07	7P
P1200	074-1322-00	50P
Q700	125-2027-91	DTC114EUA
Q800	125-0021-91	DTA114EUA
Q801	192-4116-00	2SC4116
Q802	193-1306-00	2SD1306
Q803	125-2027-91	DTC114EUA
Q900	190-1586-00	2SA1586 O,Y,G
Q902	125-2027-91	DTC114EUA
Q903	125-2027-91	DTC114EUA
Q904	125-2027-91	DTC114EUA
Q1000	193-1306-00	2SD1306
Q1001	190-2096-00	2SA2096
Q1002	125-7006-90	RSS075P03 TB
Q1003	125-0021-91	DTA114EUA
Q1004	125-8017-90	SP8K4-TB
Q1005	125-8017-90	SP8K4-TB
Q1009	192-4116-00	2SC4116
Q1010	131-1188-50	2SB1188PQR
Q1011	192-4116-00	2SC4116
Q1100	125-0021-97	DTA113ZU
Q1101	192-4116-00	2SC4116
Q1102	192-4116-00	2SC4116
R100	119-1021-15	1/10W 1k ohm
R101	119-1001-15	1/10W 10 ohm
R102	119-1031-15	1/10W 10k ohm
R103	119-3301-15	1/10W 33 ohm
R104	119-1031-15	1/10W 10k ohm
R107	119-1011-15	1/10W 100 ohm
R108	119-3301-15	1/10W 33 ohm
R110	119-1031-15	1/10W 10k ohm
R114	119-1031-15	1/10W 10k ohm
R115	119-1031-15	1/10W 10k ohm
R116	119-1031-15	1/10W 10k ohm
R118	119-1031-15	1/10W 10k ohm
R119	119-1001-15	1/10W 10 ohm
R120	119-3301-15	1/10W 33 ohm
R121	119-2201-15	1/10W 22 ohm
R122	119-1001-15	1/10W 10 ohm
R123	119-3301-15	1/10W 33 ohm
R124	032-0140-83	1/10W 150 ohm F
R125	119-3301-15	1/10W 33 ohm
R126	119-3301-15	1/10W 33 ohm
R127	119-2211-15	1/10W 220 ohm
R128	032-0140-83	1/10W 150 ohm F
R129	032-0140-83	1/10W 150 ohm F
R130	119-1011-15	1/10W 100 ohm
R131	032-0140-57	1/10W 5.6k ohm F

REF No.	PART No.	DESCRIPTION
R132	119-1031-15	1/10W 10k ohm
R133	119-1031-15	1/10W 10k ohm
R134	119-1031-15	1/10W 10k ohm
R135	119-1031-15	1/10W 10k ohm
R136	032-0140-68	1/10W 680 ohm F
R137	119-2201-15	1/10W 22 ohm
R139	119-0000-05	1/10W 0 ohm JW
R140	119-4731-15	1/10W 47k ohm
R141	119-4731-15	1/10W 47k ohm
R142	119-2221-15	1/10W 2.2k ohm
R143	119-2221-15	1/10W 2.2k ohm
R144	119-3301-15	1/10W 33 ohm
R146	119-4731-15	1/10W 47k ohm
R147	119-1031-15	1/10W 10k ohm
R148	119-1031-15	1/10W 10k ohm
R150	119-3301-15	1/10W 33 ohm
R151	119-1031-15	1/10W 10k ohm
R152	119-1031-15	1/10W 10k ohm
R153	119-1031-15	1/10W 10k ohm
R154	119-3301-15	1/10W 33 ohm
R156	119-8201-15	1/10W 82 ohm
R157	119-1011-15	1/10W 100 ohm
R158	119-1021-15	1/10W 1k ohm
R160	119-4731-15	1/10W 47k ohm
R161	119-1011-15	1/10W 100 ohm
R162	119-1031-15	1/10W 10k ohm
R163	119-4721-15	1/10W 4.7k ohm
R164	119-4721-15	1/10W 4.7k ohm
R165	119-4721-15	1/10W 4.7k ohm
R166	119-1031-15	1/10W 10k ohm
R167	119-1031-15	1/10W 10k ohm
R168	119-1031-15	1/10W 10k ohm
R169	119-1031-15	1/10W 10k ohm
R170	119-8201-15	1/10W 82 ohm
R171	119-8201-15	1/10W 82 ohm
R172	119-8201-15	1/10W 82 ohm
R173	119-1031-15	1/10W 10k ohm
R174	119-1031-15	1/10W 10k ohm
R175	119-1031-15	1/10W 10k ohm
R176	119-1031-15	1/10W 10k ohm
R177	119-1011-15	1/10W 100 ohm
R178	119-1031-15	1/10W 10k ohm
R179	119-1041-15	1/10W 100k ohm
R181	032-0140-51	1/10W 15k ohm F
R182	032-0140-51	1/10W 15k ohm F
R183	119-1031-15	1/10W 10k ohm
R184	119-1031-15	1/10W 10k ohm
R185	119-1031-15	1/10W 10k ohm
R300	119-0000-05	1/10W 0 ohm JW
R301	119-0000-05	1/10W 0 ohm JW
R302	119-1511-15	1/10W 150 ohm
R303	119-2201-15	1/10W 22 ohm
R305	119-4701-15	1/10W 47 ohm
R306	119-4701-15	1/10W 47 ohm
R307	119-4701-15	1/10W 47 ohm
R308	119-4701-15	1/10W 47 ohm
R309	119-4701-15	1/10W 47 ohm
R310	119-4701-15	1/10W 47 ohm
R311	119-4701-15	1/10W 47 ohm
R312	119-4701-15	1/10W 47 ohm
R313	119-4701-15	1/10W 47 ohm
R314	119-4701-15	1/10W 47 ohm
R315	119-4701-15	1/10W 47 ohm
R316	119-4701-15	1/10W 47 ohm
R317	119-4701-15	1/10W 47 ohm
R318	119-4701-15	1/10W 47 ohm
R319	119-4701-15	1/10W 47 ohm
R320	119-4701-15	1/10W 47 ohm
R400	119-1031-15	1/10W 10k ohm
R401	119-1031-15	1/10W 10k ohm
R402	119-1031-15	1/10W 10k ohm
R403	119-1031-15	1/10W 10k ohm

REF No.	PART No.	DESCRIPTION
R404	119-0000-05	1/10W 0 ohm JW
R405	119-0000-05	1/10W 0 ohm JW
R406	119-8201-15	1/10W 82 ohm
R407	119-0000-05	1/10W 0 ohm JW
R408	119-0000-05	1/10W 0 ohm JW
R409	119-1031-15	1/10W 10k ohm
R410	119-0000-05	1/10W 0 ohm JW
R415	119-3301-15	1/10W 33 ohm
R416	119-3301-15	1/10W 33 ohm
R417	119-3301-15	1/10W 33 ohm
R418	119-3301-15	1/10W 33 ohm
R500	119-3311-15	1/10W 330 ohm
R501	119-3301-15	1/10W 33 ohm
R502	119-1011-15	1/10W 100 ohm
R503	119-4721-15	1/10W 4.7k ohm
R504	119-2211-15	1/10W 220 ohm
R505	119-1211-15	1/10W 120 ohm
R506	119-1801-15	1/10W 18 ohm
R507	119-2211-15	1/10W 220 ohm
R508	119-5601-15	1/10W 56 ohm
R512	119-0000-05	1/10W 0 ohm JW
R514	032-0140-89	1/10W 47k ohm F
R515	032-0140-50	1/10W 10k ohm F
R516	119-1041-15	1/10W 100k ohm
R517	032-0140-22	1/10W 68k ohm F
R518	032-0140-04	1/10W 8.2k ohm F
R519	119-1511-15	1/10W 150 ohm
R520	119-3301-15	1/10W 33 ohm
R521	119-1511-15	1/10W 150 ohm
R522	119-1511-15	1/10W 150 ohm
R524	119-0000-05	1/10W 0 ohm JW
R600	119-2201-15	1/10W 22 ohm
R601	119-4731-15	1/10W 47k ohm
R602	119-2201-15	1/10W 22 ohm
R603	119-2201-15	1/10W 22 ohm
R604	119-1011-15	1/10W 100 ohm
R605	119-0000-05	1/10W 0 ohm JW
R607	119-5621-15	1/10W 5.6k ohm
R608	119-1021-15	1/10W 1k ohm
R609	119-8201-15	1/10W 82 ohm
R610	119-8201-15	1/10W 82 ohm
R611	119-8201-15	1/10W 82 ohm
R612	119-1031-15	1/10W 10k ohm
R613	119-0000-05	1/10W 0 ohm JW
R614	119-1511-15	1/10W 150 ohm
R700	119-1531-15	1/10W 15k ohm
R701	119-1031-15	1/10W 10k ohm
R702	119-1041-15	1/10W 100k ohm
R703	119-1031-15	1/10W 10k ohm
R704	119-2201-15	1/10W 22 ohm
R705	119-2201-15	1/10W 22 ohm
R706	119-1031-15	1/10W 10k ohm
R711	119-0000-05	1/10W 0 ohm JW
R712	119-2701-15	1/10W 27 ohm
R713	119-2701-15	1/10W 27 ohm
R715	119-1021-15	1/10W 1k ohm
R716	119-1021-15	1/10W 1k ohm
R717	119-1531-15	1/10W 15k ohm
R718	119-1531-15	1/10W 15k ohm
R719	119-1031-15	1/10W 10k ohm
R722	119-1031-15	1/10W 10k ohm
R723	119-0000-05	1/10W 0 ohm JW
R724	119-0000-05	1/10W 0 ohm JW
R727	119-1041-15	1/10W 100k ohm
R812	119-3311-15	1/10W 330 ohm
R813	119-4721-15	1/10W 4.7k ohm
R814	119-2221-15	1/10W 2.2k ohm
R815	119-1031-15	1/10W 10k ohm
R816	119-1531-15	1/10W 15k ohm
R817	119-0000-05	1/10W 0 ohm JW
R818	119-1021-15	1/10W 1k ohm
R819	119-3311-15	1/10W 330 ohm

REF No.	PART No.	DESCRIPTION
R820	119-4711-15	1/10W 470 ohm
R821	119-1031-15	1/10W 10k ohm
R822	119-1031-15	1/10W 10k ohm
R826	119-2231-15	1/10W 22k ohm
R830	119-1031-15	1/10W 10k ohm
R831	119-1031-15	1/10W 10k ohm
R834	119-1031-15	1/10W 10k ohm
R835	119-1031-15	1/10W 10k ohm
R836	119-3311-15	1/10W 330 ohm
R837	119-3311-15	1/10W 330 ohm
R838	119-1041-15	1/10W 100k ohm
R839	119-1041-15	1/10W 100k ohm
R842	119-5611-15	1/10W 560 ohm
R843	119-5611-15	1/10W 560 ohm
R844	119-1041-15	1/10W 100k ohm
R845	119-1041-15	1/10W 100k ohm
R849	119-2231-15	1/10W 22k ohm
R850	119-4721-15	1/10W 4.7k ohm
R900	119-1031-15	1/10W 10k ohm
R901	119-1031-15	1/10W 10k ohm
R902	119-4731-15	1/10W 47k ohm
R903	032-0140-99	1/10W 39k ohm F
R904	032-0140-00	1/10W 56k ohm F
R905	032-0140-54	1/10W 22k ohm F
R906	032-0140-79	1/10W 2.7k ohm F
R907	032-0140-69	1/10W 16k ohm F
R908	119-4721-15	1/10W 4.7k ohm
R909	119-1011-15	1/10W 100 ohm
R910	119-1011-15	1/10W 100 ohm
R911	119-1011-15	1/10W 100 ohm
R912	119-1011-15	1/10W 100 ohm
R913	032-0140-67	1/10W 3.3k ohm F
R914	119-4731-15	1/10W 47k ohm
R915	032-0140-81	1/10W 3.9k ohm F
R916	119-1031-15	1/10W 10k ohm
R918	119-4731-15	1/10W 47k ohm
R920	119-1031-15	1/10W 10k ohm
R921	119-1211-15	1/10W 120 ohm
R922	119-1031-15	1/10W 10k ohm
R924	119-1011-15	1/10W 100 ohm
R926	119-4731-15	1/10W 47k ohm
R927	119-1031-15	1/10W 10k ohm
R928	119-4731-15	1/10W 47k ohm
R929	119-1011-15	1/10W 100 ohm
R930	119-1011-15	1/10W 100 ohm
R931	119-3321-15	1/10W 3.3k ohm
R939	119-1011-15	1/10W 100 ohm
R940	119-4731-15	1/10W 47k ohm
R941	119-1011-15	1/10W 100 ohm
R942	119-1011-15	1/10W 100 ohm
R943	119-1011-15	1/10W 100 ohm
R944	119-1011-15	1/10W 100 ohm
R945	119-4731-15	1/10W 47k ohm

REF No.	PART No.	DESCRIPTION
R948	119-4731-15	1/10W 47k ohm
R949	119-4731-15	1/10W 47k ohm
R950	119-0000-05	1/10W 0 ohm JW
R951	119-1021-15	1/10W 1k ohm
R952	119-1021-15	1/10W 1k ohm
R953	119-1031-15	1/10W 10k ohm
R955	119-1031-15	1/10W 10k ohm
R1000	119-1031-15	1/10W 10k ohm
R1004	119-1031-15	1/10W 10k ohm
R1005	119-3921-15	1/10W 3.9k ohm
R1006	032-0140-03	1/10W 220k ohm F
R1007	032-0140-88	1/10W 100k ohm F
R1008	032-0140-63	1/10W 27k ohm F
R1009	119-1021-15	1/10W 1k ohm
R1010	119-2241-15	1/10W 220k ohm
R1011	119-2201-15	1/10W 22 ohm
R1012	119-0000-05	1/10W 0 ohm JW
R1013	032-0140-51	1/10W 15k ohm F
R1014	032-0140-05	1/10W 82k ohm F
R1015	032-0140-67	1/10W 3.3k ohm F
R1016	119-0000-05	1/10W 0 ohm JW
R1017	119-1031-15	1/10W 10k ohm
R1018	119-3321-15	1/10W 3.3k ohm
R1019	119-0000-05	1/10W 0 ohm JW
R1020	119-0000-05	1/10W 0 ohm JW
R1021	032-0140-52	1/10W 33k ohm F
R1022	032-0140-52	1/10W 33k ohm F
R1023	032-0140-05	1/10W 82k ohm F
R1024	032-0140-63	1/10W 27k ohm F
R1025	119-0000-05	1/10W 0 ohm JW
R1026	032-0140-62	1/10W 1k ohm F
R1027	032-0140-79	1/10W 2.7k ohm F
R1028	032-0140-79	1/10W 2.7k ohm F
R1029	032-0140-62	1/10W 1k ohm F
R1030	119-0000-05	1/10W 0 ohm JW
R1031	119-0000-05	1/10W 0 ohm JW
R1032	119-0000-05	1/10W 0 ohm JW
R1033	119-0000-05	1/10W 0 ohm JW
R1034	119-9121-15	1/10W 9.1k ohm
R1035	119-7521-15	1/10W 7.5k ohm
R1036	119-1031-15	1/10W 10k ohm
R1040	119-0000-05	1/10W 0 ohm JW
R1044	116-1011-15	1/4W 100 ohm
R1045	116-1011-15	1/4W 100 ohm
R1046	116-1011-15	1/4W 100 ohm
R1047	116-1011-15	1/4W 100 ohm
R1048	116-1011-15	1/4W 100 ohm
R1049	116-1011-15	1/4W 100 ohm
R1050	119-4721-15	1/10W 4.7k ohm
R1051	119-1031-15	1/10W 10k ohm
R1052	119-1031-15	1/10W 10k ohm
R1053	119-2211-15	1/10W 220 ohm
R1054	119-1021-15	1/10W 1k ohm

REF No.	PART No.	DESCRIPTION
R1055	119-1031-15	1/10W 10k ohm
R1056	032-0140-94	1/10W 30k ohm F
R1057	032-0140-88	1/10W 100k ohm F
R1058	032-0140-93	1/10W 2k ohm F
R1100	117-2211-15	1/8W 220 ohm
R1101	117-2211-15	1/8W 220 ohm
R1102	119-3331-15	1/10W 33k ohm
R1103	119-1031-15	1/10W 10k ohm
R1104	119-1031-15	1/10W 10k ohm
R1105	119-1021-15	1/10W 1k ohm
R1106	119-5641-15	1/10W 560k ohm
R1108	119-4721-15	1/10W 4.7k ohm
R1109	119-1011-15	1/10W 100 ohm
R1110	116-3321-15	1/4W 3.3k ohm
R1111	032-0106-79	1/10W 75 ohm D
R1112	032-0106-79	1/10W 75 ohm D
R1113	032-0106-79	1/10W 75 ohm D
R1114	119-1231-15	1/10W 12k ohm
R1115	119-2231-15	1/10W 22k ohm
R1116	117-2231-15	1/8W 22k ohm
R1117	119-3321-15	1/10W 3.3k ohm
R1118	119-4731-15	1/10W 47k ohm
R1119	117-2231-15	1/8W 22k ohm
R1120	119-3321-15	1/10W 3.3k ohm
R1121	119-4731-15	1/10W 47k ohm
R1122	119-1041-15	1/10W 100k ohm
R1123	119-1041-15	1/10W 100k ohm
R1124	119-1041-15	1/10W 100k ohm
R1126	119-1051-15	1/10W 1M ohm
R1127	119-1051-15	1/10W 1M ohm
R1128	119-1051-15	1/10W 1M ohm
R1132	032-0140-62	1/10W 1k ohm F
R1133	032-0140-83	1/10W 150 ohm F
R1134	032-0140-83	1/10W 150 ohm F
R1135	119-1051-15	1/10W 1M ohm
R1136	119-1041-15	1/10W 100k ohm
R1137	032-0106-79	1/10W 75 ohm D
R1138	119-1531-15	1/10W 15k ohm
S900	013-6102-00	SKHLLF
S901	013-6312-50	SKRP-ABE-010
T1100	009-0621-07	CHOKE 1.4mH
TM1000	073-0766-90	TERMINAL
TM1004	073-0766-90	TERMINAL
TM1013	073-0766-90	TERMINAL
TM1014	073-0766-90	TERMINAL
X100	061-4531-90	14.31818MHz
X101	061-4539-90	48MHz 2725T
X102	061-4538-90	8.46MHz
X900	060-1533-90	CSTCE10M0G52-RO
PWB	039-2935-00	PWB(WITHOUT COMPONENTS)