


1 2 3 4

9. EXPLODED VIEWS AND PARTS LIST

NOTES:

- Parts marked by “NSP” are generally unavailable because they are not in our Master Spare Parts List.
- The  mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
- Screws adjacent to ▼ mark on product are used for disassembly.
- For the applying amount of lubricants or glue, follow the instructions in this manual.
(In the case of no amount instructions, apply as you think it appropriate.)

9.1 PACKING SECTION

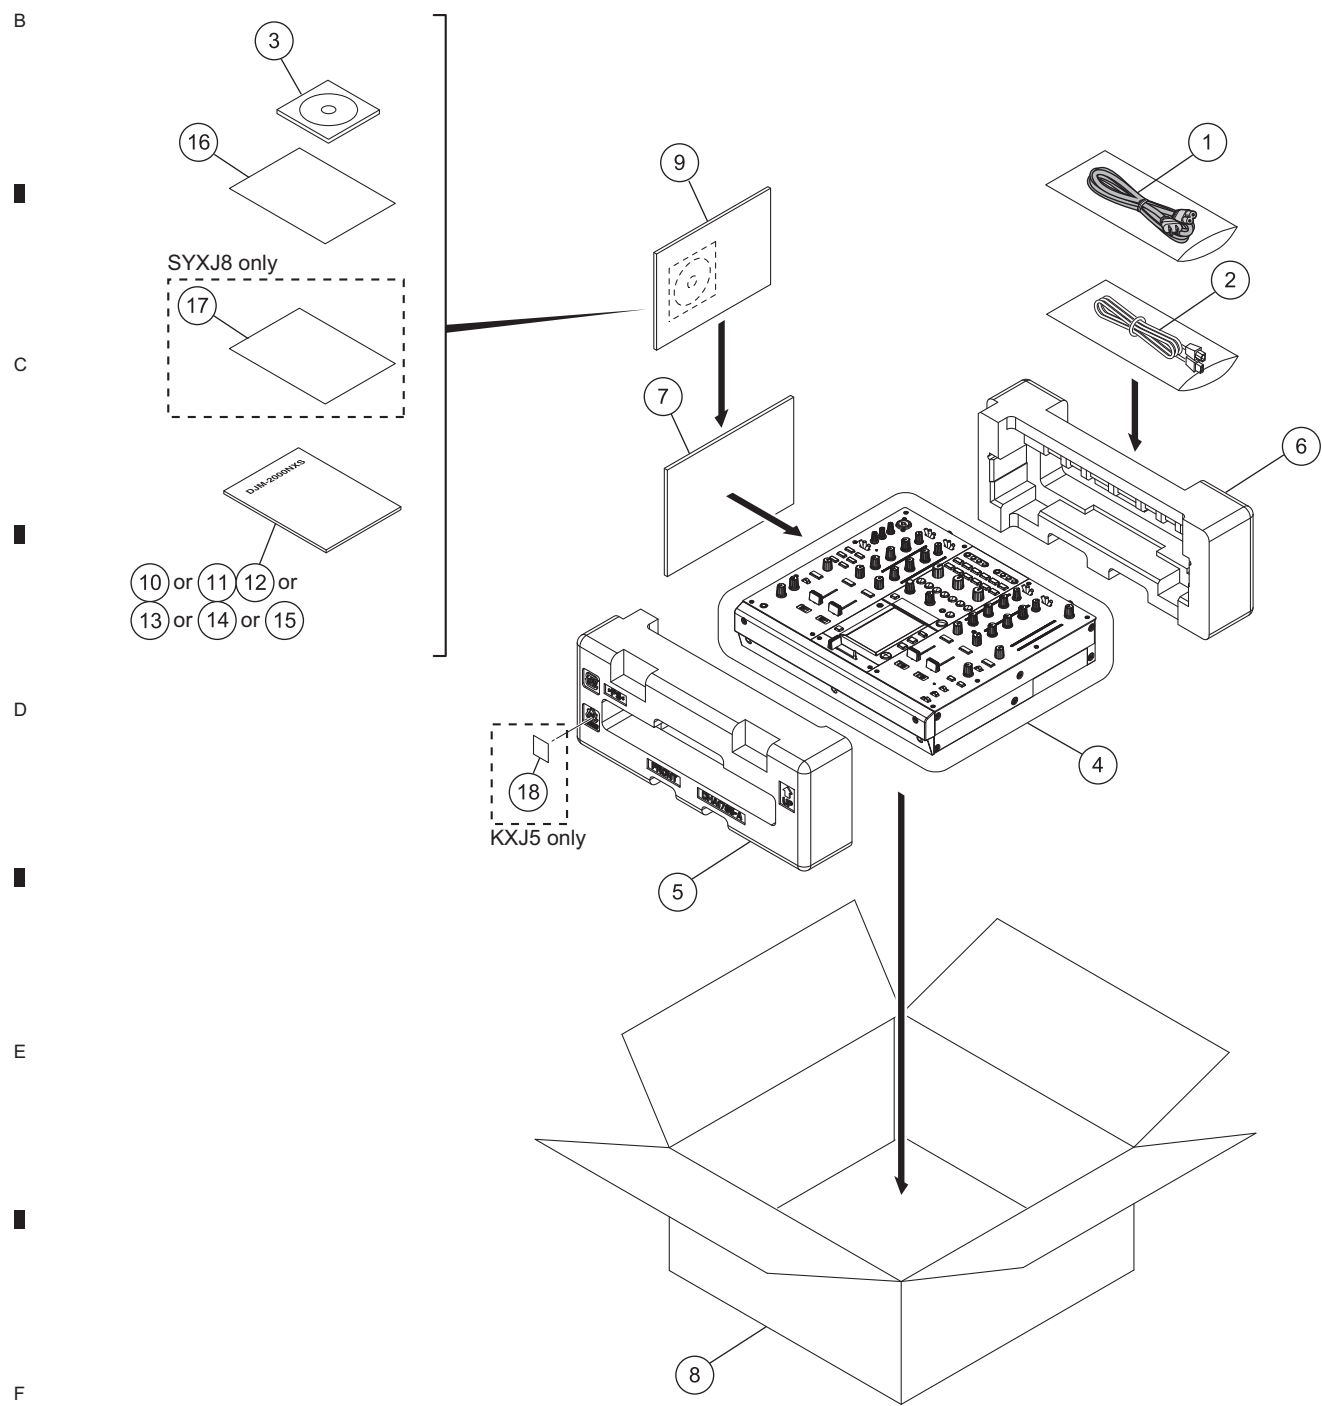

(1) PACKING SECTION PARTS LIST


<u>Mark</u>	<u>No.</u>	<u>Description</u>	<u>Part No.</u>
⚠	1	Power Cable	See Contrast table (2)
	2	USB Cable	DDE1128
	3	CD-ROM	DXX2694
	4	Mirror Mat (1200*1000)	DHL1169
	5	Pad F (DJM-2000)	DHA1785
	6	Pad R (DJM-2000)	DHA1786
	7	Pad/ACC	DHA1893
	8	Packing Case	See Contrast table (2)
NSP	9	Polyethylene Bag	AHG7117
	10	Operating Instructions	See Contrast table (2)
	11	Operating Instructions	See Contrast table (2)
	12	Operating Instructions	See Contrast table (2)
	13	Operating Instructions	See Contrast table (2)
	14	Operating Instructions	See Contrast table (2)
	15	Operating Instructions	See Contrast table (2)
NSP	16	Leaflet	See Contrast table (2)
NSP	17	Warranty	See Contrast table (2)
NSP	18	Label/RCY	See Contrast table (2)

(2) CONTRAST TABLE

DJM-2000NXS/CUXJ, SYXJ8, LXJ, KXJ5 and XJCN5 are constructed the same except for the following:

Mark	No.	Symbol and Description	DJM-2000NXS /CUXJ	DJM-2000NXS /SYXJ8	DJM-2000NXS /LXJ	DJM-2000NXS /KXJ5	DJM-2000NXS /XJCN5
⚠	1	Power Cable	DDG1108	ADG7062	ADG7062	ADG7115	ADG7105
	8	Packing Case	DHG3177	DHG3176	DHG3178	DHG3181	DHG3180
	10	Operating Instructions	DRB1634	Not used	Not used	Not used	Not used
	11	Operating Instructions	Not used	DRB1635	Not used	Not used	Not used
	12	Operating Instructions	Not used	DRB1648	Not used	Not used	Not used
	13	Operating Instructions	Not used	Not used	DRB1636	Not used	Not used
	14	Operating Instructions	Not used	Not used	Not used	DRB1638	Not used
	15	Operating Instructions	Not used	Not used	Not used	Not used	DRB1637
NSP	16	Leaflet	DRH1201	DRH1201	DRH1201	DRH1200	DRH1200
NSP	17	Warranty	Not used	ARY7158	Not used	Not used	Not used
NSP	18	Label/RCY	Not used	Not used	Not used	DRW2541	Not used

9.2 EXTERIOR SECTION

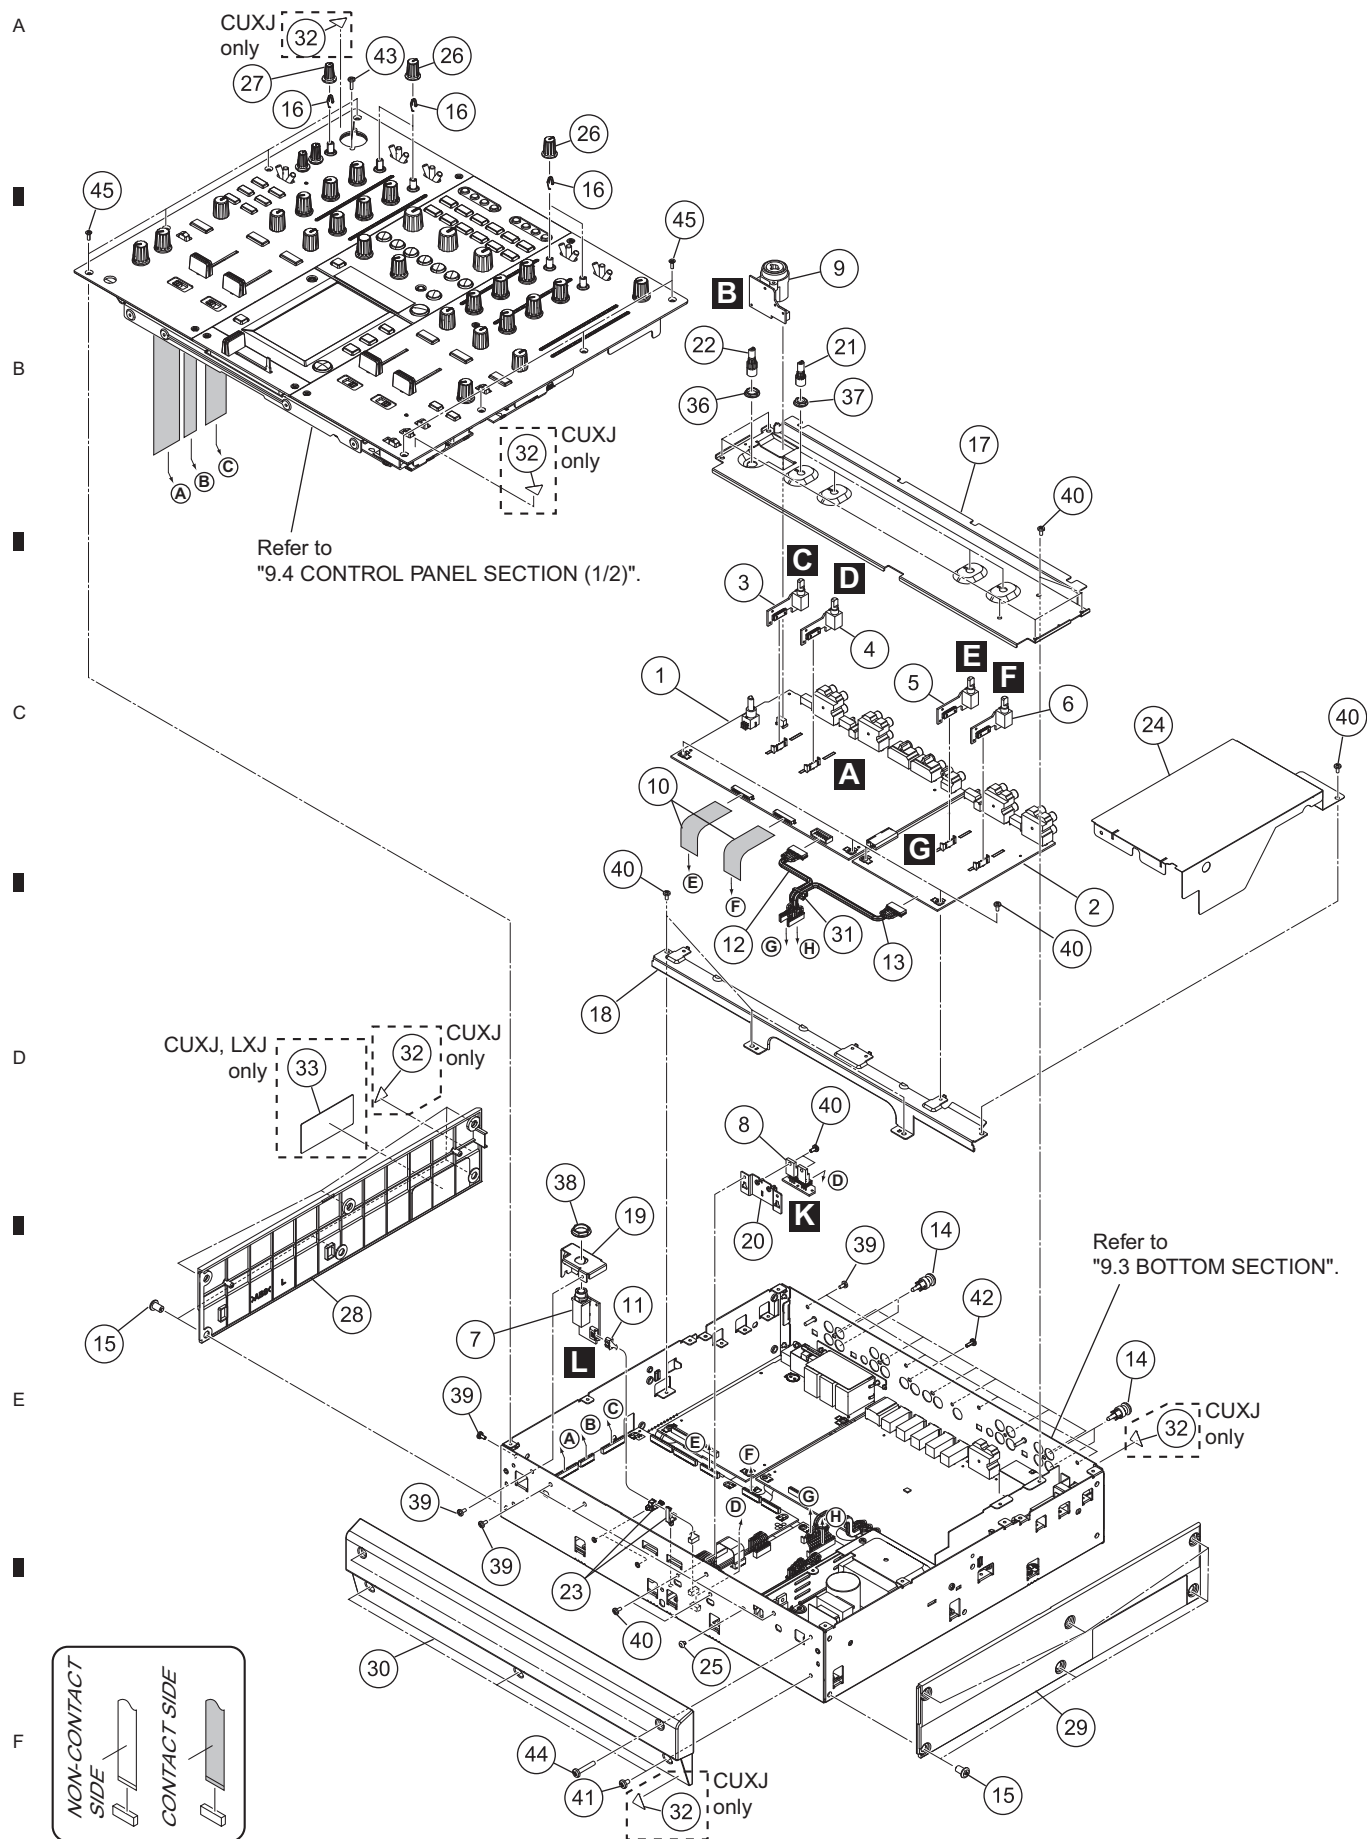

(1) EXTERIOR SECTION PARTS LIST

Mark No.	Description	Part No.	Mark No.	Description	Part No.	
1	AIN1 Assy	DWX2922	26	Rotary SW Knob S (C)	DAA1204	
2	AIN2 Assy	DWX2923	27	Knob/RSW	DAA1308	A
3	TRIM1 Assy	DWX2935	28	Side Panel L	DNK5363	
4	TRIM2 Assy	DWX2936	29	Side Panel R	DNK5364	
5	TRIM3 Assy	DWX2937	30	Front Panel	DNK6141	
6	TRIM4 Assy	DWX2938	31	Binder	ZCA-SKB90BK	
7	HPJK Assy	DWX3421	NSP 32	Label	See Contrast table (2)	
8	HREG Assy	DWX3423	NSP 33	Caution Label	See Contrast table (2)	
9	MCJK Assy	DWX2934	34	•••••		
10	20P FFC	DDD1510	35	•••••		
11	Connector Assy	PF04PP-D20	36	Flange Nut M9	DBN1008	B
12	Connector Assy	PF07EE-D10	37	Flange Nut M7	DBN1011	
13	Connector Assy	PF07EE0D12	38	Nut M12	DBN1018	
14	Plug/Pin	DKM1024	39	Screw	BBZ30P060FTB	
15	Rivet (Plastic)	AEC1877	40	Screw	BBZ30P060FTC	
16	Spring/VI4	DBH1788	41	Screw	BCZ40P060FTB	
17	Trim Stay	DNF1813	42	Screw	BPZ30P080FTB	
18	Input Stay	DNF1819	43	Screw	BPZ30P100FTB	
19	HP Stay	DNF1820	44	Screw	BSZ40P220FTB	
20	Heatsink	DNF1850	45	Screw	CCZ30P080FTB	C
21	Extension Shaft A	DNK5365				
22	Extension Shaft B	DNK5366				
23	Locking Mini Clamp	DEC2439				
24	Barrier (W)	DEC3271				
25	Push Rivet	XEC3034				

(2) CONTRAST TABLE

DJM-2000NXS/CUXJ, SYXJ8, LXJ, KXJ5 and XJCN5 are constructed the same except for the following:

Mark	No.	Symbol and Description	DJM-2000NXS /CUXJ	DJM-2000NXS /SYXJ8	DJM-2000NXS /LXJ	DJM-2000NXS /KXJ5	DJM-2000NXS /XJCN5
NSP	32	Label	DRW1975	Not used	Not used	Not used	Not used
NSP	33	Caution Label	DRW2429	Not used	DRW2430	Not used	Not used

9.3 BOTTOM SECTION

A


B

C

D

E

F

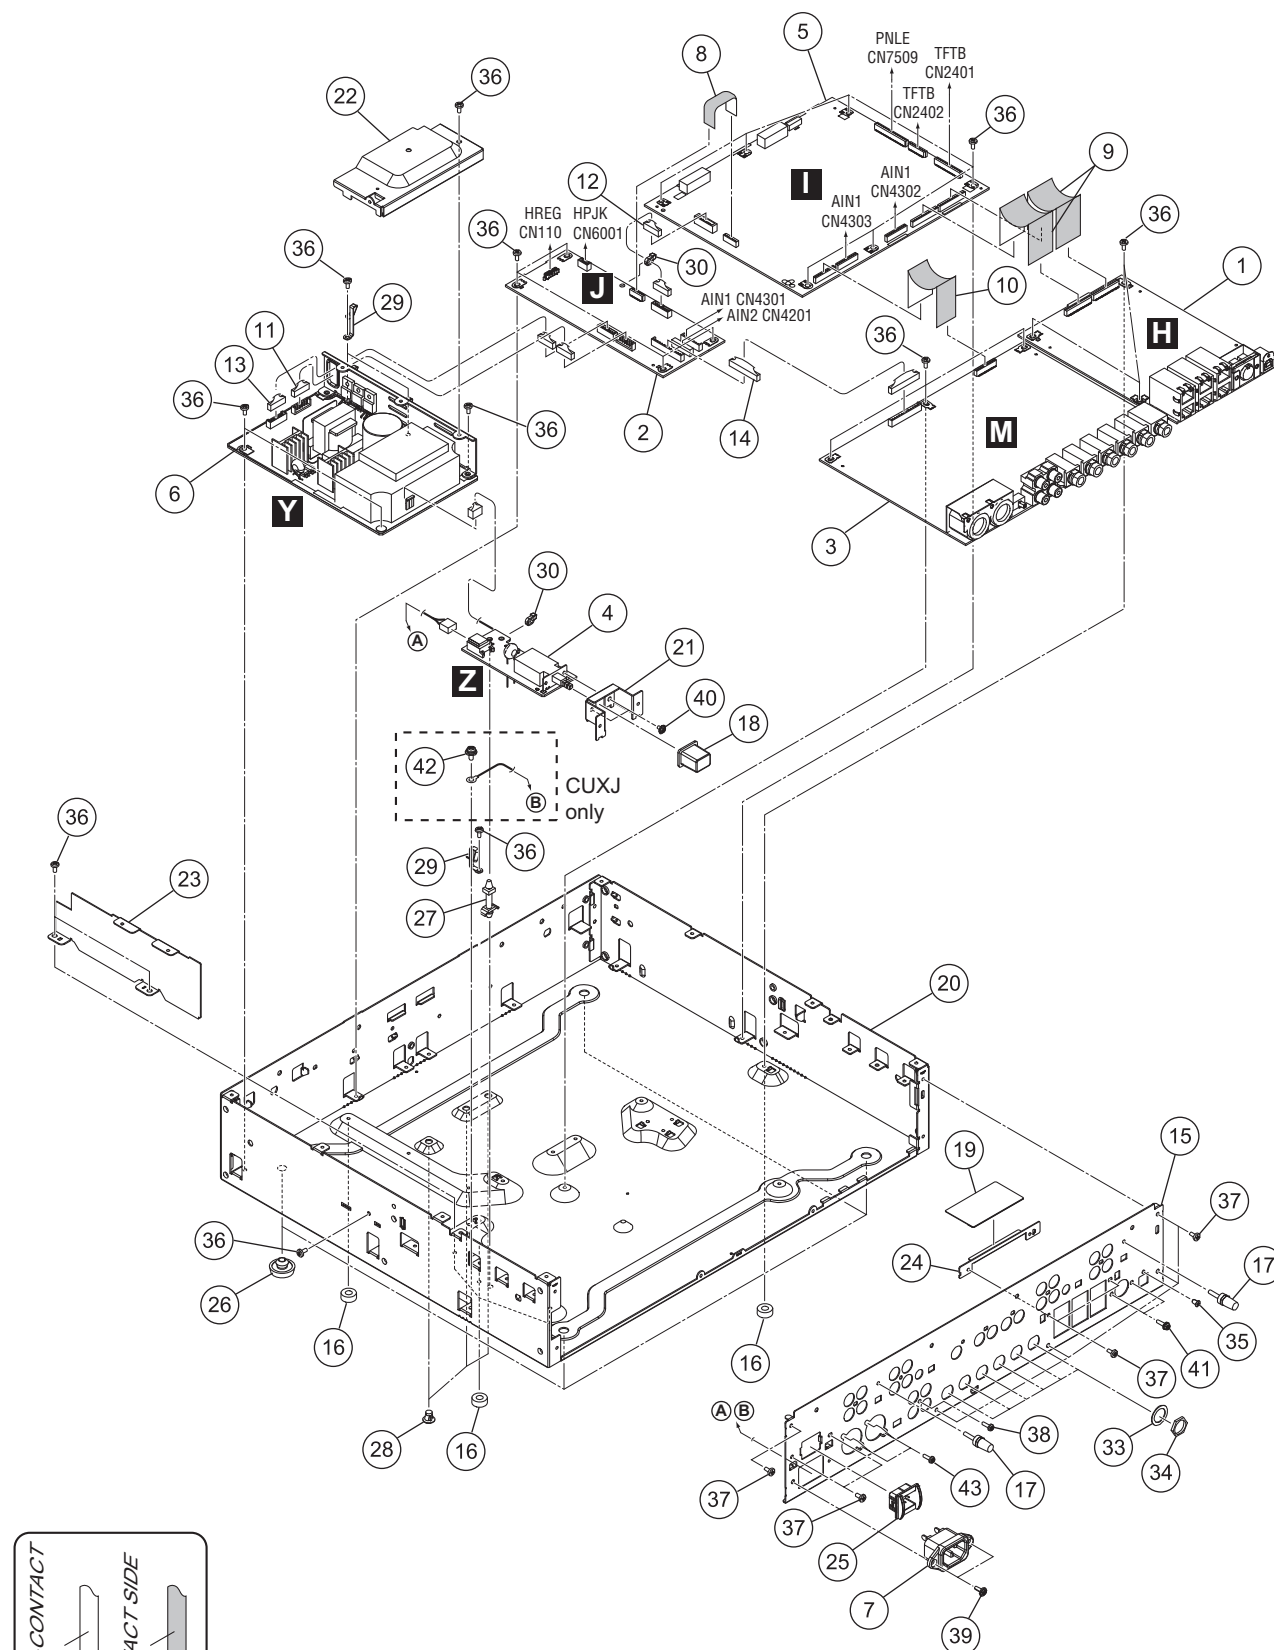

(1) BOTTOM SECTION PARTS LIST


Mark No.	Description	Part No.	Mark No.	Description	Part No.	
	1 PCIF Assy	DWX2925	21	Bracket PSW	DNF1759	
	2 HAMP Assy	DWX3422	22	Power Shield	DNF1815	A
	3 AOUT Assy	DWX3420	23	AC Shield	DNF1816	
	4 ACSW Assy	DWX2918	24	Earth Plate	DNF1858	
	5 MAIN Assy	DWX3424	25	Power Knob Guard	DNK4534	
⚠	6 POWER SUPPLY Assy	DWR1492	26	Foot (Rubber)	REC-434	
⚠	7 AC Inlet Assy	See Contrast table (2)	NSP 27	PC Support	VEC1584	
	8 12P FFC	DDD1507	NSP 28	PC Support	VEC1749	
	9 26P FFC	DDD1509	29	Cord Clamper (Steel)	RNH-184	
	10 20P FFC	DDD1510	30	Binder	ZCA-SKB90BK	
	11 Connector Assy	PF06EE-D20	31	•••••		B
	12 Connector Assy	PF08PP-D10	32	•••••		
	13 Connector Assy	PF08PP-D20	33	Washer	DEC2920	
	14 Connector Assy	PF12EE-D10	34	Nut (M12)	NKX2FNI	
	15 Rear Panel	See Contrast table (2)	35	Screw (M3*5)	DBA1340	
NSP	16 Spacer	AEB7092	36	Screw	BBZ30P060FTC	
	17 Terminal Screw	AKE-031	37	Screw	BBZ30P060FTB	
	18 Power Knob	DAC2306	38	Screw	BPZ30P080FTB	
	19 Barrier (LAN)	DEC3169	39	Screw	IBZ30P080FTB	
NSP	20 Chassis	DNA1362	40	Screw	IMZ30P040FTC	C
			41	Screw	PMH30P100FTB	
			42	Screw	See Contrast table (2)	
			43	Screw	PPZ30P080FTB	

(2) CONTRAST TABLE

DJM-2000NXS/CUXJ, SYXJ8, LXJ, KXJ5 and XJCN5 are constructed the same except for the following:

Mark	No.	Symbol and Description	DJM-2000NXS /CUXJ	DJM-2000NXS /SYXJ8	DJM-2000NXS /LXJ	DJM-2000NXS /KXJ5	DJM-2000NXS /XJCN5	
⚠	7	AC Inlet Assy/3P	DKP3927	Not used	Not used	Not used	Not used	D
⚠	7	AC Inlet Assy/2P	Not used	DKP3762	DKP3762	DKP3762	DKP3762	
	15	Rear Panel	DNC2091	DNC2091	DNC2091	DNC2091	DNC2092	
	42	Screw	PMH40P080FTC	Not used	Not used	Not used	Not used	

9.4 CONTROL PANEL SECTION (1/2)

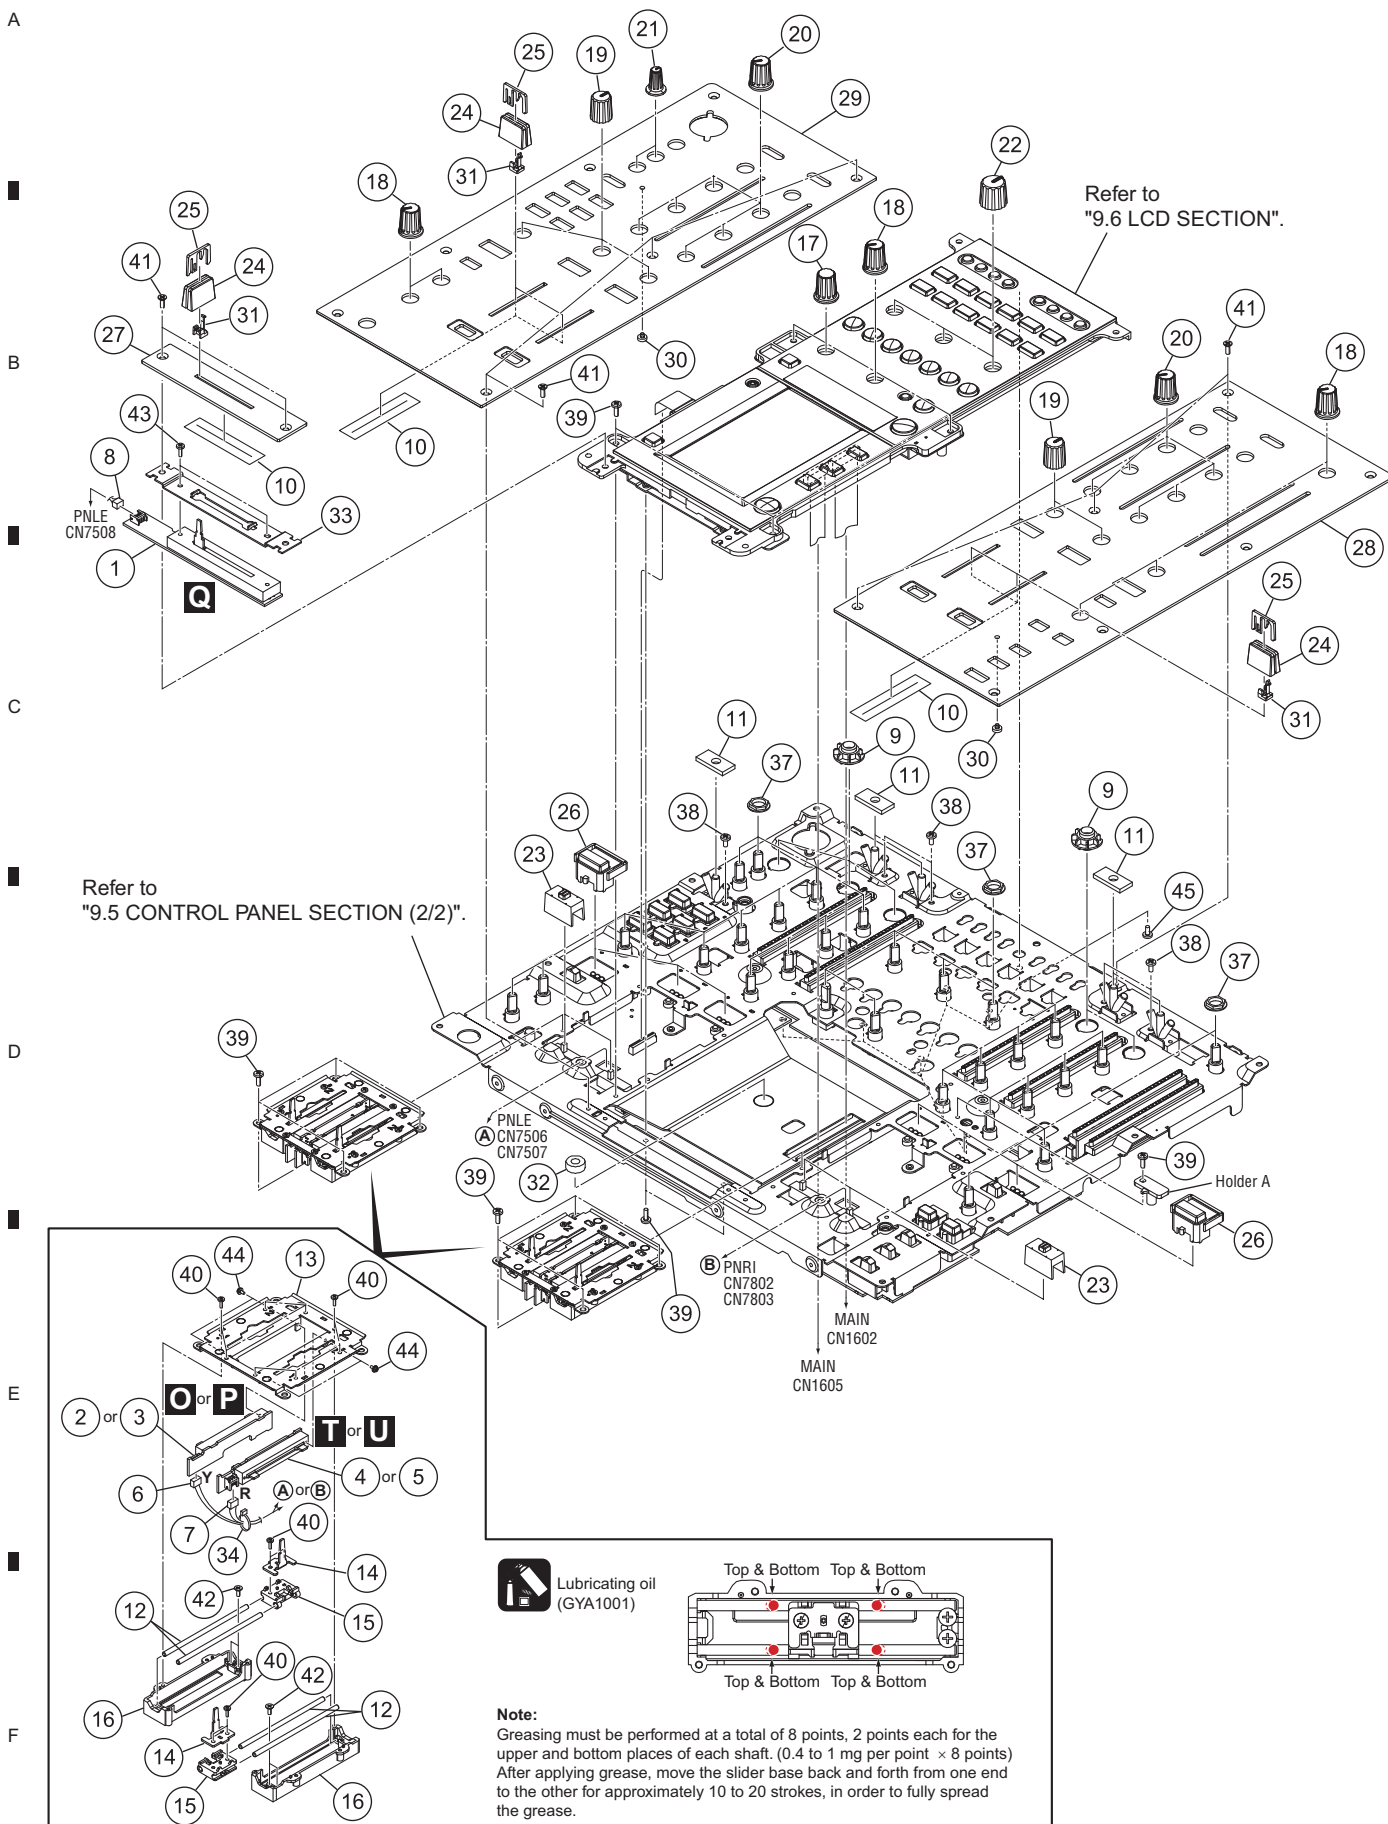


CONTROL PANEL SECTION (1/2) PARTS LIST

Mark No.	Description	Part No.	
	1 CRFD Assy	DWX3415	
	2 CFD1 Assy	DWX3416	A
	3 CFD2 Assy	DWX3417	
	4 CFD3 Assy	DWX3418	
	5 CFD4 Assy	DWX3419	
	6 Connector Assy	PF03PP2B12	
	7 Connector Assy	PF03PP4B12	
	8 Connector Assy	PF03PP-B10	
	9 Bush	DNK5367	
	10 Fader Packing	DEC2903	
	11 SW Packing	DED1177	B
NSP	12 Guide Shaft (S)	DLA1918	
	13 Stay/CHF	DNF1925	
	14 Lever Plate	DNH2954	
	15 Slider Base	DNK5851	
	16 Shaft Holder	DNK5852	
	17 Rotary SW Knob (C)	DAA1180	
	18 Rotary Knob (BN)	DAA1220	
	19 Knob (RES)	DAA1250	
	20 Knob/RSW	DAA1305	C
	21 Knob/RSW	DAA1307	
	22 Knob/FRE	DAA1309	
	23 Slide SW Cap (W)	DAC2401	
	24 Slider Knob 1	DAC2684	
	25 Slider Knob 2	DAC2685	
	26 Button/CUE	DAC2882	
	27 Panel/CRF	DAH2913	
	28 Control Panel R	DNB1205	
	29 Control Panel L	DNB1206	D
	30 Lens	DNK4532	
	31 Slider Knob Stopper	DNK5888	
NSP	32 Spacer	AEB7092	
	33 CRF Stay	DNF1855	
	34 Binder	ZCA-SKB90BK	
	35		
	36		
	37 Flange Nut M9	DBN1008	
	38 Screw	AMZ26P040FTC	E
	39 Screw	BBZ30P060FTC	
	40 Screw	BPZ20P060FTC	
	41 Screw	CCZ30P080FTB	
	42 Screw	CPZ26P080FTC	
	43 Screw	IMZ30P040FTC	
	44 Screw	PMH20P040FTC	
	45 Screw	BPZ30P080FTB	

1 2 3 4

9.5 CONTROL PANEL SECTION (2/2)

A • Bottom view

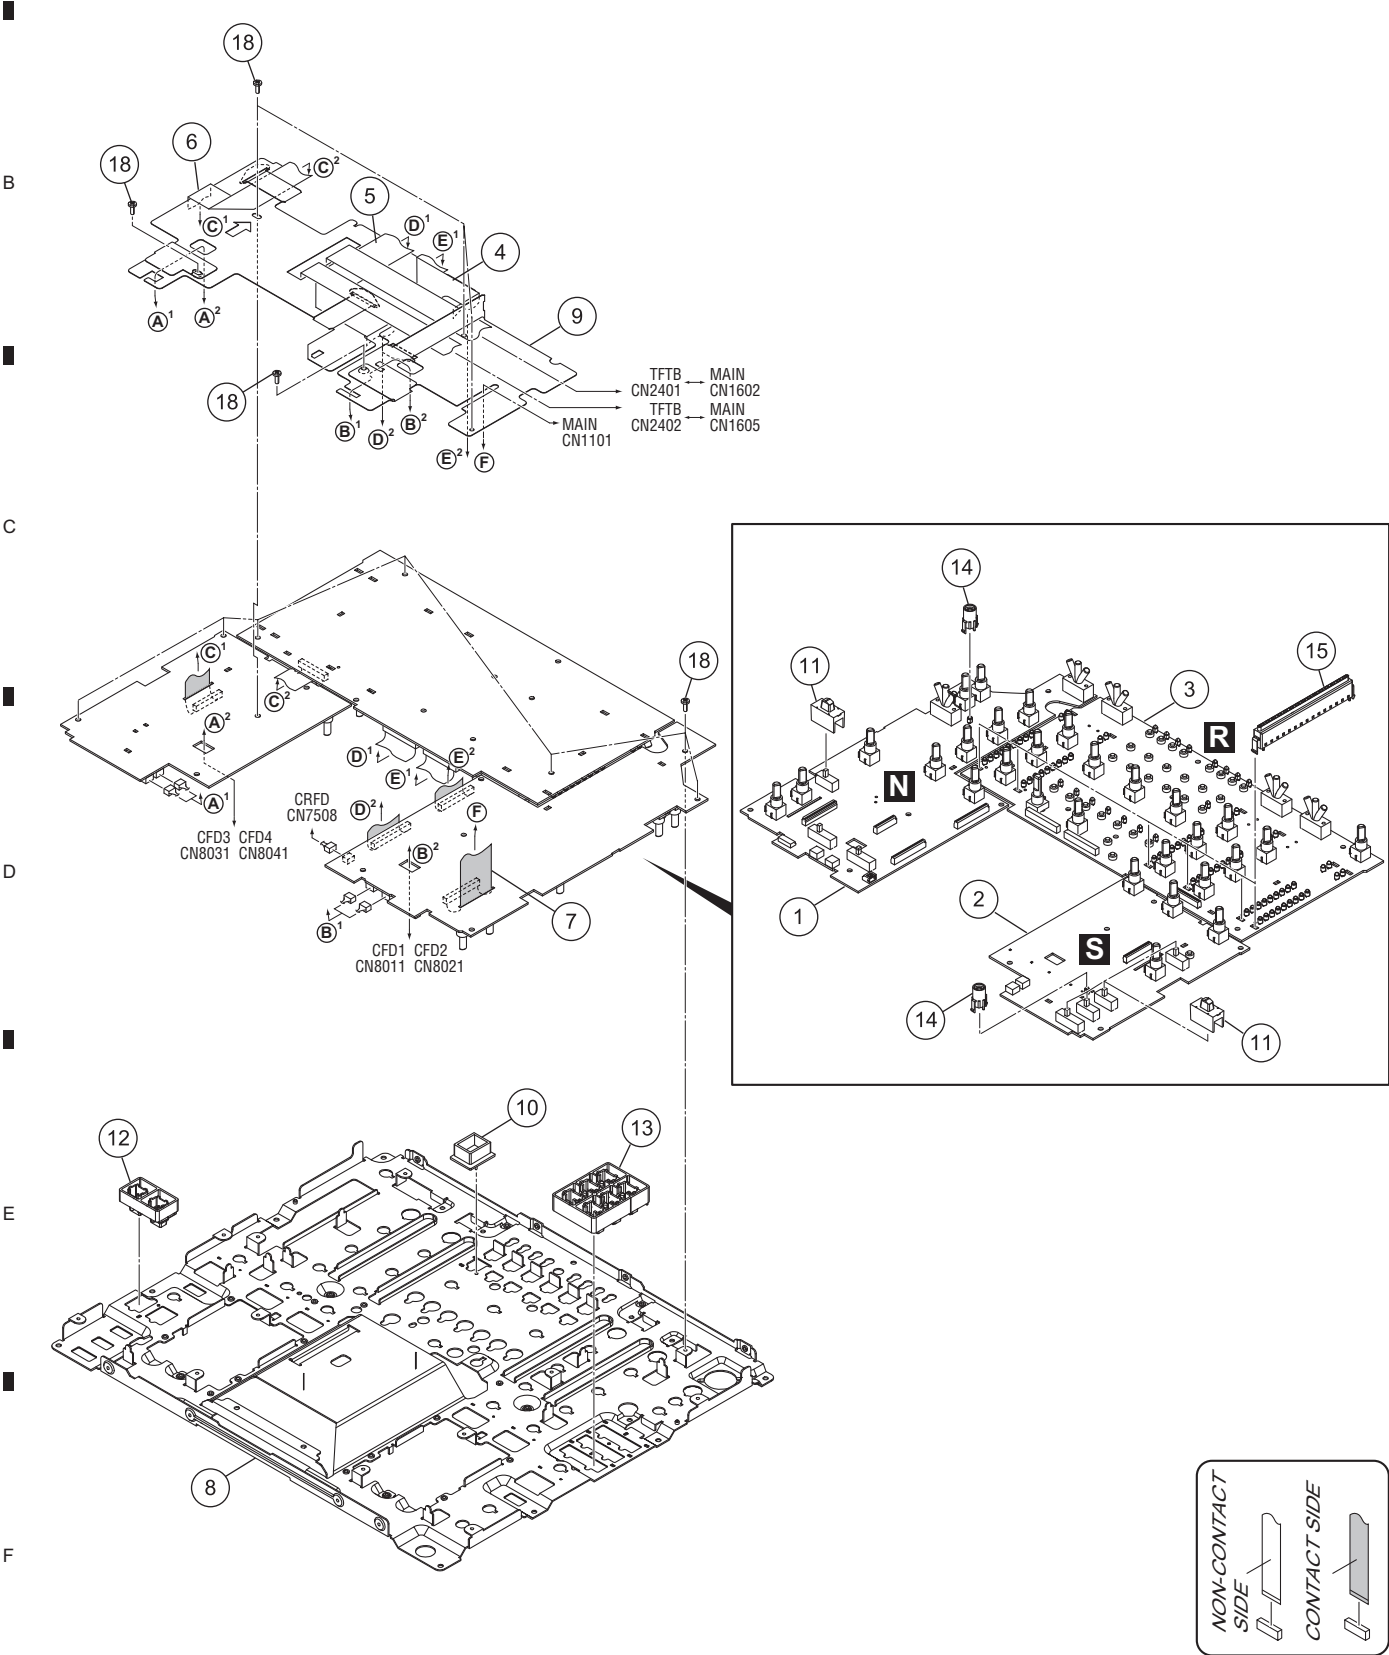

A

B

C


D

E

F


9.6 LCD SECTION

A • Bottom view

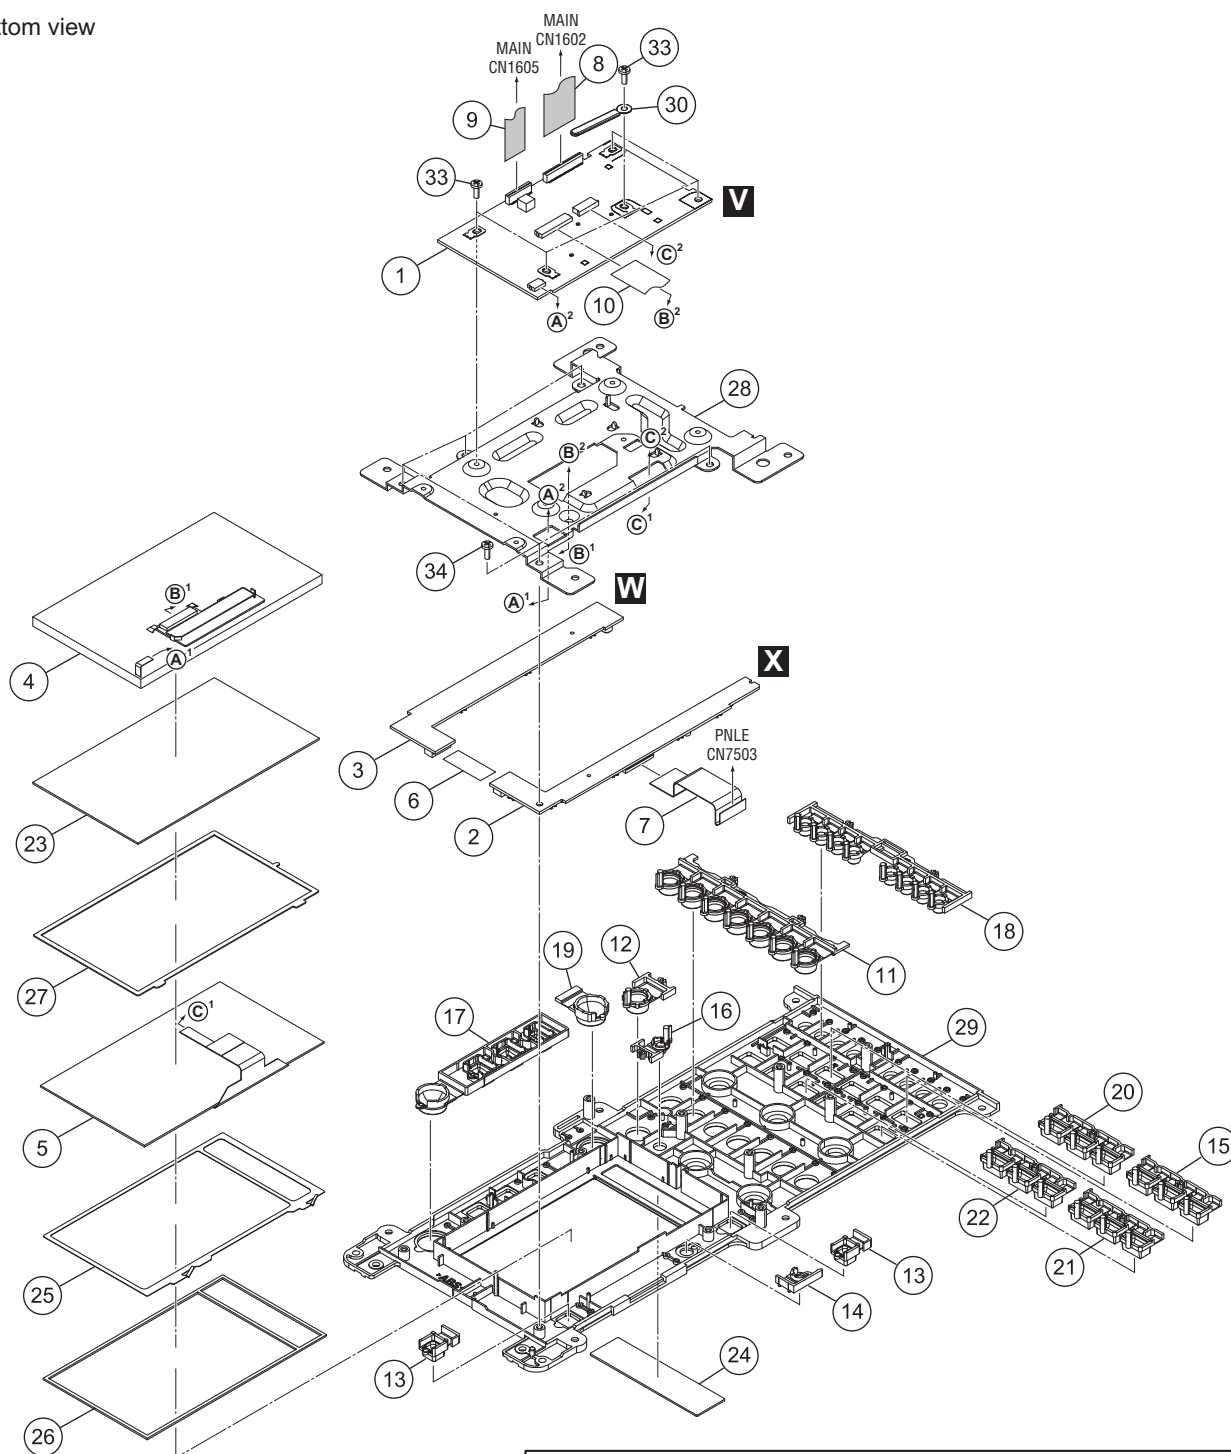


Note:

The shape of the groups of buttons 15, 20, 21, and 22 is the same. To identify the attachment position of each group of buttons during reassembly, the initial letter of the name of the left button of a group is engraved on the back of the Center panel (No. 29).

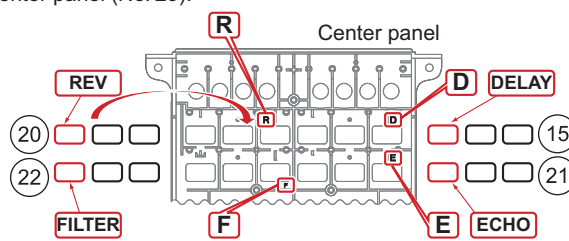

• Bottom view



LCD SECTION PARTS LIST

Mark No.	Description	Part No.	
1	TFTB Assy	DWX2921	A
2	TPLE Assy	DWX3010	
3	TPRI Assy	DWX3011	
4	LCD	CWX3868	
5	Touch Panel	DSX1085	
6	12P FFC	DDD1507	
7	19P FFC	DDD1513	
8	26P FFC	DDD1514	
9	16P FFC	DDD1515	
10	40P FFC	DDD1541	
11	Button/BEAT	DAC2881	B
12	Button/TAP	DAC2883	
13	Button/CUES	DAC2884	
14	Button (SETTING)	DAC2506	
15	Button/FXA	DAC2886	
16	Button (AUTO)	DAC2508	
17	Button/REMIX	DAC2888	
18	Button/SEL	DAC2891	
19	Button (FX)	DAC2513	
20	Button/FXB	DAC2893	
21	Button/FXC	DAC2894	C
22	Button/FXD	DAC2895	
23	Protect Plate	DAH2767	
24	Display Plate (PC)	DAH2768	
25	TFT Earth Spring	DBK1367	
26	Touch Panel Pad	DEC3168	
27	Touch Panel Spacer	DEC3269	
28	LCD Stay	DNF1818	
29	Center Panel	DNK6140	
30	Cord Clamper (Steel)	RNH-184	
31			
32			
33	Screw	BBZ30P060FTC	
34	Screw	BPZ30P080FTB	
			E
			F

12. PCB PARTS LIST

- NOTES: ● Parts marked by “NSP” are generally unavailable because they are not in our Master Spare Parts List.
 ● The $\triangle$ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
 ● When ordering resistors, first convert resistance values into code form as shown in the following examples.

Ex.1 When there are 2 effective digits (any digit apart from 0), such as 560 ohm and 47 k ohm (tolerance is shown by J = 5%, and K = 10%).

560 Ω $\rightarrow$ 56 $\times 10^1$ $\rightarrow$ 561.....RD1/4PU $\begin{bmatrix} 5 \\ 6 \end{bmatrix} \begin{bmatrix} 1 \\ 0 \end{bmatrix} J$
 47 k Ω $\rightarrow$ 47 $\times 10^3$ $\rightarrow$ 473.....RD1/4PU $\begin{bmatrix} 4 \\ 7 \end{bmatrix} \begin{bmatrix} 3 \\ 0 \end{bmatrix} J$
 0.5 Ω $\rightarrow$ R50.....RN2H $\begin{bmatrix} R \\ 5 \end{bmatrix} \begin{bmatrix} 0 \\ 0 \end{bmatrix} K$
 1 Ω $\rightarrow$ 1R0.....RS1P $\begin{bmatrix} 1 \\ R \end{bmatrix} \begin{bmatrix} 0 \\ 0 \end{bmatrix} K$

Ex.2 When there are 3 effective digits (such as in high precision metal film resistors).

5.62 k Ω $\rightarrow$ 562 $\times 10^1$ $\rightarrow$ 5621.....RN1/4PC $\begin{bmatrix} 5 \\ 6 \end{bmatrix} \begin{bmatrix} 2 \\ 1 \end{bmatrix} F$

- Meaning of the figures and others in the parentheses in the parts list.
 Example) IC 301 is on the point (face A, 91 of x-axis, and 111 of y-axis) of the corresponding PC board.
 IC 301 (A, 91, 111) IC NJM2068V

Mark No. Description Part No.

LIST OF ASSEMBLIES

NSP	1..A1TF ASSY	DWM2334
	2..TFTB ASSY	DWX2921
	2..AIN1 ASSY	DWX2922
	2..TRIM1 ASSY	DWX2935
	2..TRIM2 ASSY	DWX2936
NSP	1..A1PC ASSY	DWM2335
	2..AIN2 ASSY	DWX2923
	2..PCIF ASSY	DWX2925
	2..TRIM3 ASSY	DWX2937
	2..TRIM4 ASSY	DWX2938
	2..TPLE ASSY	DWX3010
	2..TPRI ASSY	DWX3011
NSP	1..PNLB ASSY	DWM2483
	2..PNLE ASSY	DWX3413
	2..PNRI ASSY	DWX3414
	2..CRFD ASSY	DWX3415
	2..CFD1 ASSY	DWX3416
	2..CFD2 ASSY	DWX3417
	2..CFD3 ASSY	DWX3418
	2..CFD4 ASSY	DWX3419
NSP	1..OUHP ASSY	DWM2484
	2..AOUT ASSY	DWX3420
	2..HPJK ASSY	DWX3421
	2..HAMP ASSY	DWX3422
	2..HREG ASSY	DWX3423
NSP	1..PNLA ASSY	DWM2485
	2..ACSW ASSY	DWX2918
	2..MCJK ASSY	DWX2934
	2..PNCE ASSY	DWX3426
	1..MAIN ASSY	DWX3424
$\triangle$	1..POWER SUPPLY ASSY	DWR1492

Mark No. Description Part No.

IC 3002	TC74VHC74F1S1
IC 3003,3302	CS5381-KZ
IC 3007,3306	RNB4580F
IC 3300,3301,3303-3305	NJM4580MD
IC 4300-4303	TC7WU04FU
IC 4314-4319	TC7SH08FUS1
IC 4900	NJM4580MD
IC 4901	AK5358AET
Q 3000,3001,3003,3004	2SK3320
Q 3002,3005-3009,3011	KTC801U
Q 3010,3308,3309,3314	RT1N241M
Q 3012,3013,3301,3302	2SK3320
Q 3014-3016,3300,3303	KTC801U
Q 3304,3307,3310-3313	KTC801U
Q 3305,3306,3316,3317	2SK3320
Q 3315,3318-3320	KTC801U
Q 4501	2SC2412K
Q 4900,4901	2SK209
D 3000,3001,3301,3302	1SS355
D 3002-3005,3303-3306	RB706D-40
D 3300	RKZ5.6KG(B2)
D 4904	UDZS3R3(B)
D 4905	RB706D-40
D 4906-4915	HZU3R0(B1)

MISCELLANEOUS

L 3300,3301 FERRITE CORE	VTF1093
JA 3000,3300 JACK	DKB1083
JA 3301 JACK	RKN1004
JA 4300,4301 2P JACK	DKB1098
JA 4500 JACK BOARD	PKB1033
KN 4300,4301 WRAPPING TERMINAL	VNF1084
VR 4900 ROTARY VR	DCS1072
RY 3000,3300 RELAY	VSR1008
S 3000,3300 SLIDE SWITCH	DSH1025
CN 3000,3300 11P PLUG	XKP3065
CN 4300 21P CONNECTOR	21R-1.25FJ
CN 4302,4303 20P CONNECTOR	VKN1312
CN 4900 CONNECTOR	CKS2643

Mark No. Description Part No.

A AIN1 ASSY SEMICONDUCTORS

IC 3000,3001,3004-3006

NJM4580MD

RESISTORS

R 3000-3003,3300-3303	RN1/16SE1000D
R 3004-3007,3304-3307	RN1/16SE4702D
R 3008,3009,4928-4931	RS1/10SR75R0D

Mark	No.	Description	Part No.
A	R	3010,3011,3312,3313	RS1/10SR1803D
	R	3014,3015	RS1/10SR7501D
	R	3016,3017,3032-3035	RN1/16SE4700D
	R	3018,3021,3028,3029	RN1/16SE2001D
	R	3022,3026,3030,3031	RN1/16SE1001D
	R	3024,3068,3324,3329	RN1/16SE4701D
B	R	3037,3038,3343,3344	RN1/16SE3002D
	R	3040,3041,3351,3352	RN1/16SE2002D
	R	3045,3046,3356,3357	RN1/16SE1303D
	R	3052,3053,3358,3359	RS1/10SR3303D
	R	3060,3073,3074,3320	RN1/16SE4700D
	R	3066,3070-3072,3370	RN1/16SE2001D
C	R	3076-3083,3380-3387	RN1/16SE1201D
	R	3084,3086,3088,3090	RN1/16SE2200D
	R	3085,3087,3089,3091	RN1/16SE4300D
	R	3092-3095,3396-3399	RN1/16SE6800D
	R	3096,3099,3100,3103	RN1/16SE3300D
	R	3097,3098,3101,3102	RN1/16SE1001D
D	R	3108-3112	RN1/16SE4301D
	R	3321,3336-3339,3366	RN1/16SE4700D
	R	3322,3326,3327	RN1/16SE1001D
	R	3331-3335,3401,3402	RN1/16SE1001D
	R	3372,4904,4905,4909	RN1/16SE4701D
	R	3374-3376	RN1/16SE2001D
E	R	3378,3379	RN1/16SE4700D
	R	3388,3390,3392,3394	RN1/16SE2200D
	R	3389,3391,3393,3395	RN1/16SE4300D
	R	3400,3403,3404,3407	RN1/16SE3300D
	R	3405,3406	RN1/16SE1001D
	R	4527	RS1/10SR1801F
F	R	4528	RS1/10SR3901F
	R	4902,4903	RN1/16SE1002D
	R	4906,4908	RN1/16SE1501D
	R	4907	RN1/16SE3300D
	R	4910	RN1/16SE4701D
	R	4911,4913	RN1/16SE3900D
G	R	4914	RN1/16SE2200D
	R	4924,4925	RN1/16SE2201D
	R	4926,4932	RN1/16SE1201D
	R	4927	RN1/16SE1500D
	R	4933,4934	RS1/10SR1803D
	Other Resistors		RS1/10SR###J

CAPACITORS

E	C	3000,3021,3023-3025	CKSRYB104K25
	C	3001,3002,4304-4307	CCSRCH221J50
	C	3003,3004,3007,3008	CCSRCH101J50
	C	3005,3006,4932,4933	CCSRCH331J50
	C	3009,3010	CEHAT471M6R3
	C	3011,3012,4921	CKSRYB471K50
F	C	3013,3014	DCE1020
	C	3015,3016,4922,4923	CKSRYB474K10
	C	3017,3018	CKSRYB223K50
	C	3019,3020,3046,3047	CKSRYB472K50
	C	3022,3026,3056,3057	CEHAZL101M25
	C	3028,3037-3039,3050	CKSRYB104K25
G	C	3029-3032,3034,3035	CFTYA334J50
	C	3036,3333	CEHAZL100M50
	C	3042,3043,3343,3344	CKSRYB103K50
	C	3044,3045,3341,3342	CCSRCH222J50

Mark	No.	Description	Part No.
C	C	3048,3345	CEHAZL331M6R3
	C	3049,3055,3346,3350	CEHAZL101M10
	C	3051,3054,3352,3354	CEHAZL220M50
	C	3052,3053,3058-3061	CKSRYB104K25
	C	3062-3065,3361-3364	CCSRCH102J50
	C	3070,3071,3300,3321	CKSRYB104K25
C	C	3301-3304,3306-3309	CCSRCH101J50
	C	3305,3310	CFTLA104J50
	C	3317-3320,3347,3348	CKSRYB472K50
	C	3322,3326,3355,3356	CEHAZL101M25
	C	3323-3325,3336-3338	CKSRYB104K25
	C	3328,3329,3331,3332	CFTYA334J50
C	C	3334,3335	CFTYA334J50
	C	3349,3351,3353	CKSRYB104K25
	C	3357-3360,3365,3366	CKSRYB104K25
	C	4308-4311,4514,4919	CKSRYB103K50
	C	4312-4315	CCSRCH220J50
	C	4316,4318,4320,4322	CKSRYB104K25
C	C	4317,4319,4321,4323	CCSRCH470J50
	C	4362-4368,4370,4371	CKSRYB104K25
	C	4369,4372	CEHAT101M25
	C	4373,4377,4378,4380	CKSRYB104K25
	C	4374-4376,4379,4381	CEAT470M25
	C	4512,4909,4910,4913	CKSRYB104K25
C	C	4513	CEAT101M10
	C	4906,4908	CCSRCH471J50
	C	4907	CKSRYB331K50
	C	4911	CEJQNP100M35
	C	4912,4914,4916	CEAT100M50
	C	4915,4918,4924,4925	CKSRYB104K25
C	C	4917	CEJQ100M35
	C	4920	CKSRYB103K50
	C	4926-4931	CKSRYB474K10
	C	4934	CKSRYB104K25
	C	4935-4938,4943-4946	CEANP330M16
	C	4947	CKSRYB105K16
C	C	4950-4953	CCSRCH101J50

B MCJK ASSY

SEMICONDUCTORS

D 2201-2204

RKZ15KG(B2)

MISCELLANEOUS

JA 2200	CANON CONNECTOR
CN 2200	PLUG
O	MIC SHIELD

DKB1108
CKS3153
DNF1849

RESISTORS

R 2201-2204

RN1/16SE1000D

CAPACITORS

C	2201-2206
C	2207,2208

CCSRCH102J50
CFTLA103J50

C TRIM1 ASSY

MISCELLANEOUS

VR 2221	POTENTIOMETER
CN 2221	11P SOCKET

DCS1119
XKP3076

5	6	7	8				
Mark No. Description	Part No.	Mark No. Description	Part No.				
CAPACITORS		RESISTORS					
C 2221	CKSRYB104K25	R 3600-3603,3900-3903	RN1/16SE1000D				
D	TRIM2 ASSY	R 3604-3607,3904-3907	RN1/16SE4702D				
		R 3610-3613,3910,3911	RS1/10SR1803D				
		R 3614-3617,3661	RN1/16SE4301D				
MISCELLANEOUS		R 3620,3621,3636-3639	RN1/16SE4700D				
VR 2241 POTENTIOMETER	DCS1119	R 3622,3626,3627	RN1/16SE1001D				
CN 2241 11P SOCKET	XKP3076		R 3624,3629,3672,3924	RN1/16SE4701D			
CAPACITORS	C 2241		R 3631-3635,3701,3702	RN1/16SE1001D			
			R 3643,3644,3937,3938	RN1/16SE3002D			
E	TRIM3 ASSY	R 3651,3652,3940,3941	RN1/16SE2002D				
		R 3656,3657,3945,3946	RN1/16SE1303D				
		R 3658,3659,3952,3953	RS1/10SR3303D				
MISCELLANEOUS		R 3666,3678,3679,3916	RN1/16SE4700D				
VR 2261 POTENTIOMETER	DCS1119	R 3670,3674-3676,3918	RN1/16SE2001D				
CN 2261 11P SOCKET	XKP3076	R 3680-3687,3976-3983	RN1/16SE1201D				
CAPACITORS	C 2261	R 3688,3690,3692,3694	RN1/16SE2200D				
			RN1/16SE4300D				
F	TRIM4 ASSY		RN1/16SE6800D				
			RN1/16SE3300D				
			RN1/16SE1001D				
MISCELLANEOUS		R 3908,3909	RS1/10SR75R0D				
VR 2281 POTENTIOMETER	DCS1119	R 3914,3915	RS1/10SR7501D				
CN 2281 11P SOCKET	XKP3076	R 3917,3932-3935,3960	RN1/16SE4700D				
CAPACITORS	C 2281	R 3921,3928,3929,3966	RN1/16SE2001D				
		R 3927,4010	RN1/16SE2201D				
G	AIN2 ASSY	R 3930,3931,3997,3998	RN1/16SE1001D				
		R 3968	RN1/16SE4701D				
		R 3970-3972	RN1/16SE2001D				
SEMICONDUCTORS		R 3973,3974	RN1/16SE4700D				
IC 3600,3601,3603-3605	NJM4580MD	R 3984,3986,3988,3990	RN1/16SE2200D				
IC 3602,3903	CS5381-KZ	R 3985,3987,3989,3991	RN1/16SE4300D				
IC 3606,3907	RNB4580F		RN1/16SE3300D				
IC 3900,3901,3904-3906	NJM4580MD		RN1/16SE1001D				
IC 3902	TC74VHC74F5T1		RN1/16SE1201D				
RS1/10SR###J			RS1/10SR###J				
Q 3600,3603,3604,3607	KTC801U	CAPACITORS					
Q 3601,3602,3605,3606	2SK3320	C 3600,3900	CKSRYB104K50				
Q 3608,3609,3614,3910	RT1N241M	C 3601-3604,3606-3609	CCSRCH101J50				
Q 3610-3613,3615	KTC801U	C 3605,3610	CFTLA104J50				
Q 3616,3617,3900,3901	2SK3320	C 3617-3620,3647,3648	CKSRYB472K50				
Q 3618-3620,3902	KTC801U	C 3621,3623-3625	CKSRYB104K25				
		C 3622,3626,3655,3656	CEHAZL101M25				
				C 3628,3629,3631,3632	CFTYA334J50		
						C 3633,3936	CEHAZL100M50
C 3636-3638,3649,3651	CKSRYB104K25						
		C 3641,3642,3944,3945	CCSRCH222J50				
				C 3643,3644,3942,3943	CKSRYB103K25		
						C 3645,3948	CEHAZL331M6R3
C 3652,3654,3951,3954	CEHAZL220M50						
		C 3653,3657-3660,3665	CKSRYB104K25				
				C 3661-3664,3962-3965	CCSRCH102J50		
						C 3666,3671,3921	CKSRYB104K25
C 3901,3902	CCSRCH221J50						
		C 3903,3904,3907,3908	CCSRCH101J50				
				C 3905,3906,4219,4220	CCSRCH331J50		
						C 3906,3907,3910,3911	CCSRCH431J50
C 3910,3911,3914,3915	CCSRCH631J50						
		C 3912,3913,3916,3917	CCSRCH731J50				
				C 3914,3915,3918,3919	CCSRCH831J50		
						C 3916,3917,3920,3921	CCSRCH931J50
C 3920,3921,3924,3925	CCSRCH131J50						
		C 3922,3923,3926,3927	CCSRCH231J50				
				C 3924,3925,3928,3929	CCSRCH331J50		
						C 3926,3927,3930,3931	CCSRCH431J50
C 3930,3931,3934,3935	CCSRCH631J50						
		C 3932,3933,3936,3937	CCSRCH731J50				
				C 3934,3935,3938,3939	CCSRCH831J50		
						C 3936,3937,3940,3941	CCSRCH931J50
C 3940,3941,3944,3945	CCSRCH131J50						
		C 3942,3943,3946,3947	CCSRCH231J50				
				C 3944,3945,3948,3949	CCSRCH331J50		
						C 3946,3947,3950,3951	CCSRCH431J50
C 3950,3951,3954,3955	CCSRCH631J50						
		C 3952,3953,3956,3957	CCSRCH731J50				
				C 3954,3955,3958,3959	CCSRCH831J50		
						C 3956,3957,3960,3961	CCSRCH931J50
C 3960,3961,3964,3965	CCSRCH131J50						
		C 3962,3963,3966,3967	CCSRCH231J50				
				C 3964,3965,3968,3969	CCSRCH331J50		
						C 3966,3967,3970,3971	CCSRCH431J50
C 3970,3971,3974,3975	CCSRCH631J50						
		C 3972,3973,3976,3977	CCSRCH731J50				
				C 3974,3975,3978,3979	CCSRCH831J50		
						C 3976,3977,3980,3981	CCSRCH931J50
C 3980,3981,3984,3985	CCSRCH131J50						
		C 3982,3983,3986,3987	CCSRCH231J50				
				C 3984,3985,3988,3989	CCSRCH331J50		
						C 3986,3987,3990,3991	CCSRCH431J50
C 3990,3991,3994,3995	CCSRCH631J50						
		C 3992,3993,3996,3997	CCSRCH731J50				
				C 3994,3995,3998,3999	CCSRCH831J50		
						C 3996,3997,4000,4001	CCSRCH931J50
C 4000,4001,4004,4005	CCSRCH131J50						
		C 4002,4003,4006,4007	CCSRCH231J50				
				C 4004,4005,4008,4009	CCSRCH331J50		
						C 4006,4007,4010,4011	CCSRCH431J50
C 4010,4011,4014,4015	CCSRCH631J50						
		C 4012,4013,4016,4017	CCSRCH731J50				
				C 4014,4015,4018,4019	CCSRCH831J50		
						C 4016,4017,4020,4021	CCSRCH931J50
C 4020,4021,4024,4025	CCSRCH131J50						
		C 4022,4023,4026,4027	CCSRCH231J50				
				C 4024,4025,4028,4029	CCSRCH331J50		
						C 4026,4027,4030,4031	CCSRCH431J50
C 4030,4031,4034,4035	CCSRCH631J50						
		C 4032,4033,4036,4037	CCSRCH731J50				
				C 4034,4035,4038,4039	CCSRCH831J50		
						C 4036,4037,4040,4041	CCSRCH931J50
C 4040,4041,4044,4045	CCSRCH131J50						
		C 4042,4043,4046,4047	CCSRCH231J50				
				C 4044,4045,4048,4049	CCSRCH331J50		
						C 4046,4047,4050,4051	CCSRCH431J50
C 4050,4051,4054,4055	CCSRCH631J50						
		C 4052,4053,4056,4057	CCSRCH731J50				
				C 4054,4055,4058,4059	CCSRCH831J50		
						C 4056,4057,4060,4061	CCSRCH931J50
C 4060,4061,4064,4065	CCSRCH131J50						
		C 4062,4063,4066,4067	CCSRCH231J50				
				C 4064,4065,4068,4069	CCSRCH331J50		
						C 4066,4067,4070,4071	CCSRCH431J50
C 4070,4071,4074,4075	CCSRCH631J50						
		C 4072,4073,4076,4077	CCSRCH731J50				
				C 4074,4075,4078,4079	CCSRCH831J50		
						C 4076,4077,4080,4081	CCSRCH931J50
C 4080,4081,4084,4085	CCSRCH131J50						
		C 4082,4083,4086,4087	CCSRCH231J50				
				C 4084,4085,4088,4089	CCSRCH331J50		
						C 4086,4087,4090,4091	CCSRCH431J50
C 4090,4091,4094,4095	CCSRCH631J50						
		C 4092,4093,4096,4097	CCSRCH731J50				
				C 4094,4095,4098,4099	CCSRCH831J50		
						C 4096,4097,4100,4101	CCSRCH931J50
C 4100,4101,4104,4105	CCSRCH131J50						
		C 4102,4103,4106,4107	CCSRCH231J50				
				C 4104,4105,4108,4109	CCSRCH331J50		
						C 4106,4107,4110,4111	CCSRCH431J50
C 4110,4111,4114,4115	CCSRCH631J50						
		C 4112,4113,4116,4117	CCSRCH731J50				
				C 4114,4115,4118,4119	CCSRCH831J50		
						C 4116,4117,4120,4121	CCSRCH931J50
C 4120,4121,4124,4125	CCSRCH131J50						
		C 4122,4123,4126,4127	CCSRCH231J50				
				C 4124,4125,4128,4129	CCSRCH331J50		
						C 4126,4127,4130,4131	CCSRCH431J50
C 4130,4131,4134,4135	CCSRCH631J50						
		C 4132,4133,4136,4137	CCSRCH731J50				
				C 4134,4135,4138,4139	CCSRCH831J50		
						C 4136,4137,4140,4141	CCSRCH931J50
C 4140,4141,4144,4145	CCSRCH131J50						
		C 4142,4143,4146,4147	CCSRCH231J50				
				C 4144,4145,4148,4149	CCSRCH331J50		
						C 4146,4147,4150,4151	CCSRCH431J50
C 4150,4151,4154,4155	CCSRCH631J50						
		C 4152,4153,4156,4157	CCSRCH731J50				
				C 4154,4155,4158,4159	CCSRCH831J50		
						C 4156,4157,4160,4161	CCSRCH931J50
C 4160,4161,4164,4165	CCSRCH131J50						
		C 4162,4163,4166,4167	CCSRCH231J50				
				C 4164,4165,4168,4169	CCSRCH331J50		
						C 4166,4167,4170,4171	CCSRCH431J50
C 4170,4171,4174,4175	CCSRCH631J50						
		C 4172,4173,4176,4177	CCSRCH731J50				
				C 4174,4175,4178,4179	CCSRCH831J50		
						C 4176,4177,4180,4181	CCSRCH931J50
C 4180,4181,4184,4185	CCSRCH131J50						
		C 4182,4183,4186,4187	CCSRCH231J50				
				C 4184,4185,4188,4189	CCSRCH331J50		
						C 4186,4187,4190,4191	CCSRCH431J50
C 4190,4191,4194,4195	CCSRCH631J50						
		C 4192,4193,4196,4197	CCSRCH731J50				
				C 4194,4195,4198,4199	CCSRCH831J50		
						C 4196,4197,4200,4201	CCSRCH931J50
C 4200,4201,4204,4205	CCSRCH131J50						
		C 4202,4203,4206,4207	CCSRCH231J50				
				C 4204,4205,4208,4209	CCSRCH331J50		
						C 4206,4207,4210,4211	CCSRCH431J50
C 4210,4211,4214,4215	CCSRCH631J50						
		C 4212,4213,4216,4217	CCSRCH731J50				
				C 4214,4215,4218,4219	CCSRCH831J50		
						C 4216,4217,4220,4221	CCSRCH931J50
C 4220,4221,4224,4225	CCSRCH131J50						
		C 4222,4223,4226,4227	CCSRCH231J50				
				C 4224,4225,4228,4229	CCSRCH331J50		
						C 4226,4227,4230,4231	CCSRCH431J50
C 4230,4231,4234,4235	CCSRCH631J50						
		C 4232,4233,4236,4237	CCSRCH731J50				
				C 4234,4235,4238,4239	CCSRCH831J50		
						C 4236,4237,4240,4241	CCSRCH931J50
C 4240,4241,4244,4245	CCSRCH131J50						
		C 4242,4243,4246,4247	CCSRCH231J50				
				C 4244,4245,4248,4249	CCSRCH331J50		
						C 4246,4247,4250,4251	CCSRCH431J50
C 4250,4251,4254,4255	CCSRCH631J50						
		C 4252,4253,4256,4257	CCSRCH731J50				
				C 4254,4255,4258,4259	CCSRCH831J50		
						C 4256,4257,4260,4261	CCSRCH931J50
C 4260,4261,4264,4265	CCSRCH131J50						
		C 4262,4263,4266,4267	CCSRCH231J50				
				C 4264,4265,4268,4269	CCSRCH331J50		
						C 4266,4267,4270,4271	CCSRCH431J50

Mark	No.	Description	Part No.
A	C	3909,3910	CEHAT471M6R3
	C	3911,3912	CKSRYB471K50
	C	3917,3918	CKSRYB223K50
	C	3919,3920,3946,3947	CKSRYB472K50
	C	3922,3926,3956,3957	CEHAZL101M25
	C	3923-3925,3928	CKSRYB104K25
	C	3934,3935	CFTYA334J50
	C	3937-3939,3950,3952	CKSRYB104K25
	C	3953,3958-3961	CKSRYB104K25
	C	3970-3972,4202-4204	CKSRYB104K25
B	C	4200,4201,4205,4211	CEAT470M25
	C	4206,4210	CEHAT101M25
	C	4207-4209,4215,4221	CKSRYB104K25
	C	4216	CEAT470M25
	C	4217,4218	DCE1020
	C	4222-4229	CEANP330M16
	C	4230-4233	CCSRCH101J50

Mark	No.	Description	Part No.
R	2062-2085		RS1/10SR49R9F
	2096-2111		RS1/16SS0R0J
	2136		RAB4CQ330J
	2139,2208,2209		RAB4CQ121J
	2187		RS1/10SR1200D
	2189		RN1/16SC10R0D
	2217-2219		RS1/4SA0R0J
	2221		RS1/10SR3900D
	2222		RS1/10SR1801D
	Other Resistors		RS1/10SR###J

CAPACITORS

C	2001,2003,2007,2010	CKSRYB104K25
C	2002,2009,2021,2065	CEAT101M10
C	2004,2011,2025,2057	CKSRYB471K50
C	2005	CFTLA103J50
C	2013,2020,2044-2053	CKSRYB103K50
C	2017,2022,2023,2027	CKSRYB104K25
C	2018,2019	CCSRCH470J50
C	2024	CCSRCH101J50
C	2026,2056	CKSRYB102K16
C	2028,2031,2034,2042	CKSRYB104K25
C	2029,2036	CCSRCH270J50
C	2032,2093	CKSRYB105K16
C	2033	DCH1201
C	2037,2073,2103,2105	CEAT470M25
C	2043,2054,2055	CKSRYB104K25
C	2058,2062	CKSRYB471K50
C	2059-2061,2063,2068	CKSRYB104K25
C	2067	CEAT101M10
C	2072	CCSRCH180J50
C	2074,2077,2079-2090	CKSRYB104K25
C	2075,2129	CEAT221M10
C	2076,2091,2094	CCSRCH102J50
C	2078	CCSRCH200J50
C	2092,2095,2098-2102	CKSRYB104K25
C	2096,2126,2127	CEHAT101M10
C	2104	CKSRYB103K50
C	2108,2109,2115	CEAT470M25
C	2111-2114,2116-2119	CKSRYB104K25
C	2120,2121	CEHAT221M10
C	2124,2125,2132-2139	CKSRYB104K25
C	2142-2147	CKSRYB104K25

PCIF ASSY SEMICONDUCTORS

IC	2001	TC7S04FU
IC	2002	TUSB3200ACPAH
IC	2005	TC7SHU04FUS1
IC	2006	TC74LCX32FTS1
IC	2007,2018	TC7SH04FUS1
IC	2008	TC74VHC08FTS1
IC	2009	RTL8201CP-LF
IC	2010	PSB6970HL
IC	2011	TC7SH32FUS1
IC	2012,2013	TC74LCX541FTS1
IC	2014,2015	TC7SH08FUS1
IC	2016,2017	TC7W53FU
Q	2001	PQ200WNA1ZPH
Q	2002	RT1N241M
Q	2002	UM6K1N
Q	2003,2004	2SA2060
D	2001	NNCD6.2MF
D	2003	RKZ5.6KG(B2)
D	2004,2005	1SS355

MISCELLANEOUS

L	2001,2002 CHIP SOLID INDUCTOR	QTL1013
L	2003 COIL	ATH7015
L	2004 CHIP SOLID INDUCTOR	QTL1013
L	2011-2013 INDUCTOR	CTF1394
F	2001 EMI FILTER	DTL1106
F	2003 EMI FILTER	CGG1160
JA	2001 USB CONNECTOR	DKN1237
JA	2002 CONNECTOR	DKN1188
JA	2009-2011 RJ45 CONNECTOR 2*1	DKN1572
KN	2001-2003 WRAPPING TERMINAL	VNF1084
X	2001 CRYSTAL RESONATOR (6 MHz)	DSS1206
X	2002 CRYSTAL RESONATOR (25 MHz)	DSS1207
CN	2001,2002 26P CONNECTOR	VKN1430
O	SHIELD CASE(MIDI)	DNH2736

RESISTORS

R	2006,2007	RD1/2VM221J
R	2016-2019,2030-2033	RS1/16SS0R0J
R	2020-2029,2148,2223	RS1/8SQ0R0J
R	2056	RS1/10SR3301D

MAIN ASSY SEMICONDUCTORS

IC	1001	NJM2846DL3-33
IC	1002	S-1170B25UC-OTK
IC	1003-1005	BD9326EFJ
IC	1007-1010,1103	TC7SH08FUS1
IC	1101	TC7SHU04FUS1
IC	1102	BU4230G
IC	1105	DYW1822
IC	1106-1114,1602,1805	TC7SH08FUS1
IC	1115	TC74VHC4052AFK
IC	1201	XC3S50A-4FTG256C
IC	1302,1451	D610A003BPYP225
IC	1303,1452,1701,1702	M12L128168A-5TG2N
IC	1304	DYW1824

5	6	7	8
Mark	No. Description	Part No.	Mark No. Description Part No.
NSP	IC 1601	R5S77641N300BG	R 1249,1250 RAB4CQ101J
	IC 1703	DYW1825	R 1259-1262 RAB4CQ0R0J
	IC 1801-1804	DIR9001PW	R 1327,1329,1333,1336 RAB4CQ100J
	IC 1806,1819-1821	TC7SH08FUS1	R 1469,1474,1516,1734 RS1/8SQ0R0J
	IC 1807-1810	TC74LCX157FK	R 1508,1511 RAB4CQ330J
	IC 1811,1813,1815,1817	CS8421-CZ	R 1630 RS1/10SR5601F
	IC 1812,1814,1816,1818	TC7WH157FK	R 1760,2149-2156,2165 RS1/16SS0R0J
	IC 1901-1904,1914-1919	TC7SH08FUS1	R 1762-1768,2166-2169 RS1/16SS151J
	IC 1907,1908,1910,1911	CS8421-CZ	R 1790,1816-1819 RS1/10SR6800D
	IC 1909	TC7W53FU	R 1808-1815,1924 RS1/10SR1002D
⚠	IC 1912	AK4114VQ	R 1857,1863,1869,1875 RN1/16SE2001D
	Q 1001,1006	RT1N241M	R 1858,1864,1870,1876 RN1/16SE6202D
	Q 1002-1004	2SA1576A	R 1925 RN1/16SE3901D
	Q 1005,1101	RT1P241M-11	R 1928,1931,1937,1962 RN1/16SE2001D
	Q 1901-1903,1905	LTC024EEB	R 1929,1963 RN1/16SE6202D
	Q 1904	HN1C01FU	R 1932,1934,1938 RN1/16SE1602D
	D 1004-1006	RSX201L-30	R 1958 RN1/16SE1802D
	D 1009,1010	1SS355	R 1976 RS1/8SQ0R0J
	D 1011	UDZS3R3(B)	R 2082-2096,2098 RS1/16SS330J
	D 1101-1106,1454-1461	DA2J101	R 2161-2163 RS1/16SS472J
MISCELLANEOUS			R 2173 RS1/16SS0R0J
L 1001	INDUCTOR	CTH1253	Other Resistors RS1/10SR###J
L 1101	CHIP COIL	LCTAW330J2520	
L 1607,1608	INDUCTOR	CTF1394	
L 1610	INDUCTOR	CTH1255	
L 1611	POWER INDUCTOR	DTH1205	
F 1301,1451	COIL	RTF1189	
F 1601,1602	EMI FILTER	CCG1160	
KN 1001-1006	WRAPPING TERMINAL	CKF1089	
X 1101	RESONATOR (20 MHz)	CSS1795	
X 1102	CRYSTAL OSCILLATOR (24 MHz)	ASS7102	
CN 1002	12P CONNECTOR	VKN1416	
CN 1101	32P CONNECTOR	VKN1436	
CN 1103,1601,1602	26P CONNECTOR	VKN1430	
CN 1104-1106	20P CONNECTOR	VKN1424	
CN 1605	16P CONNECTOR	VKN1420	
NSP 0	ID LABEL ASSY	AXW7015	
RESISTORS			
R 1001,1023,1057,1101		RS1/8SQ0R0J	
R 1005		RS1/10SR9102D	
R 1006		RS1/10SR2202D	
R 1007		RS1/10SR2702D	
R 1008		RS1/10SR3901F	
R 1009		RS1/10SR2402F	
R 1010,1016		RS1/10SR1002F	
R 1011		RS1/10SR4701F	
R 1012		RS1/10SR3302F	
R 1013		RS1/10SR8201F	
R 1014		RS1/10SR1501F	
R 1015		RS1/10SR2201F	
R 1029-1033		RS1/4SA0R0J	
R 1081-1084		RAB4CQ470J	
R 1115,1118,1148,1159		RS1/8SQ0R0J	
R 1136,1141,1158		RAB4CQ220J	
R 1157,2157-2159		RAB4CQ151J	
R 1212,1310,1318,1341		RS1/8SQ0R0J	
R 1233,1238-1240		RAB4CQ121J	
R 1234-1237,1500,1504		RAB4CQ330J	
CAPACITORS			
C 1001,1021-1023		DCH1165	
C 1002,1018-1020,1031		CKSSYB104K16	
C 1003,1011,1012,1014		CKSSYB104K10	
C 1004,1043-1045,1072		DCH1201	
C 1010,1013,1052,1054		CEVW101M16	
C 1028-1030,1040-1042		CKSRYB104K25	
C 1032,1034		CCSRCH222J50	
C 1033,1035,1053,1055		CKSSYB104K16	
C 1036		CCSRCH102J50	
C 1046-1048,1068-1070		CKSSYB104K10	
C 1073,1075,1302,1360		DCH1201	
C 1076,1716		CKSSYB104K16	
C 1077-1079,1103,1107		CKSSYB104K10	
C 1101,1113,1129,1132		CEVW101M16	
C 1102,1109		CKSRYB105K10	
C 1104,1105		CCSSCH100D50	
C 1106		CKSSYB152K50	
C 1108,1223,1358,1647		CKSSYB103K16	
C 1110,1112,1115		CKSSYB104K10	
C 1116,1946,9003		CCSSCH102J50	
C 1117-1120,1130,1131		CKSSYB104K10	
C 1121-1127,1943		CKSSYB471K50	
C 1135-1142,1201		CKSSYB104K10	
C 1202,1305,1321,1455		CEVW101M16	
C 1203-1222,1301,1303		CKSSYB104K10	
C 1304,1306-1317,1319		CKSSYB104K10	
C 1320,1322-1357		CKSSYB104K10	
C 1361-1367,1451,1453		CKSSYB104K10	
C 1368,1452,1509,1702		DCH1201	
C 1454,1456-1469		CKSSYB104K10	
C 1470,1684,1711-1713		CEVW101M16	
C 1471-1506,1510-1515		CKSSYB104K10	
C 1614-1646,1648-1653		CKSSYB104K10	
C 1655,1657,1659-1683		CKSSYB104K10	
C 1685-1687,1703-1706		CKSSYB104K10	
C 1707,1801-1804,1823		DCH1201	

Mark	No.	Description	Part No.
A	C	1710,1811-1814	CKSSYB103K16
	C	1714,1805-1810,1815	CKSSYB104K10
	C	1715,1936	CEVW101M16
	C	1816,1818,1820,1822	CKSSYB472K25
	C	1817,1819,1821	CKSSYB104K10
	C	1824,1826,1828,1830	CKSSYB683K10
	C	1825,1827,1829	DCH1201
	C	1831-1834,1847-1861	CKSSYB104K10
	C	1839-1842,1862-1865	DCH1201
	C	1843-1846,1909,1910	CKSSYB103K16
	C	1901-1904,1911,1912	CKSSYB104K10
	C	1907,1908,1913,1920	DCH1201
B	C	1914,1925,1927,1931	CKSSYB103K16
	C	1915,1916,1918,1919	CKSSYB104K10
	C	1921,1923,1924,1933	DCH1201
	C	1922,1926,1928,1932	CKSSYB104K10
	C	1934,1939-1942,1944	CKSSYB104K10
	C	1945,9005-9012	CKSSYB104K10
	C	1947	CKSSYB473K16
	C	9001,9004	CCSSCH101J50
	C	9014	CKSRYB474K16

Mark	No.	Description	Part No.
	R	5738,5740	RN1/16SE1201D
	R	5742,5744,5745,5747	RN1/16SE4701D
	R	5748-5751	RS1/10SR1001D
	R	5752-5755	RS1/10SR1801D
	R	5756-5759	RD1/2VM6R8J
		Other Resistors	RS1/10SR###J

CAPACITORS

C	101	CEAT471M16
C	102,103,107,108	CEHAT101M25
C	104,118,121,5605	CKSRYB104K16
C	105,106,114,120	CKSRYB104K25
C	111	CEAT470M25
C	115,116,5622,5625	CEHAZL101M25
C	117	CEAT221M10
C	119,122	CEHAT101M25
C	5604	CKSRYB103K50
C	5606	CKSRYB104K16
C	5607	CEAT100M50
C	5608,5609	CCSRCH681J50
C	5610-5613	CCSRCH101J50
C	5616,5617,5623,5624	CKSRYB104K25
C	5618,5619	CEHAZL101M10

C	5620,5621	CCSRCH222J50
C	5632,5633	DCH1165

K HREG ASSY SEMICONDUCTORS

⚠	IC	104	NJM79M09FA
⚠	IC	105	NJM78M09FA
	D	5801,5802	RB501VM-40

MISCELLANEOUS

CN110	6PJUMPER CONNECTOR	52151-0610
-------	--------------------	------------

CAPACITORS

C	5801-5804	CKSRYB104K25
---	-----------	--------------

L HPJK ASSY MISCELLANEOUS

JA	6001	HEADPHONE JACK	DKN1622
CN	6001	L-PLUG(4P)	KM200NA4L
O		PHONE SHIELD	DNF1875

RESISTORS

All Resistors	RS1/10SR###J
---------------	--------------

CAPACITORS

C	6001,6002	CKSRYB104K16
---	-----------	--------------

M AOUT ASSY SEMICONDUCTORS

IC	5001,5002,5004,5005	TC7SH08FUS1
IC	5007,5008	TC7SH08FUS1
IC	5010	AK4390EF
IC	5011,5012,5203,5204	NJM4580MD
IC	5201	AK4387ET
IC	5202,5402,5403,5505	RNB4580F
IC	5401	AK4384ET

J HAMP ASSY SEMICONDUCTORS

⚠	IC	103	NJM78M12FA
	IC	5604	AK4382AVT
	IC	5605,5606	NJM4580MD
	Q	5605,5607	2SC4081
	Q	5606,5608,5614,5615	2SA1576A
	Q	5609,5611	2SC3076
	Q	5610,5612	2SA1241
	Q	5613	INC2002AC1
	Q	5616	RT1N241M
	Q	5617	RT1P241M-11
	Q	5618	HN1A01FU
	Q	5620	LTC024EEB
	D	5602-5607	DA2J101
	D	5609	1SS355

MISCELLANEOUS

J	101	6P JUMPER WIRE	D20PYY0605E
KN	101-104	EARTH TERMINAL	AKF7002
RY	5601	RELAY	VSR1008
CN	101	CONNECTOR	B6B-EH
CN	102,103	PLUG(8P)	KM200NA8

CN	104	CONNECTOR	B7B-EH
CN	105	CONNECTOR	B7B-EH-K
CN	106	CONNECTOR	B12B-EH
CN	5601	12P CONNECTOR	VKN1416
CN	5602	PLUG(4P)	KM200NA4

JH	101	6P CABLE HOLDER	51048-0600
⚠	P	104	PROTECTOR(315MA)
⚠	P	107,109,114	PROTECTOR(400MA)
⚠	P	108,110,112	PROTECTOR(630MA)
⚠	P	111	PROTECTOR(500MA)

RESISTORS

R	5706-5709	RN1/16SE3901D
R	5710-5713	RN1/16SE1502D
R	5714-5717	RN1/16SE3301D
R	5736,5737	RN1/16SE2201D

Mark	No.	Description	Part No.	Mark	No.	Description	Part No.
	IC	5404	AK5359ET	R	5076,5078,5261		RN1/16SE4701D
	IC	5501	AK4382AVT	R	5084,5086,5087		RN1/16SE6800D
	IC	5502,5506	NJM4565MD	R	5088,5094,5095		RN1/16SE4700D
				R	5089-5093		RN1/16SE6800D
	IC	5503,5504	NJM4580MD	R	5096,5098,5100,5102		RN1/16SE2701D
	Q	5003-5005,5010,5011	HN1C01FU				
	Q	5006-5009,5012-5015	2SK3320	R	5097,5099,5101,5103		RN1/16SE5102D
	Q	5016,5017,5026-5029	HN1C01FU	R	5105,5107,5109,5111		RN1/16SE2200D
	Q	5018,5020,5022,5024	2SA1312	R	5112-5115		RN1/16SC68R0D
				R	5116-5119		RN1/16SE2200D
				R	5120-5127		RD1/4MUF330J
	Q	5019,5021,5023,5025	2SA1162				
	Q	5030,5032,5034,5036	2SA1312				
	Q	5031,5033,5035,5037	2SA1162	R	5128-5131		RD1/2VM220J
	Q	5038,5041,5044,5047	2SC2712	R	5132-5134,5139		RN1/16SE3901D
	Q	5039,5042,5045,5048	2SC5868	R	5135,5138,5140,5143		RN1/16SE1001D
				R	5136,5137,5141,5142		RN1/16SE1501D
				R	5144-5147,5185,5186		RN1/16SE3301D
	Q	5040,5043,5046,5049	2SA2090				
	Q	5050	LTC024EEB				
	Q	5051,5202,5205,5206	INC2002AC1	R	5208,5227		RS1/10SR5101D
	Q	5052	HN1A01FU	R	5209,5211,5228,5233		RS1/10SR4702D
	Q	5054,5056,5058,5060	2SA1576A	R	5210,5230		RS1/10SR4701D
				R	5212,5234,5518-5521		RS1/10SR4301D
				R	5213-5216		RN1/16SE1202D
	Q	5055,5057,5059,5061	2SC4154				
	Q	5201,5203,5204,5207	2SK209				
	Q	5208,5403,5404	INC2002AC1	R	5217-5220		RN1/16SE1502D
	Q	5401,5402	2SK209	R	5223,5231,5232,5245		RD1/2VM331J
	Q	5501-5508	INC2002AC1	R	5224,5225,5235,5236		RN1/16SE1002D
				R	5411,5412		RN1/16SE3602D
				R	5415,5416		RS1/10SR3901D
	Q	5509	RT1N241M				
	Q	5510	2SC4154				
	Q	5511	2SA1576A	R	5417,5418,5423,5424		RS1/10SR3302D
	Q	5512-5515	HN1C01FU	R	5421,5422,5425,5427		RS1/10SR3301D
	Q	5516,5517	2SC5868	R	5428,5429		RD1/2VM821J
				R	5508,5509,5641,5644		RN1/16SE1002D
				R	5510,5511,5514,5515		RN1/16SE3002D
	D	5002-5009,5014-5021	1SS355				
	D	5010-5013	DA2J101				
	D	5100	HZU5R1(B1)	R	5512,5513,5642,5646		RN1/16SE7501D
	D	5401	UDZS3R3(B)	R	5516,5517,5643,5648		RN1/16SE5601D
	D	5402,5403	RB706F-40	R	5522-5525,5532-5535		RN1/16SE2202D
				R	5526-5529		RS1/10SR4301D
				R	5530,5531,5536,5537		RN1/16SE5600D
	D	5405-5408	HZU3R0(B1)				
MISCELLANEOUS				R	5538-5541		RS1/10SR5601D
	JA	5001,5002 CANON CONNECTOR	DKB1093	R	5546,5548,5550,5552		RN1/16SE1200D
	JA	5201 JACK	DKB1083	R	5567-5574		RN1/16SE1501D
	JA	5401 HEADPHONE JACK	XKB3066	R	5596,5597		RS1/10SR2202D
	JA	5402-5404 MIC JACK	DKN1614	R	5599-5602		RS1/10SR3303D
	JA	5501,5502 HEADPHONE JACK	DKN1622				
	KN	5001-5003 EARTH TERMINAL	AKF7002	R	5627,5628		RN1/16SE3301D
	RY	5001,5002 RELAY	VSR1008	R	5645,5647,5656,5658		RN

Mark	No.	Description	Part No.
------	-----	-------------	----------

A	C	5057,5084	DCH1343
	C	5045-5047,5058,5083	CKSRYB104K25
	C	5059-5062,5229,5230	CKSRYB473K50
	C	5063-5070,5211,5231	CKSRYB334K10

■	C	5072,5074,5076,5078	CCSRCH120J50
	C	5079-5082	CCSRCH471J50
	C	5089	CEANP101M16
	C	5090,5092,5104,5105	CEAT470M25
	C	5091,5093,5516,5518	CEHAT101M25

B	C	5094-5097,5236,5237	DCE1016
	C	5098,5099,5212-5215	CKSRYB104K25
	C	5100-5103	CCSRCH122J50
	C	5110,5111,5220-5222	CEANP100M35
	C	5190,5203,5204,5403	CKSRYB104K16

■	C	5192,5193,5209,5210	CCSRCH101J50
	C	5194	CEHAZL100M50
	C	5202,5205,5241-5244	CEAT100M50
	C	5207,5227	CCSQCH472J50
	C	5208,5228	CCSRCH152J50

C	C	5216,5217,5404,5405	CCSRCH101J50
	C	5218,5234	CCSRCH560J50
	C	5219,5235,5547	CKSRYB102K50
	C	5223,5225,5419,5420	CKSRYB104K25
	C	5224,5226	CCSRCH151J50

■	C	5232,5233,5238,5437	CEANP100M35
	C	5239,5240,5441,5442	DCE1016
	C	5402,5407,5411,5412	CEAT100M50
	C	5408,5409	CCSRCH102J50
	C	5417,5418,5509,5510	CCSRCH182J50

■	C	5421,5426	CKSRYB334K10
	C	5422-5424,5430,5433	CEAT100M50
	C	5425,5428,5515,5517	CKSRYB104K25
	C	5427,5429	CCSRCH820J50
	C	5431,5432	CKSRYB473K50

D	C	5434,5439,5505,5541	CEAT100M50
	C	5435,5436,5440,5503	CKSRYB104K16
	C	5438	CEANP100M35
	C	5443,5501	CKSRYB103K50
	C	5511,5512,5565,5568	CCSRCH681J50

■	C	5513,5514,5566,5569	CCSRCH121J50
	C	5519-5522,5525-5528	CCSRCH101J50
	C	5523,5524,5531,5532	CKSRYB104K25
	C	5529,5530,5533,5534	CEANP470M25
	C	5535-5538	DCE1016

E	C	5542	CEAT100M50
	C	5543-5546	CKSRYB474K10
	C	5548-5556	CKSRYB104K16
	C	5557-5560	DCH1323
	C	5561-5563	CFTYA474J50

■	C	5564,5567	CCSRCH182J50
	C	5570,5572	CKSRYB104K25
	C	5574-5577	CCSRCH121J50

Mark	No.	Description	Part No.
------	-----	-------------	----------

Q	7520,7522	2SA2060
	7523,7524	LSCR523UB
	7501-7506,7512,7513	DA2J101
	7515,7517,7519,7527	SLI-343Y8Y(KLM)
	7520-7522,7526	SLI-343U8R(HJK)

D	7529,7571	SLI-343Y8Y(KLM)
	7530-7532	SLI-343U8R(HJK)
	7533,7534,7538,7541	DA2J101
	7542,7545-7547	DA2J101
	7553-7570,7572-7577	DA2J101

MISCELLANEOUS

L	7501 CHIP COIL	LCTAW330J2520
VR	7501,7502 POTENTIOMETER	DCS1106
VR	7503,7504 VARIABLE RESISTOR	DCS1100
VR	7505 ROTARY VR	DCS1086
VR	7506-7509 VARIABLE RESISTOR	DCS1100

VR	7543 VARIABLE RESISTOR	DCS1100
S	7501 SLIDE SWITCH	DSH1066
S	7502,7505,7506,7511 TACT SWITCH	DSG1079
S	7509,7513 SLIDE SWITCH	DSH1058
S	7512,7515-7518 TACT SWITCH	DSG1079

S	7519,7520 LEVER SWITCH	DSK1026
X	7501 CERAMIC RESONATOR (20 MHz)	DSS1180
CN	7501,7502,7509 32P CONNECTOR	VKN1263
CN	7503 19P CONNECTOR	VKN1250
CN	7506 B TO W CONNECTOR	KM200NA3LY

CN	7507 PLUG(3P)	KM200NA3LR
CN	7508 L-PLUG(3P)	KM200NA3L

RESISTORS

All Resistors	RS1/10SR###J
---------------	--------------

CAPACITORS

C	7501,7504,7506-7509	CKSRYB104K16
C	7502,7522	CEJQ101M10
C	7503	CKSRYB103K50
C	7505	CKSRYB105K10
C	7510-7515,7525-7528	CKSRYB471K50

C	7518,7521,7523,7524	CKSRYB104K16
C	7519	CCG1251
C	7529,7530,7535-7542	CKSRYB104K16
C	7531-7534	CKSRYB471K50
C	7543	CEAT471M6R3

C	7544,7545	CKSRYB104K16
---	-----------	--------------

CFD1 ASSY

MISCELLANEOUS

VR	8011 SLIDE VR	DCV1027
CN	8011 B TO W CONNECTOR	KM200NA3LY

CFD2 ASSY

MISCELLANEOUS

VR	8021 SLIDE VR	DCV1027
CN	8021 PLUG(3P)	KM200NA3LR

CRFD ASSY

MISCELLANEOUS

PNLE ASSY

SEMICONDUCTORS

IC	7501	DYW1823
IC	7503	TC74HC4052AF
Q	7506-7512,7514-7518	LSCR523UB
Q	7519,7521	RT1N431M

Mark	No. Description	Part No.
	VR 8001 VARIABLE RESISTOR	DCV1006
	CN 8001 L-PLUG(3P)	KM200NA3L
R PNCE ASSY SEMICONDUCTORS		
	IC 7000,7001	TC74HC4052AF
	IC 7002	NJM2903M
	Q 7007-7016,7032-7034	LSCR523UB
	Q 7017,7019,7021,7023	RT1N431M
	Q 7018,7020,7022,7024	2SA2060
	Q 7025,7027,7035	RT1N431M
	Q 7026,7028,7036	2SA2060
	Q 7029	RT1P431M
	D 7008,7009,7023-7026	SLI-343U8R(HJK)
	D 7010-7013,7027-7030	SLI-343Y8Y(KLM)
	D 7014-7022,7031-7039	SLI-343M8G(GHJ)
	D 7040-7043,7057-7060	SLI-343U8R(HJK)
	D 7044-7047,7061-7064	SLI-343Y8Y(KLM)
	D 7048-7056,7065-7073	SLI-343M8G(GHJ)
	D 7074-7077,7091,7092	SLI-343U8R(HJK)
	D 7078-7081,7093-7096	SLI-343Y8Y(KLM)
	D 7082-7090,7097-7105	SLI-343M8G(GHJ)
	D 7106-7109,7111-7113	DA2J101
	D 7115,7116,7119,7120	DA2J101
	D 7122-7124,7129-7133	DA2J101
	D 7142-7152	SLI-343Y8Y(KLM)
	D 7153	SLI-343U8R(HJK)
	D 7154	SLR343EC4T(LMN)
	D 7155-7169	DA2J101
	D 7170-7176	SLR343WBD2PT(Z1)

MISCELLANEOUS		
	VR 7000-7011 VARIABLE RESISTOR	DCS1100
	VR 7012 ROTARY VR	DCS1086
	VR 7013 VARIABLE RESISTOR	DCS1100
	S 7000 12MM GS ENCODER	DSX1064
	S 7002-7005,7007-7009 TACT SWITCH	DSG1079
	S 7010,7013,7019 LEVER SWITCH	DSK1026
	S 7012,7016,7018 TACT SWITCH	DSG1079
	S 7021-7039 TACT SWITCH	DSG1079
	CN 7000 25P CONNECTOR	VKN1256
	CN 7001,7002 32P CONNECTOR	VKN1263

RESISTORS		
	All Resistors	RS1/10SR###J

CAPACITORS		
	C 7000	CEAT471M6R3
	C 7001	CEJQ101M10
	C 7002,7003,7007-7012	CKSRYB104K16
	C 7004,7005	CKSRYB103K50
	C 7013-7018,7020,7021	CKSRYB471K50
	C 7019,7022,7024,7029	CKSRYB104K16
	C 7023,7025-7028	CKSRYB471K50
	C 7030-7032	CKSRYB471K50
	C 7033-7048	CKSRYB104K16

S PNRI ASSY SEMICONDUCTORS		
	Q 7800,7802,7803	LSCR523UB

Mark	No. Description	Part No.
	D 7802,7804,7805,7807	SLI-343Y8Y(KLM)
	D 7808,7810	SLI-343Y8Y(KLM)
	D 7811	SLR343WBD2PT(Z1)
	D 7814-7826,7828	DA2J101
	D 7827	SLI-343U8R(HJK)

MISCELLANEOUS		
	VR 7800 ROTARY VR	DCS1086
	VR 7801,7803 POTENTIOMETER	DCS1106
	VR 7802 VARIABLE RESISTOR	DCS1100
	S 7800-7802 SLIDE SWITCH	DSH1058
	S 7803,7804,7807-7809 TACT SWITCH	DSG1079
	S 7805,7806,7810 SLIDE SWITCH	DSH1066
	CN 7801 25P CONNECTOR	VKN1256
	CN 7802 B TO W CONNECTOR	KM200NA3LY
	CN 7803 PLUG(3P)	KM200NA3LR

RESISTORS		
	All Resistors	RS1/10SR###J

CAPACITORS		
	C 7800,7803	CEJQ101M10
	C 7801,7802,7804-7809	CKSRYB104K16

T CFD3 ASSY MISCELLANEOUS		
	VR 8031 SLIDE VR	DCV1027
	CN 8031 B TO W CONNECTOR	KM200NA3LY

U CFD4 ASSY MISCELLANEOUS		
	VR 8041 SLIDE VR	DCV1027
	CN 8041 PLUG(3P)	KM200NA3LR

V TFTB ASSY SEMICONDUCTORS		
	IC 2601	TK61222CQ6
	Q 2601	RSQ025P03
	D 2601	RB160M-60

MISCELLANEOUS		
	L 2401 INDUCTOR	CTF1473
	L 2601 INDUCTOR	CTF1545
	L 2603 CHOKE COIL	CTH1435
	KN 2401-2404 WRAPPING TERMINAL	VNF1084
	CN 2401 26P CONNECTOR	VKN1430
	CN 2402 16P CONNECTOR	VKN1420
	CN 2403 CONNECTOR(9P)	DKN1624
	CN 2404 CONNECTOR	CKS5660
	CN 2601 CONNECTOR	CKS5561

RESISTORS		
	R 2609	RS1/10SR6202D
	R 2613	RS1/10SR1004D
	R 2614	RS1/10SR8202D
	Other Resistors	RS1/10SR###J

CAPACITORS		
	C 2401,2402	CEVW101M16
	C 2403,2404,2406,2412	CKSRYB104K25
	C 2411	DCH1201

Mark	No.	Description	Part No.
A	C	2601,2603,2605,2606	CCG1236
	C	2602,2609	CKSRYB104K25
	C	2604,2607,2608	CKSRYB105K16
	C	2610	CKSRYB474K10
	C	2611,2612	CCG1236

W TPRI ASSY

SEMICONDUCTORS

Q	8100,8101	2SC4154
D	8108,8112,8118	1SS355
D	8117	SLR343WBD2PT(Z1)
D	8123,8124	SLI-343URCW(RST)
D	8125,8126	SLR343BC4T(JKLM)
D	8129,8130	SML-012WT(UVWXY)

MISCELLANEOUS

S	8106,8110-8113 TACT SWITCH	DSG1079
CN	8100 12P CONNECTOR	VKN1272

RESISTORS

All Resistors	RS1/10SR###J
---------------	--------------

X TPLE ASSY

SEMICONDUCTORS

Q	8070	2SA1576A
D	8071,8072	SLI-343YYW(TUV)
D	8074,8075	1SS355
D	8076	SLR-343VC(NPQ)

MISCELLANEOUS

S	8070,8072,8074 TACT SWITCH	DSG1079
CN	8070 19P CONNECTOR	VKN1279
CN	8071 12P CONNECTOR	VKN1272

RESISTORS

All Resistors	RS1/10SR###J
---------------	--------------

Y POWER SUPPLY ASSY

There is no service parts.

Z ACSW ASSY

MISCELLANEOUS

⚠	S	1	SWITCH	DSA1036
⚠	CN	1	CONNECTOR2P	2-178496-4
		0	MASK	DEC3212
⚠		0	CONNECTOR ASS'Y	DKP3799

CAPACITORS

⚠	C	1		ACG7030
---	---	---	--	---------