


# EXPLODED VIEW (UNIT)

Block No.200

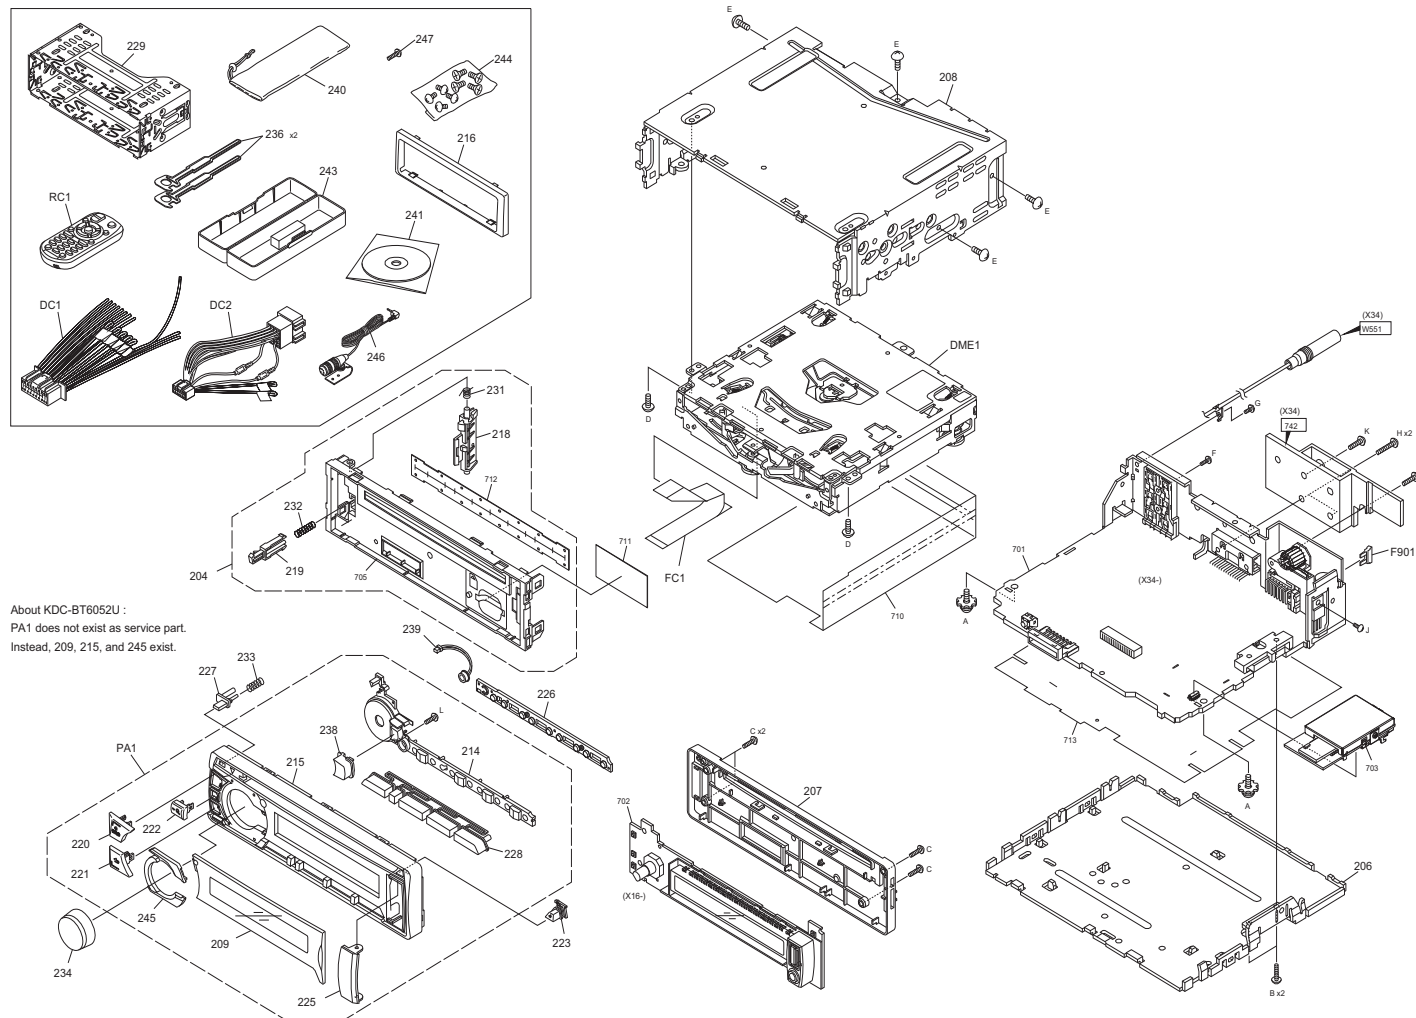


| MODEL     | MARK | MODEL       | MARK | MODEL      | MARK | MODEL      | MARK |
|-----------|------|-------------|------|------------|------|------------|------|
| KDC-BT42U | E2   | KDC-BT6052U | C0   | KDC-BT652U | K0   | KDC-U553BT | M1   |
| KDC-X696  | K1   |             |      |            |      |            |      |

| Safe                       | Symbol No. | Parts No.    | Parts Name                      | Description         | QTY | Local       |
|----------------------------|------------|--------------|---------------------------------|---------------------|-----|-------------|
| EXPLODED VIEW (UNIT) <200> |            |              |                                 |                     |     |             |
| △                          | DC1        | E30-6933-05  | DC CORD                         |                     | 1   | K0,M1,K1    |
| △                          | DC2        | E30-6934-05  | DC CORD                         |                     | 1   | E2          |
| △                          | DC2        | E30-6583-05  | DC CORD                         |                     | 1   | C0          |
|                            | DME1       | X92-6370-04  | MECHANISM ASSY                  | DXM-9B24W           | 1   |             |
| △                          | F901       | F52-0023-05  | FUSE                            | 32V 10A             | 1   |             |
|                            | FC1        | E39-1266-05  | FLAT CABLE                      |                     | 1   |             |
|                            | PA1        | A64-5355-12  | PANEL ASSY                      |                     | 1   | E2          |
|                            | PA1        | A64-5352-12  | PANEL ASSY                      |                     | 1   | K0          |
|                            | PA1        | A64-5356-12  | PANEL ASSY                      |                     | 1   | M1          |
|                            | PA1        | A64-5353-12  | PANEL ASSY                      |                     | 1   | K1          |
|                            | RC1        | A70-2104-05  | REMOTE CONTROLLER ASSY (RC-405) |                     | 1   | C0,K0,M1,K1 |
|                            | A          | N09-6758-05  | TAPTITE SCREW                   |                     | 2   |             |
|                            | B          | N35-2610-48  | BINDING HEAD                    | M2.6x10             | 2   |             |
|                            |            |              | MACHINE SCREW                   |                     |     |             |
|                            | C          | N80-2008-43  | PAN HEAD TAPTITE                | 2x8                 | 4   |             |
|                            |            |              | SCREW                           |                     |     |             |
|                            | D          | N86-2604-43  | BINDING HEAD TAPTITE            | 2.6x4               | 2   |             |
|                            |            |              | SCREW                           |                     |     |             |
|                            | E          | N86-2606-48  | BINDING HEAD TAPTITE            | 2.6x6               | 4   |             |
|                            |            |              | SCREW                           |                     |     |             |
|                            | F          | N80-3008-48  | PAN HEAD TAPTITE                | 3x8                 | 1   |             |
|                            |            |              | SCREW                           |                     |     |             |
|                            | G          | N83-3005-48  | PAN HEAD TAPTITE                | 3x5 B               | 1   |             |
|                            |            |              | SCREW                           |                     |     |             |
|                            | H          | N84-3014-48  | PAN HEAD TAPTITE                | 3x14                | 2   |             |
|                            |            |              | SCREW                           |                     |     |             |
|                            | J          | N86-2606-48  | BINDING HEAD TAPTITE            | 2.6x6               | 1   |             |
|                            |            |              | SCREW                           |                     |     |             |
|                            | K          | N89-3010-48  | BINDING HEAD TAPTITE            |                     | 2   |             |
|                            |            |              | SCREW                           |                     |     |             |
|                            | L          | QYSPSF2006ZA | TAP SCREW                       | M2 x 6mm            | 1   |             |
|                            | 204        | A22-3297-13  | SUB PANEL ASSY                  |                     | 1   |             |
|                            | 206        | A40-1421-11  | BOTTOM PLATE                    |                     | 1   |             |
|                            | 207        | A46-1929-01  | REAR COVER                      |                     | 1   |             |
|                            | 208        | A52-1156-01  | TOP COVER                       |                     | 1   |             |
|                            | 209        | B10-5491-01  | FRONT GLASS                     |                     | 1   | C0          |
|                            | 214        | GE10309-001A | LIGHT GUIDE (USB)               |                     | 1   |             |
|                            | 215        | GE10311-003A | FRONT PANEL USB                 |                     | 1   | C0          |
|                            | 216        | GE20291-001A | TRIM PLATE                      |                     | 1   | E2,M1,K1    |
|                            | 216        | GE20300-001A | TRIM PLATE                      |                     | 1   | C0,K0       |
|                            | 218        | GE34045-001A | LOCK LEVER                      |                     | 1   |             |
|                            | 219        | GE34046-001A | RELEASE LEVER                   |                     | 1   |             |
|                            | 220        | GE34291-001A | SRC BUTTON                      |                     | 1   |             |
|                            | 221        | GE34292-001A | BACK BUTTON                     |                     | 1   |             |
|                            | 222        | GE34293-002A | SEARCH BTN                      |                     | 1   |             |
|                            | 223        | GE34497-001A | EJECT BUTTON                    |                     | 1   |             |
|                            | 225        | GE34502-001A | USB DOOR COVER                  |                     | 1   |             |
|                            | 226        | GE34504-001A | CONDUCT. RUBBER                 |                     | 1   |             |
|                            | 227        | GE34505-001A | DETACH BUTTON                   |                     | 1   |             |
|                            | 228        | GE34517-001A | PRESET BTN                      |                     | 1   |             |
|                            | 229        | GE34826-001A | M.SLEEVE ASSY                   |                     | 1   |             |
|                            | 231        | GE40504-001A | SPRING                          |                     | 1   |             |
|                            | 232        | GE40505-001A | SPRING                          |                     | 1   |             |
|                            | 233        | GE40505-002A | SPRING                          |                     | 1   |             |
|                            | 234        | GE40562-003A | VOL KNOB RUBBER                 |                     | 1   |             |
|                            | 236        | GE40578-001A | HOOK                            |                     | 2   |             |
|                            | 238        | K28-0498-03  | KEY TOP                         |                     | 1   |             |
|                            | 239        | T91-1007-05  | MICROPHONE ASSY                 |                     | 1   | E2,C0,K0,M1 |
|                            | 240        | W01-1710-05  | CARRYING CASE                   |                     | 1   | E2,C0,K0    |
|                            | 240        | W01-1664-05  | CARRYING CASE (EXCELON)         |                     | 1   | K1          |
|                            | 241        | W01-2033-05  | COMPACT DISC (INST. MANUAL)     |                     | 1   | E2          |
|                            | 243        | A02-2757-13  | PLASTIC CABINET ASSY            |                     | 1   | M1          |
|                            | 244        | N99-1757-15  | SCREW SET                       |                     | 1   | K0,M1,K1    |
|                            | 245        | GE34498-004A | RIM COVER                       |                     | 1   | C0          |
|                            | 246        | W01-1768-15  | MICROPHONE (42dB)               |                     | 1   | K1          |
|                            | 247        | N80-2008-48  | PAN HEAD TAPTITE                | 2x8                 | 1   | K0,M1,K1    |
|                            |            |              | SCREW                           |                     |     |             |
| -                          |            | B64-4942-00  | INSTRUCTION MANUAL              | POR                 | 1   | C0          |
| -                          |            | B64-4919-00  | INSTRUCTION MANUAL              | ENG FRE SPA         | 1   | K0,K1       |
| -                          |            | B64-4920-00  | INSTRUCTION MANUAL              | ENG ARA             | 1   | M1          |
| -                          |            | B59-2123-00  | SUB-INSTRUCTION MANUAL          | ENG FRE GER DUT     | 1   | E2          |
| -                          |            | B59-2132-00  | SUB-INSTRUCTION MANUAL          | ITA SPA POR RUS UKR | 1   | E2          |
| -                          |            | H54-5187-03  | ITEM CARTON CASE                |                     | 1   | E2          |
| -                          |            | H54-5191-03  | ITEM CARTON CASE                |                     | 1   | C0          |
| -                          |            | H54-5184-03  | ITEM CARTON CASE                |                     | 1   | K0          |
| -                          |            | H54-5188-03  | ITEM CARTON CASE                |                     | 1   | M1          |
| -                          |            | H54-5185-03  | ITEM CARTON CASE                |                     | 1   | K1          |

# EXPLODED VIEW (CD MECHANISM)

Block No.130

DXM-9B24W

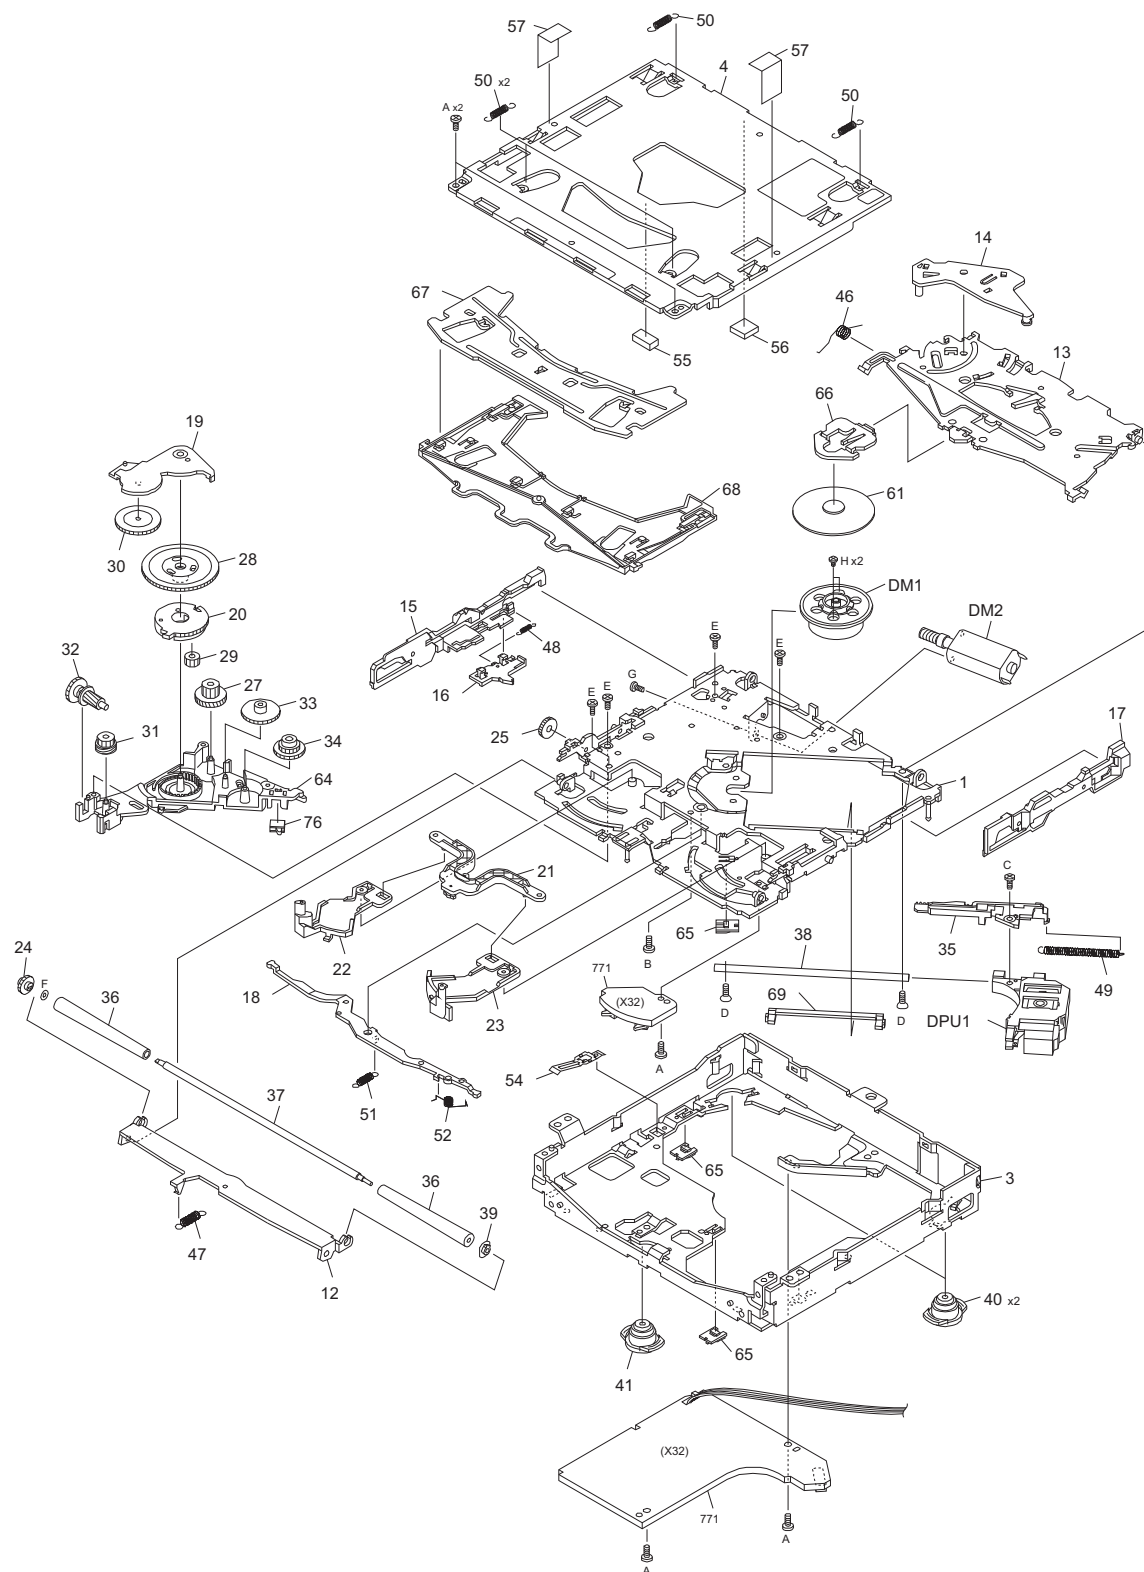

Parts with the exploded numbers larger than 700 are not supplied.

No.WA009

created date:2012-02-15

| MODEL     | MARK | MODEL       | MARK | MODEL      | MARK | MODEL      | MARK |
|-----------|------|-------------|------|------------|------|------------|------|
| KDC-BT42U | E2   | KDC-BT6052U | C0   | KDC-BT652U | K0   | KDC-U553BT | M1   |
| KDC-X696  | K1   |             |      |            |      |            |      |

| Safe                               | Symbol No. | Parts No.      | Parts Name                  | Description | QTY | Local       |
|------------------------------------|------------|----------------|-----------------------------|-------------|-----|-------------|
| EXPLODED VIEW (CD MECHANISM) <130> |            |                |                             |             |     |             |
|                                    | DM1        | X94-2090-00    | SPINDLE MOTOR ASSY          |             | 1   |             |
|                                    | DM2        | X94-2100-00    | FEED MOTOR ASSY (LOAD/SLED) |             | 1   |             |
|                                    | DPU1       | X93-2280-00    | OPTICAL PICKUP ASSY         |             | 1   |             |
|                                    | A          | N09-6108-15    | TAPTITE SCREW               |             | 5   |             |
|                                    | B          | N09-6426-15    | LOAD ARM SCREW              |             | 1   |             |
|                                    | C          | N09-6735-05    | PICK SCREW                  |             | 1   |             |
|                                    | D          | N09-6737-15    | SHAFT SCREW                 |             | 2   |             |
|                                    | E          | N09-6738-15    | GEAR SCREW                  |             | 4   |             |
|                                    | F          | N19-2335-14    | ROLLER WASHER               |             | 1   |             |
|                                    | G          | N35-2003-48    | BINDING HEAD                | M2x3        | 1   |             |
|                                    |            |                | MACHINE SCREW               |             |     |             |
|                                    | H          | N39-1720-48    | PAN HEAD MACHINE SCREW      | M1.7x2.0    | 2   |             |
|                                    | 1          | A10-5450-73    | MD CHASSIS ASSY             |             | 1   |             |
|                                    | 3          | A10-5574-01    | OUTER CHASSIS T2            |             | 1   |             |
|                                    | 4          | A10-5453-32    | TOP CHASSIS                 |             | 1   |             |
|                                    | 12         | D10-4993-62    | ROLLER LEVER                |             | 1   |             |
|                                    | 13         | D10-4991-22    | CLAMP ARM                   |             | 1   |             |
|                                    | 14         | D10-4992-23    | TRIGGER ARM                 |             | 1   |             |
|                                    | 15         | D10-4994-02    | SLIDER L                    |             | 1   |             |
|                                    | 16         | D10-4995-03    | TRIGGER SLIDER              |             | 1   |             |
|                                    | 17         | D10-4996-02    | SLIDER R                    |             | 1   |             |
|                                    | 18         | D10-4997-03    | JOINT LEVER                 |             | 1   |             |
|                                    | 19         | D10-4998-03    | LOADING ARM                 |             | 1   |             |
|                                    | 20         | D10-4999-03    | CARRIER ARM                 |             | 1   |             |
|                                    | 21         | D10-7001-03    | JOINT ARM                   |             | 1   |             |
|                                    | 22         | D10-7002-03    | DISC ARM L                  |             | 1   |             |
|                                    | 23         | D10-7003-03    | DISC ARM R                  |             | 1   |             |
|                                    | 24         | D13-2445-04    | ROLLER GEAR                 |             | 1   |             |
|                                    | 25         | D13-2446-04    | LOAD GEAR 2                 |             | 1   |             |
|                                    | 27         | D13-2448-04    | HELICAL GEAR 1              |             | 1   |             |
|                                    | 28         | D13-2449-04    | SUN GEAR                    |             | 1   |             |
|                                    | 29         | D13-2450-04    | PLANET GEAR                 |             | 1   |             |
|                                    | 30         | D13-2451-04    | LOAD GEAR 1                 |             | 1   |             |
|                                    | 31         | D13-2452-04    | WORM 2                      |             | 1   |             |
|                                    | 32         | D13-2453-04    | HELICAL GEAR 2              |             | 1   |             |
|                                    | 33         | D13-2454-04    | PICK GEAR 1                 |             | 1   |             |
|                                    | 34         | D13-2455-04    | PICK GEAR 2                 |             | 1   |             |
|                                    | 35         | D13-2456-03    | RACK GEAR                   |             | 1   |             |
|                                    | 36         | D14-1028-04    | ROLLER                      |             | 2   |             |
|                                    | 37         | D21-2507-04    | ROLLER SHAFT                |             | 1   |             |
|                                    | 38         | D21-2508-04    | PICK UP SHAFT               |             | 1   |             |
|                                    | 39         | D23-0963-04    | ROLLER RETAINER             |             | 1   |             |
|                                    | 40         | D39-0277-15    | REAR DAMPER                 |             | 2   |             |
|                                    | 41         | D39-0278-15    | FRONT DAMPER                |             | 1   |             |
|                                    | 46         | G01-4682-34    | CLAMP SPRING                |             | 1   |             |
|                                    | 47         | G01-4756-04    | ROLLER SPRING               |             | 1   |             |
|                                    | 48         | G01-4684-04    | TRIGGER SPRING              |             | 1   |             |
|                                    | 49         | G01-4685-04    | PICK UP SPRING              |             | 1   |             |
|                                    | 50         | G01-4686-14    | FLOATING SP F               |             | 4   |             |
|                                    | 51         | G01-4688-14    | JOINT ARM SPRING            |             | 1   |             |
|                                    | 52         | G01-4692-24    | LOAD SPRING                 |             | 1   |             |
|                                    | 54         | G02-1588-04    | HOLE SPRING V               |             | 1   |             |
|                                    | 55         | G13-1297-04    | CLAMPER CUSSION             |             | 1   |             |
|                                    | 56         | G13-1299-14    | STROKE CUSHION              |             | 1   |             |
|                                    | 57         | G16-1715-04    | OUTER SHEET                 |             | 2   |             |
|                                    | 61         | J11-0675-03    | CLAMPER                     |             | 1   |             |
|                                    | 64         | J19-7210-21    | GEAR HOLDER                 |             | 1   |             |
|                                    | 65         | J19-7225-04    | WIRE HOLDER                 |             | 3   |             |
|                                    | 66         | J22-0706-03    | CLAMPER HOLDER              |             | 1   |             |
|                                    | 67         | J22-0707-12    | GUIDE BKT                   |             | 1   |             |
|                                    | 68         | J90-1166-11    | DISC GUIDE                  |             | 1   |             |
|                                    | 69         | J90-1168-03    | SUB RAIL HOLDER             |             | 1   |             |
|                                    | 76         | S68-0921-05    | PUSH SWITCH                 |             | 1   |             |
| ELECTRIC UNIT (X34-735x-xx) <X34>  |            |                |                             |             |     |             |
|                                    | IC1        | BD49131-V4     | ANALOGUE IC                 |             | 1   |             |
|                                    | IC21       | BU33TD3WG      | ANALOGUE IC                 |             | 1   |             |
|                                    | IC51       | MP2560DN-C413  | ANALOGUE IC                 |             | 1   |             |
|                                    | IC60       | AN33013UA-VB   | ANALOGUE IC                 |             | 1   |             |
|                                    | IC201      | W10-0729-08    | IC(MCU)                     |             | 1   | E2,C0,M1    |
|                                    | IC201      | W10-0728-08    | IC(MCU)                     |             | 1   | K0,K1       |
|                                    | IC202      | XC6119N28AN-G  | MOS-IC                      |             | 1   |             |
|                                    | IC203      | BR24T08FVT-W   | ROM IC                      |             | 1   |             |
|                                    | IC261      | MF1341S2162    | MICROPROCESSOR IC           |             | 1   |             |
|                                    | IC301      | TC7SET125FU-F  | MOS-IC                      |             | 1   |             |
|                                    | IC401      | TDA7718B-X     | ANALOGUE IC                 |             | 1   | E2          |
|                                    | IC401      | TDA7720-X      | ANALOGUE IC                 |             | 1   | C0,K0,M1,K1 |
|                                    | IC501      | TEF6614TV1S3-X | ANALOGUE IC                 |             | 1   | E2          |
|                                    | IC501      | TEF6614TV1S4-X | ANALOGUE IC                 |             | 1   | C0,K0,M1,K1 |
|                                    | IC801      | TB2931HQ       | ANALOGUE IC                 |             | 1   |             |
|                                    | IC901      | BA4560RFV      | ANALOGUE IC                 |             | 1   |             |
|                                    | IC921      | TC4053BFT(N)   | ANALOGUE IC                 |             | 1   | E2          |
|                                    | Q1         | KTA1046-P      | TRANSISTOR                  |             | 1   |             |
|                                    | Q4         | LTA024EUBFS8   | TRANSISTOR                  |             | 1   |             |
|                                    | Q6         | LTA024EUBFS8   | TRANSISTOR                  |             | 1   | M1          |
|                                    | Q8         | LTA024EUBFS8   | TRANSISTOR                  |             | 1   |             |
|                                    | Q10        | LTA024EUBFS8   | TRANSISTOR                  |             | 1   |             |
|                                    | Q91        | LSAR523UBFS8   | TRANSISTOR                  |             | 1   | K1          |

| MODEL     | MARK | MODEL       | MARK | MODEL      | MARK | MODEL      | MARK |
|-----------|------|-------------|------|------------|------|------------|------|
| KDC-BT42U | E2   | KDC-BT6052U | C0   | KDC-BT652U | K0   | KDC-U553BT | M1   |
| KDC-X696  | K1   |             |      |            |      |            |      |

| Safe | Symbol No. | Parts No.     | Parts Name     | Description   | QTY | Local       |
|------|------------|---------------|----------------|---------------|-----|-------------|
|      | Q92        | LSAR523UBFS8  | TRANSISTOR     |               | 1   | K1          |
|      | Q93        | LSAR523UBFS8  | TRANSISTOR     |               | 1   | K1          |
|      | Q94        | 2SB1188(Q,R)  | TRANSISTOR     |               | 1   | K1          |
|      | Q301       | LTA023JUBFS8  | TRANSISTOR     |               | 1   |             |
|      | Q707       | LTA014YUBFS8  | TRANSISTOR     |               | 1   |             |
|      | Q850       | 2SA1576A      | TRANSISTOR     |               | 1   |             |
|      | D1         | S2V60-5009F46 | DIODE          |               | 1   |             |
|      | D2         | RKZ8.2KG(B2)  | Z DIODE        |               | 1   |             |
|      | D3         | GS1J-LTP-X    | DIODE          |               | 1   |             |
|      | D4         | MC2848-T111   | DIODE          |               | 1   |             |
|      | D10        | RKZ5.1KG(B2)  | Z DIODE        |               | 1   | K1          |
|      | D11        | RKS801KF      | DIODE          |               | 1   | K1          |
|      | D51        | CMS14         | DIODE          |               | 1   |             |
|      | D52        | RKS801KF      | DIODE          |               | 1   |             |
|      | D70        | CMS14         | DIODE          |               | 1   |             |
|      | D101       | GS1J-LTP-X    | DIODE          |               | 1   |             |
|      | D102       | GS1J-LTP-X    | DIODE          |               | 1   |             |
|      | D103       | GS1J-LTP-X    | DIODE          |               | 1   | E2,M1       |
|      | D104       | GS1J-LTP-X    | DIODE          |               | 1   | E2,M1       |
|      | D105       | MC2846-T111   | DIODE          |               | 1   |             |
|      | D106       | UDZW6.8(B)    | Z DIODE        |               | 1   |             |
|      | D107       | UDZW6.8(B)    | Z DIODE        |               | 1   |             |
|      | D108       | UDZW6.8(B)    | Z DIODE        |               | 1   |             |
|      | D201       | RB521S-30     | DIODE          |               | 1   | E2,K0,M1,K1 |
|      | D202       | RKZ6.8KG(B2)  | Z DIODE        |               | 1   | E2,K0,M1,K1 |
|      | D301       | MC2850-T111   | DIODE          |               | 1   |             |
|      | D302       | RKZ6.8KG(B2)  | Z DIODE        |               | 1   |             |
|      | D303       | RKZ6.8KG(B2)  | Z DIODE        |               | 1   |             |
|      | D304       | RKZ6.8KG(B2)  | Z DIODE        |               | 1   |             |
|      | D307       | HZM6.8ZMWA-E  | Z DIODE        |               | 1   |             |
|      | D308       | MC2850-T111   | DIODE          |               | 1   |             |
|      | D403       | MC2846-T111   | DIODE          |               | 1   |             |
|      | D501       | IMSA-6802-E   | SURGE ABSORBER |               | 1   |             |
|      | D502       | MC2850-T111   | DIODE          |               | 1   | E2,K0,M1,K1 |
|      | D701       | MC2846-T111   | DIODE          |               | 1   |             |
|      | D801       | MC2846-T111   | DIODE          |               | 1   |             |
|      | D921       | RKZ5.6KG(B2)  | Z DIODE        |               | 1   | E2,K1       |
|      | D922       | RKZ5.6KG(B2)  | Z DIODE        |               | 1   | E2          |
|      | C1         | CD04AZ1C332M2 | ELECTRO        | 3300UF 16WV   | 1   |             |
|      | C4         | CK73GB1C104K  | CHIP C         | 16V 0.10UF K  | 1   |             |
|      | C6         | CK73GB1H104K  | CHIP C         | 50V 0.10UF K  | 1   |             |
|      | C7         | CK73GB1H104K  | CHIP C         | 50V 0.10UF K  | 1   | M1          |
|      | C8         | CD04BN1C221M  | ELECTRO        | 220UF 16WV    | 1   |             |
|      | C9         | CD04AS0J101M  | ELECTRO        | 100UF 6.3WV   | 1   |             |
|      | C10        | CK73GB1C104K  | CHIP C         | 16V 0.10UF K  | 1   |             |
|      | C11        | CK73GB1C104K  | CHIP C         | 16V 0.10UF K  | 1   |             |
|      | C12        | CK73GB1C104K  | CHIP C         | 16V 0.10UF K  | 1   |             |
|      | C13        | CK73GB1C104K  | CHIP C         | 16V 0.10UF K  | 1   |             |
|      | C15        | CK73GB1C224K  | CHIP C         | 16V 0.22UF K  | 1   |             |
|      | C22        | CK73GB1A105K  | CHIP C         | 10V 1.0UF K   | 1   |             |
|      | C23        | CK73GB1A105K  | CHIP C         | 10V 1.0UF K   | 1   |             |
|      | C24        | CD04AS0J470M  | ELECTRO        | 47UF 6.3WV    | 1   |             |
|      | C52        | CK73FB0J226M  | CHIP C         | 22UF M        | 1   |             |
|      | C53        | CC73HCH1H221J | CHIP C         | 50V 220PF J   | 1   |             |
|      | C54        | CK73GB1C104K  | CHIP C         | 16V 0.10UF K  | 1   |             |
|      | C55        | CK73GB1H102K  | CHIP C         | 50V 1000PF K  | 1   |             |
|      | C58        | CK73EB1H475K  | CHIP C         | 50V 4.7UF K   | 1   |             |
|      | C62        | CK73GB1C104K  | CHIP C         | 16V 0.10UF K  | 1   |             |
|      | C64        | CK73GB1C104K  | CHIP C         | 16V 0.10UF K  | 1   |             |
|      | C66        | CC73GCH1H471J | CHIP C         | 50V 470PF J   | 1   |             |
|      | C67        | CC73HCH1H270J | CHIP C         | 50V 27PF J    | 1   |             |
|      | C68        | CK73GB1H222K  | CHIP C         | 50V 2200PF K  | 1   |             |
|      | C72        | CK73GB1A105K  | CHIP C         | 10V 1.0UF K   | 1   |             |
|      | C76        | CK73EB1H475K  | CHIP C         | 50V 4.7UF K   | 1   |             |
|      | C80        | CK73GB1C104K  | CHIP C         | 16V 0.10UF K  | 1   |             |
|      | C81        | CK73GB1C104K  | CHIP C         | 16V 0.10UF K  | 1   |             |
|      | C82        | CD04BR1C221M  | ELECTRO        | 220UF 16WV    | 1   |             |
|      | C83        | CK73FB0J226M  | CHIP C         | 22UF M        | 1   |             |
|      | C91        | CD04BN1C221M  | ELECTRO        | 220UF 16WV    | 1   | K1          |
|      | C93        | CC73GCH1H470J | CHIP C         | 50V 47PF J    | 1   | K1          |
|      | C94        | CK73GB1A105K  | CHIP C         | 10V 1.0UF K   | 1   | K1          |
|      | C95        | CK73GB1H102K  | CHIP C         | 50V 1000PF K  | 1   | K1          |
|      | C101       | CK73HB1E103K  | CHIP C         | 25V 0.010UF K | 1   |             |
|      | C102       | CK73GB1H104K  | CHIP C         | 50V 0.10UF K  | 1   |             |
|      | C202       | CC73HCH1H180J | CHIP C         | 50V 18PF J    | 1   |             |
|      | C203       | CC73HCH1H220J | CHIP C         | 50V 22PF J    | 1   |             |
|      | C204       | CK73GB1C104K  | CHIP C         | 16V 0.10UF K  | 1   |             |
|      | C205       | CK73GB1H682K  | CHIP C         | 50V 6800PF K  | 1   |             |
|      | C210       | CK73HB1A104K  | CHIP C         | 10V 0.10UF K  | 1   |             |
|      | C211       | CK73HB1A104K  | CHIP C         | 10V 0.10UF K  | 1   |             |
|      | C212       | CK73HB1A104K  | CHIP C         | 10V 0.10UF K  | 1   |             |
|      | C213       | CK73GB1C104K  | CHIP C         | 16V 0.10UF K  | 1   |             |
|      | C214       | CK73HB1A104K  | CHIP C         | 10V 0.10UF K  | 1   |             |
|      | C215       | CK73HB1A104K  | CHIP C         | 10V 0.10UF K  | 1   |             |
|      | C216       | CK73HB1A104K  | CHIP C         | 10V 0.10UF K  | 1   |             |
|      | C217       | CC73HCH1H080D | CHIP C         | 50V 8.0PF D   | 1   |             |
|      | C218       | CC73HCH1H080D | CHIP C         | 50V 8.0PF D   | 1   |             |
|      | C261       | CK73HB1A104K  | CHIP C         | 10V 0.10UF K  | 1   |             |
|      | C301       | CD04AS1HR47M  | ELECTRO        | 0.47UF 50WV   | 1   |             |
|      | C302       | CD04AS1HR47M  | ELECTRO        | 0.47UF 50WV   | 1   |             |
|      | C303       | CK73GB1C104K  | CHIP C         | 16V 0.10UF K  | 1   |             |
|      | C304       | CK73GB1C104K  | CHIP C         | 16V 0.10UF K  | 1   |             |

|           |      |             |      |            |      |            |      |
|-----------|------|-------------|------|------------|------|------------|------|
| MODEL     | MARK | MODEL       | MARK | MODEL      | MARK | MODEL      | MARK |
| KDC-BT42U | E2   | KDC-BT6052U | C0   | KDC-BT652U | K0   | KDC-U553BT | M1   |
| KDC-X696  | K1   |             |      |            |      |            |      |

| Safe | Symbol No. | Parts No.     | Parts Name | Description   | QTY | Local       |
|------|------------|---------------|------------|---------------|-----|-------------|
|      | C305       | CK73GB1H102K  | CHIP C     | 50V 1000PF K  | 1   |             |
|      | C306       | CK73GB1H102K  | CHIP C     | 50V 1000PF K  | 1   |             |
|      | C307       | CD04AS0J470M  | ELECTRO    | 47UF 6.3WV    | 1   |             |
|      | C308       | CK73GB1H103K  | CHIP C     | 50V 0.010UF K | 1   |             |
|      | C311       | CC73GCH1H020C | CHIP C     | 50V 2.0PF C   | 1   |             |
|      | C401       | CK73GB1A105K  | CHIP C     | 10V 1.0UF K   | 1   |             |
|      | C402       | CK73GB1A105K  | CHIP C     | 10V 1.0UF K   | 1   |             |
|      | C406       | CD04AS1C470M  | ELECTRO    | 47UF 16WV     | 1   |             |
|      | C407       | CK73GB1A105K  | CHIP C     | 10V 1.0UF K   | 1   |             |
|      | C408       | CK73GB1A105K  | CHIP C     | 10V 1.0UF K   | 1   |             |
|      | C409       | CK73GB1A105K  | CHIP C     | 10V 1.0UF K   | 1   |             |
|      | C410       | CK73GB1A105K  | CHIP C     | 10V 1.0UF K   | 1   |             |
|      | C411       | CD04AS1H010M  | ELECTRO    | 1UF 50WV      | 1   |             |
|      | C501       | CK73GB1H102K  | CHIP C     | 50V 1000PF K  | 1   |             |
|      | C502       | CK73GB1A105K  | CHIP C     | 10V 1.0UF K   | 1   |             |
|      | C505       | CK73GB1C224K  | CHIP C     | 16V 0.22UF K  | 1   |             |
|      | C506       | CK73GB1C104K  | CHIP C     | 16V 0.10UF K  | 1   |             |
|      | C507       | CC73GCH1H120J | CHIP C     | 50V 12PF J    | 1   |             |
|      | C509       | CK73GB1A105K  | CHIP C     | 10V 1.0UF K   | 1   |             |
|      | C510       | CK73GB1A105K  | CHIP C     | 10V 1.0UF K   | 1   |             |
|      | C511       | CK73GB1A105K  | CHIP C     | 10V 1.0UF K   | 1   |             |
|      | C512       | CK73GB1H103K  | CHIP C     | 50V 0.010UF K | 1   |             |
|      | C513       | CK73GB1H103K  | CHIP C     | 50V 0.010UF K | 1   |             |
|      | C514       | CK73GB1H103K  | CHIP C     | 50V 0.010UF K | 1   |             |
|      | C515       | CK73GB1C104K  | CHIP C     | 16V 0.10UF K  | 1   |             |
|      | C516       | CK73GB1H103K  | CHIP C     | 50V 0.010UF K | 1   |             |
|      | C517       | CK73GB1C104K  | CHIP C     | 16V 0.10UF K  | 1   |             |
|      | C518       | CK73GB1H102K  | CHIP C     | 50V 1000PF K  | 1   |             |
|      | C519       | CD04AS1C470M  | ELECTRO    | 47UF 16WV     | 1   |             |
|      | C520       | CK73GB1C104K  | CHIP C     | 16V 0.10UF K  | 1   |             |
|      | C523       | CK73GB1H102K  | CHIP C     | 50V 1000PF K  | 1   |             |
|      | C524       | CK73GB1C224K  | CHIP C     | 16V 0.22UF K  | 1   |             |
|      | C525       | CC73GCH1H270J | CHIP C     | 50V 27PF J    | 1   |             |
|      | C527       | CC73GCH1H150J | CHIP C     | 50V 15PF J    | 1   |             |
|      | C528       | CC73GCH1H471J | CHIP C     | 50V 470PF J   | 1   |             |
|      | C530       | CK73GB1H102K  | CHIP C     | 50V 1000PF K  | 1   |             |
|      | C531       | CC73GCH1H070D | CHIP C     | 50V 7.0PF D   | 1   |             |
|      | C532       | CC73GCH1H060D | CHIP C     | 50V 6.0PF D   | 1   |             |
|      | C533       | CC73GCH1H020C | CHIP C     | 50V 2.0PF C   | 1   |             |
|      | C539       | CC73GCH1H040C | CHIP C     | 50V 4.0PF C   | 1   |             |
|      | C540       | CC73GCH1H040C | CHIP C     | 50V 4.0PF C   | 1   |             |
|      | C541       | CK73GB1H102K  | CHIP C     | 50V 1000PF K  | 1   | E2,K0,M1,K1 |
|      | C701       | CD04AS1V100M  | ELECTRO    | 10UF 35WV     | 1   | C0,K0,M1,K1 |
|      | C702       | CD04AS1V100M  | ELECTRO    | 10UF 35WV     | 1   | C0,K0,M1,K1 |
|      | C703       | CD04AS1V100M  | ELECTRO    | 10UF 35WV     | 1   | C0,K0,M1,K1 |
|      | C704       | CD04AS1V100M  | ELECTRO    | 10UF 35WV     | 1   | C0,K0,M1,K1 |
|      | C705       | CD04AS1V100M  | ELECTRO    | 10UF 35WV     | 1   |             |
|      | C706       | CD04AS1V100M  | ELECTRO    | 10UF 35WV     | 1   |             |
|      | C801       | CK73GB1C224K  | CHIP C     | 16V 0.22UF K  | 1   |             |
|      | C802       | CK73GB1C224K  | CHIP C     | 16V 0.22UF K  | 1   |             |
|      | C803       | CK73GB1C224K  | CHIP C     | 16V 0.22UF K  | 1   |             |
|      | C804       | CK73GB1C224K  | CHIP C     | 16V 0.22UF K  | 1   |             |
|      | C805       | CD04AS1V100M  | ELECTRO    | 10UF 35WV     | 1   |             |
|      | C806       | CK73GB1A105K  | CHIP C     | 10V 1.0UF K   | 1   |             |
|      | C807       | CK73HB0J105K  | CHIP C     | 6.3V 1.0UF K  | 1   |             |
|      | C808       | CK73GB1A105K  | CHIP C     | 10V 1.0UF K   | 1   |             |
|      | C852       | CD04AS1V100M  | ELECTRO    | 10UF 35WV     | 1   |             |
|      | C853       | CK73GB1C104K  | CHIP C     | 16V 0.10UF K  | 1   |             |
|      | C854       | CK73GB1C104K  | CHIP C     | 16V 0.10UF K  | 1   |             |
|      | C855       | CK73GB1H103K  | CHIP C     | 50V 0.010UF K | 1   |             |
|      | C856       | CK73GB1A105K  | CHIP C     | 10V 1.0UF K   | 1   |             |
|      | C857       | CD04AS0J101M  | ELECTRO    | 100UF 6.3WV   | 1   |             |
|      | C858       | CK73GB1C104K  | CHIP C     | 16V 0.10UF K  | 1   |             |
|      | C863       | CK73GB1A105K  | CHIP C     | 10V 1.0UF K   | 1   |             |
|      | C864       | CK73GB1A105K  | CHIP C     | 10V 1.0UF K   | 1   |             |
|      | C865       | CK73GB1A105K  | CHIP C     | 10V 1.0UF K   | 1   |             |
|      | C866       | CK73GB1A105K  | CHIP C     | 10V 1.0UF K   | 1   |             |
|      | C867       | CC73GCH1H470J | CHIP C     | 50V 47PF J    | 1   |             |
|      | C868       | CC73GCH1H470J | CHIP C     | 50V 47PF J    | 1   |             |
|      | C869       | CC73GCH1H470J | CHIP C     | 50V 47PF J    | 1   |             |
|      | C870       | CC73GCH1H470J | CHIP C     | 50V 47PF J    | 1   |             |
|      | C921       | CK73GB1H103K  | CHIP C     | 50V 0.010UF K | 1   | E2          |
|      | R1         | RK73FB2B152J  | CHIP R     | 1.5K J 1/8W   | 1   |             |
|      | R2         | RK73HB1J102J  | CHIP R     | 1.0K J 1/16W  | 1   |             |
|      | R51        | RK73GH2A243D  | CHIP R     | 24K D 1/10W   | 1   |             |
|      | R52        | RK73GH2A753D  | CHIP R     | 75K D 1/10W   | 1   |             |
|      | R53        | RK73HB1J683J  | CHIP R     | 68K J 1/16W   | 1   |             |
|      | R54        | RK73GH2A913D  | CHIP R     | 91K D 1/10W   | 1   |             |
|      | R55        | RK73GH2A334D  | CHIP R     | 330K D 1/10W  | 1   |             |
|      | R56        | RK73GH2A154D  | CHIP R     | 150K D 1/10W  | 1   |             |
|      | R57        | RK73HB1J102J  | CHIP R     | 1.0K J 1/16W  | 1   |             |
|      | R59        | RK73EB2E150J  | CHIP R     | 15 J 1/4W     | 1   |             |
|      | R61        | RK73GH2A273D  | CHIP R     | 27K D 1/10W   | 1   |             |
|      | R62        | RK73GH2A623D  | CHIP R     | 62K D 1/10W   | 1   |             |
|      | R63        | RK73HB1J473J  | CHIP R     | 47K J 1/16W   | 1   |             |
|      | R64        | RK73GH2A153D  | CHIP R     | 15K D 1/10W   | 1   |             |
|      | R65        | RK73GB2A152J  | CHIP R     | 1.5K J 1/10W  | 1   |             |
|      | R66        | R92-5244-05   | CHIP R     | 0.039 1/3W    | 1   |             |
|      | R67        | RK73GB2A752J  | CHIP R     | 7.5K J 1/10W  | 1   |             |
|      | R69        | RK73GH2A273D  | CHIP R     | 27K D 1/10W   | 1   |             |

| MODEL     | MARK | MODEL       | MARK | MODEL      | MARK | MODEL      | MARK |
|-----------|------|-------------|------|------------|------|------------|------|
| KDC-BT42U | E2   | KDC-BT6052U | C0   | KDC-BT652U | K0   | KDC-U553BT | M1   |
| KDC-X696  | K1   |             |      |            |      |            |      |

| Safe | Symbol No. | Parts No.    | Parts Name | Description  | QTY | Local       |
|------|------------|--------------|------------|--------------|-----|-------------|
|      | R70        | RK73EB2E330J | CHIP R     | 33 J 1/4W    | 1   |             |
|      | R71        | RK73EB2E470J | CHIP R     | 47 J 1/4W    | 1   |             |
|      | R72        | RK73EB2E470J | CHIP R     | 47 J 1/4W    | 1   |             |
|      | R76        | RK73HB1J223J | CHIP R     | 22K J 1/16W  | 1   |             |
|      | R77        | RK73HB1J101J | CHIP R     | 100 J 1/16W  | 1   |             |
|      | R91        | RK73GH2A562D | CHIP R     | 5.6K D 1/10W | 1   | K1          |
|      | R92        | RK73GH2A432D | CHIP R     | 4.3K D 1/10W | 1   | K1          |
|      | R93        | RK73FB2B561J | CHIP R     | 560 J 1/8W   | 1   | K1          |
|      | R94        | RK73FB2B4R7J | CHIP R     | 4.7 J 1/8W   | 1   | K1          |
|      | R95        | RK73FB2B152J | CHIP R     | 1.5K J 1/8W  | 1   | K1          |
|      | R96        | RK73FB2B432J | CHIP R     | 4.3K J 1/8W  | 1   | K1          |
|      | R98        | RK73FB2B201J | CHIP R     | 200 J 1/8W   | 1   | K1          |
|      | R99        | RK73GB2A103J | CHIP R     | 10K J 1/10W  | 1   | K1          |
|      | R101       | RK73FB2B472J | CHIP R     | 4.7K J 1/8W  | 1   |             |
|      | R102       | RK73FB2B472J | CHIP R     | 4.7K J 1/8W  | 1   | E2,M1       |
|      | R103       | RK73EB2E102J | CHIP R     | 1.0K J 1/4W  | 1   |             |
|      | R104       | RK73EB2E102J | CHIP R     | 1.0K J 1/4W  | 1   |             |
|      | R105       | RK73EB2E102J | CHIP R     | 1.0K J 1/4W  | 1   |             |
|      | R106       | RK73EB2E333J | CHIP R     | 33K J 1/4W   | 1   |             |
|      | R107       | RK73HB1J103J | CHIP R     | 10K J 1/16W  | 1   |             |
|      | R108       | RK73GB2A223J | CHIP R     | 22K J 1/10W  | 1   |             |
|      | R109       | RK73FB2B683J | CHIP R     | 68K J 1/8W   | 1   |             |
|      | R110       | RK73GB2A473J | CHIP R     | 47K J 1/10W  | 1   |             |
|      | R111       | RK73EB2E203J | CHIP R     | 20K J 1/4W   | 1   |             |
|      | R112       | RK73HB1J104J | CHIP R     | 100K J 1/16W | 1   |             |
|      | R113       | RK73GB2A103J | CHIP R     | 10K J 1/10W  | 1   |             |
|      | R114       | RK73HB1J103J | CHIP R     | 10K J 1/16W  | 1   |             |
|      | R115       | RK73HB1J103J | CHIP R     | 10K J 1/16W  | 1   |             |
|      | R117       | RK73GB2A123J | CHIP R     | 12K J 1/10W  | 1   |             |
|      | R118       | RK73GB2A683J | CHIP R     | 68K J 1/10W  | 1   |             |
|      | R119       | RK73HB1J103J | CHIP R     | 10K J 1/16W  | 1   |             |
|      | R124       | RK73HB1J363J | CHIP R     | 36K J 1/16W  | 1   |             |
|      | R125       | RK73HB1J104J | CHIP R     | 100K J 1/16W | 1   |             |
|      | R151       | RK73HB1J000J | CHIP R     | 0.0 J 1/16W  | 1   | M1          |
|      | R152       | RK73HB1J000J | CHIP R     | 0.0 J 1/16W  | 1   | E2          |
|      | R202       | RK73GB2A102J | CHIP R     | 1.0K J 1/10W | 1   |             |
|      | R203       | RK73GB2A223J | CHIP R     | 22K J 1/10W  | 1   |             |
|      | R204       | RK73GB2A104J | CHIP R     | 100K J 1/10W | 1   |             |
|      | R205       | RK73HB1J102J | CHIP R     | 1.0K J 1/16W | 1   |             |
|      | R206       | RK73GB2A100J | CHIP R     | 10 J 1/10W   | 1   |             |
|      | R207       | RK73HB1J153J | CHIP R     | 15K J 1/16W  | 1   |             |
|      | R208       | RK73GB2A100J | CHIP R     | 10 J 1/10W   | 1   |             |
|      | R209       | RK73HB1J153J | CHIP R     | 15K J 1/16W  | 1   |             |
|      | R212       | RK73GB2A223J | CHIP R     | 22K J 1/10W  | 1   | C0          |
|      | R212       | RK73GB2A473J | CHIP R     | 47K J 1/10W  | 1   | M1,K1       |
|      | R213       | RK73GB2A473J | CHIP R     | 47K J 1/10W  | 1   | E2,C0,K0    |
|      | R216       | RK73HB1J104J | CHIP R     | 100K J 1/16W | 1   |             |
|      | R217       | RK73GB2A473J | CHIP R     | 47K J 1/10W  | 1   |             |
|      | R218       | RK73EB2E102J | CHIP R     | 1.0K J 1/4W  | 1   |             |
|      | R219       | RK73GB2A473J | CHIP R     | 47K J 1/10W  | 1   |             |
|      | R220       | RK73HB1J104J | CHIP R     | 100K J 1/16W | 1   |             |
|      | R222       | RK73HB1J101J | CHIP R     | 100 J 1/16W  | 1   |             |
|      | R223       | RK73HB1J102J | CHIP R     | 1.0K J 1/16W | 1   |             |
|      | R224       | RK73HB1J101J | CHIP R     | 100 J 1/16W  | 1   |             |
|      | R225       | RK73HB1J101J | CHIP R     | 100 J 1/16W  | 1   |             |
|      | R226       | RK73HB1J223J | CHIP R     | 22K J 1/16W  | 1   |             |
|      | R227       | RK73GB2A223J | CHIP R     | 22K J 1/10W  | 1   |             |
|      | R228       | RK73GB2A101J | CHIP R     | 100 J 1/10W  | 1   |             |
|      | R229       | RK73GB2A101J | CHIP R     | 100 J 1/10W  | 1   |             |
|      | R230       | RK73GB2A223J | CHIP R     | 22K J 1/10W  | 1   |             |
|      | R231       | RK73HB1J101J | CHIP R     | 100 J 1/16W  | 1   |             |
|      | R232       | RK73GB2A102J | CHIP R     | 1.0K J 1/10W | 1   |             |
|      | R233       | RK73HB1J101J | CHIP R     | 100 J 1/16W  | 1   |             |
|      | R234       | RK73HB1J102J | CHIP R     | 1.0K J 1/16W | 1   |             |
|      | R238       | RK73EB2E471J | CHIP R     | 470 J 1/4W   | 1   | E2,K0,M1,K1 |
|      | R240       | RK73GB2A332J | CHIP R     | 3.3K J 1/10W | 1   |             |
|      | R241       | RK73GB2A332J | CHIP R     | 3.3K J 1/10W | 1   |             |
|      | R250       | RK73HB1J102J | CHIP R     | 1.0K J 1/16W | 1   |             |
|      | R261       | RK73GB2A223J | CHIP R     | 22K J 1/10W  | 1   |             |
|      | R262       | RK73HB1J223J | CHIP R     | 22K J 1/16W  | 1   |             |
|      | R263       | RK73HB1J333J | CHIP R     | 33K J 1/16W  | 1   |             |
|      | R266       | RK73GB2A332J | CHIP R     | 3.3K J 1/10W | 1   |             |
|      | R267       | RK73GB2A332J | CHIP R     | 3.3K J 1/10W | 1   |             |
|      | R271       | RK73HB1J101J | CHIP R     | 100 J 1/16W  | 1   |             |
|      | R272       | RK73HB1J473J | CHIP R     | 47K J 1/16W  | 1   | E2,C0,K0,M1 |
|      | R273       | RK73HB1J103J | CHIP R     | 10K J 1/16W  | 1   |             |
|      | R301       | RK73GB2A222J | CHIP R     | 2.2K J 1/10W | 1   |             |
|      | R302       | RK73HB1J101J | CHIP R     | 100 J 1/16W  | 1   |             |
|      | R303       | RK73GB2A222J | CHIP R     | 2.2K J 1/10W | 1   |             |
|      | R304       | RK73HB1J101J | CHIP R     | 100 J 1/16W  | 1   |             |
|      | R305       | RK73GB2A222J | CHIP R     | 2.2K J 1/10W | 1   |             |
|      | R306       | RK73GB2A222J | CHIP R     | 2.2K J 1/10W | 1   |             |
|      | R307       | RK73HB1J222J | CHIP R     | 2.2K J 1/16W | 1   |             |
|      | R308       | RK73GB2A222J | CHIP R     | 2.2K J 1/10W | 1   |             |
|      | R309       | RK73GB2A101J | CHIP R     | 100 J 1/10W  | 1   |             |
|      | R310       | RK73HB1J101J | CHIP R     | 100 J 1/16W  | 1   |             |
|      | R311       | RK73GB2A101J | CHIP R     | 100 J 1/10W  | 1   |             |
|      | R312       | RK73HB1J101J | CHIP R     | 100 J 1/16W  | 1   |             |
|      | R313       | RK73HB1J101J | CHIP R     | 100 J 1/16W  | 1   |             |
|      | R314       | RK73GB2A223J | CHIP R     | 22K J 1/10W  | 1   |             |
|      | R315       | RK73GB2A300J | CHIP R     | 30 J 1/10W   | 1   |             |
|      | R318       | RK73HB1J222J | CHIP R     | 2.2K J 1/16W | 1   |             |

| MODEL     | MARK | MODEL       | MARK | MODEL      | MARK | MODEL      | MARK |
|-----------|------|-------------|------|------------|------|------------|------|
| KDC-BT42U | E2   | KDC-BT6052U | C0   | KDC-BT652U | K0   | KDC-U553BT | M1   |
| KDC-X696  | K1   |             |      |            |      |            |      |

| Safe | Symbol No. | Parts No.    | Parts Name           | Description  | QTY | Local       |
|------|------------|--------------|----------------------|--------------|-----|-------------|
|      | R319       | RK73HB1J222J | CHIP R               | 2.2K J 1/16W | 1   |             |
|      | R321       | RK73GB2A104J | CHIP R               | 100K J 1/10W | 1   |             |
|      | R322       | RK73HB1J104J | CHIP R               | 100K J 1/16W | 1   |             |
|      | R323       | RK73EB2E102J | CHIP R               | 1.0K J 1/4W  | 1   |             |
|      | R324       | RK73EB2E102J | CHIP R               | 1.0K J 1/4W  | 1   |             |
|      | R327       | RK73HB1J225J | CHIP R               | 2.2M J 1/16W | 1   |             |
|      | R331       | RK73EB2E102J | CHIP R               | 1.0K J 1/4W  | 1   |             |
|      | R332       | RK73EB2E222J | CHIP R               | 2.2K J 1/4W  | 1   |             |
|      | R333       | RK73EB2E222J | CHIP R               | 2.2K J 1/4W  | 1   |             |
|      | R334       | RK73EB2E102J | CHIP R               | 1.0K J 1/4W  | 1   |             |
|      | R335       | RK73EB2E102J | CHIP R               | 1.0K J 1/4W  | 1   |             |
|      | R336       | RK73EB2E102J | CHIP R               | 1.0K J 1/4W  | 1   |             |
|      | R337       | RK73GB2A103J | CHIP R               | 10K J 1/10W  | 1   |             |
|      | R338       | RK73GB2A103J | CHIP R               | 10K J 1/10W  | 1   |             |
|      | R339       | RK73EB2E100J | CHIP R               | 10 J 1/4W    | 1   |             |
|      | R340       | RK73EB2E100J | CHIP R               | 10 J 1/4W    | 1   |             |
|      | R341       | RK73EB2E4R7J | CHIP R               | 4.7 J 1/4W   | 1   |             |
|      | R342       | RK73EB2E102J | CHIP R               | 1.0K J 1/4W  | 1   |             |
|      | R343       | RK73GB2A102J | CHIP R               | 1.0K J 1/10W | 1   |             |
|      | R409       | RK73GB2A103J | CHIP R               | 10K J 1/10W  | 1   |             |
|      | R410       | RK73HB1J472J | CHIP R               | 4.7K J 1/16W | 1   |             |
|      | R505       | RK73GB2A472J | CHIP R               | 4.7K J 1/10W | 1   |             |
|      | R506       | RK73EB2E220J | CHIP R               | 22 J 1/4W    | 1   |             |
|      | R507       | RK73GB2A221J | CHIP R               | 220 J 1/10W  | 1   |             |
|      | R508       | RK73GB2A221J | CHIP R               | 220 J 1/10W  | 1   |             |
|      | R513       | RK73GB2A684J | CHIP R               | 680K J 1/10W | 1   |             |
|      | R514       | RK73GB2A684J | CHIP R               | 680K J 1/10W | 1   |             |
|      | R515       | RK73GB2A332J | CHIP R               | 3.3K J 1/10W | 1   |             |
|      | R516       | RK73GB2A332J | CHIP R               | 3.3K J 1/10W | 1   |             |
|      | R518       | RK73GB2A000J | CHIP R               | 0.0 J 1/10W  | 1   | E2,M1       |
|      | R519       | RK73GB2A221J | CHIP R               | 220 J 1/10W  | 1   |             |
|      | R520       | RK73GB2A221J | CHIP R               | 220 J 1/10W  | 1   |             |
|      | R701       | RK73GB2A331J | CHIP R               | 330 J 1/10W  | 1   | C0,K0,M1,K1 |
|      | R702       | RK73GB2A331J | CHIP R               | 330 J 1/10W  | 1   | C0,K0,M1,K1 |
|      | R703       | RK73HB1J223J | CHIP R               | 22K J 1/16W  | 1   | C0,K0,M1,K1 |
|      | R704       | RK73HB1J223J | CHIP R               | 22K J 1/16W  | 1   | C0,K0,M1,K1 |
|      | R705       | RK73FB2B181J | CHIP R               | 180 J 1/8W   | 1   | C0,K0,M1,K1 |
|      | R706       | RK73FB2B181J | CHIP R               | 180 J 1/8W   | 1   | C0,K0,M1,K1 |
|      | R707       | RK73GB2A331J | CHIP R               | 330 J 1/10W  | 1   | C0,K0,M1,K1 |
|      | R708       | RK73GB2A331J | CHIP R               | 330 J 1/10W  | 1   | C0,K0,M1,K1 |
|      | R709       | RK73HB1J223J | CHIP R               | 22K J 1/16W  | 1   | C0,K0,M1,K1 |
|      | R710       | RK73HB1J223J | CHIP R               | 22K J 1/16W  | 1   | C0,K0,M1,K1 |
|      | R711       | RK73FB2B181J | CHIP R               | 180 J 1/8W   | 1   | C0,K0,M1,K1 |
|      | R712       | RK73FB2B181J | CHIP R               | 180 J 1/8W   | 1   | C0,K0,M1,K1 |
|      | R713       | RK73GB2A331J | CHIP R               | 330 J 1/10W  | 1   |             |
|      | R714       | RK73GB2A331J | CHIP R               | 330 J 1/10W  | 1   |             |
|      | R715       | RK73HB1J223J | CHIP R               | 22K J 1/16W  | 1   |             |
|      | R716       | RK73HB1J223J | CHIP R               | 22K J 1/16W  | 1   |             |
|      | R717       | RK73FB2B181J | CHIP R               | 180 J 1/8W   | 1   |             |
|      | R718       | RK73FB2B181J | CHIP R               | 180 J 1/8W   | 1   |             |
|      | R801       | RK73HB1J473J | CHIP R               | 47K J 1/16W  | 1   |             |
|      | R803       | RK73HB1J331J | CHIP R               | 330 J 1/16W  | 1   |             |
|      | R804       | RK73GB2A473J | CHIP R               | 47K J 1/10W  | 1   |             |
|      | R805       | RK73GB2A133J | CHIP R               | 13K J 1/10W  | 1   | E2,C0,K0,M1 |
|      | R805       | RK73GB2A153J | CHIP R               | 15K J 1/10W  | 1   | K1          |
|      | R806       | RK73GB2A100J | CHIP R               | 10 J 1/10W   | 1   |             |
|      | R807       | RK73GB2A102J | CHIP R               | 1.0K J 1/10W | 1   |             |
|      | R810       | RK73GB2A272J | CHIP R               | 2.7K J 1/10W | 1   |             |
|      | R851       | RK73GB2A473J | CHIP R               | 47K J 1/10W  | 1   |             |
|      | R855       | RK73GB2A220J | CHIP R               | 22 J 1/10W   | 1   |             |
|      | R856       | RK73GB2A2R2J | CHIP R               | 2.2 J 1/10W  | 1   |             |
|      | R858       | RK73GB2A222J | CHIP R               | 2.2K J 1/10W | 1   |             |
|      | R859       | RK73GB2A222J | CHIP R               | 2.2K J 1/10W | 1   |             |
|      | R860       | RK73GB2A473J | CHIP R               | 47K J 1/10W  | 1   |             |
|      | R863       | RK73GB2A223J | CHIP R               | 22K J 1/10W  | 1   |             |
|      | R864       | RK73GB2A223J | CHIP R               | 22K J 1/10W  | 1   |             |
|      | R865       | RK73GB2A223J | CHIP R               | 22K J 1/10W  | 1   |             |
|      | R866       | RK73GB2A223J | CHIP R               | 22K J 1/10W  | 1   |             |
|      | R867       | RK73GB2A223J | CHIP R               | 22K J 1/10W  | 1   |             |
|      | R868       | RK73GB2A223J | CHIP R               | 22K J 1/10W  | 1   |             |
|      | R869       | RK73GB2A223J | CHIP R               | 22K J 1/10W  | 1   |             |
|      | R870       | RK73GB2A223J | CHIP R               | 22K J 1/10W  | 1   |             |
|      | R876       | RK73GB2A472J | CHIP R               | 4.7K J 1/10W | 1   |             |
|      | R877       | RK73GB2A472J | CHIP R               | 4.7K J 1/10W | 1   |             |
|      | R921       | RK73EB2E101J | CHIP R               | 100 J 1/4W   | 1   | E2,K1       |
|      | R922       | RK73EB2E101J | CHIP R               | 100 J 1/4W   | 1   | E2,K1       |
|      | R923       | RK73HB1J000J | CHIP R               | 0.0 J 1/16W  | 1   | K1          |
|      | R924       | RK73HB1J000J | CHIP R               | 0.0 J 1/16W  | 1   | K1          |
|      | R925       | RK73HB1J000J | CHIP R               | 0.0 J 1/16W  | 1   | C0,K0,M1    |
|      | R926       | RK73HB1J000J | CHIP R               | 0.0 J 1/16W  | 1   | C0,K0,M1    |
|      | R927       | RK73GB2A101J | CHIP R               | 100 J 1/10W  | 1   | E2,C0,K0,M1 |
|      | R928       | RK73GB2A101J | CHIP R               | 100 J 1/10W  | 1   | E2,C0,K0,M1 |
|      | R929       | RK73HB1J473J | CHIP R               | 47K J 1/16W  | 1   | E2          |
|      | R930       | RK73HB1J103J | CHIP R               | 10K J 1/16W  | 1   | E2          |
|      | R933       | RK73GB2A222J | CHIP R               | 2.2K J 1/10W | 1   |             |
| △    | L1         | L33-2459-05  | CHOKE COIL ASSY      |              | 1   |             |
|      | L30        | L40-4791-58  | SMALL FIXED INDUCTOR |              | 1   |             |
|      | L51        | L33-2462-05  | SMALL FIXED INDUCTOR | 22UH         | 1   |             |

| MODEL     | MARK | MODEL       | MARK | MODEL      | MARK | MODEL      | MARK |
|-----------|------|-------------|------|------------|------|------------|------|
| KDC-BT42U | E2   | KDC-BT6052U | C0   | KDC-BT652U | K0   | KDC-U553BT | M1   |
| KDC-X696  | K1   |             |      |            |      |            |      |

| Safe                            | Symbol No. | Parts No.     | Parts Name             | Description      | QTY | Local       |
|---------------------------------|------------|---------------|------------------------|------------------|-----|-------------|
|                                 | L52        | L92-0639-05   | CHIP FERRITE           | 1608 220AT100MHZ | 1   |             |
|                                 | L53        | L92-0639-05   | CHIP FERRITE           | 1608 220AT100MHZ | 1   |             |
|                                 | L54        | L92-0639-05   | CHIP FERRITE           | 1608 220AT100MHZ | 1   |             |
|                                 | L60        | L33-2462-05   | SMALL FIXED INDUCTOR   | 22UH             | 1   |             |
|                                 | L61        | L92-0639-05   | CHIP FERRITE           | 1608 220AT100MHZ | 1   |             |
|                                 | L62        | L92-0639-05   | CHIP FERRITE           | 1608 220AT100MHZ | 1   |             |
|                                 | L63        | L92-0639-05   | CHIP FERRITE           | 1608 220AT100MHZ | 1   |             |
|                                 | L64        | L92-0639-05   | CHIP FERRITE           | 1608 220AT100MHZ | 1   |             |
|                                 | L302       | NQR0682-001X  | CHOKE COIL             |                  | 1   |             |
|                                 | L402       | L40-4791-58   | SMALL FIXED INDUCTOR   |                  | 1   |             |
|                                 | L501       | L40-4791-58   | SMALL FIXED INDUCTOR   |                  | 1   |             |
|                                 | L502       | L33-1031-05   | SMALL FIXED INDUCTOR   |                  | 1   |             |
|                                 | L503       | L33-1031-05   | SMALL FIXED INDUCTOR   |                  | 1   |             |
|                                 | L504       | L40-2781-58   | SMALL FIXED INDUCTOR   | 0.27U            | 1   |             |
|                                 | L505       | L40-4791-58   | SMALL FIXED INDUCTOR   |                  | 1   |             |
|                                 | L506       | L40-4781-58   | SMALL FIXED INDUCTOR   |                  | 1   |             |
|                                 | L507       | L40-1891-58   | SMALL FIXED INDUCTOR   | 1.8U             | 1   |             |
|                                 | L508       | L40-4781-58   | SMALL FIXED INDUCTOR   |                  | 1   |             |
|                                 | L509       | L92-0607-05   | CHIP FERRITE           |                  | 1   | C0,K0,K1    |
|                                 | L551       | QQR1872-001   | RF COIL                |                  | 1   |             |
|                                 | L851       | L92-0652-05   | CHIP FERRITE           | 1500 OHM         | 1   |             |
|                                 | L852       | L41-4795-33   | SMALL FIXED INDUCTOR   | 4.7U             | 1   |             |
|                                 | CN301      | E41-1828-05   | FLAT CABLE CONNECTOR   | 30P              | 1   |             |
|                                 | CN851      | E41-3325-05   | PIN ASSY               | 24P              | 1   |             |
|                                 | CP901      | RK74GA1J101J  | CHIP-COM               | 100 J 1/16W      | 1   |             |
|                                 | F1         | F53-0406-05   | FUSE                   | 2.5A/125V        | 1   |             |
| △                               | J1         | E58-0991-05   | RECTANGULAR RECEPTACLE | DC-CN            | 1   |             |
|                                 | J301       | E58-1144-05   | RECTANGULAR RECEPTACLE | 24PIN            | 1   |             |
|                                 | J701       | E63-0974-05   | PIN JACK               | 1PRE             | 1   | E2          |
|                                 | J701       | E63-0972-05   | PIN JACK               | 3PRE             | 1   | C0,K0,M1,K1 |
|                                 | J921       | E11-0625-05   | PHONE JACK             |                  | 1   | E2,K1       |
|                                 | S301       | S70-0959-05   | TACT SWITCH            |                  | 1   |             |
|                                 | TH801      | PRF18BE471QS2 | POSITIVE RESISTOR      |                  | 1   |             |
|                                 | W551       | E30-6803-05   | CORD WITH PLUG         |                  | 1   |             |
|                                 | X201       | L77-3846-05   | CRYSTAL RESONATOR      | 12MHZ            | 1   |             |
|                                 | X202       | L77-2921-15   | CRYSTAL RESONATOR      | 32.768KHZ 12.5PF | 1   |             |
|                                 | X501       | QAX0952-001Z  | CRYSTAL                |                  | 1   |             |
| SWITCH UNIT (X16-728x-xx) <X16> |            |               |                        |                  |     |             |
|                                 | IC2        | KSM-2003TN5B  | IR SENSOR              |                  | 1   |             |
|                                 | Q21        | LTA014EUBFS8  | TRANSISTOR             |                  | 1   |             |
|                                 | Q22        | LTA014EUBFS8  | TRANSISTOR             |                  | 1   |             |
|                                 | Q23        | LTA014EUBFS8  | TRANSISTOR             |                  | 1   |             |
|                                 | D1         | RKZ4.7KG(B2)  | Z DIODE                |                  | 1   |             |
|                                 | D6         | RKZ4.7KG(B2)  | Z DIODE                |                  | 1   |             |
|                                 | D51        | B30-1566-05   | LED                    | 1608 RED         | 1   |             |
|                                 | D52        | B30-3210-05   | LED                    | 1608 BLUE        | 1   | E2,C0,K0,K1 |
|                                 | D52        | B30-1788-05   | LED                    | 1608 WHITE       | 1   | M1          |
|                                 | D53        | B30-3210-05   | LED                    | 1608 BLUE        | 1   | E2,C0,K0,K1 |
|                                 | D53        | B30-1788-05   | LED                    | 1608 WHITE       | 1   | M1          |
|                                 | D54        | B30-3210-05   | LED                    | 1608 BLUE        | 1   | E2,C0,K0,K1 |
|                                 | D54        | B30-1788-05   | LED                    | 1608 WHITE       | 1   | M1          |
|                                 | D57        | B30-3210-05   | LED                    | 1608 BLUE        | 1   | E2,C0,K0,K1 |
|                                 | D57        | B30-1788-05   | LED                    | 1608 WHITE       | 1   | M1          |
|                                 | D58        | B30-3210-05   | LED                    | 1608 BLUE        | 1   | E2,K0       |
|                                 | D58        | B30-1788-05   | LED                    | 1608 WHITE       | 1   | C0,M1,K1    |
|                                 | D59        | B30-3210-05   | LED                    | 1608 BLUE        | 1   | E2,K0       |
|                                 | D59        | B30-1788-05   | LED                    | 1608 WHITE       | 1   | C0,M1,K1    |
|                                 | D60        | B30-3210-05   | LED                    | 1608 BLUE        | 1   | E2,K0       |
|                                 | D60        | B30-1788-05   | LED                    | 1608 WHITE       | 1   | C0,M1,K1    |
|                                 | D61        | B30-3210-05   | LED                    | 1608 BLUE        | 1   | E2,K0       |
|                                 | D61        | B30-1788-05   | LED                    | 1608 WHITE       | 1   | C0,M1,K1    |
|                                 | D62        | B30-3210-05   | LED                    | 1608 BLUE        | 1   | E2,K0       |
|                                 | D62        | B30-1788-05   | LED                    | 1608 WHITE       | 1   | C0,M1,K1    |
|                                 | D63        | B30-3210-05   | LED                    | 1608 BLUE        | 1   | E2,C0,K0,K1 |
|                                 | D63        | B30-1788-05   | LED                    | 1608 WHITE       | 1   | M1          |
|                                 | D65        | B30-3210-05   | LED                    | 1608 BLUE        | 1   | E2,C0,K0,K1 |
|                                 | D65        | B30-1788-05   | LED                    | 1608 WHITE       | 1   | M1          |
|                                 | D66        | B30-3210-05   | LED                    | 1608 BLUE        | 1   | E2,C0,K0,K1 |
|                                 | D66        | B30-1788-05   | LED                    | 1608 WHITE       | 1   | M1          |
|                                 | D67        | B30-3210-05   | LED                    | 1608 BLUE        | 1   | E2,C0,K0,K1 |
|                                 | D67        | B30-1788-05   | LED                    | 1608 WHITE       | 1   | M1          |
|                                 | D79        | MC2850-T111   | DIODE                  |                  | 1   |             |
|                                 | D81        | HZM6.8ZMWA-E  | Z DIODE                | 6.8V             | 1   |             |
|                                 | D82        | MC2850-T111   | DIODE                  |                  | 1   | E2,K0,M1,K1 |
|                                 | D83        | MC2850-T111   | DIODE                  |                  | 1   |             |
|                                 | C10        | CK73HB1A104K  | CHIP C                 | 10V 0.10UF K     | 1   |             |
|                                 | C11        | CK73GB1C104K  | CHIP C                 | 16V 0.10UF K     | 1   |             |
|                                 | C13        | CK73GB1H102K  | CHIP C                 | 50V 1000PF K     | 1   |             |

| MODEL     | MARK | MODEL       | MARK | MODEL      | MARK | MODEL      | MARK |
|-----------|------|-------------|------|------------|------|------------|------|
| KDC-BT42U | E2   | KDC-BT6052U | C0   | KDC-BT652U | K0   | KDC-U553BT | M1   |
| KDC-X696  | K1   |             |      |            |      |            |      |

| Safe                               | Symbol No. | Parts No.      | Parts Name       | Description   | QTY | Local                            |
|------------------------------------|------------|----------------|------------------|---------------|-----|----------------------------------|
|                                    | C21        | CK73HB0J105K   | CHIP C           | 6.3V 1.0UF K  | 1   | E2,K0,M1,K1                      |
|                                    | C41        | CK73GB1H102K   | CHIP C           | 50V 1000PF K  | 1   |                                  |
|                                    | C42        | CK73GB1H102K   | CHIP C           | 50V 1000PF K  | 1   |                                  |
|                                    | C81        | CC73HCH1H101J  | CHIP C           | 50V 100PF J   | 1   |                                  |
|                                    | C82        | CC73GCH1H101J  | CHIP C           | 50V 100PF J   | 1   |                                  |
|                                    | C83        | CK73GB1H472K   | CHIP C           | 50V 4700PF K  | 1   |                                  |
|                                    | C84        | CK73GB1H102K   | CHIP C           | 50V 1000PF K  | 1   |                                  |
|                                    | R10        | RK73HB1J104J   | CHIP R           | 100K J 1/16W  | 1   |                                  |
|                                    | R13        | RK73HB1J101J   | CHIP R           | 100 J 1/16W   | 1   |                                  |
|                                    | R15        | RK73HB1J101J   | CHIP R           | 100 J 1/16W   | 1   |                                  |
|                                    | R22        | RK73HB1J101J   | CHIP R           | 100 J 1/16W   | 1   |                                  |
|                                    | R31        | RK73PB2H4R3J   | CHIP R           | 4.3 J 1/2W    | 1   |                                  |
|                                    | R51        | RK73FB2B122J   | CHIP R           | 1.2K J 1/8W   | 1   |                                  |
|                                    | R52        | RK73GB2A511J   | CHIP R           | 510 J 1/10W   | 1   |                                  |
|                                    | R53        | RK73GB2A122J   | CHIP R           | 1.2K J 1/10W  | 1   |                                  |
|                                    | R54        | RK73EB2E821J   | CHIP R           | 820 J 1/4W    | 1   |                                  |
|                                    | R55        | RK73GB2A471J   | CHIP R           | 470 J 1/10W   | 1   |                                  |
|                                    | R56        | RK73GB2A431J   | CHIP R           | 430 J 1/10W   | 1   |                                  |
|                                    | R57        | RK73GB2A431J   | CHIP R           | 430 J 1/10W   | 1   |                                  |
|                                    | R58        | RK73FB2B911J   | CHIP R           | 910 J 1/8W    | 1   |                                  |
|                                    | R59        | RK73GB2A511J   | CHIP R           | 510 J 1/10W   | 1   | E2,K0,M1,K1<br>C0<br>E2,C0,K0,M1 |
|                                    | R81        | RK73GB2A220J   | CHIP R           | 22 J 1/10W    | 1   |                                  |
|                                    | R82        | RK73GB2A220J   | CHIP R           | 22 J 1/10W    | 1   |                                  |
|                                    | R107       | RK73GB2A000J   | CHIP R           | 0.0 J 1/10W   | 1   |                                  |
|                                    | R108       | RK73GB2A000J   | CHIP R           | 0.0 J 1/10W   | 1   |                                  |
|                                    | CN1        | E41-1486-05    | PIN ASSY         | 2P 1MM SIDE   | 1   |                                  |
|                                    | CP11       | RK74GA1J101J   | CHIP-COM         | 100 J 1/16W   | 1   |                                  |
|                                    | CP13       | RK74HB1J101J   | CHIP-COM         | 100 J 1/16W   | 1   |                                  |
|                                    | CP14       | RK74HB1J473J   | CHIP-COM         | 47K J 1/16W   | 1   |                                  |
|                                    | CP15       | RK74HB1J101J   | CHIP-COM         | 100 J 1/16W   | 1   |                                  |
|                                    | ED1        | QLF0202-001    | FL TUBE          |               | 1   |                                  |
|                                    | J1         | E59-0864-05    | RECTANGULAR PLUG | 24PIN         | 1   |                                  |
|                                    | J2         | QNS0308-001    | 3.5 JACK         |               | 1   |                                  |
|                                    | J3         | QNZ1076-001    | USB CONNECTOR    |               | 1   |                                  |
|                                    | S1         | T99-0484-05    | ROTARY ENCODER   |               | 1   |                                  |
|                                    | S2         | NSW0246-001X   | TACT SWITCH      |               | 1   |                                  |
|                                    | S3         | NSW0246-001X   | TACT SWITCH      |               | 1   |                                  |
|                                    | S11        | NSW0246-001X   | TACT SWITCH      |               | 1   |                                  |
|                                    | S15        | NSW0246-001X   | TACT SWITCH      |               | 1   |                                  |
|                                    | S16        | NSW0246-001X   | TACT SWITCH      |               | 1   |                                  |
| BLUETOOTH UNIT (X17-2180-11) <X17> |            |                |                  |               |     |                                  |
|                                    | IC1        | S-1132B18U5T1G | ANALOGUE IC      |               | 1   |                                  |
|                                    | IC2        | BA4560RFV      | ANALOGUE IC      |               | 1   |                                  |
|                                    | IC3        | TCC860000XEAU  | MOS-IC           |               | 1   |                                  |
|                                    | IC4        | M24512-WMN6-X  | ROM IC           |               | 1   |                                  |
|                                    | IC5        | E29LV32BT77E1  | ROM IC           |               | 1   |                                  |
|                                    | IC6        | PCM1780-X      | MOS-IC           |               | 1   |                                  |
|                                    | IC7        | A3V28S40FTP-G6 | DRAM IC          |               | 1   |                                  |
|                                    | D1         | RKZ5.1KG(B2)   | Z DIODE          |               | 1   |                                  |
|                                    | C1         | CK73HB1A104K   | CHIP C           | 10V 0.10UF K  | 1   |                                  |
|                                    | C2         | CK73HB1A104K   | CHIP C           | 10V 0.10UF K  | 1   |                                  |
|                                    | C3         | CK73HB1H122K   | CHIP C           | 50V 1200PF K  | 1   |                                  |
|                                    | C4         | CC73HCH1H180J  | CHIP C           | 50V 18PF J    | 1   |                                  |
|                                    | C5         | CC73HCH1H331J  | CHIP C           | 50V 330PF J   | 1   |                                  |
|                                    | C6         | CK73HB1A104K   | CHIP C           | 10V 0.10UF K  | 1   |                                  |
|                                    | C7         | CK73HB1A104K   | CHIP C           | 10V 0.10UF K  | 1   |                                  |
|                                    | C8         | CK73HB1A104K   | CHIP C           | 10V 0.10UF K  | 1   |                                  |
|                                    | C9         | CK73GB0J475K   | CHIP C           | 6.3V 4.7UF K  | 1   |                                  |
|                                    | C10        | CK73HB1E103K   | CHIP C           | 25V 0.010UF K | 1   |                                  |
|                                    | C11        | CK73HB0J105K   | CHIP C           | 6.3V 1.0UF K  | 1   |                                  |
|                                    | C12        | CK73HB1A104K   | CHIP C           | 10V 0.10UF K  | 1   |                                  |
|                                    | C13        | CK73HB1A104K   | CHIP C           | 10V 0.10UF K  | 1   |                                  |
|                                    | C14        | CK73HB1C333K   | CHIP C           | 16V 0.033UF K | 1   |                                  |
|                                    | C15        | CK73GB0J475K   | CHIP C           | 6.3V 4.7UF K  | 1   |                                  |
|                                    | C16        | CK73HB1C333K   | CHIP C           | 16V 0.033UF K | 1   |                                  |
|                                    | C17        | CC73HCH1H220J  | CHIP C           | 50V 22PF J    | 1   |                                  |
|                                    | C18        | CK73GB1A105K   | CHIP C           | 10V 1.0UF K   | 1   |                                  |
|                                    | C19        | CK73HB1H471K   | CHIP C           | 50V 470PF K   | 1   |                                  |
|                                    | C20        | CK73HB1A104K   | CHIP C           | 10V 0.10UF K  | 1   |                                  |
|                                    | C21        | CK73HB1H471K   | CHIP C           | 50V 470PF K   | 1   |                                  |
|                                    | C22        | CC73HCH1H100D  | CHIP C           | 50V 10PF D    | 1   |                                  |
|                                    | C23        | CK73HB0J105K   | CHIP C           | 6.3V 1.0UF K  | 1   |                                  |
|                                    | C24        | CK73HB0J105K   | CHIP C           | 6.3V 1.0UF K  | 1   |                                  |
|                                    | C25        | CC73HCH1H100D  | CHIP C           | 50V 10PF D    | 1   |                                  |
|                                    | C26        | CK73HB1H102K   | CHIP C           | 50V 1000PF K  | 1   |                                  |
|                                    | C28        | CK73HB1A104K   | CHIP C           | 10V 0.10UF K  | 1   |                                  |
|                                    | C29        | CK73GB1A105K   | CHIP C           | 10V 1.0UF K   | 1   |                                  |
|                                    | C30        | CK73HB1A104K   | CHIP C           | 10V 0.10UF K  | 1   |                                  |
|                                    | C31        | CK73HB1A104K   | CHIP C           | 10V 0.10UF K  | 1   |                                  |
|                                    | C32        | CK73HB1A104K   | CHIP C           | 10V 0.10UF K  | 1   |                                  |
|                                    | C33        | CK73HB1A104K   | CHIP C           | 10V 0.10UF K  | 1   |                                  |
|                                    | C34        | CK73HB1A104K   | CHIP C           | 10V 0.10UF K  | 1   |                                  |
|                                    | C35        | CK73HB1A104K   | CHIP C           | 10V 0.10UF K  | 1   |                                  |
|                                    | C36        | CK73HB1A104K   | CHIP C           | 10V 0.10UF K  | 1   |                                  |
|                                    | C37        | CK73HB1A104K   | CHIP C           | 10V 0.10UF K  | 1   |                                  |
|                                    | C38        | CK73HB1A104K   | CHIP C           | 10V 0.10UF K  | 1   |                                  |
|                                    | C39        | CK73FB0J106K   | CHIP C           | 6.3V 10UF K   | 1   |                                  |
|                                    | C40        | CK73HB1A104K   | CHIP C           | 10V 0.10UF K  | 1   |                                  |
|                                    | C41        | CK73HB1A104K   | CHIP C           | 10V 0.10UF K  | 1   |                                  |
|                                    | C42        | CK73HB1E103K   | CHIP C           | 25V 0.010UF K | 1   |                                  |
|                                    | C43        | CK73FB0J106K   | CHIP C           | 6.3V 10UF K   | 1   |                                  |

| MODEL     | MARK | MODEL       | MARK | MODEL      | MARK | MODEL      | MARK |
|-----------|------|-------------|------|------------|------|------------|------|
| KDC-BT42U | E2   | KDC-BT6052U | C0   | KDC-BT652U | K0   | KDC-U553BT | M1   |
| KDC-X696  | K1   |             |      |            |      |            |      |

| Safe | Symbol No. | Parts No.     | Parts Name | Description  | QTY | Local |
|------|------------|---------------|------------|--------------|-----|-------|
|      | C44        | CK73HB1A104K  | CHIP C     | 10V 0.10UF K | 1   |       |
|      | C45        | CK73HB1A104K  | CHIP C     | 10V 0.10UF K | 1   |       |
|      | C46        | CK73HB1A104K  | CHIP C     | 10V 0.10UF K | 1   |       |
|      | C47        | CK73HB1A104K  | CHIP C     | 10V 0.10UF K | 1   |       |
|      | C48        | CK73HB1A104K  | CHIP C     | 10V 0.10UF K | 1   |       |
|      | C49        | CK73FB0J106K  | CHIP C     | 6.3V 10UF K  | 1   |       |
|      | C50        | CK73FB0J106K  | CHIP C     | 6.3V 10UF K  | 1   |       |
|      | C51        | CK73HB1H222K  | CHIP C     | 50V 2200PF K | 1   |       |
|      | C52        | CK73HB1H222K  | CHIP C     | 50V 2200PF K | 1   |       |
|      | C53        | CK73HB1A104K  | CHIP C     | 10V 0.10UF K | 1   |       |
|      | C54        | CK73HB1A104K  | CHIP C     | 10V 0.10UF K | 1   |       |
|      | C55        | CC73HCH1H331J | CHIP C     | 50V 330PF J  | 1   |       |
|      | C300       | CK73HB1A104K  | CHIP C     | 10V 0.10UF K | 1   |       |
|      | C301       | CK73HB1A104K  | CHIP C     | 10V 0.10UF K | 1   |       |
|      | R1         | RK73HB1J472J  | CHIP R     | 4.7K J 1/16W | 1   |       |
|      | R3         | RK73HB1J153J  | CHIP R     | 15K J 1/16W  | 1   |       |
|      | R4         | RK73HB1J153J  | CHIP R     | 15K J 1/16W  | 1   |       |
|      | R6         | RK73HB1J472J  | CHIP R     | 4.7K J 1/16W | 1   |       |
|      | R7         | RK73HB1J472J  | CHIP R     | 4.7K J 1/16W | 1   |       |
|      | R8         | RK73HB1J472J  | CHIP R     | 4.7K J 1/16W | 1   |       |
|      | R9         | RK73HB1J472J  | CHIP R     | 4.7K J 1/16W | 1   |       |
|      | R10        | RK73HB1J472J  | CHIP R     | 4.7K J 1/16W | 1   |       |
|      | R11        | RK73GB2A4R7J  | CHIP R     | 4.7 J 1/10W  | 1   |       |
|      | R13        | RK73HB1J153J  | CHIP R     | 15K J 1/16W  | 1   |       |
|      | R14        | RK73HB1J153J  | CHIP R     | 15K J 1/16W  | 1   |       |
|      | R15        | RK73HB1J103J  | CHIP R     | 10K J 1/16W  | 1   |       |
|      | R16        | RK73HB1J223J  | CHIP R     | 22K J 1/16W  | 1   |       |
|      | R17        | RK73HB1J223J  | CHIP R     | 22K J 1/16W  | 1   |       |
|      | R18        | RK73HB1J220J  | CHIP R     | 22 J 1/16W   | 1   |       |
|      | R19        | RK73HB1J220J  | CHIP R     | 22 J 1/16W   | 1   |       |
|      | R20        | RK73HB1J220J  | CHIP R     | 22 J 1/16W   | 1   |       |
|      | R21        | RK73HB1J220J  | CHIP R     | 22 J 1/16W   | 1   |       |
|      | R22        | RK73HB1J470J  | CHIP R     | 47 J 1/16W   | 1   |       |
|      | R23        | RK73HB1J103J  | CHIP R     | 10K J 1/16W  | 1   |       |
|      | R25        | RK73HB1J822J  | CHIP R     | 8.2K J 1/16W | 1   |       |
|      | R26        | RK73HB1J330J  | CHIP R     | 33 J 1/16W   | 1   |       |
|      | R27        | RK73HB1J330J  | CHIP R     | 33 J 1/16W   | 1   |       |
|      | R28        | RK73HB1J333J  | CHIP R     | 33K J 1/16W  | 1   |       |
|      | R29        | RK73HB1J470J  | CHIP R     | 47 J 1/16W   | 1   |       |
|      | R34        | RK73HB1J470J  | CHIP R     | 47 J 1/16W   | 1   |       |
|      | R35        | RK73HB1J472J  | CHIP R     | 4.7K J 1/16W | 1   |       |
|      | R38        | RK73HB1J472J  | CHIP R     | 4.7K J 1/16W | 1   |       |
|      | R39        | RK73HB1J472J  | CHIP R     | 4.7K J 1/16W | 1   |       |
|      | R40        | RK73HB1J472J  | CHIP R     | 4.7K J 1/16W | 1   |       |
|      | R41        | RK73HB1J472J  | CHIP R     | 4.7K J 1/16W | 1   |       |
|      | R42        | RK73HB1J470J  | CHIP R     | 47 J 1/16W   | 1   |       |
|      | R43        | RK73HB1J470J  | CHIP R     | 47 J 1/16W   | 1   |       |
|      | R44        | RK73HB1J470J  | CHIP R     | 47 J 1/16W   | 1   |       |
|      | R45        | RK73HB1J124J  | CHIP R     | 120K J 1/16W | 1   |       |
|      | R46        | RK73HB1J124J  | CHIP R     | 120K J 1/16W | 1   |       |
|      | R47        | RK73HB1J102J  | CHIP R     | 1.0K J 1/16W | 1   |       |
|      | R48        | RK73HB1J122J  | CHIP R     | 1.2K J 1/16W | 1   |       |
|      | R49        | RK73HB1J122J  | CHIP R     | 1.2K J 1/16W | 1   |       |
|      | R50        | RK73HB1J102J  | CHIP R     | 1.0K J 1/16W | 1   |       |
|      | R51        | RK73HB1J105J  | CHIP R     | 1.0M J 1/16W | 1   |       |
|      | R52        | RK73HB1J332J  | CHIP R     | 3.3K J 1/16W | 1   |       |
|      | R54        | RK73HB1J103J  | CHIP R     | 10K J 1/16W  | 1   |       |
|      | R55        | RK73HB1J103J  | CHIP R     | 10K J 1/16W  | 1   |       |
|      | R56        | RK73HB1J000J  | CHIP R     | 0.0 J 1/16W  | 1   |       |
|      | R57        | RK73HB1J470J  | CHIP R     | 47 J 1/16W   | 1   |       |
|      | R59        | RK73HB1J470J  | CHIP R     | 47 J 1/16W   | 1   |       |
|      | R61        | RK73HB1J472J  | CHIP R     | 4.7K J 1/16W | 1   |       |
|      | R62        | RK73HB1J470J  | CHIP R     | 47 J 1/16W   | 1   |       |
|      | R64        | RK73HB1J470J  | CHIP R     | 47 J 1/16W   | 1   |       |
|      | R65        | RK73HB1J470J  | CHIP R     | 47 J 1/16W   | 1   |       |
|      | R66        | RK73HB1J472J  | CHIP R     | 4.7K J 1/16W | 1   |       |
|      | R67        | RK73HB1J470J  | CHIP R     | 47 J 1/16W   | 1   |       |
|      | R68        | RK73HB1J470J  | CHIP R     | 47 J 1/16W   | 1   |       |
|      | R69        | RK73HB1J470J  | CHIP R     | 47 J 1/16W   | 1   |       |
|      | R70        | RK73HB1J473J  | CHIP R     | 47K J 1/16W  | 1   |       |
|      | R71        | RK73HB1J472J  | CHIP R     | 4.7K J 1/16W | 1   |       |
|      | R72        | RK73HB1J471J  | CHIP R     | 470 J 1/16W  | 1   |       |
|      | R73        | RK73HB1J471J  | CHIP R     | 470 J 1/16W  | 1   |       |
|      | R74        | RK73FB2B181J  | CHIP R     | 180 J 1/8W   | 1   |       |
|      | R75        | RK73FB2B181J  | CHIP R     | 180 J 1/8W   | 1   |       |
|      | R80        | RK73HB1J000J  | CHIP R     | 0.0 J 1/16W  | 1   |       |
|      | R81        | RK73HB1J000J  | CHIP R     | 0.0 J 1/16W  | 1   |       |
|      | R82        | RK73HB1J000J  | CHIP R     | 0.0 J 1/16W  | 1   |       |
|      | R83        | RK73HB1J000J  | CHIP R     | 0.0 J 1/16W  | 1   |       |
|      | R88        | RK73HB1J000J  | CHIP R     | 0.0 J 1/16W  | 1   |       |
|      | R89        | RK73HB1J000J  | CHIP R     | 0.0 J 1/16W  | 1   |       |
|      | R91        | RK73HB1J223J  | CHIP R     | 22K J 1/16W  | 1   |       |
|      | R93        | RK73HB1J472J  | CHIP R     | 4.7K J 1/16W | 1   |       |
|      | R94        | RK73FB2B181J  | CHIP R     | 180 J 1/8W   | 1   |       |
|      | R300       | RK73GB2A000J  | CHIP R     | 0.0 J 1/10W  | 1   |       |
|      | R302       | RK73HB1J470J  | CHIP R     | 47 J 1/16W   | 1   |       |
|      | R303       | RK73HB1J470J  | CHIP R     | 47 J 1/16W   | 1   |       |
|      | R306       | RK73HB1J104J  | CHIP R     | 100K J 1/16W | 1   |       |
|      | R307       | RK73HB1J104J  | CHIP R     | 100K J 1/16W | 1   |       |
|      | R311       | RK73HB1J102J  | CHIP R     | 1.0K J 1/16W | 1   |       |

| MODEL     | MARK | MODEL       | MARK | MODEL      | MARK | MODEL      | MARK |
|-----------|------|-------------|------|------------|------|------------|------|
| KDC-BT42U | E2   | KDC-BT6052U | C0   | KDC-BT652U | K0   | KDC-U553BT | M1   |
| KDC-X696  | K1   |             |      |            |      |            |      |

| Safe                                           | Symbol No. | Parts No.     | Parts Name          | Description   | QTY | Local |
|------------------------------------------------|------------|---------------|---------------------|---------------|-----|-------|
|                                                | R323       | RK73HB1J104J  | CHIP R              | 100K J 1/16W  | 1   |       |
|                                                | A300       | W02-5519-05   | ELECTRIC CIRCUIT    | BTR601        | 1   |       |
|                                                | CN1        | E41-3330-05   | MODULE              |               |     |       |
|                                                | X1         | L77-3873-05   | SOCKET FOR PIN ASSY | 24P           | 1   |       |
|                                                |            |               | CRYSTAL RESONATOR   | 12.000MHZ     | 1   |       |
| CD PLAYER UNIT (X32-6250-02) IN CD MECHA <X32> |            |               |                     |               |     |       |
|                                                | IC3        | BD8222EFV     | ANALOGUE IC         |               | 1   |       |
|                                                | IC4        | JCV8023       | MOS-IC              |               | 1   |       |
|                                                | IC5        | XC6415S001P1  | MOS-IC              |               | 1   |       |
|                                                | Q1         | 2SA2188-T1(E) | TRANSISTOR          |               | 1   |       |
|                                                | Q14        | RUE003N02     | FET                 |               | 1   |       |
|                                                | D2         | DAP202U       | DIODE               |               | 1   |       |
|                                                | D3         | DA204U        | DIODE               |               | 1   |       |
|                                                | D4         | DA204U        | DIODE               |               | 1   |       |
|                                                | C1         | CK73FB0J106K  | CHIP C              | 6.3V 10UF K   | 1   |       |
|                                                | C3         | CC73GCH1H680J | CHIP C              | 50V 68PF J    | 1   |       |
|                                                | C4         | CK73GB1A105K  | CHIP C              | 10V 1.0UF K   | 1   |       |
|                                                | C6         | CK73FB1C105K  | CHIP C              | 16V 1.0UF K   | 1   |       |
|                                                | C8         | CK73GB1H222K  | CHIP C              | 50V 2200PF K  | 1   |       |
|                                                | C9         | CK73GB1C104K  | CHIP C              | 16V 0.10UF K  | 1   |       |
|                                                | C10        | CK73GB1C104K  | CHIP C              | 16V 0.10UF K  | 1   |       |
|                                                | C11        | CK73GB1H153K  | CHIP C              | 50V 0.015UF K | 1   |       |
|                                                | C12        | CK73GB1C104K  | CHIP C              | 16V 0.10UF K  | 1   |       |
|                                                | C13        | CK73GB1H332K  | CHIP C              | 50V 3300PF K  | 1   |       |
|                                                | C14        | CK73GB1H103K  | CHIP C              | 50V 0.010UF K | 1   |       |
|                                                | C15        | CK73GB1C333K  | CHIP C              | 16V 0.033UF K | 1   |       |
|                                                | C16        | CK73GB1C104K  | CHIP C              | 16V 0.10UF K  | 1   |       |
|                                                | C18        | CK73GB1H153K  | CHIP C              | 50V 0.015UF K | 1   |       |
|                                                | C19        | CK73GB1H103K  | CHIP C              | 50V 0.010UF K | 1   |       |
|                                                | C20        | CK73GB1C104K  | CHIP C              | 16V 0.10UF K  | 1   |       |
|                                                | C22        | CK73GB1H103K  | CHIP C              | 50V 0.010UF K | 1   |       |
|                                                | C23        | CK73GB1H153K  | CHIP C              | 50V 0.015UF K | 1   |       |
|                                                | C24        | CC73GCH1H470J | CHIP C              | 50V 47PF J    | 1   |       |
|                                                | C25        | CK73GB1C104K  | CHIP C              | 16V 0.10UF K  | 1   |       |
|                                                | C26        | CK73GB1A105K  | CHIP C              | 10V 1.0UF K   | 1   |       |
|                                                | C27        | CK73GB1C104K  | CHIP C              | 16V 0.10UF K  | 1   |       |
|                                                | C29        | CK73GB1C104K  | CHIP C              | 16V 0.10UF K  | 1   |       |
|                                                | C30        | CK73GB1C104K  | CHIP C              | 16V 0.10UF K  | 1   |       |
|                                                | C31        | CK73GB1A105K  | CHIP C              | 10V 1.0UF K   | 1   |       |
|                                                | C36        | CK73GB1A105K  | CHIP C              | 10V 1.0UF K   | 1   |       |
|                                                | C41        | CK73GB1C104K  | CHIP C              | 16V 0.10UF K  | 1   |       |
|                                                | C42        | CK73GB1C104K  | CHIP C              | 16V 0.10UF K  | 1   |       |
|                                                | C43        | CK73GB1H102K  | CHIP C              | 50V 1000PF K  | 1   |       |
|                                                | C44        | CK73GB1H102K  | CHIP C              | 50V 1000PF K  | 1   |       |
|                                                | C45        | CK73GB1H103K  | CHIP C              | 50V 0.010UF K | 1   |       |
|                                                | C46        | CK73GB1A105K  | CHIP C              | 10V 1.0UF K   | 1   |       |
|                                                | C47        | CC73GCH1H560J | CHIP C              | 50V 56PF J    | 1   |       |
|                                                | C48        | CC73GCH1H101J | CHIP C              | 50V 100PF J   | 1   |       |
|                                                | C49        | CK73GB1A105K  | CHIP C              | 10V 1.0UF K   | 1   |       |
|                                                | C50        | CK73FB1A225K  | CHIP C              | 10V 2.2UF K   | 1   |       |
|                                                | C51        | CK73FB0J106K  | CHIP C              | 6.3V 10UF K   | 1   |       |
|                                                | C54        | CK73FB0J106K  | CHIP C              | 6.3V 10UF K   | 1   |       |
|                                                | C57        | CK73GB1C104K  | CHIP C              | 16V 0.10UF K  | 1   |       |
|                                                | C59        | CK73GB1H472K  | CHIP C              | 50V 4700PF K  | 1   |       |
|                                                | C61        | CK73GB1C104K  | CHIP C              | 16V 0.10UF K  | 1   |       |
|                                                | C101       | CK73GB1A105K  | CHIP C              | 10V 1.0UF K   | 1   |       |
|                                                | C103       | CK73GB1C104K  | CHIP C              | 16V 0.10UF K  | 1   |       |
|                                                | R1         | RK73GB2A560J  | CHIP R              | 56 J 1/10W    | 1   |       |
|                                                | R2         | RK73GB2A472J  | CHIP R              | 4.7K J 1/10W  | 1   |       |
|                                                | R3         | RK73GB2A4R7J  | CHIP R              | 4.7 J 1/10W   | 1   |       |
|                                                | R4         | RK73GB2A104J  | CHIP R              | 100K J 1/10W  | 1   |       |
|                                                | R5         | RK73GB2A225J  | CHIP R              | 2.2M J 1/10W  | 1   |       |
|                                                | R6         | RK73GB2A102J  | CHIP R              | 1.0K J 1/10W  | 1   |       |
|                                                | R7         | RK73GB2A221J  | CHIP R              | 220 J 1/10W   | 1   |       |
|                                                | R8         | RK73GB2A622J  | CHIP R              | 6.2K J 1/10W  | 1   |       |
|                                                | R9         | RK73GB2A913J  | CHIP R              | 91K J 1/10W   | 1   |       |
|                                                | R10        | RK73GB2A334J  | CHIP R              | 330K J 1/10W  | 1   |       |
|                                                | R11        | RK73GB2A153J  | CHIP R              | 15K J 1/10W   | 1   |       |
|                                                | R13        | RK73GB2A104J  | CHIP R              | 100K J 1/10W  | 1   |       |
|                                                | R14        | RK73GB2A103J  | CHIP R              | 10K J 1/10W   | 1   |       |
|                                                | R15        | RK73GB2A101J  | CHIP R              | 100 J 1/10W   | 1   |       |
|                                                | R17        | RK73GB2A103J  | CHIP R              | 10K J 1/10W   | 1   |       |
|                                                | R18        | RK73GB2A103J  | CHIP R              | 10K J 1/10W   | 1   |       |
|                                                | R25        | RK73GB2A103J  | CHIP R              | 10K J 1/10W   | 1   |       |
|                                                | R27        | RK73EB2E4R7J  | CHIP R              | 4.7 J 1/4W    | 1   |       |
|                                                | R39        | RK73GB2A105J  | CHIP R              | 1.0M J 1/10W  | 1   |       |
|                                                | R40        | RK73GB2A681J  | CHIP R              | 680 J 1/10W   | 1   |       |
|                                                | R43        | RK73GB2A4R7J  | CHIP R              | 4.7 J 1/10W   | 1   |       |
|                                                | R44        | RK73GB2A4R7J  | CHIP R              | 4.7 J 1/10W   | 1   |       |
|                                                | R49        | RK73GB2A393J  | CHIP R              | 39K J 1/10W   | 1   |       |
|                                                | R50        | RK73GB2A363J  | CHIP R              | 36K J 1/10W   | 1   |       |
|                                                | R51        | RK73GB2A102J  | CHIP R              | 1.0K J 1/10W  | 1   |       |
|                                                | R52        | RK73GB2A101J  | CHIP R              | 100 J 1/10W   | 1   |       |
|                                                | R53        | RK73GB2A101J  | CHIP R              | 100 J 1/10W   | 1   |       |
|                                                | R54        | RK73GB2A101J  | CHIP R              | 100 J 1/10W   | 1   |       |
|                                                | R55        | RK73GB2A101J  | CHIP R              | 100 J 1/10W   | 1   |       |
|                                                | R56        | RK73GB2A101J  | CHIP R              | 100 J 1/10W   | 1   |       |
|                                                | R57        | RK73GB2A101J  | CHIP R              | 100 J 1/10W   | 1   |       |
|                                                | R58        | RK73GB2A101J  | CHIP R              | 100 J 1/10W   | 1   |       |
|                                                | R59        | RK73GB2A204J  | CHIP R              | 200K J 1/10W  | 1   |       |
|                                                | R64        | RK73GB2A223J  | CHIP R              | 22K J 1/10W   | 1   |       |

|           |      |             |      |            |      |            |      |
|-----------|------|-------------|------|------------|------|------------|------|
| MODEL     | MARK | MODEL       | MARK | MODEL      | MARK | MODEL      | MARK |
| KDC-BT42U | E2   | KDC-BT6052U | C0   | KDC-BT652U | K0   | KDC-U553BT | M1   |
| KDC-X696  | K1   |             |      |            |      |            |      |

| Safe | Symbol No. | Parts No.    | Parts Name              | Description  | QTY | Local |
|------|------------|--------------|-------------------------|--------------|-----|-------|
| R65  |            | RK73GB2A333J | CHIP R                  | 33K J 1/10W  | 1   |       |
| R69  |            | RK73GB2A101J | CHIP R                  | 100 J 1/10W  | 1   |       |
| R70  |            | RK73GB2A101J | CHIP R                  | 100 J 1/10W  | 1   |       |
| R71  |            | RK73GB2A101J | CHIP R                  | 100 J 1/10W  | 1   |       |
| R72  |            | RK73GB2A101J | CHIP R                  | 100 J 1/10W  | 1   |       |
| R73  |            | RK73GB2A101J | CHIP R                  | 100 J 1/10W  | 1   |       |
| R74  |            | RK73GB2A103J | CHIP R                  | 10K J 1/10W  | 1   |       |
| R75  |            | RK73GB2A103J | CHIP R                  | 10K J 1/10W  | 1   |       |
| R76  |            | RK73GB2A202J | CHIP R                  | 2.0K J 1/10W | 1   |       |
| R102 |            | RK73GB2A102J | CHIP R                  | 1.0K J 1/10W | 1   |       |
| CN1  |            | E41-2954-05  | FLAT CABLE<br>CONNECTOR | 15P          | 1   |       |
| CN2  |            | E41-2630-05  | FLAT CABLE<br>CONNECTOR | 30P          | 1   |       |
| CP7  |            | RK74GB1J103J | CHIP-COM                | 10K J 1/16W  | 1   |       |
| S1   |            | S68-0863-05  | PUSH SWITCH             |              | 1   |       |
| S2   |            | S68-0863-05  | PUSH SWITCH             |              | 1   |       |
| X1   |            | L78-1221-05  | RESONATOR<br>(16.93MHZ) | 16.93MHZ     | 1   |       |