
EXPLODED VIEW/PARTS LIST

Main section

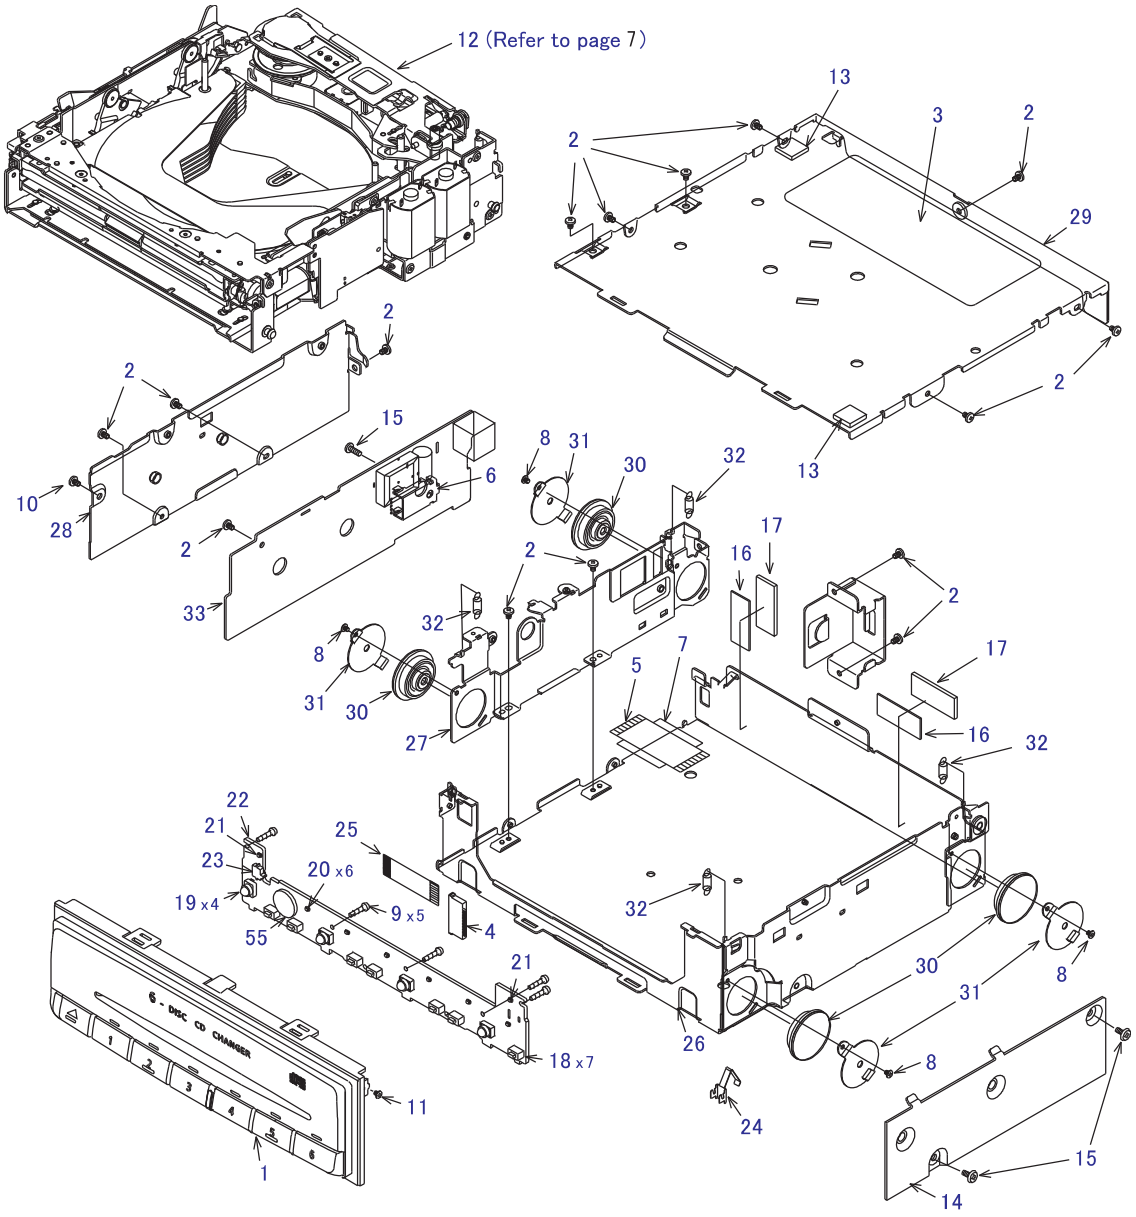

Note) Some parts depend on each model.
The model name is specified in the description.
(38D):PN-2538D, (38M):PN-2538M

NO.	PART NO.	DESCRIPTION	Q'TY
1	940-8014-22 940-8014-12	ESCUTCHEON ASSY(38D) ESCUTCHEON ASSY(38M)	1
2	716-1716-00	SCREW M2 x3	15
3	286-9086-29 286-9086-28	SETPLATE(38D) SETPLATE(38M)	1
4	074-1239-76	26P OUTLET SOCKET	1
5	039-1957-01	FPC	1
6	331-3267-00	TR-HOLDER	1
7	347-6619-00	INSULATOR	1
8	716-3450-00	SCREW M1.7 x2	4
9	716-0872-01	PAD SCREW M1.7 x6	5
10	716-3462-00	SCREW M2 x5	1
11	716-3461-00	SCREW M2 x3	1

NO.	PART NO.	DESCRIPTION	Q'TY
12	----------	CD CHANGER MODULE 018200-929	1
13	345-8239-00	CUSHION RUBBER	2
14	331-3497-00	SIDE PLATE	1
15	716-2606-81	MACHINE SCREW M2.6 x6	3
16	331-3592-00	PROTECT PLATE	2
17	345-5237-00	CUSHION RUBBER	2
18	013-6302-50	SWITCH	7
19	017-0433-86	PILOT LAMP 14V40mA	3
20	001-7045-90	DIODE CL-165D/FG	6
21	001-7043-90	DIODE CL-170FG	2
22	039-2230-00	ESCUTCHEON PWB (WITHOUT COMPONENT)	1

NO.	PART NO.	DESCRIPTION	Q'TY
23	013-7415-50	DETECTOR SWITCH	1
24	331-1861-10	EARTH PLATE	1
25	816-2610-00	FLAT WIRE	1
26	311-1836-02	LOWER CASE	1
27	331-3266-15	PWB HOLDER	1
28	305-0315-15	SIDE CASE	1

NO.	PART NO.	DESCRIPTION	Q'TY
29	310-1741-14	UPPER CASE	1
30	629-0083-01	DAMPER	4
31	620-1086-00	DAMPER-H-PLT	4
32	750-3491-00	FL-SPRING	4
33	039-2232-01	MAIN PWB (WITHOUT COMPONENT)	1

ELECTRICAL PARTS LIST

Note)Some parts depend on each model.The model name is specified in the descripion . (38D;PN-2538D, 38M;PN-2538M)

Note) Several different parts of the same reference number are alternative parts. One of those parts is used in the set.

Main PWB section(B1)

REF No.	PART No.	DESCRIPTION
C101	168-1045-56	0.1 uF
C102	046-1032-78	0.01 uF
C104	163-1073-15	6.3V100 uF
C108	189-4773-38	16V470 uF
C109	168-1045-56	0.1 uF
C110	178-4742-78	0.47 uF
C111	042-0560-85	6.3V100uF
C112	163-2273-25	10V 220 uF
C113	168-1045-56	0.1 uF
C114	163-1073-15	6.3V100 uF
C115	168-1045-56	0.1 uF
C116	178-4742-78	0.47 uF
C117	178-4742-78	0.47 uF
C118	178-3342-78	0.33 uF
C119	178-1052-78	1 uF
C120	178-1052-78	1 uF
C201	163-2263-15	6.3V22 uF
C202	163-2263-15	6.3V22 uF
C203	045-1211-50	120pF
C204	045-1211-50	120pF
C205	045-2201-50	22pF
C206	045-2201-50	22pF
C207	168-1045-56	0.1 uF
C209	163-1073-15	6.3V100 uF
C210	168-1045-56	0.1 uF
C211	046-3322-58	3300pF
C212	046-3322-58	3300pF
C213	046-6812-58	680pF
C214	046-6812-58	680pF
C215	046-1022-58	1000pF
C216	046-1022-58	1000pF
C217	163-2273-25	10V 220 uF
C218	163-2273-25	10V 220 uF
C219	163-2273-25	10V 220 uF
C220	163-2273-25	10V 220 uF
C501	163-1063-35	16V10 uF
C502	168-1045-56	0.1 uF
C503	168-4735-56	0.047 uF
C504	168-1045-56	0.1 uF
C505	046-2232-78	0.022 uF
C602	172-1041-11	0.1 uF
C603	046-1022-58	1000pF
C604	046-1022-58	1000pF
C605	046-1022-58	1000pF
C621	163-3353-65	50V3.3 uF
C710	168-1045-56	0.1 uF(38M)
C711	163-1063-35	16V10 uF
C712	163-4753-55	35V4.7 uF(38M)
C713	163-4753-55	35V4.7 uF(38M)
C800	163-1053-65	50V1 uF
C801	045-1011-50	100pF
C802	046-2222-58	2200pF
C803	046-2222-58	2200pF
C804	046-2222-58	2200pF
C805	046-2222-58	2200pF

REF No.	PART No.	DESCRIPTION
D100	001-0627-90	U1BC44
D101	001-0529-34	MA8062-L
D603	001-0516-90	MA111
D604	001-0516-90	MA111
D607	001-4302-38	UDZTE-17 33B
D608	001-4302-38	UDZTE-17 33B
D609	001-0516-90	MA111
D701	001-0529-21	MA8039-H(38M)
D703	001-0516-90	MA111(38M)
D801	001-2015-00	RL253
IC100	051-3306-90	TDA3663AT
IC101	051-3289-00	BA09ST
IC102	051-3288-90	AN80M50RSPTX
IC103	051-3288-90	AN80M50RSPTX
IC201	051-1407-90	NJM4556AM
IC202	051-1407-90	NJM4556AM
IC501	051-9400-28	BR93LC46F-WE2
IC502	052-5047-32	M30621MCM-1W9GP
IC503	051-5418-08	S-80827ANMP-EDQ
IC504	051-5418-08	S-80827ANMP-EDQ
J101	074-1189-95	45P
J102	074-1059-76	26P
J103	074-1087-12	A16 16P
Q100	191-1205-60	2SB1205RST
Q101	125-2004-92	RN1402
Q102	190-1162-00	2SA1162
Q204	125-2004-92	RN1402
Q505	125-2004-92	RN1402
Q506	125-0014-92	DTA114EK
Q603	192-2712-00	2SC2712
Q604	192-2712-00	2SC2712
Q605	125-0014-92	DTA114EK
Q606	192-2712-00	2SC2712
Q607	125-2004-92	RN1402
Q706	125-2004-92	RN1402(38M)
Q707	193-2118-00	2SD2118(38M)
Q708	125-2004-92	RN1402(38M)
Q709	125-2004-92	RN1402(38M)
Q711	192-2712-00	2SC2712
Q712	131-1188-00	2SB1188
Q713	125-2004-92	RN1402
Q800	193-0601-00	2SD601A
Q801	190-1162-00	2SA1162
Q802	125-4001-90	XN1504
Q803	125-4001-90	XN1504
R100	032-0145-54	1/2W 10 ohm
R101	033-4711-15	1/16W 470 ohm
R102	033-2231-15	1/16W 22k ohm
R103	116-1511-15	1/8W 150 ohm
R104	116-1511-15	1/8W 150 ohm
R105	032-0145-54	1/2W 10 ohm
R106	032-0145-54	1/2W 10 ohm
R207	033-6821-15	1/16W 6.8k ohm
R208	033-2731-15	1/16W 27k ohm

REF No.	PART No.	DESCRIPTION
R209	033-1031-15	1/16W 10k ohm
R210	033-1031-15	1/16W 10k ohm
R211	033-6821-15	1/16W 6.8k ohm
R212	033-8221-15	1/16W 8.2k ohm
R213	033-2731-15	1/16W 27k ohm
R214	033-1031-15	1/16W 10k ohm
R215	033-1031-15	1/16W 10k ohm
R216	033-1031-15	1/16W 10k ohm
R218	033-2201-15	1/16W 22 ohm
R219	033-2201-15	1/16W 22 ohm
R220	033-2201-15	1/16W 22 ohm
R221	033-2201-15	1/16W 22 ohm
R223	033-3921-15	1/16W 3.9k ohm
R224	033-3921-15	1/16W 3.9k ohm
R225	033-8221-15	1/16W 8.2k ohm
R226	033-8221-15	1/16W 8.2k ohm
R504	033-2221-15	1/16W 2.2k ohm
R505	033-1031-15	1/16W 10k ohm
R509	033-4731-15	1/16W 47k ohm
R512	050-0145-54	1/16W 47k ohm x4
R513	033-1041-15	1/16W 100k ohm
R514	050-0145-53	1/16W 220k ohm x4
R515	033-1041-15	1/16W 100k ohm
R518	033-1041-15	1/16W 100k ohm
R520	033-2741-15	1/16W 270k ohm
R521	033-4731-15	1/16W 47k ohm
R522	050-0145-54	1/16W 47k ohm x4
R523	033-4741-15	1/16W 470k ohm
R524	033-4731-15	1/16W 47k ohm
R525	033-4731-15	1/16W 47k ohm
R527	050-0145-50	1/16W 270 ohm x4
R528	050-0145-50	1/16W 270 ohm x4
R529	050-0145-50	1/16W 270 ohm x4
R539	033-4721-15	1/16W 4.7k ohm
R540	050-0145-58	1/16W 2.2k ohm x4
R601	033-5621-15	1/16W 5.6k ohm
R606	033-5631-15	1/16W 56k ohm
R609	032-0145-54	1/2W 10 ohm
R610	033-2231-15	1/16W 22k ohm
R611	033-1031-15	1/16W 10k ohm
R612	033-4731-15	1/16W 47k ohm
R613	033-1031-15	1/16W 10k ohm
R614	033-1031-15	1/16W 10k ohm
R615	033-1031-15	1/16W 10k ohm
R616	033-1031-15	1/16W 10k ohm
R617	033-4731-15	1/16W 47k ohm
R620	033-5631-15	1/16W 56k ohm
R621	033-5631-15	1/16W 56k ohm
R740	032-0145-64	1/2W 470 ohm(38M)
R743	033-4721-15	1/16W 4.7k ohm (38M)
R744	033-1041-15	1/16W 100k ohm
R745	033-4721-15	1/16W 4.7k ohm (38M)
R746	033-4731-15	1/16W 47k ohm

REF No.	PART No.	DESCRIPTION
R747	033-2231-15	1/16W 22k ohm (38M)
R748	033-4721-15	1/16W 4.7k ohm (38M)
R749	033-1031-15	1/16W 10k ohm
R751	033-1021-15	1/16W 1k ohm
R800	033-4731-15	1/16W 47k ohm
R801	033-5611-15	1/16W 560 ohm
R802	033-1031-15	1/16W 10k ohm
R803	033-1041-15	1/16W 100k ohm

REF No.	PART No.	DESCRIPTION
R804	033-1031-15	1/16W 10k ohm
R805	033-1031-15	1/16W 10k ohm
R806	033-1021-15	1/16W 1k ohm
R807	033-1021-15	1/16W 1k ohm
R808	033-1031-15	1/16W 10k ohm
R809	033-1031-15	1/16W 10k ohm
R810	033-1031-15	1/16W 10k ohm
R811	033-1031-15	1/16W 10k ohm
R820	116-3031-15	1/8W 30k ohm
R821	116-3031-15	1/8W 30k ohm

REF No.	PART No.	DESCRIPTION
R900	033-0000-05	1/16W 0 ohm(38D)
R901	033-0000-05	1/16W 0 ohm(38D)
R910	033-1041-15	1/16W 100k ohm
R920	033-1041-15	1/16W 100k ohm (38M)
R921	033-0000-05	1/16W 0 ohm(38D)
R923	033-1041-15	1/16W 100k ohm
T101	009-0679-00	CHOCK
X501	060-1505-50	10MHz

Escutcheon PWB section(B2)

REF No.	PART No.	DESCRIPTION
C402	168-1045-56	0.1 uF
CCT2	050-0145-52	1/16W 1k ohm x4
D401	001-7045-90	CL-165D/FG-D
D402	001-7043-90	CL-170FG-CD
D403	001-7043-90	CL-170FG-CD
D404	001-7045-90	CL-165D/FG-D
D405	001-7045-90	CL-165D/FG-D
D406	001-7045-90	CL-165D/FG-D
D407	001-7045-90	CL-165D/FG-D
D408	001-7045-90	CL-165D/FG-D
D411	001-0655-90	1SS294
D412	001-0655-90	1SS294
IC401	051-6617-08	NJU3715G-TE2
J401	074-1239-76	26P
PL401	017-0433-86	14V40mA
PL402	017-0433-86	14V40mA
PL403	017-0433-86	14V40mA
PL404	017-0433-86	14V40mA
Q401	192-2712-00	2SC2712

REF No.	PART No.	DESCRIPTION
Q402	192-2712-00	2SC2712
Q403	192-2712-00	2SC2712
Q404	192-2712-00	2SC2712
Q406	192-2712-00	2SC2712
R401	119-2211-15	1/16W 220 ohm
R402	119-2211-15	1/16W 220 ohm
R404	119-2211-15	1/16W 220 ohm
R406	119-2211-15	1/16W 220 ohm
R407	119-2211-15	1/16W 220 ohm
R408	119-2211-15	1/16W 220 ohm
R409	119-2211-15	1/16W 220 ohm
R410	119-2211-15	1/16W 220 ohm
R411	119-2211-15	1/16W 220 ohm
R412	119-2211-15	1/16W 220 ohm
R413	119-2211-15	1/16W 220 ohm
R414	119-2211-15	1/16W 220 ohm
R415	119-2211-15	1/16W 220 ohm
R416	119-2211-15	1/16W 220 ohm
R419	033-1031-15	1/16W 10k ohm

REF No.	PART No.	DESCRIPTION
R420	033-1031-15	1/16W 10k ohm
R421	033-1031-15	1/16W 10k ohm
R422	033-1031-15	1/16W 10k ohm
R423	033-1031-15	1/16W 10k ohm
R424	033-1031-15	1/16W 10k ohm
R425	033-1031-15	1/16W 10k ohm
R426	033-1031-15	1/16W 10k ohm
R428	119-2211-15	1/16W 220 ohm
R429	119-1021-15	1/16W 1k ohm
R430	119-1021-15	1/16W 1k ohm
S401	013-6302-50	SKQMAL
S402	013-6302-50	SKQMAL
S403	013-6302-50	SKQMAL
S404	013-6302-50	SKQMAL
S405	013-6302-50	SKQMAL
S406	013-6302-50	SKQMAL
S407	013-6302-50	SKQMAL
S408	013-7415-50	SPVG110400
X401	060-0297-00	PKM13EPP-4002

CD PWB section(B3) : CD changer mechanism

REF No.	PART No.	DESCRIPTION
C2	046-1022-58	1000pF
C3	168-1042-78	16V 0.1 uF
C4	042-0636-54	4V220 uF
C5	168-1042-78	16V 0.1 uF
C6	046-1032-78	0.01 uF
C7	168-1042-78	16V 0.1 uF
C8	178-4742-78	0.47 uF
C9	178-2242-78	0.22 uF
C10	168-1042-78	16V 0.1 uF
C11	168-1042-78	16V 0.1 uF
C12	168-1042-78	16V 0.1 uF
C13	046-2232-78	0.022 uF
C14	168-5612-55	560pF
C15	168-1042-78	16V 0.1 uF
C16	046-2212-58	220pF
C17	046-2212-58	220pF
C18	168-1222-55	1200pF
C19	046-3322-58	3300pF
C20	168-3932-78	0.039 uF
C21	168-3932-78	0.039 uF
C22	042-0416-52	10V10 uF TAN
C25	178-1052-78	1 uF
C26	042-0472-91	16V47 uF
C27	178-3342-78	0.33 uF
C29	168-2732-55	16V 0.027 uF
C30	042-0416-58	4V100 uF
C31	042-0636-52	4V47 uF
C32	046-1022-58	1000pF
C33	046-3322-58	3300pF
C34	168-2732-55	16V 0.027 uF
C35	178-2742-78	0.27 uF
C36	178-1052-78	1 uF
C37	168-1042-78	16V 0.1 uF
C38	042-0472-91	16V47 uF
C39	042-0636-50	6.3V100 uF

REF No.	PART No.	DESCRIPTION
C40	045-1211-50	120pF
C41	045-5601-50	56pF
C42	168-1042-78	16V 0.1 uF
C43	042-0636-52	4V47 uF
C50	168-1042-78	16V 0.1 uF
C51	168-1042-78	16V 0.1 uF
C60	168-5612-55	560pF
D1	001-0367-91	1SS226
IC1	051-6365-00	MN662785TBUC
IC2	051-9318-00	MSM51V17400D-60TS-K
IC2	051-9318-51	K4E160412C-FC60
IC3	051-6060-08	BD7961FM-E2
IC4	051-5711-90	AN8882SB-E1
J1	074-1189-95	45P
J4	074-1138-56	6P
J5	074-1201-65	15P
J6	074-1059-76	26P
L2	010-3050-93	10 uH
L2	010-2155-93	10 uH
Q2	131-1188-00	2SB1188
Q3	131-1188-00	2SB1188
R2	033-1041-15	1/16W 100k ohm
R4	033-3311-15	1/16W 330 ohm
R5	033-1041-15	1/16W 100k ohm
R6	033-3931-15	1/16W 39k ohm
R7	033-1041-15	1/16W 100k ohm
R8	033-5611-15	1/16W 560 ohm
R9	033-5611-15	1/16W 560 ohm
R10	033-1011-15	1/16W 100 ohm
R11	033-3911-15	1/16W 390 ohm
R12	033-2221-15	1/16W 2.2k ohm
R13	033-6831-15	1/16W 68k ohm
R14	033-5621-15	1/16W 5.6k ohm
R15	033-1021-15	1/16W 1k ohm

REF No.	PART No.	DESCRIPTION
R16	033-5631-15	1/16W 56k ohm
R17	033-1031-15	1/16W 10k ohm
R18	033-1031-15	1/16W 10k ohm
R19	033-5621-15	1/16W 5.6k ohm
R20	033-6831-15	1/16W 68k ohm
R21	033-5621-15	1/16W 5.6k ohm
R22	033-1031-15	1/16W 10k ohm
R23	033-1031-15	1/16W 10k ohm
R24	033-4731-15	1/16W 47k ohm
R25	033-3931-15	1/16W 39k ohm
R26	033-6831-15	1/16W 68k ohm
R27	033-6831-15	1/16W 68k ohm
R28	033-1031-15	1/16W 10k ohm
R29	033-2201-15	1/16W 22 ohm
R31	033-8211-15	1/16W 820 ohm
R32	033-5631-15	1/16W 56k ohm
R33	033-6831-15	1/16W 68k ohm
R34	033-3331-15	1/16W 33k ohm
R35	033-6831-15	1/16W 68k ohm
R38	033-3931-15	1/16W 39k ohm
R39	033-1831-15	1/16W 18k ohm
R40	117-1001-15	1/10W 10 ohm
R41	033-6821-15	1/16W 6.8k ohm
R42	033-6821-15	1/16W 6.8k ohm
R43	033-1241-15	1/16W 120k ohm
R44	033-6831-15	1/16W 68k ohm
R45	116-4711-15	1/8W 470 ohm
R46	117-1811-15	1/10W 180 ohm
R47	116-4711-15	1/8W 470 ohm
R48	033-1031-15	1/16W 10k ohm
R49	033-1011-15	1/16W 100 ohm
R60	033-1031-15	1/16W 10k ohm
TM1	073-0768-90	TERMIMAL
X1	060-1527-90	33.8688MHz

Sensor PWB section(B4) : CD changer mechanism

REF No.	PART No.	DESCRIPTION
PT3	060-0252-01	PT4850F
PT4	060-0252-01	PT4850F

REF No.	PART No.	DESCRIPTION
PT5	060-0252-01	PT4850F
PT6	060-0252-01	PT4850F

REF No.	PART No.	DESCRIPTION
S1	013-7414-50	SPVG22

PIM-FPC section(B5) : CD changer mechanism

REF No.	PART No.	DESCRIPTION
IC5	051-5806-02	GPIS95

Driver PWB section(B6) : CD changer mechanism

REF No.	PART No.	DESCRIPTION
C1	168-1045-56	0.1 uF
C2	163-1073-35	16V100 uF
D1	001-0529-29	MA8051-M
IC1	051-6044-18	BA6920FP-Y

REF No.	PART No.	DESCRIPTION
J1	074-1239-76	26P
J2	074-1100-59	9P
R1	033-1021-15	1/16W 1k ohm
R2	032-0104-59	1/4W 2.2 ohm

REF No.	PART No.	DESCRIPTION
R3	032-0104-59	1/4W 2.2 ohm
S1	013-7412-50	SPVG21

PIV-FPC section(B7) : CD changer mechanism

REF No.	PART No.	DESCRIPTION
IC6	051-5806-01	GPIS93

LED-L-PWB section(B8) : CD changer mechanism

REF No.	PART No.	DESCRIPTION
LED3	001-7042-00	GL4800

REF No.	PART No.	DESCRIPTION
LED4	001-7042-00	GL4800

REF No.	PART No.	DESCRIPTION

LED-R-PWB section(B9) : CD changer mechanism

REF No.	PART No.	DESCRIPTION
LED5	001-7042-00	GL4800

REF No.	PART No.	DESCRIPTION
LED6	001-7042-00	GL4800

REF No.	PART No.	DESCRIPTION

L-Motor-FPC section(B10) : CD changer mechanism

REF No.	PART No.	DESCRIPTION
M1	SMA-186-100	LOADING

M/S-FPC section(B11) : CD changer mechanism

REF No.	PART No.	DESCRIPTION
M2	SMA-185-100	SPINDLE

REF No.	PART No.	DESCRIPTION
M3	SMA-184-100	SLED

REF No.	PART No.	DESCRIPTION
S2	013-7414-50	SPVG22

EXPLODED VIEW/PARTS LIST


CD changer mechanism section : Main chassis


NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-521-100	LOADING UNIT (WITHOUT MOTOR)	1
2	SMA-186-100	LOADING MOTOR ASSY	1
3	HBS-512-100	MOTOR PLATE SUB ASSY	1
4	HBS-513-103	DRIVE UNIT	1
5	039-2233-00	CD PWB (WITHOUT COMPONENT)	1
6	039-2242-00	DRIVER PWB (WITHOUT COMPONENT)	1
7	966-0597-23	CHASSIS ASSY	1
8	966-0600-21	LOCK-P-RE-ASSY	1
9	966-0601-21	M-GEAR-P-ASSY	1
10	966-0602-23	DR-LINK-ASSY	1
11	966-0603-20	MODE-P-ASSY	1
12	966-0604-22	LOCK-PF-ASSY	1
13	966-0605-20	SHIFT-P-ASSY	1
14	966-0606-23	HLC-PLATE-ASSY	1
15	966-0607-24	COV-OLATE-ASSY	1
16	966-0610-06	TOP-PLATE-ASSY	1

NO.	PART NO.	DESCRIPTION	Q'TY
17	966-0611-05	DR-BASE-P-ASSY	1
18	966-0615-21	LOCK-L-RF-ASSY	1
19	966-0616-20	LOCK-L-LF-ASSY	1
20	966-0618-21	EJECT-B-ASSY	1
21	966-0624-25	DISC-HOL-ASSY	1
22	001-7042-00	DIODE (GL4800)	4
23	013-7414-50	DETECTOR SWITCH	1
24	039-1954-00	LED-L-PWB (WITHOUT COMPONENT)	1
25	039-1955-00	LED-R-PWB (WITHOUT COMPONENT)	1
26	039-1956-00	SENSOR PWB (WITHOUT COMPONENT)	1
27	039-2009-00	PIM FPC	1
28	039-2010-00	RIV-FOC	1
29	039-2011-00	LED-FPC	1
30	039-2012-00	SENSOR-FPC	1
31	039-2013-01	MOS-FPC	1
32	039-2014-00	L-MOTOR-FPC (WITHOUT COMPONENT)	1

NO.	PART NO.	DESCRIPTION	Q'TY
33	051-5806-01	IC (GPIS93)	1
34	051-5806-02	IC (GPIS95)	1
35	060-0252-01	PHOTO-TR	4
36	347-6657-01	LO-COVER SHEET	1
37	620-1041-23	GEAR PLATE	1
38	620-1042-20	M-GEAR-H	1
39	620-1056-01	HLR-PLATE-L	1
40	620-1580-00	HLR-PLATE-R	1

NO.	PART NO.	DESCRIPTION	Q'TY
41	620-1576-20	LO-MOTOR-PLT	1
42	620-1066-20	LOCK LINK-LR	1
43	620-1067-01	SLIDE PLATE-L	1
44	620-1068-22	SLIDE PLATE-R	1
45	620-1071-21	EJECT ARM	1
46	620-1072-20	EJECT PLATE	1
47	620-1577-00	FRONT PLATE	1
48	620-1083-20	FPC-PLATE	1

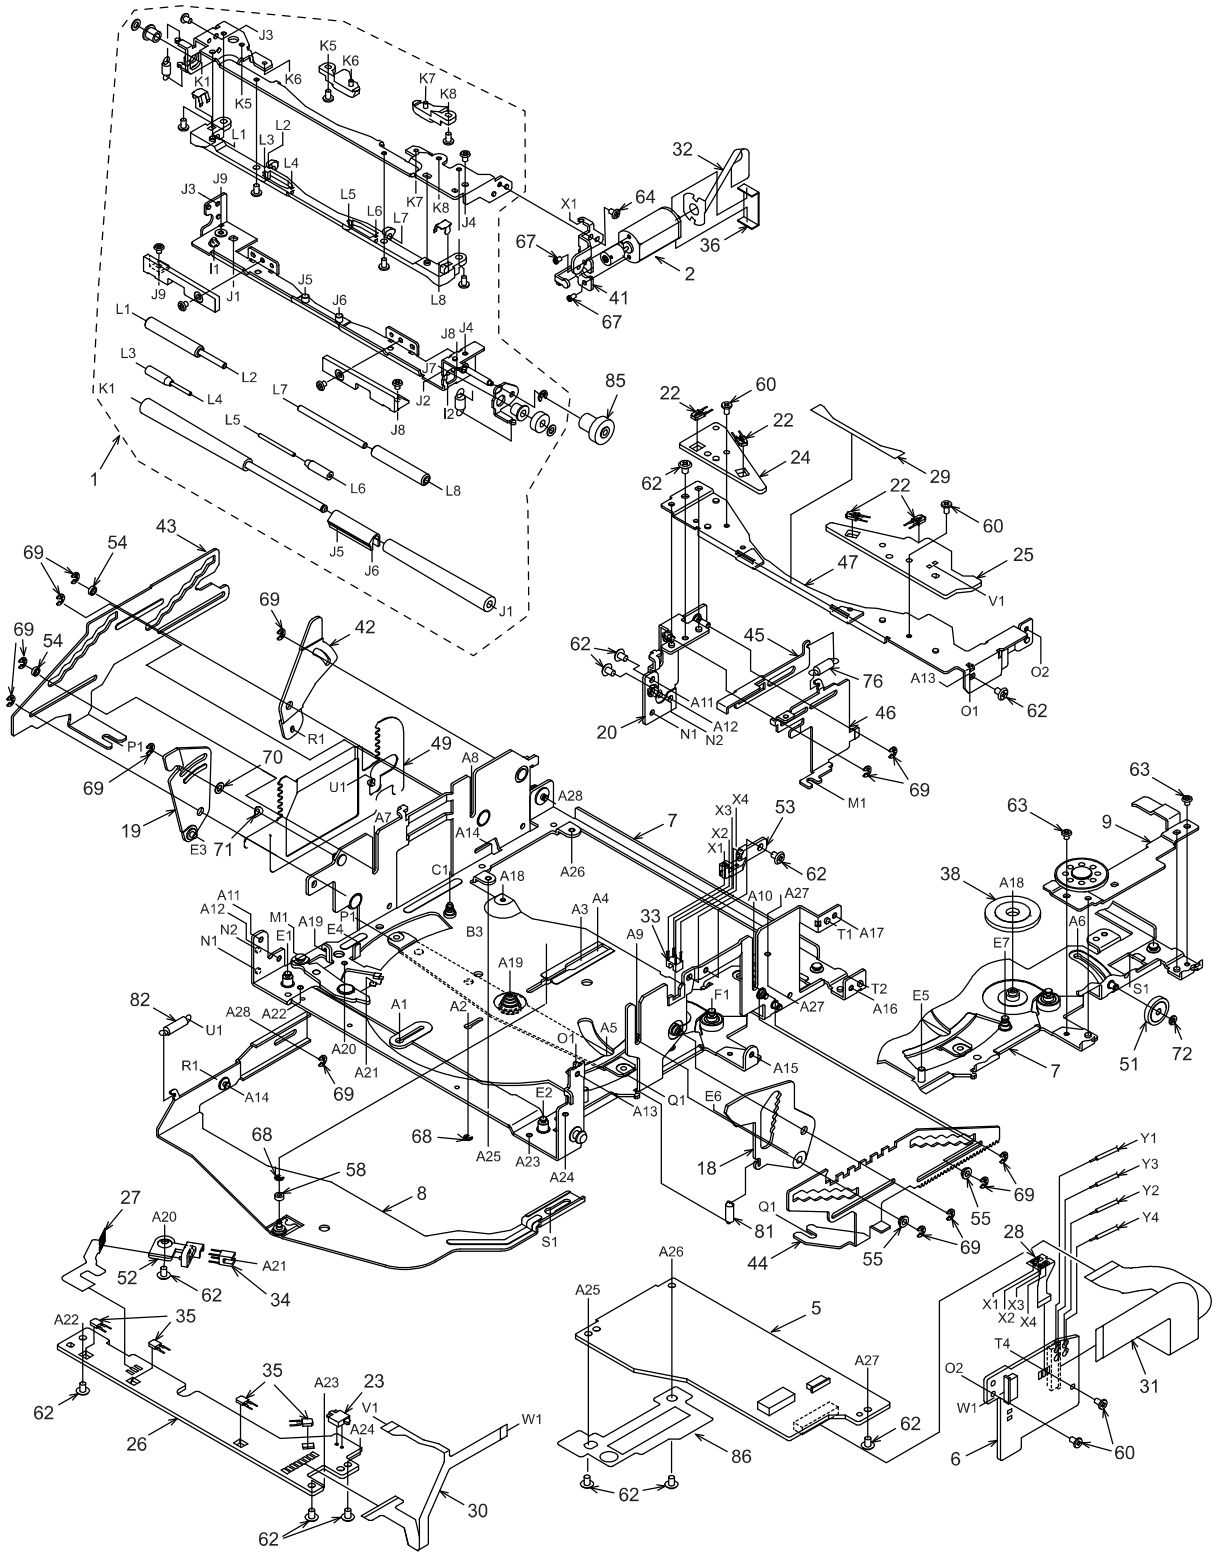


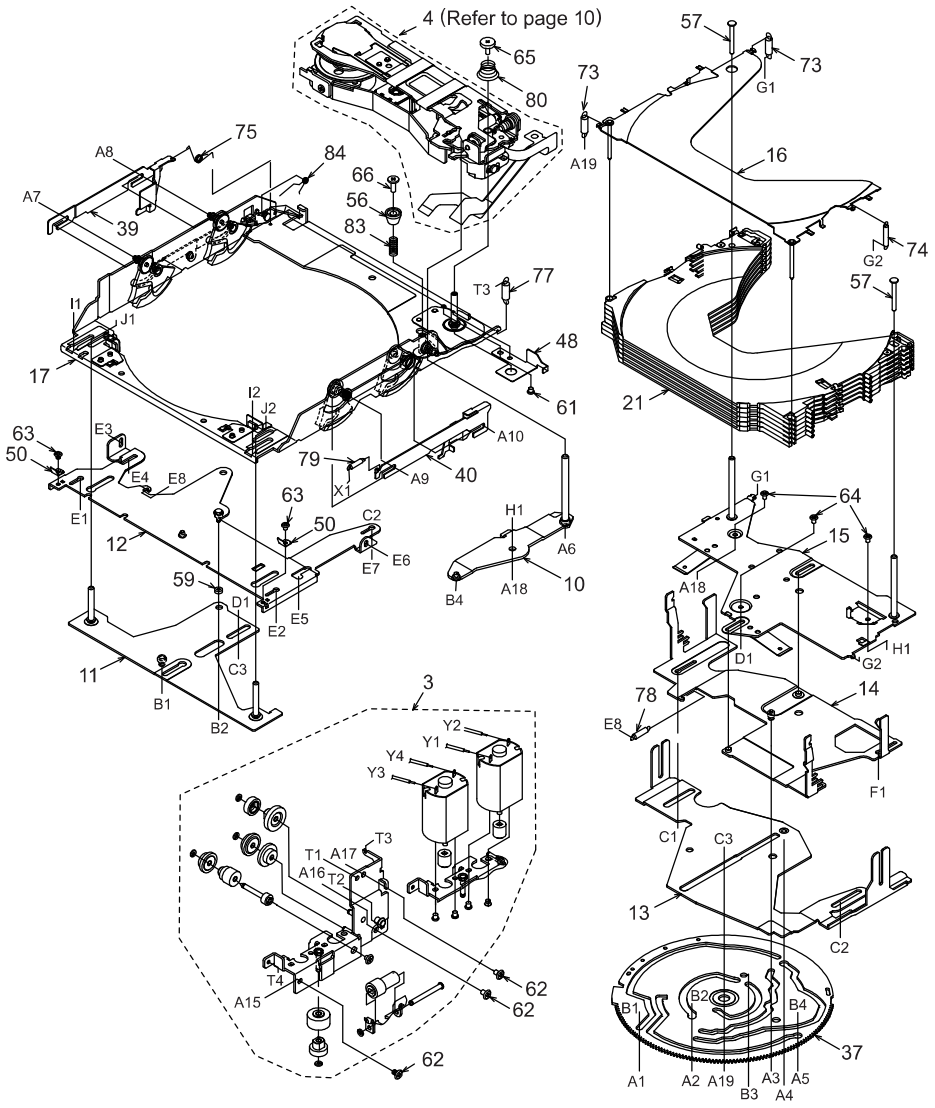

NO.	PART NO.	DESCRIPTION	Q'TY
49	620-1090-20	GAP PLATE	1
50	620-1568-20	RATTLE PLATE-F	2
51	621-0640-20	V-GEAR-G	1
52	621-0641-21	PI-HOLDER-M	1
53	621-0656-21	PI-HOLDER-V	1
54	622-1622-00	SL-G-ROLLER	2
55	622-1623-00	SL-G-ROLLER-R	2
56	622-1648-02	DU-STP-SLEEVE	1
57	622-1650-02	COV-PLATE PIN-B	2
58	622-1651-00	LOCK-RE-ROLLER	1
59	622-1652-00	LOCK-PF-ROLLER	1
60	716-1866-00	SCREW(M1.7 x3)	4
61	716-1873-00	SCREW(M2 x1.6)	1
62	716-3449-00	SCREW(M2 x3)	15
63	716-3450-00	SCREW(M1.7 x2)	4
64	716-3451-00	SCREW(M1.7 x2.5)	3
65	716-3459-00	SCREW(M1.7 x5)	1
66	716-3466-02	SCREW	1
67	738-1422-11	PRECISION SCREW	2

NO.	PART NO.	DESCRIPTION	Q'TY
68	743-1200-20	E-RING	2
69	743-1500-20	E-RING	13
70	746-0624-00	WASHER	1
71	746-0712-03	WASHER	1
72	746-0761-00	WASHER	1
73	750-3478-01	TOP-P-SP-L	2
74	750-3479-01	TOP-P-SP-R	1
75	750-3480-01	DR-LOCK-SP	1
76	750-3483-00	EJECT-A-SPRING	1
77	750-3484-01	DR-BASE-SPRING	1
78	750-3485-01	TENSION-SP-L	1
79	750-3486-01	LO-TENSION-SP	1
80	750-3489-01	DRIVE-P-SPRING	1
81	750-3496-00	GAP-P-SPRING R	1
82	750-3497-00	GAP-P-SPRING L	1
83	750-6711-01	DU-STP-SPRING	1
84	750-6712-01	DR-LOCK-SP-B	1
85	621-0651-22	LOAD GEAR-A	1
86	347-6974-00	FPC COVER	1

CD changer mechanism section : Drive unit

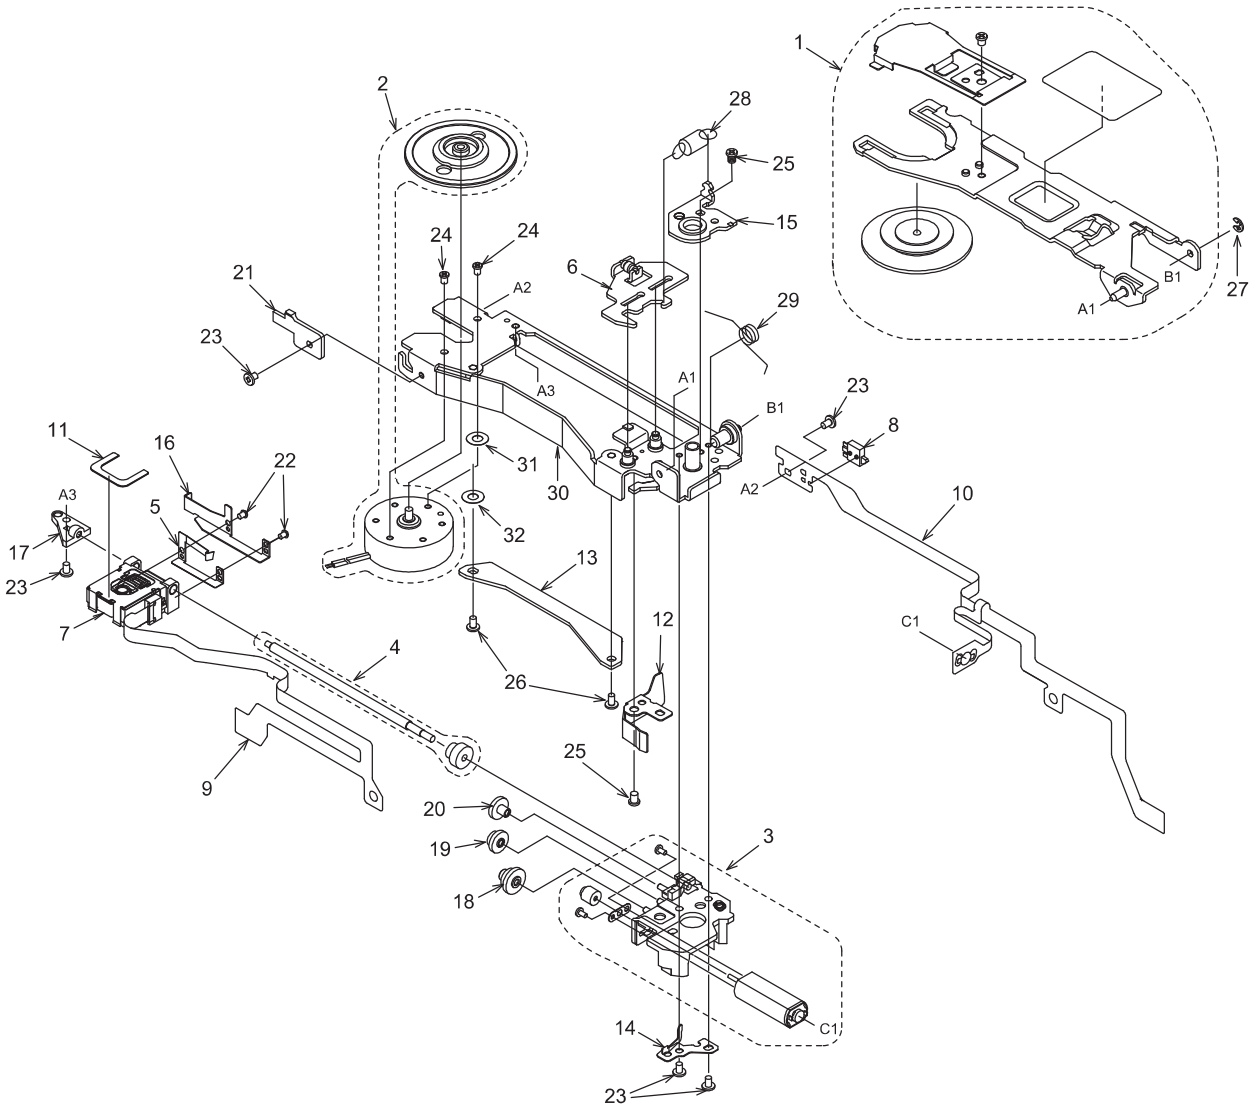

NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-514-100	CLAMPER SUB ASSY	1
2	SMA-185-100	SPINDLE MOTOR ASSY	1
3	SMA-184-100	SLED MOTOR ASSY	1
4	HBS-515-101	LS-ASSY	1
5	620-1587-00	SH-SP-PLT	1
6	966-0622-02	D-SHIFT-P-ASSY	1
7	969-0009-00	PICK UP-ASSY	1
8	013-7414-50	DETECT SWITCH	1
9	039-2015-01	P/U-FPC	1
10	039-2016-01	M/S-FPC	1
11	347-6632-00	PU-SHEET	1
12	620-1078-20	PUSH PLATE	1
13	620-1080-21	PU-GUIDE PLATE	1
14	620-1081-20	SCREW PUSH-PLT	1
15	620-1082-22	SPRING PLATE	1
16	620-1588-20	SCREW-HOL-PLT	1

NO.	PART NO.	DESCRIPTION	Q'TY
17	621-0670-20	LS-HOLDER-L	1
18	621-0673-20	D-GEAR A	1
19	621-0674-20	D-GEAR B	1
20	621-0675-20	D-GEAR C	1
21	621-0683-21	DU-STOPPER	1
22	716-3460-00	SCREW(M1.4 x 1.8)	2
23	716-3470-00	SCREW(M1.7 x 3)	5
24	738-1722-17	PRECISION SCREW	2
25	738-2025-17	PRECISION SCREW	2
26	716-3474-00	SCREW(M1.7 x 3)	2
27	743-1500-20	E-RING	1
28	750-3487-00	SHIFT-P-SPRING	1
29	750-3504-00	CLAMP-A-SPRING	1
30	966-0619-24	DRIVE PLT-ASSY	1
31	745-0807-00	WASHER	1
32	745-0808-00	WASHER	1